



TEST REPORT

| | |
|-----------------------------|--|
| Report Number | : TZ0035250629FRF18 |
| Product Name | : R/C CAR |
| Model/Type reference | : (Series Model refer to page 5) |
| FCC ID | : 2BQDRR1000 |
| Prepared for | : Runchengfeng Toy Factory Kangyang Toy Factory, Lanwan Industrial Zone, Lianshang Town, Chenghai District, Shantou City, Guangdong Province, China |

| | |
|----------------------|---|
| Prepared By | : Shenzhen Tongzhou Testing Co.,Ltd. 1st Floor, Building 1, Haomai High-tech Park, Huating Road 387, Dalang Street, Longhua, Shenzhen, China |
| Standards | : FCC CFR Title 47 Part 15 Subpart C, ANSI C63.10: 2013 |
| Date of Test | : 2025-06-17 ~ 2025-06-25 |
| Date of Issue | : 2025-06-26 |
| Prepared by | : Lena Wen |
| Reviewed by | : Allen Lai |
| Approved by | : Max Zhang (Authorized Officer) |



This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Tongzhou Testing Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Tongzhou Testing Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.
The test report apply only to the specific sample(s) tested under stated test conditions.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Report No.: TZ0035250629FRF18

**** Report Revise Record ****

| Report Version | Revise Time | Issued Date | Valid Version | Notes |
|----------------|-------------|-------------|---------------|-----------------|
| V1.0 | / | 2025-06-26 | Valid | Initial release |



TABLE OF CONTENTS

| | |
|--|-----------|
| 1. GENERAL INFORMATION | 4 |
| 1.1. Client Information | 4 |
| 1.2. Description of Device (EUT)..... | 5 |
| 1.3. Wireless Function Tested in this Report..... | 6 |
| 1.4. EUT configuration..... | 6 |
| 1.5. Description of Test Facility | 6 |
| 1.6. Statement of the Measurement Uncertainty..... | 7 |
| 1.7. Measurement Uncertainty | 7 |
| 1.8. Description of Test Modes | 7 |
| 2. TEST METHODOLOGY | 8 |
| 2.1. EUT Configuration | 8 |
| 2.2. EUT Exercise | 8 |
| 2.3. Test Sample | 8 |
| 3. SYSTEM TEST CONFIGURATION | 9 |
| 3.1. Justification..... | 9 |
| 3.2. Special Accessories | 9 |
| 3.3. Block Diagram/Schematics..... | 9 |
| 3.4. Equipment Modifications | 9 |
| 3.5. Configuration of Tested System..... | 9 |
| 4. SUMMARY OF TEST RESULTS | 10 |
| 5. TEST RESULT | 11 |
| 5.1. Bandwidth Measurement | 11 |
| 5.2. Radiated Emissions Measurement..... | 13 |
| 5.3. AC Power line conducted emissions..... | 19 |
| 5.4. Antenna Requirements..... | 20 |
| 6. LIST OF MEASURING EQUIPMENTS | 21 |
| 7. TEST SETUP PHOTOGRAPHS OF EUT | 22 |
| 8. EXTERIOR PHOTOGRAPHS OF EUT | 22 |
| 9. INTERIOR PHOTOGRAPHS OF EUT..... | 22 |



1. GENERAL INFORMATION

1.1. Client Information

| | |
|--------------|--|
| Applicant | : Runchengfeng Toy Factory |
| Address | : Kangyang Toy Factory, Lanwan Industrial Zone, Lianshang Town, Chenghai District, Shantou City, Guangdong Province, China |
| Manufacturer | : Runchengfeng Toy Factory |
| Address | : Kangyang Toy Factory, Lanwan Industrial Zone, Lianshang Town, Chenghai District, Shantou City, Guangdong Province, China |



1.2. Description of Device (EUT)

| | |
|-------------------|--|
| Product Name | : R/C CAR |
| Trade Mark | : / |
| Model Number | : R1000-6-7-8-9-10, MT1596, R1000-1-2-3-4-5, R1000-11-12-13-14-15, R1000-16-17-18-19-20, R1000-21-22-23-24-25, R1000-26-27-28-29-30, R1000-31-32-33-34-35, R1000-36-37-38-39-40, R1000-41-42-43-44-45, R1000-46-47-48-49-50, R1000-51-52-53-54-55, R1000-56-57-58-59-60, R1000-61-62-63-64-65, R1000-66-67-68-69-70, R1000-71-72-73-74-75, R1000-76-77-78-79-80, R1000-81-82-83-84-85, R1000-86-87-88-89-90, R1000-91-92-93-94-95, R1000-96-97-98-99-100, 1000-1-2-3-4-5, 1000-6-7-8-9-10, 1000-11-12-13-14-15, 1000-16-17-18-19-20, 1000-21-22-23-24-25, 1000-26-27-28-29-30, 1000-31-32-33-34-35, 1000-36-37-38-39-40, 1000-41-42-43-44-45, 1000-46-47-48-49-50, R1001-1-2-3-4-5, R1001-6-7-8-9-10, R1001-11-12-13-14-15, R1001-16-17-18-19-20, R1001-21-22-23-24-25, R1001-26-27-28-29-30, R1001-31-32-33-34-35, R1001-36-37-38-39-40, R1001-41-42-43-44-45, R1001-46-47-48-49-50, R1019-1-2-3-4-5, R1019-6-7-8-9-10, R1019-11-12-13-14-15, R1019-16-17-18-19-20, R1019-21-22-23-24-25, R1019-26-27-28-29-30, R1019-31-32-33-34-35, R1019-36-37-38-39-40, R1019-41-42-43-44-45, R1019-46-47-48-49-50, R1020-1-2-3-4-5, R1020-6-7-8-9-10, R1020-11-12-13-14-15, R1020-16-17-18-19-20, R1020-21-22-23-24-25, R1020-26-27-28-29-30, R1020-31-32-33-34-35, R1020-36-37-38-39-40, R1020-41-42-43-44-45, R1020-46-47-48-49-50, R1019-1A-2A-3A-4A-5A, R1019-6A-7A-8A-9A-10A, R1019-11A-12A-13A-14A-15A, R1019-16A-17A-18A-19A-20A, R1019-21A-22A-23A-24A-25A, R1019-26A-27A-28A-29A-30A, R1019-31A-32A-33A-34A-35A, R1019A-36A-37A-38A-39A-40A, R1019-41A-42A-43A-44A-45A, R1019-46A-47A-48A-49A-50A, R1020-1A-2A-3A-4A-5A, R1020-6A-7A-8A-9A-10A, R1020-11A-12A-13A-14A-15A, R1020-16A-17A-18A-19A-20A, R1020-21A-22A-23A-24A-25A, R1020-26A-27A-28A-29A-30A, R1020-31A-32A-33A-34A-35A, R1020A-36A-37A-38A-39A-40A, R1020-41A-42A-43A-44A-45A, R1020-46A-47A-48A-49A-50A, R958-1-2-3-4-5, R958-6-7-8-9-10, R958-11-12-13-14-15, R958-16-17-18-19-20, R958-21-22-23-24-25, R958-26-27-28-29-30, R958-31-32-33-34-35, R958-36-37-38-39-40, R958-41-42-43-44-45, R958-46-47-48-49-50, R968-1-2-3-4-5, R968-6-7-8-9-10, R968-11-12-13-14-15, R968-16-17-18-19-20, R968-21-22-23-24-25, R968-26-27-28-29-30, R968-31-32-33-34-35, R968-36-37-38-39-40, R968-41-42-43-44-45, R968-46-47-48-49-50 |
| Model Declaration | : The exterior color is different, and the internal circuit is exactly the same. |
| Test Model | : R1000-6-7-8-9-10 |
| Power Supply | : DC 3V by 1.5V*2 battery |
| Hardware version | : V1.0 |
| Software version | : 99SE |



1.3. Wireless Function Tested in this Report

Short Range Device

Operation Frequency : 27.145MHz

Modulation Technology : ASK

Antenna Type and Gain : Helix antenna with 0dBi Gain

Note 1: Antenna position refer to EUT Photos.

Note 2: the above information was supplied by the applicant.

1.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

supplied by the manufacturer

supplied by the lab

| | | | |
|-----------------------|---------|---------|---|
| <input type="radio"/> | Adapter | Model: | / |
| | | Input: | / |
| | | Output: | / |

1.5. Description of Test Facility

FCC

Designation Number: CN1275

Test Firm Registration Number: 167722

Shenzhen Tongzhou Testing Co.,Ltd has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA

Certificate Number: 5463.01

Shenzhen Tongzhou Testing Co.,Ltd has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

IC

ISED#: 22033

CAB identifier: CN0099

Shenzhen Tongzhou Testing Co.,Ltd has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4 and CISPR 16-1-4:2010



1.6. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the Shenzhen Tongzhou Testing Co.,Ltd's quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.7. Measurement Uncertainty

| Test Item | | Uncertainty | Note |
|--------------------------------------|---|-------------|------|
| Radiation Uncertainty(9KHz~30MHz) | : | ±3.26dB | (1) |
| Radiation Uncertainty(30MHz~1000MHz) | : | ±3.92dB | (1) |
| Occupied Channel Bandwidth | : | ±3.0% | (1) |

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.8. Description of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

| Test Modes: | | |
|---|---------------------------|--------|
| Mode 1 | Transmitting at 27.145MHz | Record |
| Note: | | |
| All test modes were pre-tested, but we only recorded the worst case in this report. | | |



2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen Tongzhou Testing Co.,Ltd

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209, 15.227 under the FCC Rules Part 15 Subpart C.

2.3. Test Sample

| Sample ID | Description |
|-----------------|---------------|
| TZ0035250629-1# | Normal sample |



3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmits condition.

3.2. Special Accessories

| No. | Equipment | Manufacturer | Model No. | Serial No. | Length | shielded/ unshielded | Notes |
|-----|-----------|--------------|-----------|------------|--------|-------------------------|-------|
| / | / | / | / | / | / | / | / |

3.3. Block Diagram/Schematics

Please refer to the related document

3.4. Equipment Modifications

Shenzhen Tongzhou Testing Co.,Ltd has not done any modification on the EUT.

3.5. Configuration of Tested System





4. SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Sample ID | Result |
|--------------------|-------------------------------|-----------------|------------------------------|
| 15.227(a) | Field Strength of Fundamental | TZ0035250629-1# | Compliant |
| §15.209&§15.205(a) | Radiated Emission | TZ0035250629-1# | Compliant |
| §15.231(c) | -20dB Bandwidth | TZ0035250629-1# | Compliant |
| §15.207(a) | Conducted Emissions | TZ0035250629-1# | Not applicable (See Note) |
| §15.203 | Antenna Requirements | TZ0035250629-1# | Compliant |

Note: The EUT is only powered by battery.

Remark: The measurement uncertainty is not included in the test result.


5. TEST RESULT

5.1. Bandwidth Measurement

5.1.1. Standard Applicable

Intentional radiators must be designed to ensure that the 20dB emission bandwidth in the specific band 26.98~27.28MHz.

5.1.2. Block Diagram of Test Setup

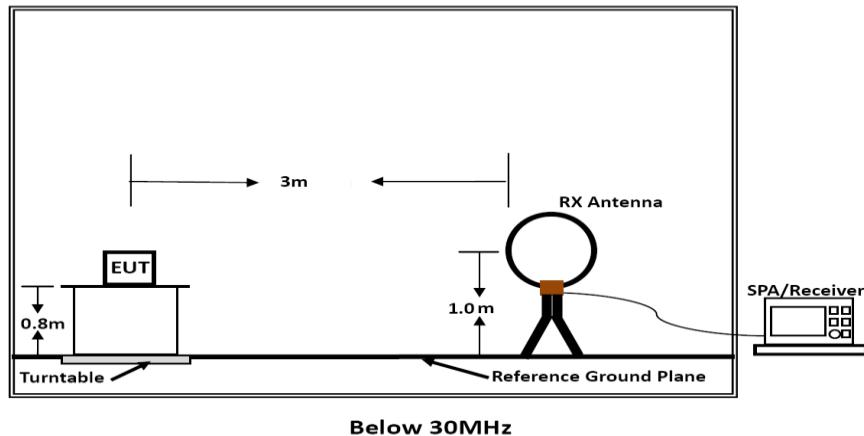

5.1.3. Test Procedures

1. Set the parameters of SPA as below:
2. Centre frequency = Operation Frequency
3. RBW=200Hz, VBW=620Hz
4. Span: 60kHz
5. Sweep time: Auto
6. Set the EUT to continue transmitting mode. Allow the trace to stabilize. Use the "N dB down" function of SPA to define the bandwidth.
7. Record the plots and Reported.

5.1.4. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.



5.1.5. Test Result

| | | | |
|---------------|----------|----------------|--------|
| Temperature | 22.8°C | Humidity | 55% |
| Test Engineer | Tony Luo | Configurations | Mode 1 |
| Test Volgate | DC 3V | / | / |

| Mode | Freq (MHz) | -20dB Bandwidth (Hz) | Limit (kHz) | Conclusion |
|---------|------------|----------------------|-------------|------------|
| Tx Mode | 27.137 | 7.091 | N/A | PASS |

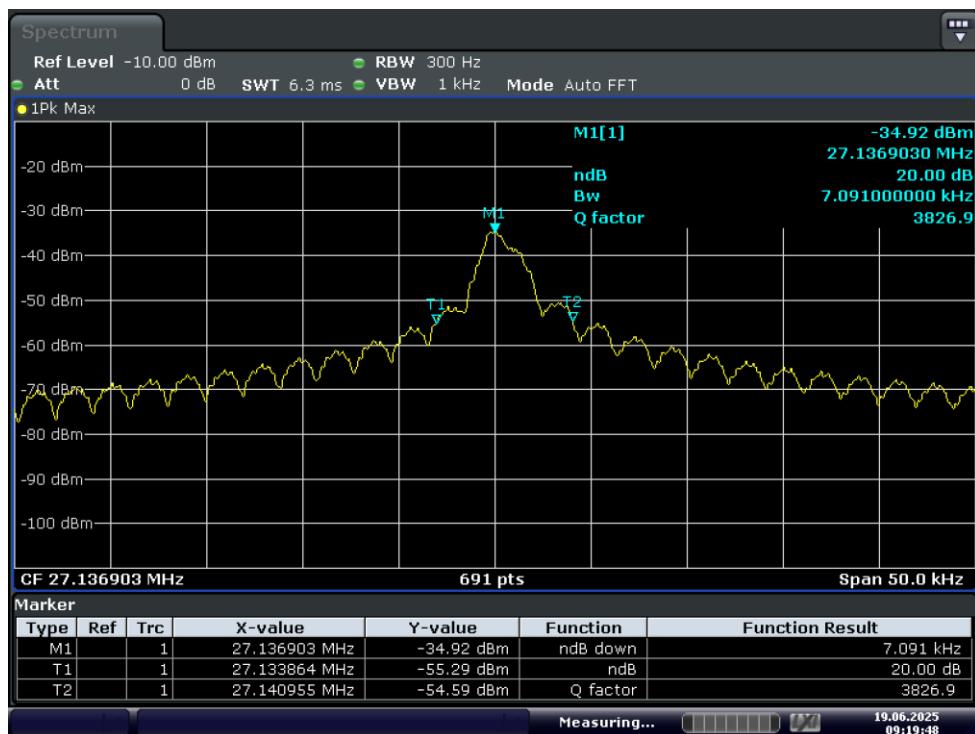



5.2. Radiated Emissions Measurement

5.2.1. Standard Applicable

15.227

(a) The field strength of any emission within this band shall not exceed 10,000 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

(b) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in §15.209.

15.209(a):

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |



5.2.2. Measuring Instruments and Setting

The following table is the setting of spectrum analyzer and receiver.

| Receiver Parameter | Setting |
|------------------------|--|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG |
| Start ~ Stop Frequency | 150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB/VB 120kHz/1MHz for QP |

5.2.3. Block Diagram of Test Setup

For radiated emissions below 30MHz

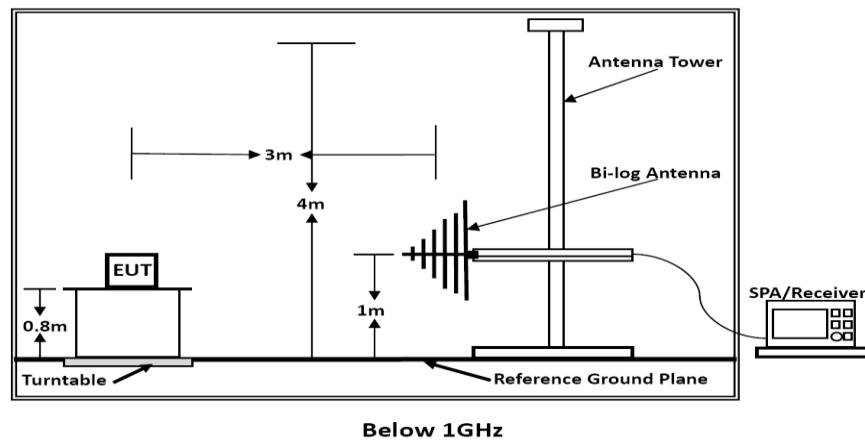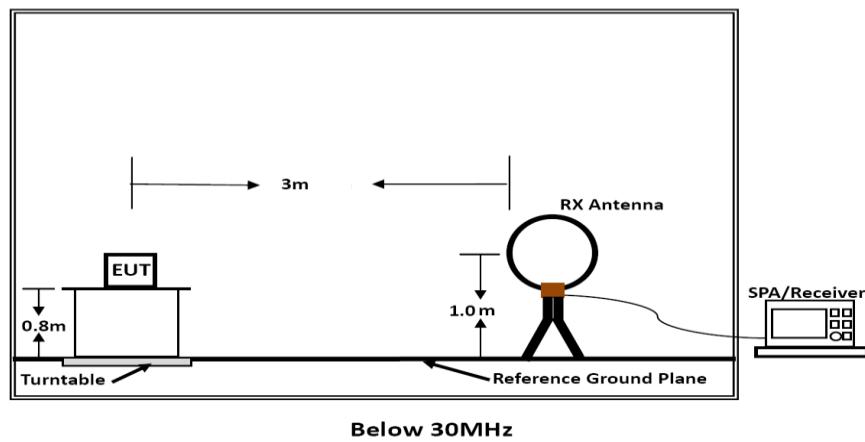



5.2.4. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premereasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.0 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premereasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.


3) EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.2.5. Test Results

**Results of Radiated Emissions (9 KHz~30MHz)**

| | | | |
|---------------|----------|----------------|--------|
| Temperature | 22.5 °C | Humidity | 56% |
| Test Engineer | Tony Luo | Configurations | Mode 1 |
| Test Volgate | DC 3V | / | / |

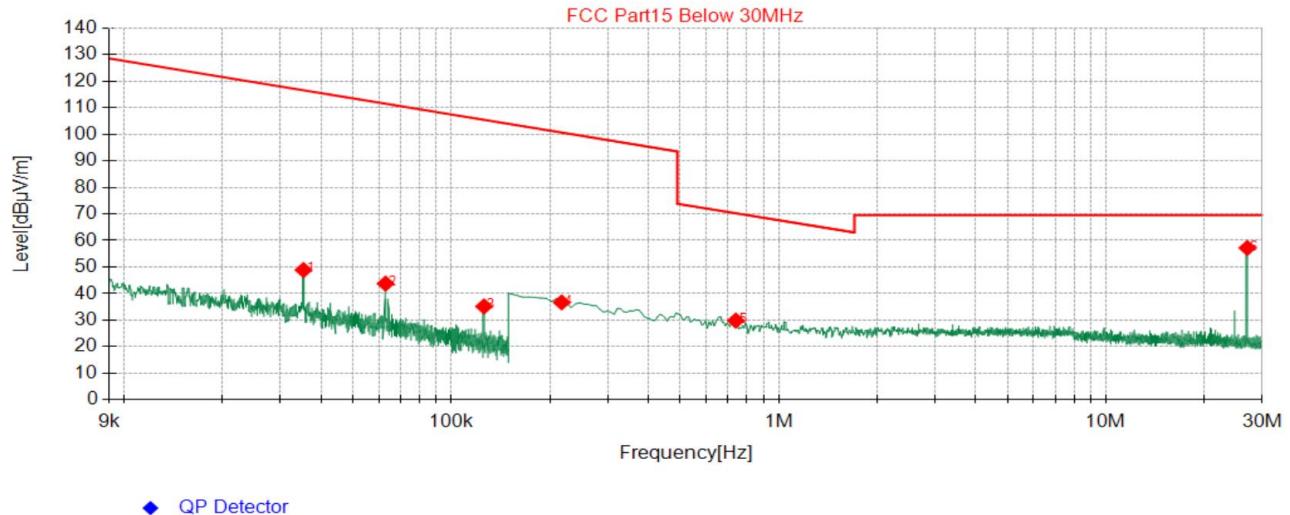**Suspected Data List**


| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] |
|-----|-------------|----------------|---------------|----------------|----------------|-------------|-------------|-----------|
| 1 | 0.0353 | 28.71 | 20.15 | 48.86 | 116.54 | 67.68 | 100 | 265 |
| 2 | 0.0629 | 23.27 | 20.49 | 43.76 | 111.48 | 67.72 | 100 | 142 |
| 3 | 0.1258 | 15.29 | 19.87 | 35.16 | 105.41 | 70.25 | 100 | 337 |
| 4 | 0.2172 | 16.70 | 19.98 | 36.68 | 100.63 | 63.95 | 100 | 35 |
| 5 | 0.7395 | 9.54 | 20.30 | 29.84 | 70.23 | 40.39 | 100 | 81 |
| 6 | 27.137 | 38.10 | 19.09 | 57.19 | 80.00 | 22.81 | 100 | 93 |


Note:Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).Limit line = specific limits (dB μ V) + distance extrapolation factor.

Measured at antenna position coaxial and coplanar, only record the Coaxial.

**Results of Radiated Emissions (30MHz~1GHz)**

| | | | |
|---------------|----------|----------------|--------|
| Temperature | 22.5 °C | Humidity | 56% |
| Test Engineer | Tony Luo | Configurations | Mode 1 |
| Test Volgate | DC 3V | / | / |

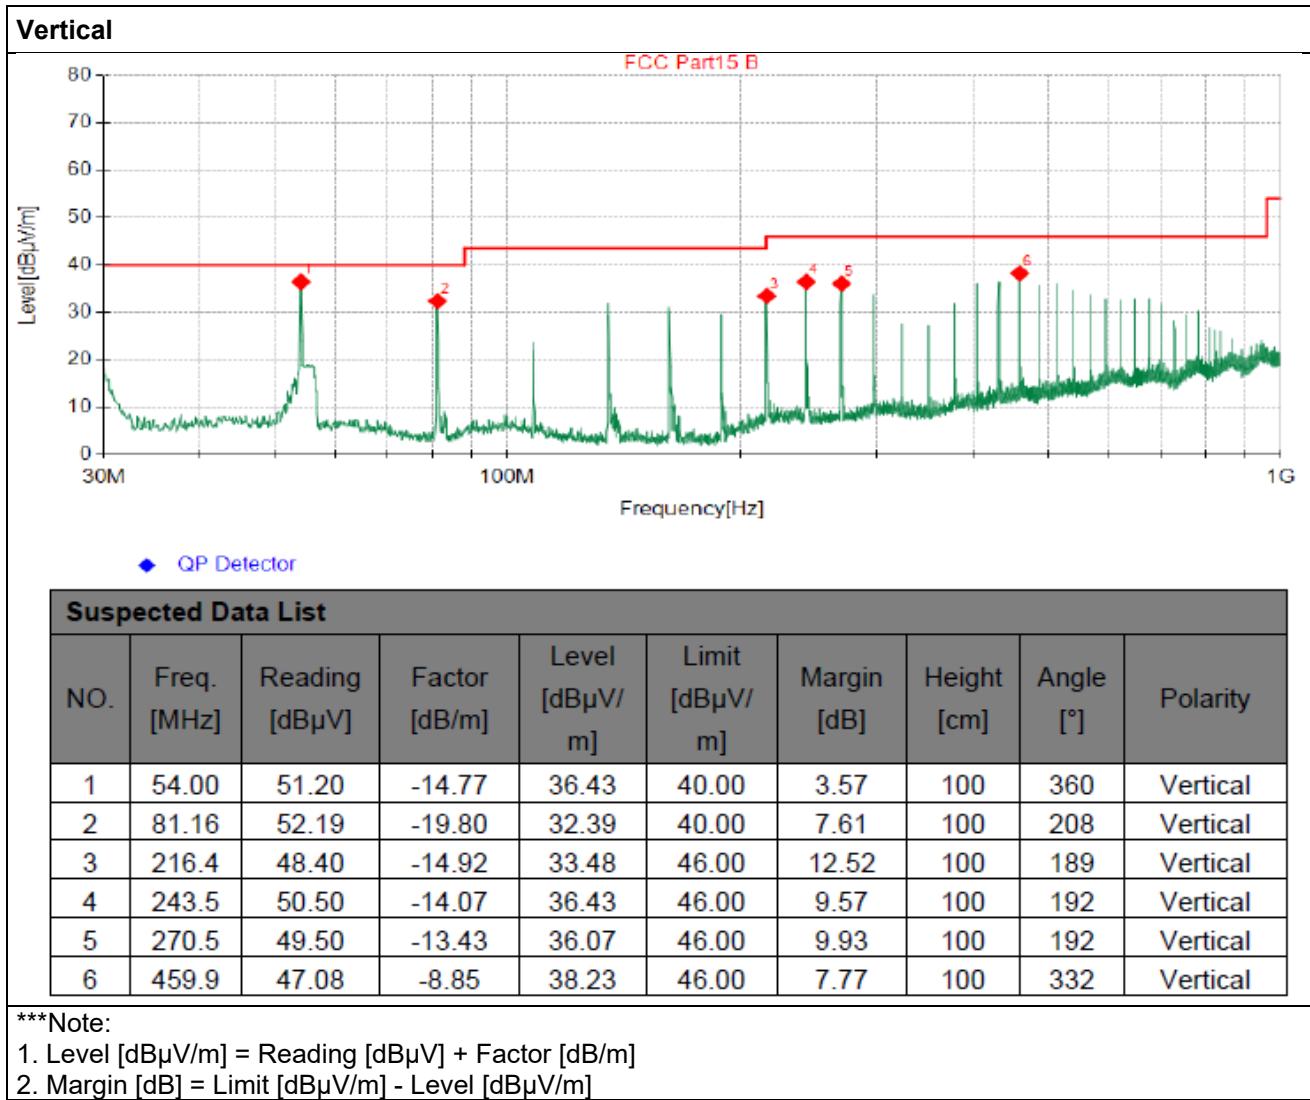

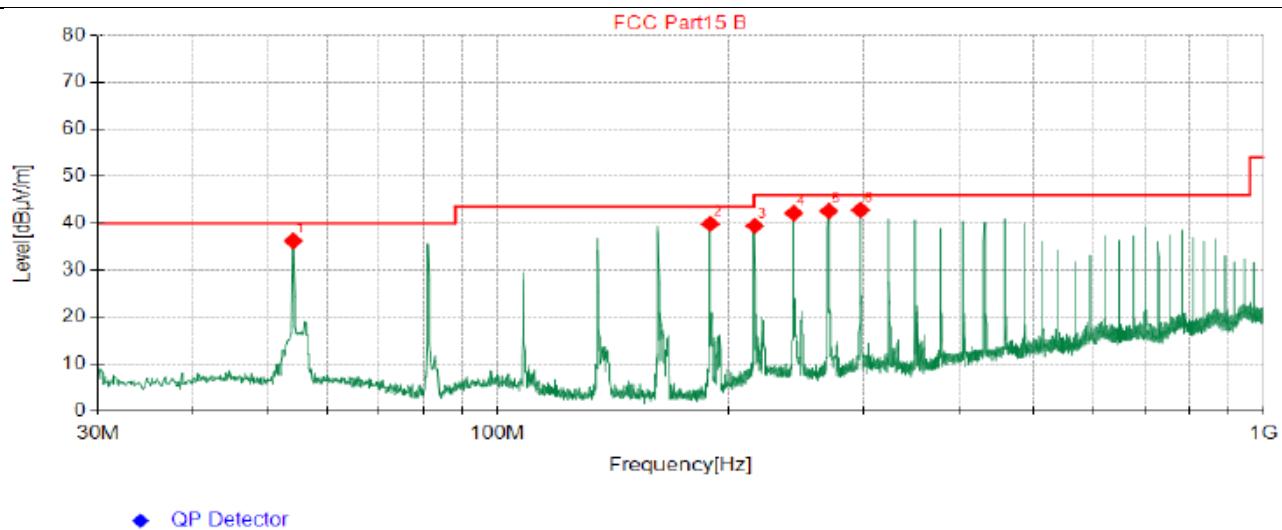**Horizontal****Suspected Data List**

| NO. | Freq. [MHz] | Reading [dB μ V] | Factor [dB/m] | Level [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-------------|----------------------|---------------|----------------------|----------------------|-------------|-------------|-----------|------------|
| 1 | 54.00 | 51.01 | -14.77 | 36.24 | 40.00 | 3.76 | 100 | 266 | Horizontal |
| 2 | 189.3 | 56.37 | -16.51 | 39.86 | 43.50 | 3.64 | 100 | 272 | Horizontal |
| 3 | 216.4 | 54.37 | -14.92 | 39.45 | 46.00 | 6.55 | 100 | 272 | Horizontal |
| 4 | 243.5 | 56.20 | -14.07 | 42.13 | 46.00 | 3.87 | 100 | 80 | Horizontal |
| 5 | 270.5 | 56.01 | -13.43 | 42.58 | 46.00 | 3.42 | 100 | 276 | Horizontal |
| 6 | 297.5 | 55.67 | -12.86 | 42.81 | 46.00 | 3.19 | 100 | 77 | Horizontal |

***Note:

1. Level [dB μ V/m] = Reading [dB μ V] + Factor [dB/m]2. Margin [dB] = Limit [dB μ V/m] - Level [dB μ V/m]

5.3. AC Power line conducted emissions


5.3.1. Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

| Frequency Range (MHz) | Limits (dB μ V) | |
|--------------------------|---------------------|----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

* Decreasing linearly with the logarithm of the frequency

5.3.2. Block Diagram of Test Setup

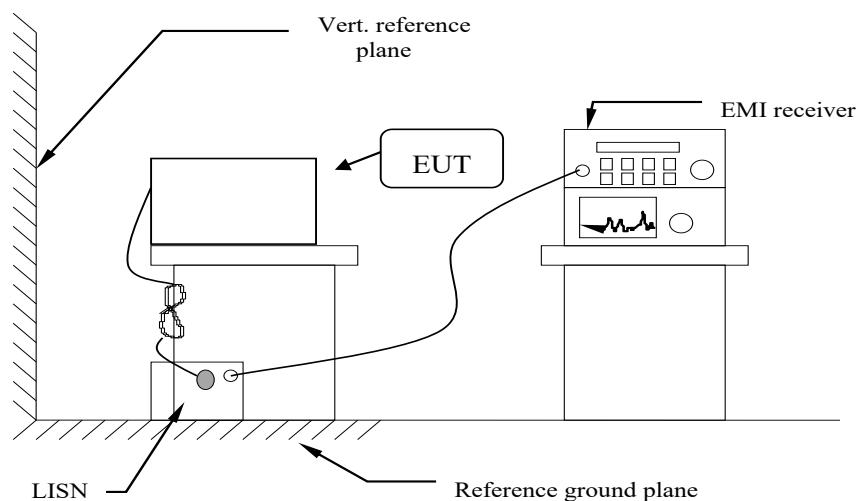

Note: the distance between LISN and Vertical reference plane is 40 cm and the distance between LISN and EUT is 80 cm.

5.3.3. Test Results

Not Applicable.



5.4. Antenna Requirements

5.4.1. Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

5.4.2. Antenna Connected Construction

The antenna is an Internal antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

5.4.3. Results

Compliance



6. LIST OF MEASURING EQUIPMENTS

| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Calibration Date | Calibration Due Date |
|------|----------------------|--------------|--------------|------------|------------------|----------------------|
| 1 | MXA Signal Analyzer | Keysight | N9020A | MY52091623 | 2024-12-31 | 2025-12-30 |
| 2 | Loop Antenna | schwarzbeck | FMZB1519B | 00023 | 2022-11-13 | 2025-11-12 |
| 3 | Wideband Antenna | schwarzbeck | VULB 9163 | 958 | 2022-11-13 | 2025-11-12 |
| 4 | Horn Antenna | schwarzbeck | BBHA 9120D | 01989 | 2022-11-13 | 2025-11-12 |
| 5 | EMI Test Receiver | R&S | ESCI | 100849/003 | 2024-12-31 | 2025-12-30 |
| 6 | Controller | MF | MF7802 | N/A | N/A | N/A |
| 7 | Amplifier | schwarzbeck | BBV 9743 | 209 | 2024-12-31 | 2025-12-30 |
| 8 | Amplifier | Tonscend | TSAMP-0518SE | -- | 2024-12-31 | 2025-12-30 |
| 9 | RF Cable(below 1GHz) | HUBER+SUHNER | RG214 | N/A | 2024-12-31 | 2025-12-30 |
| 10 | RF Cable(above 1GHz) | HUBER+SUHNER | RG214 | N/A | 2024-12-31 | 2025-12-30 |

Test software used:

| Item | Test Software | Manufacturer | Name | Version |
|------|------------------|--------------|---------|----------|
| 1 | RE Test software | Tonscend | JS32-RE | V5.0.0.0 |



Report No.: TZ0035250629FRF18

7. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

8. EXTERIOR PHOTOGRAPHS OF EUT

Please refer to separated files for External Photos of the EUT.

9. INTERIOR PHOTOGRAPHS OF EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----