



## Shenzhen GUOREN Certification Technology Service Co., Ltd.

101#, Building K & Building T, The Second Industrial Zone, Jiaxitang Community, Fenghuang Street, Guangming District, Shenzhen, China

### FCC PART 15 SUBPART C TEST REPORT FCC PART 15 SUBPART E 15.407

Report Reference No.....: GRCTR250702041-03

FCC ID.....: 2BRL9-PROGIC

Compiled by

(position+printed name+signature)..: Testing Engineer Jimmy Wang

Supervised by

(position+printed name+signature)..: Project Engineer Kelley Zhang



Approved by

(position+printed name+signature)..: Manager Sam Wang

Date of issue.....: Jul. 31, 2025

Testing Laboratory Name.....: Shenzhen GUOREN Certification Technology Service Co., Ltd.

Address.....: 101#, Building K & Building T, The Second Industrial Zone, Jiaxitang Community, Fenghuang Street, Guangming District, Shenzhen, China

Applicant's name.....: Progic Tecnologia e Comunicacao LTDA

Address.....: Rodovia Jose Carlos Daux, n 500 Edificio Techno Towers - Torre II, 1 andar Joao Paulo Cep 88030-000 Florianopolis SC Brasil

Test specification.....:

Standard.....: FCC Part 15 Subpart E 15.407

**Shenzhen GUOREN Certification Technology Service Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen GUOREN Certification Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen GUOREN Certification Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: Progic Player 2

Trade Mark.....: /

Manufacturer.....: Progic Tecnologia e Comunicacao LTDA

Model/Type reference.....: Progic Player 2

Listed Models .....: /

Firmware Version.....: V1.0

Hardware Version.....: V1.0

Modulation .....: OFDM

Frequency.....: From 5180MHz-5240MHz

Ratings.....: DC 5V From External Circuit

Result.....: **PASS**

## TEST REPORT

Equipment under Test : Progic Player 2

Model /Type : Progic Player 2

Listed Models : /

Applicant : **Progic Tecnologia e Comunicacao LTDA**

Address : Rodovia Jose Carlos Daux, n 500 Edificio Techno Towers -  
Torre II, 1 andar Joao Paulo Cep 88030-000 Florianopolis  
SC Brasil

Manufacturer : **Progic Tecnologia e Comunicacao LTDA**

Address : Rodovia Jose Carlos Daux, n 500 Edificio Techno Towers -  
Torre II, 1 andar Joao Paulo Cep 88030-000 Florianopolis  
SC Brasil

<b>Test Result:</b>	<b>PASS</b>
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<b>1 TEST STANDARDS .....</b>	<b>4</b>
<b>2 SUMMARY .....</b>	<b>5</b>
2.1 General Remarks .....	5
2.2 Product Description .....	5
2.3 Equipment Under Test .....	6
2.4 Short description of the Equipment under Test (EUT) .....	6
2.5 EUT configuration .....	6
2.6 EUT operation mode .....	6
2.7 Block Diagram of Test Setup .....	6
2.8 Related Submittal(s) / Grant (s) .....	6
2.9 Modifications .....	7
<b>3 TEST ENVIRONMENT .....</b>	<b>8</b>
3.1 Address of the test laboratory .....	8
3.2 Test Facility .....	8
3.3 Environmental conditions .....	8
3.4 Test Description .....	8
3.5 Statement of the measurement uncertainty .....	9
3.6 Equipments Used during the Test .....	10
<b>4 TEST CONDITIONS AND RESULTS .....</b>	<b>11</b>
4.1 AC Power Conducted Emission .....	11
4.2 Radiated Emissions .....	14
4.3 Maximum Conducted Average Output Power .....	20
4.4 Power Spectral Density .....	23
4.5 Emission Bandwidth (26dB Bandwidth) .....	36
4.6 Minimum Emission Bandwidth (6dB Bandwidth) .....	48
4.7 Frequency Stability .....	49
4.8 Automatically Discontinue Transmission .....	51
4.9 Band edge for RF Conducted Emissions .....	52
<b>5 TEST SETUP PHOTOS OF THE EUT .....</b>	<b>63</b>
<b>6 PHOTOS OF THE EUT .....</b>	<b>64</b>

## **1 TEST STANDARDS**

The tests were performed according to following standards:

[FCC Rules Part 15.407](#): UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE DEVICES.

[ANSI C63.10-2020](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 789033 D02](#): GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL

INFORAMTION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPART E

[KDB 662911 D01 Multiple Transmitter Output v02r01](#): Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

## 2 SUMMARY

### 2.1 General Remarks

Date of receipt of test sample	:	Jul. 08, 2025
Testing commenced on	:	Jul. 08, 2025
Testing concluded on	:	Jul. 31, 2025

### 2.2 Product Description

Product Name:	Progic Player 2			
Model/Type reference:	Progic Player 2			
Listed Models:	/			
Power supply:	DC 5V From External Circuit			
Adapter information:	M/N:GJ15WD-0500200UW Input:100-240V~ 50/60Hz 0.5A Output:5.0V= 2.0A 10.0W			
Sample ID:	GRCTR250702041-1# (Engineer sample), GRCTR250702041-2# (Normal sample)			
<b>WIFI 5G</b>				
Supported type:	20MHz system	40MHz system	80MHz system	160MHz system
	802.11a 802.11n 802.11ac	802.11n 802.11ac	802.11ac	N/A
Operation frequency:	5180MHz-5240MHz	5190MHz-5230MHz	5210MHz	N/A
Modulation:	OFDM	OFDM	OFDM	N/A
Channel number:	9	4	2	N/A
Channel separation:	20MHz	40MHz	80MHz	N/A
Antenna type:	External antenna(Ant 1)+Iron antenna(Ant 2)			
Antenna gain:	Ant 1: 3.00 dBi Ant 2: 3.00 dBi Directional gain:6.01			
Remark: *When the information provided by the customer was used to calculate test results, if the information provided by the customer is not accurate, shenzhen GUOREN Certification Technology Service Co., Ltd. does not assume any responsibility.				

According to KDB 662911 D01 Multiple Transmitter Output,Directional Gain Calculations for In-Band Measurements:

If transmit signals are correlated, then

Directional gain =  $10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$  dBi [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

## 2.3 Equipment Under Test

### Power supply system utilised

Power supply voltage	:	<input type="radio"/>	230V / 50 Hz	<input type="radio"/>	120V / 60Hz
		<input type="radio"/>	12 V DC	<input type="radio"/>	24 V DC
		<input checked="" type="radio"/>	Other (specified in blank below)		

DC 5V From External Circuit

## 2.4 Short description of the Equipment under Test (EUT)

This is a Progic Player 2.

For more details, refer to the user's manual of the EUT.

## 2.5 EUT configuration

**The following peripheral devices and interface cables were connected during the measurement:**

- supplied by the manufacturer

- supplied by the lab

<input type="radio"/>	LCD	M/N:	32E381S
		Manufacturer:	SKYWORTH

## 2.6 EUT operation mode


The Applicant provides communication tools software(SecureCRT Version 7.0.0) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) for testing meet KDB558074 test requirement.

Operation Frequency List WIFI on 5G Band:

Operating band	20MHz		40MHz		80MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII 1 (5150MHz-5250MHz)	36	5180	38	5190	42	5210
	40	5200		5220		
	44	5220		5230		
	48	5240				

Note: The line display in gray is those Channels/Frequencies select to test in this report for each operation mode.

## 2.7 Block Diagram of Test Setup

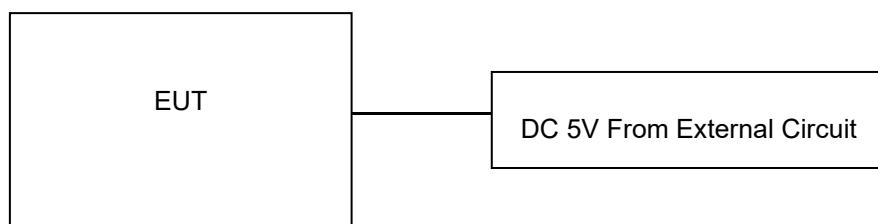

## 2.8 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.

## **2.9 Modifications**

No modifications were implemented to meet testing criteria.

### **3 TEST ENVIRONMENT**

#### **3.1 Address of the test laboratory**

**Shenzhen GUOREN Certification Technology Service Co., Ltd.**

101#, Building K & Building T, The Second Industrial Zone, Jiaxitang Community, Fenghuang Street, Guangming District, Shenzhen, China

#### **3.2 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

**FCC-Registration No.: 920798 Designation Number: CN1304**

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

**A2LA-Lab Cert. No.: 6202.01**

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

**ISED#: 27264 CAB identifier: CN0115**

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

**CNAS-Lab Code: L15631**

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories for the Competence of Testing and Calibration Laboratories.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

#### **3.3 Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature	15-35 °C
Relative Humidity	30-60 %
Air Pressure	950-1050mbar

#### **3.4 Test Description**

FCC Requirement		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.407(a)	Emission Bandwidth(26dBm Bandwidth)	PASS <sub>Note1</sub>
FCC Part 15.407(e)	Minimum Emission Bandwidth(6dBm Bandwidth)	PASS <sub>Note2</sub>
FCC Part 15.407(a)	Maximum Conducted Output Power	PASS
FCC Part 15.407(a)	Peak Power Spectral Density	PASS
FCC Part 15.407(g)	Frequency Stability	PASS

FCC Part 15.407(b)	Undesirable emission	PASS
FCC Part 15.407(b)/15.205/15.209	Radiated Emissions	PASS
FCC Part 15.407(h)	Dynamic Frequency Selection	N/A Note 3
FCC Part 15.203/15.247(b)	Antenna Requirement	PASS
FCC Part 15.407(c)	Automatically Discontinue Transmission	PASS

Note 1: Apply to U-NII 1, U-NII 2A, and U-NII 2C band.

Note 2: Apply to U-NII 3 band only.

Note 3: This device not work in DFS band.

Note 4: N/A means "not applicable".

#### Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
	11a/OFDM	6 Mbps
Maximum Conducted Output Power Power Spectral Density Emission Bandwidth(26dBm Bandwidth)	11n(20MHz),11ac(20MHz)/OFDM	7.2 Mbps
Minimum Emission Bandwidth(6dBm Bandwidth) Undesirable emission Frequency Stability	11n(40MHz),11ac(40MHz)/OFDM	15.0Mbps
	11ac(80MHz)/OFDM	65.0Mbps

### 3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the Shenzhen GUOREN Certification Technology Service Co., Ltd.quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GUOREN Certification Technology Service Co., Ltd.:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.06 dB	(1)
Radiated Emission	1~18GHz	5.14 dB	(1)
Radiated Emission	18~40GHz	5.38 dB	(1)
Conducted Disturbance	0.15~30MHz	2.14 dB	(1)
Max output power	30MHz~18GHz	0.54 dB	(1)
Power spectral density	/	0.56 dB	(1)
Spectrum bandwidth	/	1.2%	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


### 3.6 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Equipment No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	GRCTEE009	2024/09/19	2025/09/18
LISN	R&S	ENV216	GRCTEE010	2024/09/19	2025/09/18
EMI Test Receiver	R&S	ESPI	GRCTEE017	2024/09/19	2025/09/18
EMI Test Receiver	R&S	ESCI	GRCTEE008	2024/09/19	2025/09/18
Spectrum Analyzer	Agilent	N9020A	GRCTEE002	2024/09/19	2025/09/18
Spectrum Analyzer	R&S	FSP	GRCTEE003	2024/09/20	2025/09/19
Vector Signal generator	Agilent	N5181A	GRCTEE007	2024/09/19	2025/09/18
Analog Signal Generator	R&S	SML03	GRCTEE006	2024/09/19	2025/09/18
Climate Chamber	QIYA	LCD-9530	GRCTES016	2024/09/19	2025/09/18
Ultra-Broadband Antenna	Schwarzbeck	VULB9163	GRCTEE018	2023/09/28	2026/09/27
Horn Antenna	Schwarzbeck	BBHA 9120D	GRCTEE019	2023/09/28	2026/09/27
Loop Antenna	Zhinan	ZN30900C	GRCTEE020	2023/10/15	2026/10/14
Horn Antenna	Beijing Hangwei Dayang	OBH100400	GRCTEE049	2023/09/28	2026/09/27
Amplifier	Schwarzbeck	BBV 9745	GRCTEE021	2024/09/19	2025/09/18
Amplifier	Taiwan chengyi	EMC051845B	GRCTEE022	2024/09/19	2025/09/18
Temperature/Humidity Meter	Huaguan	HG-308	GRCTES037	2024/09/19	2025/09/18
Directional coupler	NARDA	4226-10	GRCTEE004	2024/09/19	2025/09/18
High-Pass Filter	XingBo	XBLBQ-GTA18	GRCTEE053	2024/09/19	2025/09/18
High-Pass Filter	XingBo	XBLBQ-GTA27	GRCTEE054	2024/09/19	2025/09/18
Automated filter bank	Tonscend	JS0806-F	GRCTEE055	2024/09/19	2025/09/18
Power Sensor	Agilent	U2021XA	GRCTEE070	2024/09/19	2025/09/18
Cable	Times	Cable-CE	GRCTEE086	2024/09/19	2025/09/18
Cable	Times	Cable-RE-1	GRCTEE087	2024/09/19	2025/09/18
Cable	Times	Cable-RE-2	GRCTEE088	2024/09/19	2025/09/18
EMI Test Software	ROHDE & SCHWARZ	ESK1-V1.71	GRCTEE060	N/A	N/A
EMI Test Software	Fera	EZ-EMC	GRCTEE061	N/A	N/A

## 4 TEST CONDITIONS AND RESULTS

### 4.1 AC Power Conducted Emission

#### TEST CONFIGURATION

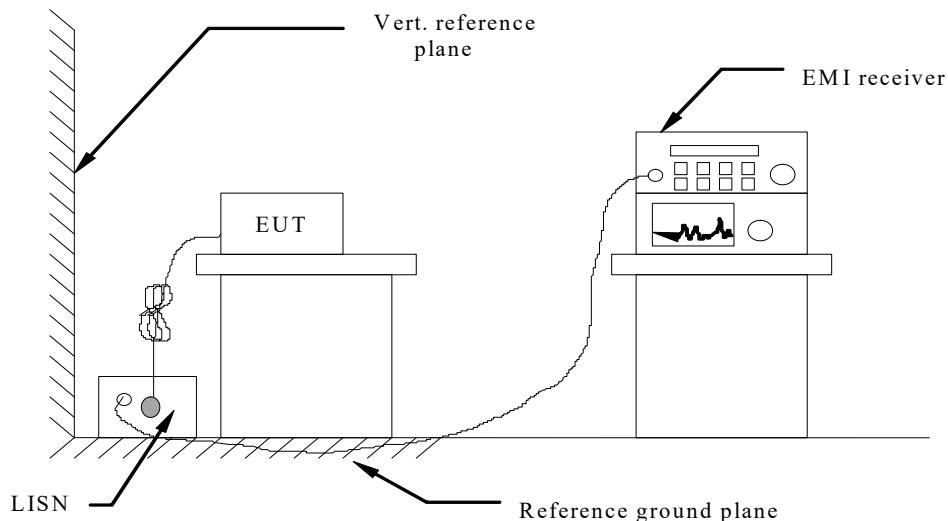

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2020.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2020
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2020
- 4 The EUT received power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following:


Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

#### TEST RESULTS

Remark:

1. All modes of 802.11a/ 802.11ac(VHT20) /802.11ac(VHT40) /802.11ac(VHT80)/ 802.11n (HT20) / 802.11n (HT40) were tested at Low, Middle, and High channel; only the worst result of 802.11n (HT20) CH36 was reported as below:
2. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:

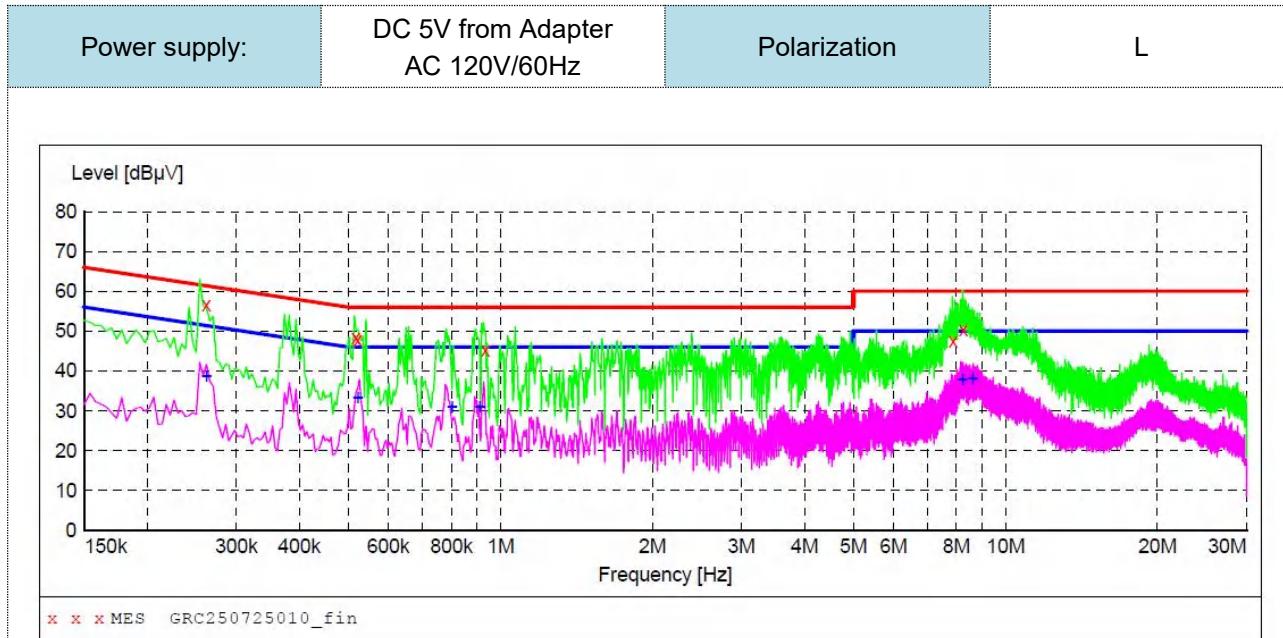

#### MEASUREMENT RESULT: "GRC250725010\_fin"

7/25/2025 10:31AM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.262000	56.50	10.2	61	4.9	QP	L1	GND
0.518000	48.40	10.3	56	7.6	QP	L1	GND
0.522000	47.70	10.3	56	8.3	QP	L1	GND
0.934000	45.30	10.3	56	10.7	QP	L1	GND
7.874000	47.60	10.6	60	12.4	QP	L1	GND
8.254000	50.50	10.6	60	9.5	QP	L1	GND

#### MEASUREMENT RESULT: "GRC250725010\_fin2"


7/25/2025 10:31AM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.262000	38.70	10.2	51	12.7	AV	L1	GND
0.522000	33.20	10.3	46	12.8	AV	L1	GND
0.802000	30.90	10.2	46	15.1	AV	L1	GND
0.910000	31.10	10.3	46	14.9	AV	L1	GND
8.210000	37.90	10.6	50	12.1	AV	L1	GND
8.610000	38.00	10.7	50	12.0	AV	L1	GND

Note:1).Level (dB $\mu$ V)= Reading (dB $\mu$ V)+ Transducer (dB)

2). Transducer (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). Margin(dB) = Limit (dB $\mu$ V) - Level (dB $\mu$ V)

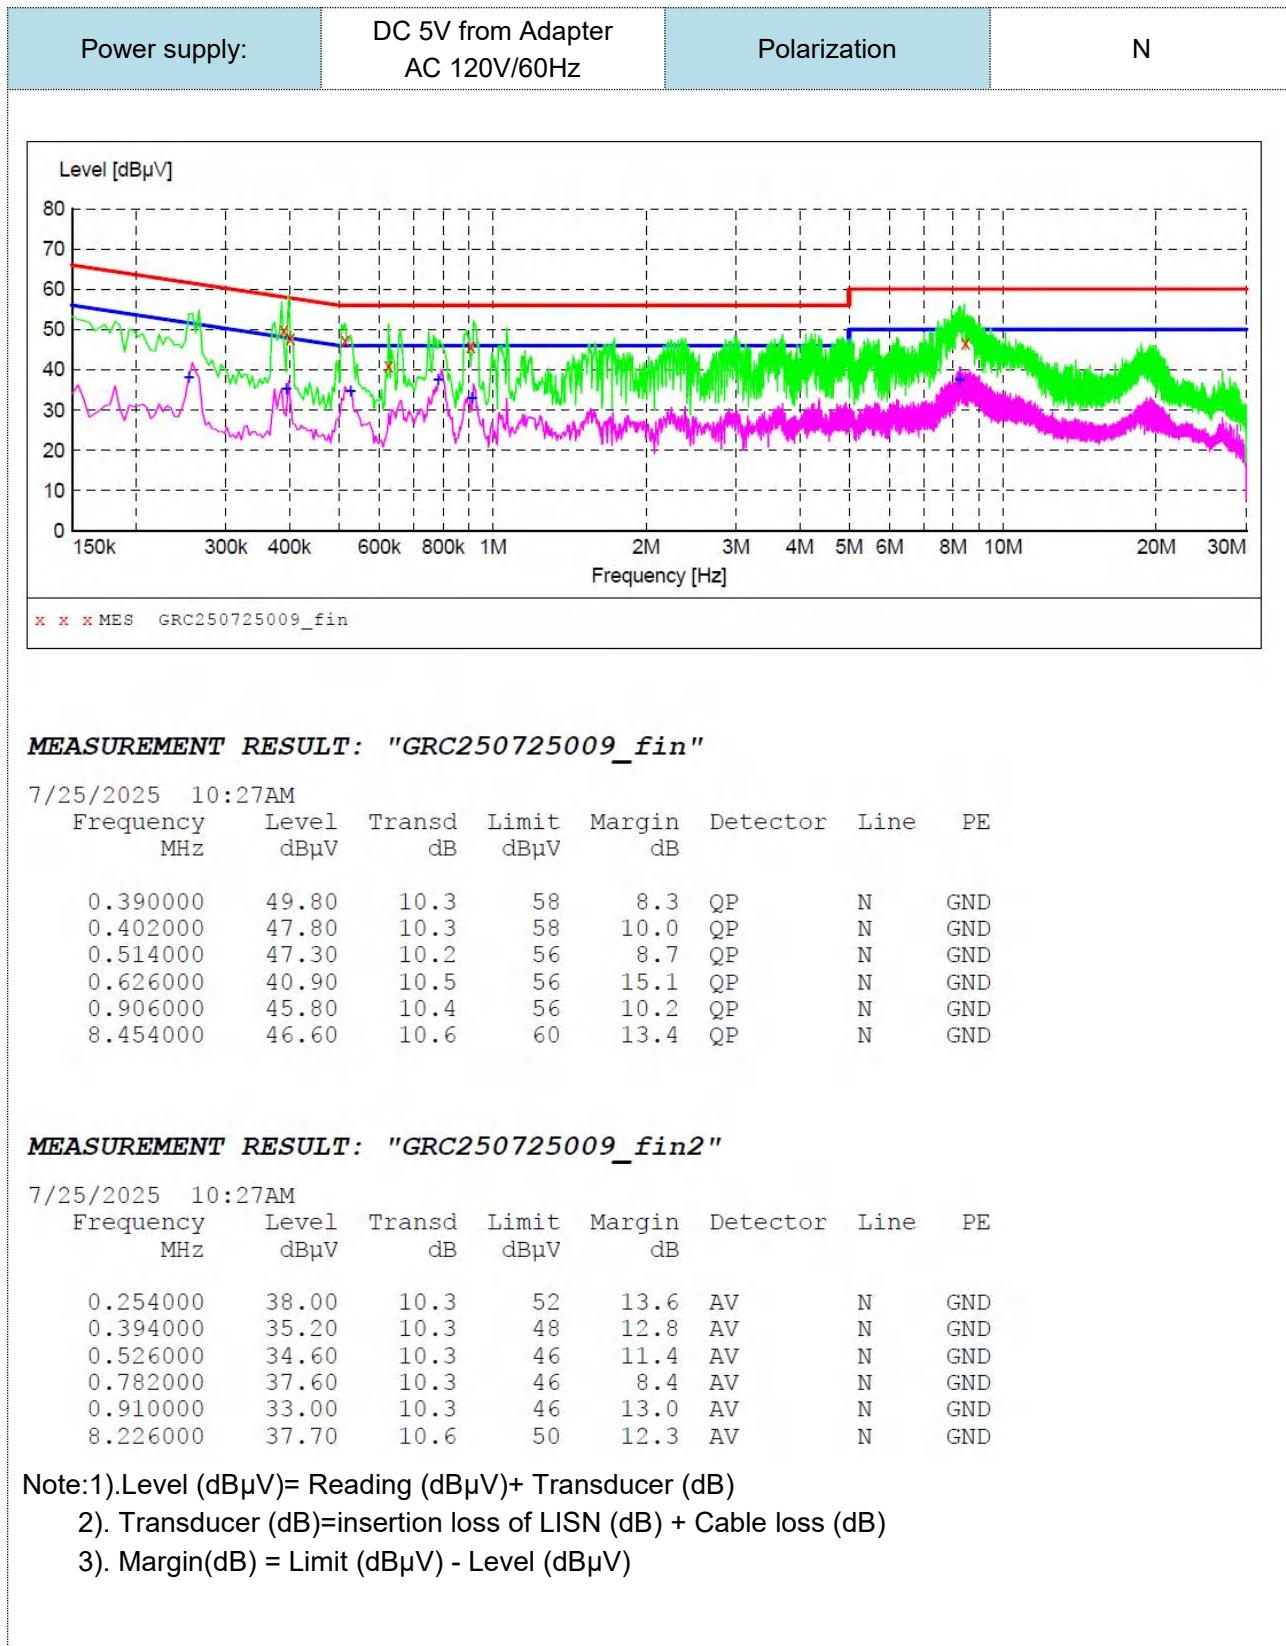

## 4.2 Radiated Emissions

### Limit

The maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

### **Undesirable emission limits**

Requirement	Limit(EIRP)	Limit (Field strength at 3m) <small>Note1</small>
15.407(b)(1)	PK:-27(dBm/MHz)	PK:68.2(dB $\mu$ V/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)		

Note1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}, \text{ where } P \text{ is the eirp (Watts)}$$


- (5) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209
- (6) In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

### **Radiated emission limits**


Frequency (MHz)	Distance (Meters)	Radiated (dB $\mu$ V/m)	Radiated ( $\mu$ V/m)
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-30	3	20log(30)+ 40log(30/3)	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

**TEST CONFIGURATION**


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

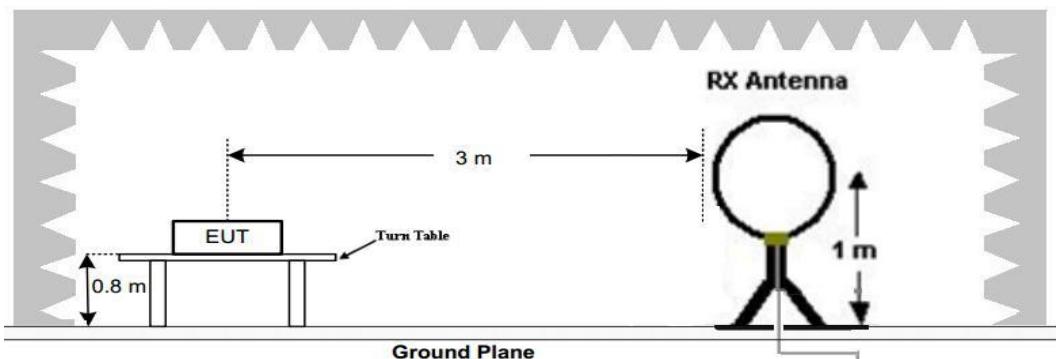

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

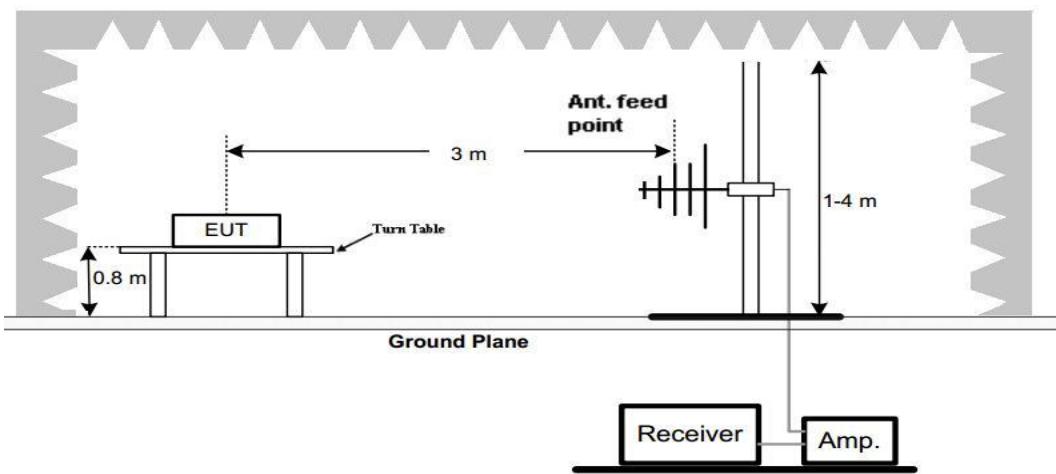

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

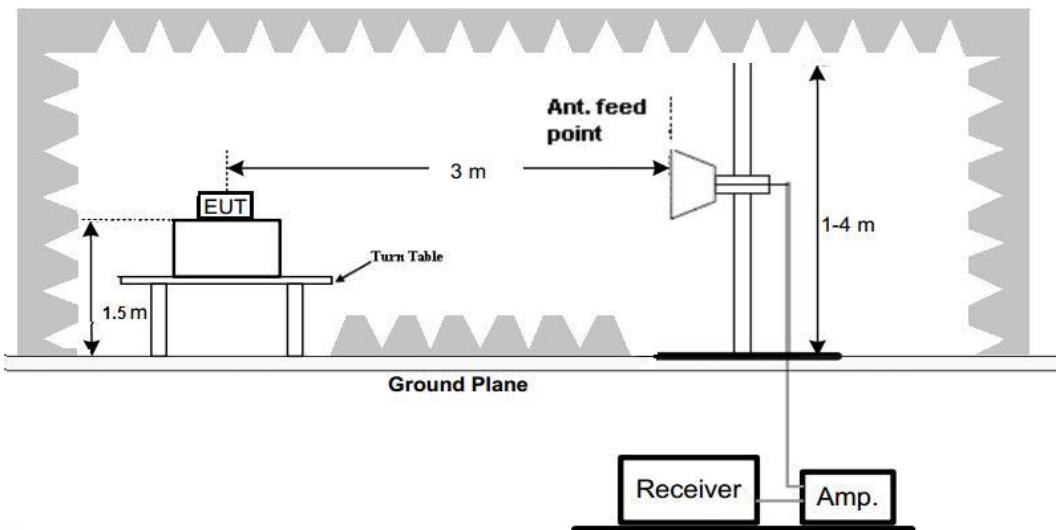

**Test Procedure**

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 40GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

**TEST RESULTS**

## Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. All 802.11a/ 802.11ac(VHT20) /802.11ac(VHT40) /802.11ac(VHT80)/ 802.11n (HT20) / 802.11n (HT40) modes have been tested for below 1GHz test, only the worst case 802.11n (HT20) low channel of U-NII 1 band was recorded.
3. All 802.11a/ 802.11ac(VHT20) /802.11ac(VHT40) /802.11ac(VHT80)/ 802.11n (HT20) / 802.11n (HT40) modes have been tested for above 1GHz test, only the worst case 802.11n (HT20) was recorded.
4. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

## For 30MHz-1GHz

Horizontal

## Radiated Emission Measurement



Site LAB

Polarization: *Horizontal*

Temperature: 24.5(C)

Limit: FCC Part15 RE-Class B\_30-1000MHz

Power: AC120V/60Hz

Humidity: 52 %

EUT: Progic Player 2

Distance: 3m

M/N: Progic Player 2

Mode: 802.11n(HT20) CH 36


Note: N/A

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	39.7146	39.24	-17.97	21.27	40.00	-18.73	peak	100	234	P	
2	75.77114	54.58	-22.01	32.57	40.00	-7.43	peak	200	352	P	
3	141.3298	49.99	-21.86	28.13	43.50	-15.37	peak	200	359	P	
4 *	222.1698	57.64	-18.69	38.95	46.00	-7.05	peak	100	271	P	
5	319.9370	50.20	-16.81	33.39	46.00	-12.61	peak	100	342	P	
6	381.2487	46.13	-16.01	30.12	46.00	-15.88	peak	100	225	P	

Note: 1).Level (dB $\mu$ V/m)= Reading (dB $\mu$ V)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Level (dB $\mu$ V/m) - Limit (dB $\mu$ V/m)

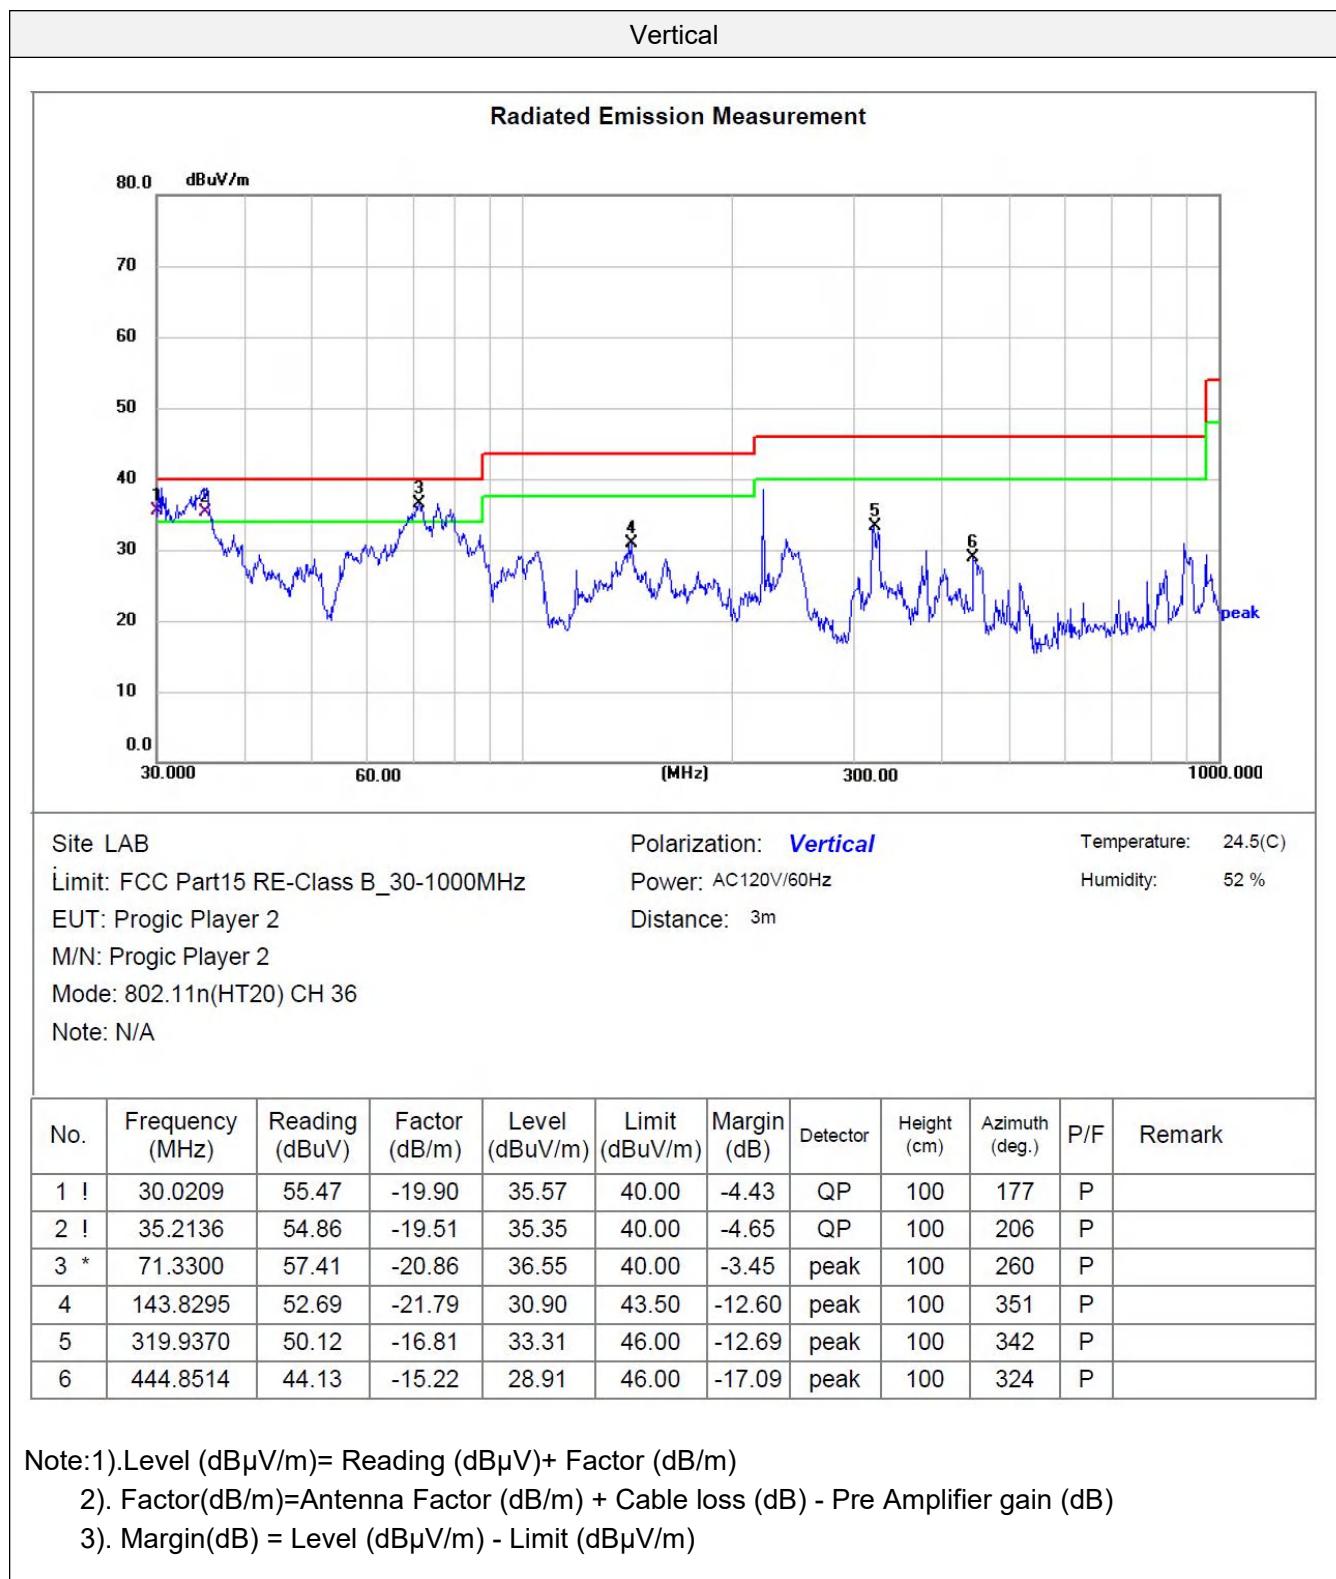

**For 1GHz to 40GHz****U-NII 1 & 802.11n (HT20) Mode (above 1GHz)**

Tested Channel	Frequency (MHz)	Emission Level (dBuV/m)	Detector Mode	ANT Pol	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre amplifier (dB)	Correction Factor (dB/m)
	5150.00	51.26	PK	H	68.20	16.94	70.16	29.91	5.87	54.68	-18.90
36.00	5150.00	37.56	AV	H	54.00	16.44	56.46	29.91	5.87	54.68	-18.90
(5180MHz)	10360.00	50.12	PK	H	68.20	18.08	57.04	37.62	10.02	54.56	-6.92
	--	--	--	--	--	--	--	--	--	--	--
40.00	10400.00	50.48	PK	H	68.20	17.72	56.90	37.81	10.14	54.37	-6.42
(5200MHz)	--	--	--	--	--	--	--	--	--	--	--
48.00	5350.50	50.39	PK	H	68.20	17.81	68.96	30.24	5.93	54.74	-18.57
(5240MHz)	10480.00	49.83	PK	H	68.20	18.37	56.35	37.95	10.17	54.64	-6.52
	--	--	--	--	--	--	--	--	--	--	--

Tested Channel	Frequency (MHz)	Emission Level (dBuV/m)	Detector Mode	ANT Pol	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre amplifier (dB)	Correction Factor (dB/m)
	5150.00	50.74	PK	V	68.20	17.46	69.64	29.91	5.87	54.68	-18.90
36.00	5150.00	39.02	AV	V	54.00	14.98	57.92	29.91	5.87	54.68	-18.90
(5180MHz)	10360.00	50.72	PK	V	68.20	17.48	57.64	37.62	10.02	54.56	-6.92
	--	--	--	--	--	--	--	--	--	--	--
40.00	10400.00	50.69	PK	V	68.20	17.51	57.11	37.81	10.14	54.37	-6.42
(5200MHz)	--	--	--	--	--	--	--	--	--	--	--
48.00	5350.50	50.34	PK	V	68.20	17.86	68.91	30.24	5.93	54.74	-18.57
(5240MHz)	10480.00	50.28	PK	V	68.20	17.92	56.80	37.95	10.17	54.64	-6.52
	--	--	--	--	--	--	--	--	--	--	--

**REMARKS:**

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the other emission levels were very low against the limit.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
6. Worst case data at 6Mbps at IEEE 802.11a, MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11ac VHT20 ,IEEE 802.11ac VHT40,IEEE 802.11ac VHT80.

## 4.3 Maximum Conducted Average Output Power

### Limit

#### **For the band 5.15-5.25 GHz.**

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.
- (iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.


**For the 5.25-5.35 GHz and 5.47-5.725 GHz bands,** the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz.

**For the band 5.725-5.85 GHz,** the maximum conducted output power over the frequency band of operation shall not exceed 1 W

### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

### Test Configuration

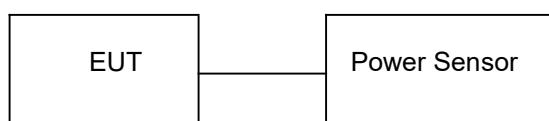

**Test Results****Ant 1****U-NII 1**

Type	Channel	Output power (dBm)	Limit (dBm)	Result
802.11a	36	12.20	23.98	Pass
	40	13.20		
	48	12.55		
802.11n(HT20)	36	13.27	23.98	Pass
	40	12.15		
	48	12.23		
802.11n(HT40)	38	12.07	23.98	Pass
	46	12.09		
802.11ac(VHT20)	36	12.48	23.98	Pass
	40	12.89		
	48	11.97		
802.11ac(VHT40)	38	12.17	23.98	Pass
	46	12.18		
802.11ac(VHT80)	42	12.38	23.98	Pass

**Ant 2****U-NII 1**

Type	Channel	Output power (dBm)	Limit (dBm)	Result
802.11a	36	12.43	23.98	Pass
	40	12.86		
	48	12.01		
802.11n(HT20)	36	13.42	23.98	Pass
	40	13.27		
	48	13.04		
802.11n(HT40)	38	12.32	23.98	Pass
	46	12.21		
802.11ac(VHT20)	36	12.97	23.98	Pass
	40	13.17		
	48	12.77		
802.11ac(VHT40)	38	12.55	23.98	Pass
	46	12.34		
802.11ac(VHT80)	42	12.28	23.98	Pass

**MIMO****U-NII 1**

Type	Channel	Output power Ant 1(dBm)	Output power Ant 2(dBm)	Output power MIMO(dBm)	Limit (dBm)	Result
802.11n(HT20)	36	13.27	13.42	16.36	23.97	Pass
	40	12.15	13.27	15.76		
	48	12.23	13.04	15.66		
802.11n(HT40)	38	12.07	12.32	15.21	23.97	Pass
	46	12.09	12.21	15.16		
802.11ac(VHT20)	36	12.48	12.97	15.74	23.97	Pass
	40	12.89	13.17	16.04		
	48	11.97	12.77	15.40		
802.11ac(VHT40)	38	12.17	12.55	15.37	23.97	Pass
	46	12.18	12.34	15.27		
802.11ac(VHT80)	42	12.38	12.28	15.34	23.97	Pass

## 4.4 Power Spectral Density

### Limit

(1) For the band 5.15 - 5.25 GHz.

- (i) For an outdoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band.<sup>note1</sup>
- (ii) For an indoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band.<sup>note1</sup>
- (iii) For fixed point-to-point access points operating in the band 5.15 - 5.25 GHz, transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
- (iv) For mobile and portable client devices in the 5.15 - 5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 MHz band.<sup>note1</sup>

(2) For the 5.25 - 5.35 GHz and 5.47 - 5.725 GHz bands, the peak power spectral density shall not exceed 11 dBm in any 1 MHz band.<sup>note1</sup>

(3) For the band 5.725 - 5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band.<sup>note1, note2</sup>

Note1: If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note2: Fixed point - to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information.

### Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW = 1MHz for U-NII 1, U-NII 2A, U-NII C band and 300KHz for U-NII 3 band.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Set the span to encompass the entire EBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.

### Test Configuration



**Test Results****Ant 1**

Type	Bands	Channel	Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)	Result
802.11a	U-NII 1	36	1.04	11	Pass
		40	2.49		
		48	1.47		
802.11n (HT20)	U-NII 1	36	1.26		
		40	1.16		
		48	0.07		
802.11n (HT40)	U-NII 1	38	-1.64		
		46	-1.82		
802.11ac (VHT20)	U-NII 1	36	1.33		
		40	1.81		
		48	0.92		
802.11ac (VHT40)	U-NII 1	38	-1.68		
		46	-1.44		
802.11ac (VHT80)	U-NII 1	42	-4.70		

**Ant 2**


Type	Bands	Channel	Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)	Result
802.11a	U-NII 1	36	1.36	11	Pass
		40	1.80		
		48	0.91		
802.11n (HT20)	U-NII 1	36	2.45		
		40	3.46		
		48	1.68		
802.11n (HT40)	U-NII 1	38	-1.11		
		46	-1.52		
802.11ac (VHT20)	U-NII 1	36	1.82		
		40	2.57		
		48	1.73		
802.11ac (VHT40)	U-NII 1	38	-0.97		
		46	-1.38		
802.11ac (VHT80)	U-NII 1	42	-4.76		


**MIMO**


Type	Channel	Power Spectral Density Ant 1 (dBm/MHz)	Power Spectral Density Ant 2 (dBm/MHz)	Power Spectral Density MIMO (dBm/MHz)	Limit (dBm/MHz)	Result
802.11n(HT20)	36	1.26	2.45	4.91	10.99	Pass
	40	1.16	3.46	5.47		
	48	0.07	1.68	3.96		
802.11n(HT40)	38	-1.64	-1.11	1.64	10.99	Pass
	46	-1.82	-1.52	1.34		
802.11ac(VHT20)	36	1.33	1.82	4.59		
	40	1.81	2.57	5.22		
	48	0.92	1.73	4.35		
802.11ac(VHT40)	38	-1.68	-0.97	1.70		
	46	-1.44	-1.38	1.60		
802.11ac(VHT80)	42	-4.70	-4.76	-1.72		


Test plot as follows


Ant 1

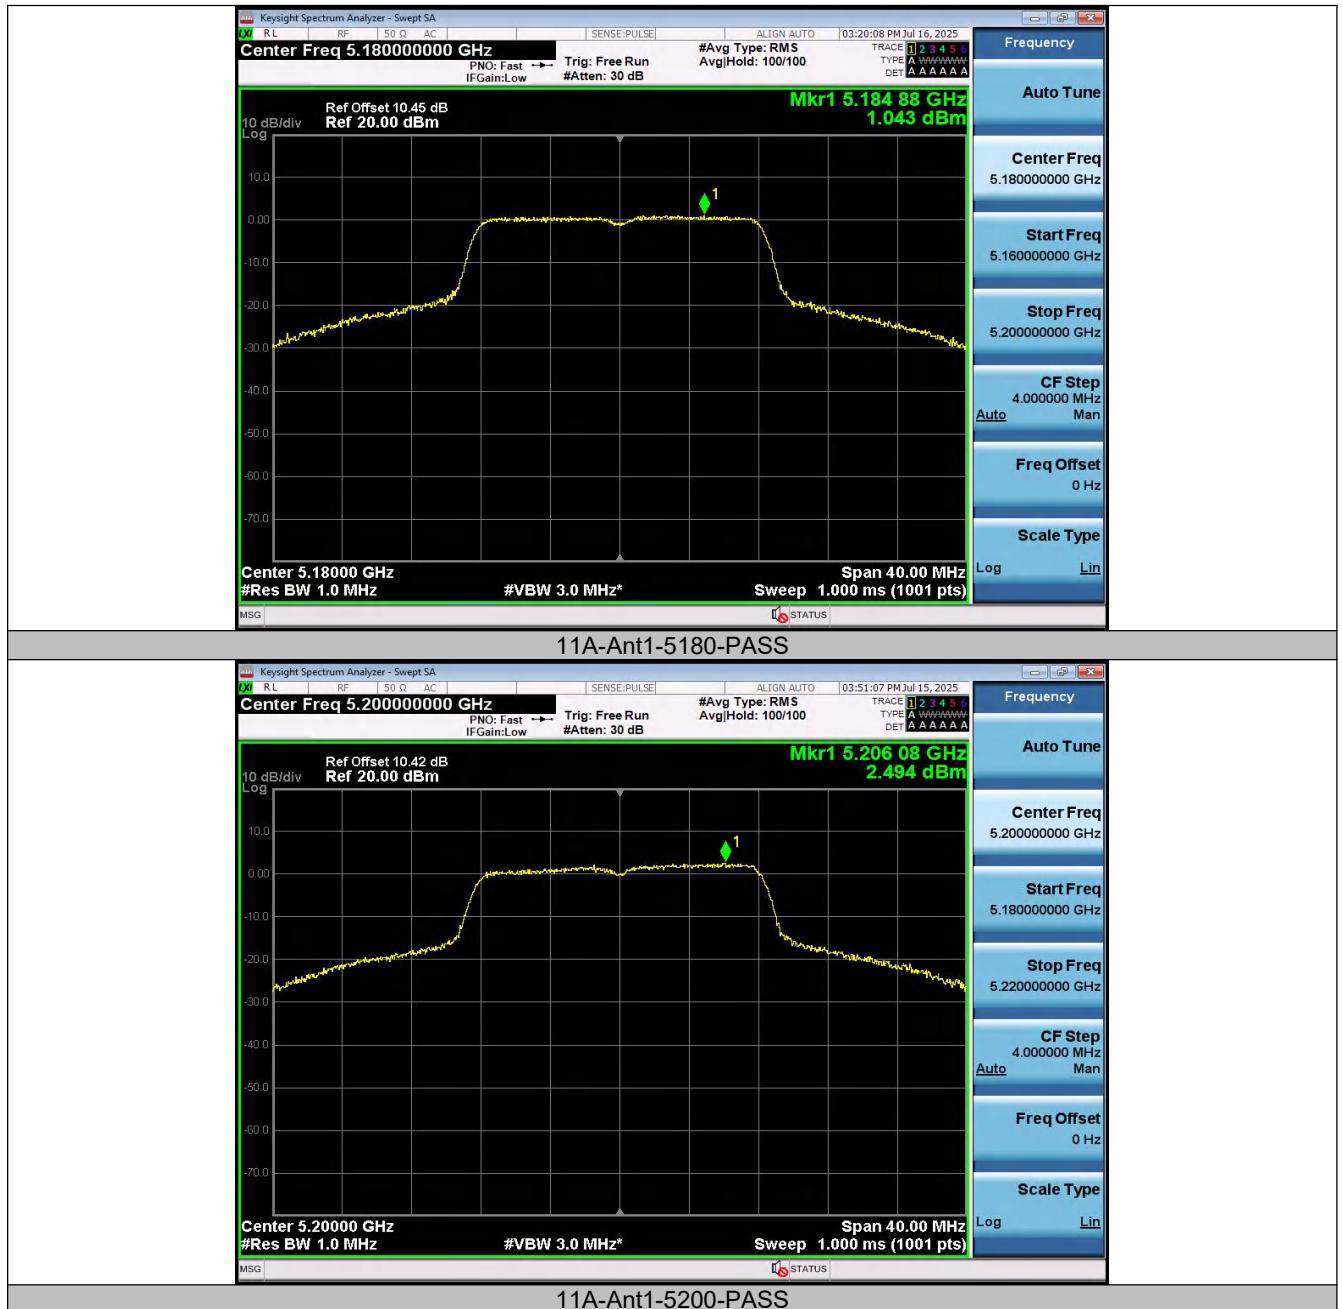


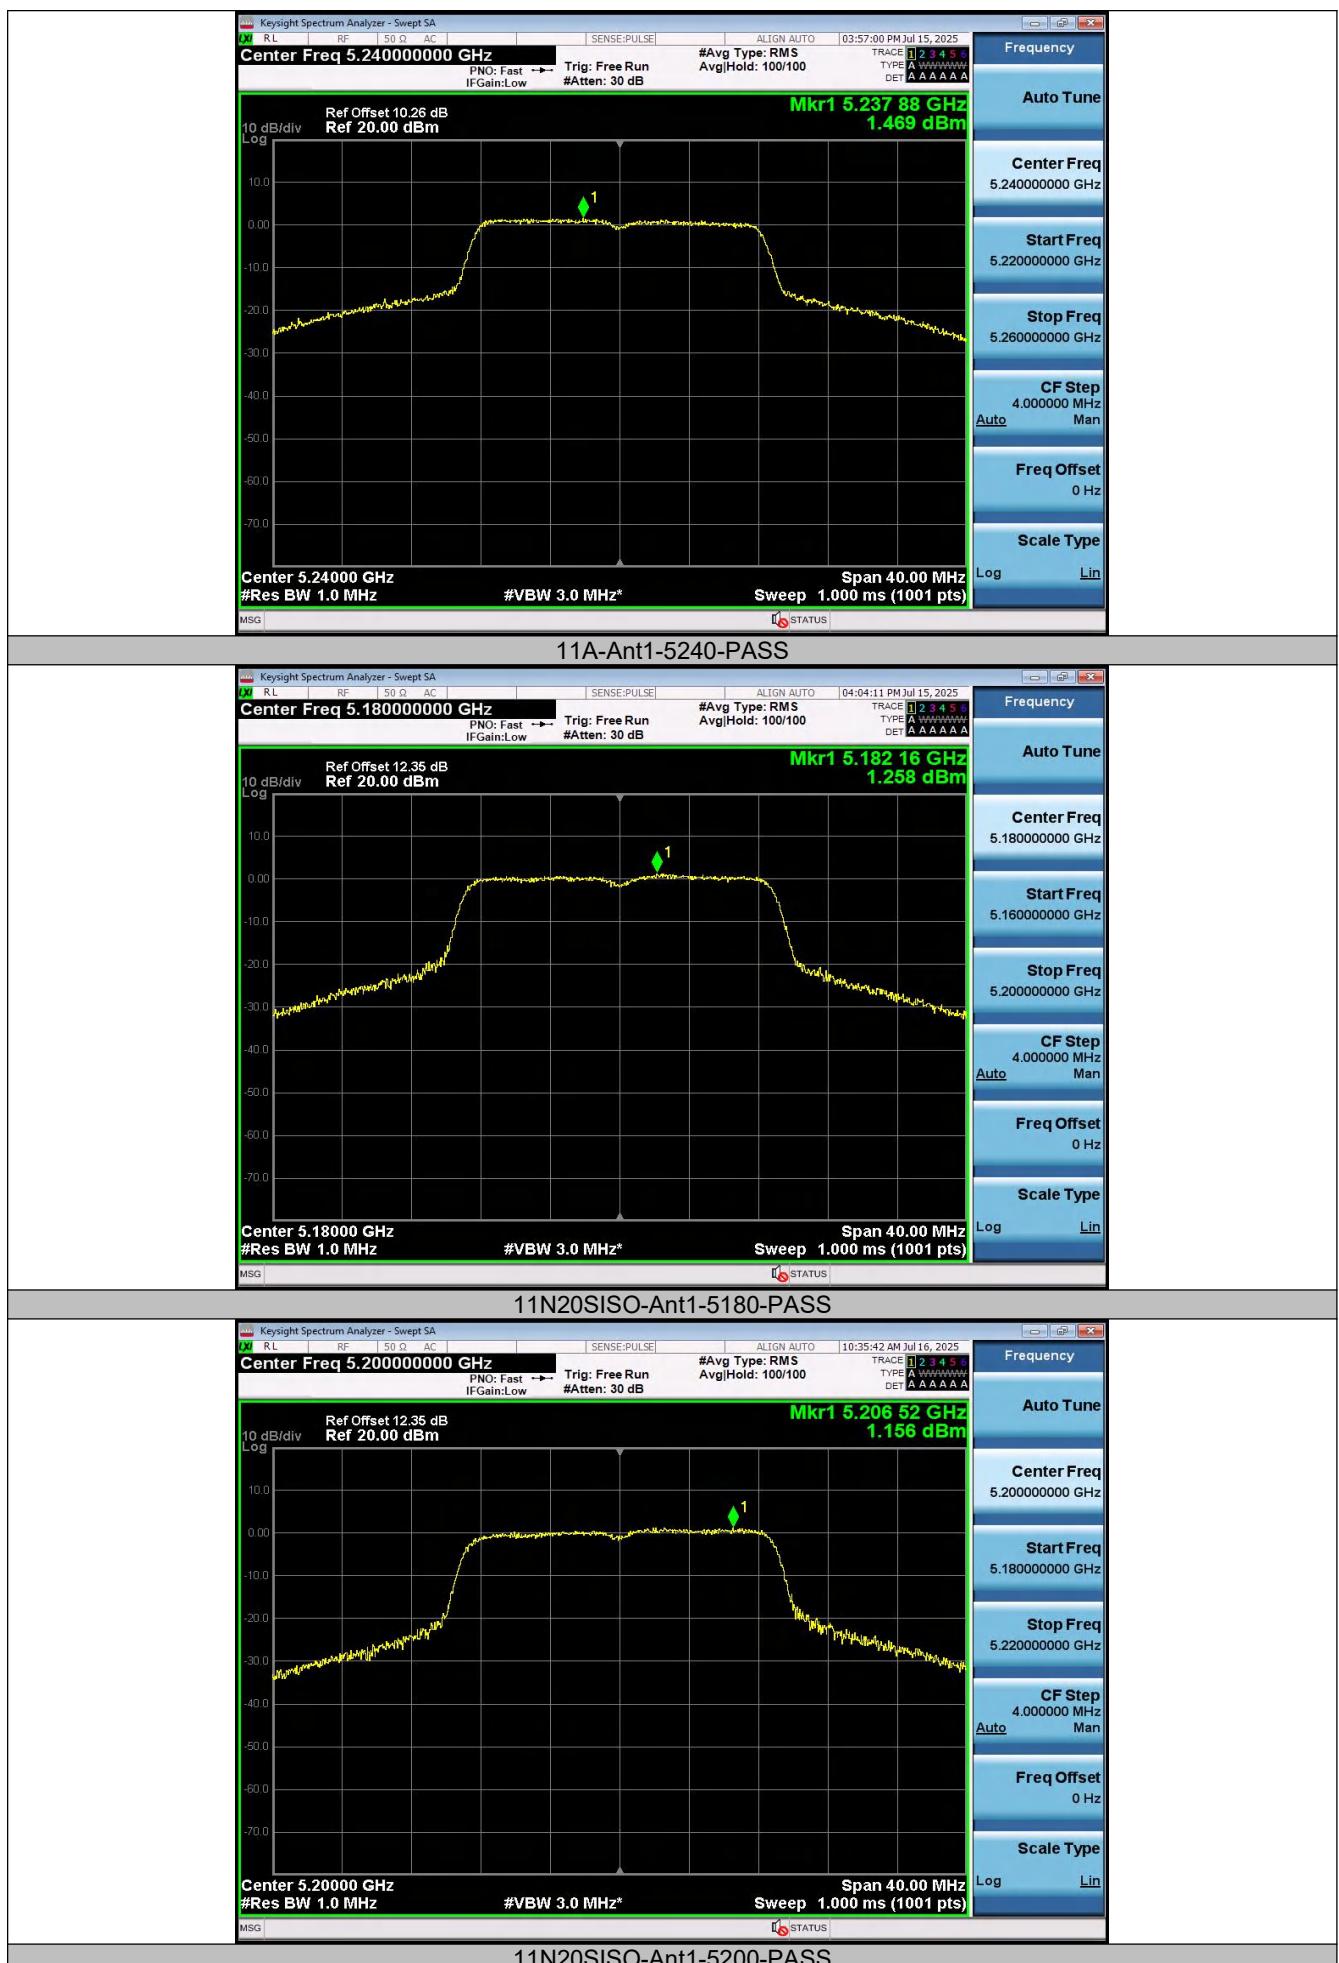


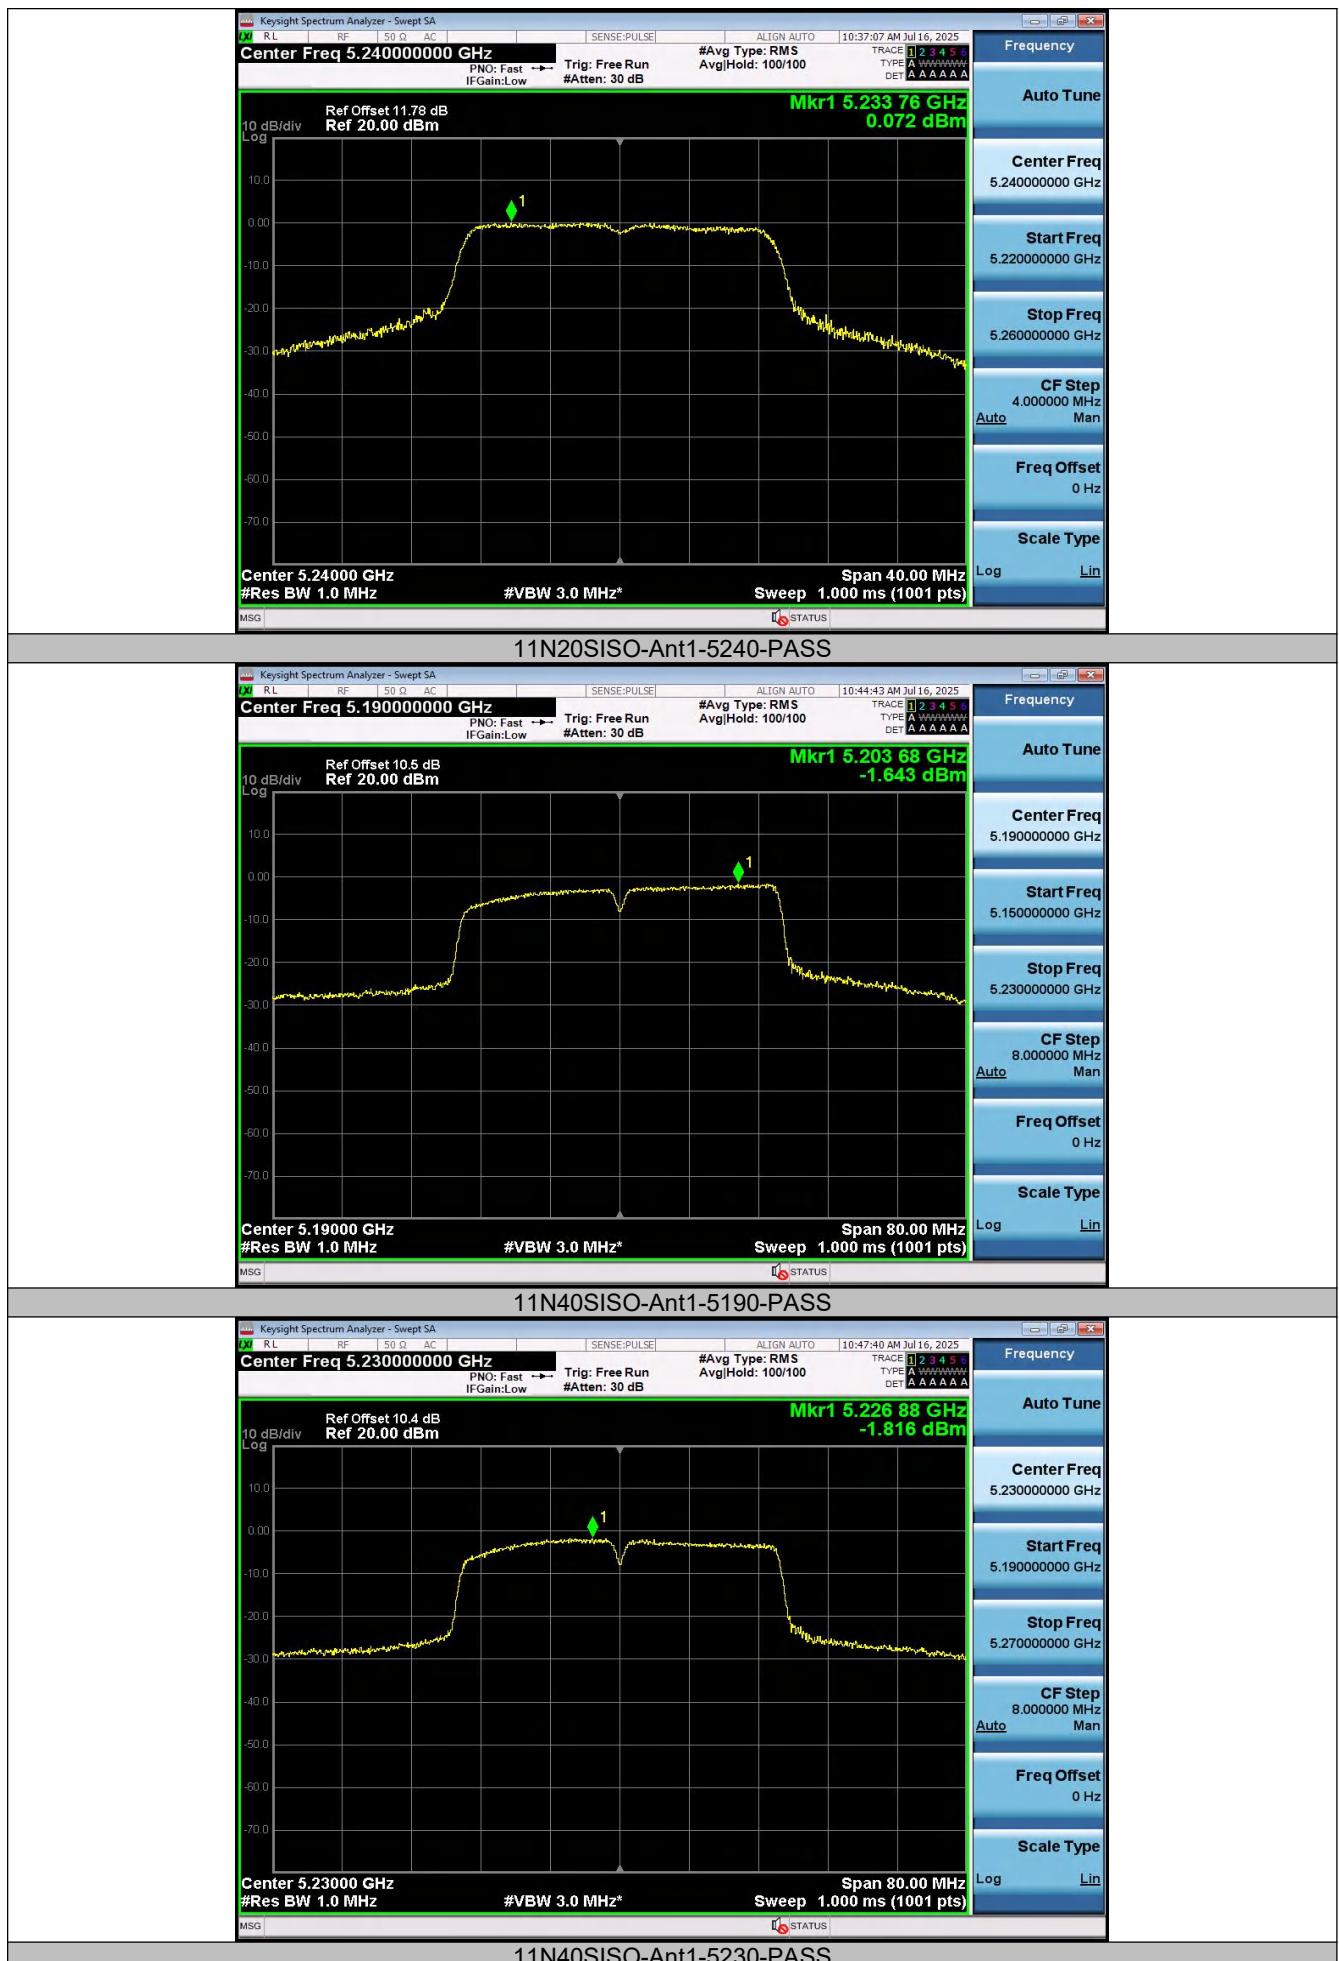


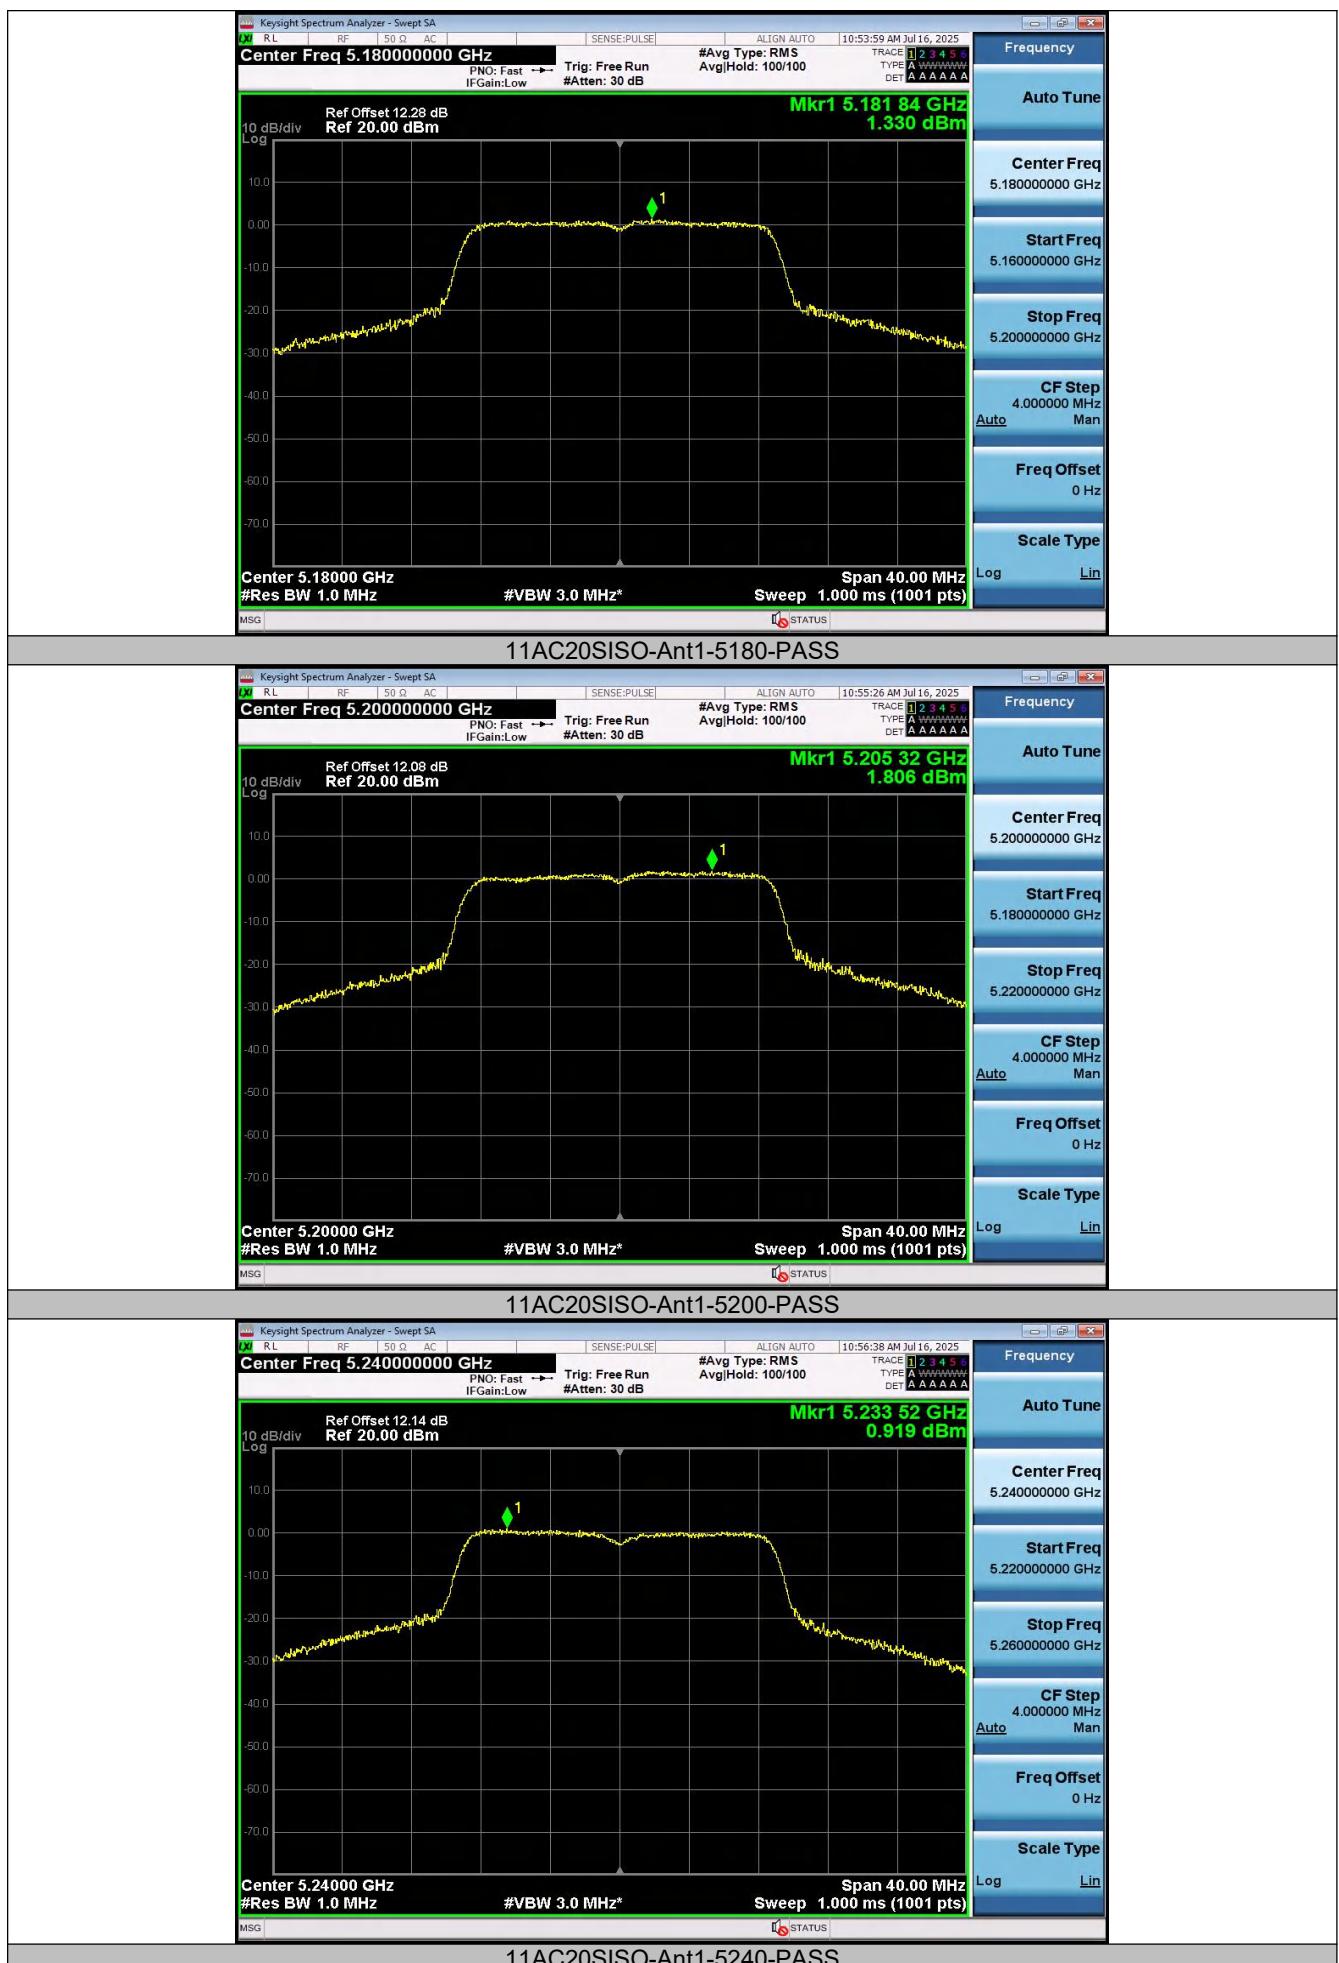


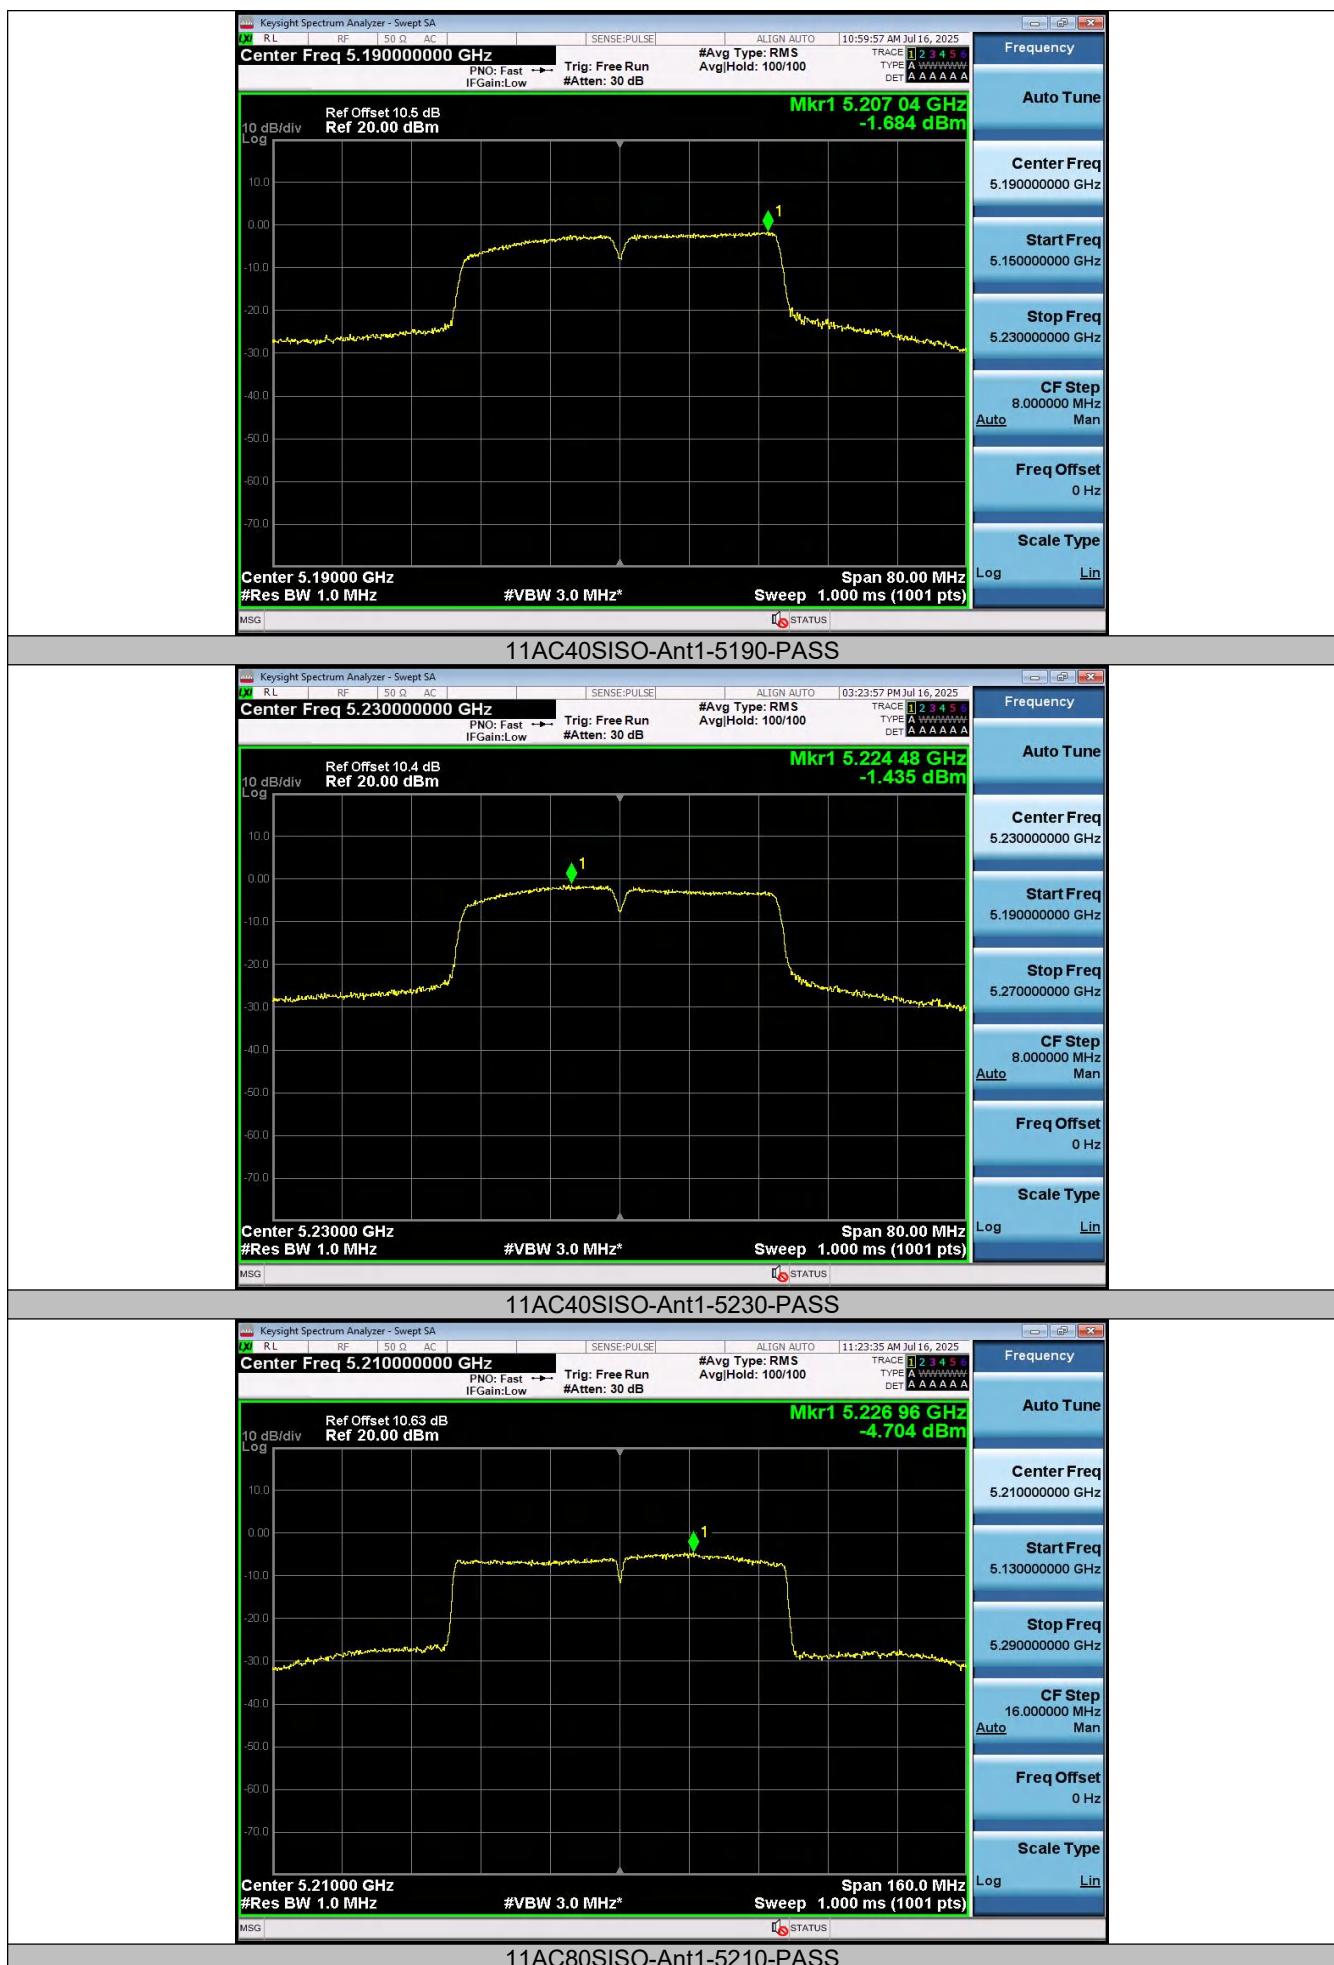


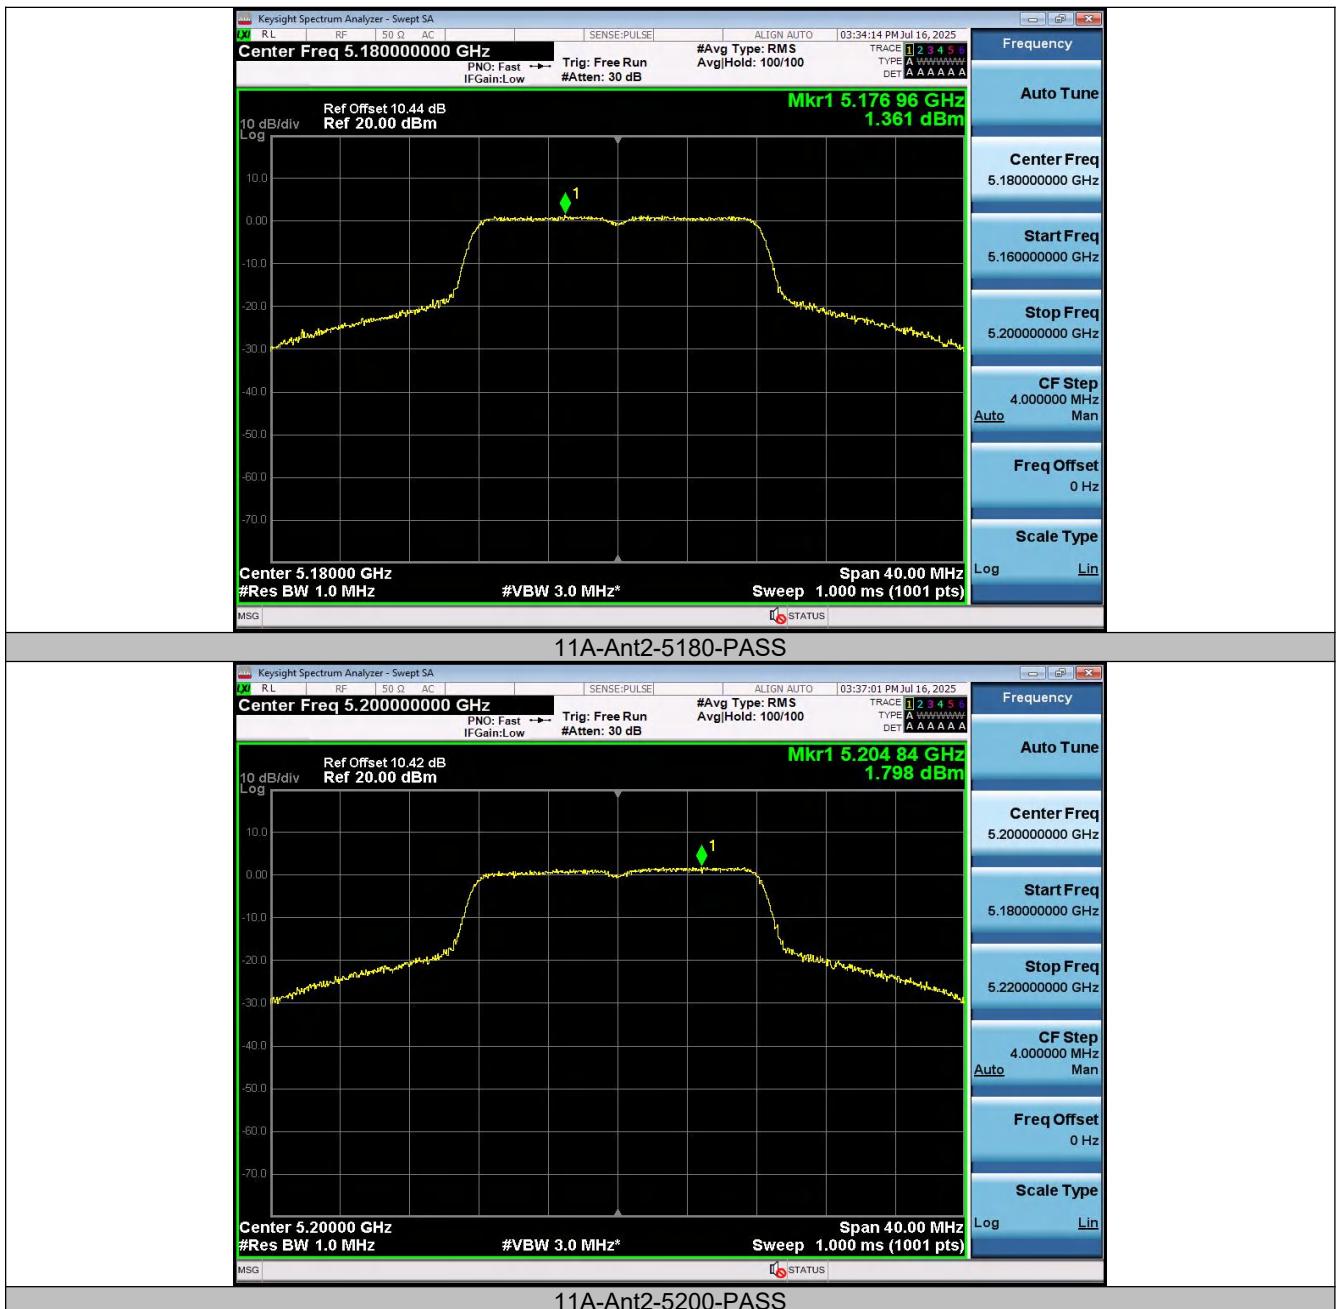Ant 2

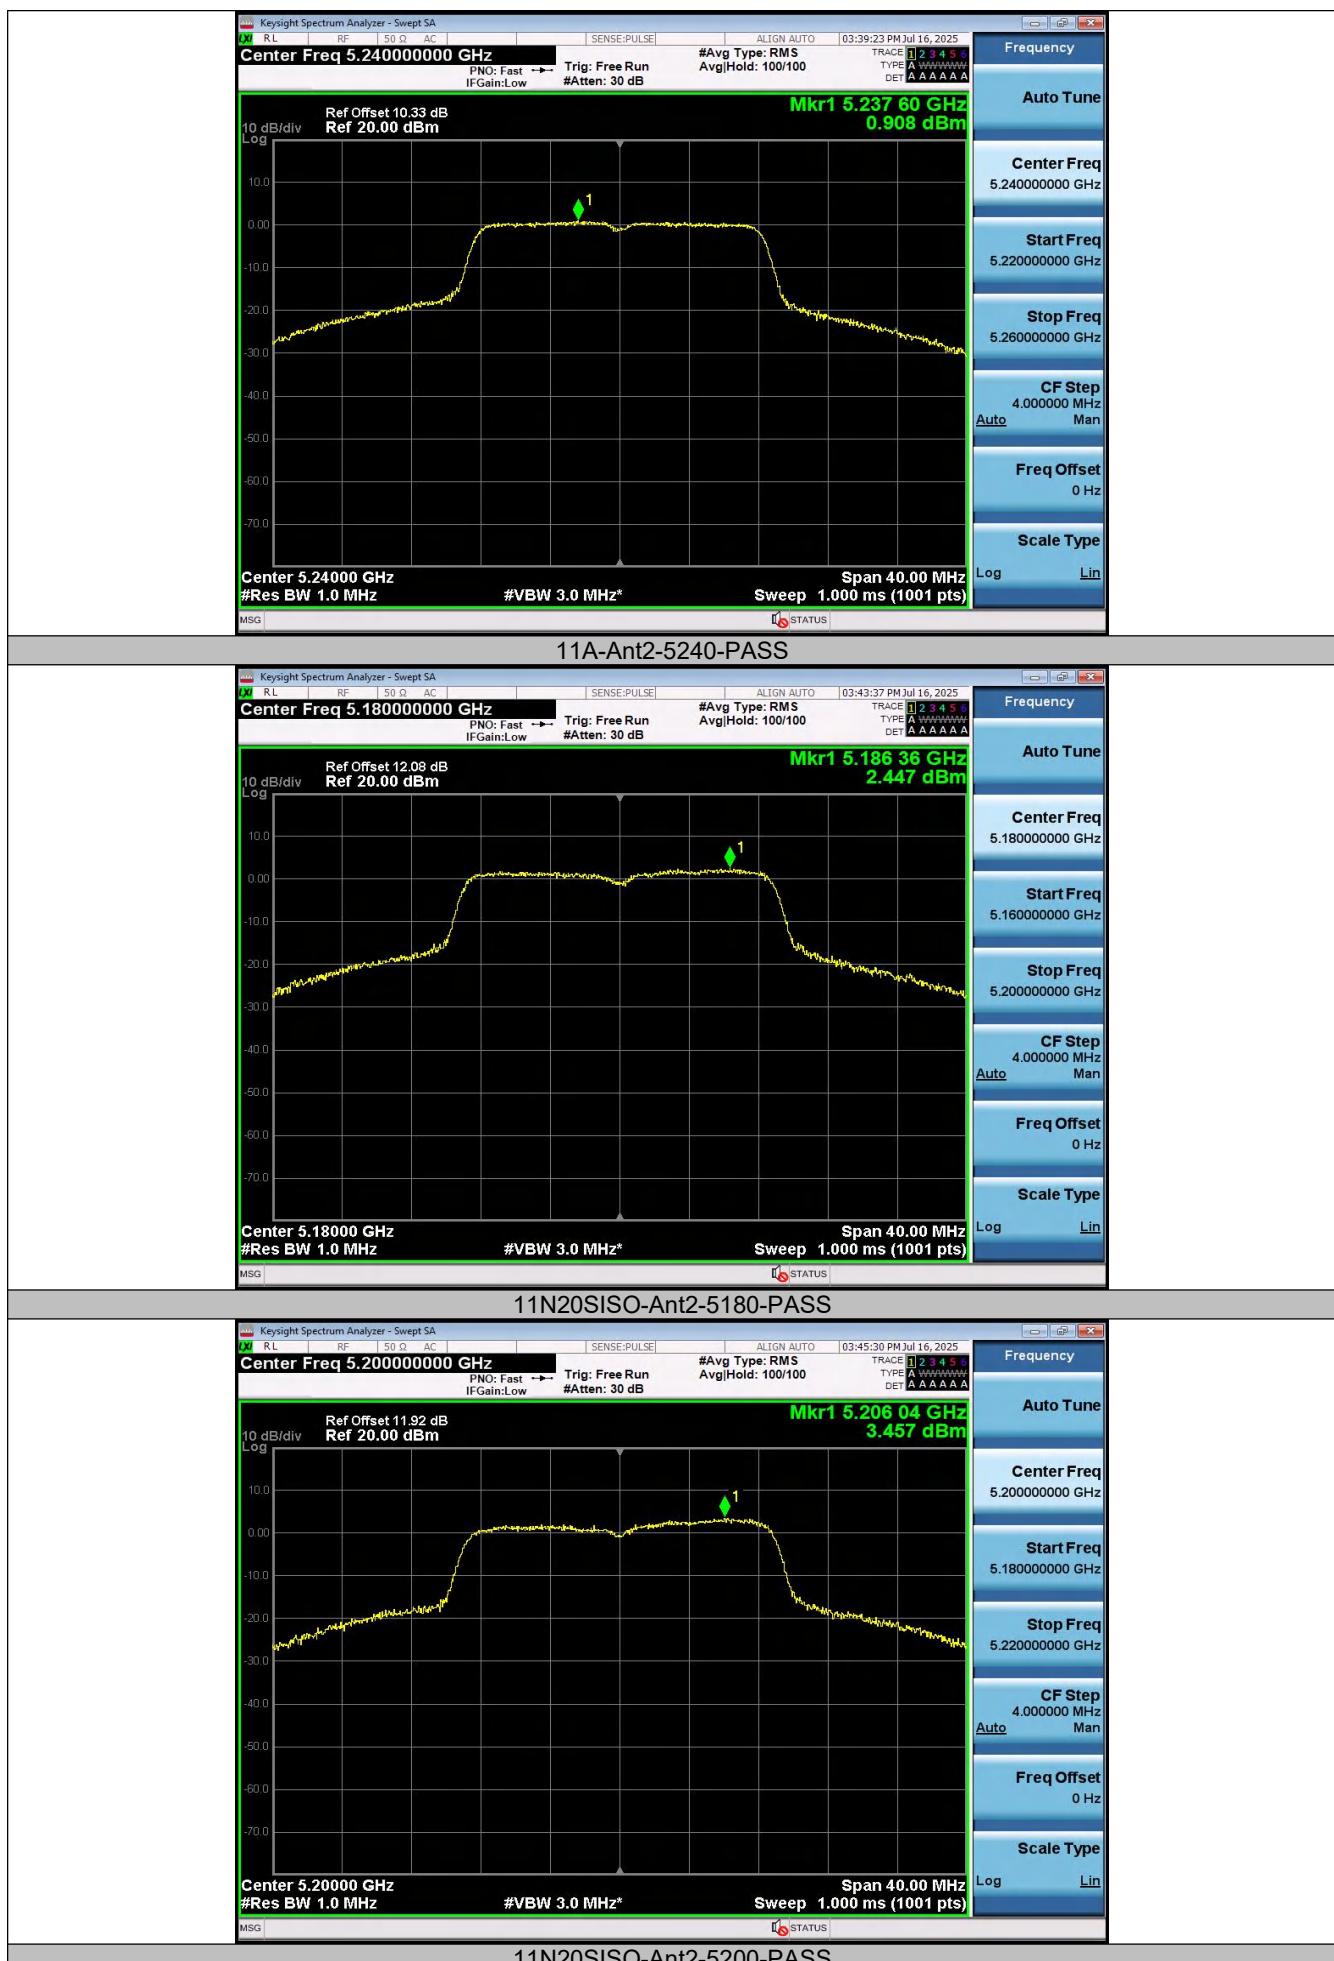

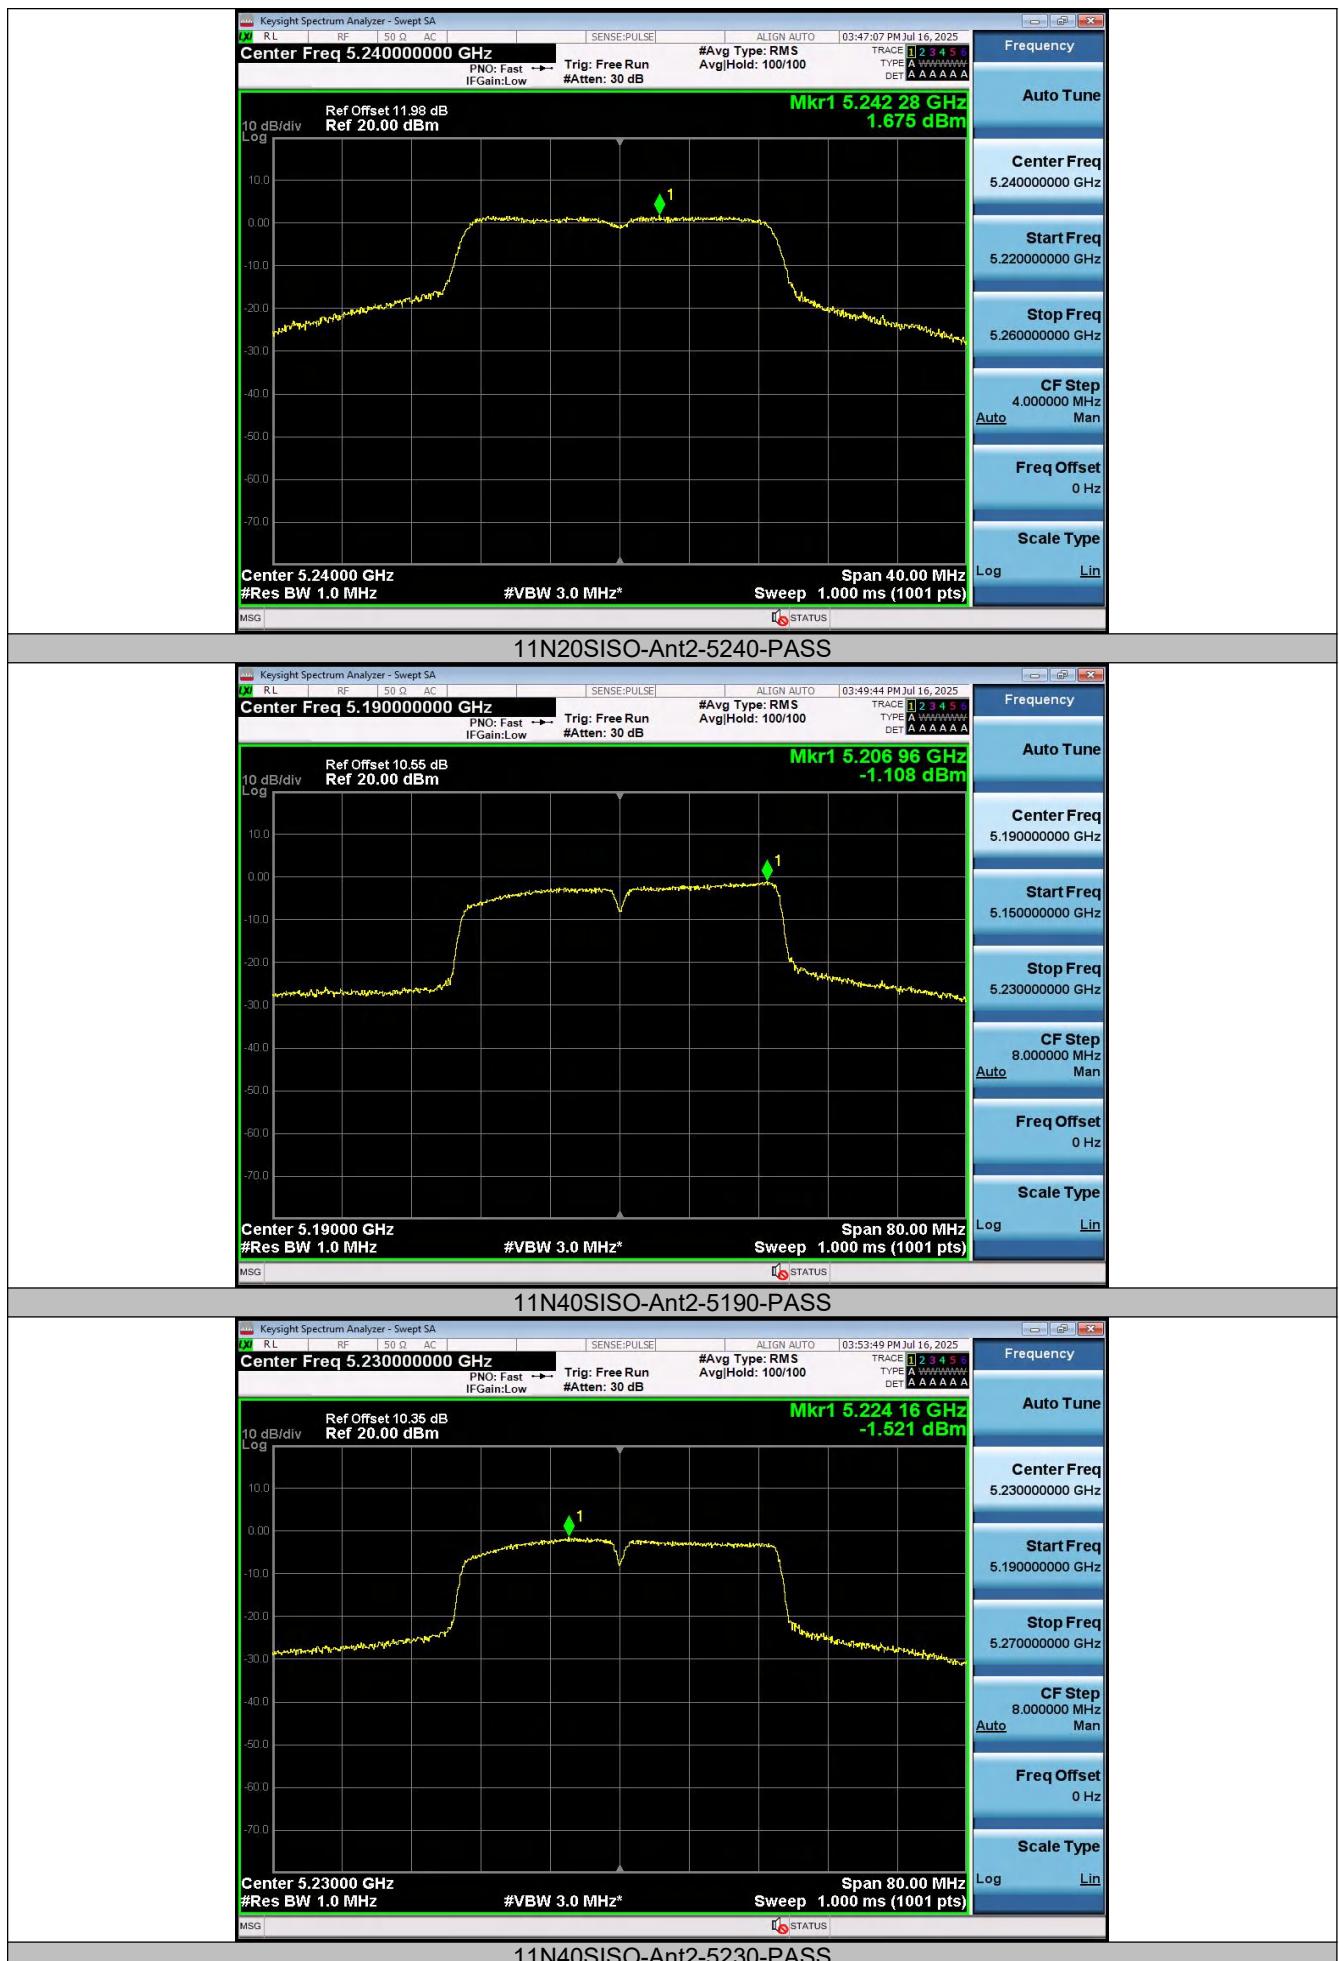

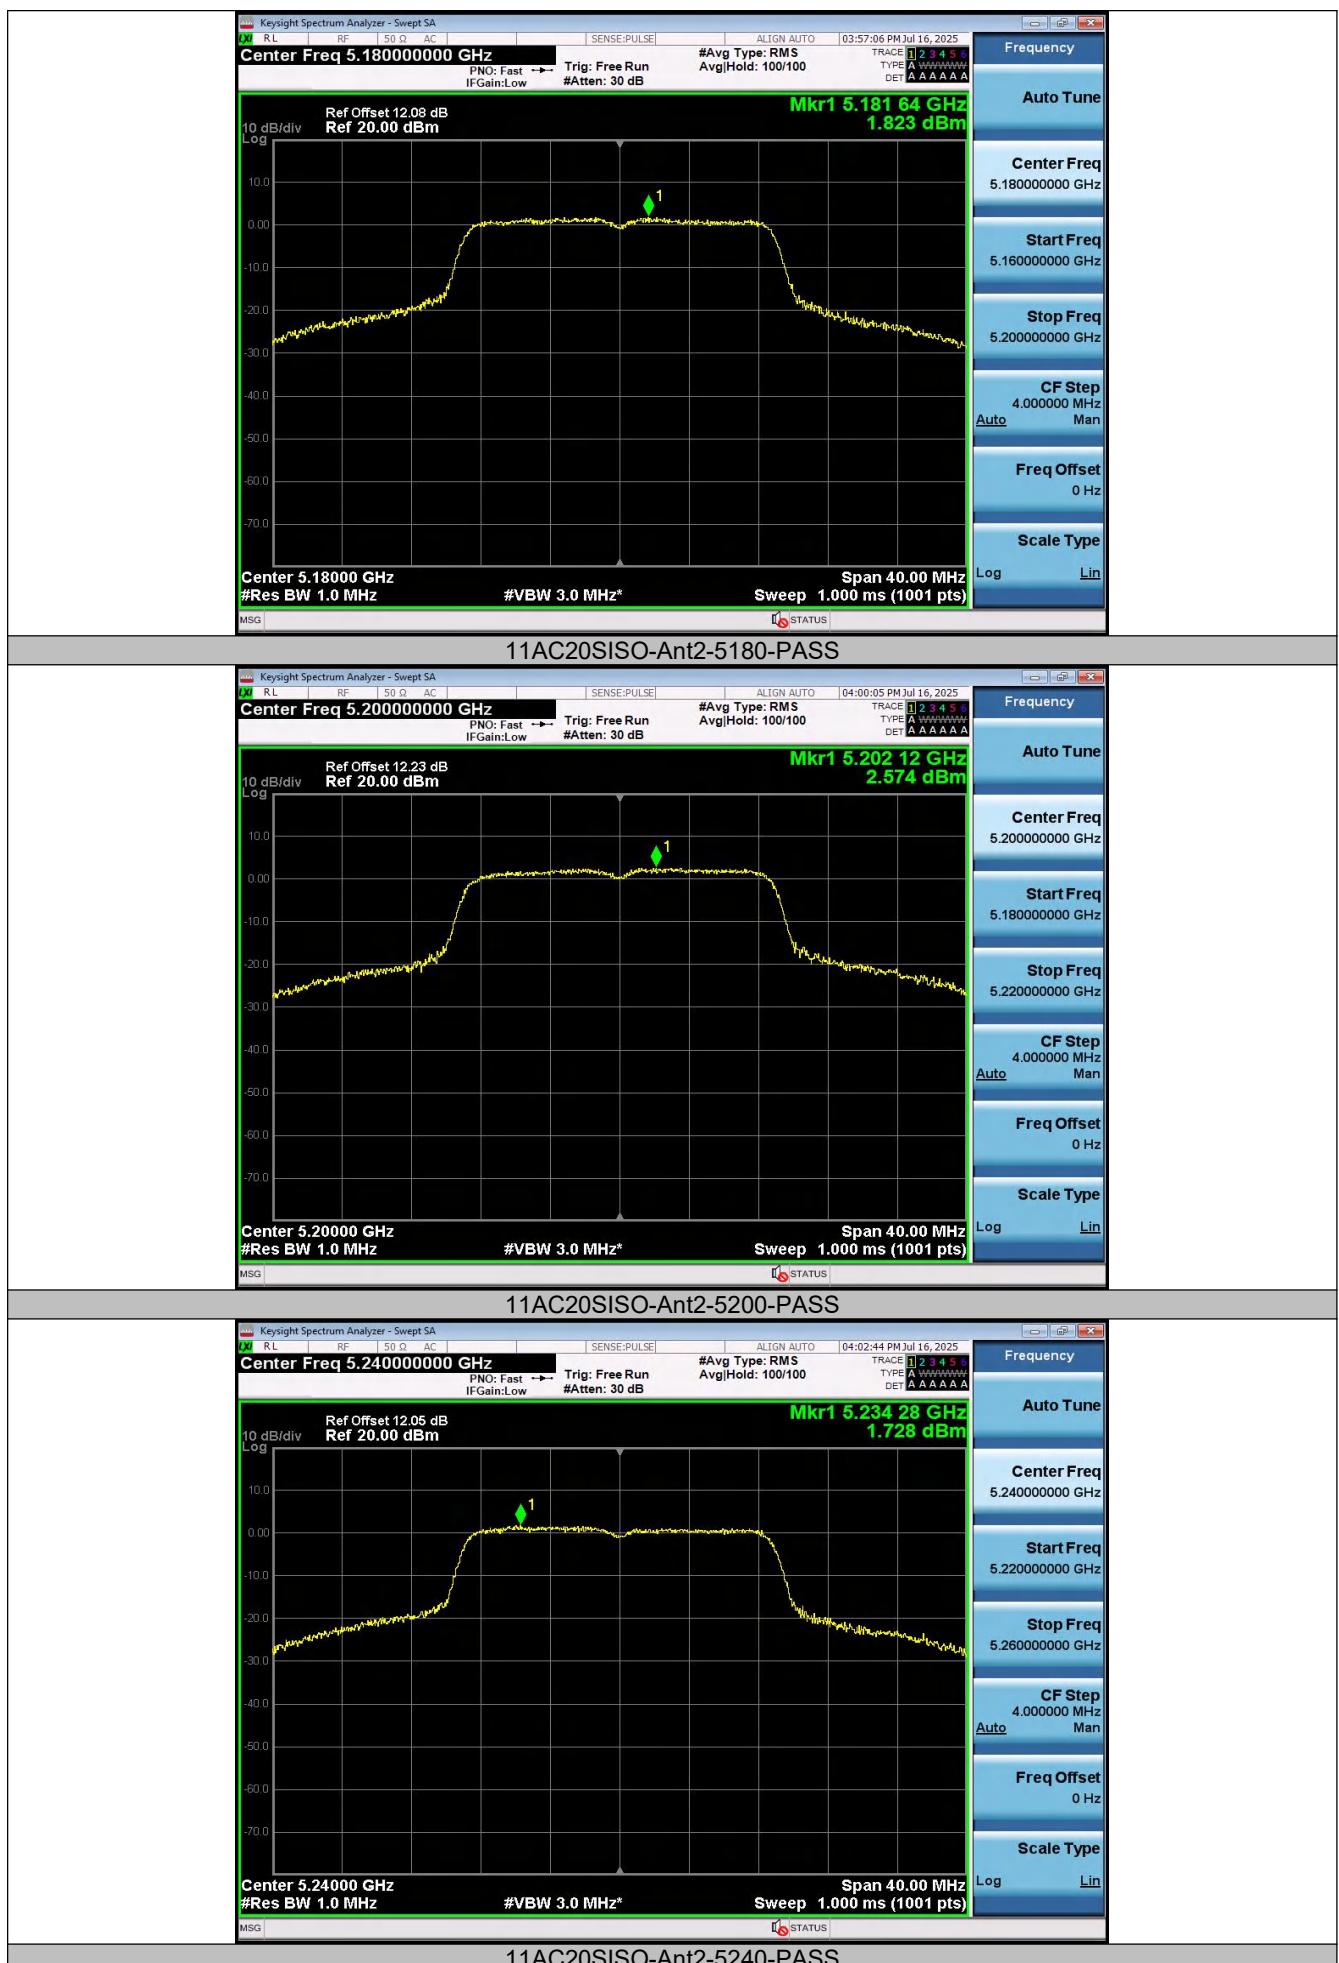

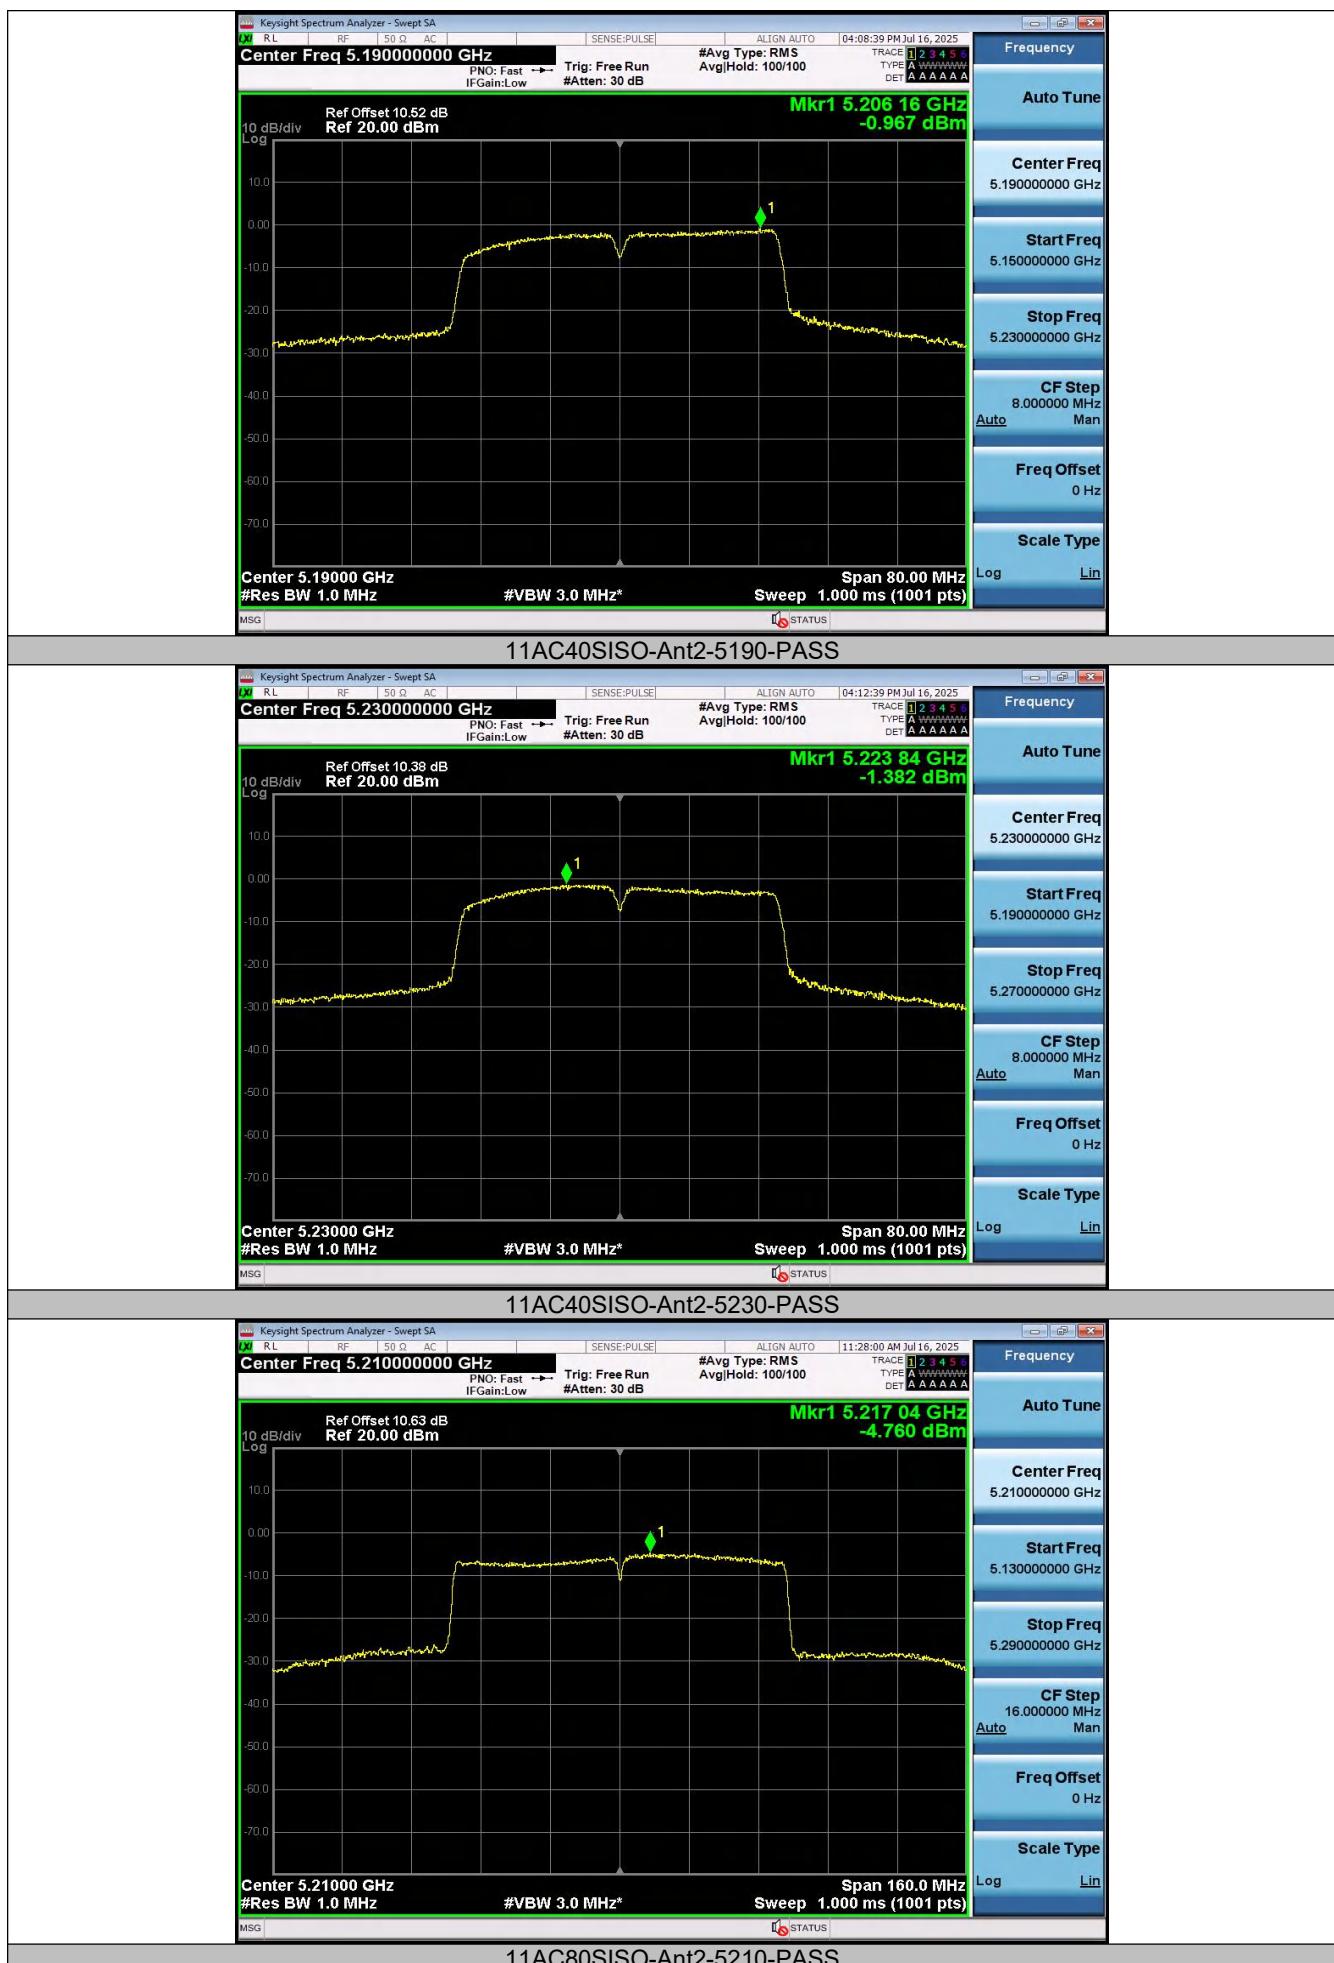

## 4.5 Emission Bandwidth (26dB Bandwidth)

### Limit

N/A

### Test Procedure

1. Set resolution bandwidth (RBW) = approximately 1 % of the EBW.
2. Set the video bandwidth (VBW) > RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW / EBW ratio is approximately 1 %.

### Test Configuration



### Test Results

#### Ant 1

Type	Bands	Channel	26dB Bandwidth (MHz)	Limit (MHz)	Result
802.11a	U-NII 1	36	27.920	N/A	Pass
		40	25.560		
		48	27.480		
802.11n(HT20)	U-NII 1	36	28.440	N/A	Pass
		40	27.560		
		48	27.640		
802.11n(HT40)	U-NII 1	38	52.800	N/A	Pass
		46	50.960		
802.11ac(VHT20)	U-NII 1	36	27.520	N/A	Pass
		40	27.960		
		48	27.280		
802.11ac(VHT40)	U-NII 1	38	52.480	N/A	Pass
		46	51.200		
802.11ac(VHT80)	U-NII 1	42	89.920		

Ant 2

Type	Bands	Channel	26dB Bandwidth (MHz)	Limit (MHz)	Result
802.11a	U-NII 1	36	29.080	N/A	Pass
		40	28.640		
		48	28.240		
802.11n(HT20)	U-NII 1	36	28.680	N/A	Pass
		40	27.640		
		48	28.040		
802.11n(HT40)	U-NII 1	38	52.560	N/A	Pass
		46	51.520		
802.11ac(VHT20)	U-NII 1	36	27.960	N/A	Pass
		40	28.000		
		48	28.960		
802.11ac(VHT40)	U-NII 1	38	52.640	N/A	Pass
		46	50.960		
802.11ac(VHT80)	U-NII 1	42	81.280		

Test plot as follows:

Ant 1






11A-Ant1-5240



11N20SISO-Ant1-5180



11N20SISO-Ant1-5200

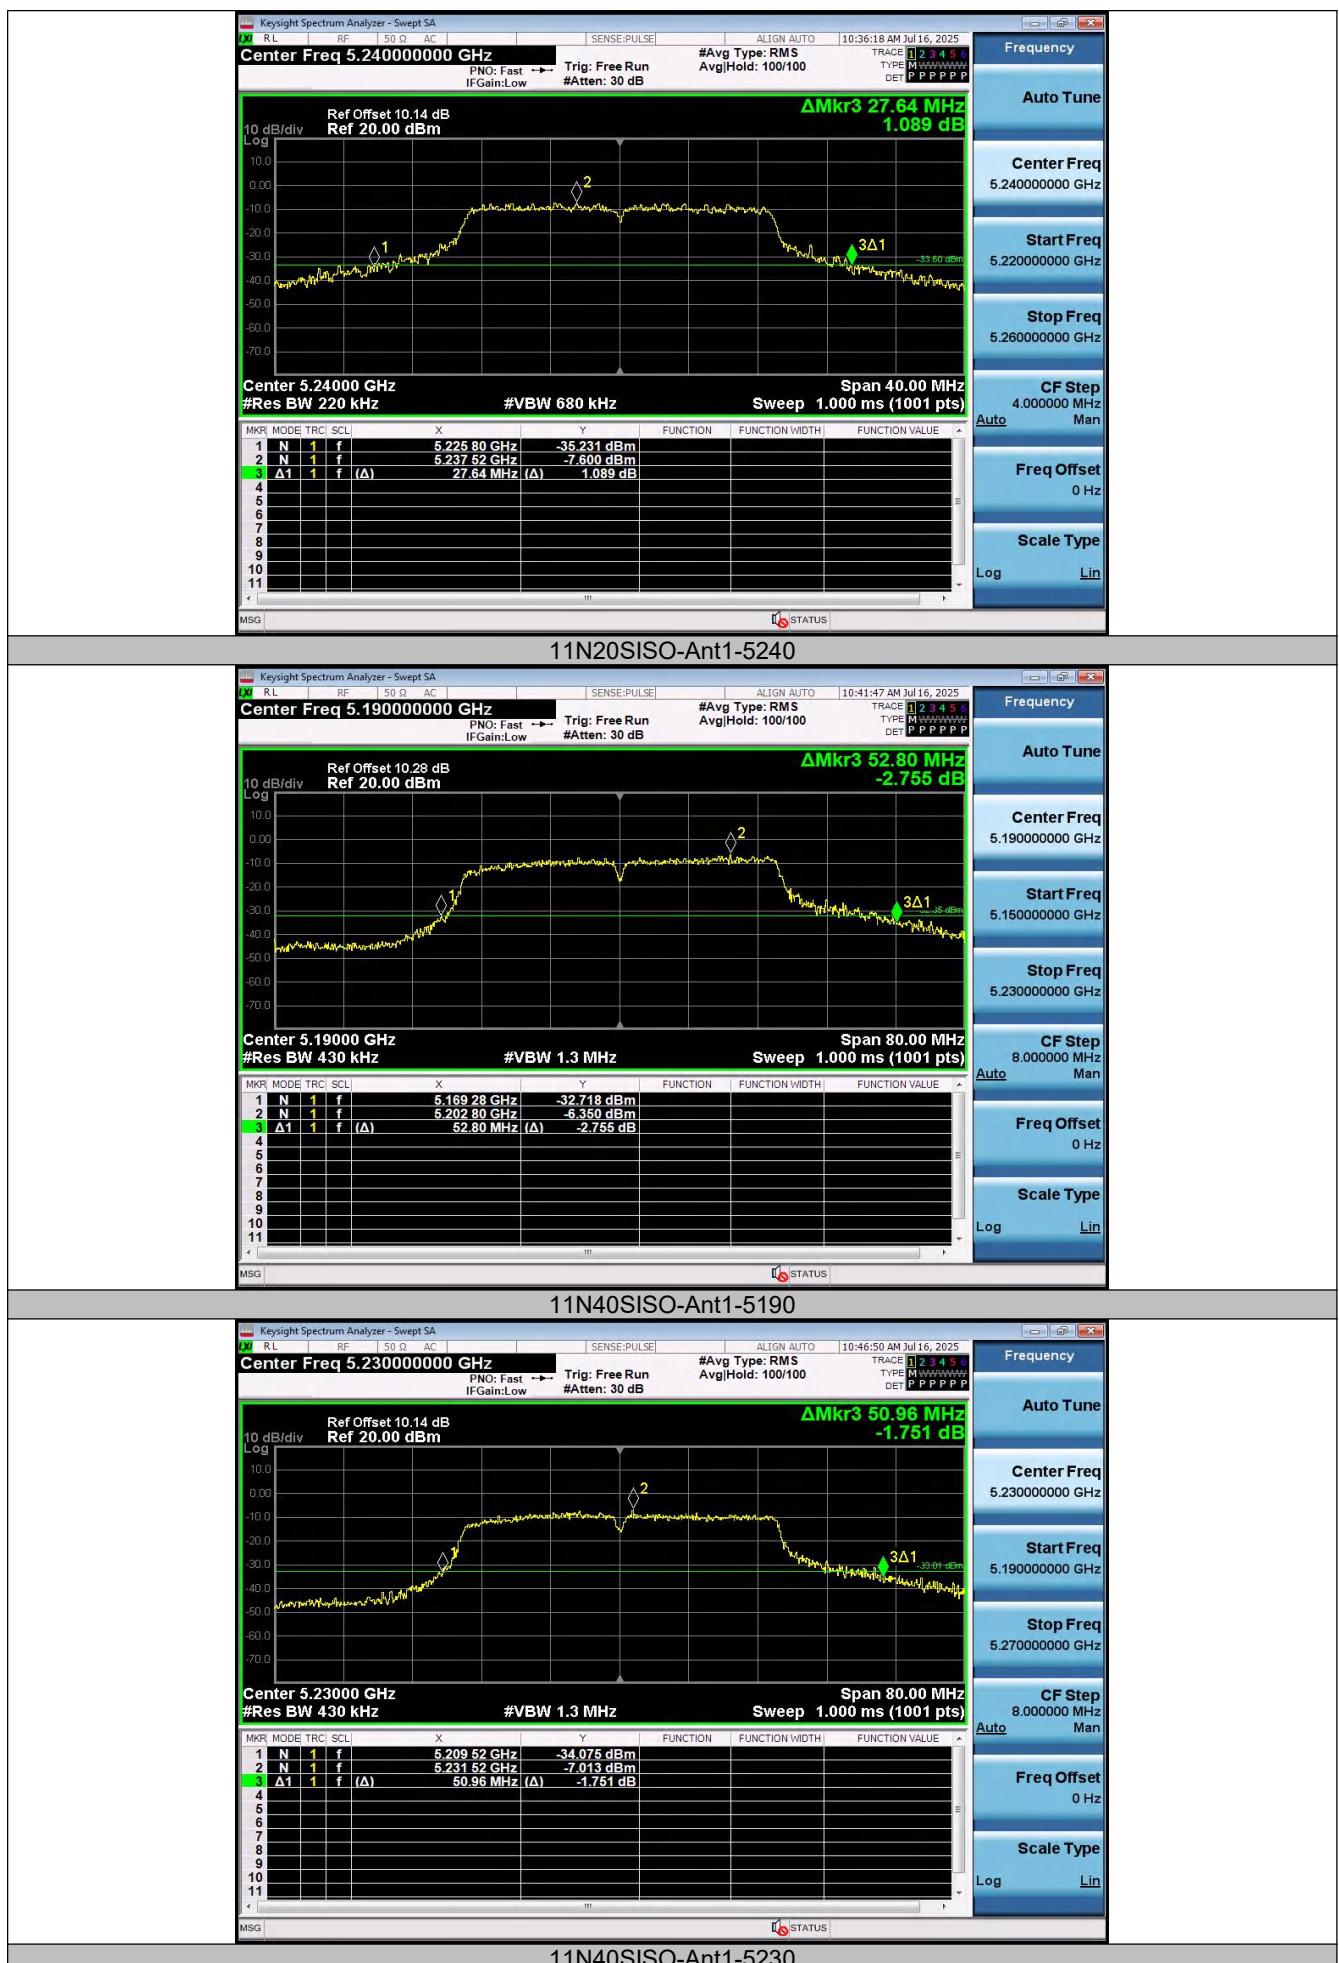




11AC20SISO-Ant1-5180



11AC20SISO-Ant1-5200

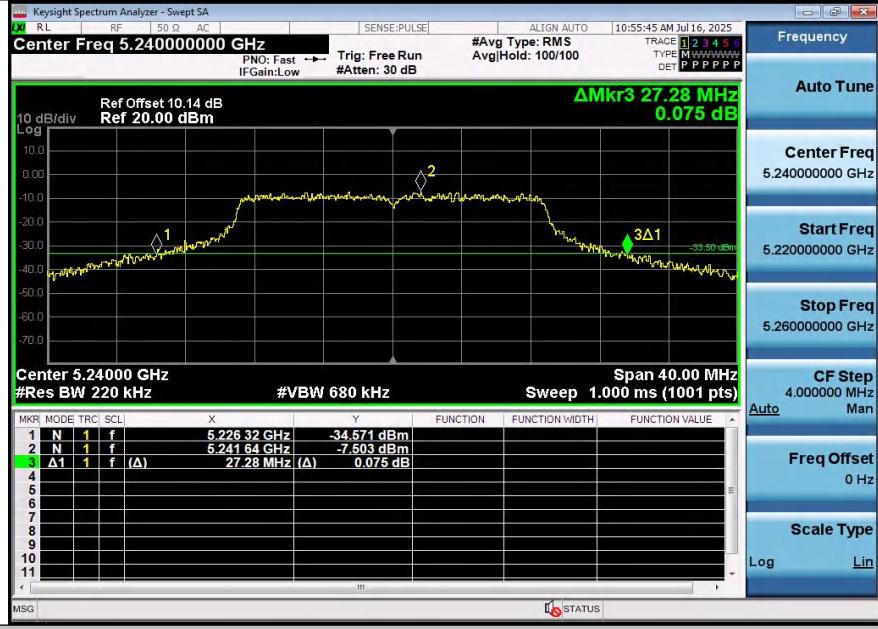

11AC20SISO-Ant1-5240



11AC40SISO-Ant1-5190



11AC40SISO-Ant1-5230



11AC80SISO-Ant1-5210

## Ant 2

