



Test Report

Report No.: RKEYS250815176

Date: Sep.02, 2025

Page 1 of 40

FCC RF TEST REPORT

For

Product: Wireless Headset

Model: M100

FCC ID: 2BRWS-M100

Report No.: RKEYS250815176

Issued for

Zhengzhou Maiwan Trading Co., Ltd.

**Room 1505,15/F,Meisheng Center,No.33 Jinshui East Rd,Zhengzhou Area,Henan
FTZ,Zhengzhou,China**

Issued by

Guangdong KEYS Testing Technology Co., Ltd.

**Building 1, No.18, Shihuan Road, Dongcheng Subdistrict, Dongguan, Guangdong,
China**

Guangdong KEYS Testing Technology Co., Ltd.

Address: Building 1, No.18, Shihuan Road, Dongcheng Subdistrict, Dongguan, Guangdong, China
Tel: +86-0769-22221088 <http://www.keys-lab.com> E-mail: info@keys-lab.com

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection.
This report shall not be altered, increased or deleted. Without written approval of KEYS, this test report shall not be copied except in full and published as advertisement.

TABLE OF CONTENTS

1. TEST CERTIFICATION	3
2. TEST SUMMARY	4
3. TEST SITE	5
3.1. TEST FACILITY	5
3.2. MEASUREMENT UNCERTAINTY	5
3.3. Test Environment Condition	5
4. Test Equipment List	6
5. EUT DESCRIPTION	8
5.1. DESCRIPTION OF TEST CONFIGURATION	9
Channel List for Bluetooth :	9
5.2. EQUIPMENT MODIFICATIONS	9
6. TEST METHODOLOGY	10
6.1. EUT SYSTEM OPERATION	10
7. SETUP OF EQUIPMENT UNDER TEST	11
7.1. DESCRIPTION OF SUPPORT UNITS	11
7.2. BLOCK DIAGRAM OF EUT CONFIGURATION	11
7.3. EUT EXERCISE SOFTWARE	11
8. TEST RESULTS AND MEASUREMENT DATA	13
8.1. ANTENNA REQUIREMENT	13
8.2. MAXIMUM CONDUCTED OUTPUT POWER	14
8.3. 99% BANDWIDTH	16
8.4. 20% BANDWIDTH	18
8.5. CARRIER FREQUENCY SEPARATION	21
8.6. NUMBER OF HOPPING FREQUENCY	23
8.7. TIME OF OCCUPANCY(DEWLL TIME)	25
8.8. OUT OF BAND CONDUCTED EMISSIONS	27
8.9. BAND EDGE	28
8.10. RADIATED SPURIOUS EMISSIONS	30
8.11. CONDUCTED EMISSION	37
9. PHOTOGRAPHS OF TEST SET-UP	40

1. TEST CERTIFICATION


Product:	Wireless Headset
Trade mark:	Wyness
Model:	M100
Applicant :	Zhengzhou Maiwan Trading Co., Ltd.
Address:	Room 1505,15/F,Meisheng Center,No.33 Jinshui East Rd,Zhengzhou Area, Henan FTZ,Zhengzhou,China
Manufacturer:	Shenzhen Lanmiao Technology Co., Ltd.
Address:	Room S4-03-018, 2013 Fashion Plaza (Commercial City), New Asia Plaza, No. 3999, Longgang Avenue, Huale Community, Henggang Street, Longgang District, Shenzhen,China
Sample Receive Date:	Aug.15, 2025
Test Date:	Aug.15, 2025~Aug.28, 2025
Applicable Standards:	CFR 47, FCC Part 15.247
Application Purpose	Original Grant

The above equipment has been tested by Guangdong KEYS Testing Technology Co., Ltd. and found compliance with the requirements in the technical standards mentioned above. The test results presented in this report only relate to the product/system tested. The other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.



Prepared by:

Evan Fang / Engineer



Approved by:

Bruce Zhang / Manager



2. TEST SUMMARY

FCC Part 15C	Description of Test	Result
15.247(b)(4),15.203	Antenna Requirement	Pass
15.247(b)(1)	Maximum Peak Conducted Output Power	Pass
15.247(a)	99% Bandwidth	Pass
15.247(a)(1)	20dB Bandwidth	Pass
15.247(a)(1)	Carrier Frequency Separation	Pass
15.247(a)(1)(iii)	Number of Hopping Frequency	Pass
15.247(a)(1)(iii)	Time of Occupancy(Dwell Time)	Pass
15.247(d)	Out of Band Conducted Emissions	Pass
15.247(d)	Band Edge	Pass
15.247(d)&15.205	Radiated Spurious Emissions	Pass
15.207(a)	Conducted Emission on AC Mains	Pass

3. TEST SITE

3.1. TEST FACILITY

Guangdong KEYS Testing Technology Co., Ltd.

Address: Building 1, No.18, Shihuan Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

A2LA Certificate Number.:7547.01

FCC Designation Number:CN1419

FCC Test Firm Registration Number:361541

3.2. MEASUREMENT UNCERTAINTY

Parameter	Uncertainty
Conducted Emission(150KHz-30MHz)	±3.2dB
Radiated Emission(30MHz-1GHz)	±4.7dB
Radiated Emission (1GHz-6GHz)	±5.1dB
Radiated Emission (6GHz-18GHz)	±5.1dB

Note 1: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.3. Test Environment Condition

Ambient Temperature:	24~25°C
Ambient Relative Humidity:	55~60 %



4. Test Equipment List

Equipment	Manufacturer	Model	Equipment No.	Cal. Date	Cal. Interval
EMI Test Receiver	Rohde&Schwarz	ESCI	KEYS-EL-203	Mar. 03, 2025	1 Year
Pulse limiter	Rohde&Schwarz	ESH3-Z2	KEYS-EL-201	Mar. 03, 2025	1 Year
LISN	Rohde&Schwarz	ENV216	KEYS-EL-202	Mar. 03, 2025	1 Year
Shielding Room	Taihe Mao Rui Electronic Equipment Co., Ltd.	8m*4m*4m	KEYS-EL-230	2024 / 10 / 12	5 Year
EMI Test Receiver	Rohde&Schwarz	ESCI7	KEYS-EL-205	Mar. 03, 2025	1 Year
Logarithmic Periodic Broadband Antenna	SCHWARZBECK	VULB9168	KEYS-EL-209	Mar. 06, 2025	3 Year
Preamplifier	HP	8447F	KEYS-EL-210	Mar. 03, 2025	1 Year
Horn Antenna	SCHWARZBECK	BBHA 9120D	KEYS-EL-239	Mar. 06, 2025	3 Year
Preamplifier	/	1-18-53G22	KEYS-EL-240	Mar. 03, 2025	1 Year
Anechoic Chamber	Taihe Mao Rui Electronic Equipment Co., Ltd.	9m*6m*6m	KEYS-EL-230	2024 / 10 / 12	5 Year
Signal Analyzer	Keysight	N9020A	KEYS-EL-238	Mar. 03, 2025	1 Year
Spectrum Analyzer	Rohde&Schwarz	FSV-40N	KEYS-EL-269	Mar. 03, 2025	1 Year



WDEBAND RADIOCOMMUNICATION TESTER	Rohde&Schwarz	CMW500	KEYS-EL-236	Mar. 03, 2025	1 Year
18-40GHz Antenna	COM-MW	ZLB7-18-40G-777	KEYS-EL-276	May 19, 2025	1 Year
18-40GHz Preamplifier	QUANJUDA	LNA-18004000-50G35	KEYS-EL-277	May 17, 2025	1 Year
Filter	WCS Technology	ZBSF6-C2400-2483.5-294	KEYS-EL-270	May 17, 2025	1 Year
RF Cable	Rosenberger	/	KEYS-EL-278	May 17, 2025	3 Year
RF Cable	COM-MW	DCA9-2.92M8 0002.92M3.6-1 304	KEYS-EL-279	May 17, 2025	3 Year
DC Power	Agilent	E3632A	KEYS-EL-243	Mar. 03, 2025	1 Year
Power switching box	WCS Technology	SMU-3002	KEYS-EL-247	Apr. 16, 2025	1 Year

Note: The attenuator is integrated into the Power Switch Box and taken into consideration during testing.

5. EUT DESCRIPTION

Product	Wireless Headset
Test Model	M100
Additional Model	/
Rating	Type-C Input : DC 5V Battery :DC 3.7V, 400mAh
FCC ID	2BRWS-M100
Antenna Type	PCB Antenna
Antenna Gain	1.8dBi
Operation Frequency	2402-2480MHz
Number of Channels:	79
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK

Note:

- 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2) Antenna gain was provided by the applicant/ manufacturer, and the applicant/ manufacturer is responsible for its validity.
- 3) The test results in the report only apply to the tested sample.

5.1. DESCRIPTION OF TEST CONFIGURATION

Channel List for Bluetooth :

Channel No.	Frequency (MHz)						
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	-	-

5.2. EQUIPMENT MODIFICATIONS

Any modifications installed previous to testing by Zhengzhou Maiwan Trading Co., Ltd. will be incorporated in each production model sold / leased in the United States.

No modifications were installed by KEYS Testing Technology Co., Ltd.

6. TEST METHODOLOGY

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10-2020 and KDB 558074 D01 DTS Meas Guidance v04.

6.1. EUT SYSTEM OPERATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables were manipulated to produce worst case emissions. The EUT was powered by DC 5V during the test.

On GFSK/ $\pi/4$ -DQPSK,/8DPSK mode, only one antenna is used, and all modes were tested and only the worst case data is shown in the report.

7. SETUP OF EQUIPMENT UNDER TEST

7.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support Equipment


No.	Equipment	Model	Serial No.	Manufacturer
1	Notebook	Lenovo Rescuer 15ISK	PF0GS9S1	Lenovo
2	Adapter	MDY-14-EE	/	MI

Support Cable

No.	Description	Shield	Length	Manufacturer
1	/	/	/	/
2	/	/	/	/

Note: 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

7.2. BLOCK DIAGRAM OF EUT CONFIGURATION




(EUT: SLEEP MASK HEADPHONES)

7.3. EUT EXERCISE SOFTWARE

Test software: BT Tool V1.1.2

Mode	Power setting
GFSK	3
4-DQPSK	3
8PSK	3

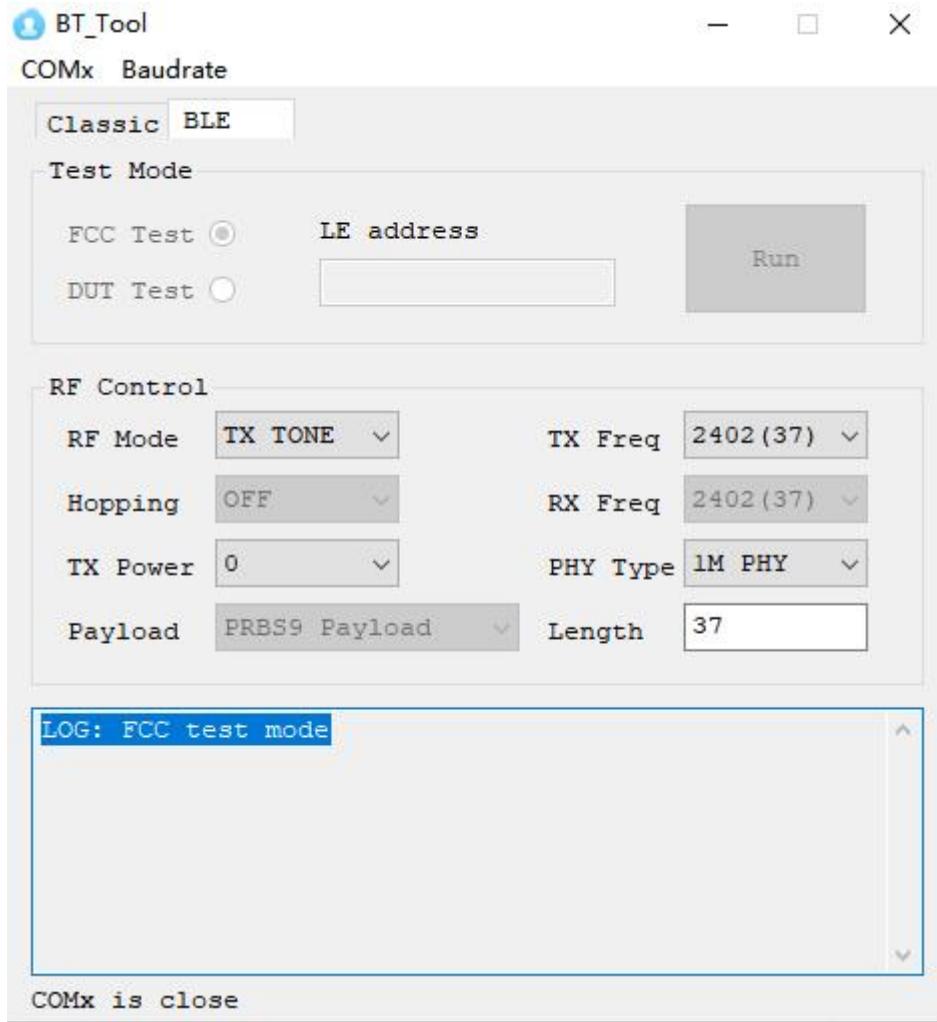

8. TEST RESULTS AND MEASUREMENT DATA

8.1. ANTENNA REQUIREMENT

Test Requirement:	FCC Part 15.247(b)(4)) and Part 15.203
Test Result:	According to the manufacturer declared, the EUT has a PCB antenna, the directional gain of antenna is 1.8dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision. Refer to EUT Photo for further details.

Test Report

Report No.: RKEYS250815176

Date: Sep.02, 2025


Page 14 of 40

8.2. MAXIMUM CONDUCTED OUTPUT POWER

Test Requirement:	FCC Part1515.247 (b)(1)
Test Mode:	Transmitting mode with modulation
Limit:	For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
Test Procedure:	<p>This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:</p> <p>a) Use the following spectrum analyzer settings:</p> <ol style="list-style-type: none">1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.2) RBW > 20 dB bandwidth of the emission being measured.3) VBW \geq RBW.4) Sweep: Auto.5) Detector function: Peak.6) Trace: Max hold. <p>b) Allow trace to stabilize.</p> <p>c) Use the marker-to-peak function to set the marker to the peak of the emission.</p> <p>d) The indicated level is the peak output power, after any corrections for external attenuators and cables.</p> <p>e) A plot of the test results and setup description shall be included in the test report.</p> <p>NOTE—A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.</p>

Test Result:	PASS
--------------	------

8.2.1. Test Setup:

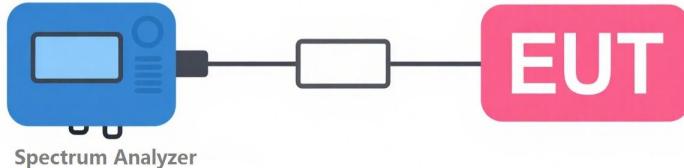


8.2.2. Test Result

Please refer to Appendix A: Test Results of Bluetooth BR & EDR

8.3. 99% BANDWIDTH

Test Requirement:	FCC Part15.247 (a)
Test Mode:	Transmitting mode with modulation
Limit:	/
Test Procedure:	<p>a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.</p> <p>b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.</p> <p>c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2.</p> <p>d) Steps a) through c) might require iteration to adjust within the specified tolerances.</p> <p>e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.</p> <p>f) Set detection mode to peak and trace mode to max hold.</p> <p>g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).</p>
Test Result:	PASS

8.3.1. Test Setup:

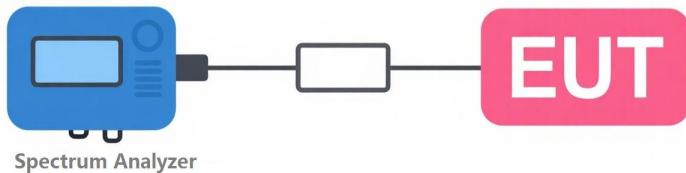

8.3.2. Test Result


Please refer to Appendix A: Test Results of Bluetooth BR & EDR

8.4. 20% BANDWIDTH

Test Requirement:	FCC Part15.247 (a)(1)
Test Mode:	Transmitting mode with modulation
Limit:	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
Test Procedure:	<ul style="list-style-type: none">a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.d) Steps a) through c) might require iteration to adjust within the specified tolerances.e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.f) Set detection mode to peak and trace mode to max hold.g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to

	<p>stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).</p> <p>h) Determine the “-xx dB down amplitude” using [(reference value) – xx]. Alternatively, this calculation may be made by using the marker-delta function of the instrument.</p> <p>i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).</p> <p>j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.</p> <p>k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).</p>
Test Result:	PASS

8.4.1. Test Setup

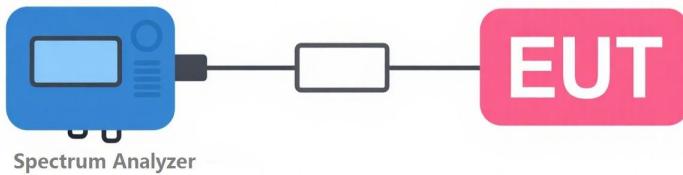



Report No.: RKEYS250815176

Date: Sep.02, 2025

Page 20 of 40


8.4.2. Test Result

Please refer to Appendix A: Test Results of Bluetooth BR & EDR

8.5. CARRIER FREQUENCY SEPARATION

Test Requirement:	FCC Part15.247 (a)(1)
Test Mode:	Transmitting mode with modulation
Limit:	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW..
Test Procedure:	<p>The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> a) Span: Wide enough to capture the peaks of two adjacent channels. b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel. c) Video (or average) bandwidth (VBW) \geq RBW. d) Sweep: Auto. e) Detector function: Peak. f) Trace: Max hold. g) Allow the trace to stabilize. <p>Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.</p>
Test Result:	PASS

8.5.1. Test Setup

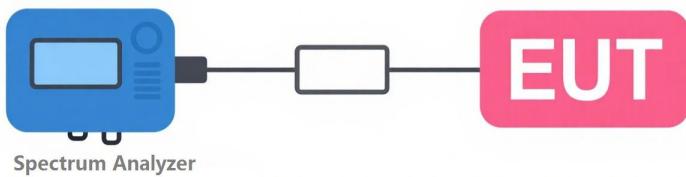




8.5.2. Test Result

Please refer to Appendix A: Test Results of Bluetooth BR & EDR

8.6. NUMBER OF HOPPING FREQUENCY

Test Requirement:	FCC Part15.247 (a)(1)(iii)
Test Mode:	Transmitting mode with modulation
Limit:	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Procedure:	<p>The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none">a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.c) VBW \geq RBW.d) Sweep: Auto.e) Detector function: Peak.f) Trace: Max hold.g) Allow the trace to stabilize. <p>It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.</p>
Test Result:	PASS

8.6.1. Test Setup

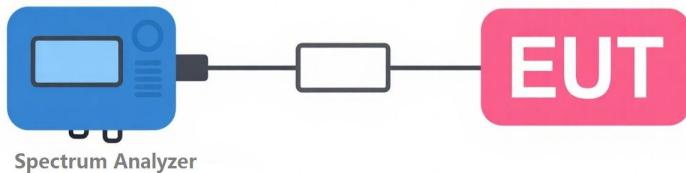

8.6.2. Test Result


Please refer to Appendix A: Test Results of Bluetooth BR & EDR

8.7. TIME OF OCCUPANCY(DEWLL TIME)

Test Requirement:	FCC Part15.247 (a)(1)(iii)
Test Mode:	Transmitting mode with modulation
Limit:	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Procedure:	<p>The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none">a) Span: Zero span, centered on a hopping channel.b) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.d) Detector function: Peak.e) Trace: Max hold. <p>Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.</p> <p>Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:</p>

	<p>(Number of hops in the period specified in the requirements) = (number of hops on spectrum analyzer) × (period specified in the requirements / analyzer sweep time)</p> <p>The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.</p> <p>The measured transmit time and time between hops shall be consistent with the values described in the operational description for the EUT.</p>
Test Result:	PASS

8.7.1. Test Setup

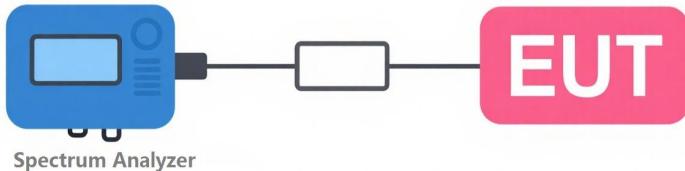


8.7.2. Test Result

Please refer to Appendix A: Test Results of Bluetooth BR & EDR

8.8. OUT OF BAND CONDUCTED EMISSIONS

Test Requirement:	FCC Part15.247 (d)		
Test Mode:	Transmitting mode with modulation		
Limit:	At least 20 dB below the highest level of the desired power in the pass band.		
Test Procedure:	Frequency Range	Field Strength Limit (μ V/m) at 3 m	Measurement Distance(meters)
	0.009~0.490	2400/F(kHz)	300
	0.490~1.705	24000/F(kHz)	30
	1.705~30.0	30	30
	30-88	100	3
	88-216	150	3
	216-960	200	3
	Above 960	500	3
Test Result:	PASS		

8.8.1. Test Setup:

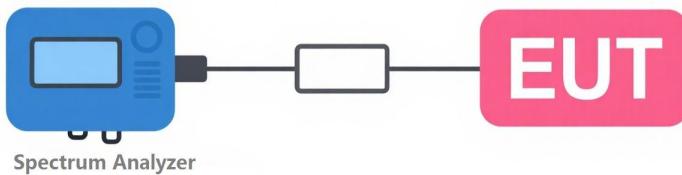

8.8.2. Test Result

Please refer to Appendix A: Test Results of Bluetooth BR & EDR

8.9. BAND EDGE

Test Requirement:	FCC Part15.247 (d)		
Test Mode:	Transmitting mode with modulation		
Limit:	The Power Density does not exceed 8dBm/3 kHz.		
Test Procedure:	Frequency Range	Field Strength Limit (μ V/m) at 3 m	Measurement Distance(meters)
	0.009~0.490	2400/F(kHz)	300
	0.490~1.705	24000/F(kHz)	30
	1.705~30.0	30	30
	30-88	100	3
	88-216	150	3
	216-960	200	3
	Above 960	500	3
Test Result:	Radiated emission measurements were performed from 9kHz to tenth harmonic or 40GHz. The EUT for testing is arranged on a styrene turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter.		
Test Result:	Pass		

8.9.1. Test Setup:

Refer to 8.10.1

8.9.2. Test Result

Only worse case 8DPSK is reported



8DPSK-2402MHz:

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2390.00	80.2	55.6	28.2	4.6	57.4	74.0	-16.6
Horizontal	2390.00	60.8	55.6	28.2	4.6	38.0	54.0	-16.0

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
Vertical	2390.00	82.2	55.6	28.2	4.6	59.4	74.0	-14.6
Vertical	2390.00	61.3	55.6	28.2	4.6	38.5	54.0	-15.5

8DPSK-2480MHz:


Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2483.50	80.9	55.9	28.9	5.2	59.1	74.0	-14.9
Horizontal	2483.50	60.1	55.9	28.9	5.2	38.3	54.0	-15.7

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
Vertical	2483.50	81.3	55.9	28.9	5.2	57.5	74.0	-14.5
Vertical	2483.50	60.9	55.9	28.9	5.2	39.1	54.0	-14.9


8.10. RADIATED SPURIOUS EMISSIONS

Test Requirement:	FCC Part 15.247(d), 15.205																										
Test Mode:	Transmitting mode with modulation																										
Limit:	<table border="1"><thead><tr><th>Frequency Range</th><th>Field Strength Limit (μV/m) at 3 m</th><th>Measurement Distance(meters)</th></tr></thead><tbody><tr><td>0.009~0.490</td><td>2400/F(kHz)</td><td>300</td></tr><tr><td>0.490~1.705</td><td>24000/F(kHz)</td><td>30</td></tr><tr><td>1.705~30.0</td><td>30</td><td>30</td></tr><tr><td>30-88</td><td>100</td><td>3</td></tr><tr><td>88-216</td><td>150</td><td>3</td></tr><tr><td>216-960</td><td>200</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>3</td></tr></tbody></table>			Frequency Range	Field Strength Limit (μ V/m) at 3 m	Measurement Distance(meters)	0.009~0.490	2400/F(kHz)	300	0.490~1.705	24000/F(kHz)	30	1.705~30.0	30	30	30-88	100	3	88-216	150	3	216-960	200	3	Above 960	500	3
Frequency Range	Field Strength Limit (μ V/m) at 3 m	Measurement Distance(meters)																									
0.009~0.490	2400/F(kHz)	300																									
0.490~1.705	24000/F(kHz)	30																									
1.705~30.0	30	30																									
30-88	100	3																									
88-216	150	3																									
216-960	200	3																									
Above 960	500	3																									
Test Procedure:	<p>Radiated emission measurements were performed from 9kHz to tenth harmonic or 40GHz. The EUT for testing is arranged on a styrene turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter.</p>																										
Test Result:	Pass																										


8.10.1. Test Setup:

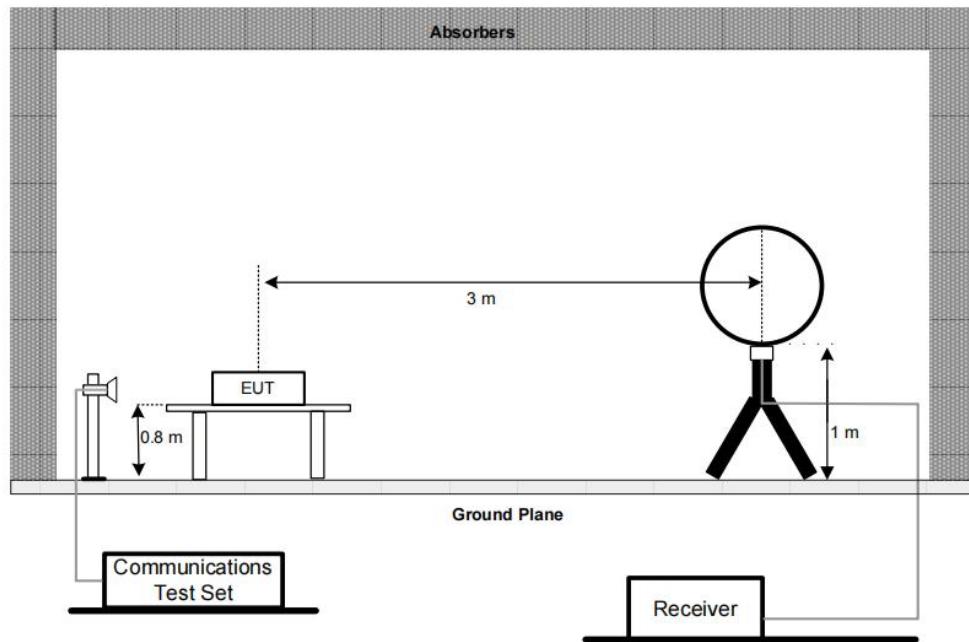

Test set-up of radiated disturbance (Up to 30MHz)

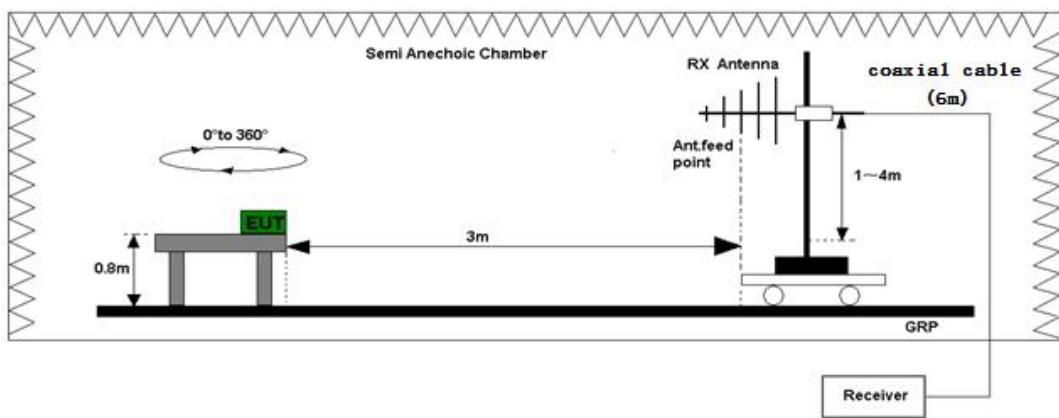

Test set-up of radiated disturbance (30MHz to 1GHz)

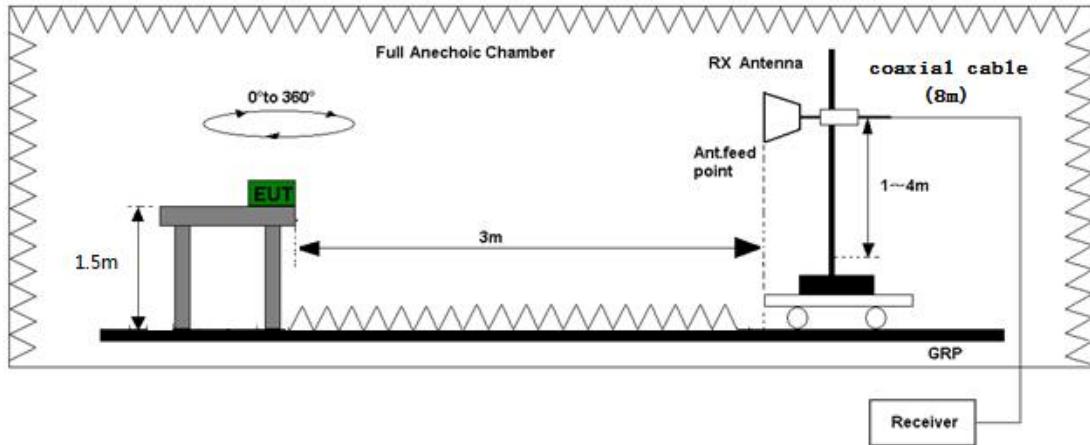

Test set-up of radiated disturbance (Above 1GHz)

8.10.2. Test Result


Test voltage:	AC 120V/60Hz From Adapter
---------------	---------------------------

Worst-case Spurious Emission below 1GHz

8DPSK-2402MHz

Please refer to the following diagram:

Vertical:

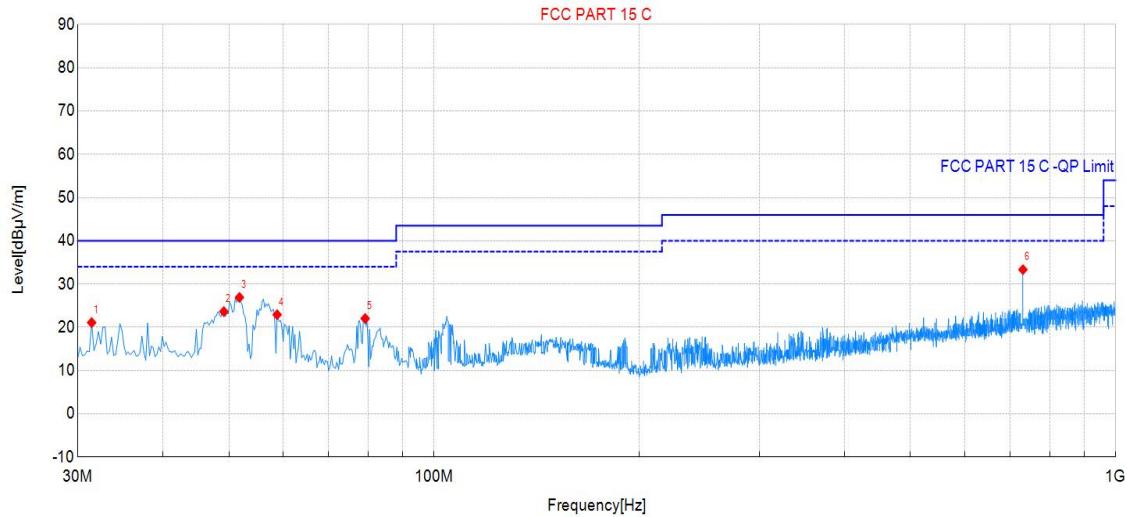


Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	31.46	38.79	21.09	-17.70	40.00	18.91	100	330	QP	Vert	PASS
2	49.16	40.85	23.64	-17.21	40.00	16.36	100	320	QP	Vert	PASS
3	51.83	44.29	26.92	-17.37	40.00	13.08	100	150	QP	Vert	PASS
4	58.86	40.87	22.92	-17.95	40.00	17.08	100	250	QP	Vert	PASS
5	79.23	42.61	22.03	-20.58	40.00	17.97	100	200	QP	Vert	PASS
6	731.07	41.87	33.34	-8.53	46.00	12.66	100	270	QP	Vert	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Horizontal:

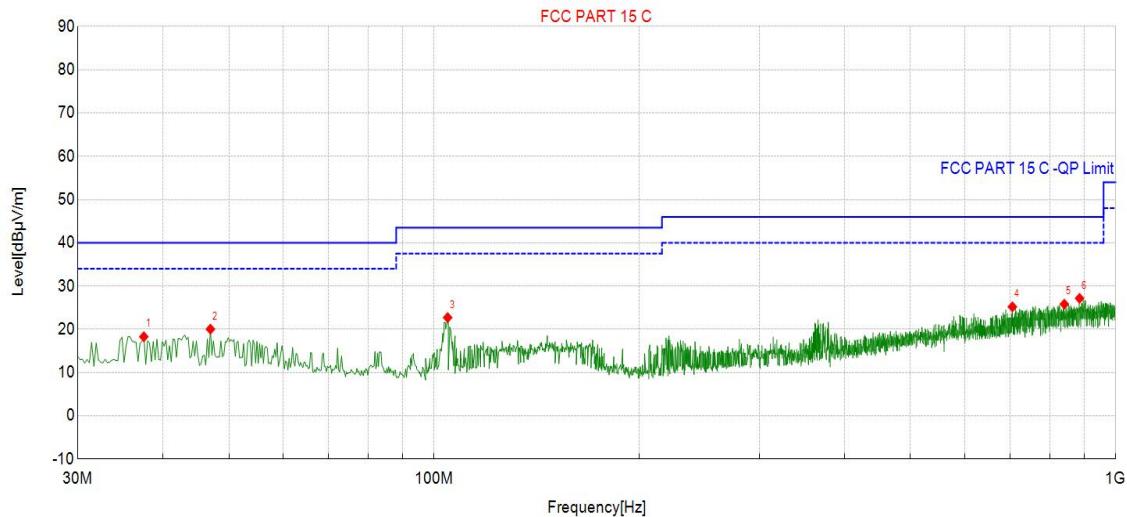

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	37.52	35.53	18.28	-17.25	40.00	21.72	100	120	QP	Hori	PASS
2	46.98	37.20	20.04	-17.16	40.00	19.96	100	300	QP	Hori	PASS
3	104.69	42.13	22.72	-19.41	43.50	20.78	100	180	QP	Hori	PASS
4	705.36	33.96	25.20	-8.76	46.00	20.80	100	70	QP	Hori	PASS
5	840.68	33.44	25.82	-7.62	46.00	20.18	100	30	QP	Hori	PASS
6	885.06	34.47	27.17	-7.30	46.00	18.83	100	160	QP	Hori	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Radiated Emissions (above 1GHz)

8DPSK-2402MHz:

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	4804.00	75.2	56.6	32.1	6.6	57.3	74.0	-16.7
Horizontal	4804.00	58.6	56.6	32.1	6.6	40.7	54.0	-13.3

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
Vertical	4804.00	74.3	56.6	32.1	6.6	56.4	74.0	-17.6
Vertical	4804.00	60.2	56.6	32.1	6.6	42.3	54.0	-11.7

8DPSK-2441MHz:

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	4882.00	73.2	56.7	32.2	6.7	55.4	74.0	-18.6
Horizontal	4882.00	59.3	56.7	32.2	6.7	41.5	54.0	-12.5

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
Vertical	4882.00	73.9	56.7	32.2	6.7	56.1	74.0	-17.9
Vertical	4882.00	58.4	56.7	32.2	6.7	40.6	54.0	-13.4



8DPSK-2480MHz:


Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	4960.00	73.1	56.8	33.3	6.8	56.4	74.0	-17.6
Horizontal	4960.00	59.2	56.8	33.3	6.8	42.5	54.0	-11.5

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
Vertical	4960.00	73.7	56.8	33.3	6.8	57.0	74.0	-17.0
Vertical	4960.00	60.2	56.8	33.3	6.8	43.5	54.0	-10.5

8.11. CONDUCTED EMISSION

Test Requirement:	FCC Part 15.207(a)																	
Test Mode:	Transmitting mode with modulation																	
Limit:	<table border="1"> <thead> <tr> <th>Frequency of Emission (MHz)</th> <th colspan="2">Conducted Limit (dBuV)</th> </tr> <tr> <th></th> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency of Emission (MHz)	Conducted Limit (dBuV)			Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency of Emission (MHz)	Conducted Limit (dBuV)																	
	Quasi-peak	Average																
0.15-0.5	66 to 56*	56 to 46*																
0.5-5	56	46																
5-30	60	50																
	*Decreases with the logarithm of the frequency.																	
Test Procedure:	<p>For tabletop equipment, the EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table. The EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled.</p>																	
Test Result:	Pass																	

8.11.1. Test Setup

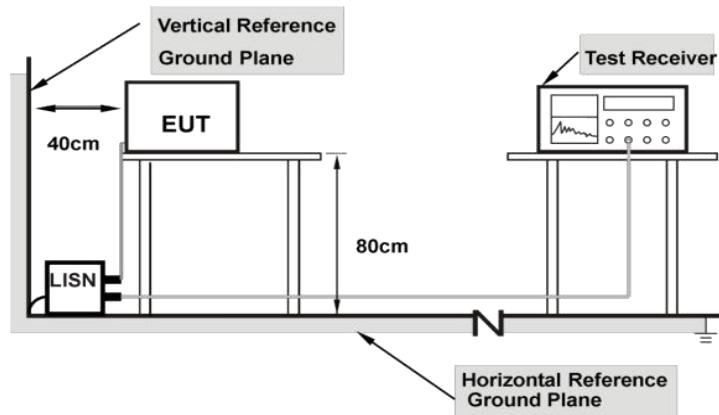


8.11.2. Test Result

Test voltage:	AC 120V/60Hz From Adapter
---------------	---------------------------

Worst-case:8DPSK-2402MHz


Please refer to the following diagram:

Line:

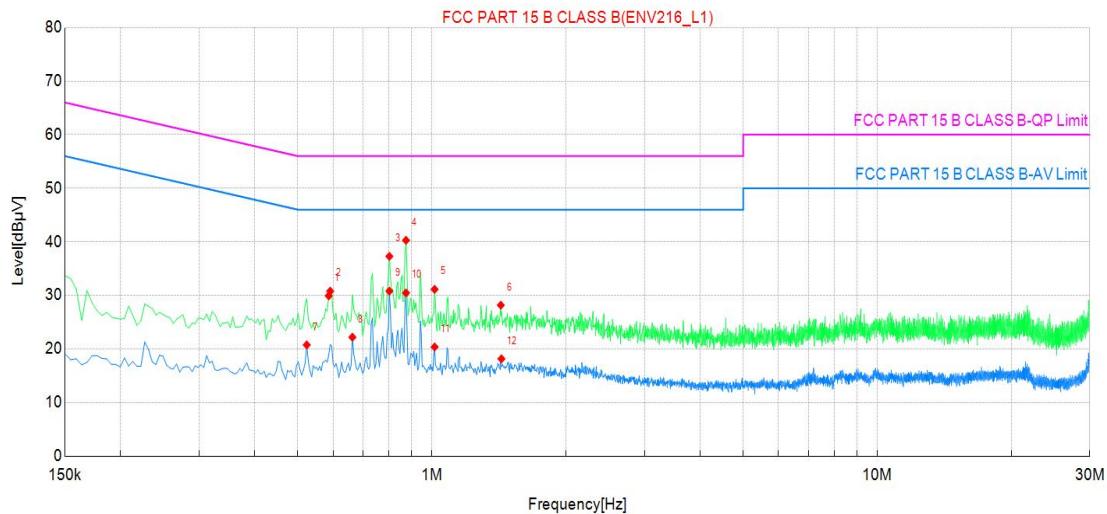

Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Phase	Detector	Verdict
1	0.586500	10.74	29.92	19.18	56.00	26.08	L1	QP	PASS
2	0.591000	11.62	30.80	19.18	56.00	25.20	L1	QP	PASS
3	0.802500	18.03	37.29	19.26	56.00	18.71	L1	QP	PASS
4	0.874500	21.04	40.28	19.24	56.00	15.72	L1	QP	PASS
5	1.014000	11.93	31.13	19.20	56.00	24.87	L1	QP	PASS
6	1.428000	8.97	28.17	19.20	56.00	27.83	L1	QP	PASS
7	0.523500	1.65	20.76	19.11	46.00	25.24	L1	AV	PASS
8	0.663000	2.94	22.19	19.25	46.00	23.81	L1	AV	PASS
9	0.802500	11.55	30.81	19.26	46.00	15.19	L1	AV	PASS
10	0.874500	11.22	30.46	19.24	46.00	15.54	L1	AV	PASS
11	1.014000	1.18	20.38	19.20	46.00	25.62	L1	AV	PASS
12	1.432500	-1.04	18.16	19.20	46.00	27.84	L1	AV	PASS

Neutral:

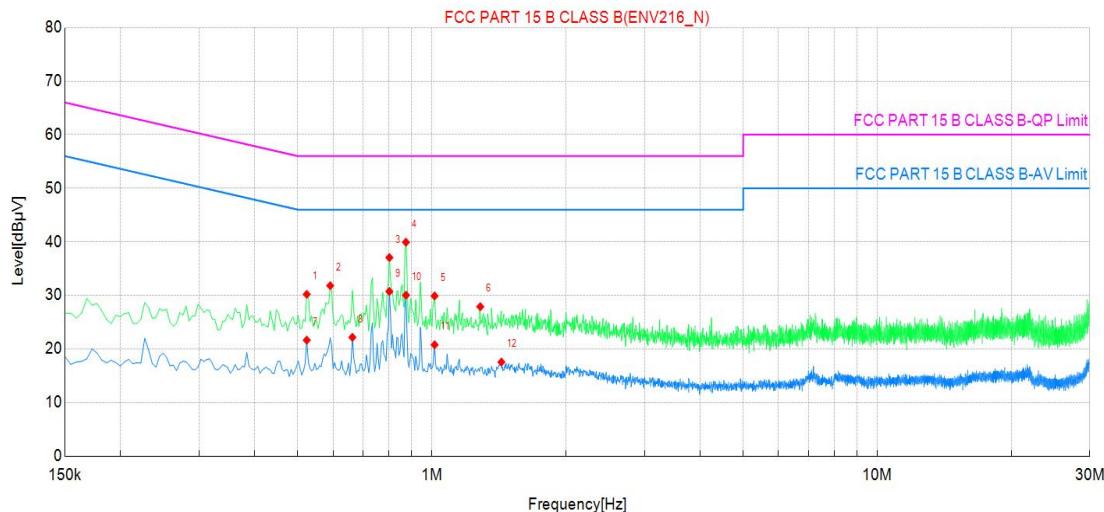

Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Phase	Detector	Verdict
1	0.523500	11.00	30.20	19.20	56.00	25.80	N	QP	PASS
2	0.591000	12.57	31.81	19.24	56.00	24.19	N	QP	PASS
3	0.802500	17.80	37.06	19.26	56.00	18.94	N	QP	PASS
4	0.874500	20.69	39.93	19.24	56.00	16.07	N	QP	PASS
5	1.014000	10.69	29.89	19.20	56.00	26.11	N	QP	PASS
6	1.284000	8.69	27.89	19.20	56.00	28.11	N	QP	PASS
7	0.523500	2.44	21.64	19.20	46.00	24.36	N	AV	PASS
8	0.663000	2.90	22.17	19.27	46.00	23.83	N	AV	PASS
9	0.802500	11.48	30.74	19.26	46.00	15.26	N	AV	PASS
10	0.874500	10.80	30.04	19.24	46.00	15.96	N	AV	PASS
11	1.014000	1.58	20.78	19.20	46.00	25.22	N	AV	PASS
12	1.432500	-1.65	17.55	19.20	46.00	28.45	N	AV	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level



9. PHOTOGRAPHS OF TEST SET-UP

For photographs of the test set-up, refer to the appendix B.

*** End of Report ***