
FCC Test Report

Report No.: AGC16111101F2

FCC ID : A379502

PRODUCT DESIGNATION : RFID Reader

BRAND NAME : N/A

TEST MODEL : 9502

CLIENT : SHENZHEN HQS INTEL.& TECH. CO., LTD

DATE OF ISSUE : Nov. 29, 2011

STANDARD(S) : FCC Part 15 Rules

Attestation of Global Compliance Co., Ltd.


CAUTION: This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.


VERIFICATION OF COMPLIANCE

Applicant	SHENZHEN HQS INTEL. & TECH. CO., LTD
	Room 403, Block 205, East. TaiRan Industrial Parl. FuTian District, S.Z.
Manufacturer	SHENZHEN HQS INTEL. & TECH. CO., LTD
	Room 403, Block 205, East. TaiRan Industrial Parl. FuTian District, S.Z.
Product Designation	RFID Reader
Brand Name	N/A
Model Name	9502, 9502E, 9511, 9511E, ,9512, 9512E, 9514, 9514E, 9518, 9518E, 9521, 9522, 9524, 9528
Difference description:	All the same except for the appearance, and the main test model is 9502.
FCC ID	A379502
Report Number	AGC161111101F2
Date of Test	Nov.24, 2011 to Nov.28, 2011

WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Tested By: 
Curoky Chen Nov.29, 2011

Reviewed By: 
Forrest Lei Nov.29, 2011

Approved By: 
Solger Zhang Nov.29, 2011

TABLE OF CONTENTS

1 GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION	4
1.2 TABLE OF CARRIER FREQUENCIES	4
1.3 RECEIVER INPUT BANDWIDTH	5
1.4 RELATED SUBMITTAL(S) / GRANT (S).....	5
1.5 TEST METHODOLOGY	5
1.6 TEST FACILITY	5
1.7 SPECIAL ACCESSORIES	5
1.8 EQUIPMENT MODIFICATIONS.....	5
2 SYSTEM TEST CONFIGURATION	6
2.1 CONFIGURATION OF TESTED SYSTEM.....	6
2.2 EQUIPMENT USED IN EUT SYSTEM.....	6
4. DESCRIPTION OF TEST MODES	7
5 PEAK OUTPUT POWER.....	8
5.1 MEASUREMENT PROCEDURE	8
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	8
5.3 MEASUREMENT EQUIPMENT USED.....	9
5.4 LIMITS AND MEASUREMENT RESULT	9
6 20 DB BANDWIDTH	10
6.1 MEASUREMENT PROCEDURE	10
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	10
6.3 MEASUREMENT EQUIPMENT USED.....	10
6.4 LIMITS AND MEASUREMENT RESULTS.....	10
7. CONDUCTED SPURIOUS EMISSION	12
7.1 MEASUREMENT PROCEDURE	12
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	12
7.3 MEASUREMENT EQUIPMENT USED.....	12
7.4 LIMITS AND MEASUREMENT RESULT	12
8 CONDUCTED EMISSION	14
8.1 LIMITS OF LINE CONDUCTED EMISSION TEST.....	14
8.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	14
8.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST	15
8.4 TEST RESULT OF LINE CONDUCTED EMISSION TEST	16
9 RADIATED EMISSION	18
9.1 MEASUREMENT PROCEDURE	18
9.2 TEST SETUP	19
9.3 TEST EQUIPMENT LIST.....	20
9.4 TEST RESULT.....	21
10 BAND EDGES EMISSION	25
10.1 MEASUREMENT PROCEDURE.....	25
10.2 TEST SET-UP	25
10.3 TEST RESULT.....	25
11. NUMBER OF HOPPING FREQUENCY	29
11.1 MEASUREMENT PROCEDURE	29

11.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	29
11.3 MEASUREMENT EQUIPMENT USED.....	29
11.4 LIMITS AND MEASUREMENT RESULT	29
12 TIME OF OCCUPANCY IN 20 SECONDS PERIOD.....	30
12.1 MEASUREMENT PROCEDURE.....	30
12.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	30
12.3 MEASUREMENT EQUIPMENT USED	30
12.4 LIMITS AND MEASUREMENT RESULT	30
13. FREQUENCY SEPARATION	32
13.1 MEASUREMENT PROCEDURE.....	32
13.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	32
13.3 MEASUREMENT EQUIPMENT USED	32
13.4 LIMITS AND MEASUREMENT RESULT	32
APPENDIX I.....	33
PHOTOGRAPHS OF THE EUT.....	33
APPENDIX II.....	40
PHOTOGRAPHS OF THE TEST SETUP	40

1 GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

The EUT is a **RFID Reader** designed as a “Communication Device”. It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	902.5 MHz ~ 927 MHz
Rated Output Power	27.91 dBm(max)
Modulation	AFSK
Number of channels	50
Antenna Designation	Detachable Antenna
Antenna Gain	7dBi
Hardware Version	N/A
Software Version	N/A
Power Supply	DC9V by adapter

1.2 TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
902-928MHZ	0	902.5MHZ
	1	903MHZ
	:	:
	24	914MHZ
	25	914.5MHZ
	26	915 MHZ
	:	:
	49	926.5 MHZ
	50	927 MHZ

1.3 RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 100 KHz, The RF ID reader determines both TX and RX hopping sequence and working bandwidth. All channels were equal used within less than 0.4s

1.4 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: A379502** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

1.5 TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.6 TEST FACILITY

All measurement facilities used to collect the measurement data are located at Attestation of Global Compliance Co., Ltd.

1F., No.2 Building, Huafeng No.1 Technical Industrial Park, Sanwei, Xixiang, Baoan District, Shenzhen
The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC register No.: 259865

1.7 SPECIAL ACCESSORIES

Refer to section 2.2.


1.8 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2 SYSTEM TEST CONFIGURATIONS

2.1 CONFIGURATION OF TESTED SYSTEM

Configure:

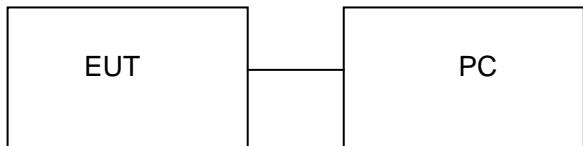

Note: All the accessories have been used during the test.

2.2 EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	RFID Reader	N/A	9502	EUT
2	PC	Dell	SL410K	A.E
3	adapter	Anthin	API324-0926	A.E.

Note: the power supply by our laboratory.

3 SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Peak Output Power	Compliant
§15.247	20 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.207	Conduction Emission	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.247	Number of Hopping Frequency	Compliant
§15.247	Time of Occupancy	Compliant
§15.247	Frequency Separation	Compliant

4. DESCRIPTION OF TEST MODES

The following operating modes were applied for the related test items.

No.	TEST MODES
1	Low Channel(TX)
2	Middle Channel(TX)
3	High Channel(TX)
4	Normal Hopping


Note: only the result of the worst case was recorded in the report.

5 PEAK OUTPUT POWER

5.1 MEASUREMENT PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer.
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Set Span = approximately 5 times the 20 dB bandwidth, centered on a hoping channel
RBW > the 20 dB bandwidth of the emission being measured
VBW \geq RBW; Sweep = auto; Detector function = peak
5. Set SPA Trace 1 Max hold, then View.

5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

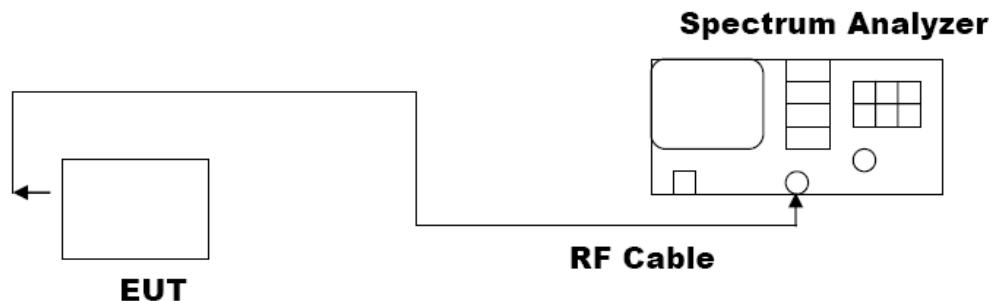

5.3 MEASUREMENT EQUIPMENT USED

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4440A	N/A	06/27/2011	06/26/2012

5.4 LIMITS AND MEASUREMENT RESULT

PEAK OUTPUT POWER MEASUREMENT RESULT			
Frequency (MHz)	Result (dBm)	Applicable Limits (dBm)	Pass or Fail
902.5	27.91	29	Pass
915	27.84	29	Pass
927	27.83	29	Pass

Note:the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna gain = 7dBi, the exceeding gain = 1dBi, so limit= (30-1)dBm=29dBm.

6 20 DB BANDWIDTH

6.1 MEASUREMENT PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW; Sweep = auto; Detector function = peak
5. Set SPA Trace 1 Max hold, then View.

6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in Section 5.2

6.3 MEASUREMENT EQUIPMENT USED


The same as described in Section 5.3

6.4 LIMITS AND MEASUREMENT RESULTS


THE MEASUREMENT RESULT WITH THE WORST CASE			
Applicable Limits	Measurement Result		
	Test Data (KHz)	Criteria	
$\leq 500\text{KHz}$	Low Channel	92.454	PASS
	Middle Channel	92.483	PASS
	High Channel	91.223	PASS

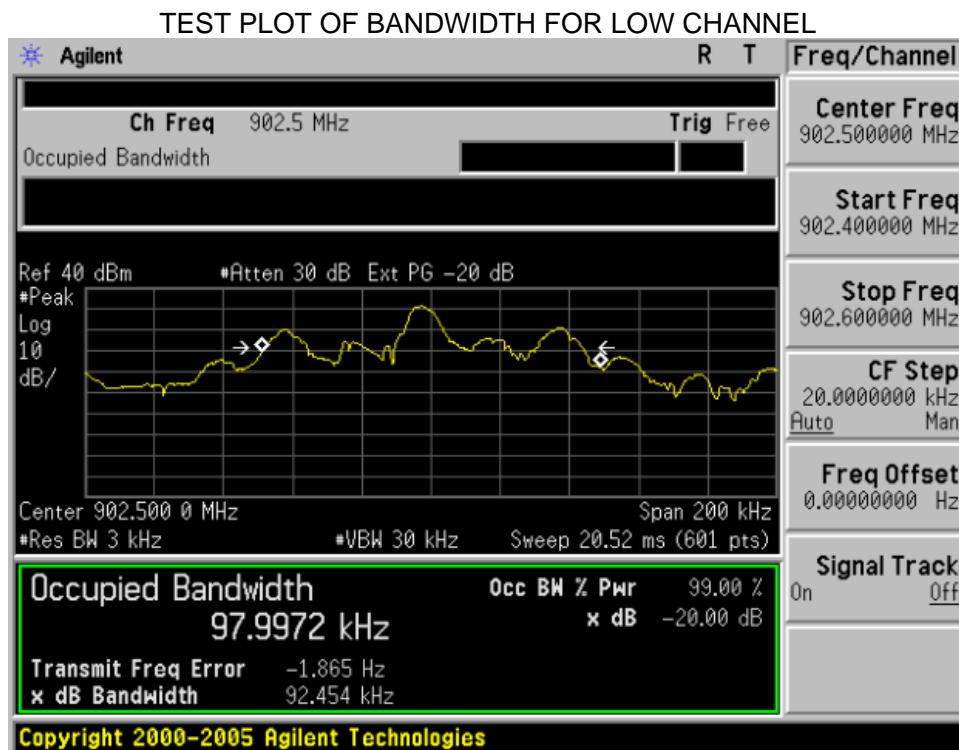

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

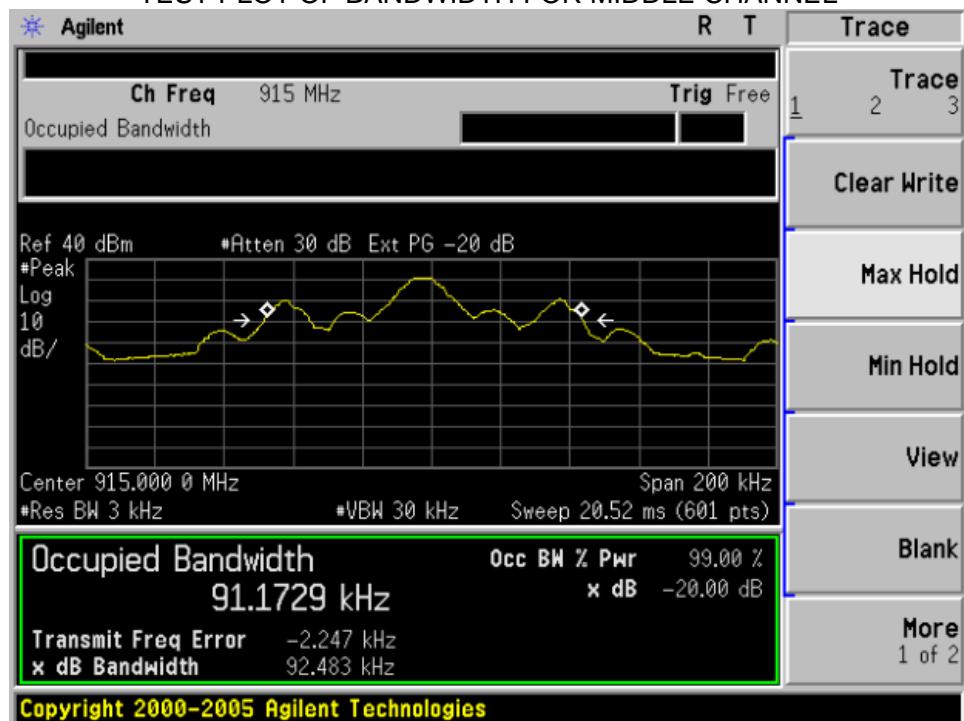

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

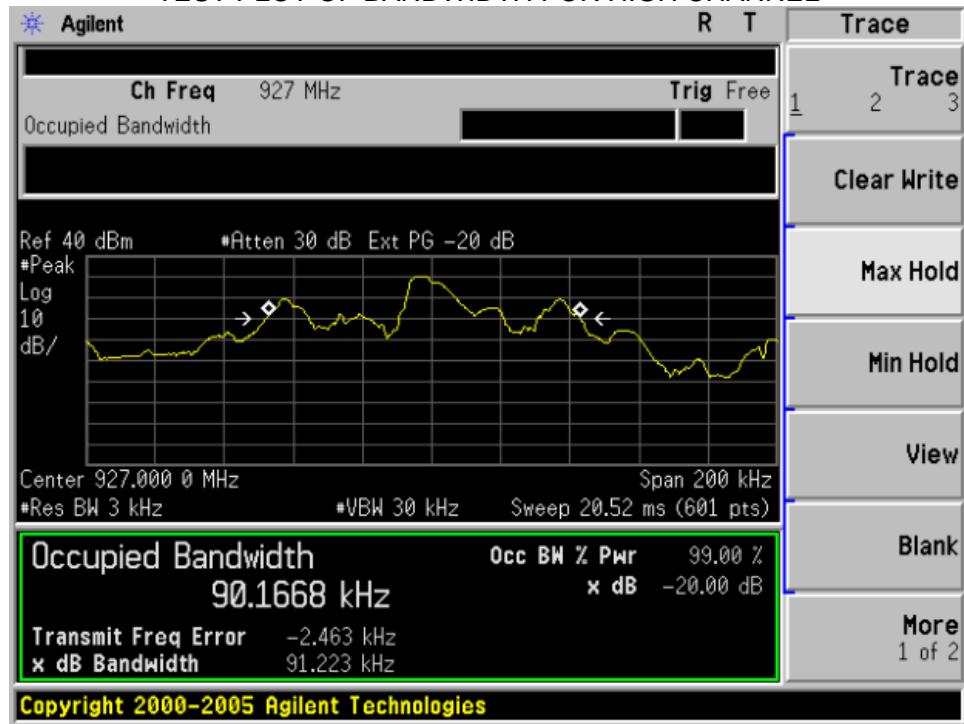

7. CONDUCTED SPURIOUS EMISSION

7.1 MEASUREMENT PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
RBW = 100 kHz; VBW \geq RBW; Sweep = auto; Detector function = peak.
5. Set SPA Trace 1 Max hold, then View.

7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 5.2



7.3 MEASUREMENT EQUIPMENT USED

The same as described in section 5.3

7.4 LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT		
Applicable Limits	Measurement Result	
	Test Data	Criteria
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS
In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS

TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE(LOW CHANNEL)

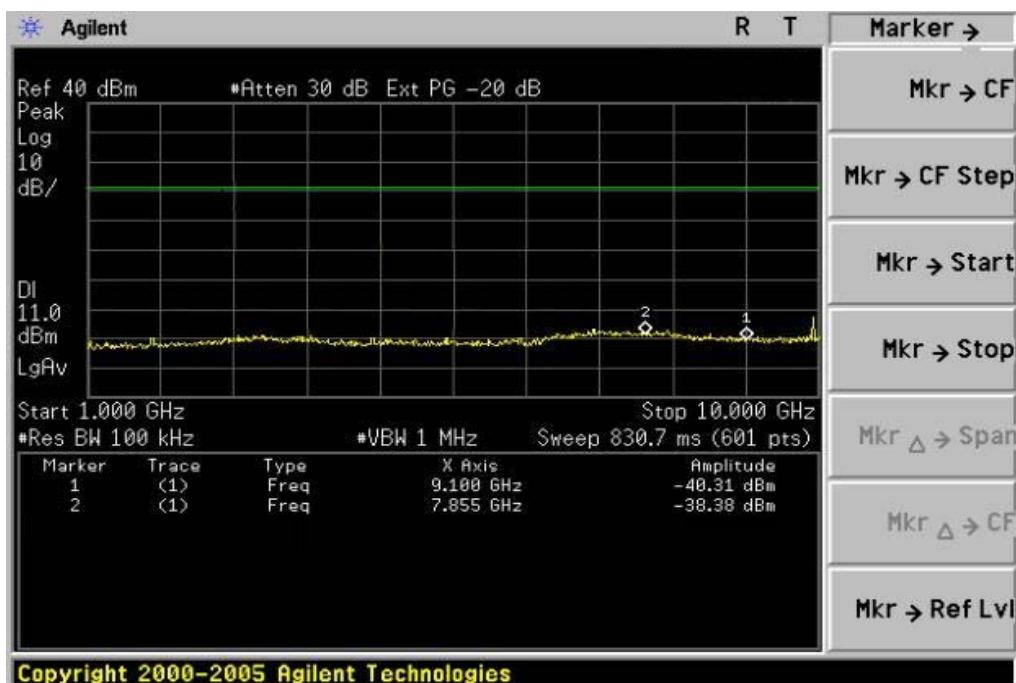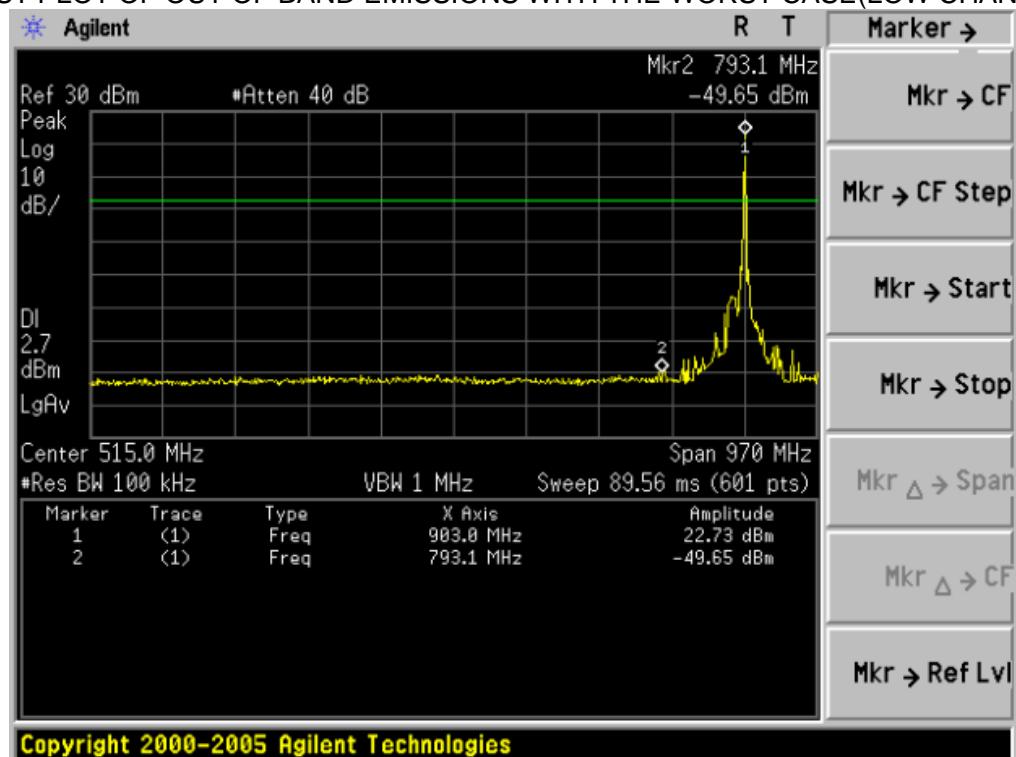

8 CONDUCTED EMISSION


8.1 LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P. (dBuV)	Average (dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

**Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

8.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

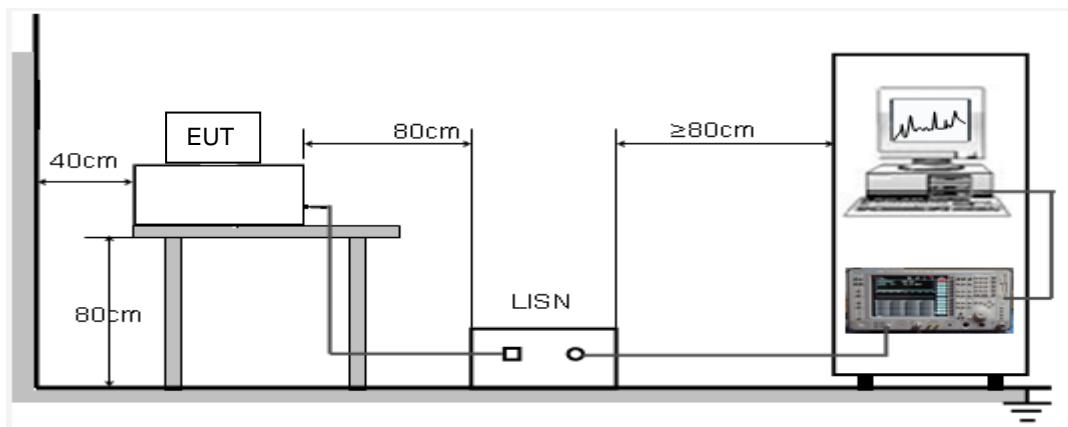


8.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) The EUT received by adapter which received 120V/60Hz power from socket under the turntable through a LISN.
- 5) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 6) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 7) During the above scans, the emissions were maximized by cable manipulation.
- 8) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions.
- 9) Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.

The test data of the worst case condition(s) was reported on the Summary Data page.

8.4 TEST RESULT OF LINE CONDUCTED EMISSION TEST


LINE CONDUCTED EMISSION – L

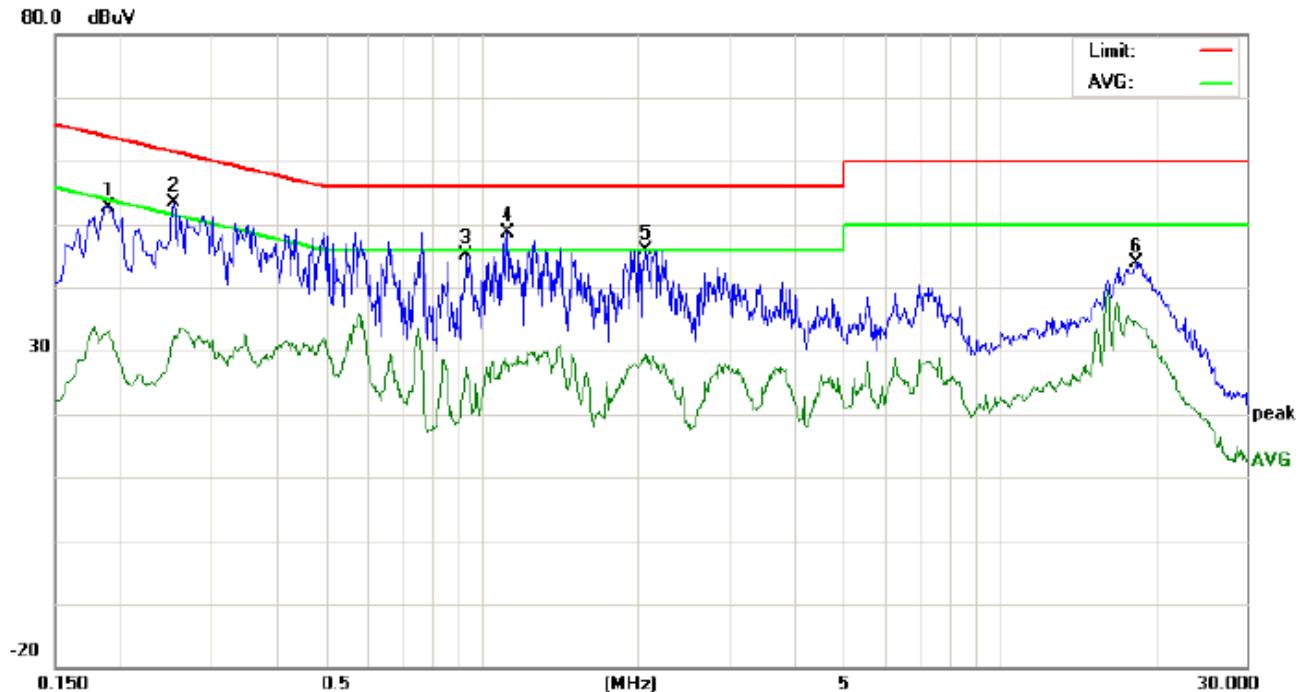

Site: Conduction Phase: **L1** Temperature: 26
 Limit: FCC Class B Conduction(QP) Power: Humidity: 60 %
 EUT: RFID Reader
 M/N: 9502
 Mode: channel 1 TX
 Note:

No.	Freq. (MHz)	Reading Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	Avg		Peak	QP	Avg	QP	Avg	QP	Avg		
1	0.1900	42.37		22.83	10.20	52.57		33.03	64.03	54.03	-11.46	-21.00	P	
2	0.2540	43.22		22.07	10.27	53.49		32.34	61.62	51.62	-8.13	-19.28	P	
3	0.9340	34.73		17.06	10.40	45.13		27.46	56.00	46.00	-10.87	-18.54	P	
4	1.1220	38.20		17.87	10.37	48.57		28.24	56.00	46.00	-7.43	-17.76	P	
5	2.0659	35.70		19.08	10.25	45.95		29.33	56.00	46.00	-10.05	-16.67	P	
6	18.4177	33.75		24.59	10.12	43.87		34.71	60.00	50.00	-16.13	-15.29	P	

LINE CONDUCTED EMISSION – N

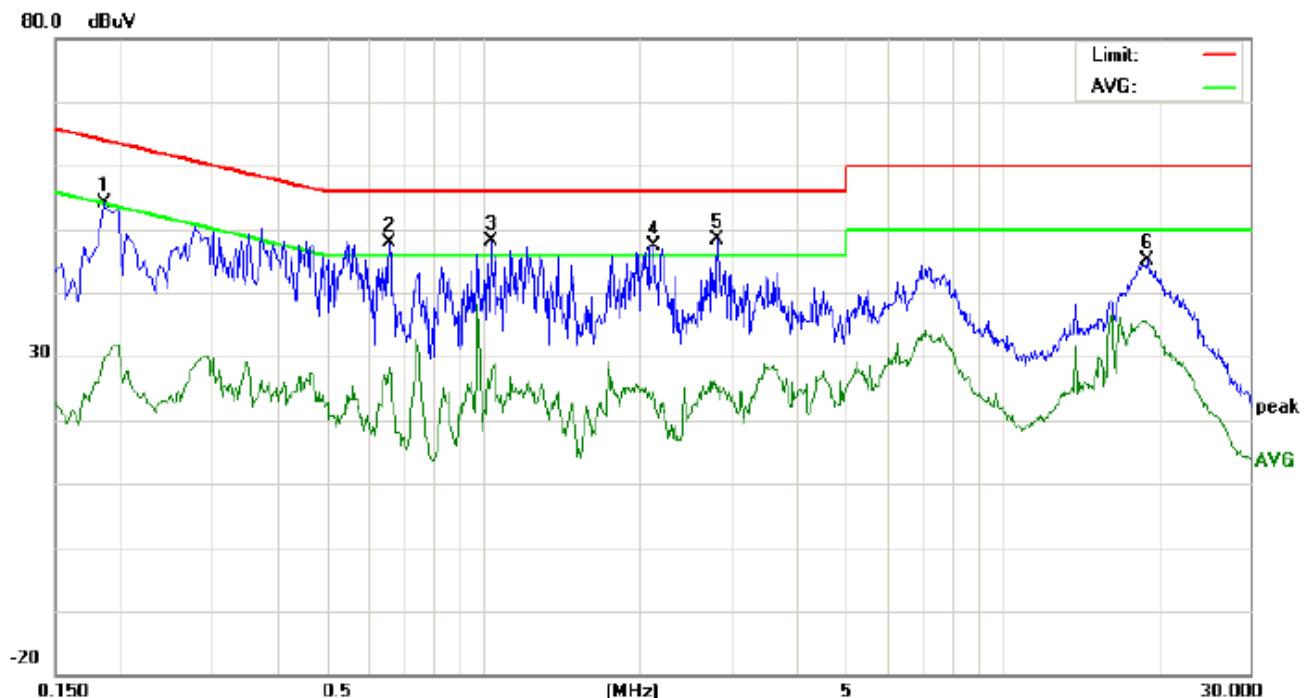

Site: Conduction Phase: **N** Temperature: 26

Limit: FCC Class B Conduction(QP) Power: Humidity: 60 %

EUT: RFID Reader

M/N: 9502

Mode: channel 1 TX

Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		dB	Peak	QP	AVG	QP	AVG	QP	AVG	
1	0.1859	43.83		19.74	10.20	54.03		29.94	64.21	54.21	-10.18	-24.27	P	
2	0.6580	37.57		18.17	10.33	47.90		28.50	56.00	46.00	-8.10	-17.50	P	
3	1.0339	37.70		16.84	10.37	48.07		27.21	56.00	46.00	-7.93	-18.79	P	
4	2.1339	37.06		14.46	10.28	47.34		24.74	56.00	46.00	-8.66	-21.26	P	
5	2.8300	37.76		14.53	10.51	48.27		25.04	56.00	46.00	-7.73	-20.96	P	
6	19.0819	34.99		25.04	10.12	45.11		35.16	60.00	50.00	-14.89	-14.84	P	

9 RADIATED EMISSION

9.1 MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.


The following table is the setting of spectrum analyzer and receiver.'

Spectrum Parameter	Setting
Start Frequency	1GHz
Stop Frequency	10GHz
RB/VB(Emission in restricted band)	1MHz/1MHz for Peak, 1MHz/10Hz for Average
RB/VB(Emission in non-restricted band)	1MHz/1MHz for Peak


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

9.2 TEST SETUP


RADIATED EMISSION TEST SETUP BELOW 30MHz

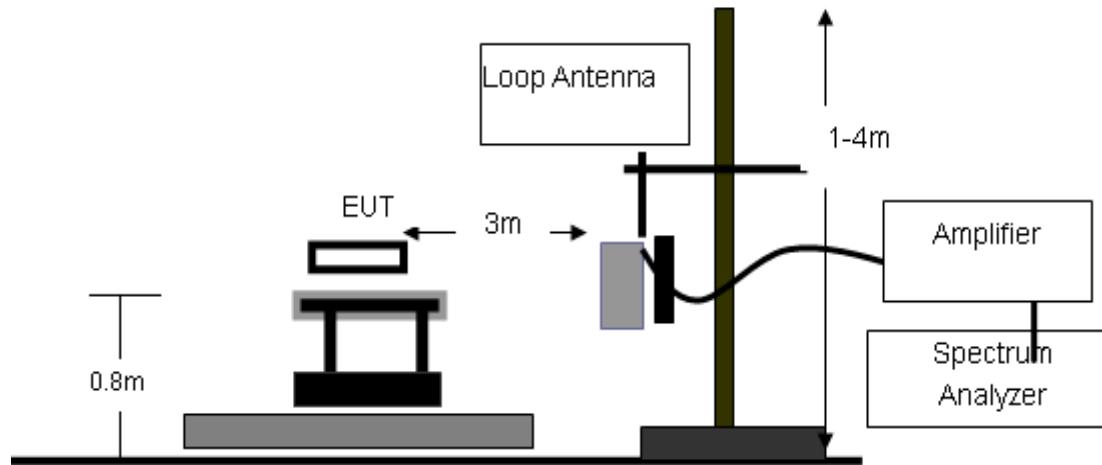

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

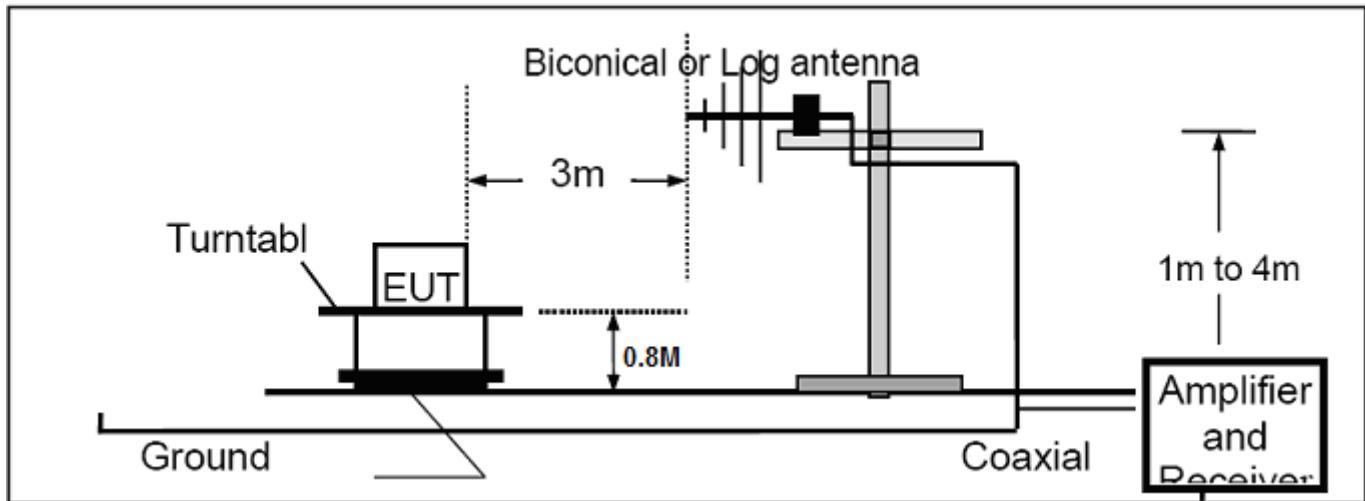

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

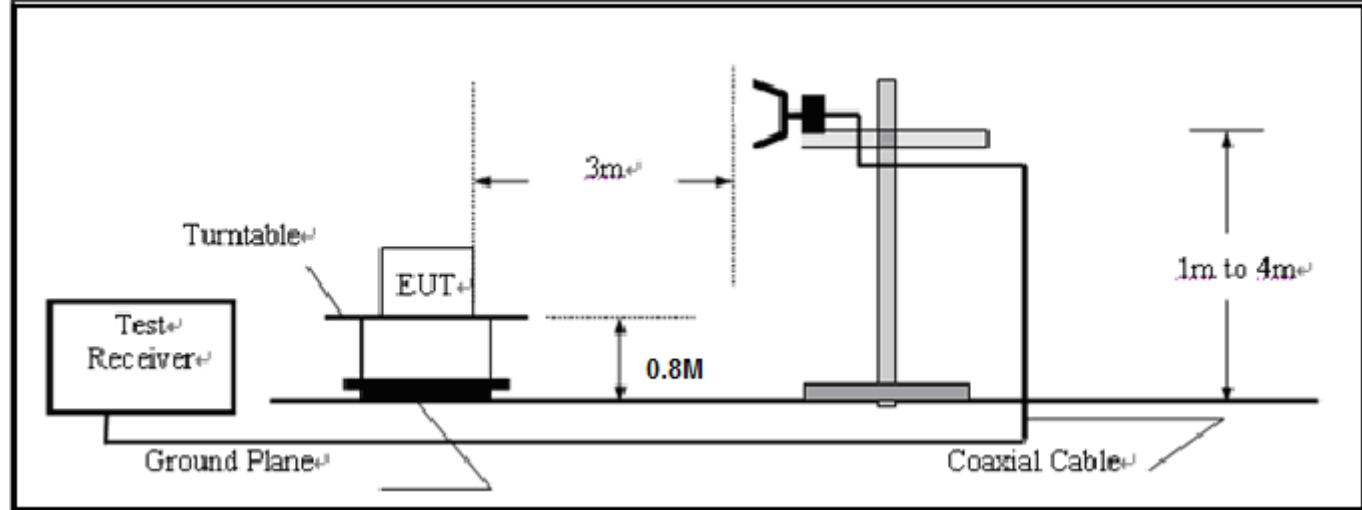

9.3 TEST EQUIPMENT LIST


Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4440A	N/A	06/27/2011	06/26/2012
Amplifier	EM	EM30180	0607030	06/27/2011	06/26/2012
Horn Antenna	EM	EM-AH-10180	N/A	06/27/2011	06/26/2012
Horn Antenna	A.H. Systems Inc.	SAS-574	--	06/27/2011	06/26/2012
EMI Test Receiver	Rohde & Schwarz	ESCI	N/A	06/27/2011	06/26/2012
Amplifier	EM	EM30180	N/A	06/27/2011	06/26/2012
Biological Antenna	A.H. Systems Inc.	SAS-521-4	N/A	06/27/2011	06/26/2012
Loop Antenna	Daze	ZN30900N	SEL0097	06/27/2011	06/26/2012
Isolation Transformer	LETEAC	LTBK	--	06/27/2011	06/26/2012

9.4 TEST RESULT

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.


RADIATED EMISSION BELOW 1GHZ

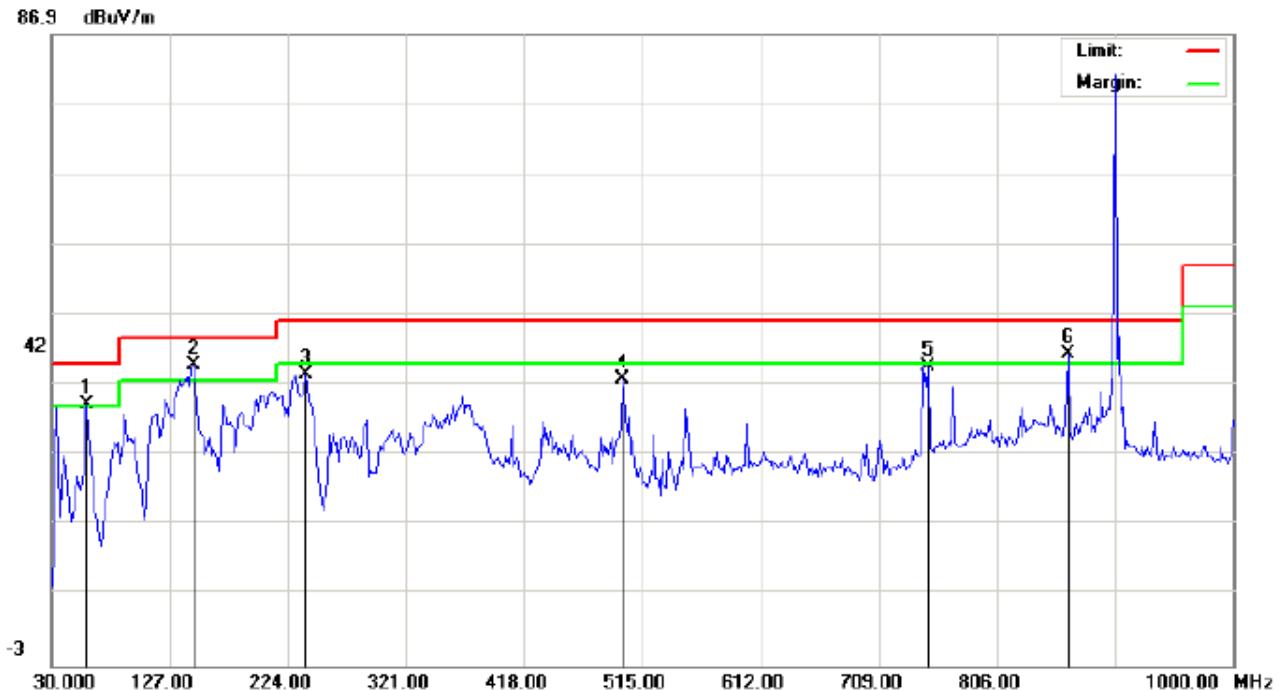

Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation Power: Humidity: 60 %
EUT: RFID Reader Distance: 3m
M/N: 9502
Mode: channel 1 TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	!	59.1000	30.58	3.63	34.21	40.00	-5.79	peak			
2	*	146.4000	26.69	13.03	39.72	43.50	-3.78	peak			
3		238.5500	26.20	12.27	38.47	46.00	-7.53	peak			
4		498.8333	14.83	22.88	37.71	46.00	-8.29	peak			
5		749.4167	13.03	26.45	39.48	46.00	-6.52	peak			
6	!	864.2000	12.13	29.14	41.27	46.00	-4.73	peak			


86.9 dBuV/m

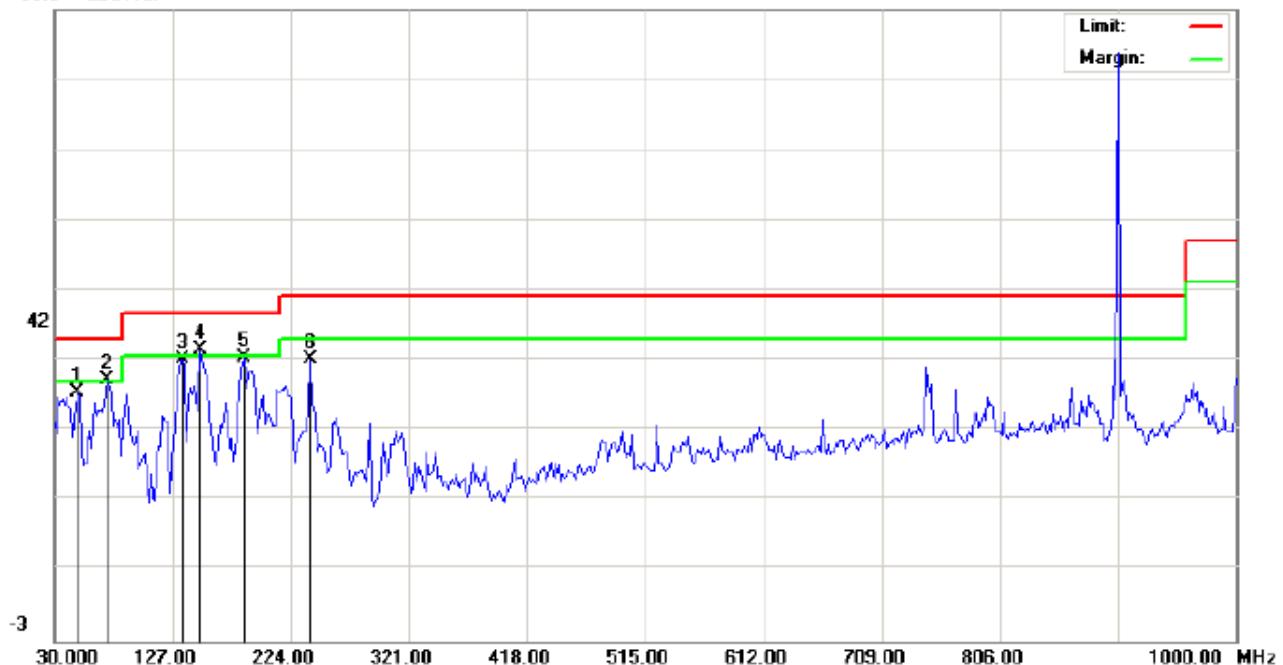

Site: site #1 Polarization: *Vertical* Temperature: 26
 Limit: FCC Class B 3M Radiation Power: Humidity: 60 %
 EUT: RFID Reader Distance: 3m
 M/N: 9502
 Mode: channel 1 TX
 Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		49.3999	27.60	4.71	32.31	40.00	-7.69	peak			
2	!	73.6500	28.85	5.35	34.20	40.00	-5.80	peak			
3		135.0833	27.08	10.06	37.14	43.50	-6.36	peak			
4	*	149.6333	19.57	18.90	38.47	43.50	-5.03	peak			
5		185.2000	28.55	8.64	37.19	43.50	-6.31	peak			
6		240.1667	22.76	14.23	36.99	46.00	-9.01	peak			

RADIATED EMISSION ABOVE 1GHZ (1-10th Harmonics)

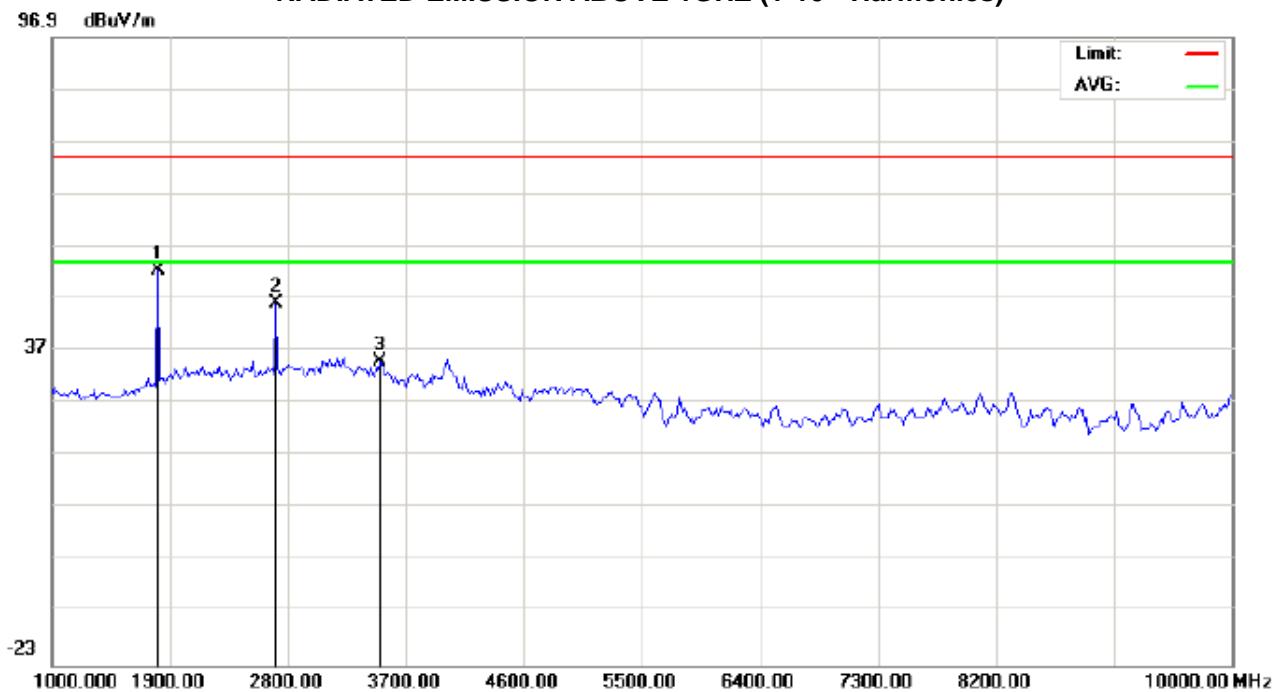

Site: site #1 Polarization: *Horizontal* Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
 EUT: RFID Reader Distance: 3m
 M/N: 9502
 Mode: channel 1 TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	1810.000	44.41	7.88	52.29	74.00	-21.71	peak			
2		2710.000	35.24	10.94	46.18	74.00	-27.82	peak			
3		3505.000	22.83	12.14	34.97	74.00	-39.03	peak			

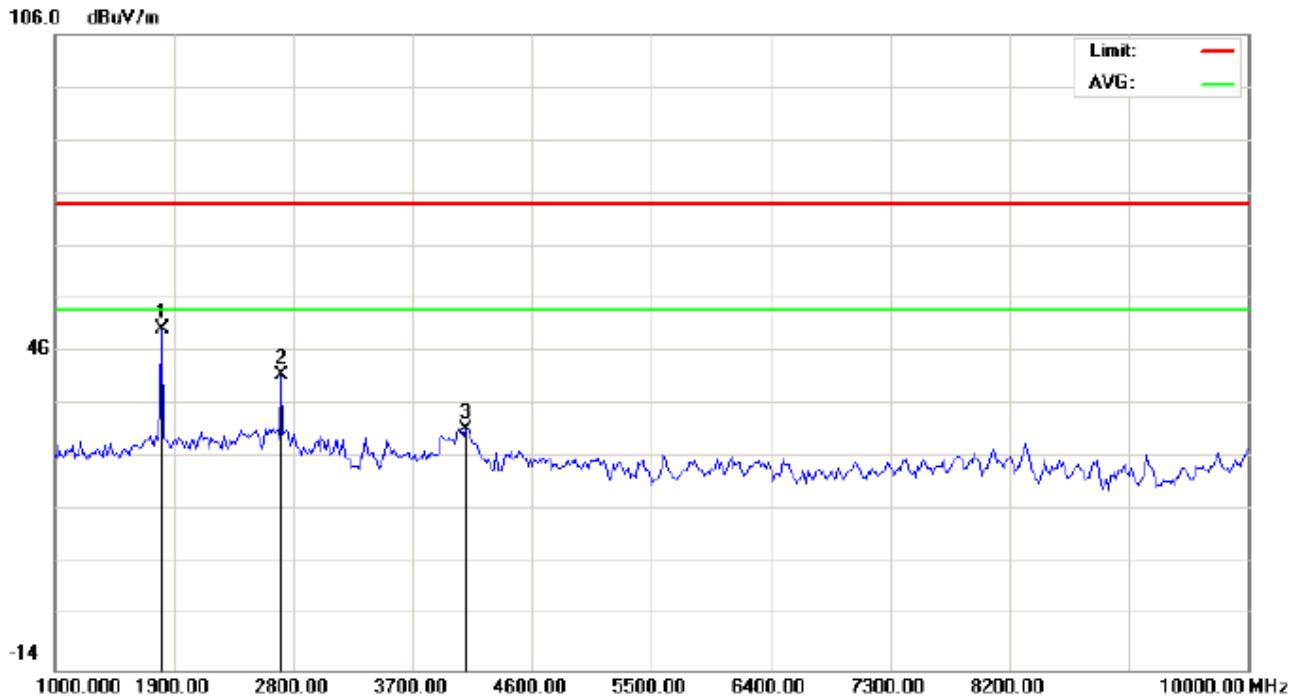

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: RFID Reader Distance: 3m
M/N: 9502
Mode: channel 1 TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	1810.000	42.46	7.84	50.30	74.00	-23.70	peak			
2		2710.000	30.74	10.97	41.71	74.00	-32.29	peak			
3		4105.000	20.24	10.71	30.95	74.00	-43.05	peak			

Note: Factor=Antenna Factor+ Cable loss-Amplifier gain, Over=Measurement-Limit.

10 BAND EDGES EMISSION

10.1 MEASUREMENT PROCEDURE

1. Set the EUT Work on the top, the bottom operation frequency individually.
2. Set SPA Start or Stop Frequency = Operation Frequency, $RBW \geq 1\% \text{span}$, $VBW \geq RBW$
3. The band edges was measured and recorded.

10.2 TEST SET-UP

The Same as described in section 9.2

10.3 TEST RESULT

TEST PLOT OF BAND EDGE FOR LOW CHANNEL



Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit-

Power-

Humidity: 60 %

EUT: RFID Reader


Distance: 3m

M/N: 9502

Mode: channel 1 TX

Note:-


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		902.0000	16.43	26.62	43.05			peak			
2		902.2850	25.19	26.62	51.81			peak			
3	*	902.4950	44.73	26.62	71.35			peak			

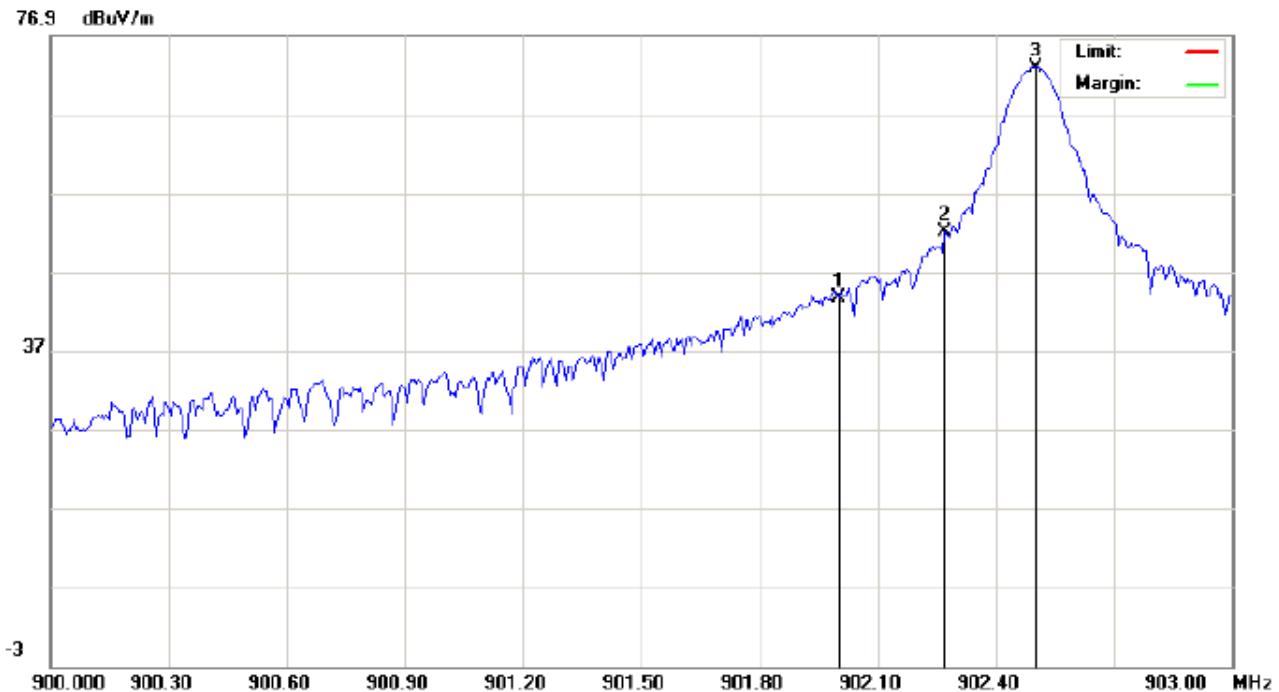

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: Power: Humidity: 60 %
EUT: RFID Reader Distance: 3m
M/N: 9502
Mode: channel 1 TX
Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		902.0000	16.90	26.62	43.52			peak			
2		902.2700	25.33	26.62	51.95			peak			
3	*	902.5000	46.22	26.62	72.84			peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL

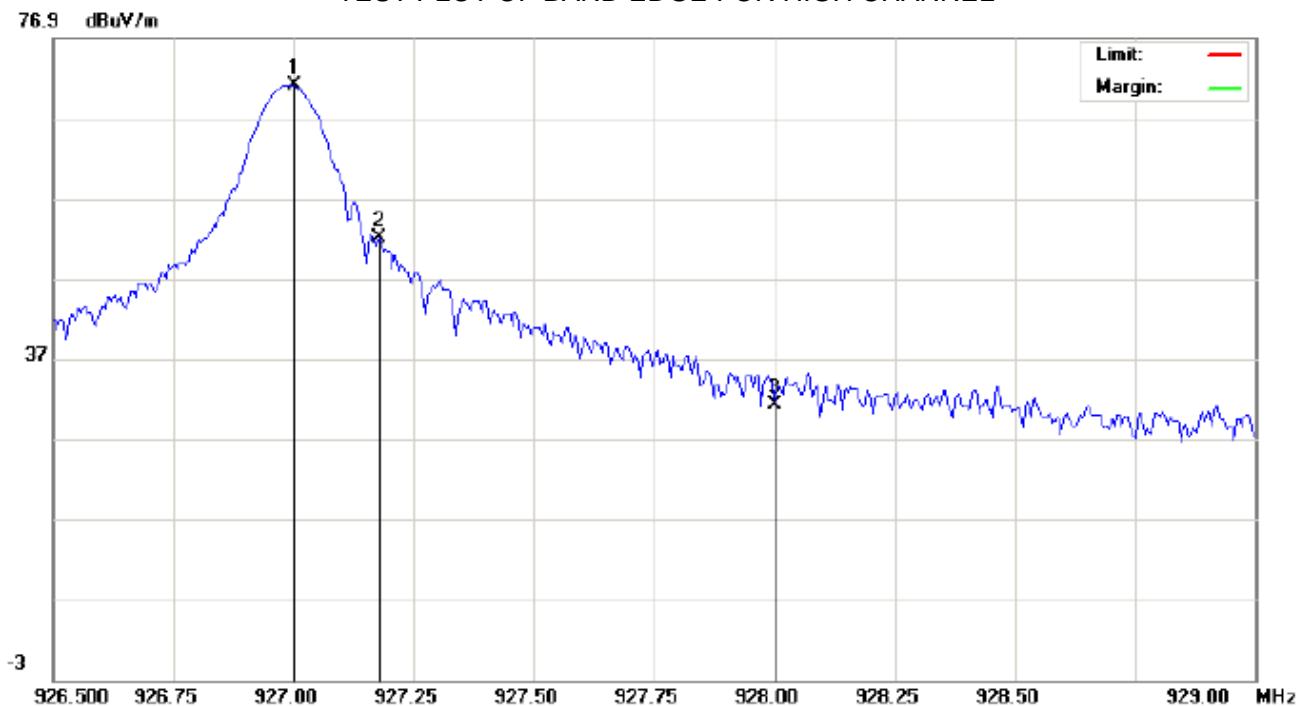

Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit:	Power:	Humidity: 60 %
EUT: RFID Reader	Distance: 3m	
M/N: 9502		
Mode: channel 50 TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	927.0000	44.37	26.58	70.95			peak			
2		927.1792	25.52	26.58	52.10			peak			
3		928.0000	4.55	26.56	31.11			peak			

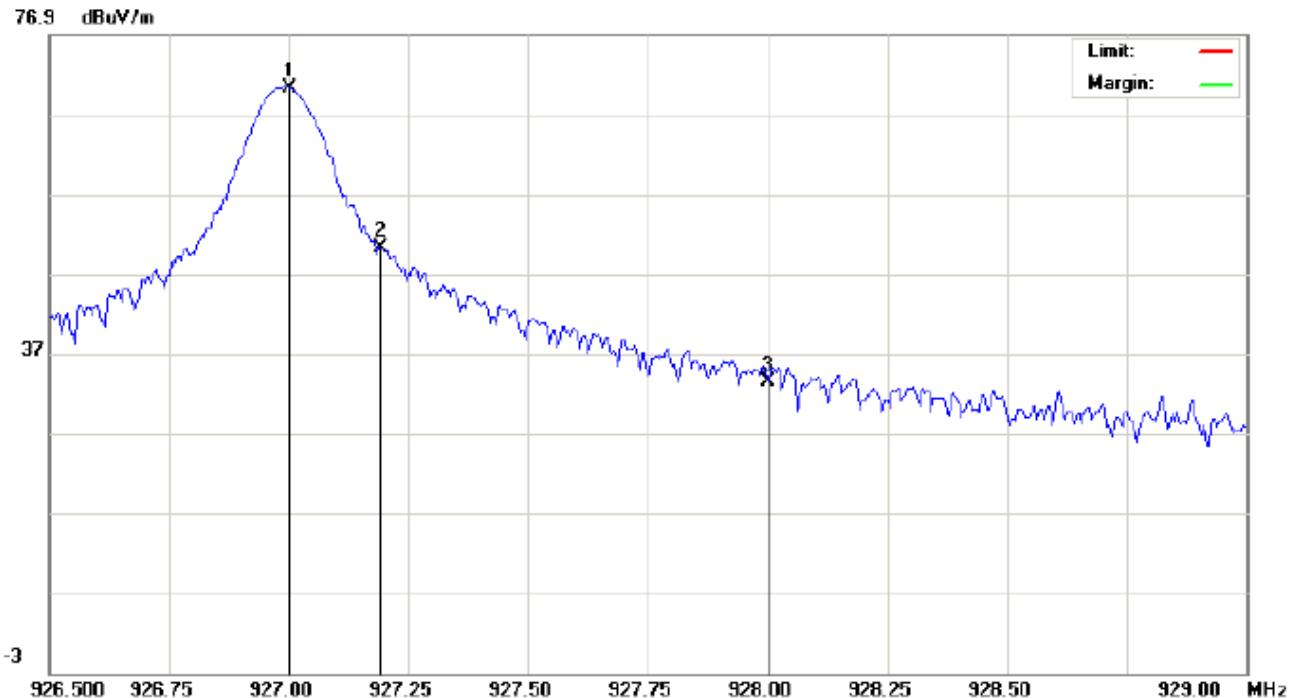

Site: site #1 Polarization: *Vertical* Temperature: 26
Limit: Power: Humidity: 60 %
EUT: RFID Reader Distance: 3m
M/N: 9502
Mode: channel 50 TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	927.0000	43.69	26.58	70.27			peak			
2		927.1917	23.61	26.58	50.19			peak			
3		928.0000	6.92	26.56	33.48			peak			

11. NUMBER OF HOPPING FREQUENCY

11.1 MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer Start = 902MHz Stop = 928MHz
4. Set the Spectrum Analyzer as RBW>=1%span, VBW>=RBW.

11.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 5.2


Conducted Method.

11.3 MEASUREMENT EQUIPMENT USED

The Same as described in section 5.3

11.4 LIMITS AND MEASUREMENT RESULTS

TOTAL NO. OF HOPPING CHANNEL	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT
	>=50	50	PASS

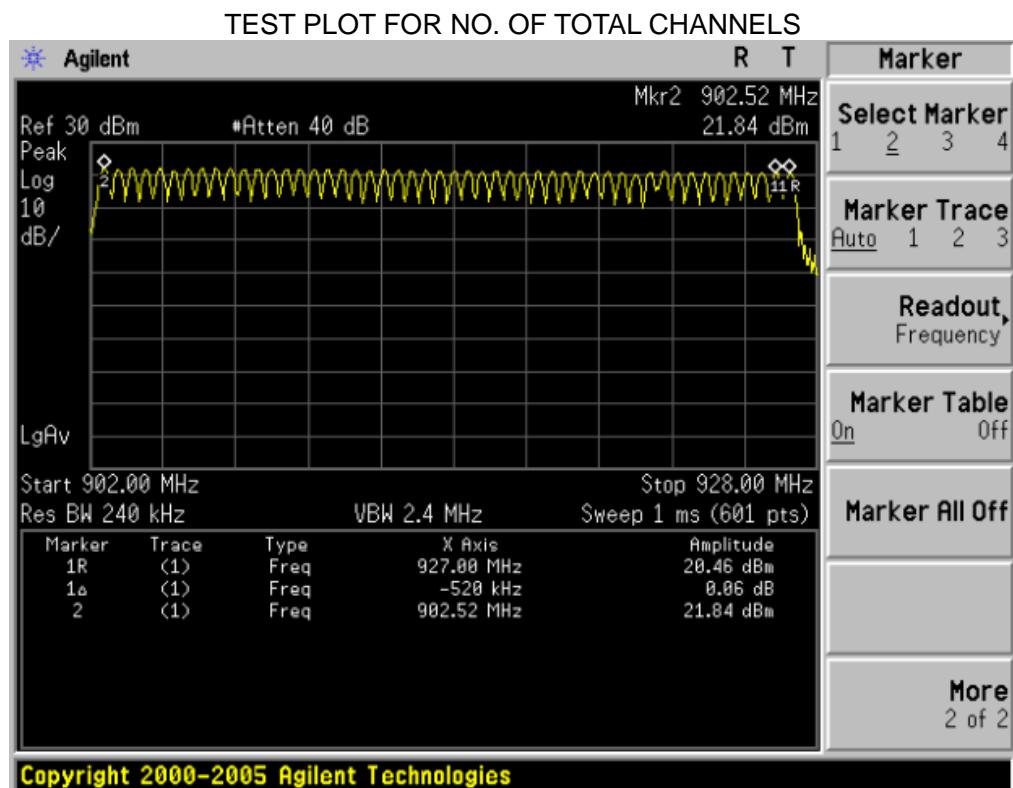

12 TIME OF OCCUPANCY IN 20 SECONDS PERIOD

12.1 MEASUREMENT PROCEDURE

INTERVAL TIME OF TWO SINGLE TRANSMITTING:

1. Place the EUT on the table and set it in transmitting mode
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
3. Set Span = zero span, centered on a hoping channel
4. Set the spectrum analyzer as RBW=1MHz, VBW>=RBW, Span = 0 Hz, sweep time=10s

DURATION OF SINGLE TRASNSMITTING:

1. Place the EUT on the table and set it in transmitting mode
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
3. Set Span = zero span, centered on a hoping channel
4. Set the spectrum analyzer as RBW=1MHz, VBW>=RBW, Span = 0 Hz,.sweep time=auto

12.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 5.2

Conducted Method

12.3 MEASUREMENT EQUIPMENT USED

The same as described in section 5.3

12.4 LIMITS AND MEASUREMENT RESULT

Test Result


Interval Time (ms)	Time of Pulse (ms)	OCCUPANCY IN 20 SECOND PERIOD (ms)	Limit (ms)
590	10.18	345	400

Interval Time Of Two Single Transmitting=590ms


Duration Of Single Transmitting=10.18ms

Occupancy In 20 Seconds Period=20*1000*10.18(ms)/590(ms)=345(ms)

INTERVAL TIME OF TWO SINGLE TRANSMITTING

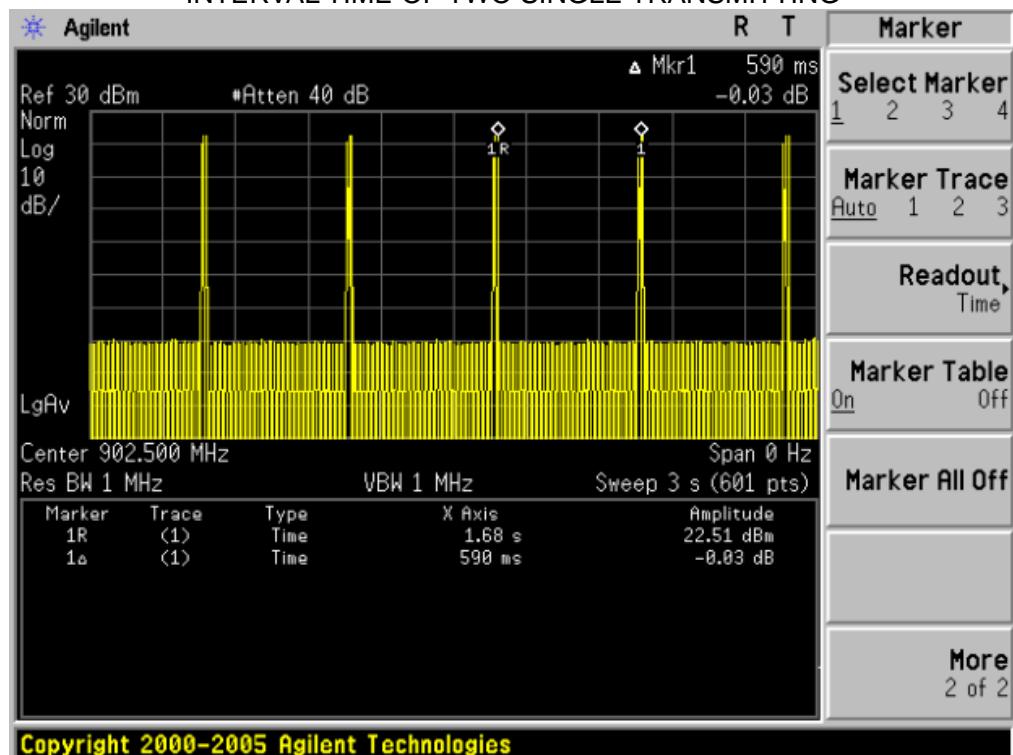

DURATION OF SINGLE TRANSMITTING

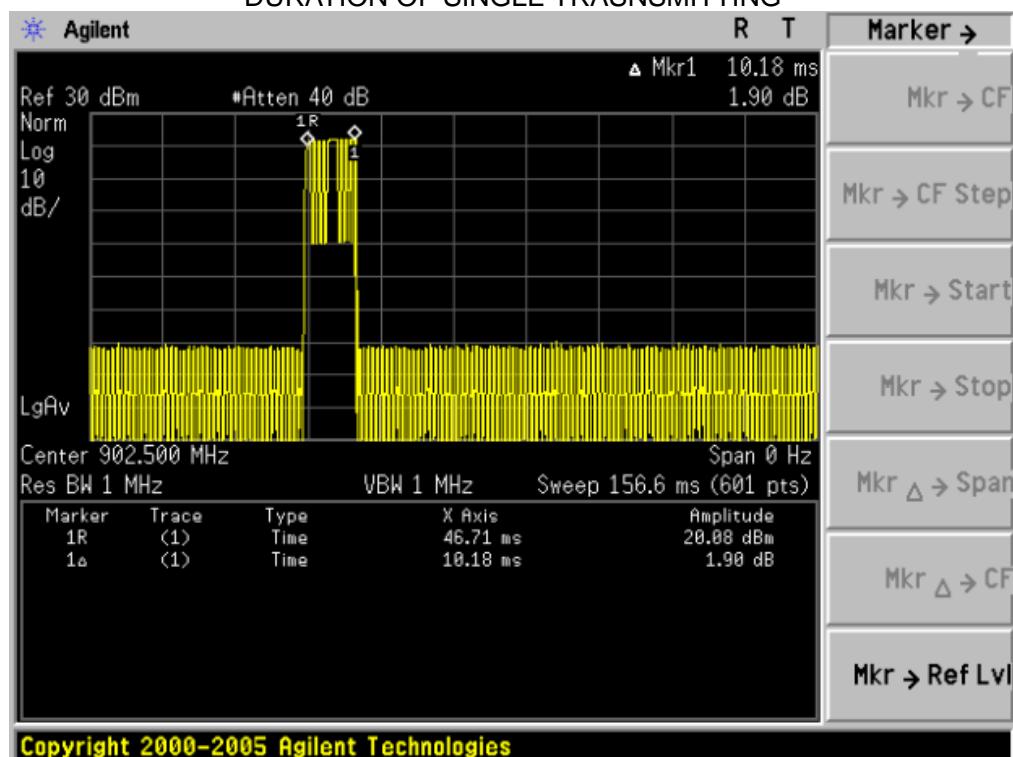

13. FREQUENCY SEPARATION

13.1 MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
3. Set Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW) \geq 1% of the span Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold

13.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 5.2


13.3 MEASUREMENT EQUIPMENT USED

The same as described in section 5.3

13.4 LIMITS AND MEASUREMENT RESULT

CHANNEL	CHANNEL SEPARATION	LIMIT	RESULT
	KHz	KHz	
CH01-CH02	504	≥ 25 KHz or $2/3$ 20 dB BW	Pass


TEST PLOT FOR FREQUENCY SEPARATION

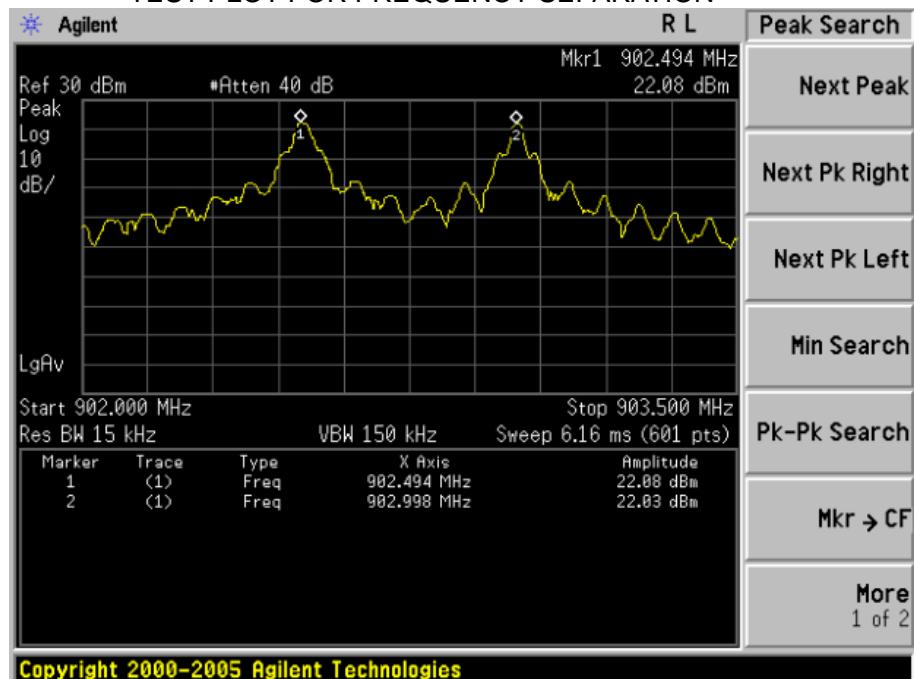


APPENDIX I
PHOTOGRAPHS OF THE EUT
TOP VIEW OF EUT




BOTTOM VIEW OF EUT

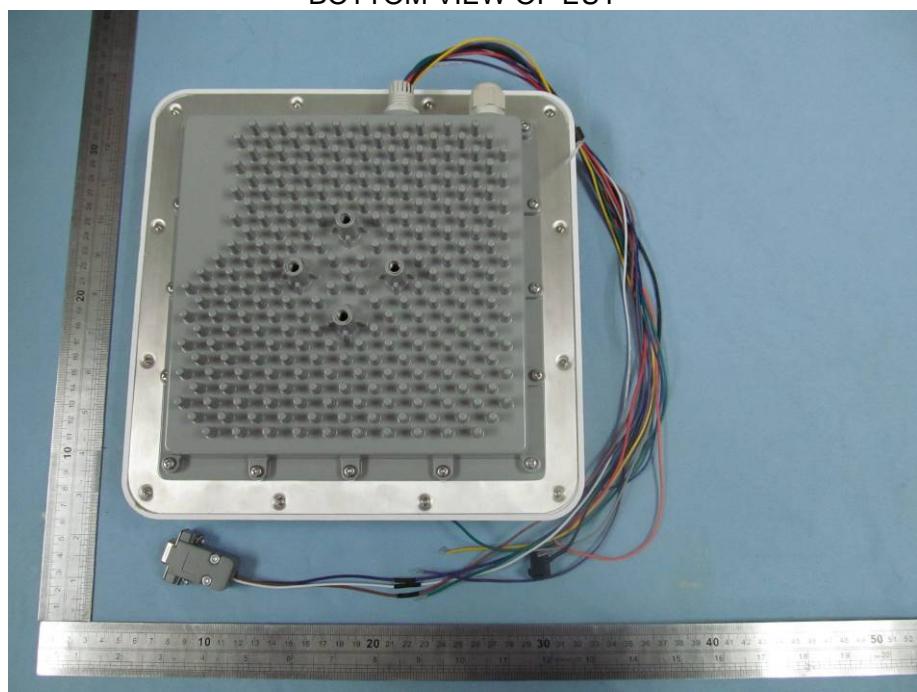


LEFT VIEW OF EUT

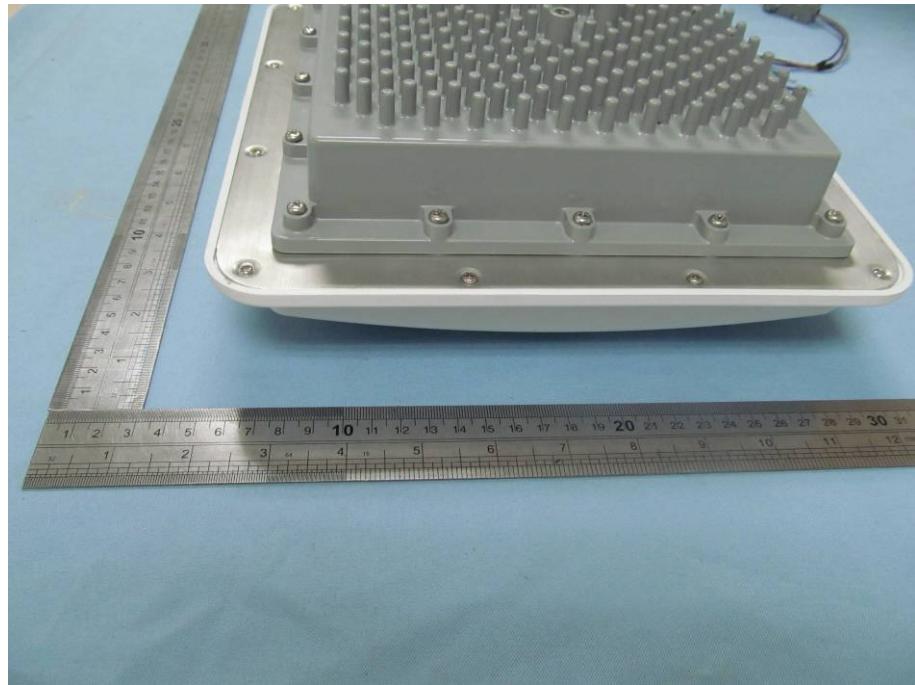


RIGHT VIEW OF EUT

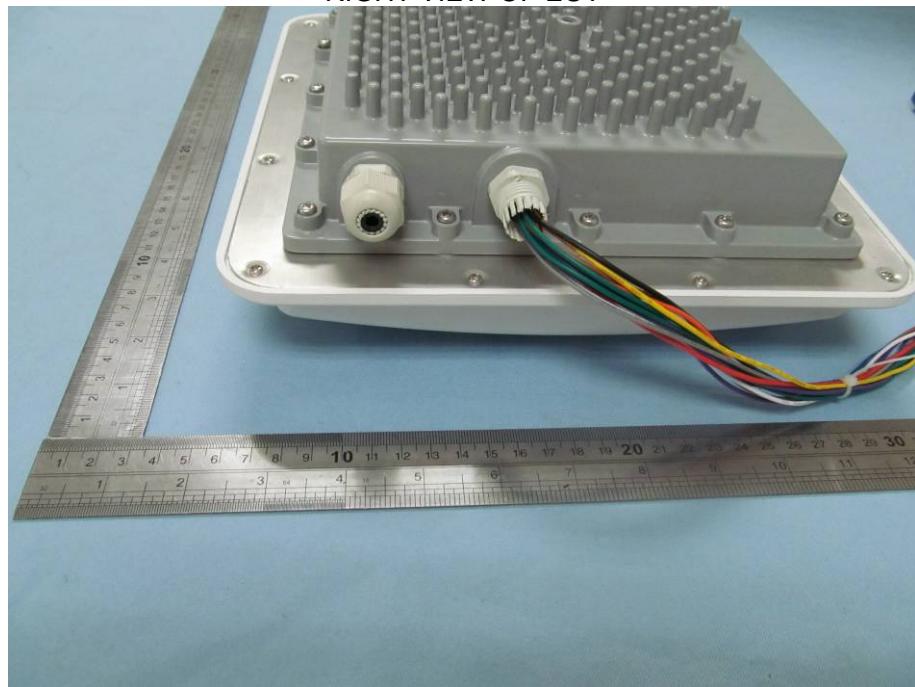


FRONT VIEW OF EUT

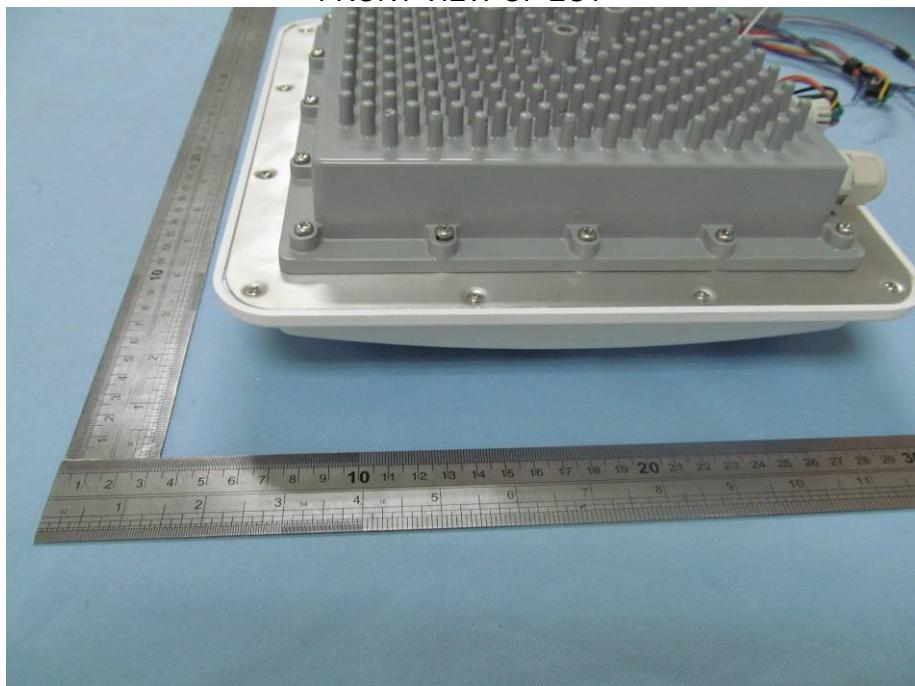


BACK VIEW OF EUT

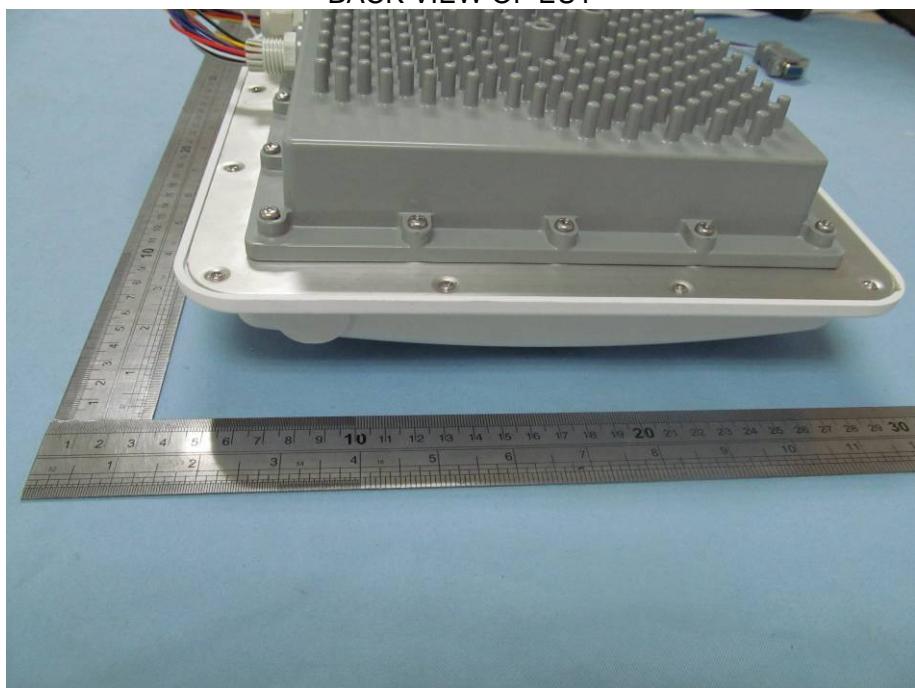


OPEN VIEW OF EUT

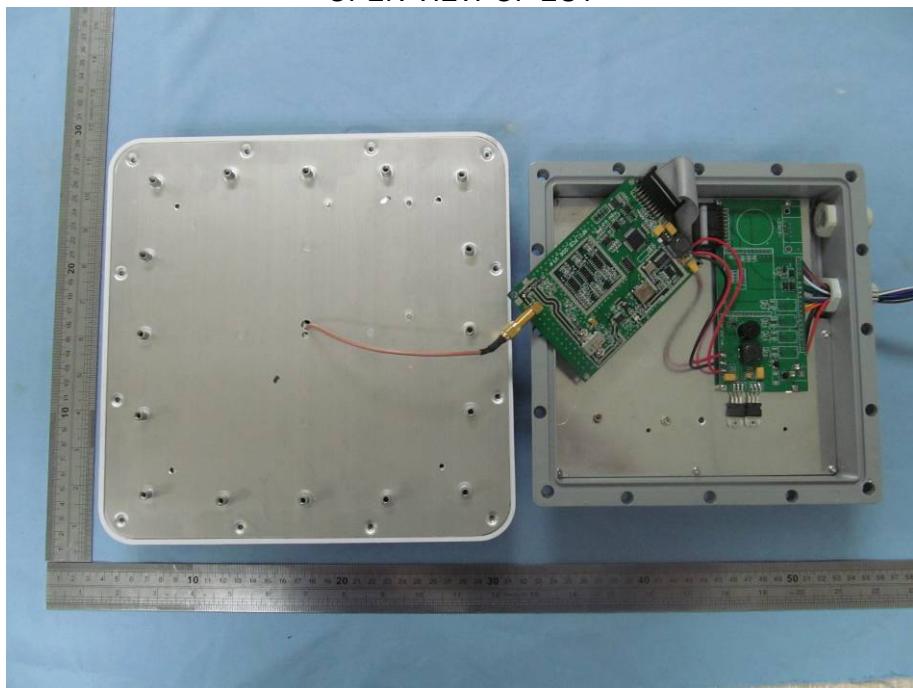


INTERNAL VIEW OF SAMPLE – 1

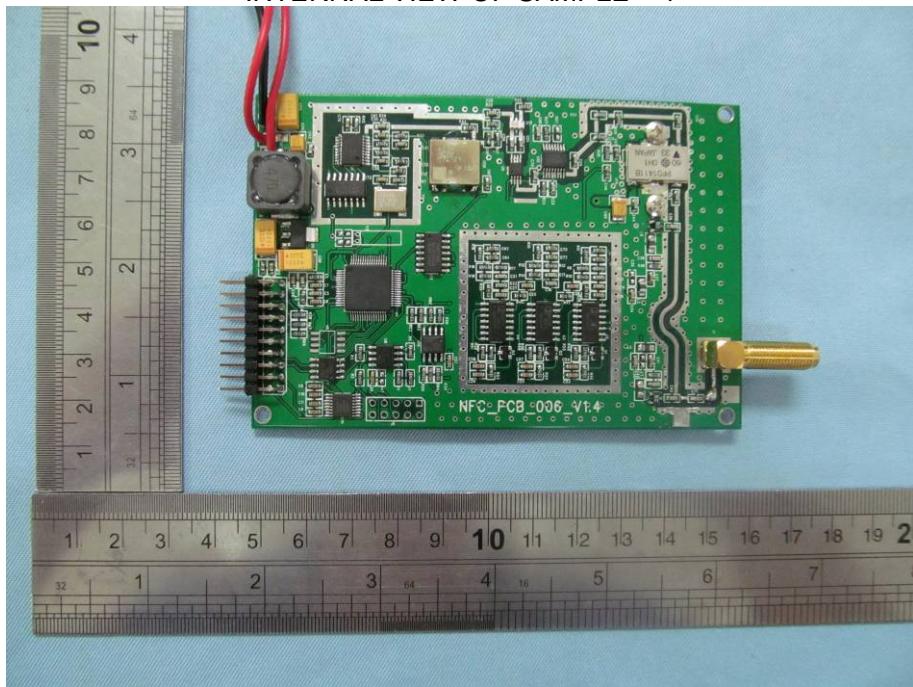


INTERNAL VIEW OF SAMPLE – 2

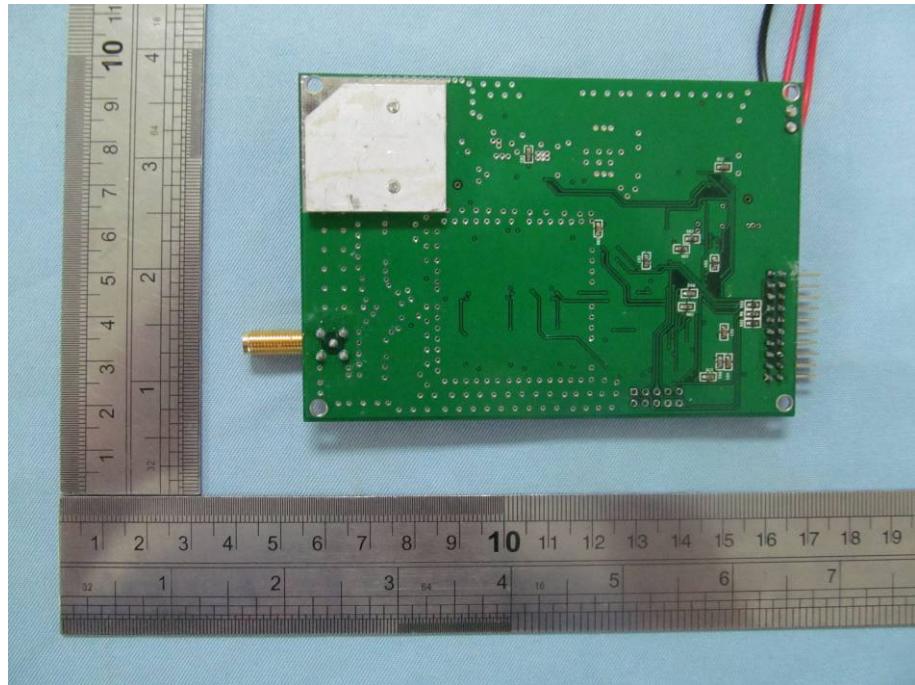


INTERNAL VIEW OF EUT -3

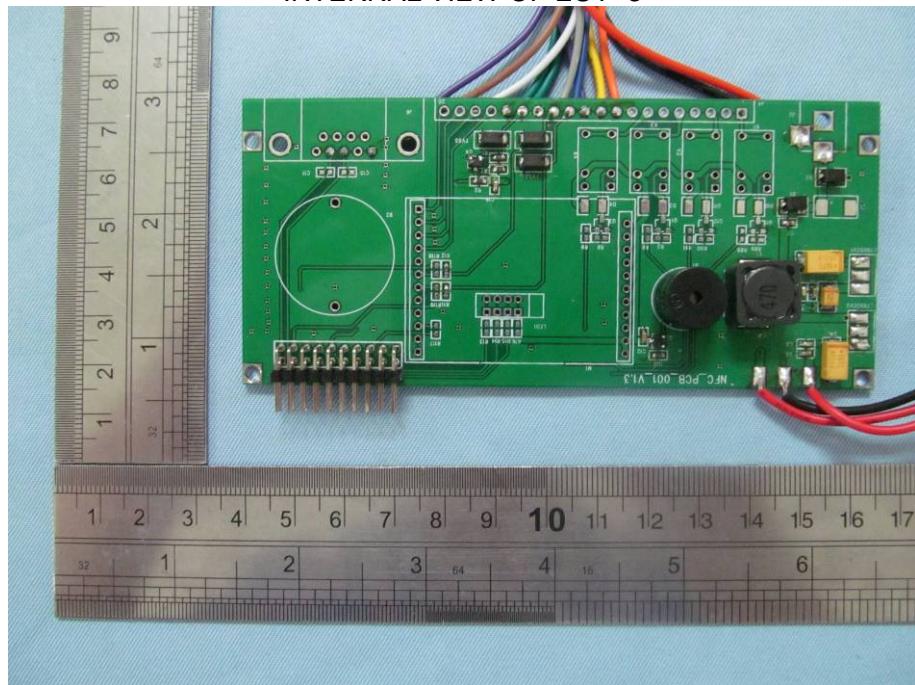


INTERNAL VIEW OF EUT -4

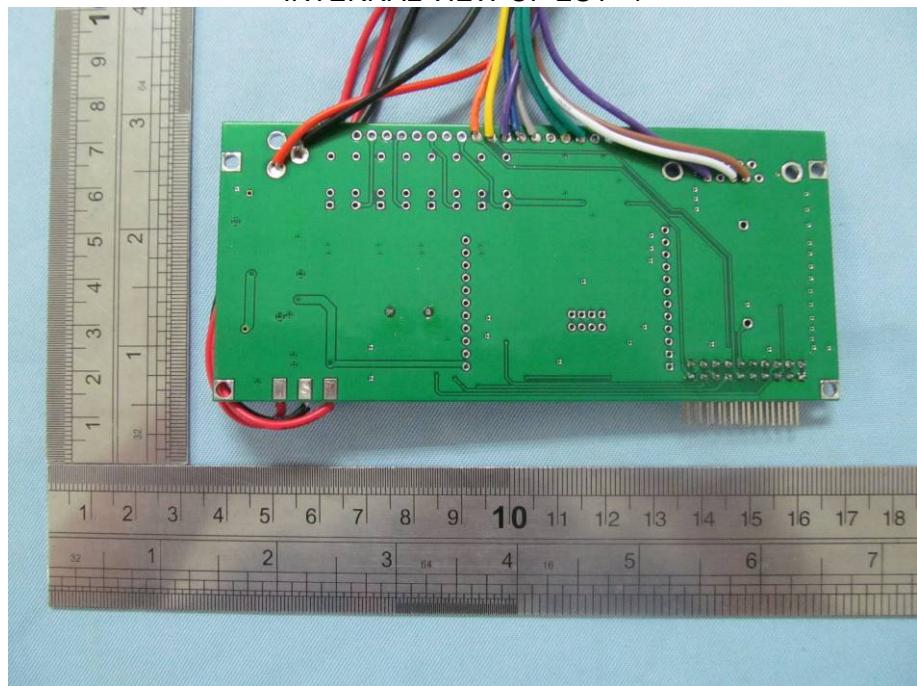

INTERNAL VIEW OF EUT-5(ANTENNA)

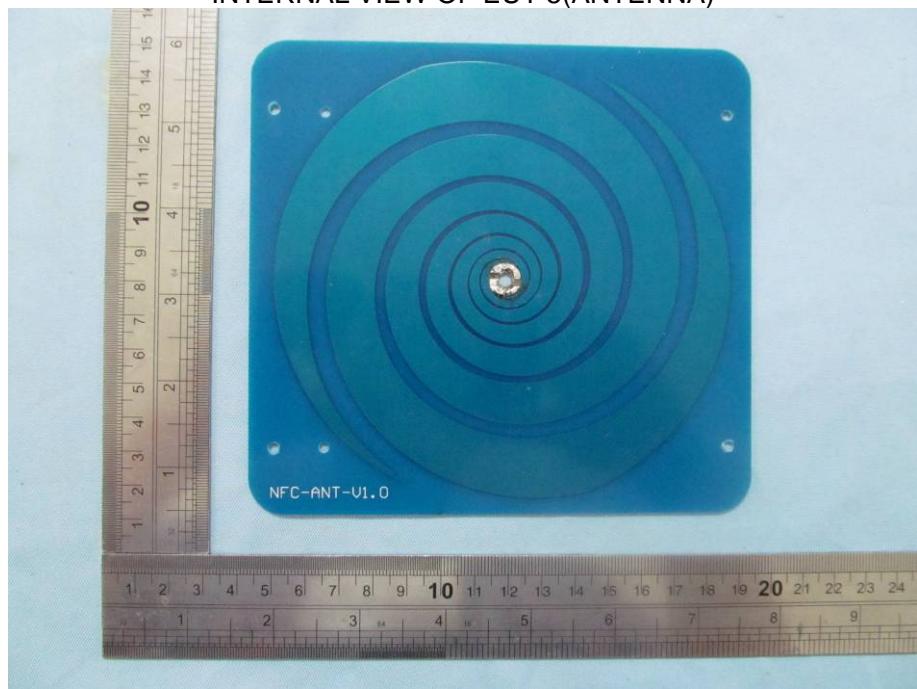

INTERNAL VIEW OF EUT-6(ANTENNA)

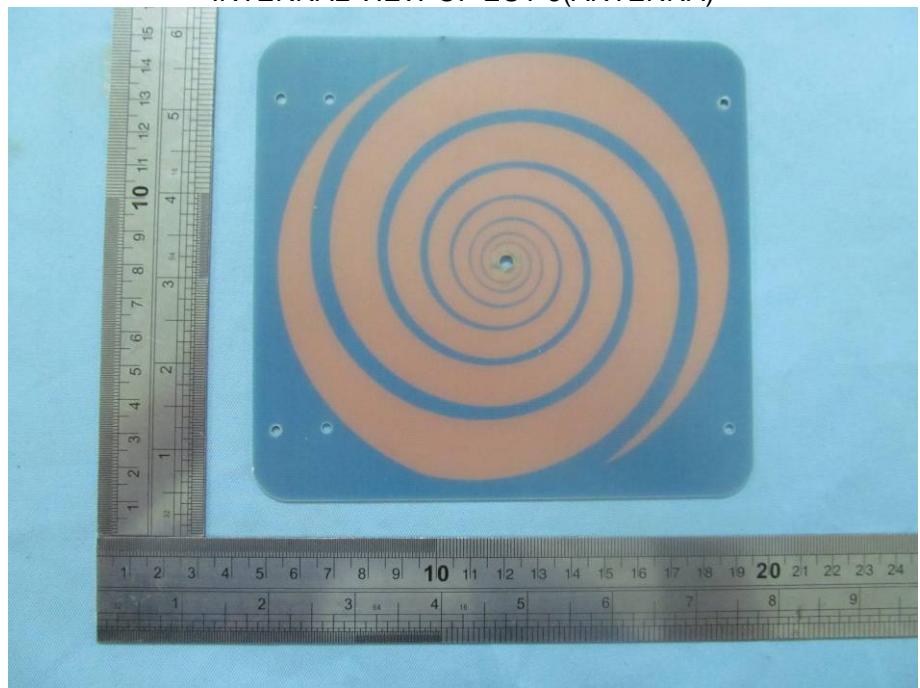

APPENDIX II
PHOTOGRAPHS OF THE TEST SETUP
CONDUCTED EMISSION TEST



RADIATED SPURIOUS EMISSION



----END OF REPORT----