

FCC TEST REPORT

Report No. : EMI00-020

Tested Date: June/07/00

Test Performed By
Philips Electronics Industries (Taiwan) Ltd.
Business Electronics
EMC Lab.
No. 5, Tze Chiang 1 Road,
Chungli, Taoyuan, Taiwan, R.O.C.
Tel.: + 886-3-454-9862 Fax.: +886-3-454-9887

Manufacturer : Philips Business Electronics

Tested System:

- 1. EUT : 107T20 color monitor s/n: TY0004020
FCC ID : A3KM076
- 2. Computer : IBM V66XA s/n: S14AA00072
FCC ID : FCC Logo
- 3. Keyboard : IBM KB-7959 s/n: 10422
FCC ID : FCC Logo
- 4. Mouse : IBM M-S34 s/n: 457249
FCC ID : DZL211029
- 5. Modem : USRobotics 268 s/n: 002680559278575
FCC ID : CJE-0318
- 6. Printer : HP2225C s/n: 3123S97227
FCC ID : DSI6XU2225
- 7. Video Card : METABYTE s/n: 10105
FCC ID : I27MM-VS03A

Note: Test was performed in according with FCC measurement procedure ANSI C63.4-1992
“AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF RADIO-NOISE
EMISSION FROM LOW-VOLTAGE ELECTRONIC EQUIPMENT IN THE RANGE
OF 9KHz TO 40GHz”

Monitor was connected to floor mounted AC outlet.

68.7KHz mode (1024X768/85Hz) was tested.

D-sub I/F cable with one ferrite core was used.

Non-shield power cord was used during test.

The test equipment used for testing please refer to the list as attached.

Deviation: None

Radiated RF Level – Peak Value

Frequency (MHz)	Horizontal (dBuV/m)	Vertical (dBuV/m)	FCC/B Limit (dBuV/m)
46.17	26.04	28.34	40.0
69.26	24.27	29.77	40.0
115.44	27.6	28.2	43.5

FCC ID: A3KM076

138.53	30.29	28.39	43.5
161.64	30.56	30.16	43.5
184.73	29.85	29.55	43.5
207.82	30.5	ambient	43.5
230.92	33.25	32.55	46.0
277.1	34.58	ambient	46.0
300.02	36.4	37.9	46.0
324.02	30.79	32.49	46.0
330.02	30.62	31.92	46.0
336.02	31.56	32.46	46.0
342.02	31.6	32.3	46.0
348.02	31.45	31.35	46.0
360.02	31.4	31.1	46.0
415.65	32.09	32.59	46.0
461.83	32.68	33.28	46.0
488.92	33.14	33.34	46.0
531.12	34.12	33.82	46.0
554.21	34.49	34.69	46.0

Spectrum Analyzer Setting:

RBW: 100KHz

VBW: 100KHz

The spectrum was scanned from 30MHz to 1000MHz and the significant emissions were recorded.

Test distance between device under test and receiving antenna was 3-meter.

Sample of calculation:

Final value (dBuV/m) = Antenna Factor (dB) + Cable Loss (dB) + Reading value (dBuV/m)

Tested by:





C.C. Wu


Checked by:



K.J. Hsu – EMC Engineer
NVLAP Signatory

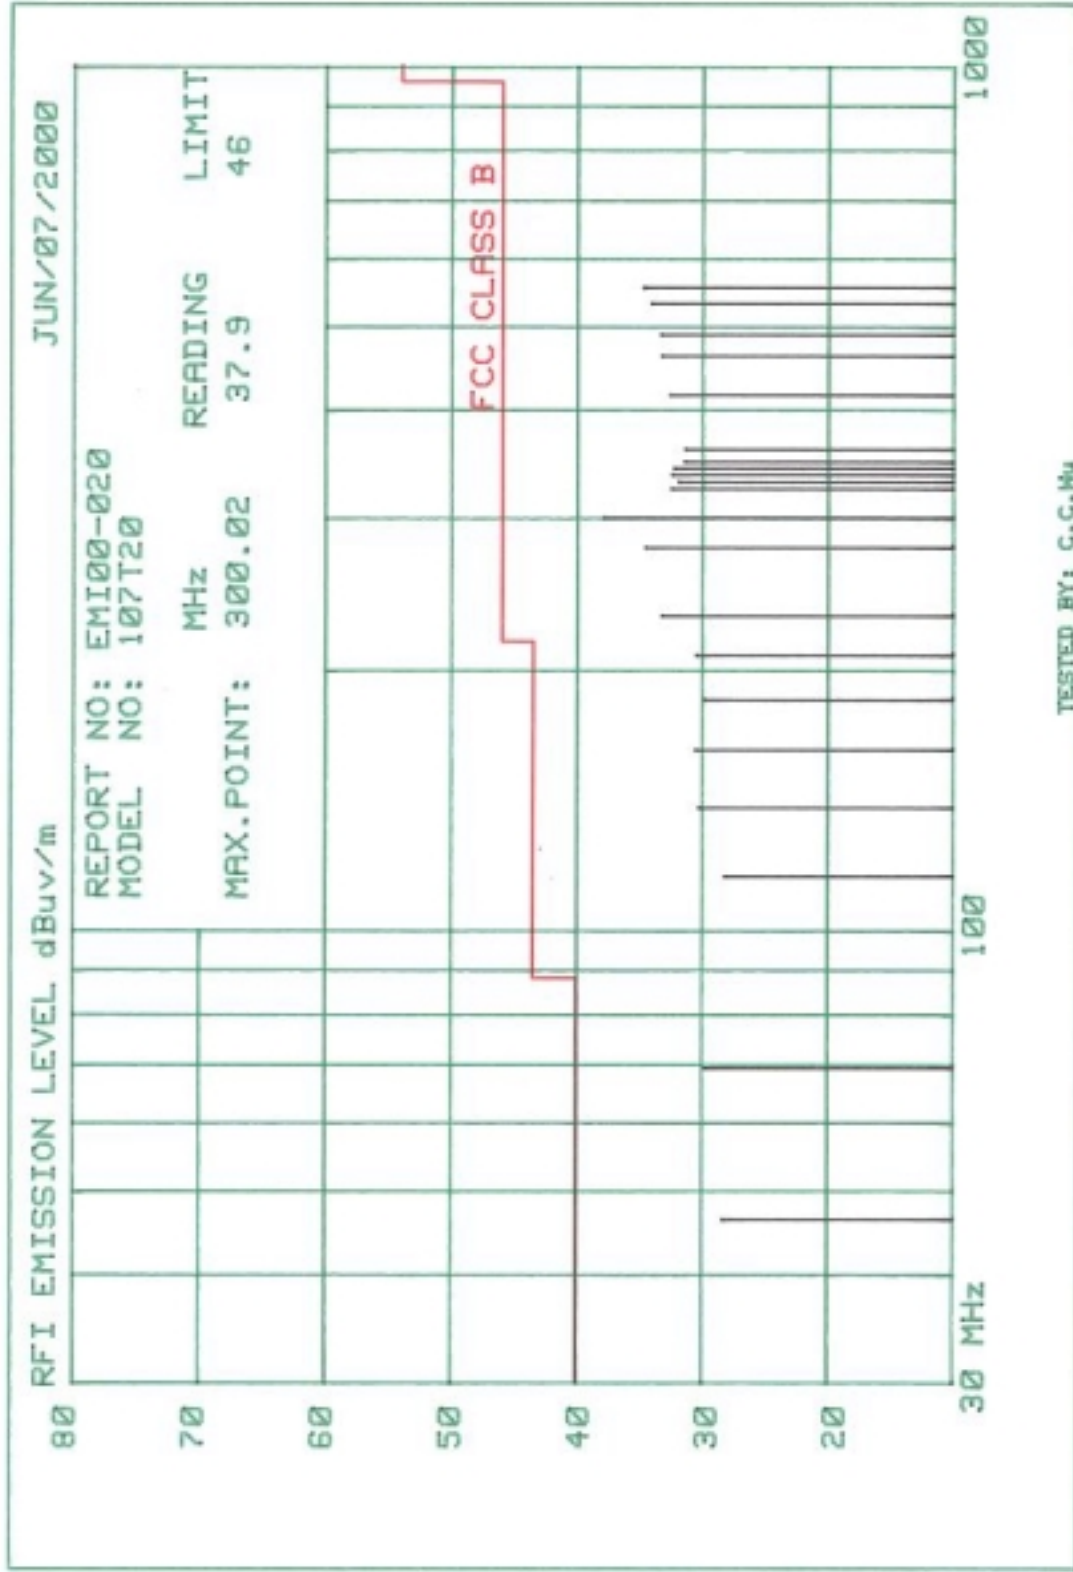

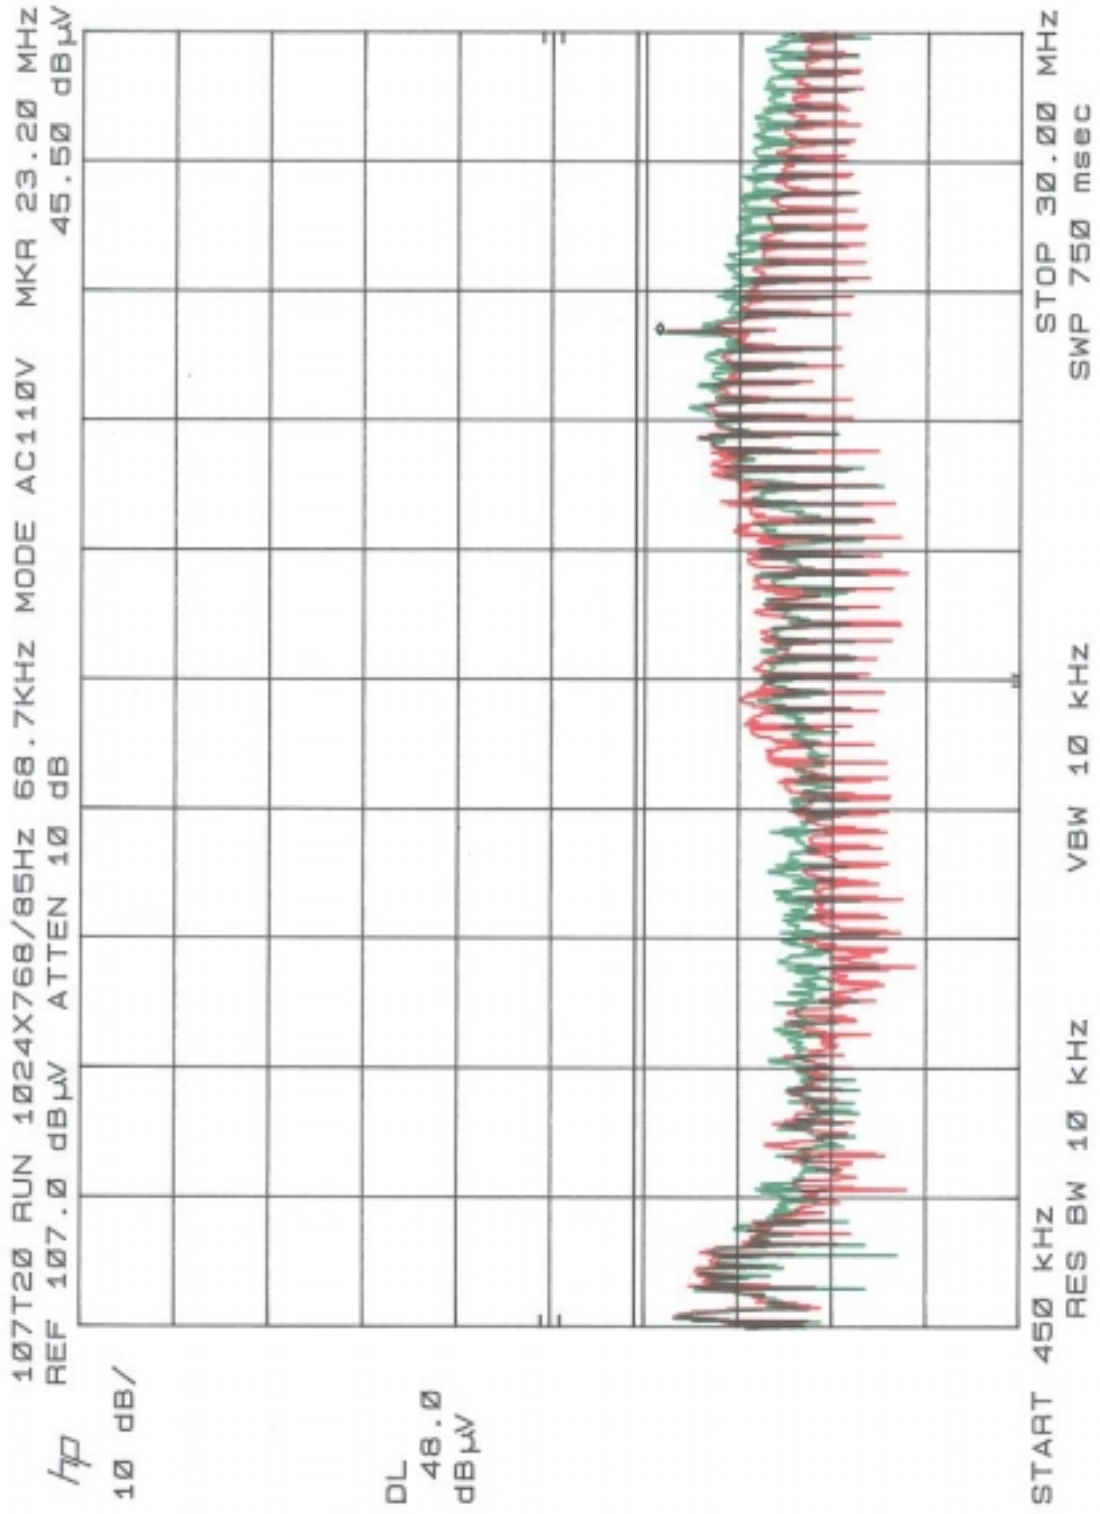

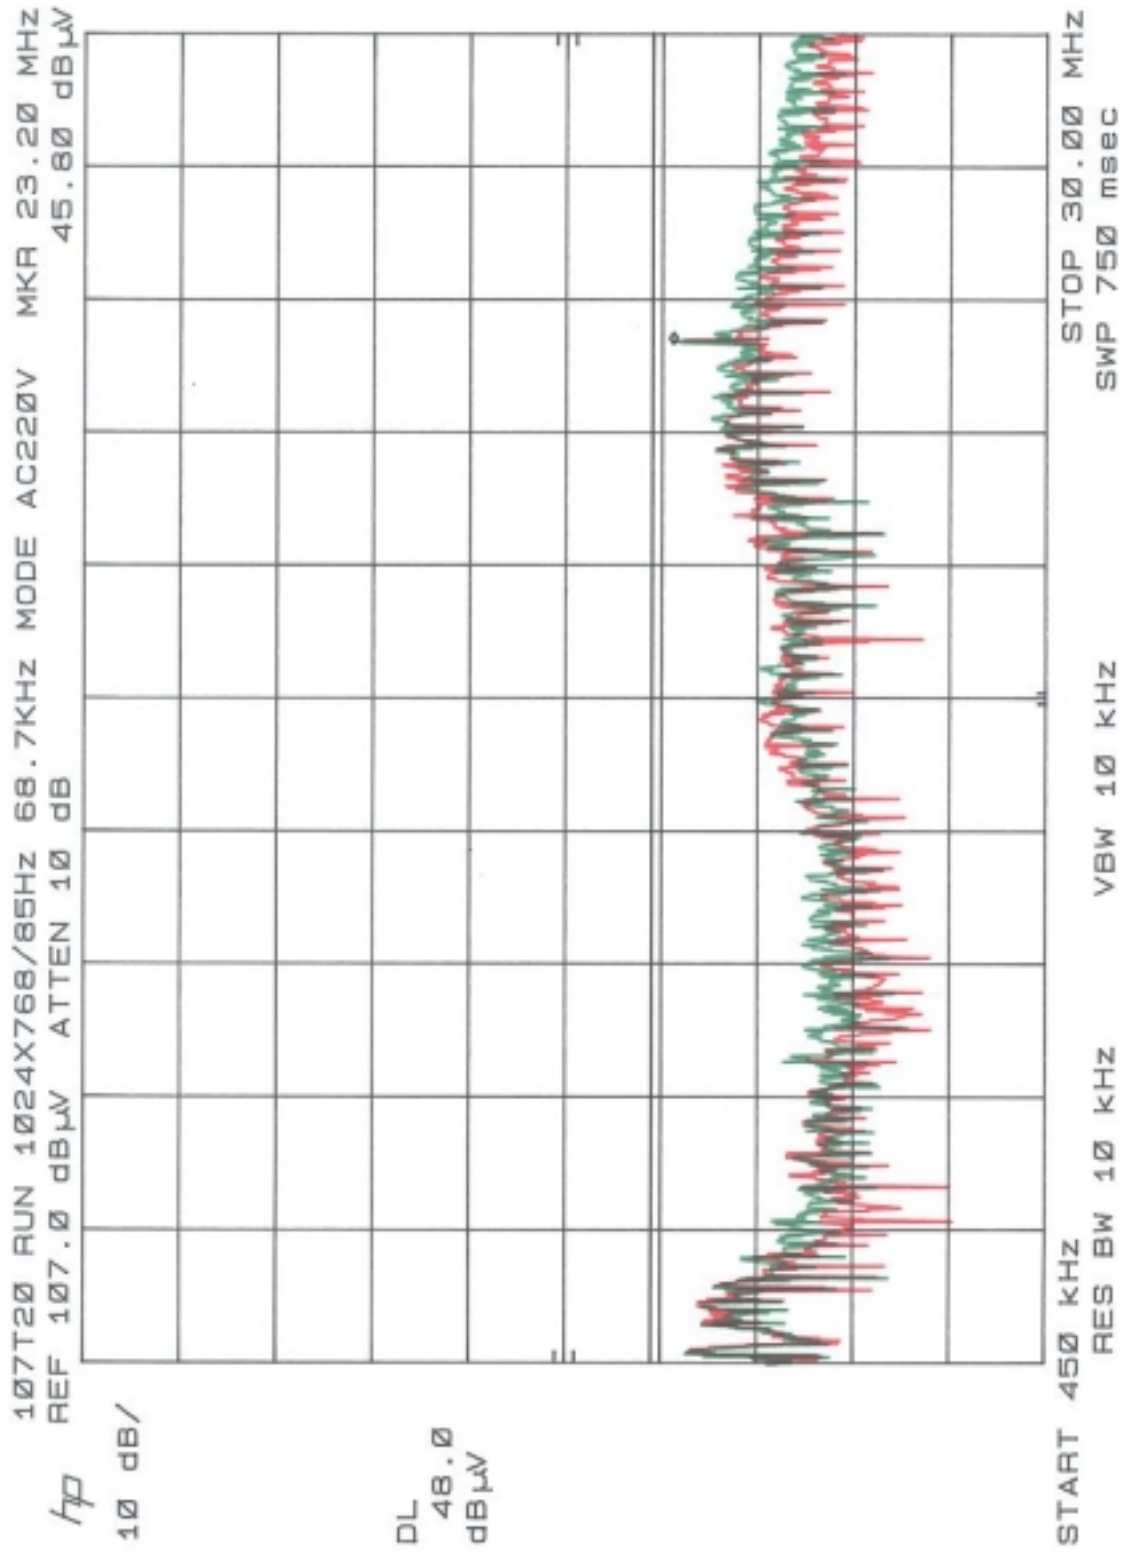

FCC TEST REPORT

Report No. : EMI00-020A

Tested Date: May/22/00

Test Performed By
Philips Electronics Industries (Taiwan) Ltd.
Business Electronics
EMC Lab.
No. 5, Tze Chiang 1 Road,
Chungli, Taoyuan, Taiwan, R.O.C.
Tel.: + 886-3-454-9862 Fax.: +886-3-454-9887

Manufacturer : Philips Business Electronics

Tested System:

1. EUT : 107T20 color monitor s/n: TY0004020
FCC ID : A3KM076
2. Computer : IBM V66XA s/n: S14AA00072
FCC ID : FCC Logo
3. Keyboard : IBM KB-7959 s/n: 10422
FCC ID : FCC Logo
4. Mouse : IBM M-S34 s/n: 457249
FCC ID : DZL211029
5. Modem : USRobotics 268 s/n: 002680559278575
FCC ID : CJE-0318
6. Printer : HP2225C s/n: 3123S97227
FCC ID : DSI6XU2225
7. Video Card : METABYTE s/n: 10105
FCC ID : I27MM-VS03A

Note: Test was performed in according with FCC measurement procedure ANSI C63.4-1992
“AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF RADIO-NOISE
EMISSION FROM LOW-VOLTAGE ELECTRONIC EQUIPMENT IN THE RANGE
OF 9KHz TO 40GHz”

Monitor was connected to floor mounted AC outlet.

64.0KHz mode (1280x1024/60Hz) was tested.

D-sub I/F cable with one ferrite core was used.

Non-shield power cord was used during test.

The test equipment used for testing please refer to the list as attached.

Deviation: None

Radiated RF Level – Peak Value

Frequency (MHz)	Horizontal (dBuv/m)	Vertical (dBuv/m)	FCC/B Limit (dBuv/m)
55.73	25.56	31.86	40.0
111.49	28.36	29.16	43.5
113.96	32.59	32.79	43.5

FCC ID: A3KM076

167.24	34.61	33.11	43.5
195.11	31.15	30.85	43.5
250.87	35.35	33.65	46.0
306.02	31.12	31.52	46.0
324.02	30.39	31.89	46.0
330.02	31.22	31.42	46.0
334.48	32.51	33.52	46.0
342.02	32.0	31.5	46.0
360.02	31.5	30.9	46.0
445.98	35.2	37.2	46.0
501.74	37.31	36.51	46.0
529.61	36.52	35.92	46.0
557.48	36.46	36.86	46.0
641.11	37.24	38.04	46.0
669.0	38.49	38.59	46.0

Spectrum Analyzer Setting:

RBW: 100KHz

VBW: 100KHz

The spectrum was scanned from 30MHz to 1000MHz and the significant emissions were recorded.

Test distance between device under test and receiving antenna was 3-meter.

Sample of calculation:

Final value (dBuV/m) = Antenna Factor (dB) + Cable Loss (dB) + Reading value (dBuV/m)

Tested by:



C.C.Wu

Checked by:



K.J.Hsu – EMC Engineer
NVLAP Signatory

