

FCC TEST REPORT

for

47 CFR, Part 15, Subpart C

Equipment : CF WLAN Module

Model No. : XI-815

FCC ID : A3KM150DM10P

Filing Type : Certification

Applicant : Philips Electronics Industries (Taiwan) Ltd.
5 Tze Chiang 1 Rd, Chungli Ind. Park PO Box 123,
Chungli

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

Table of Contents

History of this test report.....	ii
CERTIFICATE OF COMPLIANCE	1
1. General Description of Equipment under Test.....	2
1.1. Applicant.....	2
1.2. Manufacturer.....	2
1.3. Basic Description of Equipment under Test.....	2
1.4. Feature of Equipment under Test.....	3
2. Test Configuration of Equipment under Test	5
2.1. Test Manner.....	5
2.2. Description of Test System.....	5
2.3. Connection Diagram of Test System.....	7
2.4. Test Setup photographs.....	8
3. Operation of Equipment under Test.....	9
4. General Information of Test	10
4.1. Test Voltage.....	10
4.2. Standard for Methods of Measurement.....	10
4.3. Test in Compliance with.....	10
4.4. Frequency Range Investigated.....	10
4.5. Test Distance.....	10
5. Report of Measurements and Examinations	11
5.1. List of Measurements and Examinations	11
5.2. 6dB Bandwidth.....	12
5.3. Peak Output Power.....	16
5.4. Power Spectral Density.....	17
5.5. Test of Conducted Emission.....	21
5.6. Test of Radiated Emission.....	25
5.7. Band Edges Measurement.....	34
5.8. Antenna Requirements	37
5.9. RF Exposure.....	38
6. EMI Suppression Component List	40
7. Antenna Factor & Cable Loss	41
8. List of Measuring Equipments Used.....	43
9. Uncertainty of Test Site	44

History of this test report

Original Report Issue Date: Feb. 10, 2003

☒ No additional attachment.

☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE

for

47 CFR, Part 15, Subpart C

Equipment : CF WLAN Module

Model No. : XI-815

FCC ID : A3KM150DM10P

Filing Type : Certification

Applicant : **Philips Electronics Industries (Taiwan) Ltd.**
5 Tze Chiang 1 Rd, Chungli Ind. Park PO Box 123,
Chungli

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 1992** and the equipment under test was **passed** all test items required in FCC Part 15 subpart C, relative to the equipment under test. Testing was carried out on Feb. 08, 2003 at **SPORTON International Inc. LAB.**

 Feb. 11, 2003
K. J. Lin
Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test

1.1. Applicant

Philips Electronics Industries (Taiwan) Ltd.
5 Tze Chiang 1 Rd, Chungli Ind. Park PO Box 123, Chungli

1.2. Manufacturer

Same as 1.1.

1.3. Basic Description of Equipment under Test

Equipment	: CF WLAN Module
Model No.	: XI-815
FCC ID	: A3KM150DM10P
Trade Name	: Philips Electronics Industries (Taiwan) Ltd.
Power Supply Type	: From system
AC Power Cord	: N/A

1.4. Feature of Equipment under Test

Description	2.4 GHz Direct Sequence Spread Spectrum (DSSS) Wireless CF card, Compact Flash V1.4 CF+ TYPE I Compliant.
Host Interface	Compact Flash V1.4 , CF+ I/O interface, Type I
Operation Voltage	3.3 $\pm$ 5% available
LED indicator	Green (link)
Range Coverage	11Mbps @ 160m 5.5Mbps @ 200m 2Mbps @ 270m 1Mbps @ 400m
Antenna	Manufacturer : JOYMAX Model NO. : IHF-087HS -196 Antenna type : 1/4 Dipole Antenna gain : 1.8 dBi
Power Consumption	TX power consumption<350mA RX power consumption<250mA Power Safe Mode:80mA
RF Output power	15dBm Typical
Data Rate	1,2,5.5,11 Mbps, Auto
Modulation	• 11Mbps & 5.5 Mbps CCK • 2 Mbps DQPSK & 1 Mbps DBPSK
Sensitivity	@PER< 8% 11Mbps : -80 dBm(max.) 5.5Mbps: -82 dBm(max.) 2 Mbps : -83 dBm(max.) 1 Mbps : -85 dBm(max.)
Security	RC4 WEP 64 bit (40 bit)/ 128 bit
Network Architecture Types	Ad-hoc (peer-to-peer) Infrastructure (communications to wired networks via Access Points) Roaming (standard IEEE 802.11b compliant)
Support OS	Windows CE3.0/95SR2/98/2000/XP/NT/PocketPC2002

Channel	USA and Canada CH1-CH11 Europe Ch1-Ch13 Japan Ch1-Ch14 France Ch10-Ch13 Spain Ch10 and Ch11	
Environment	Operation Temp.	0~55°C
	Storage Temp.	-20~80°C
	Humidity(non-condensing)	5~90%
Warranty	Standard 12 months after delivery from Z-com	
EMC Certification	FCC, ETSI, JATE , TELEC,DGT	
Physical spec.	Dimension	62mmL*42.8mmW*11.7mmH (Antenna included)
	Net Weight	Compact Size Weight <20g

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner, which tended to maximize its emission characteristics in a typical application.
- b. The complete test system included LOGITECH PS/2 Keyboard, LOGITECH USB MOUSE, HP Printer, ACEEX Modem, DELL Notebook, ViewSonic Monitor and EUT for EMI test.
- c. The EUT can operate on eleven channels from 2412.0MHz to 2462.0MHz. (as listed in section 1.4). According to 15.31(m), three channels (one near top, one near middle and one near bottom) were performed as following:
Mode 1: 2412MHz (Channel 1)
Mode 2: 2437MHz (Channel 6)
Mode 3: 2462MHz (Channel 11)
- d. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 24620MHz.

2.2. Description of Test System

Support Unit 1. -- PS/2 Keyboard (LOGITECH)

FCC ID	: N/A
Model No.	: Y-SJ17
Serial No.	: SP0054
Data Cable	: Shielded, 360 degree via metal backshells, 1.7m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 2. -- USB Mouse (LOGITECH)

FCC ID	: N/A
Model No.	: M-BE58
Serial No.	: SP0041
Data Cable	: Shielded, 1.7m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 3. -- Printer (HP)

FCC ID	: B94C2642X
Model No.	: DJ 400
Power Supply Type	: Linear
Power Cord	: Non-Shielded
Serial No.	: SP0048
Data Cable	: Braided-Shielded, 360 degree via metal backshells, 1.35m

Support Unit 4. -- Modem (ACEEX) -- for local workstation

FCC ID	: IFAXDM1414
Model No.	: DM1414
Power Supply Type	: Linear
Power Cord	: Non-Shielded
Serial No.	: SP0015
Data Cable	: Shielded, 1.15m


Support Unit 5. -- Notebook (DELL)

FCC ID	: N/A
Model No.	: PP01L
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0037
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 6. -- Monitor (VIEWSONIC)


FCC ID	: N/A
Model No.	: VCDTS21553-3P
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0051
Data Cable	: Shielded, 1.7m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

2.3. Connection Diagram of Test System

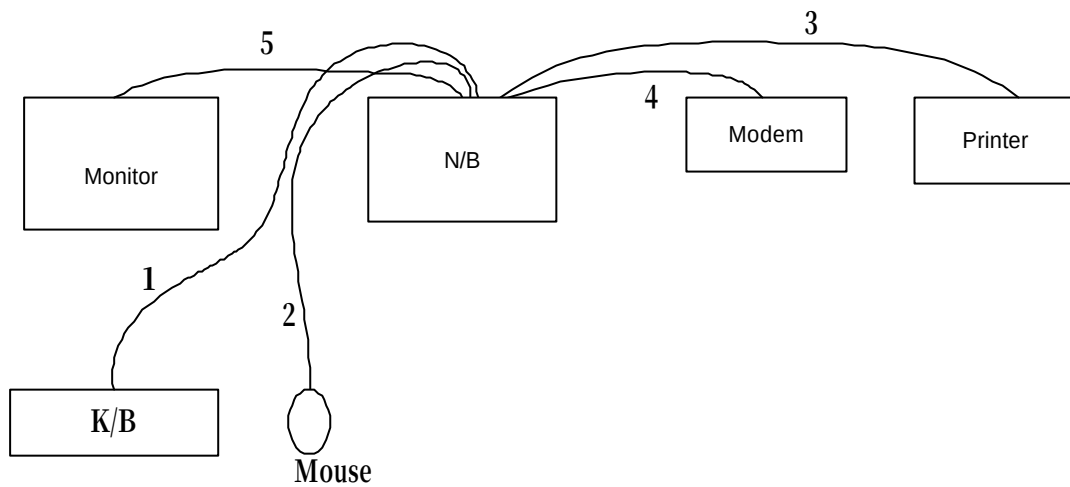

1. The I/O cable is connected from Notebook to the support unit 1
2. The I/O cable is connected from Notebook to the support unit 2
3. The I/O cable is connected from Notebook to the support unit 3.
4. The I/O cable is connected from Notebook to the support unit 4
5. The I/O cable is connected from Notebook to the support unit 6

2.4. Test Setup photographs

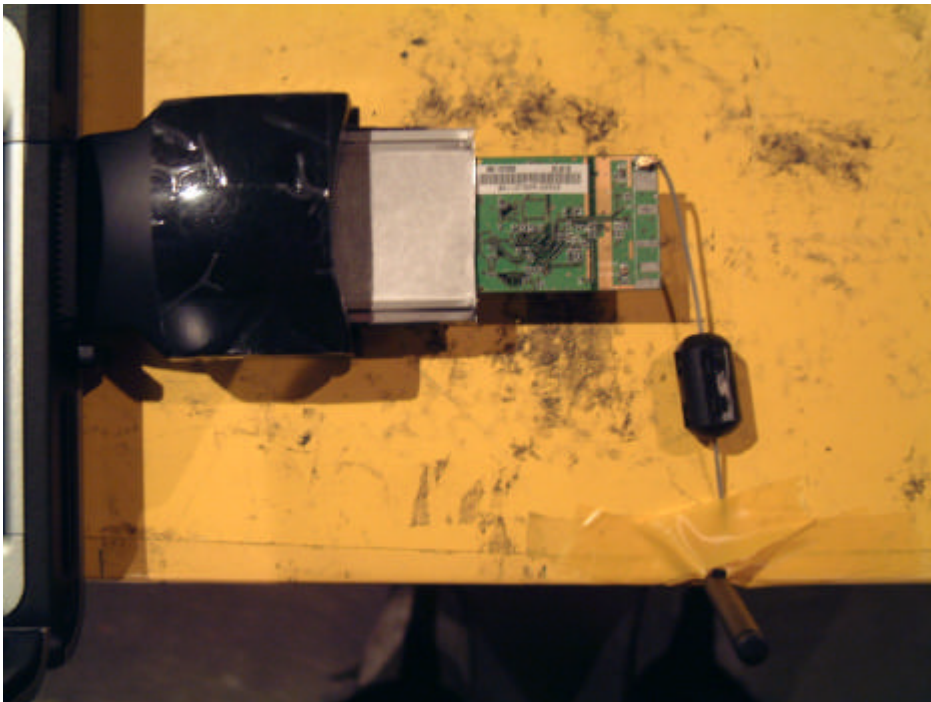

3. Operation of Equipment under Test

During testing, the software provided by the applicant enable the EUT under transmission condition continuously.

4. General Information of Test

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,
Kwei-Shan Hsiag, Tao Yuan Hsien, Taiwan, R.O.C.
TEL : 886-3-327-3456
FAX : 886-3-318-0055
Test Site No : CO01-HY, 03CH03-HY

4.1. Test Voltage

110V/ 60Hz

4.2. Standard for Methods of Measurement

ANSI C63.4-1992

4.3. Test in Compliance with

FCC Part 15, Subpart C

4.4. Frequency Range Investigated

- a. Conduction: from 150 KHz to 30 MHz
- b. Radiation: from 30 MHz to 24620MHz

4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 3 M.

5. Report of Measurements and Examinations

5.1. List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.207	Conducted Emission	Pass
<u>15.247(a)(2)</u>	6dB Bandwidth	Pass
<u>15.247(b)</u>	Maximum Peak Output Power	Pass
15.209	Radiated Emission	Pass
<u>15.247(c)</u>	100kHz Bandwidth of Frequency Band Edges	Pass
<u>15.247(d)</u>	Power Spectral Density	Pass
<u>15.203</u>	Antenna Requirement	Pass
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	Pass

5.2. 6dB Bandwidth


5.2.1. Measuring Instruments :

As described in chapter 6 of this test report.

5.2.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

5.2.3. Test Setup Layout :




5.2.4. Test Result : The spectrum analyzer plots are attached as below

- Temperature : 22.9 °C
- Relative Humidity : 49 %


Channel	Frequency (MHz)	6dB Emission bandwidth (MHz)	Limits (MHz)	Plot Ref. No.
1	2412	15.32	0.5	1
6	2437	15.60	0.5	2
11	2462	15.60	0.5	3

Plot1(Channel 1) :

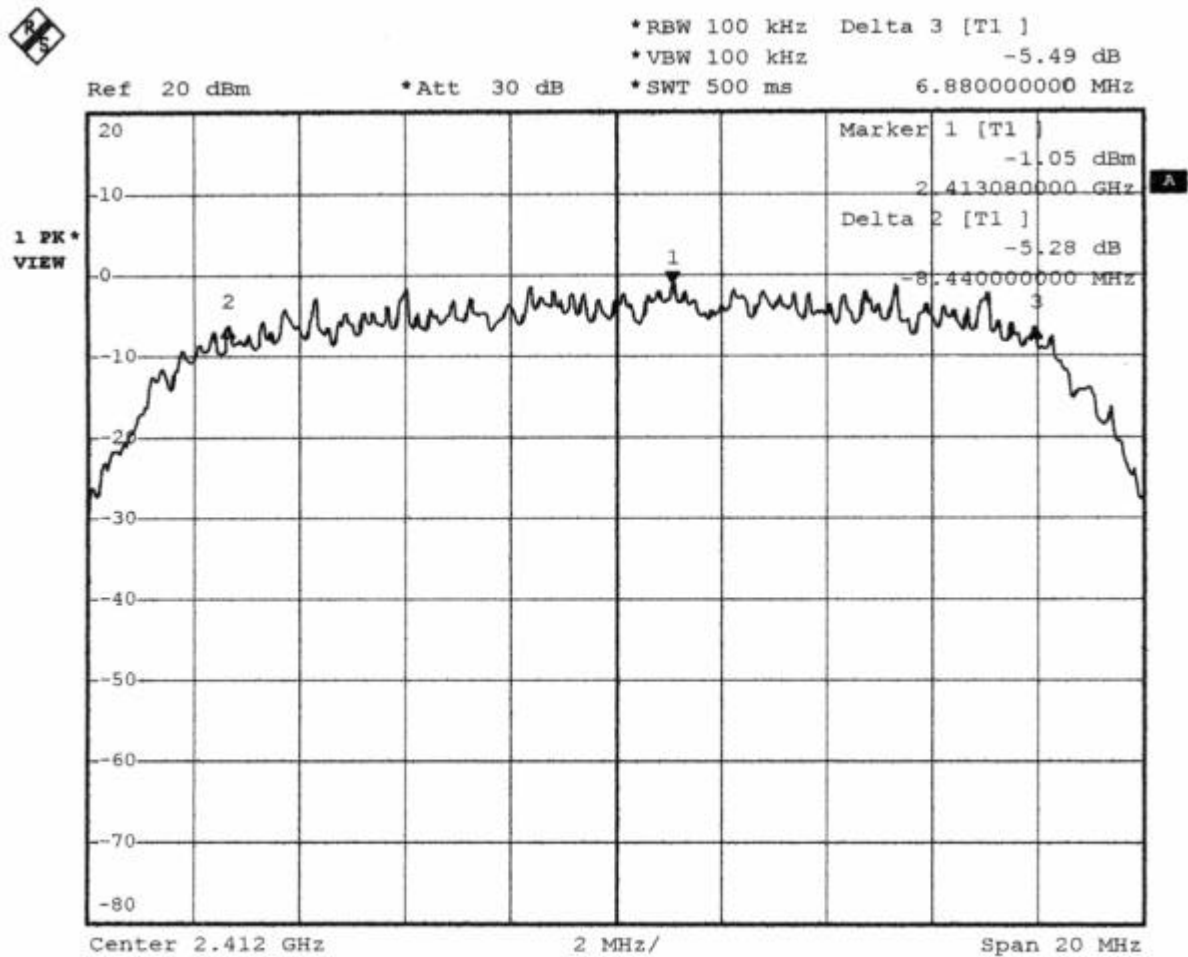


Date: 3.JAN.2003 04:41:40

Plot2(Channel 6) :

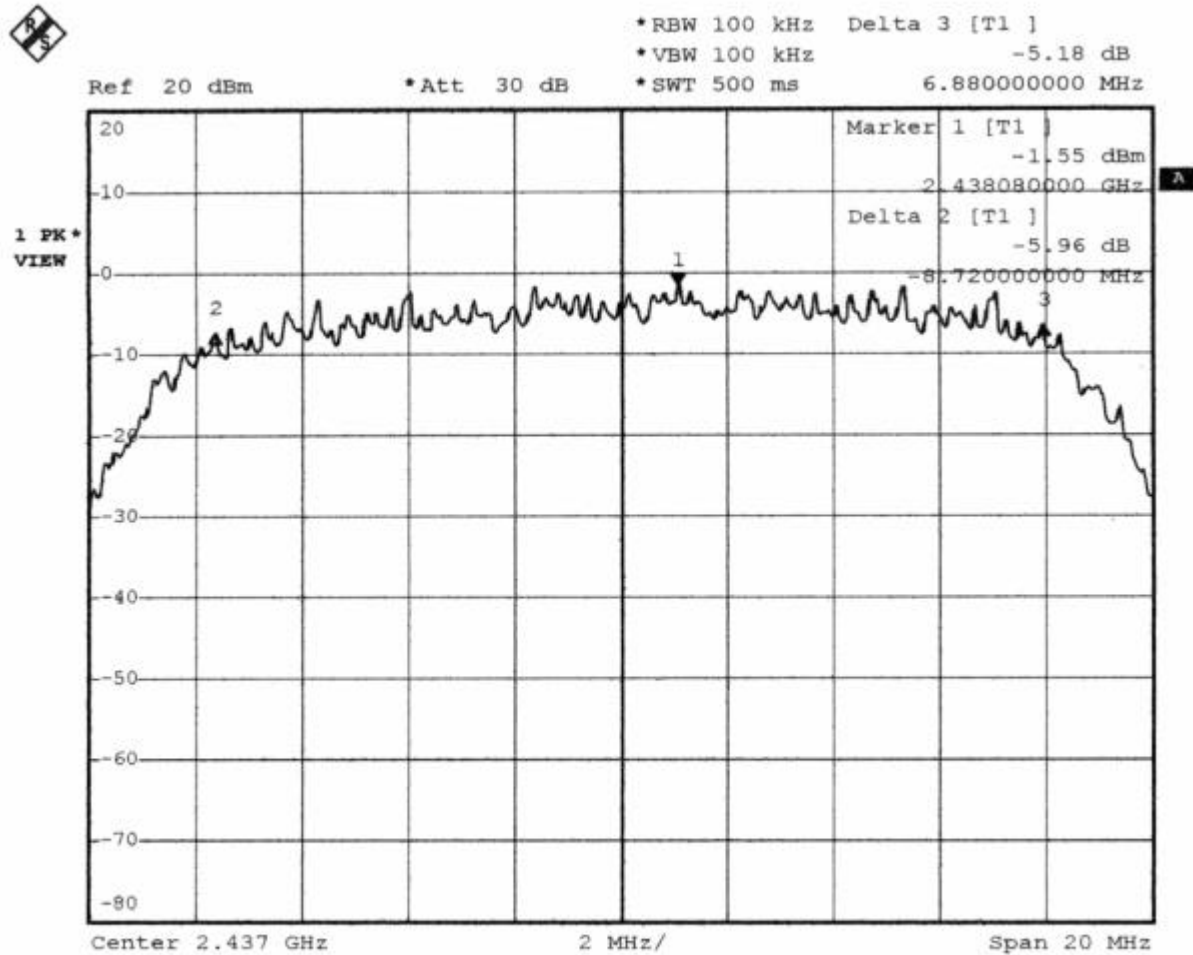

Date: 3.JAN.2003 04:54:30

Plot3(Channel 11):

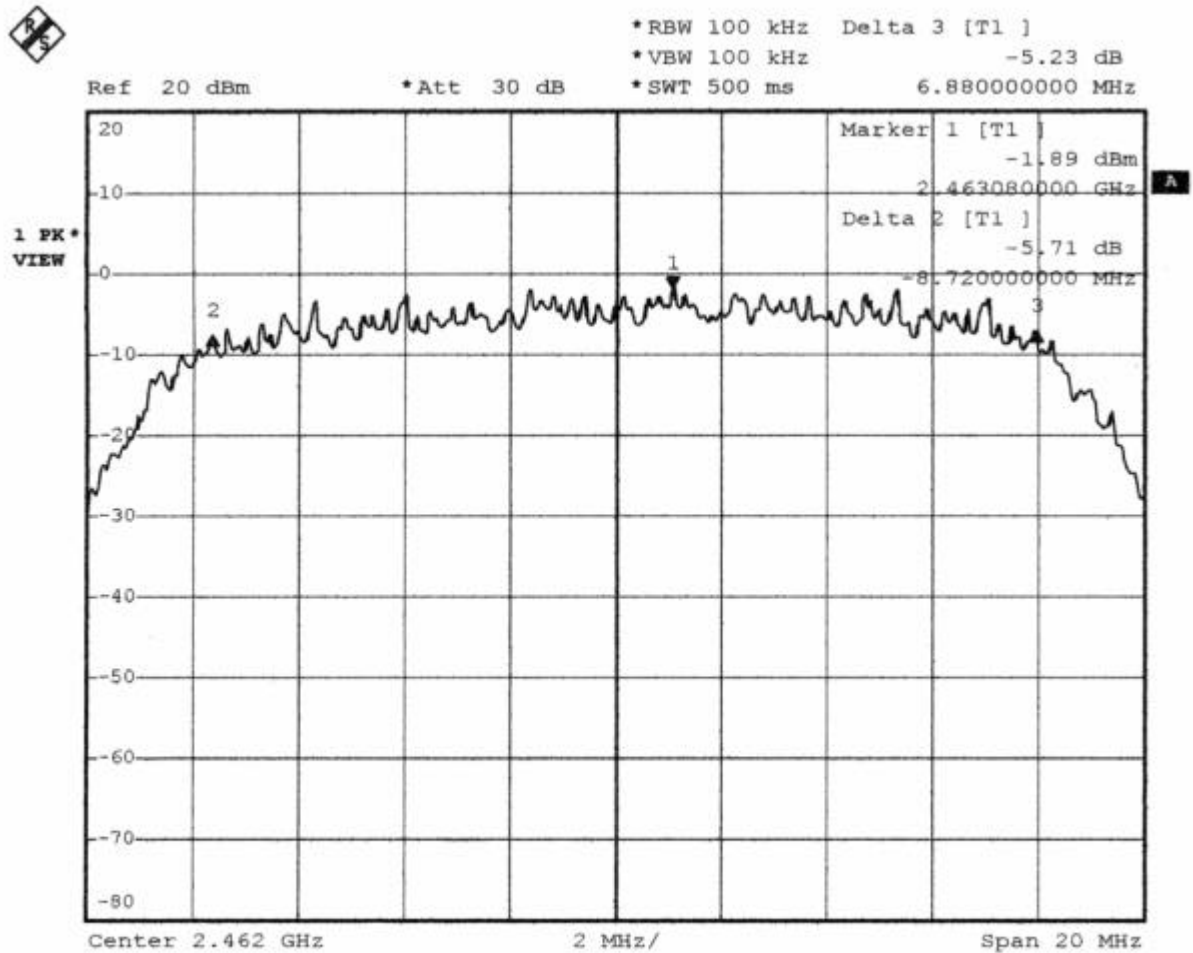

Date: 3.JAN.2003 05:03:58

Comments : 6dB Emission bandwidth>500kHz

5.3. Peak Output Power


5.3.1. Measuring Instruments :

As described in chapter 6 of this test report.

5.3.2. Test Procedure :

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

5.3.3. Test Setup Layout :



5.3.4. Test Result : See spectrum analyzer plots below

- Temperature : 22.9 °C
- Relative Humidity : 49 %
- Antenna Gain: 2 dBi

Channel	Frequency (MHz)	Measured Output Power (mWatt)	Measured Output Power (dBm)	Limits (Watt/dBm)
1	2412	33.04	15.19	1W/30 dBm
6	2437	32.73	15.15	1W/30 dBm
11	2462	31.19	14.94	1W/30 dBm

-
- Comments : Maximum Peak Output Power < 30dBm (1Watt)

5.4. Power Spectral Density


5.4.1. Measuring Instruments :

As described in chapter 6 of this test report.

5.4.2. Test Procedure :

1. The transmitter output was connected to spectrum analyzer through an attenuator.
2. The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=span/3KHz.
3. The power spectral density was measured and recorded.
4. The Sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

5.4.3. Test Setup Layout :




5.4.4. Test Result : See spectrum analyzer plots below

- Temperature : 28.5°C
- Relative Humidity : 59 %


Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)	Plot Ref. No.
1	2412	-16.23	8	1
6	2437	-16.50	8	2
11	2462	-16.72	8	3

Plot1(Channel 1):

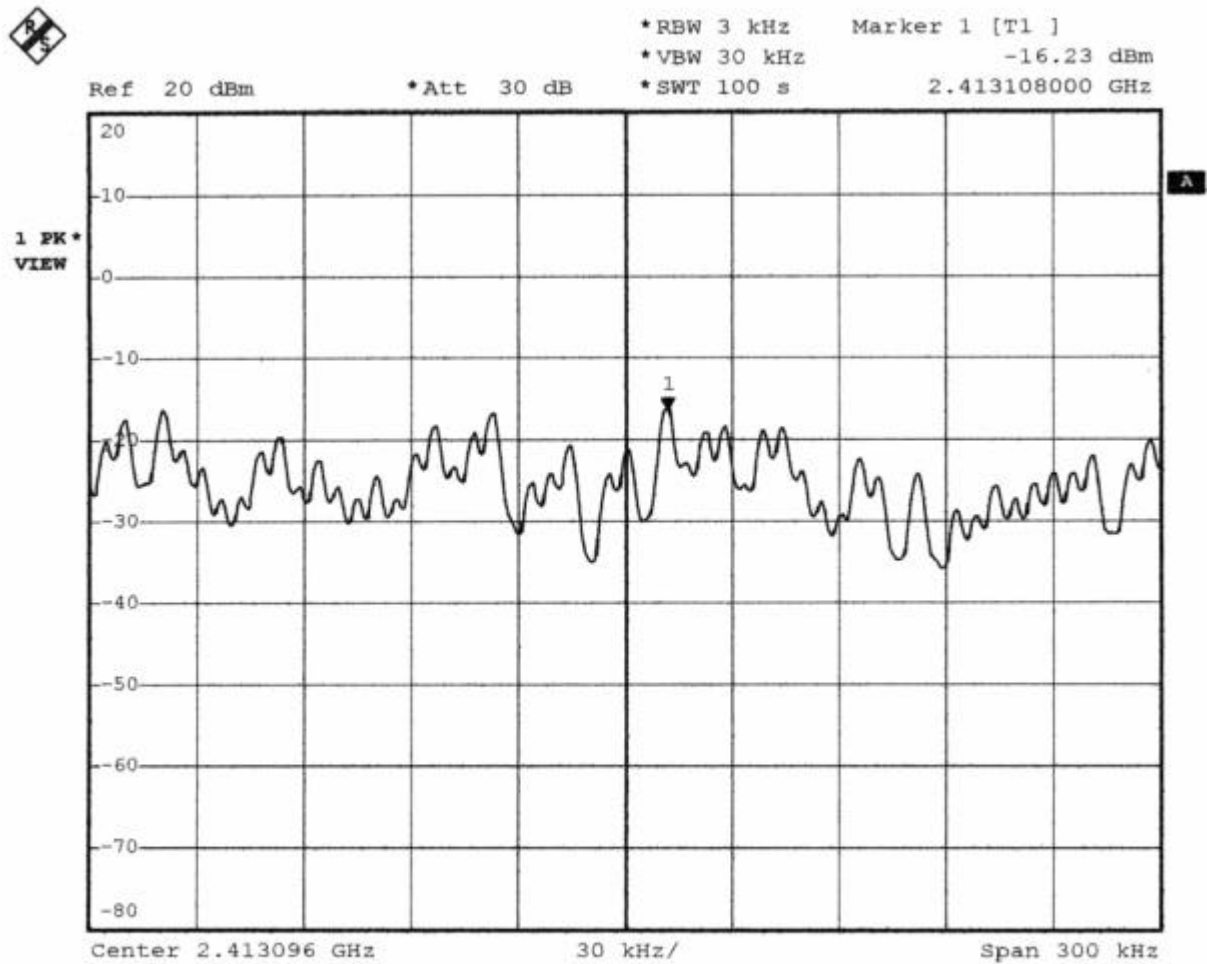


Date: 3.JAN.2003 04:49:48

Plot2(Channel 6):

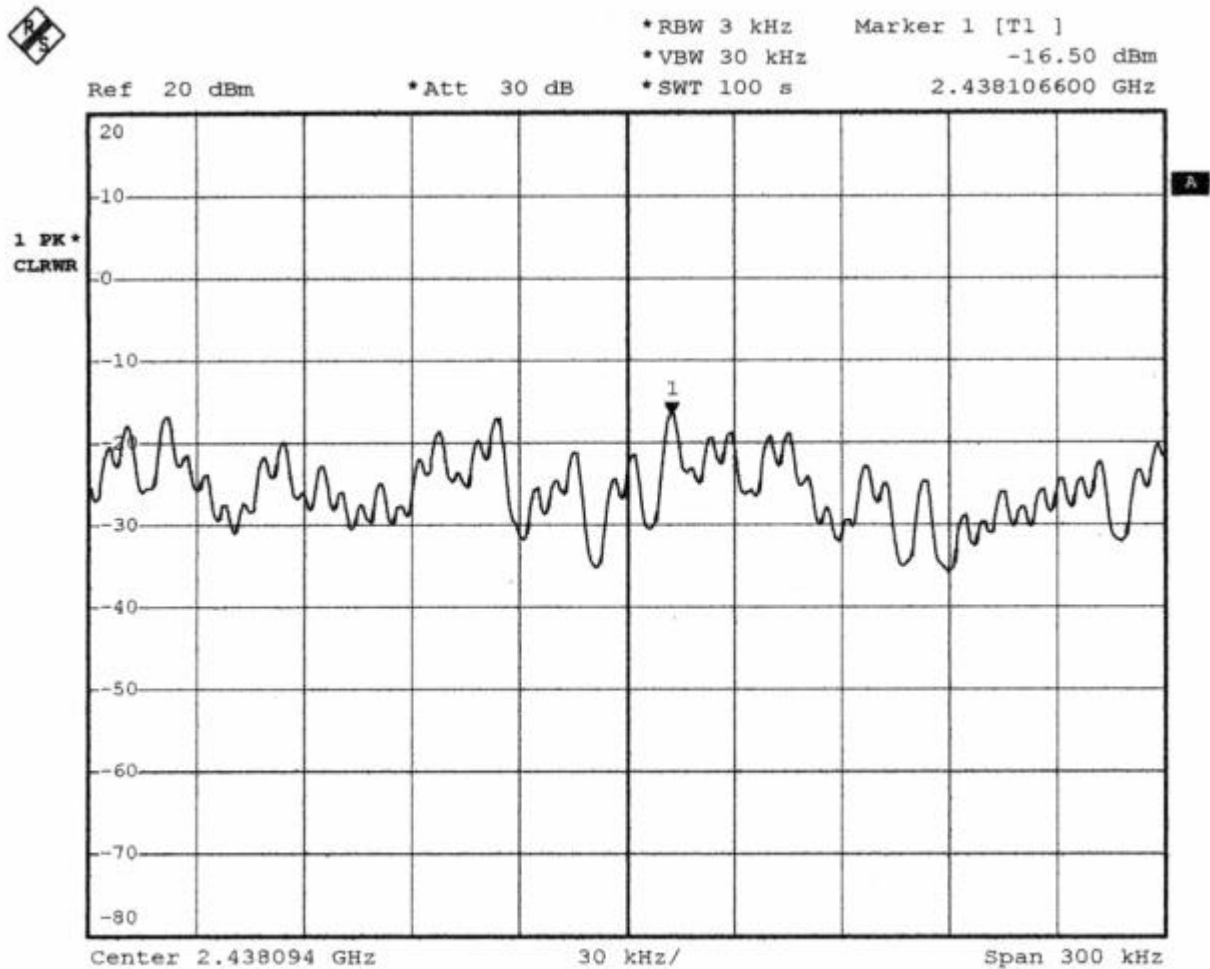

Date: 3.JAN.2003 05:00:29

Plot3(Channel 11):

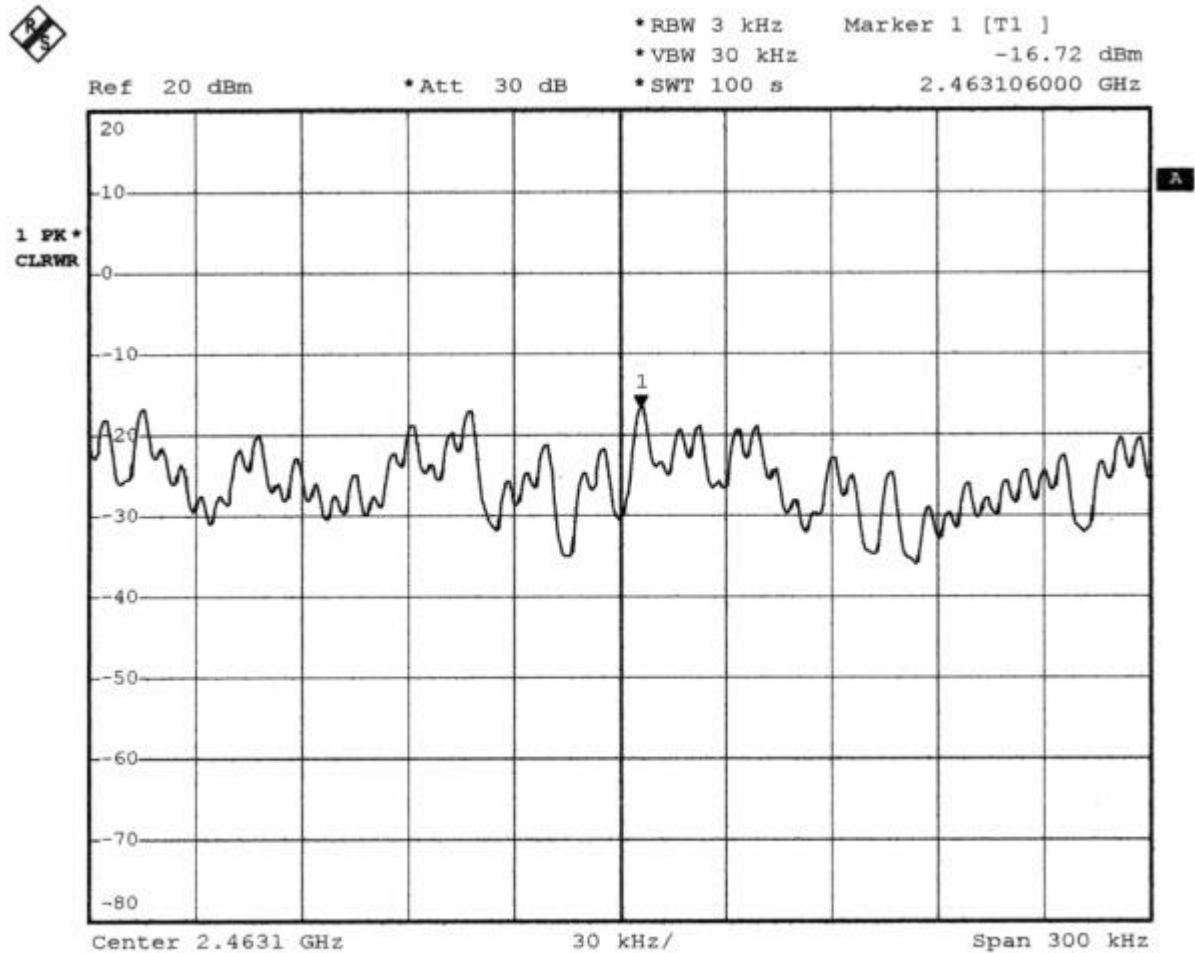

Date: 3.JAN.2003 05:11:50

5.5. Test of Conducted Emission

Conducted Emissions were measured from 150 KHz to 30 MHz with a bandwidth of 9 KHz and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

5.5.1. Major Measuring Instruments :

● Test Receiver	(R&S ESCS 30)
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

5.5.2. Test Procedures :

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 KHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

5.5.3. Test Result of Conducted Emission :

Frequency Range of Test : from 150KHz to 30 MHz

6dB Bandwidth : 9KHz

- Test Mode : Mode 1
- Temperature : 27°C
- Relative Humidity : 50 %
- Test Date: Jan.03, 2003
-
- **The Conducted Emission test was passed at minimum margin LINE 0.174 MHz / 48.87 dBuV.**
-

Frequency (MHz)	Line or Neutral	Meter Reading		Limits		Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (dB)	A.V. (dB)
0.174	L	48.87	37.64	64.77	54.77	-15.90	-17.13
0.233	L	40.48	32.05	62.34	52.34	-21.86	-20.29
0.346	L	35.96	28.15	59.06	49.06	-23.10	-20.91
0.405	L	31.99	27.14	57.75	47.75	-25.76	-20.61
0.464	L	31.33	27.33	56.62	46.62	-25.29	-19.29
3.755	L	29.70	21.84	56.00	46.00	-26.30	-24.16
0.173	N	48.12	36.95	64.82	54.82	-16.70	-17.87
0.234	N	38.85	26.56	62.31	52.31	-23.46	-25.75
0.293	N	31.54	23.35	60.44	50.44	-28.90	-27.09
0.404	N	27.84	20.59	57.77	47.77	-29.93	-27.18
1.680	N	25.00	20.10	56.00	46.00	-31.00	-25.90
3.701	N	30.91	21.30	56.00	46.00	-25.09	-24.70

Test Engineer : 

Andy Yang

-
- Test Mode : Mode 2
- Temperature : 27°C
- Relative Humidity : 50 %
- Test Date: Jan.03, 2003
-
- The Conducted Emission test was passed at minimum margin LINE 0.173 MHz / 49.09 dBuV

Frequency (MHz)	Line or Neutral	Meter Reading		Limits		Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (dB)	A.V. (dB)
0.173	L	49.09	37.87	64.82	54.82	-15.73	-16.95
0.231	L	42.33	32.11	62.41	52.41	-20.08	-20.30
0.289	L	36.17	26.25	60.55	50.55	-24.38	-24.30
0.347	L	36.01	28.05	59.03	49.03	-23.02	-20.98
0.461	L	32.96	24.50	56.67	46.67	-23.71	-22.17
14.063	L	28.49	20.93	60.00	50.00	-31.51	-29.07
0.172	N	48.28	37.45	64.86	54.86	-16.58	-17.41
0.233	N	38.87	27.50	62.34	52.34	-23.47	-24.84
0.289	N	34.51	23.21	60.55	50.55	-26.04	-27.34
0.347	N	30.45	23.69	59.03	49.03	-28.58	-25.34
0.403	N	27.80	20.20	57.79	47.79	-29.99	-27.59
3.863	N	30.09	20.80	56.00	46.00	-25.91	-25.20

Test Engineer : 

Andy Yang

- Test Mode : Mode 3
- Temperature : 27°C
- Relative Humidity : 50 %
- Test Date: Jan.03, 2003

▪ The Conducted Emission test was passed at minimum margin LINE0.173 MHz / 49.75 dBuV.

Frequency (MHz)	Line or Neutral	Meter Reading		Limits		Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (dB)	A.V. (dB)
0.173	L	49.75	38.43	64.82	54.82	-15.07	-16.39
0.231	L	41.51	32.33	62.41	52.41	-20.90	-20.08
0.289	L	36.99	26.41	60.55	50.55	-23.56	-24.14
0.345	L	36.33	28.06	59.08	49.08	-22.75	-21.02
0.459	L	32.51	27.86	56.71	46.71	-24.20	-18.85
13.700	L	27.84	22.52	60.00	50.00	-32.16	-27.48
0.175	N	48.14	37.14	64.72	54.72	-16.58	-17.58
0.234	N	39.81	26.45	62.31	52.31	-22.50	-25.86
0.289	N	34.79	23.52	60.55	50.55	-25.76	-27.03
0.346	N	31.02	23.99	59.06	49.06	-28.04	-25.07
3.743	N	30.91	22.27	56.00	46.00	-25.09	-23.73
4.720	N	27.08	21.36	56.00	46.00	-28.92	-24.64

Test Engineer : 

Andy Yang

5.6. Test of Radiated Emission


Radiated emissions from 30 MHz to 24.62 GHz were measured according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 4.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

5.6.1. Major Measuring Instruments

- from 30MHz to 1GHz
 - Amplifier (HP 8447D)
 - RF Gain 30 dB
 - Signal Input 100 KHz to 1.3 GHz
 - Spectrum Analyzer (R&S FSP)
 - Attenuation 10 dB
 - Start Frequency 30 MHz
 - Stop Frequency 1000 MHz
 - Resolution Bandwidth 120 KHz
 - Signal Input 9 KHz to 7 GHz
- above 1GHz
 - Spectrum analyzer (R&S FSP40)
 - Attenuation **10 dB**
 - Start Frequency **1 GHz**
 - Stop Frequency **5 GHz**
 - Resolution Bandwidth **1 MHz**
 - Video Bandwidth **1 MHz**
 - Signal Input 9 KHz to 40 GHz
 - Amplifier (MITEQ AFS44)
 - RF Gain 40 dB
 - Signal Input 100 MHz to 26.5GHz

5.6.2. Test Procedures

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
5. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

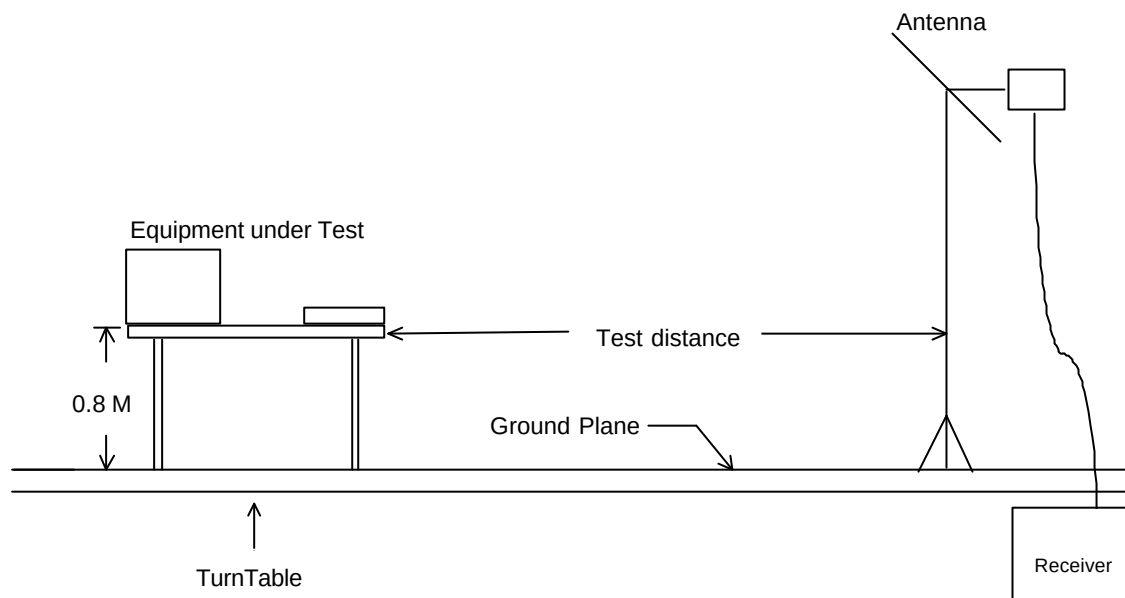5.6.3. Typical Test Setup Layout of Radiated Emission

5.6.4. Test Result of Radiated Emission

- Test Mode: Mode 1 (2412MHz)
- Test Distance : 3 M
- Temperature : 26 °C
- Relative Humidity : 55 %
- Test Date : Feb.08, 2003
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin:

Vertical 300.000 MHz / 42.26 dBuV/m Antenna Height 2 Meter , Turntable Degree 90 °

■ Spurious Emission

- For 30MHz to 1GHz

Frequency	Antenna	Cable	Reading	Limits		Emission	Level	Margin	Detect	
Polarity	Factor	Loss								
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode	
82.650	V	6.66	1.76	26.78	46.00	200	35.20	57.54	-10.80	Peak
32.430	V	14.32	1.05	19.57	40.00	100	34.94	55.85	-5.06	Peak
286.500	V	11.49	3.43	25.32	46.00	200	40.24	102.80	-5.76	Peak
300.000	V	11.36	3.51	27.39	46.00	200	42.26	129.72	-3.74	Peak
322.200	H	12.44	3.70	24.53	46.00	200	40.67	108.02	-5.33	Peak
396.600	H	14.53	4.07	22.96	46.00	200	41.56	119.67	-4.44	Peak

- For above 1GHz


Frequency	Antenna	Cable	Reading	Limits		Emission	Level	Margin	Detect
Polarity	Factor	Loss							
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode
1378.000	V	26.90	3.85	6.56	74.00	5012	37.31	73.37	-36.69 Peak
2334.000	V	30.66	5.10	7.13	74.00	5012	42.89	139.48	-31.11 Peak
2460.000	V	30.53	5.25	7.63	74.00	5012	43.41	148.08	-30.59 Peak
3956.000	V	31.31	6.82	6.00	74.00	5012	44.13	160.88	-29.87 Peak
1964.000	H	30.79	4.67	6.29	74.00	5012	41.75	122.32	-32.25 Peak
4736.000	H	33.34	7.44	5.85	74.00	5012	46.63	214.54	-27.37 Peak

■ Field strength of fundamental and harmonics

Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin	Detect	
Polarity	Factor	Loss							
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	
								Mode	
2414.000	V	30.57	5.20	55.41	-	-	91.18	36224.30	Peak
2414.000	V	30.57	5.20	52.52	-	-	88.29	25971.68	Peak
2412.000	H	30.58	5.20	48.99	-	-	84.77	17318.09	Peak
2412.000	H	30.58	5.20	44.99	-	-	80.77	10926.98	Peak
4824.000	V/H						-		AV/ Peak
7236.000	V/H						-		AV/ Peak
9648.000	V/H						-		AV/ Peak
12060.000	V/H						-		AV/ Peak
14472.000	V/H						-		AV/ Peak
16884.000	V/H						-		AV/ Peak
19296.000	V/H						-		AV/ Peak
21708.000	V/H						-		AV/ Peak
24120.000	V/H						-		AV/ Peak

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above,

Test Engineer :



Wayne Hsu

- Test Mode: Mode 2 (2437 MHz)
- Test Distance : 3 M
- Temperature : 27 °C
- Relative Humidity : 50 %
- Test Date : Feb.08, 2003
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin:

- **Horizontal 286.230 MHz / 42.32 dBuV/m Antenna Height 2 Meter , Turntable Degree 100 °**
 - Spurious Emission
 - For 30MHz to 1GHz

FCC FORM NO. 1-2013										
Frequency	Antenna	Cable	Reading	Limits		Emission	Level	Margin	Detect	
	Polarity	Factor	Loss							
(MHz)		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode
32.970	V	14.15	1.06	19.31	40.00	100	34.52	53.21	-5.48	Peak
33.780	H	13.89	1.07	19.93	40.00	100	34.89	55.53	-5.11	Peak
286.230	H	11.49	3.42	27.41	46.00	200	42.32	130.62	-3.68	Peak
299.730	H	11.36	3.51	26.24	46.00	200	41.11	113.63	-4.89	Peak
329.400	H	12.34	3.68	24.97	46.00	200	40.99	112.07	-5.01	Peak
399.400	H	14.63	4.08	23.47	46.00	200	42.18	128.53	-3.82	Peak

- For above 1GHz


Frequency	Antenna	Cable	Reading	Limits		Emission	Level	Margin	Detect	
Polarity	Factor	Loss								
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode	
1760.000	V	29.35	4.39	6.73	74.00	5012	40.47	105.56	-33.53	Peak
2392.000	V	30.60	5.17	6.31	74.00	5012	42.08	127.06	-31.92	Peak
1956.000	H	30.73	4.66	6.52	74.00	5012	41.91	124.59	-32.09	Peak
2828.000	H	30.37	5.67	5.02	74.00	5012	41.06	112.98	-32.94	Peak
4732.000	H	33.32	7.44	6.35	74.00	5012	47.11	226.73	-26.89	Peak

■ Field strength of fundamental and harmonics

Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin	Detect	
Polarity	Factor	Loss							
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	
								Mode	
2440.000	V	30.55	5.23	54.95	-	-	90.73	34395.37	Peak
2440.000	V	30.55	5.23	43.49	-	-	79.27	9193.90	Peak
2436.000	H	30.55	5.20	46.68	-	-	82.43	13228.18	Peak
2436.000	H	30.55	5.22	34.60	-	-	70.37	3299.89	Peak
4874.000	V/H						-		AV/ Peak
7311.000	V/H						-		AV/ Peak
9748.000	V/H						-		AV/ Peak
12185.000	V/H						-		AV/ Peak
14622.000	V/H						-		AV/ Peak
17059.000	V/H						-		AV/ Peak
19496.000	V/H						-		AV/ Peak
21933.000	V/H						-		AV/ Peak
24370.000	V/H						-		AV/ Peak

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above,

Test Engineer :



Wayne Hsu

- Test Mode: Mode 3 (2462 MHz)
- Test Distance : 3 M
- Temperature : 27 °C
- Relative Humidity : 50 %
- Test Date : Feb.08, 2003
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin:

Vertical 298.650 MHz / 41.77 dBuV/m Antenna Height 1 Meter , Turntable Degree 95 °

- For 30MHz to 1GHz

Frequency	Antenna	Cable	Reading	Limits		Emission	Level	Margin	Detect	
Polarity	Factor	Loss								
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode	
265.980	V	11.69	3.28	25.68	46.00	200	40.65	107.77	-5.35	Peak
286.500	V	11.49	3.43	23.99	46.00	200	38.91	88.21	-7.09	Peak
298.650	V	11.37	3.50	26.90	46.00	200	41.77	122.60	-4.23	Peak
332.200	V	12.44	3.70	24.10	46.00	200	40.24	102.80	-5.76	Peak
32.700	H	14.23	1.05	18.84	40.00	100	34.12	50.82	-5.88	Peak
307.700	H	11.63	3.53	23.87	46.00	200	39.03	89.43	-6.97	Peak

- For above 1GHz


Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin	Detect		
Polarity	Factor	Loss								
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode	
1948.000	V	30.67	4.65	6.34	74.00	5012	41.66	121.06	-32.34	Peak
2020.000	H	30.97	4.74	5.93	74.00	5012	41.64	120.78	-32.36	Peak

■ Field strength of fundamental and harmonics

Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin	Detect	
Polarity	Factor	Loss							
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	
								Mode	
2464.000	V	30.52	5.26	55.38	-	-	91.16	36140.99	Peak
2464.000	V	30.52	5.26	47.35	-	-	83.13	14338.38	Peak
2462.000	V	30.53	5.25	47.21	-	-	82.99	14109.12	Peak
2462.000	V	30.53	5.25	33.69	-	-	69.47	2975.09	Peak
4924.000	V/H						-		AV/ Peak
7386.000	V/H						-		AV/ Peak
9848.000	V/H						-		AV/ Peak
12310.000	V/H						-		AV/ Peak
14772.000	V/H						-		AV/ Peak
17234.000	V/H						-		AV/ Peak
19696.000	V/H						-		AV/ Peak
22158.000	V/H						-		AV/ Peak
24620.000	V/H						-		AV/ Peak

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above,

Test Engineer :



Wayne Hsu

5.7. Band Edges Measurement

5.7.1. Measuring Instruments :

As described in chapter 6 of this test report.

5.7.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100 KHz bandwidth from band edge.
3. The band edges was measured and recorded.

5.7.3. Test Result :

- Test Result in lower band (Channel 1) : PASS
- Test Result in higher band(Channel 11) : PASS

5.7.4. Note on Band edge Emission


The band edge emission plot on page 37. shows 45.10dB delta between carrier maximum power and local maximum emission in the restricted band (2.4835GHz).

Polarity	The emission of carrier power strength (dB μ V/m)	The maximum field strength in restrict band (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
V	91.16	47.45	74.00	-26.55	Peak
V	83.13	39.42	54.00	-14.58	Average
H	82.99	39.28	74.00	-34.72	Peak
H	69.47	25.76	54.00	-28.24	Average

*The maximum field strength in restricted band is the emission of carrier power strength subtract to the delta between carrier maximum power and local maximum emission in the restricted band.


The spectrum analyzer plots are attached as below :

Plot1 (Channel 1) :

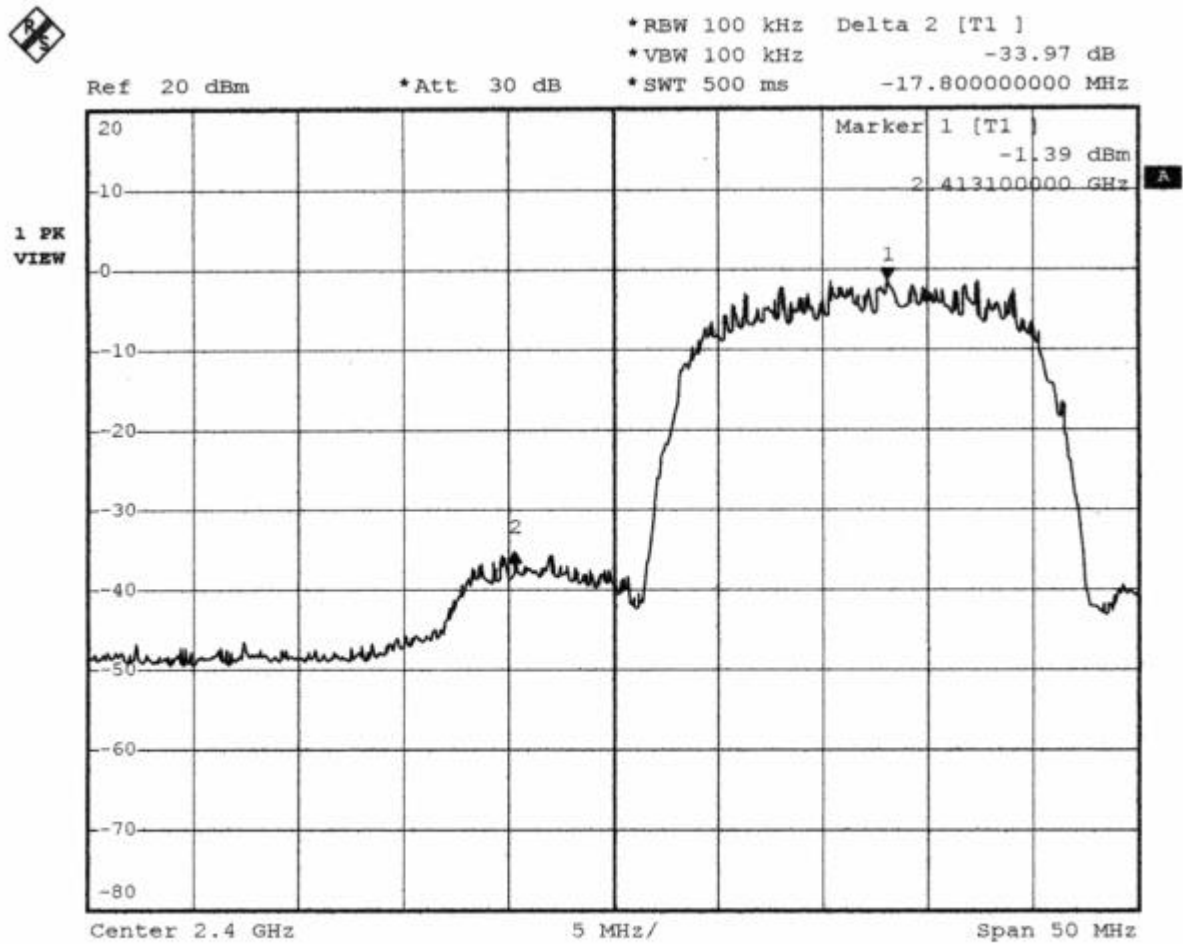

Date: 3.JAN.2003 04:51:59

Plot2 (Channel 11) :

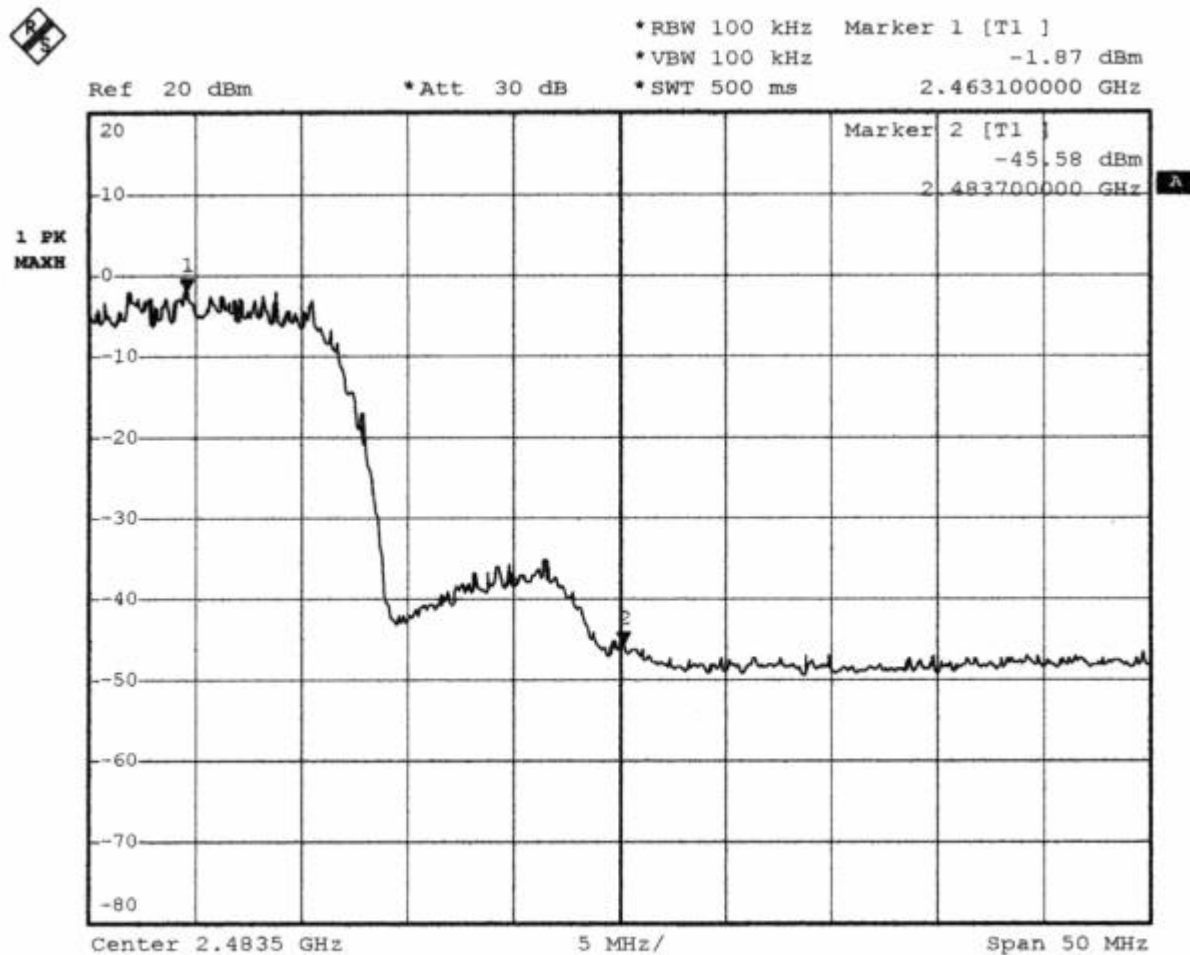

Date: 3.JAN.2003 05:07:19

Comments : All emissions in any 100kHz bandwidth outside the band edge are attenuated more then 20dB from the carrier.

5.8. Antenna Requirements

The EUT use a detachable antenna via U.FL external connector. It is considered meet antenna requirement of FCC.

5.8.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.8.2. Antenna Connected Construction

The maximum Gain antenna used in this product is dipole antenna. The antenna connector type is U.FL. The coaxial cable of the antenna is fixed to the antenna.

5.9. RF Exposure

FCC Rules and Regulations Part 1.1307,1.1310,2.1091,2.1093:

RF Exposure Compliance

5.9.1. Limit For Maximum Permissible Exposure (MPE)

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

F=frequency in MHz

*Plane-wave equivalent power density

5.9.2. MPE Calculations

$$E \text{ (V/m)} = \frac{\sqrt{30 \cdot P \cdot G}}{d} \quad \text{Power Density: } Pd \text{ (mW/cm}^2\text{)} = \frac{E^2}{3770}$$

E=Electric field (V/m)

P=Peak output power (mW)

G=Antenna numeric gain (numeric)

d=Separation distance (m)

Because the EUT is belong to General Population/ Uncontrolled Exposure. So the Limit of Power Density is 1.0 mW/cm² We can change the formula to:

$$d = \sqrt{\frac{30 \cdot P \cdot G}{3770}}$$

Channel No.	Gain (dBi)	Gain Numeric	Peak Output Power (mW)	Calculated RF Exposure Separation Distance (cm)	Minimum RF Exposure Separation Distance (cm)
Channel 1	2	1.58	33.04	0.36	20
Channel 6	2	1.58	32.73	0.36	20
Channel 11	2	1.58	31.19	0.35	20

5.9.3. FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. In order to avoid the possibility of exceeding the FCC radio frequency exposure limits, human proximity to the antenna shall not be less than 20cm (8 inches) during normal operation. Proposed RF exposure safety information to include in User's Manual.

6. EMI Suppression Component List

甲、A ferrite core is added on cable from main board to the antenna.
(please see page 1 of external photo)

7. Antenna Factor & Cable Loss

- from 30MHz to 1GHz

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	15.35	1.00
35	13.63	1.08
40	11.11	1.18
45	10.59	1.24
50	6.47	1.30
55	5.83	1.38
60	5.18	1.44
65	4.81	1.52
70	4.43	1.59
75	5.10	1.68
80	5.91	1.75
85	7.33	1.77
90	8.74	1.83
95	9.05	1.85
100	9.36	1.90
110	9.65	2.01
120	9.97	2.06
130	10.51	2.16
140	10.32	2.24
150	9.42	2.34
160	8.09	2.42
170	7.43	2.56
180	7.60	2.62
190	7.43	2.67
200	7.26	2.76
220	9.11	2.92
240	10.88	3.09
260	11.75	3.23
280	11.55	3.38
300	11.36	3.51
320	12.03	3.63
340	12.69	3.73
360	13.33	4.03
380	14.00	4.00
400	14.63	4.09
450	15.33	4.31
500	16.03	4.64
550	16.65	5.09
600	17.29	5.49
650	17.64	5.82
700	18.00	5.94
750	18.39	6.16
800	18.79	6.58
850	19.10	6.72
900	19.42	6.81
950	19.58	7.10
1000	19.75	7.41

- above 5GHz

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
1000	24.30	3.28
2000	31.10	4.69
3000	29.60	5.84
4000	30.80	6.87
5000	34.20	7.53
6000	33.30	8.60
7000	37.80	9.33
8000	39.40	9.84
9000	38.40	10.67
10000	38.90	11.20
11000	41.10	12.11
12000	42.70	12.37
13000	43.90	12.62

8. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9 KHz – 2.75 GHz	Jun. 03, 2002	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001-008	9 KHz – 30 MHz	Apr. 30, 2002	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001-009	9 KHz – 30 MHz	Apr. 30, 2002	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450 Hz	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 ~ 60 Hz	N/A	Conduction (CO01-HY)
Amplifier	HP	8447D	2944A09072	100KHz – 1.3GHz	Oct. 21, 2002	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2687	30MHz –2GHz	Dec. 21, 2002	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Half-wave dipole antenna	R&S	HZ12 HZ13	83924403 83924503	30MHz - 1GHz	Sep. 23, 2002	Radiation (03CH03-HY)
Horn Antenna	COM-POWER	AH-118	10094	1GHz – 18GHz	Apr. 09, 2002	Radiation
Spectrum analyzer	R&S	FSP40	100004/040	9KHZ~40GHZ	Aug. 07, 2002	Radiation (03CH03-HY)
Amplifier	MITEQ	AFS44	879981	100MHz~26.5GHz	Aug. 12, 2002	Radiation
Power Meter	R&S	NRVS	1020.1809.02	DC-40GHz	May. 13, 2002	Conduction
Power Sensor	R&S	NRV-Z32	1031.6807.041/.05	30MHz-6GHz	Apr. 29, 2002	Conduction
Power Sensor	R&S	NRV-Z55	1081.2005.02	DC-40GHz	May. 07, 2002	Conduction

※ Calibration Interval of instruments listed above is one year.

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID : A3KM150DM10P

Page No. : 43 of 44

Issued Date : Feb. 10, 2003

9. Uncertainty of Test Site

Uncertainty of Radiated Emission Measurement

Contribution	Probability Distribution	3m
Antenna factor calibration	normal(k=2)	± 1
cable loss calibration	normal(k=2)	± 0.3
RCV/SPA specification	rectangular	± 2
Antenna Directivity	rectangular	± 3
Antenna Factor V.S. Height	rectangular	± 2
Antenna Factor Interpolation for Frequency	rectangular	± 0.25
site imperfection	rectangular	± 2
Mismatch Receiver VSWR $\Gamma_1=0.09$ Antenna VSWR $\Gamma_2=0.67$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	U-shaped	± 0.54
combined standard uncertainty $U_e(y)$	normal	± 2.7
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$	normal (k=2)	± 5.4

$$U = \sqrt{\{(1/2)^2 + (0.3/2)^2 + (2^2 + 0.5^2 + 2^2 + 0.25^2 + 2^2)/3 + (0.54)^2/2\}} = 2.2 \text{ for 10m test distance}$$

$$U = \sqrt{\{(1/2)^2 + (0.3/2)^2 + (2^2 + 3^2 + 2^2 + 0.25^2 + 2^2)/3 + (0.54)^2/2\}} = 2.7 \text{ for 3m test distance}$$

Uncertainty of Conducted Emission Measurement

Contribution	Probability Distribution	150KHz – 30MHz
Cable and I/P attenuator calibration	normal(k=2)	± 0.3
RCV/SPA specification	rectangular	± 2
LISN coupling specification	rectangular	± 1.5
Transducer factor frequency interpolation	rectangular	± 0.2
Mismatch Receiver VSWR $\Gamma_1=0.09$ LISN VSWR $\Gamma_2=0.33$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	U-shaped	0.2
combined standard uncertainty $U_e(y)$	normal	± 1.66
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$	normal (k=2)	± 3.32

$$U = \sqrt{\{(0.3/2)^2 + (2^2 + 1.5^2 + 0.2^2)/3 + (0.2)^2/2\}} = 1.66$$