



REPORT No.: SZ16020052W04

FCC RF TEST REPORT

APPLICANT : RM Acquisition LLC

PRODUCT NAME : Electronic Hours of Service Logging Device

MODEL NAME : ELD50-9,ELD50-6

TRADE NAME : N.A

BRAND NAME : Rand McNally

FCC ID : A4C01004A

STANDARD(S) : 47 CFR Part 15 Subpart C

ISSUE DATE : 2016-04-13



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , Guangdong Province, P. R. China

Tel: 86-755-36698555
Http://www.morlab.com

Fax: 86-755-36698525
E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION	4
1. TECHNICAL INFORMATION	5
1.1 APPLICANT INFORMATION	5
1.2 EQUIPMENT UNDER TEST (EUT) DESCRIPTION	5
1.2.1 IDENTIFICATION OF ALL USED EUTS	5
1.3 TEST STANDARDS AND RESULTS	6
1.3.1 TEST ENVIRONMENT CONDITIONS	6
2. 47 CFR PART 15C REQUIREMENTS	7
2.1 ANTENNA REQUIREMENT	7
2.1.1 APPLICABLE STANDARD	7
2.1.2 RESULT: COMPLIANT	7
2.2 NUMBER OF HOPPING FREQUENCY	7
2.2.1 REQUIREMENT	7
2.2.2 TEST DESCRIPTION	7
2.2.3 TEST PROCEDURE	8
2.2.4 TEST RESULT	8
2.3 PEAK OUTPUT POWER	10
2.3.1 REQUIREMENT	10
2.3.2 TEST DESCRIPTION	10
2.3.3 TEST RESULT	10
2.4 20DB BANDWIDTH	11
2.4.1 DEFINITION	11
2.4.2 TEST DESCRIPTION	11
2.4.3 TEST PROCEDURE	11
2.4.4 TEST RESULT	11
2.5 CARRIED FREQUENCY SEPARATION	14
2.5.1 DEFINITION	14
2.5.2 TEST DESCRIPTION	14
2.5.3 TEST PROCEDURE	14
2.5.4 TEST RESULT	15
2.6 TIME OF OCCUPANCY (DWELL TIME)	16



2.6.1	REQUIREMENT.....	16
2.6.2	TEST DESCRIPTION	16
2.6.3	TEST PROCEDURE.....	16
2.6.4	TEST RESULT.....	17
2.7	CONDUCTED SPURIOUS EMISSIONS	21
2.7.1	REQUIREMENT.....	21
2.7.2	TEST DESCRIPTION	21
2.7.3	TEST PROCEDURE.....	21
2.7.4	TEST RESULT.....	22
2.8	RESTRICTED FREQUENCY BANDS	26
2.8.1	REQUIREMENT.....	26
2.8.2	TEST DESCRIPTION	26
2.8.3	TEST PROCEDURE.....	27
2.8.4	TEST RESULT.....	27
2.9	RADIATED EMISSION	30
2.9.1	REQUIREMENT.....	30
2.10.2	TEST DESCRIPTION	31
2.10.3	TEST PROCEDURE.....	33
2.10.4	TEST RESULT.....	33
ANNEX A GENERAL INFORMATION.....		37

Change History		
Issue	Date	Reason for change
1.0	2016-04-13	First edition



REPORT No.: SZ16020052W04

TEST REPORT DECLARATION

Applicant	RM Acquisition LLC
Applicant Address	9855 Woods Drive, Skokies IL 60077
Manufacturer	LONGHORN AUTO LIMITED
Manufacturer Address	Gongyeyuan rd., Dalang street, Longhua , Shenzhen
Product Name	Electronic Hours of Service Logging Device
Model Name	ELD50-9,ELD50-6
Brand Name	Rand McNally
HW Version	P3
SW Version	ELD50_0.0.15
Test Standards	47 CFR Part 15 Subpart C
Test Date	2016-02-29 to 2016-03-15
Test Result	PASS

Tested by : Zou Jian
Zou Jian

Reviewed by : Yuan Ling
Yuan Ling

Approved by : Peng Huarui
Peng Huarui



1. TECHNICAL INFORMATION

Note: Provide by applicant.

1.1 Applicant Information

Company:	RM Acquisition LLC
Address:	9855 Woods Drive, Skokies IL 60077

1.2 Equipment under Test (EUT) Description

Brand Name:	Rand McNally
Trade Name:	N.A
Model Name:	ELD50-9, ELD50-6
Frequency Range:	The frequency range used is 2402MHz – 2480MHz (79 channels, at intervals of 1MHz); The frequency block is 2400MHz to 2483.5MHz.
Modulation Type:	Bluetooth: FHSS (GFSK(1Mbps)
Bluetooth Version:	2.1
Antenna Type:	PCBAntenna
Antenna Gain:	0.9 dBi

NOTE:

The EUT is a Electronic Hours of Service Logging Device, it contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth Module is $F(\text{MHz})=2402+1*n$ ($0 \leq n \leq 78$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.2.1 Identification of all used EUTs

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
A01	P3	ELD50_0.0.15



1.3 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-13 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Test Date	Result
1	15.203	Antenna Requirement	N.A	<u>PASS</u>
2	15.247(a)	Number of Hopping Frequency	Mar 02, 2016	<u>PASS</u>
3	15.247(b)	Peak Output Power	Mar 02, 2016	<u>PASS</u>
4	15.247(a)	20dB Bandwidth	Mar 02, 2016	<u>PASS</u>
5	15.247(a)	Carrier Frequency Separation	Mar 02, 2016	<u>PASS</u>
6	15.247(a)	Time of Occupancy (Dwell time)	Mar 02, 2016	<u>PASS</u>
7	15.247(d)	Conducted Spurious Emission	Mar 02, 2016	<u>PASS</u>
8	15.247(d)	Restricted Frequency Bands	Mar 14, 2016	<u>PASS</u>
9	15.209 15.247(d)	Radiated Emission	Mar 14, 2016	<u>PASS</u>

NOTE: The tests were performed according to the method of measurements prescribed in DA-00-705 and ANSI C63.10-2013.

1.3.1 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 - 60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR PART 15C REQUIREMENTS

2.1 Antenna requirement

2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2 Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.


2.2 Number of Hopping Frequency

2.2.1 Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

2.2.2 Test Description

A. Test Setup:

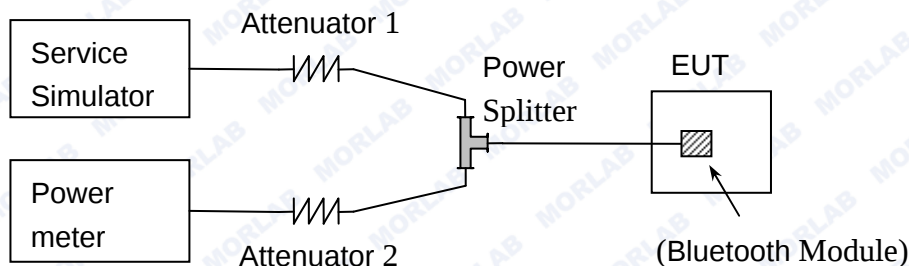

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

**B. Equipments List:**

Please reference ANNEX A(1.4).

2.2.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

2.2.4 Test Result


The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.

A. Test Verdict:

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Refer to Plot	Verdict
GFSK	2400 - 2483.5	79	15	Plot A	PASS



B. Test Plots:

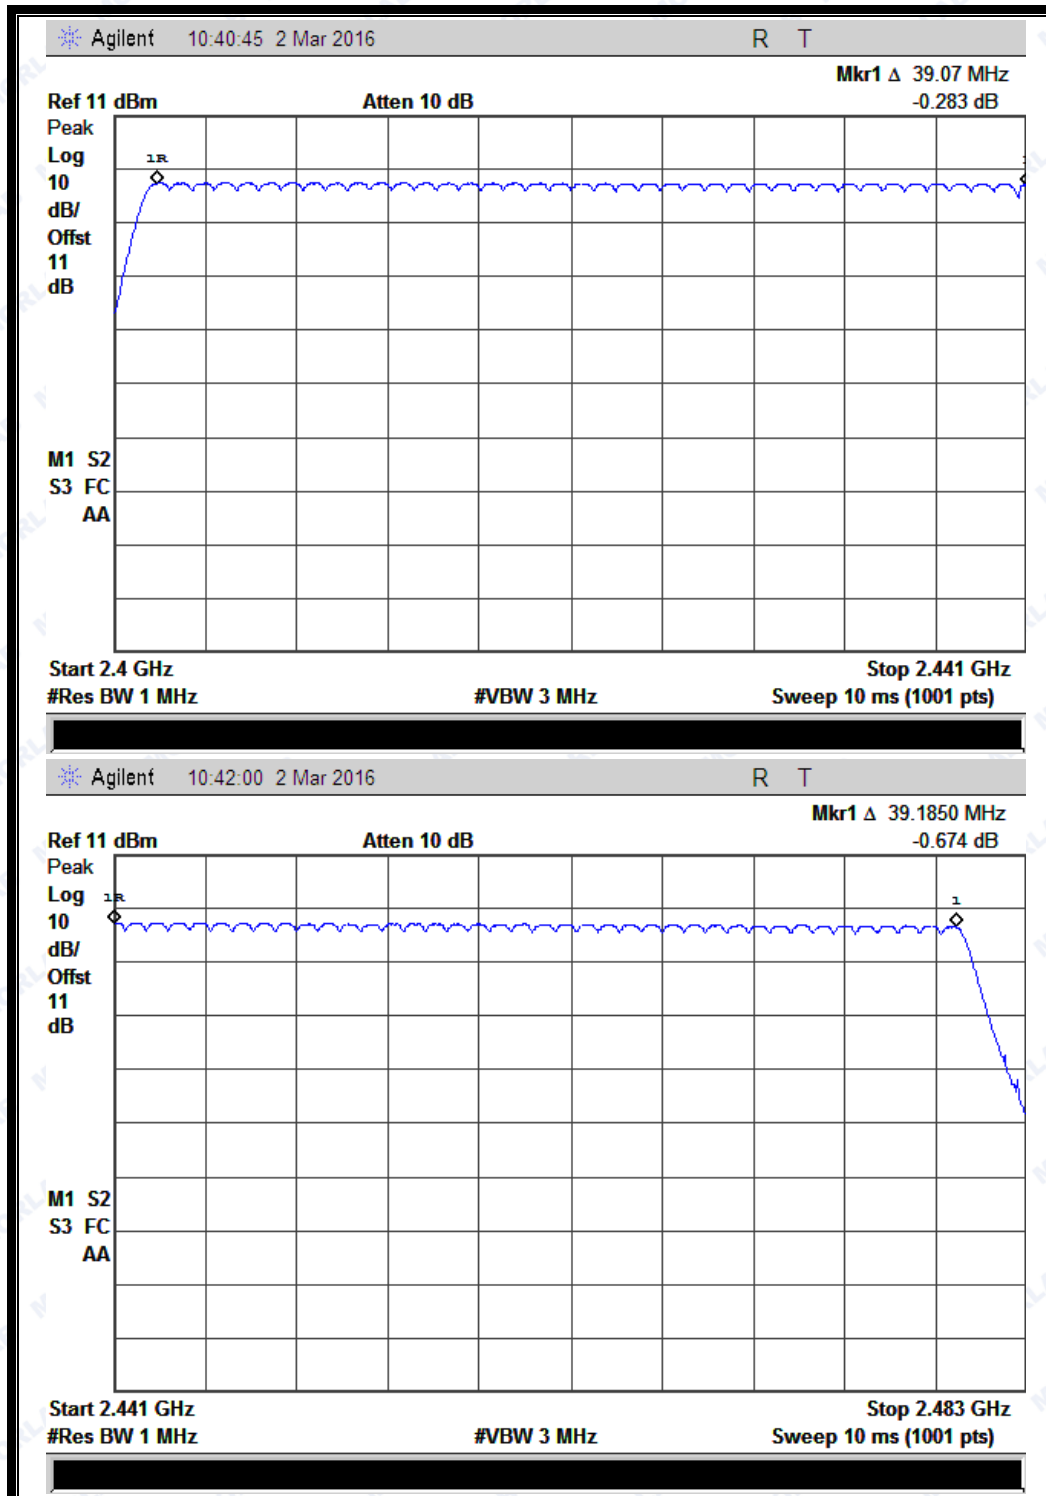

(Plot A: GFSK)


2.3 Peak Output Power

2.3.1 Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.3.2 Test Description

A. Test Setup:

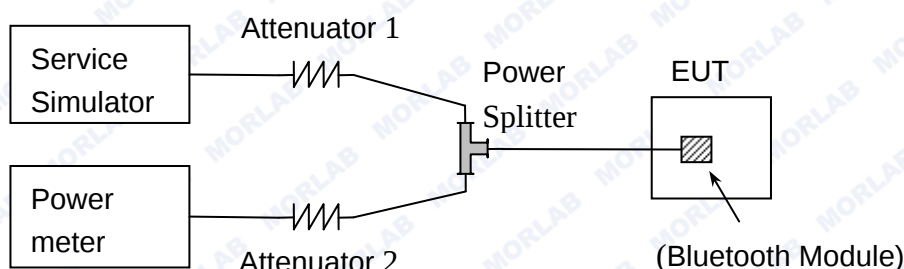

The Bluetooth Module of the EUT is coupled to the Power meter and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.4).

2.3.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the module. The lowest, middle and highest channel were tested by power meter.

2.3.3.1 GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	-1.67	0.00068	20.97	0.125	PASS
39	2441	-1.87	0.00065			PASS
78	2480	-2.54	0.00056			PASS


2.4 20dB Bandwidth

2.4.1 Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \times \log 1\% = 20\text{dB}$) taking the total RF output power.

2.4.2 Test Description

A. Test Setup:

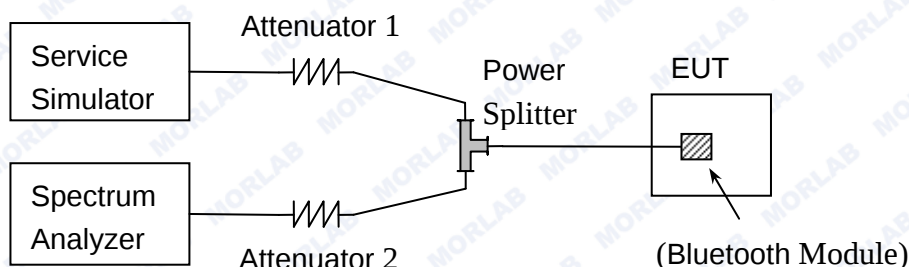

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.4).

2.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq 1\%$ of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.4.4 Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.




2.4.4.1 GFSK Mode

A. Test Verdict:

The maximum 20dB bandwidth measured is 0.9428MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	0.9393	Plot A
39	2441	0.9428	Plot B
78	2480	0.8621	Plot C


B. Test Plots:

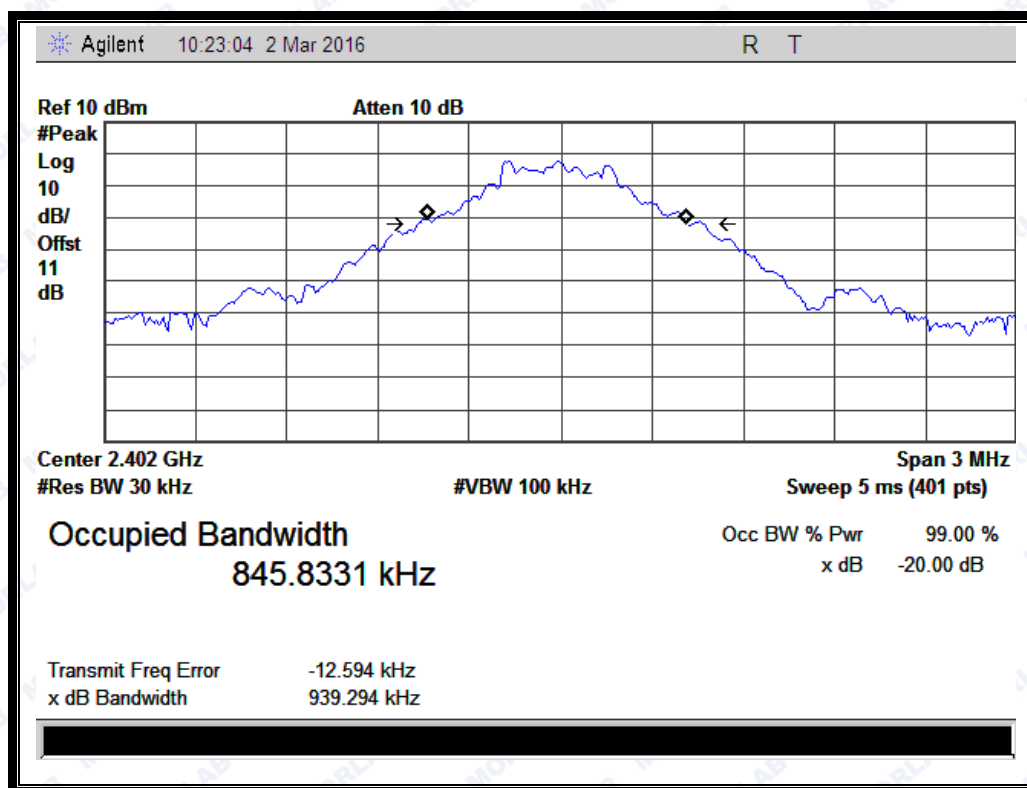


(Plot A: Channel = 2402 @ GFSK)



REPORT No.: SZ16020052W04

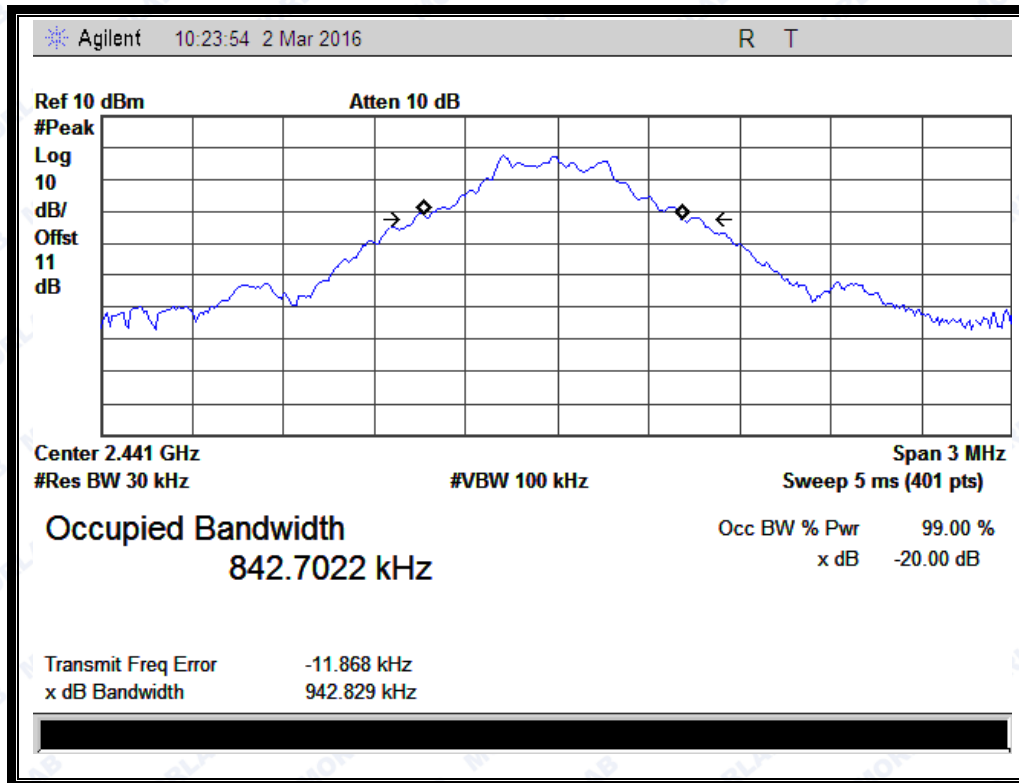

(Plot B: Channel = 2441 @ GFSK)

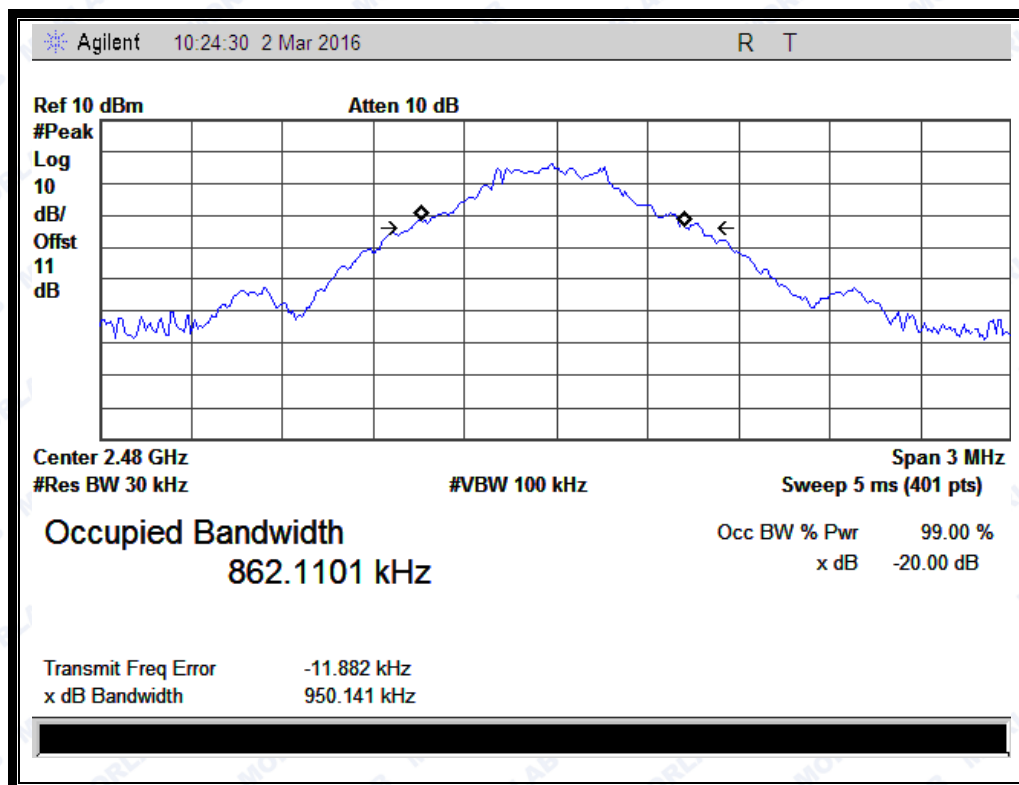

(Plot C: Channel = 2480 @ GFSK)


2.5 Carried Frequency Separation

2.5.1 Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

2.5.2 Test Description

A. Test Setup:

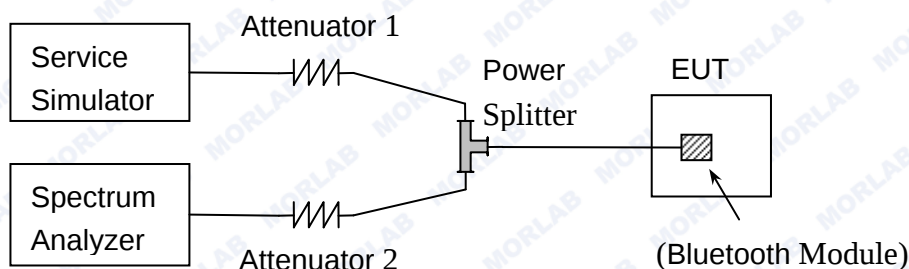

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.4).

2.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak


Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.



2.5.4 Test Result

The Bluetooth Module operates at hopping-on test mode. For any adjacent channels (e.g. the channel 39 and 40 as showed in the Plot A), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (refer to section 0), whichever is greater. So, the verdict is PASSING

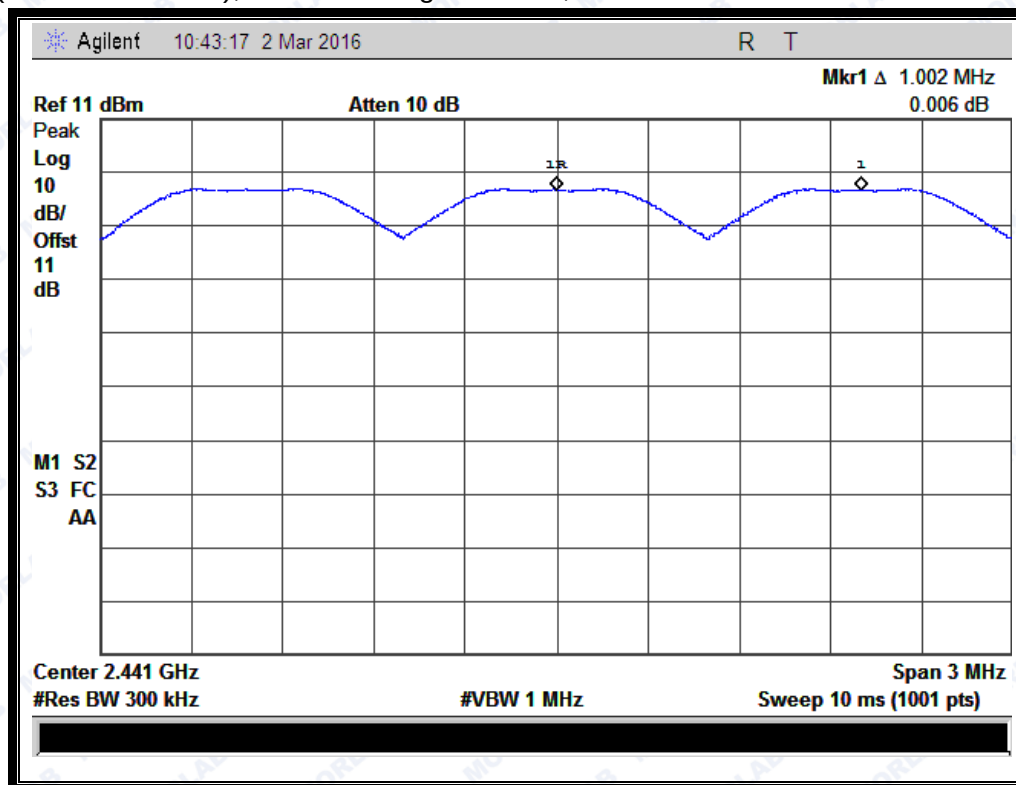

(Plot A: GFSK)


2.6 Time of Occupancy (Dwell time)

2.6.1 Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.6.2 Test Description

A. Test Setup:

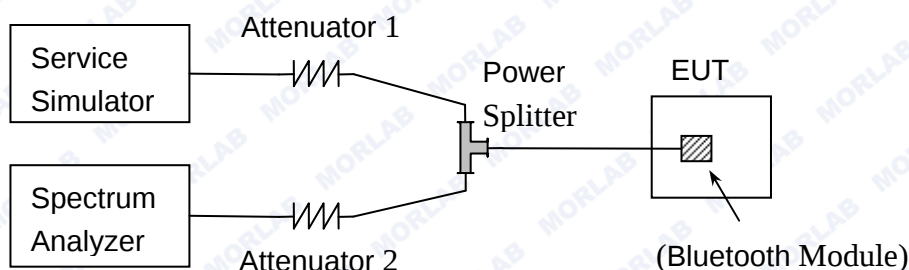

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.4).

2.6.3 Test Procedure

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channel * 0.4 s) is equal to $10 * (\# \text{ of pulses in 3.16 s}) * \text{pulse width}$.



REPORT No.: SZ16020052W04


2.6.4 Test Result

2.6.4.1 GFSK Mode

A. Test Verdict:


DH Packet	Pulse Width (msec)	Number of pulse in 3.16 seconds	Average Time of Occupancy in 3.16 seconds (sec)	Average Time of Occupancy in 31.6 seconds (sec)	Limit (sec)	Verdict
DH1	0.4	31	0.0124	0.124	0.4	PASS
DH3	1.65	17	0.0281	0.281		PASS
DH5	2.88	12	0.0346	0.346		PASS

B. Test Plots:

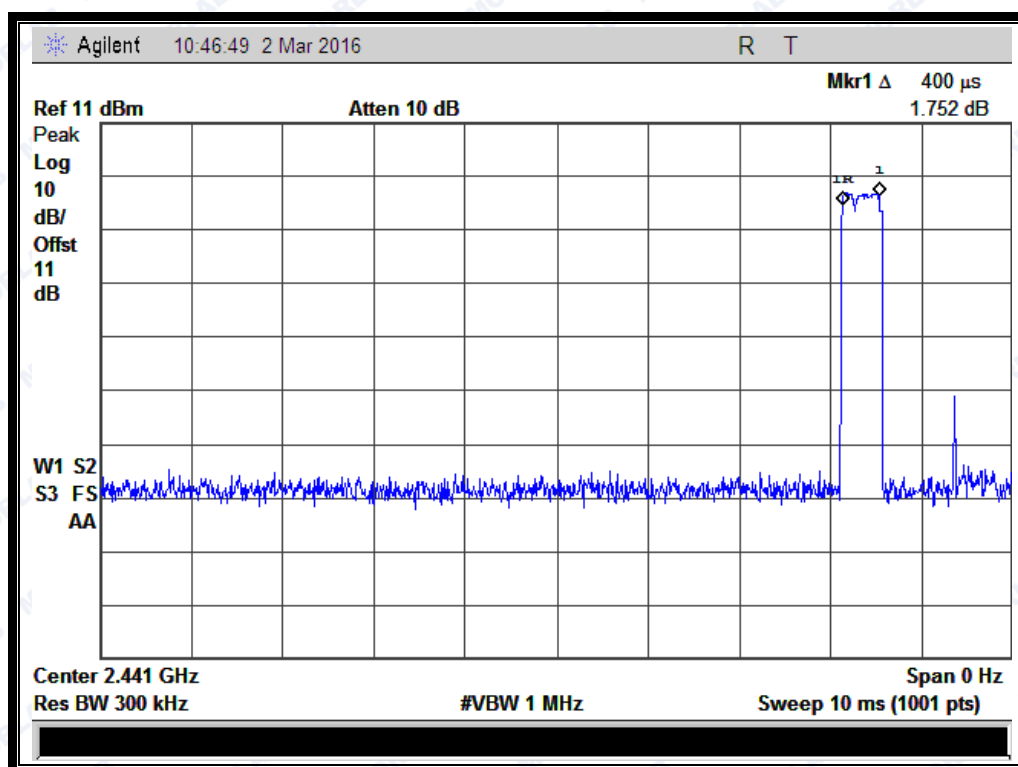




REPORT No.: SZ16020052W04

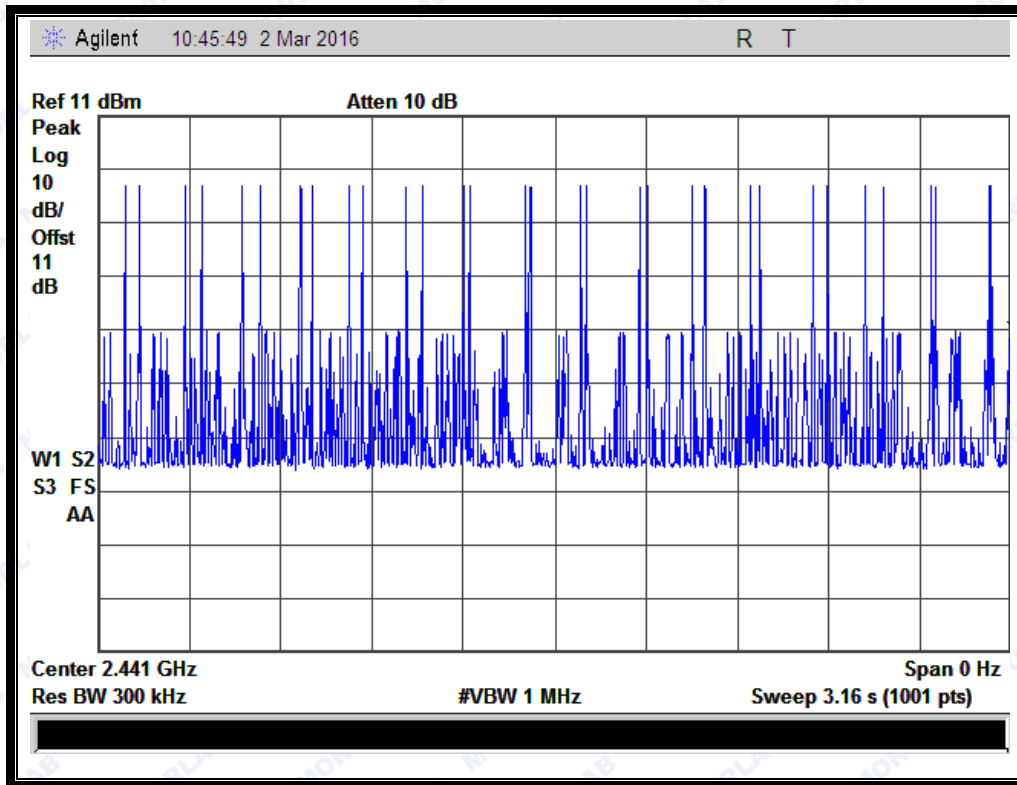


(Plot A: DH1 @ GFSK)

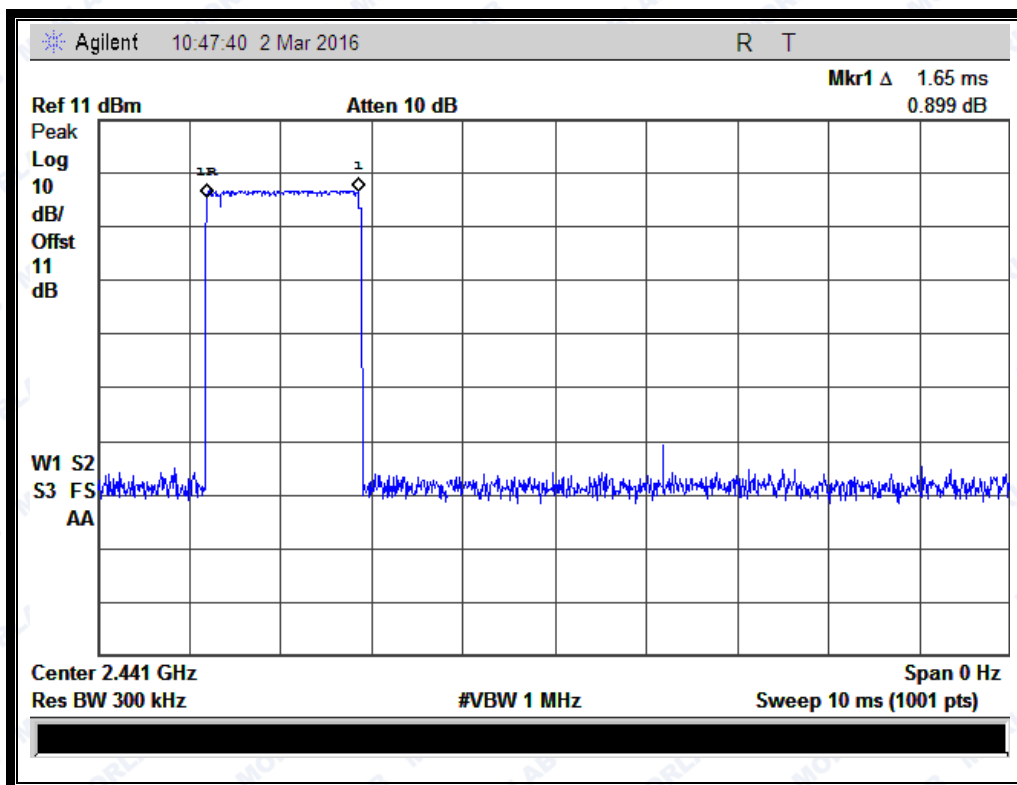




REPORT No.: SZ16020052W04

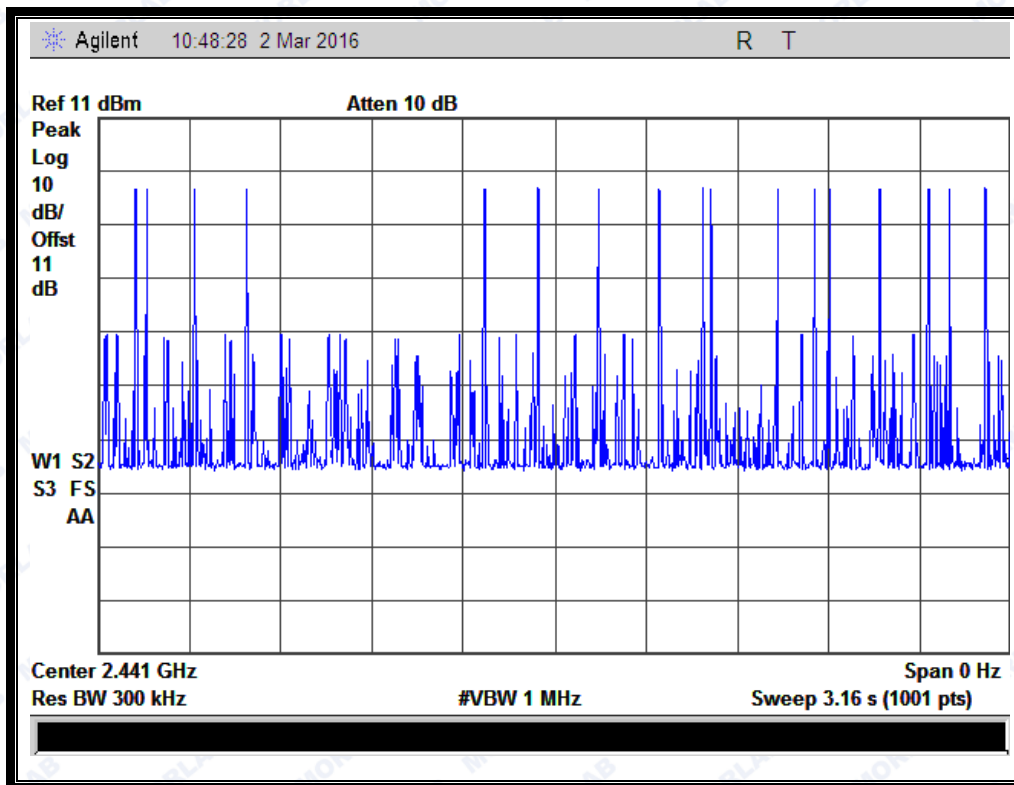


(Plot B: DH3 @ GFSK)

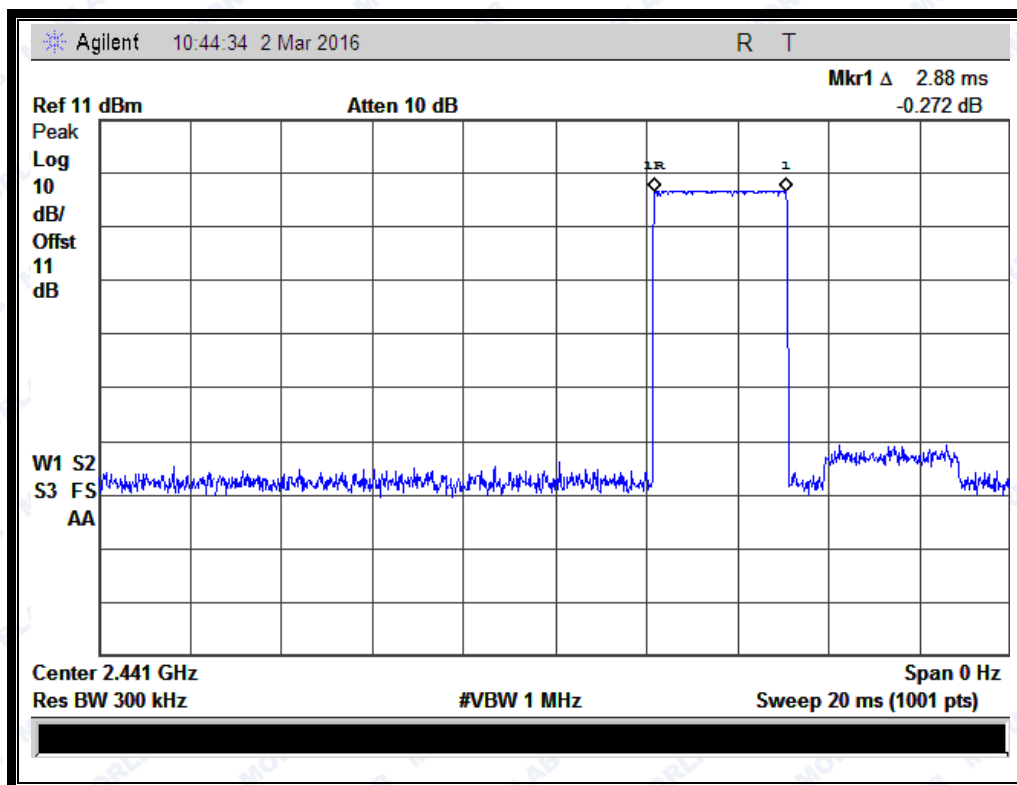



REPORT No.: SZ16020052W04

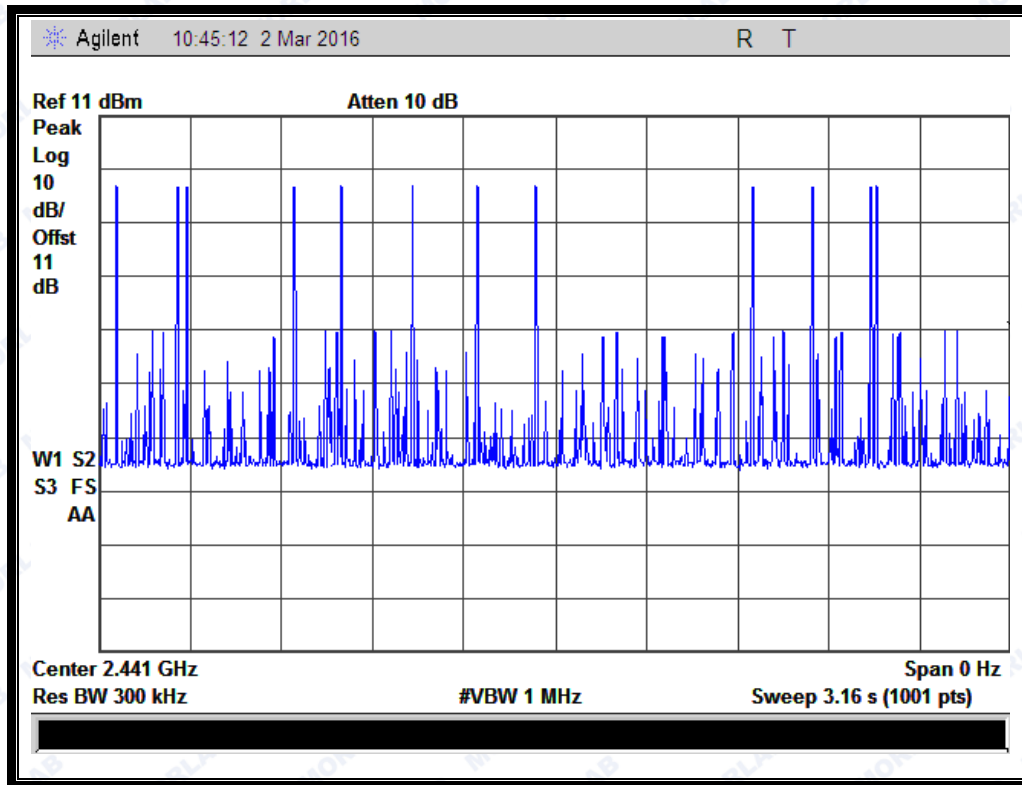

(Plot C: DH5 @ GFSK)


2.7 Conducted Spurious Emissions

2.7.1 Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.7.2 Test Description

A. Test Setup:

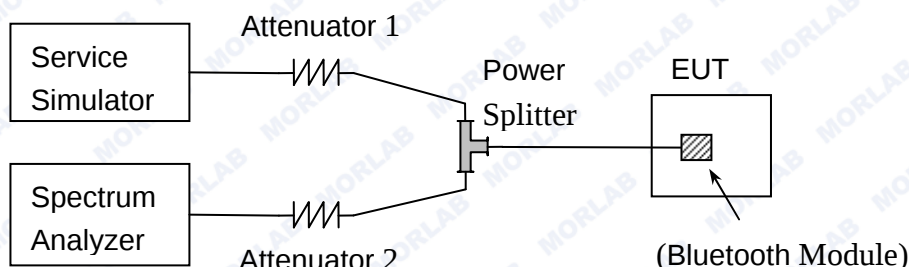

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.4).

2.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.



2.7.4 Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


2.7.4.1 GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-51.58	Plot A.1	-2.09	-22.08	PASS
39	2441	-52.58	Plot B.1	-2.49	-22.49	PASS
78	2480	-50.86	Plot C.1	-3.13	-23.13	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

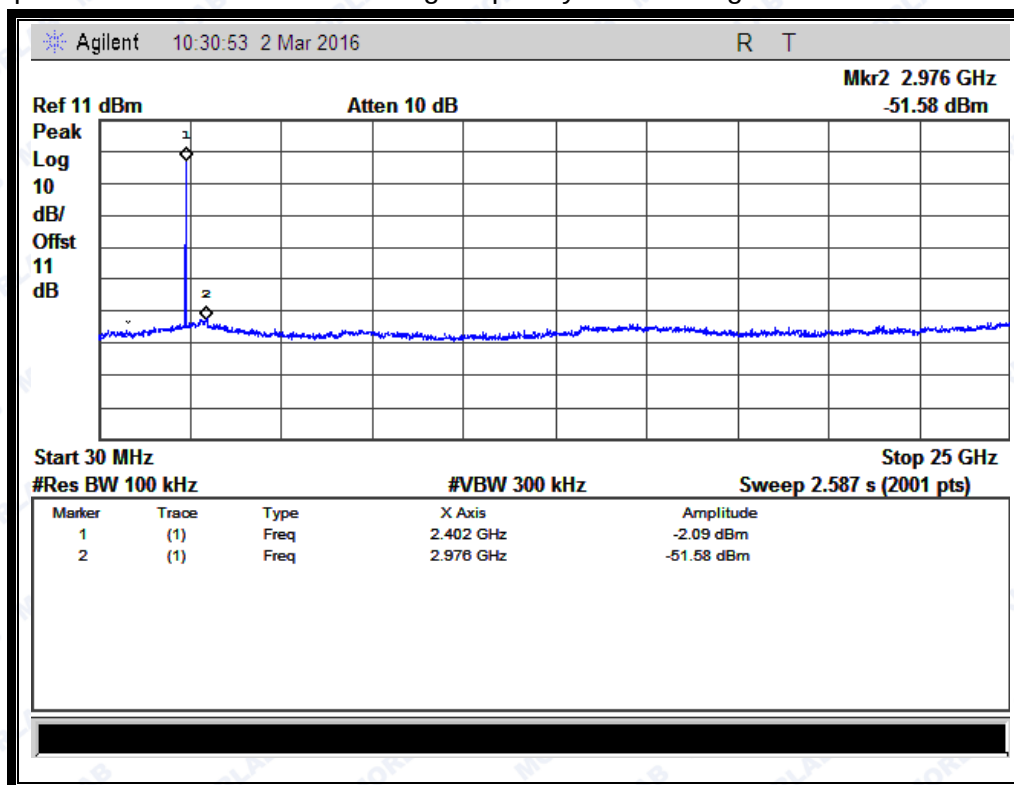


(Plot A.1: Channel = 0, 30MHz to 25GHz @ GFSK Mode)



REPORT No.: SZ16020052W04

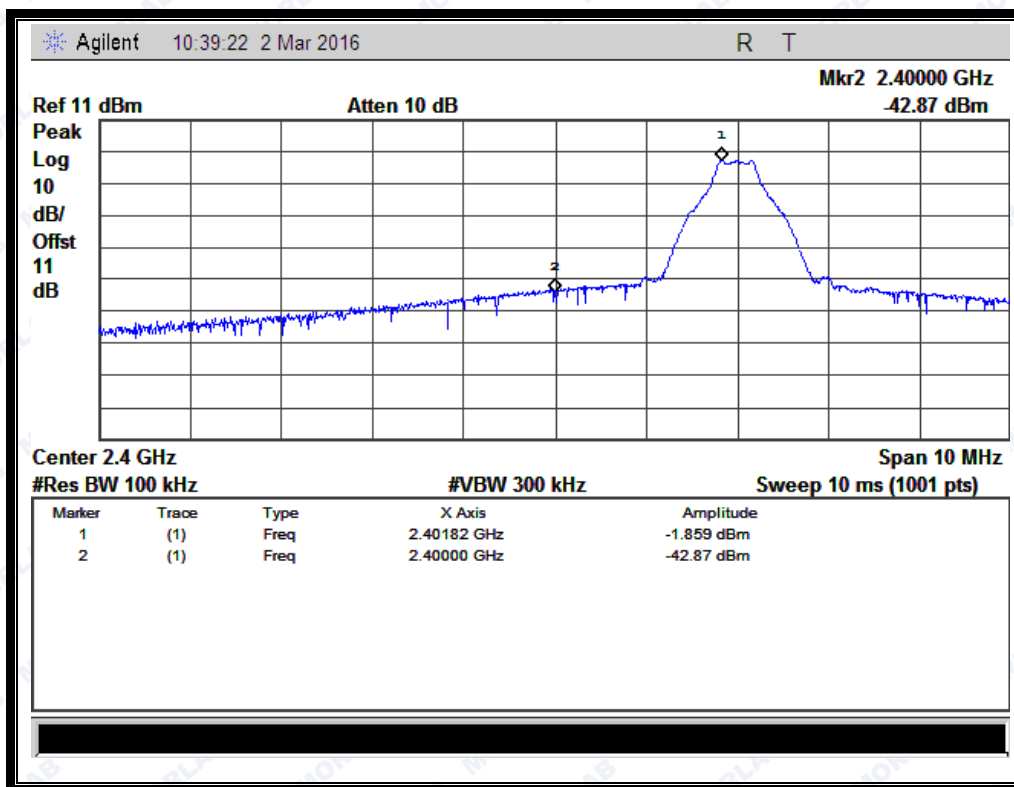


(Channel = 0, Band edge @ GFSK Mode)

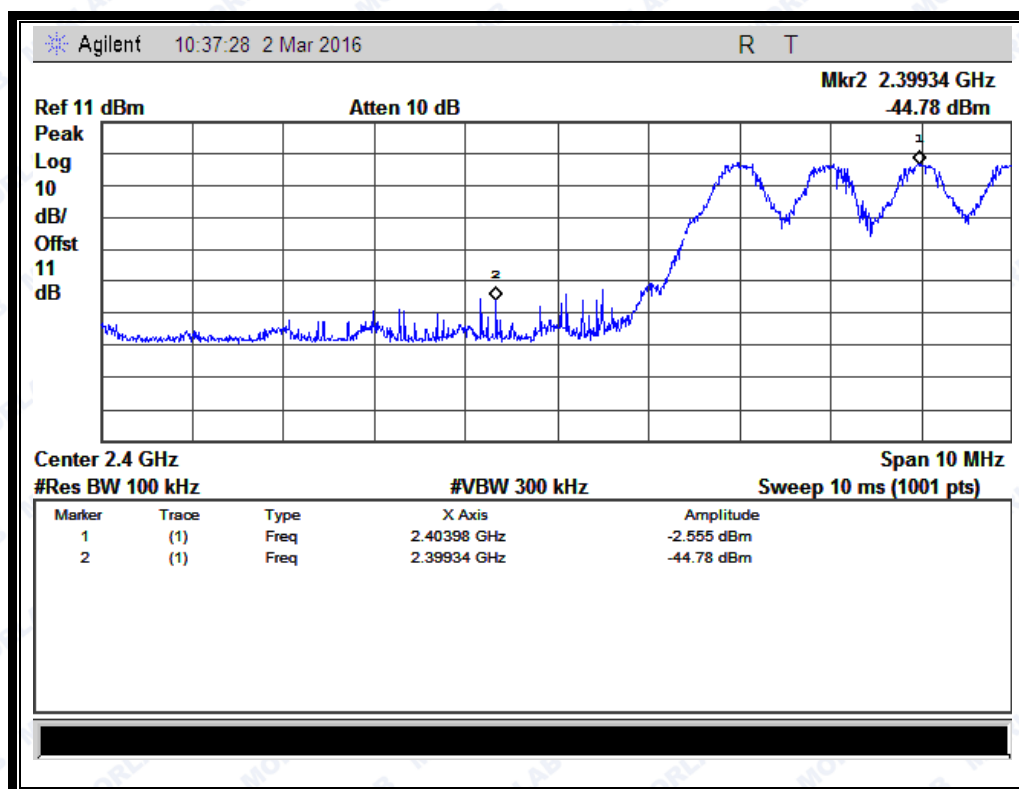


(Channel = 0, Band edge with hopping on @ GFSK Mode)



REPORT No.: SZ16020052W04

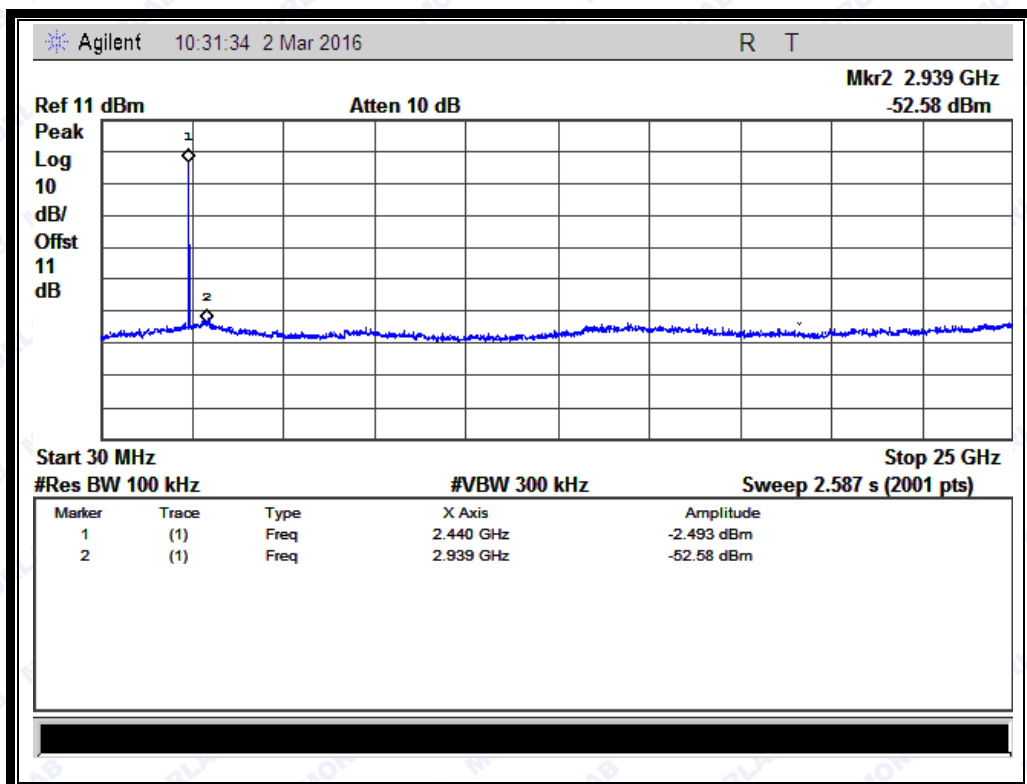


(Plot B.1: Channel = 39, 30MHz to 25GHz @ GFSK Mode)

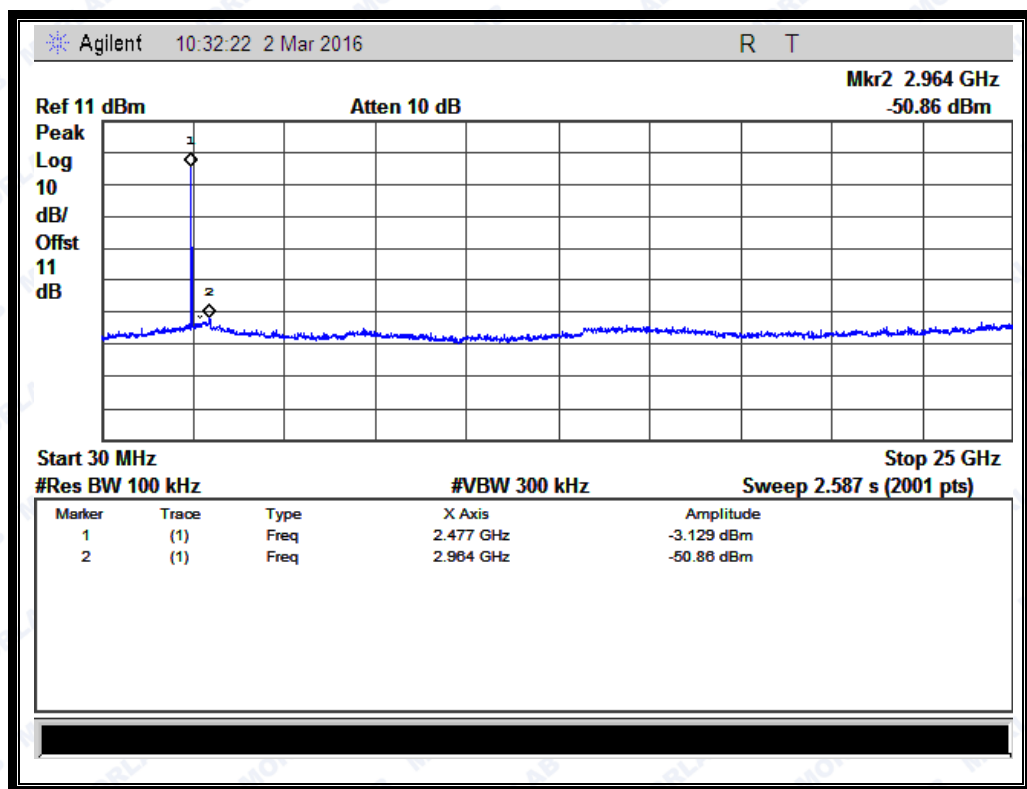


(Plot C.1: Channel = 78, 30MHz to 25GHz @ GFSK Mode)



REPORT No.: SZ16020052W04

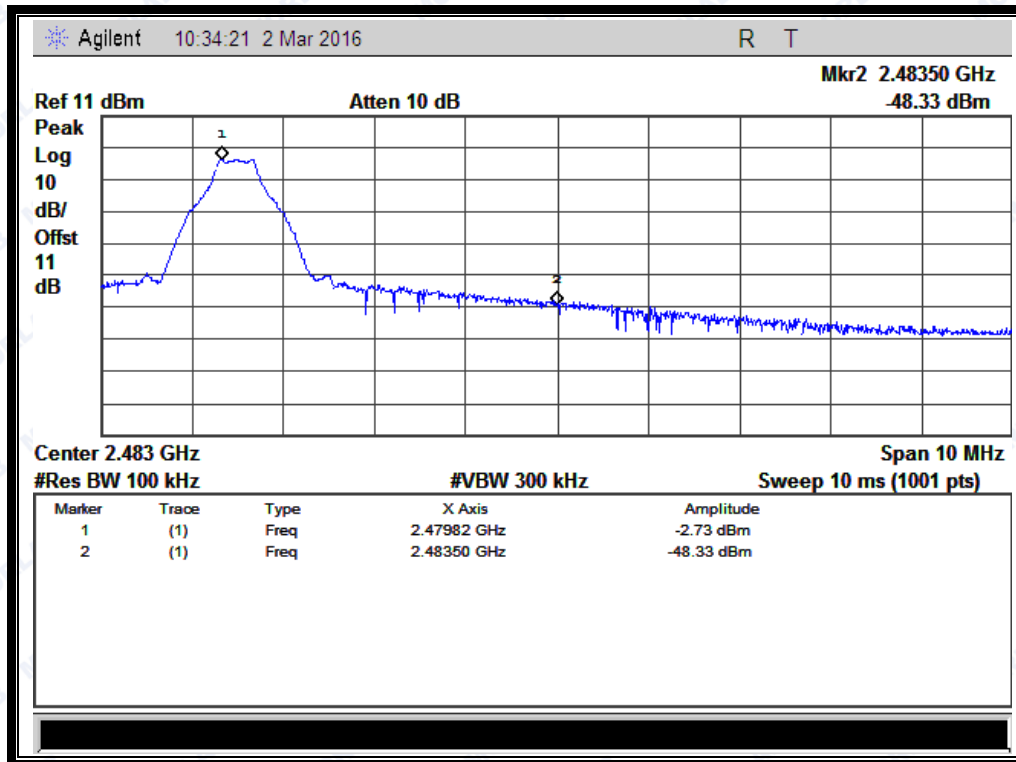

(Channel = 78, Band edge @ GFSK Mode)

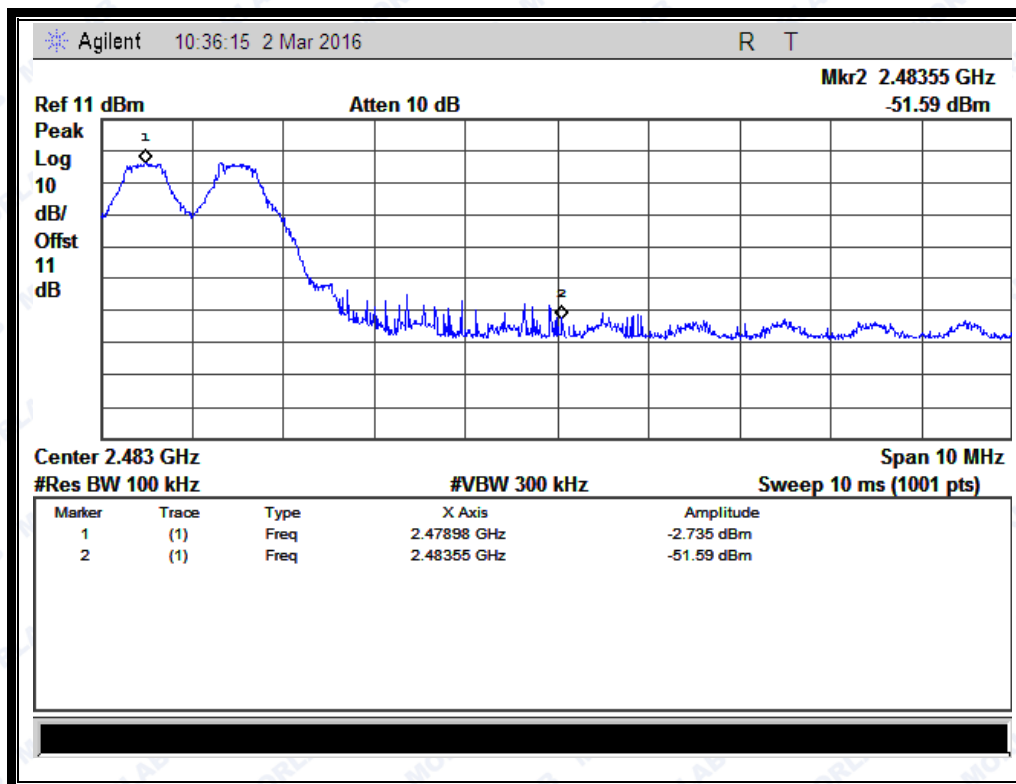

(Channel = 78, Band edge with hopping on @ GFSK Mode)


2.8 Restricted Frequency Bands

2.8.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.8.2 Test Description

A. Test Setup:

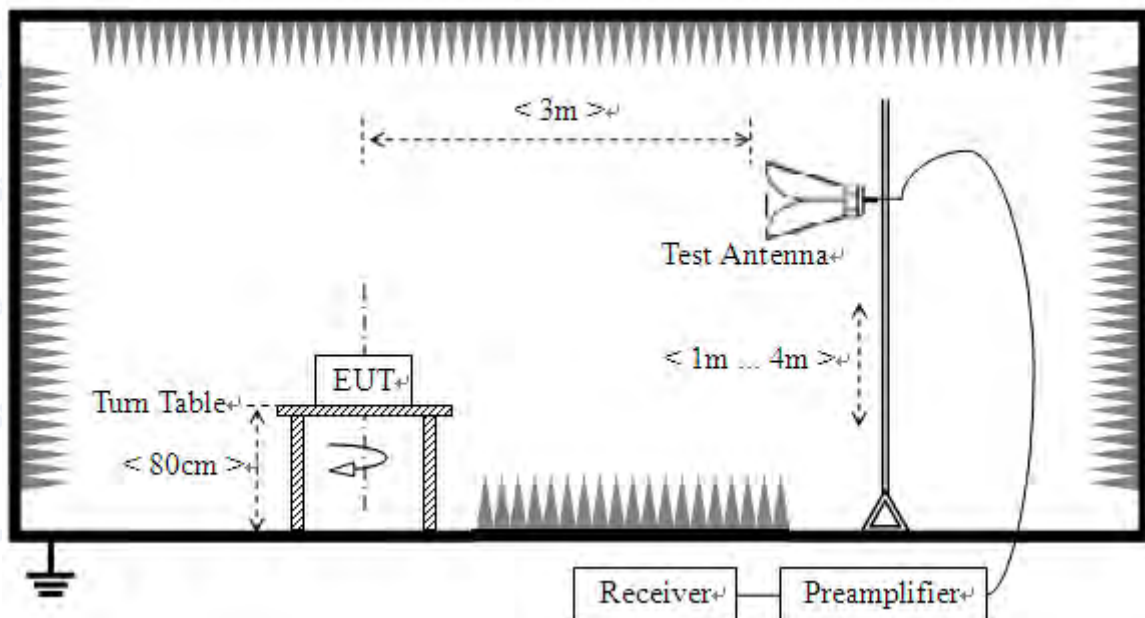

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

**B. Equipments List:**

Please reference ANNEX A(1.4).

2.8.3 Test Procedure

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 KHz for $f < 1\text{GHz}$

VBW = 3 MHz for peak and 10Hz for average

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

2.8.4 Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

AT: Total correction Factor except Antenna

UR: Receiver Reading

Gpreamp: Preamplifier Gain

AFactor: Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

2.8.4.1 GFSK Mode**A. Test Verdict:**


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2378.46	PK	42.69	-33.63	32.56	41.62	74	Pass
0	2372.47	AV	33.07	-33.63	32.56	32.00	54	Pass
78	2483.94	PK	45.59	-33.18	32.5	44.91	74	Pass
78	2485.74	AV	33.11	-33.18	32.5	32.43	54	Pass



B. Test Plots:

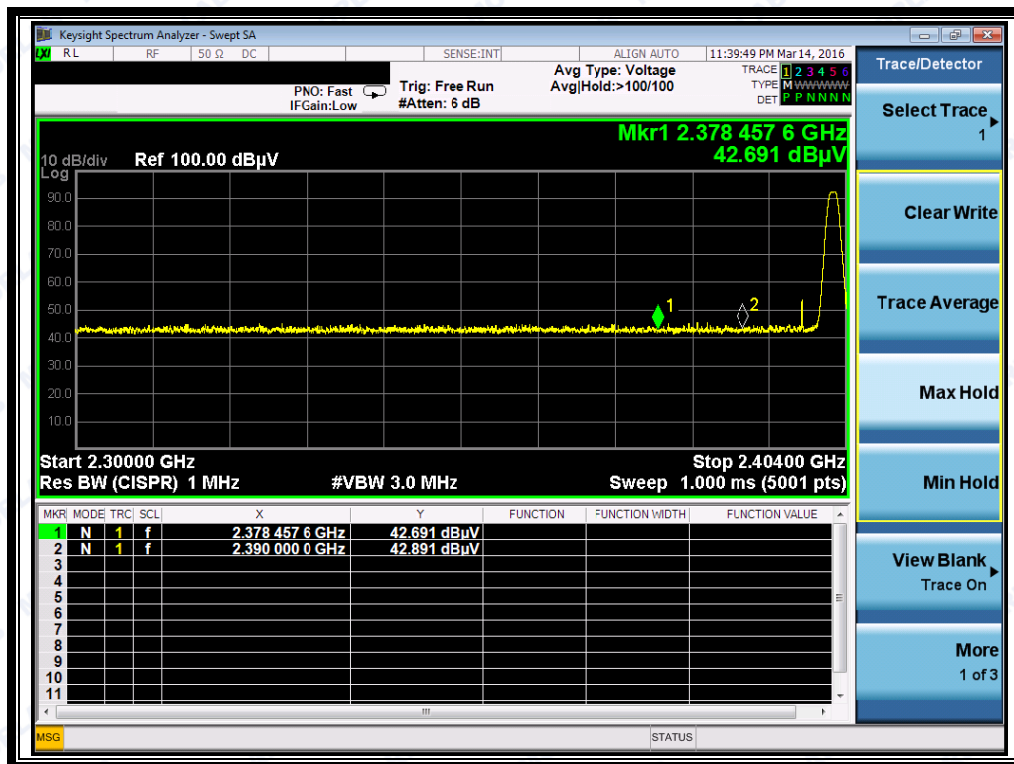


(Plot A1: Channel = 0 PEAK @ GFSK)

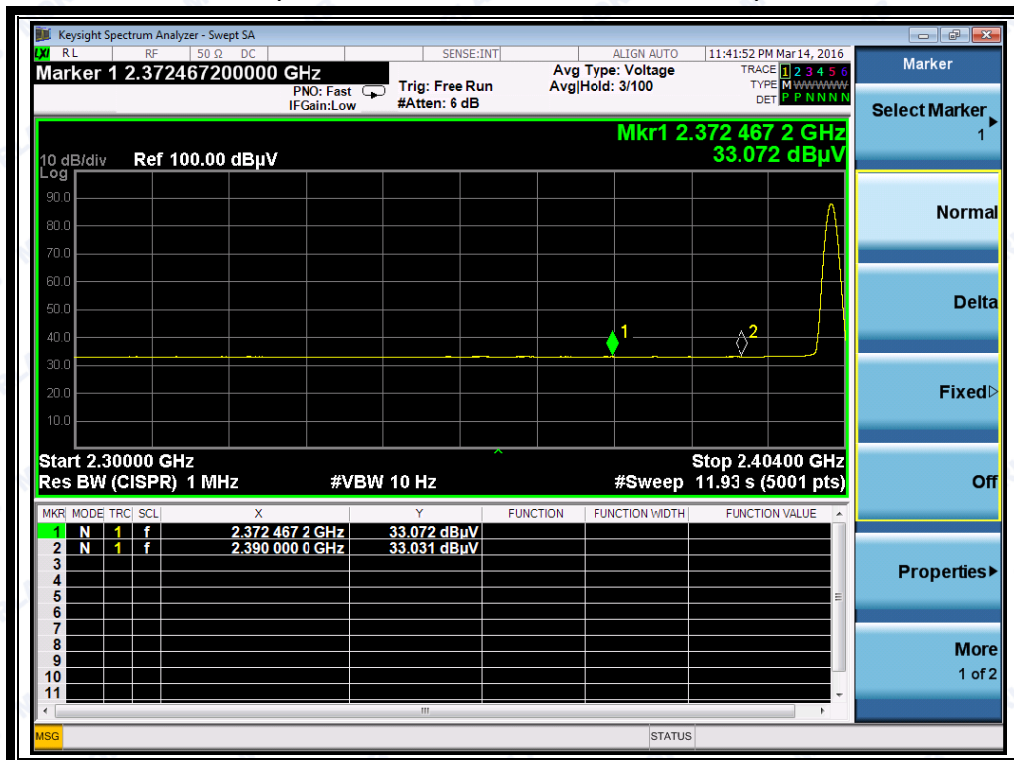


(Plot A2: Channel = 0 AVERAGE @ GFSK)



REPORT No.: SZ16020052W04

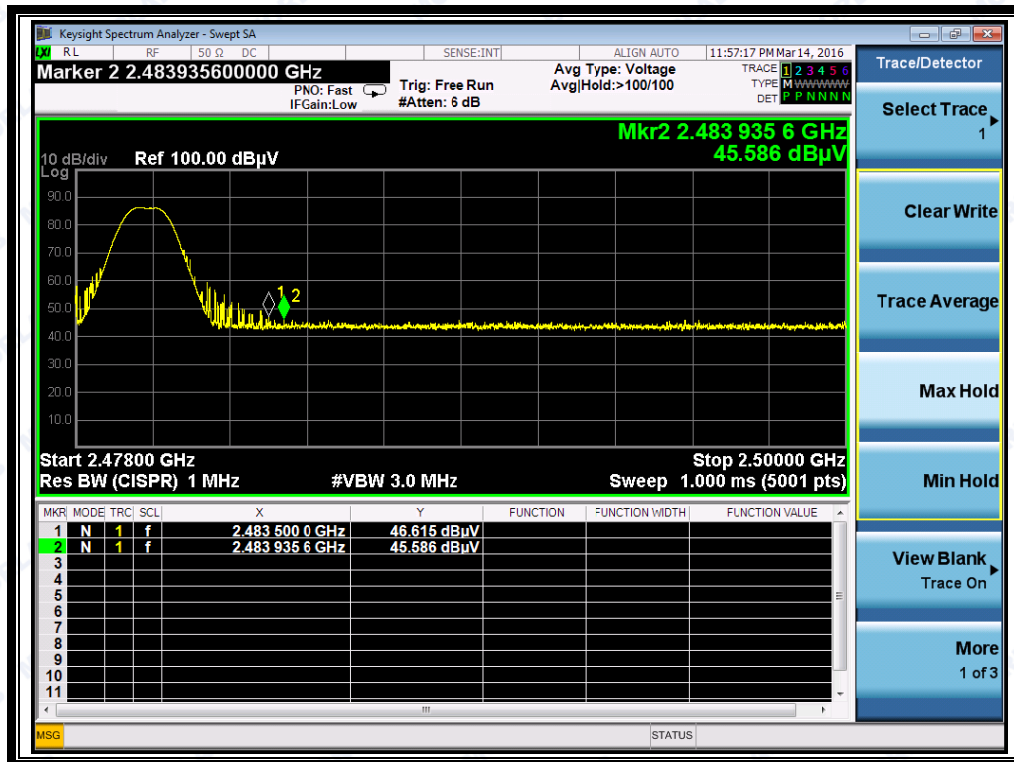

(Plot B1: Channel = 78 PEAK @ GFSK)

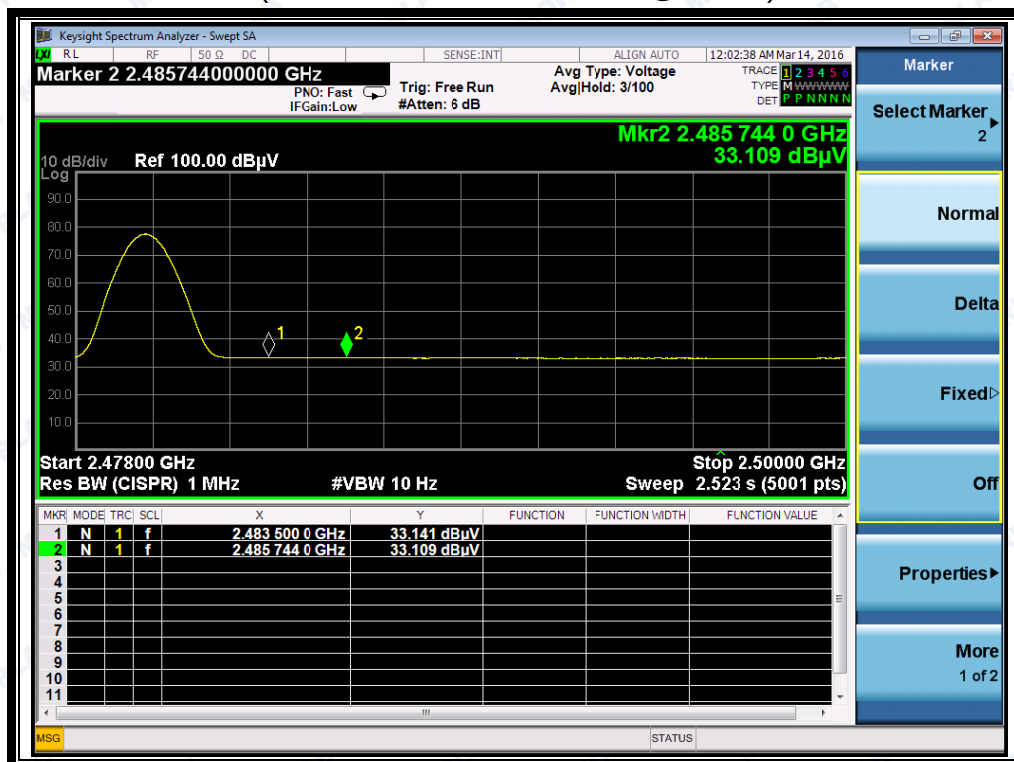

(Plot B2: Channel = 78 AVERAGE @ GFSK)



2.9 Radiated Emission

2.9.1 Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.10.2 Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

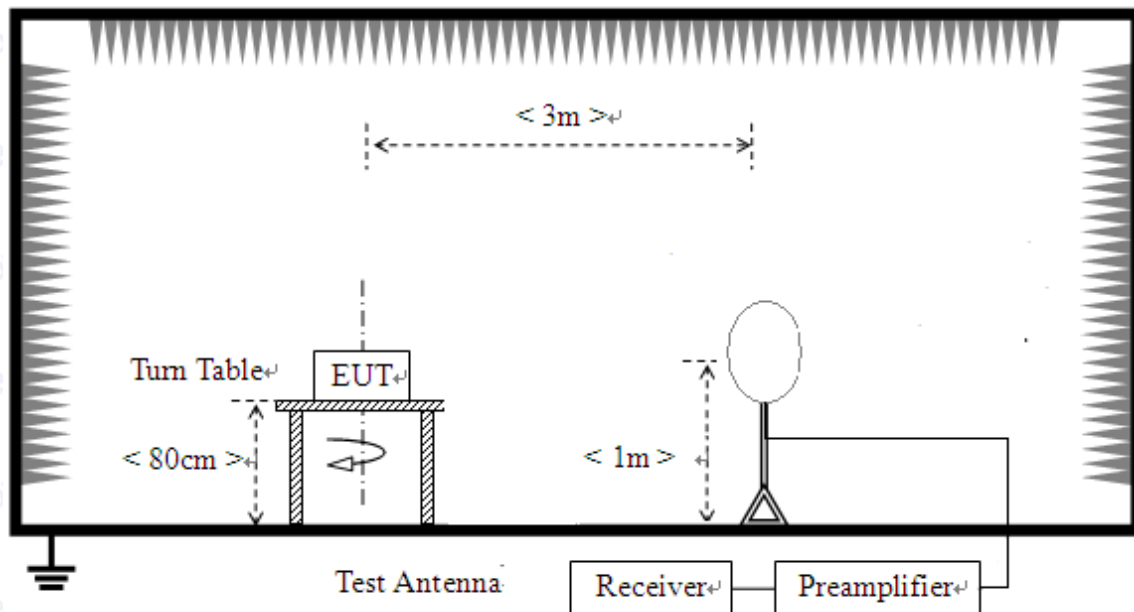

- 2) For radiated emissions from 30MHz to 1GHz

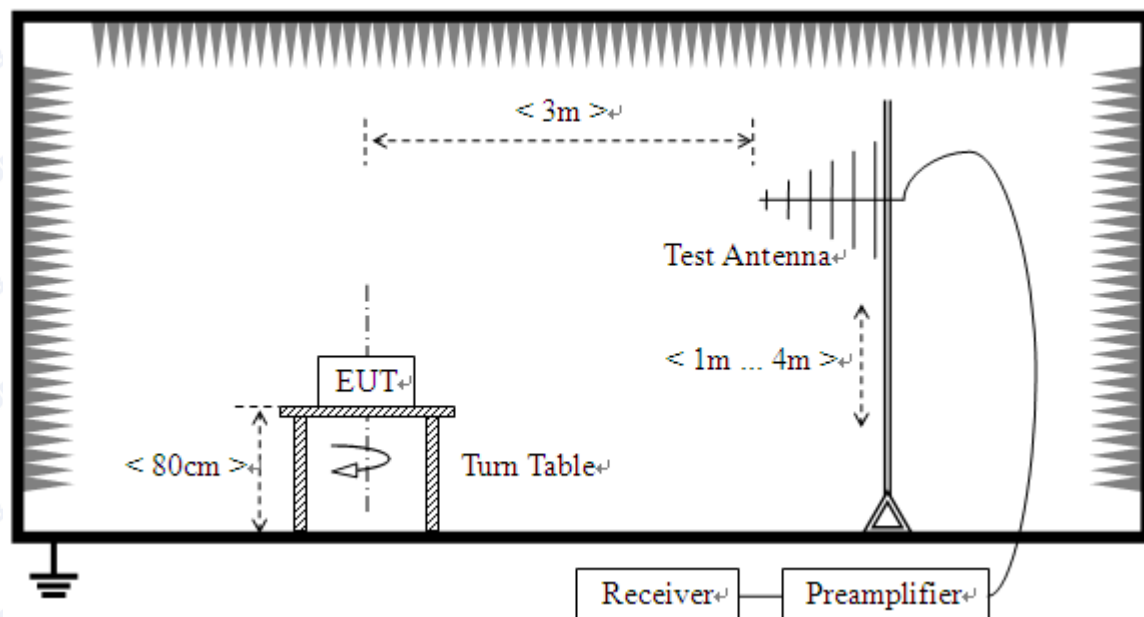

3) For radiated emissions above 1GHz

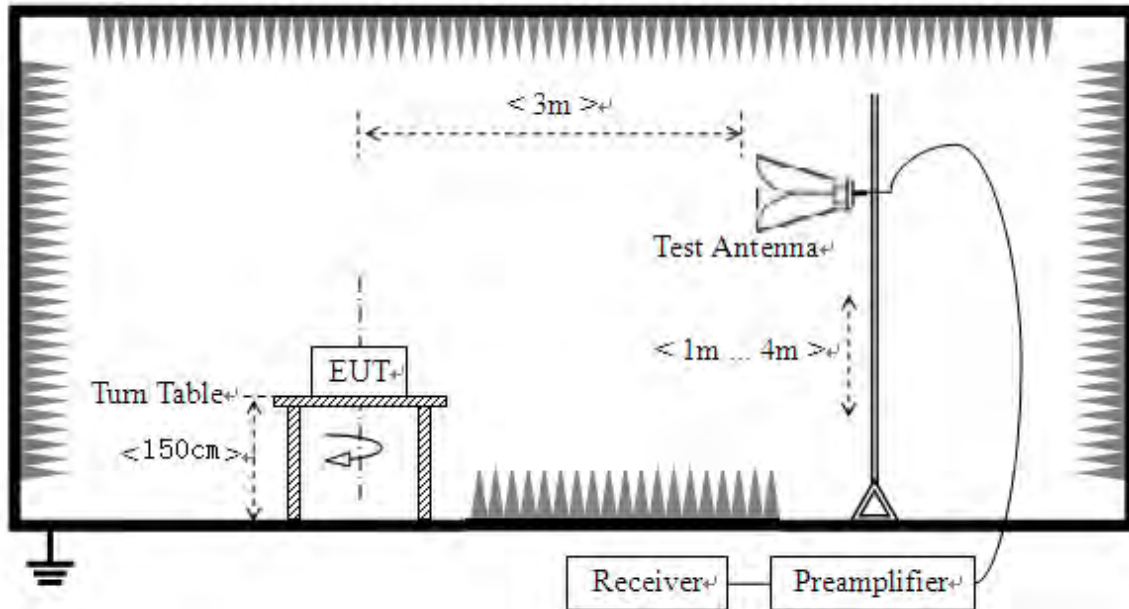

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

**B. Equipments List:**

Please reference ANNEX A(1.4).

2.10.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.10.4 Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading


G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

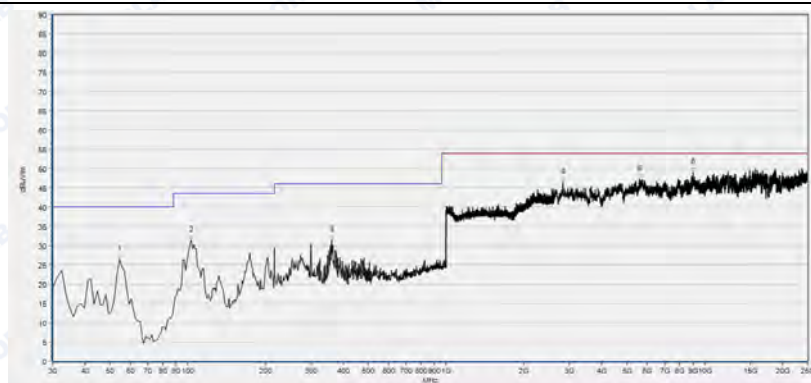**2.10.4.1 GFSK Mode:****A. Test Plots for the Whole Measurement Frequency Range:**Plots for Channel = 0

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
54.280	26.46	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
102.841	31.42	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
360.213	31.47	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2824.041	46.42	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
5581.779	47.25	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
9007.565	49.15	N.A	44.22	74.0	N.A	54.0	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 0)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
53.066	33.32	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
107.697	34.17	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
475.544	28.05	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2295.238	42.91	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5683.615	47.97	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
11814.184	48.91	N.A	47.51	74.0	N.A	54.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ GFSK, channel 0)



Plot for Channel = 39



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
54.280	26.91	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
107.697	26.42	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
363.855	35.86	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
3655.028	46.00	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
10836.552	48.85	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
16136.134	49.59	N.A	40.33	74.0	N.A	54.0	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 39)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
53.066	36.91	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
107.697	33.91	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
400.275	30.66	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
1941.817	43.23	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5589.925	46.84	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
16103.546	49.41	N.A	43.45	74.0	N.A	54.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ GFSK, channel 39)




REPORT No.: SZ16020052W04

Plot for Channel = 78



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
54.280	26.68	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
107.697	29.01	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
360.213	35.90	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
1942.457	42.98	N.A	40.50	74.0	N.A	54.0	Horizontal	PASS
5606.219	46.88	N.A	41.78	74.0	N.A	54.0	Horizontal	PASS
15386.616	48.99	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 78)

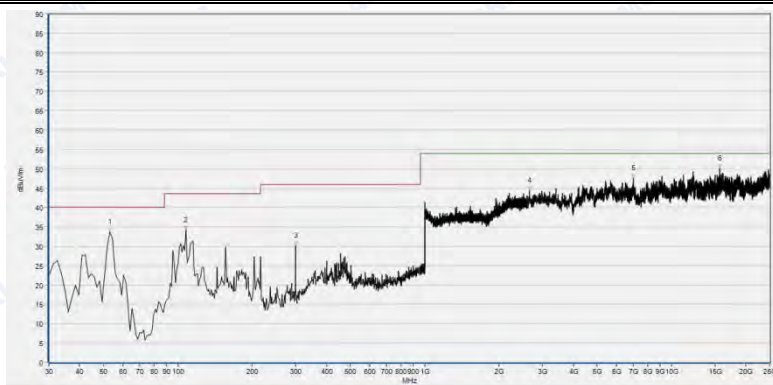

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
53.066	33.72	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
107.697	34.21	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
299.512	30.20	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2652.955	44.33	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
7007.492	47.68	N.A	43.85	74.0	N.A	54.0	Vertical	PASS
15688.052	50.04	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ GFSK, channel 78)



ANNEX A GENERAL INFORMATION

1.1 Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

1.3 Facilities and Accreditations

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10 2013 and CISPR Publication 22; the FCC registration number is 695796.

1.4 Maximum measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Measurements	Frequency	Uncertainty
Conducted emissions	9KHz~30MHz	2.44dB
Radiated emissions	30MHz~200MHz	2.93
	200MHz~1000MHz	2.95
	1GHz~18GHz	2.26
	18GHz~40GHz	1.94



REPORT No.: SZ16020052W04

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$

1.5 Test Equipments Utilized

1.5.1 Conducted Test Equipments

Conducted Test Equipment

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Spectrum Analyzer	MY45101810	E4407B	Agilent	2015.03.28	2016.03.27
2	USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2015.03.28	2016.03.27
3	EXA Signal Analyzer	MY53470838	N9010A	Agilent	2015.08.26	2016.08.25
4	RF cable	CB01	RF01	Morlab	N/A	N/A
5	Attenuator	(n.a.)	10dB	Resnet	N/A	N/A
6	SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
7	System Simulator	6K00006210	MT8852B	Anritsu	2015.03.28	2016.03.27

1.5.2 Conducted Emission Test Equipments

Conducted Emission Test Equipments

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Receiver	595WX11007	PMM9010	Narda S.T.S/PMM	2015.05.07	2016.05.06
2	LISN	812744	NSLK 8127	Schwarzbeck	2015.06.18	2016.06.17
3	Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2015.05.07	2016.05.06
4	Coaxial cable(BNC)	CB01	EMC01	Morlab	N/A	N/A

1.5.3 Auxiliary Test Equipment

Auxiliary Test Equipment

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Computer	N.A	N.A	Asus	N.A	N.A



REPORT No.: SZ16020052W04

1.5.4 Radiated Test Equipments**Radiated Test Equipments**

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due Date
1	System Simulator	GB4536084 6	8960-E5515 C	Agilent	2015.05.07	2016.05.06
2	Receiver	MY5413001 6	N9038A	Agilent	2015.05.07	2016.05.06
3	Test Antenna - Bi-Log	N/A	VULB9163	Schwarzbeck	2015.05.14	2016.05.13
4	Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2015.03.31	2016.03.30
5	Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2015.03.26	2016.03.25
6	Test Antenna - Horn	71688	BBHA 9120D	Schwarzbeck	2015.03.26	2016.03.25
7	Coaxial cable(N male)	CB02	EMC02	Morlab	N/A	N/A
8	Coaxial cable(N male)	CB03	EMC03	Morlab	N/A	N/A
9	1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde&Schwarz	2015.03.26	2016.03.25
10	18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde&Schwarz	2015.03.26	2016.03.25

1.5.5 Climate Chamber**Climate Chamber**

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Climate Chamber	2004012	HL4003T	Yinhe	2015.03.26	2016.03.25

1.5.6 Vibration Table**Vibration Table**

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Vibration Table	N/A	ACT2000- S015L	CMI-COM	2015.03.26	2016.03.25

1.5.7 Anechoic Chamber**Anechoic Chamber**

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	Changning	2015.05.14	2016.05.13

***** END OF REPORT *****