

FCC PART 27
FCC PART 22H, PART 24E
MEASUREMENT AND TEST REPORT

For

DDM Brands LLC

1616 NW, 84TH Ave. Miami, Florida, U.S.A 33126

FCC ID: A4JANDY55MVR

Report Type: Original Report	Product Type: 4G mobile phone
Test Engineer: Haiguo Li	<i>Haiguo Li</i>
Report Number: RSZ151228006-00D	
Report Date: 2016-01-27	
Reviewed By: RF Engineer	<i>Bell Hu</i>
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §1.1307(B) & §2.1093 - RF EXPOSURE INFORMATION.....	8
APPLICABLE STANDARD	8
TEST RESULT	8
FCC §2.1047 - MODULATION CHARACTERISTIC	9
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) & § 27.50 - RF OUTPUT POWER.....	10
APPLICABLE STANDARDS.....	10
TEST PROCEDURE	10
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST DATA	11
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH.....	34
APPLICABLE STANDARDS.....	34
TEST PROCEDURE	34
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA	35
FCC §2.1051, §22.917(A) & §24.238(A) & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS ..	81
APPLICABLE STANDARDS.....	81
TEST PROCEDURE	81
TEST EQUIPMENT LIST AND DETAILS.....	81
TEST DATA	82
FCC §2.1053, §22.917 & §24.238 & §27.53 - SPURIOUS RADIATED EMISSIONS	114
APPLICABLE STANDARDS.....	114
TEST PROCEDURE	114
TEST EQUIPMENT LIST AND DETAILS.....	115
TEST DATA	115
FCC §22.917(A) & §24.238(A) & §27.53 - BAND EDGES.....	119
APPLICABLE STANDARDS.....	119
TEST PROCEDURE	119
TEST EQUIPMENT LIST AND DETAILS.....	120
TEST DATA	120
FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY.....	167

APPLICABLE STANDARDS.....167

TEST PROCEDURE167

TEST EQUIPMENT LIST AND DETAILS.....168

TEST DATA168

PRODUCT SIMILARITY DECLARATION LETTER174

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The DDM Brands LLC's product, model number: AM55MLVR194 (FCC ID: A4JANDY55MVR) or the "EUT" in this report was a 4G mobile phone, which was measured approximately: 156 mm (L) × 78 mm (W) × 7 mm (H), rated with input voltage: DC 3.7V rechargeable Li-ion battery or DC 5.0V from adapter.

Adapter Information:

Model: UA2-L3C1-011A3-R

Input AC: 100-240V, 50/60Hz, 0.15A

Output DC: 5.0V, 1A

Note: The series product, model ANDY 5.5M LTE VR, ANDY 5.5ML LTE VR, ANDY C5.5ML LTE VR, AC55MLVR194 and AM55MLVR194 are identical schematics, they are just different from model number due to marketing purposes. Model AM55MLVR194 was selected for fully testing. The detail was explained in the attached product similarity declaration letter provided and guaranteed by applicant.

**All measurement and test data in this report was gathered from production sample serial number: 1507546 (Assigned by Shenzhen BACL). The EUT supplied by the applicant was received on 2015-12-28.*

Objective

This type approval report is prepared on behalf of DDM Brands LLC in accordance with Part 2, Part 22-Subpart H, Part 24-Subpart E and Part 27 of the Federal Communication Commission's rules.

The objective is to determine the compliance of EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP, Part 15.247 DSS & DTS submissions with FCC ID: A4JANDY55MVR.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-Part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.81 dB for 30MHz-1GHz and 4.88 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on October 31, 2103. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D.
The final qualification test was performed with the EUT operating at normal mode.


Equipment Modifications

No modifications were made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.002K50
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891

Block Diagram of Test Setup

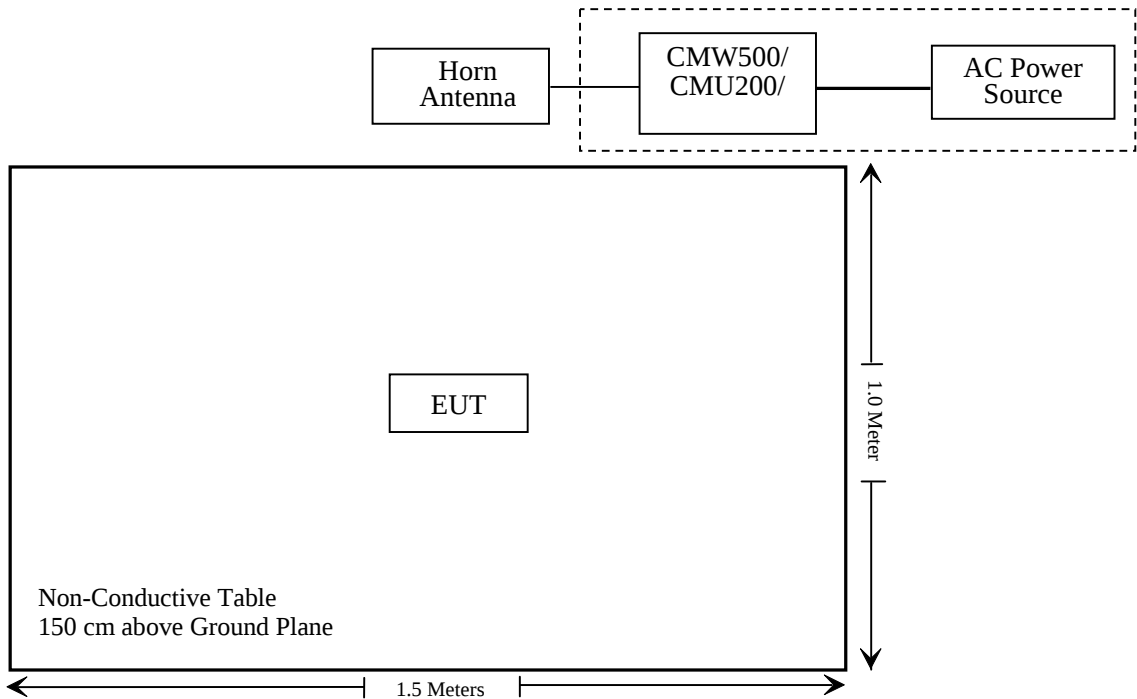

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b)(1), §2.1093	RF Exposure Information	Compliance*
§2.1046; § 22.913 (a); § 24.232 (c); §27.50 (d) (i)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53 (c)	Occupied Bandwidth	Compliance
§ 2.1051; § 22.917 (a); § 24.238 (a); §27.53(c) (g)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (c) (g)	Spurious Radiated Emissions	Compliance
§ 22.917 (a); § 24.238 (a); §27.53 (c) (g);	Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235; §27.54;	Frequency stability	Compliance

Note: * Please refer to SAR report released by BACL, report number: RSZ151228006-20.

FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC§1.1307, §2.1093.

Test Result

Compliance, please refer to the SAR report: RSZ151228006-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d) , Part 22H & 24E, Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) & § 27.50 - RF OUTPUT POWER**Applicable Standards**

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..


According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1755MHz. The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

According to §27.50(c), Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1755MHz.

Test Procedure*Conducted method:*

The RF output of the transmitter was connected to the CMW500/CMU200 through sufficient attenuation.

*Radiated method:*

TIA603-D section 2.2.17

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2015-11-03	2016-11-03
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-07	2017-12-06
HP	Synthesized Sweeper	HP 8341B	2624A00116	2015-07-02	2016-07-01
COM POWER	Dipole Antenna	AD-100	041000	2015-08-18	2016-08-18
A.H. System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Sunol Sciences	Horn Antenna	DRH-118	A052604	2014-12-29	2017-12-28
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-146520-wh	2015-11-23	2016-11-23
Ducommun technologies	RF Cable	UFA210A-1-4724-30050U	MFR64369 223410-001	2015-06-15	2016-06-15
Ducommun technologies	RF Cable	104PEA	218124002	2015-06-15	2016-06-15
Ducommun technologies	RF Cable	RG-214	1	2015-06-15	2016-06-15
Ducommun technologies	RF Cable	RG-214	2	2015-06-15	2016-06-15
Ducommun technologies	RF Cable	RG-214	3	2015-06-15	2016-06-15
WEINSCHL	10dB Attenuator	5324	AU0709	2015-06-18	2016-06-18

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	101.0kPa

The testing was performed by Haiguo Li on 2016-01-15.

Conducted Power**Cellular Band (Part 22H)**

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	128	824.2	32.70	38.45
	190	836.6	32.75	38.45
	251	848.8	32.62	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	128	824.2	32.65	31.74	29.78	28.71	38.45
	190	836.6	32.70	31.79	29.90	28.77	38.45
	251	848.8	32.64	31.72	29.84	28.71	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	128	824.2	26.42	25.34	22.97	21.85	38.45
	190	836.6	26.49	25.34	23.01	21.84	38.45
	251	848.8	26.63	25.52	23.18	21.99	38.45

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band V)	Normal	RMC12.2k		22.07	21.90	21.75
		Rel 6 HSDPA	1	21.70	21.20	21.17
			2	21.57	21.13	21.13
			3	21.78	21.32	21.23
			4	21.57	21.15	21.11
		Rel 6 HSUPA	1	21.61	21.16	21.17
			2	21.53	21.04	21.12
			3	21.64	21.22	21.24
			4	21.53	21.12	21.09
			5	21.66	21.19	21.26
		HSPA+	1	21.23	21.12	21.11

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	512	1850.2	28.78	33
	661	1880.0	28.38	33
	810	1909.8	28.09	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	512	1850.2	28.81	28.12	26.46	25.35	33
	661	1880.0	28.40	27.67	26.04	24.98	33
	810	1909.8	28.12	27.44	25.78	24.69	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	512	1850.2	26.96	25.87	23.93	22.79	33
	661	1880.0	26.49	25.50	23.47	22.37	33
	810	1909.8	26.02	24.99	22.91	21.72	33

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band II)	Normal	RMC12.2k		21.80	21.78	21.86
		Rel 6 HSDPA	1	20.75	20.77	20.78
			2	20.63	20.69	20.72
			3	20.86	20.88	20.82
			4	20.67	20.73	20.66
		Rel 6 HSUPA	1	20.73	20.77	20.77
			2	20.64	20.72	20.64
			3	20.81	20.90	20.86
			4	20.68	20.65	20.74
			5	20.84	20.90	20.83
		HSPA+	1	20.74	20.65	20.56

Peak-to-average ratio (PAR)**Cellular Band**

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	0.25	13
	Middle	0.22	13
	High	0.28	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	2.37	13
	Middle	2.45	13
	High	2.31	13

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	3.02	13
	Middle	3.08	13
	High	3.05	13
HSDPA (16QAM)	Low	3.07	13
	Middle	3.11	13
	High	3.06	13
HSUPA (BPSK)	Low	3.05	13
	Middle	3.09	13
	High	3.04	13
HSPA+ (BPSK)	Low	3.12	13
	Middle	3.24	13
	High	3.36	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	0.27	13
	Middle	0.23	13
	High	0.29	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	2.24	13
	Middle	2.32	13
	High	2.36	13

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	2.89	13
	Middle	2.87	13
	High	2.96	13
HSDPA (16QAM)	Low	2.88	13
	Middle	2.82	13
	High	2.91	13
HSUPA (BPSK)	Low	2.82	13
	Middle	2.83	13
	High	2.95	13
HSPA+ (BPSK)	Low	2.95	13
	Middle	2.91	13
	High	3.02	13

Radiated Power**ERP & EIRP****GSM Mode:**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)			
ERP for Cellular Band (Part 22H), Middle Channel										
836.60	100.25	105	1.7	H	29.1	0.67	0	28.43	38.45	10.02
836.60	99.58	214	1.5	V	28.4	0.67	0	27.73	38.45	10.72
EIRP for PCS Band (Part 24E), Middle Channel										
1880.00	89.74	355	1.8	H	21.1	1.40	7.30	27.00	33	6
1880.00	88.95	82	1.2	V	19.7	1.40	7.30	25.60	33	7.4

EDGE Mode:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)			
ERP for Cellular Band (Part 22H), Middle Channel										
836.60	95.12	182	2.2	H	22.0	0.67	0	23.33	38.45	15.12
836.60	94.56	25	1.0	V	21.4	0.67	0	22.77	38.45	15.68
EIRP for PCS Band (Part 24E), Middle Channel										
1880.00	85.45	320	1.9	H	16.8	1.40	7.30	22.70	33	10.3
1880.00	86.72	11	1.8	V	17.5	1.40	7.30	23.40	33	9.6

WCDMA Mode:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)			
ERP for WCDMA Band V (Part 22H), Middle Channel										
836.60	93.24	212	1.5	H	22.1	0.67	0	21.43	38.45	17.02
836.60	93.14	155	2.1	V	22.0	0.67	0	21.33	38.45	17.12
EIRP for WCDMA Band II (Part 24E), Middle Channel										
1880.00	84.23	26	1.3	H	15.6	1.40	7.30	21.50	33	11.5
1880.00	84.64	73	1.7	V	15.4	1.40	7.30	21.30	33	11.7

Note:

All above data were tested with no amplifier.

Absolute Level = SG Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

LTE Band 2:**Maximum Output Power**

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4	QPSK	RB Size=1, RB Offset=0	22.15	22.28	22.52
		RB Size=1, RB Offset=2	22.32	22.38	22.27
		RB Size=1, RB Offset=5	22.57	22.43	22.32
		RB Size=3, RB Offset=0	22.18	22.13	22.07
		RB Size=3, RB Offset=1	22.72	22.78	22.67
		RB Size=3, RB Offset=2	21.81	21.72	21.62
		RB Size=6, RB Offset=0	22.15	21.82	21.86
	16QAM	RB Size=1, RB Offset=0	22.23	22.12	22.11
		RB Size=1, RB Offset=2	22.52	22.57	22.47
		RB Size=1, RB Offset=5	22.43	22.35	22.22
		RB Size=3, RB Offset=0	21.95	21.82	21.85
		RB Size=3, RB Offset=1	22.31	22.37	22.25
		RB Size=3, RB Offset=2	22.13	21.92	21.93
		RB Size=6, RB Offset=0	22.15	22.24	21.91
3.0	QPSK	RB Size=1, RB Offset=0	22.64	22.58	22.42
		RB Size=1, RB Offset=7	22.72	22.77	22.63
		RB Size=1, RB Offset=14	22.75	22.62	22.52
		RB Size=8, RB Offset=0	22.12	22.17	22.16
		RB Size=8, RB Offset=4	22.15	21.92	21.93
		RB Size=8, RB Offset=7	22.42	22.39	22.25
		RB Size=15, RB Offset=0	21.93	21.87	21.73
	16QAM	RB Size=1, RB Offset=0	22.05	22.18	21.82
		RB Size=1, RB Offset=7	21.82	21.73	21.75
		RB Size=1, RB Offset=14	22.03	21.92	21.85
		RB Size=8, RB Offset=0	22.32	22.38	22.21
		RB Size=8, RB Offset=4	22.03	22.13	21.95
		RB Size=8, RB Offset=7	22.35	22.25	22.14
		RB Size=15, RB Offset=0	22.83	22.79	22.63

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	22.82	22.73	22.72
		RB Size=1, RB Offset=12	22.02	21.91	21.95
		RB Size=1, RB Offset=24	22.14	22.04	21.93
		RB Size=12, RB Offset=0	22.32	22.22	22.15
		RB Size=12, RB Offset=6	21.93	21.98	21.87
		RB Size=12, RB Offset=11	22.43	22.45	22.24
		RB Size=25, RB Offset=0	22.53	22.42	22.33
	16QAM	RB Size=1, RB Offset=0	22.58	22.41	22.32
		RB Size=1, RB Offset=12	22.53	22.61	22.52
		RB Size=1, RB Offset=24	22.19	21.95	21.83
		RB Size=12, RB Offset=0	22.66	22.56	22.42
		RB Size=12, RB Offset=6	22.13	21.97	21.83
		RB Size=12, RB Offset=11	22.72	22.67	22.53
		RB Size=25, RB Offset=0	22.45	22.35	22.22
10.0	QPSK	RB Size=1, RB Offset=0	22.17	22.17	22.24
		RB Size=1, RB Offset=24	22.51	22.52	22.43
		RB Size=1, RB Offset=49	22.32	22.29	22.15
		RB Size=25, RB Offset=0	22.38	22.24	22.23
		RB Size=25, RB Offset=12	22.14	22.16	21.92
		RB Size=25, RB Offset=24	22.45	22.37	22.35
		RB Size=50, RB Offset=0	22.52	22.56	22.46
	16QAM	RB Size=1, RB Offset=0	22.75	22.63	22.52
		RB Size=1, RB Offset=24	22.24	22.05	21.95
		RB Size=1, RB Offset=49	22.34	22.07	22.16
		RB Size=25, RB Offset=0	22.47	22.38	22.24
		RB Size=25, RB Offset=12	22.72	22.62	22.52
		RB Size=25, RB Offset=24	22.43	22.34	22.24
		RB Size=50, RB Offset=0	22.43	22.36	22.34

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15.0	QPSK	RB Size=1, RB Offset=0	22.27	22.16	22.02
		RB Size=1, RB Offset=37	22.27	22.12	22.05
		RB Size=1, RB Offset=74	22.47	22.35	22.21
		RB Size=36, RB Offset=0	22.62	22.61	22.52
		RB Size=36, RB Offset=18	21.91	21.87	21.83
		RB Size=36, RB Offset=37	22.65	22.54	22.42
		RB Size=75, RB Offset=0	22.74	22.53	22.55
	16QAM	RB Size=1, RB Offset=0	22.65	22.52	22.43
		RB Size=1, RB Offset=37	21.93	21.82	21.82
		RB Size=1, RB Offset=74	22.52	22.44	22.33
		RB Size=36, RB Offset=0	22.13	22.07	21.95
		RB Size=36, RB Offset=18	22.62	22.63	22.57
		RB Size=36, RB Offset=37	22.85	22.72	22.62
		RB Size=75, RB Offset=0	22.43	22.31	22.35
20.0	QPSK	RB Size=1, RB Offset=0	22.35	22.24	22.12
		RB Size=1, RB Offset=49	22.75	22.62	22.53
		RB Size=1, RB Offset=99	22.35	22.23	22.27
		RB Size=50, RB Offset=0	22.33	22.23	22.25
		RB Size=50, RB Offset=24	22.32	22.35	22.27
		RB Size=50, RB Offset=49	22.05	21.93	21.82
		RB Size=100, RB Offset=0	22.63	22.54	22.43
	16QAM	RB Size=1, RB Offset=0	22.22	22.17	22.03
		RB Size=1, RB Offset=49	22.23	22.13	22.02
		RB Size=1, RB Offset=99	21.93	21.85	21.73
		RB Size=50, RB Offset=0	22.15	21.94	21.92
		RB Size=50, RB Offset=24	22.44	22.32	22.25
		RB Size=50, RB Offset=49	22.32	22.22	22.17
		RB Size=100, RB Offset=0	22.12	22.02	21.92

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK(1RB Size)	5.12	13	Pass
QPSK (100%RB Size)	6.33	13	Pass
16QAM (1RB Size)	4.78	13	Pass
16QAM (100%RB Size)	6.09	13	Pass

EIRP:**QPSK:**

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
1880.00	84.74	38	1.2	H	16.1	1.40	7.30	22.00	33
1880.00	83.65	336	2.3	V	14.4	1.40	7.30	20.30	33
3 MHz Bandwidth									
1880.00	84.56	216	2.4	H	15.9	1.40	7.30	21.80	33
1880.00	83.43	176	1.7	V	14.2	1.40	7.30	20.10	33
5 MHz Bandwidth									
1880.00	84.51	124	1.8	H	15.8	1.40	7.30	21.70	33
1880.00	83.24	71	2.3	V	14.0	1.40	7.30	19.90	33
10 MHz Bandwidth									
1880.00	84.84	356	2.2	H	16.2	1.40	7.30	22.10	33
1880.00	83.32	314	1.2	V	14.1	1.40	7.30	20.00	33
15 MHz Bandwidth									
1880.00	84.62	81	2.1	H	15.9	1.40	7.30	21.80	33
1880.00	83.26	48	2.0	V	14.0	1.40	7.30	19.90	33
20 MHz Bandwidth									
1880.00	84.56	103	2.1	H	15.9	1.40	7.30	21.80	33
1880.00	83.46	165	2.0	V	14.2	1.40	7.30	20.10	33

16QAM:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
1880.00	84.76	268	1.2	H	16.1	1.40	7.30	22.00	33
1880.00	83.34	315	1.9	V	14.1	1.40	7.30	20.00	33
3 MHz Bandwidth									
1880.00	84.72	22	1.9	H	16.0	1.40	7.30	21.90	33
1880.00	83.38	39	2.3	V	14.1	1.40	7.30	20.00	33
5 MHz Bandwidth									
1880.00	84.74	68	2.0	H	16.1	1.40	7.30	22.00	33
1880.00	83.32	109	2.4	V	14.1	1.40	7.30	20.00	33
10 MHz Bandwidth									
1880.00	84.53	342	1.7	H	15.9	1.40	7.30	21.80	33
1880.00	83.37	342	1.4	V	14.1	1.40	7.30	20.00	33
15 MHz Bandwidth									
1880.00	84.59	56	2.0	H	15.9	1.40	7.30	21.80	33
1880.00	83.34	175	1.6	V	14.1	1.40	7.30	20.00	33
20 MHz Bandwidth									
1880.00	84.53	115	1.1	H	15.9	1.40	7.30	21.80	33
1880.00	83.37	332	1.6	V	14.1	1.40	7.30	20.00	33

LTE Band 4:**Maximum Output Power**

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4	QPSK	RB Size=1, RB Offset=0	22.32	22.22	22.25
		RB Size=1, RB Offset=2	22.64	22.57	22.47
		RB Size=1, RB Offset=5	22.62	22.65	22.57
		RB Size=3, RB Offset=0	22.03	21.93	21.85
		RB Size=3, RB Offset=1	22.54	22.42	22.44
		RB Size=3, RB Offset=2	22.17	21.97	21.83
		RB Size=6, RB Offset=0	22.23	22.15	22.12
	16QAM	RB Size=1, RB Offset=0	22.87	22.73	22.67
		RB Size=1, RB Offset=2	22.21	22.12	22.15
		RB Size=1, RB Offset=5	21.92	21.81	21.72
		RB Size=3, RB Offset=0	22.15	22.04	21.93
		RB Size=3, RB Offset=1	22.64	22.65	22.64
		RB Size=3, RB Offset=2	22.53	22.43	22.35
		RB Size=6, RB Offset=0	21.84	21.85	21.71
3.0	QPSK	RB Size=1, RB Offset=0	22.07	21.93	21.97
		RB Size=1, RB Offset=7	22.22	22.27	22.18
		RB Size=1, RB Offset=14	22.35	22.25	22.19
		RB Size=8, RB Offset=0	21.86	21.84	21.77
		RB Size=8, RB Offset=4	22.23	22.23	22.18
		RB Size=8, RB Offset=7	21.83	21.82	21.79
		RB Size=15, RB Offset=0	22.03	22.04	22.24
	16QAM	RB Size=1, RB Offset=0	22.52	22.42	22.47
		RB Size=1, RB Offset=7	21.92	21.87	21.65
		RB Size=1, RB Offset=14	21.92	21.95	21.86
		RB Size=8, RB Offset=0	22.67	22.54	22.45
		RB Size=8, RB Offset=4	22.56	22.42	22.32
		RB Size=8, RB Offset=7	21.97	21.97	21.85
		RB Size=15, RB Offset=0	22.12	22.02	21.92

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	22.28	22.14	22.02
		RB Size=1, RB Offset=12	22.69	22.53	22.47
		RB Size=1, RB Offset=24	22.32	22.24	22.25
		RB Size=12, RB Offset=0	21.83	21.73	21.75
		RB Size=12, RB Offset=6	22.84	22.72	22.62
		RB Size=12, RB Offset=11	22.65	22.61	22.52
		RB Size=25, RB Offset=0	21.93	21.85	21.77
	16QAM	RB Size=1, RB Offset=0	21.91	21.84	21.76
		RB Size=1, RB Offset=12	22.27	22.02	22.02
		RB Size=1, RB Offset=24	22.75	22.53	22.52
		RB Size=12, RB Offset=0	22.34	22.24	22.25
		RB Size=12, RB Offset=6	22.75	22.62	22.67
		RB Size=12, RB Offset=11	22.87	22.65	22.68
		RB Size=25, RB Offset=0	21.87	21.74	21.67
10.0	QPSK	RB Size=1, RB Offset=0	22.12	22.13	22.63
		RB Size=1, RB Offset=24	22.13	22.07	21.58
		RB Size=1, RB Offset=49	22.25	21.95	21.85
		RB Size=25, RB Offset=0	22.87	22.72	22.73
		RB Size=25, RB Offset=12	22.45	22.21	22.27
		RB Size=25, RB Offset=24	22.23	22.14	22.15
		RB Size=50, RB Offset=0	22.45	22.42	22.33
	16QAM	RB Size=1, RB Offset=0	22.82	22.84	22.72
		RB Size=1, RB Offset=24	22.27	21.81	21.71
		RB Size=1, RB Offset=49	22.07	21.97	21.87
		RB Size=25, RB Offset=0	22.03	22.15	21.95
		RB Size=25, RB Offset=12	22.31	22.22	22.26
		RB Size=25, RB Offset=24	21.92	21.81	21.71
		RB Size=50, RB Offset=0	22.55	22.42	22.45

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15.0	QPSK	RB Size=1, RB Offset=0	22.24	22.12	22.17
		RB Size=1, RB Offset=37	22.15	22.14	22.02
		RB Size=1, RB Offset=74	22.46	22.32	22.35
		RB Size=36, RB Offset=0	22.27	22.17	22.27
		RB Size=36, RB Offset=18	22.72	22.72	22.62
		RB Size=36, RB Offset=37	21.92	21.82	21.82
		RB Size=75, RB Offset=0	22.17	22.24	21.92
	16QAM	RB Size=1, RB Offset=0	22.12	22.17	22.24
		RB Size=1, RB Offset=37	22.25	21.92	21.82
		RB Size=1, RB Offset=74	22.37	22.25	22.13
		RB Size=36, RB Offset=0	22.17	22.05	21.92
		RB Size=36, RB Offset=18	22.22	22.13	22.17
		RB Size=36, RB Offset=37	22.74	22.75	22.68
		RB Size=75, RB Offset=0	22.55	22.47	22.32
20.0	QPSK	RB Size=1, RB Offset=0	22.77	22.67	22.55
		RB Size=1, RB Offset=49	22.65	22.58	22.42
		RB Size=1, RB Offset=99	22.87	22.74	22.67
		RB Size=50, RB Offset=0	22.32	22.22	22.12
		RB Size=50, RB Offset=24	22.27	22.17	22.26
		RB Size=50, RB Offset=49	21.92	21.82	21.72
		RB Size=100, RB Offset=0	22.17	22.17	21.93
	16QAM	RB Size=1, RB Offset=0	22.68	22.52	22.47
		RB Size=1, RB Offset=49	22.25	21.91	21.82
		RB Size=1, RB Offset=99	22.21	22.27	22.13
		RB Size=50, RB Offset=0	22.32	22.22	22.23
		RB Size=50, RB Offset=24	22.17	22.17	21.97
		RB Size=50, RB Offset=49	22.22	22.26	22.13
		RB Size=100, RB Offset=0	22.15	21.92	21.82

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK(1RB Size)	3.98	13	Pass
QPSK (100%RB Size)	4.95	13	Pass
16QAM (1RB Size)	4.14	13	Pass
16QAM (100%RB Size)	5.44	13	Pass

EIRP:**QPSK:**

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
1732.50	85.78	322	1.2	H	17.0	1.60	6.90	22.30	30
1732.50	84.34	216	2.5	V	15.1	1.60	6.90	20.40	30
3 MHz Bandwidth									
1732.50	85.53	110	2.5	H	16.7	1.60	6.90	22.00	30
1732.50	84.27	134	2.0	V	15.1	1.60	6.90	20.40	30
5 MHz Bandwidth									
1732.50	85.63	207	1.7	H	16.8	1.60	6.90	22.10	30
1732.50	84.22	98	1.8	V	15.0	1.60	6.90	20.30	30
10MHz Bandwidth									
1732.50	85.49	235	1.3	H	16.7	1.60	6.90	22.00	30
1732.50	84.43	54	1.6	V	15.2	1.60	6.90	20.50	30
15 MHz Bandwidth									
1732.50	85.41	181	1.8	H	16.6	1.60	6.90	21.90	30
1732.50	84.26	11	1.5	V	15.0	1.60	6.90	20.30	30
20 MHz Bandwidth									
1732.50	85.79	135	1.0	H	17.0	1.60	6.90	22.30	30
1732.50	84.46	234	2.0	V	15.2	1.60	6.90	20.50	30

16QAM:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
1732.50	84.53	228	1.2	H	15.7	1.60	6.90	21.00	30
1732.50	83.23	257	1.5	V	14.0	1.60	6.90	19.30	30
3 MHz Bandwidth									
1732.50	84.57	10	1.4	H	15.8	1.60	6.90	21.10	30
1732.50	83.43	78	2.0	V	14.2	1.60	6.90	19.50	30
5 MHz Bandwidth									
1732.50	84.48	190	1.5	H	15.7	1.60	6.90	21.00	30
1732.50	83.27	153	1.6	V	14.1	1.60	6.90	19.40	30
10 MHz Bandwidth									
1732.50	84.41	223	2.0	H	15.6	1.60	6.90	20.90	30
1732.50	83.73	163	2.4	V	14.5	1.60	6.90	19.80	30
15 MHz Bandwidth									
1732.50	84.57	339	1.5	H	15.8	1.60	6.90	21.10	30
1732.50	83.27	313	1.6	V	14.1	1.60	6.90	19.40	30
20 MHz Bandwidth									
1732.50	84.67	310	2.0	H	15.9	1.60	6.90	21.20	30
1732.50	83.53	145	2.1	V	14.3	1.60	6.90	19.60	30

LTE Band 7:**Maximum Output Power**

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	22.38	22.22	22.15
		RB Size=1, RB Offset=12	22.51	22.44	22.45
		RB Size=1, RB Offset=24	22.86	22.73	22.63
		RB Size=12, RB Offset=0	21.82	21.72	21.72
		RB Size=12, RB Offset=6	22.24	21.95	21.84
		RB Size=12, RB Offset=11	22.41	22.44	22.23
		RB Size=25, RB Offset=0	21.82	21.82	21.72
	16QAM	RB Size=1, RB Offset=0	22.67	22.53	22.53
		RB Size=1, RB Offset=12	22.22	22.12	22.42
		RB Size=1, RB Offset=24	22.21	22.25	22.14
		RB Size=12, RB Offset=0	22.45	22.33	22.25
		RB Size=12, RB Offset=6	22.56	22.43	22.32
		RB Size=12, RB Offset=11	22.13	22.15	22.17
		RB Size=25, RB Offset=0	22.81	22.73	22.63
10.0	QPSK	RB Size=1, RB Offset=0	21.87	21.72	21.62
		RB Size=1, RB Offset=24	22.26	22.13	22.17
		RB Size=1, RB Offset=49	22.67	22.52	22.56
		RB Size=25, RB Offset=0	22.62	22.64	22.51
		RB Size=25, RB Offset=12	21.94	21.85	21.72
		RB Size=25, RB Offset=24	22.35	22.27	22.13
		RB Size=50, RB Offset=0	22.62	22.52	22.54
	16QAM	RB Size=1, RB Offset=0	21.92	21.83	21.85
		RB Size=1, RB Offset=24	21.83	21.74	21.71
		RB Size=1, RB Offset=49	22.45	22.35	22.27
		RB Size=25, RB Offset=0	22.27	22.12	22.15
		RB Size=25, RB Offset=12	22.42	22.47	22.37
		RB Size=25, RB Offset=24	22.85	22.76	22.72
		RB Size=50, RB Offset=0	21.91	21.92	21.83

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15.0	QPSK	RB Size=1, RB Offset=0	22.25	22.12	22.15
		RB Size=1, RB Offset=37	22.14	22.12	22.17
		RB Size=1, RB Offset=74	22.43	22.32	22.38
		RB Size=36, RB Offset=0	22.25	22.14	22.24
		RB Size=36, RB Offset=18	22.72	22.71	22.62
		RB Size=36, RB Offset=37	21.92	21.85	21.85
		RB Size=75, RB Offset=0	22.15	22.28	21.92
	16QAM	RB Size=1, RB Offset=0	22.14	22.48	22.17
		RB Size=1, RB Offset=37	22.26	21.91	21.82
		RB Size=1, RB Offset=74	22.37	22.27	22.17
		RB Size=36, RB Offset=0	22.02	22.18	21.92
		RB Size=36, RB Offset=18	22.22	22.13	22.13
		RB Size=36, RB Offset=37	22.73	22.77	22.68
		RB Size=75, RB Offset=0	22.55	22.47	22.36
20.0	QPSK	RB Size=1, RB Offset=0	22.78	22.65	22.55
		RB Size=1, RB Offset=49	22.68	22.57	22.42
		RB Size=1, RB Offset=99	22.82	22.79	22.67
		RB Size=50, RB Offset=0	22.37	22.22	22.12
		RB Size=50, RB Offset=24	22.25	22.17	22.14
		RB Size=50, RB Offset=49	21.92	21.82	21.72
		RB Size=100, RB Offset=0	22.11	22.14	21.92
	16QAM	RB Size=1, RB Offset=0	22.62	22.52	22.47
		RB Size=1, RB Offset=49	22.17	21.92	21.82
		RB Size=1, RB Offset=99	22.22	22.25	22.14
		RB Size=50, RB Offset=0	22.32	22.22	22.21
		RB Size=50, RB Offset=24	22.13	22.24	21.94
		RB Size=50, RB Offset=49	22.23	22.27	22.15
		RB Size=100, RB Offset=0	22.14	21.92	21.82

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK(1RB Size)	4.36	13	Pass
QPSK (100%RB Size)	5.98	13	Pass
16QAM (1RB Size)	4.49	13	Pass
16QAM (100%RB Size)	6.44	13	Pass

EIRP:**QPSK:**

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
5 MHz Bandwidth									
2535.00	81.93	69	1.5	H	15.5	1.70	8.60	22.40	33
2535.00	80.86	344	1.5	V	14.2	1.70	8.60	21.10	33
10MHz Bandwidth									
2535.00	81.76	223	1.8	H	15.4	1.70	8.60	22.30	33
2535.00	80.84	156	1.9	V	14.1	1.70	8.60	21.00	33
15 MHz Bandwidth									
2535.00	81.84	55	1.9	H	15.5	1.70	8.60	22.40	33
2535.00	80.91	217	1.6	V	14.2	1.70	8.60	21.10	33
20 MHz Bandwidth									
2535.00	81.88	163	1.0	H	15.5	1.70	8.60	22.40	33
2535.00	80.96	171	2.1	V	14.3	1.70	8.60	21.20	33

16QAM:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
5 MHz Bandwidth									
2535.00	81.61	142	2.3	H	15.2	1.70	8.60	22.10	33
2535.00	80.47	178	1.2	V	13.8	1.70	8.60	20.70	33
10 MHz Bandwidth									
2535.00	81.79	213	2.3	H	15.4	1.70	8.60	22.30	33
2535.00	80.42	37	1.1	V	13.7	1.70	8.60	20.60	33
15 MHz Bandwidth									
2535.00	81.75	144	1.4	H	15.4	1.70	8.60	22.30	33
2535.00	80.46	52	1.6	V	13.8	1.70	8.60	20.70	33
20 MHz Bandwidth									
2535.00	81.86	321	2.0	H	15.5	1.70	8.60	22.40	34.8
2535.00	80.42	102	1.9	V	13.7	1.70	8.60	20.60	34.8

LTE Band 17:**Maximum Output Power**

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5	QPSK	RB Size=1, RB Offset=0	22.57	22.42	22.47
		RB Size=1, RB Offset=12	22.17	21.92	21.84
		RB Size=1, RB Offset=24	22.15	22.17	21.97
		RB Size=12, RB Offset=0	22.78	22.62	22.55
		RB Size=12, RB Offset=6	21.95	21.95	21.77
		RB Size=12, RB Offset=11	21.87	21.74	21.68
		RB Size=25, RB Offset=0	22.37	22.22	22.12
	16QAM	RB Size=1, RB Offset=0	22.77	22.62	22.53
		RB Size=1, RB Offset=12	22.35	22.37	22.28
		RB Size=1, RB Offset=24	22.47	22.48	22.35
		RB Size=12, RB Offset=0	22.12	21.95	21.94
		RB Size=12, RB Offset=6	22.15	21.96	21.97
		RB Size=12, RB Offset=11	22.17	21.98	21.92
		RB Size=25, RB Offset=0	22.24	21.95	21.83
10	QPSK	RB Size=1, RB Offset=0	21.97	21.87	21.77
		RB Size=1, RB Offset=24	22.78	22.69	22.55
		RB Size=1, RB Offset=49	22.58	22.47	22.34
		RB Size=25, RB Offset=0	22.14	21.95	21.87
		RB Size=25, RB Offset=12	22.42	22.37	22.37
		RB Size=25, RB Offset=24	22.37	22.22	22.29
		RB Size=50, RB Offset=0	21.97	21.85	21.77
	16QAM	RB Size=1, RB Offset=0	22.35	22.24	22.17
		RB Size=1, RB Offset=24	22.55	22.45	22.45
		RB Size=1, RB Offset=49	22.27	22.25	22.02
		RB Size=25, RB Offset=0	22.37	22.37	22.22
		RB Size=25, RB Offset=12	22.35	22.25	22.14
		RB Size=25, RB Offset=24	22.37	22.26	22.23
		RB Size=50, RB Offset=0	22.67	22.57	22.48

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK(1RB Size)	5.12	13	Pass
QPSK (100%RB Size)	6.28	13	Pass
16QAM (1RB Size)	4.72	13	Pass
16QAM (100%RB Size)	6.47	13	Pass

ERP:**QPSK:**

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
5 MHz Bandwidth									
710.00	91.25	73	1.5	H	20.8	0.64	0	20.16	34.8
710.00	91.44	115	1.5	V	21.0	0.64	0	20.36	34.8
10MHz Bandwidth									
710.00	91.55	102	1.5	H	21.1	0.64	0	20.46	34.8
710.00	91.27	152	1.6	V	20.8	0.64	0	20.16	34.8

16QAM:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
5 MHz Bandwidth									
710.00	91.52	158	1.5	H	21.1	0.64	0	20.46	34.8
710.00	91.76	132	1.5	V	21.3	0.64	0	20.66	34.8
10 MHz Bandwidth									
710.00	91.74	45	1.5	H	21.3	0.64	0	20.66	34.8
710.00	91.55	163	1.6	V	21.1	0.64	0	20.46	34.8

Note:

All above data were tested with no amplifier

Absolute Level = SG Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH


Applicable Standards

FCC 47 §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 5 kHz (Cellular /PCS) & 100 kHz (WCDMA) and the 26 dB & 99% bandwidth was recorded.

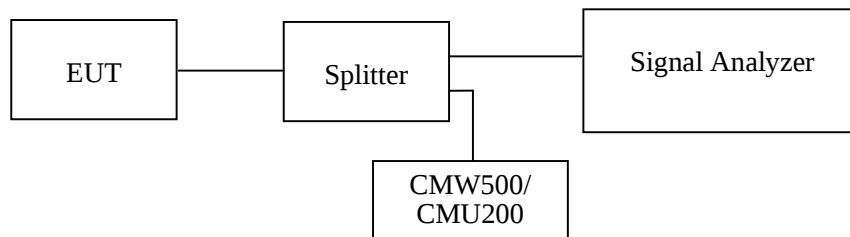

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-146520-wh	2015-11-23	2016-11-23
Ducommun technologies	RF Cable	RG-214	4	2015-06-15	2016-06-15
WEINSCHTEL	10dB Attenuator	5324	AU0709	2015-06-18	2016-06-18

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	23~24 °C
Relative Humidity:	55~57 %
ATM Pressure:	100.5~101.0kPa

The testing was performed by Haiguo Li from 2016-01-11 to 2016-01-27.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables and plots.

Cellular Band (Part 22H)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	836.6	244.49	316.63
EGPRS(8PSK)	836.6	244.49	312.63

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA (BPSK)	836.6	4.228	4.890
HSUPA (BPSK)	836.6	4.200	4.950
HSDPA (16QAM)	836.6	4.200	4.930


PCS Band (Part 24E)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	1880.0	248.50	320.64
EGPRS(8PSK)	1880.0	240.48	312.63


Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA (BPSK)	1880.0	4.208	4.870
HSUPA (BPSK)	1880.0	4.188	4.870
HSDPA (16QAM)	1880.0	4.208	4.890

Cellular Band (Part 22H)


99% Occupied & 26 dB Emissions Bandwidth for GSM (GMSK) Mode

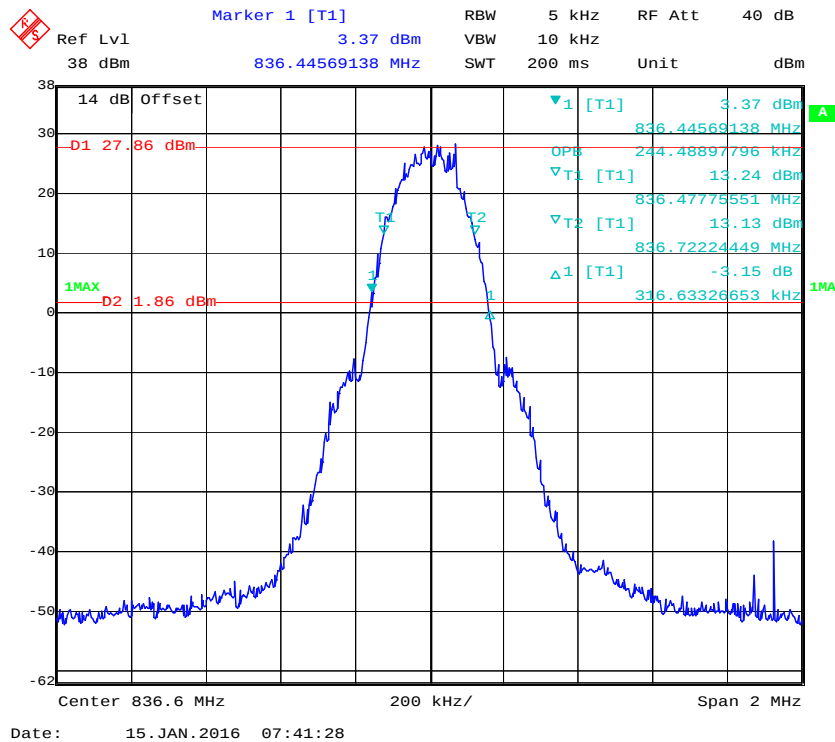


99% Occupied & 26 dB Emissions Bandwidth for EDGE Mode


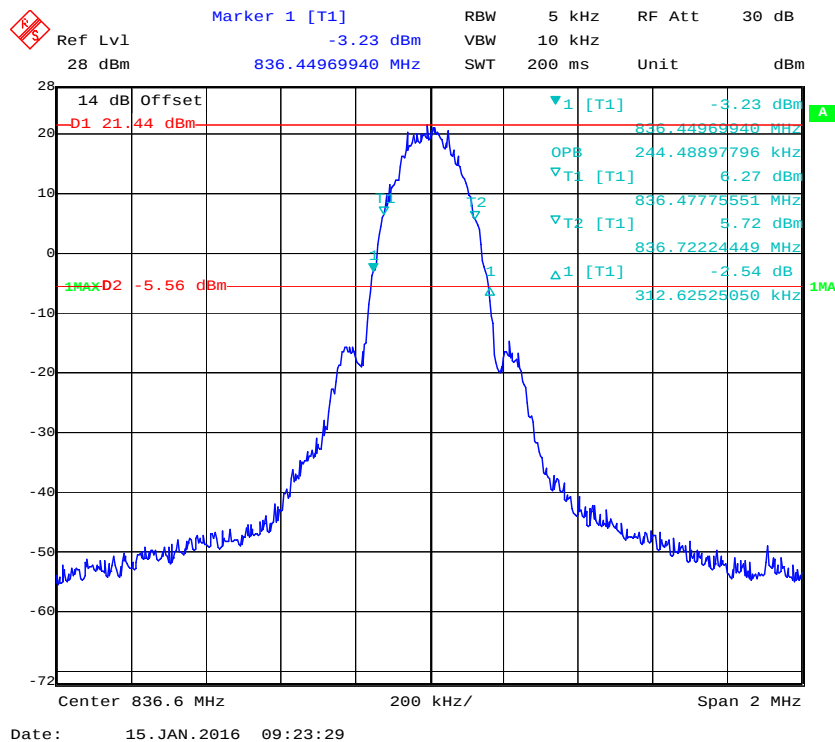




99% Occupied & 26 dB Emissions Bandwidth for WCDMA (BPSK) Mode


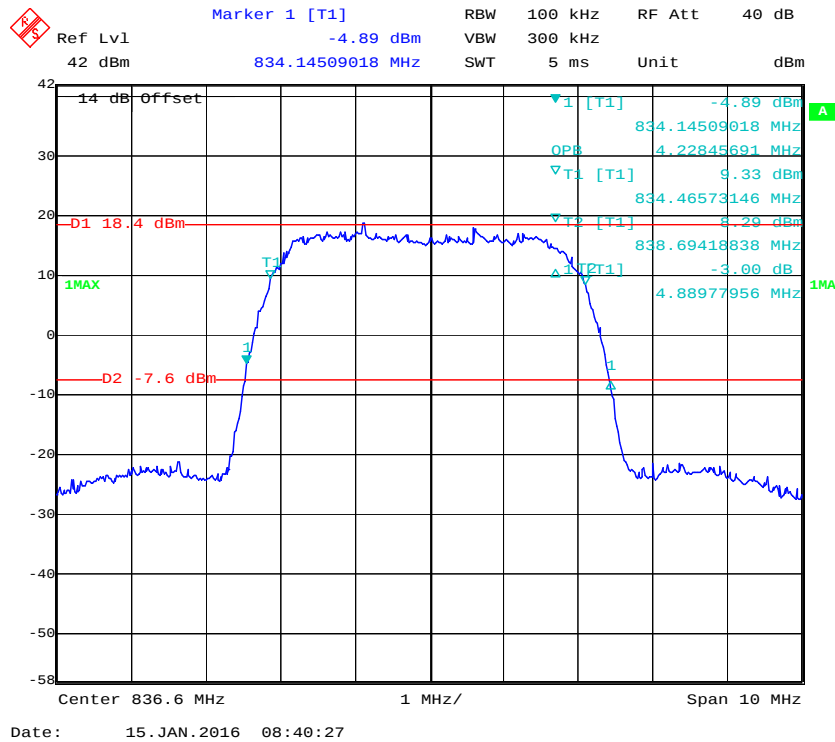


99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode

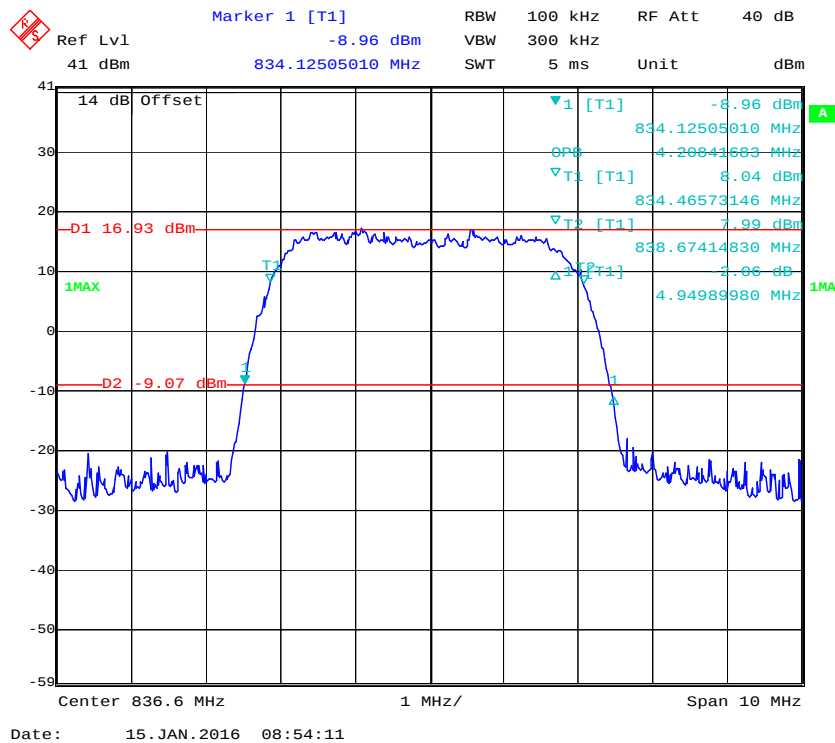

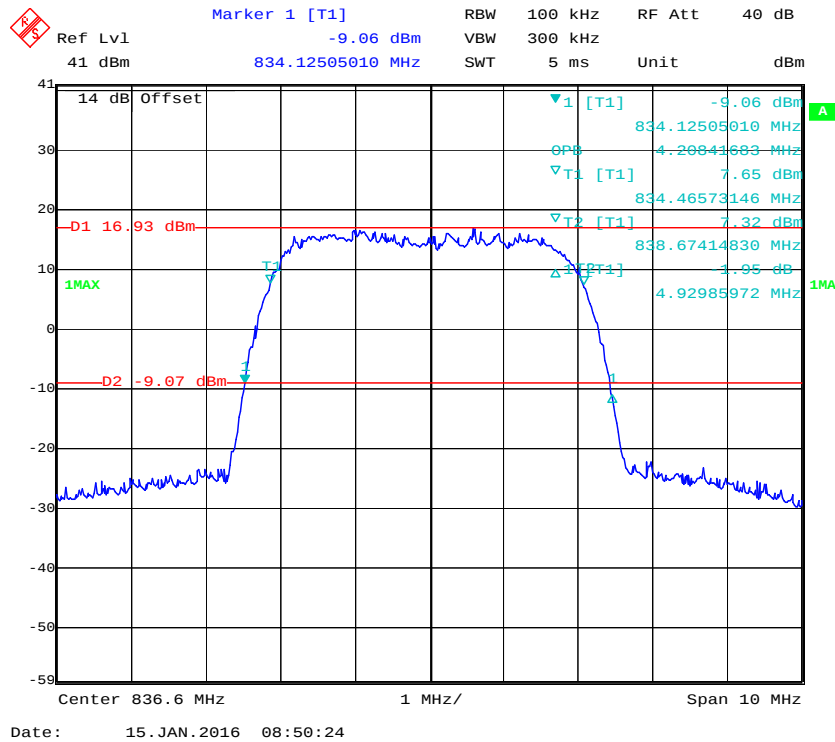
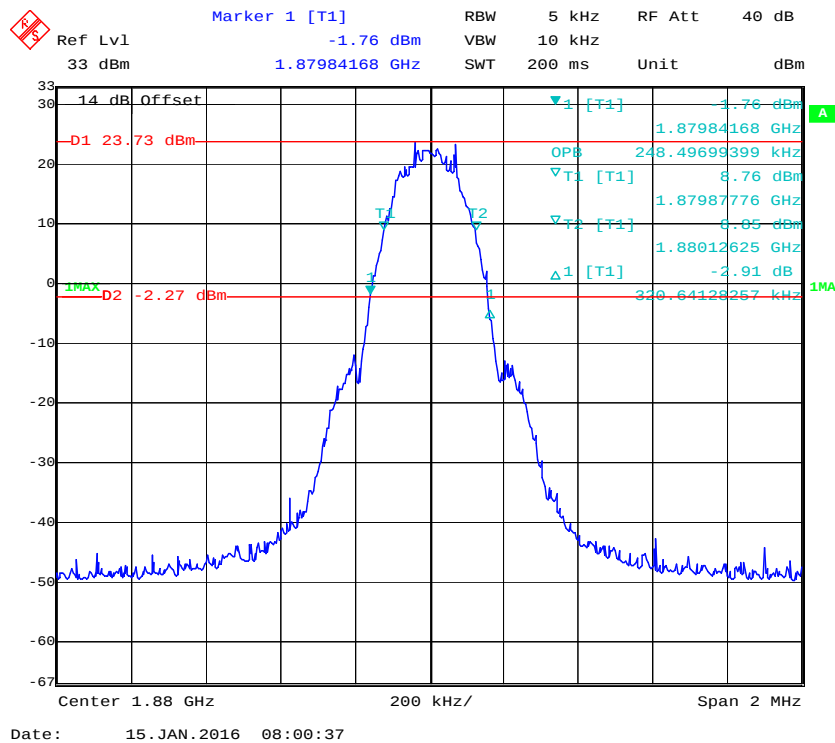
99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode**PCS Band (Part 24E)****99% Occupied & 26 dB Emissions Bandwidth for GSM (GMSK) Mode**

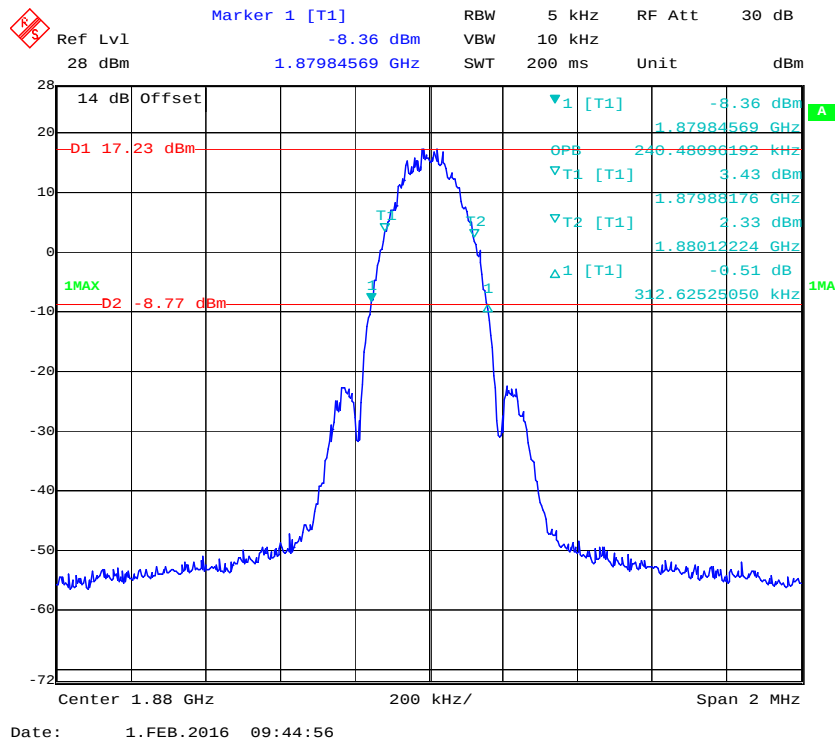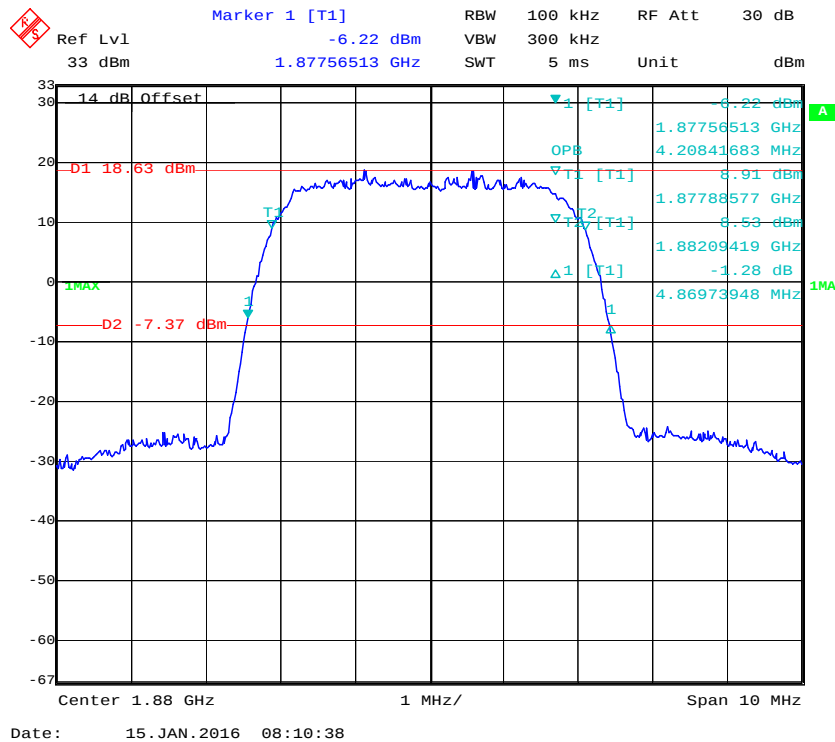99% Occupied & 26 dB Emissions Bandwidth for EGPRS Mode**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (BPSK) Mode**

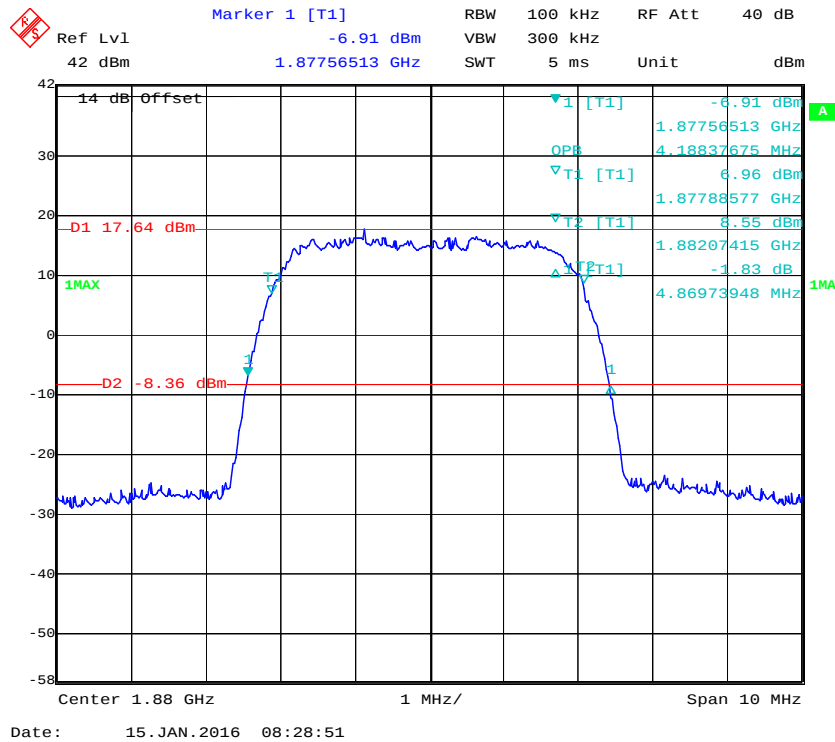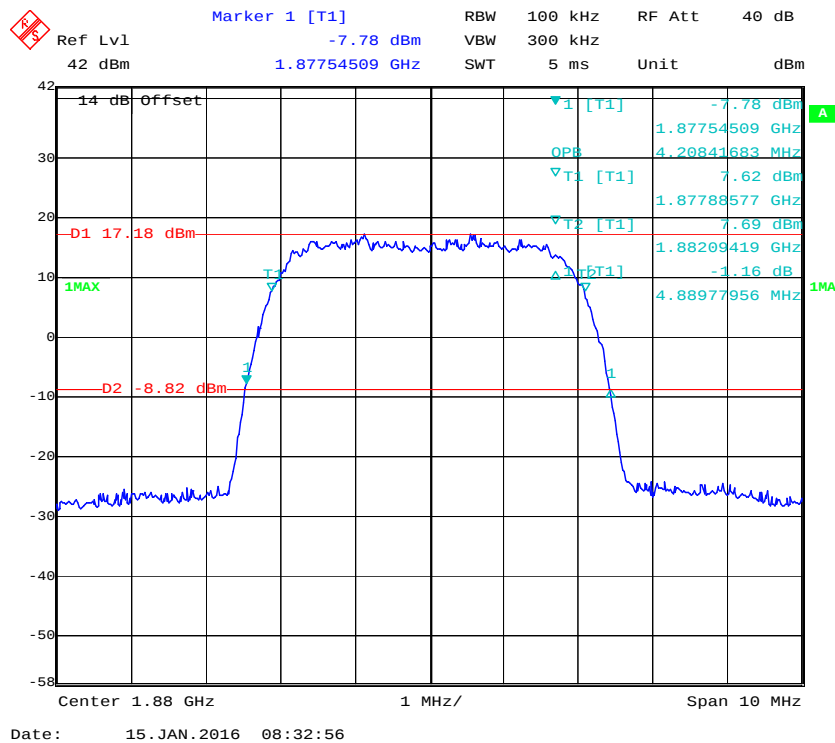
99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode**99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode**

LTE Band 2: (Middle Channel)


Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.105	1.285
	16QAM	1.105	1.285
3.0	QPSK	2.681	2.922
	16QAM	2.693	2.970
5.0	QPSK	4.569	5.110
	16QAM	4.529	5.090
10.0	QPSK	8.978	9.860
	16QAM	8.938	9.659
15.0	QPSK	13.587	15.030
	16QAM	13.527	15.030
20.0	QPSK	17.876	19.399
	16QAM	18.036	19.479

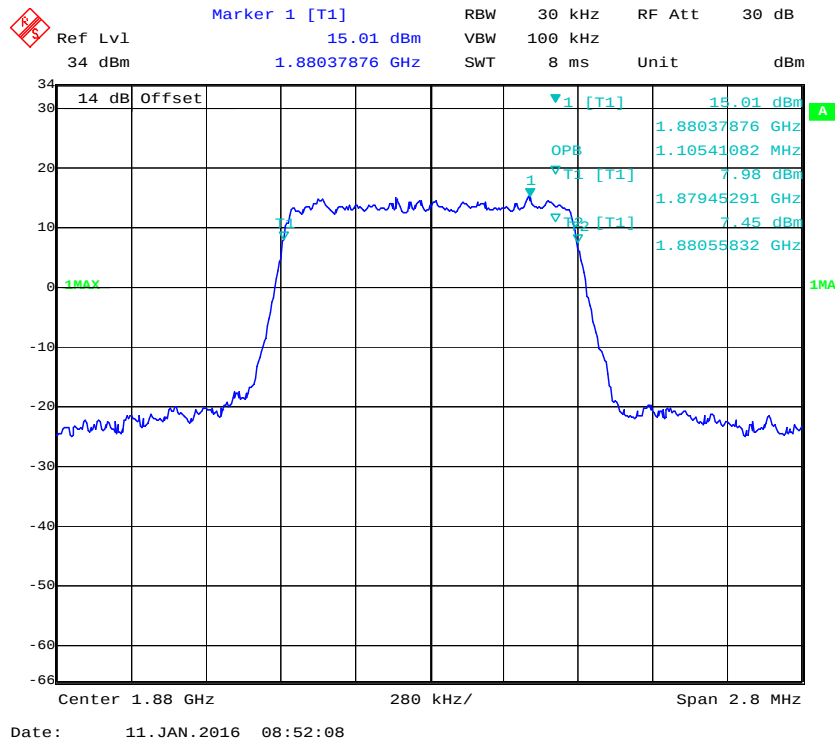
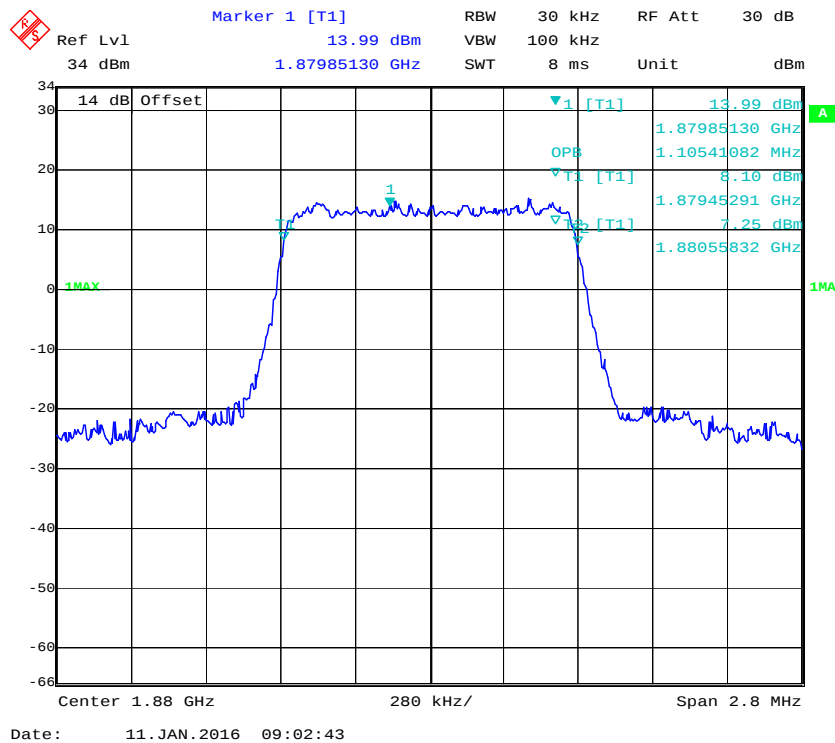
QPSK (1.4 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (1.4 MHz) - 99% Occupied Bandwidth, Middle channel**



QPSK (3.0 MHz) - 99% Occupied Bandwidth, Middle channel

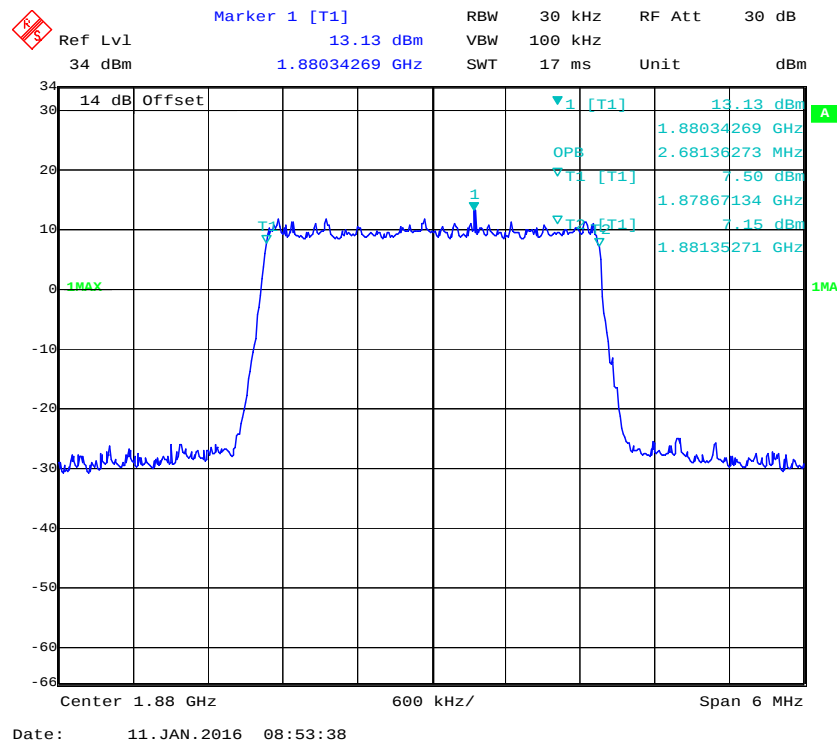


16-QAM (3.0 MHz) - 99% Occupied Bandwidth, Middle channel

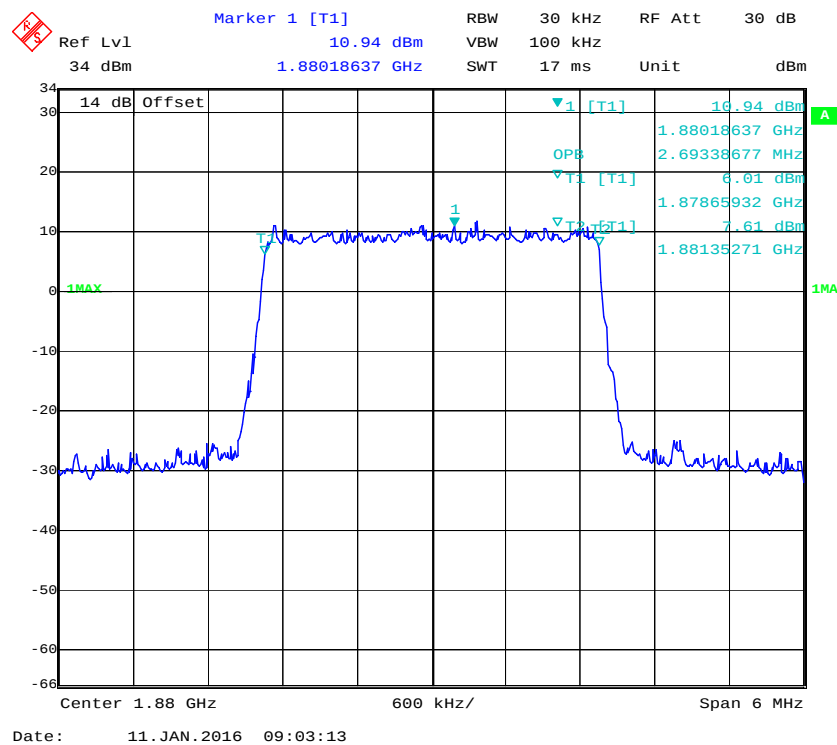

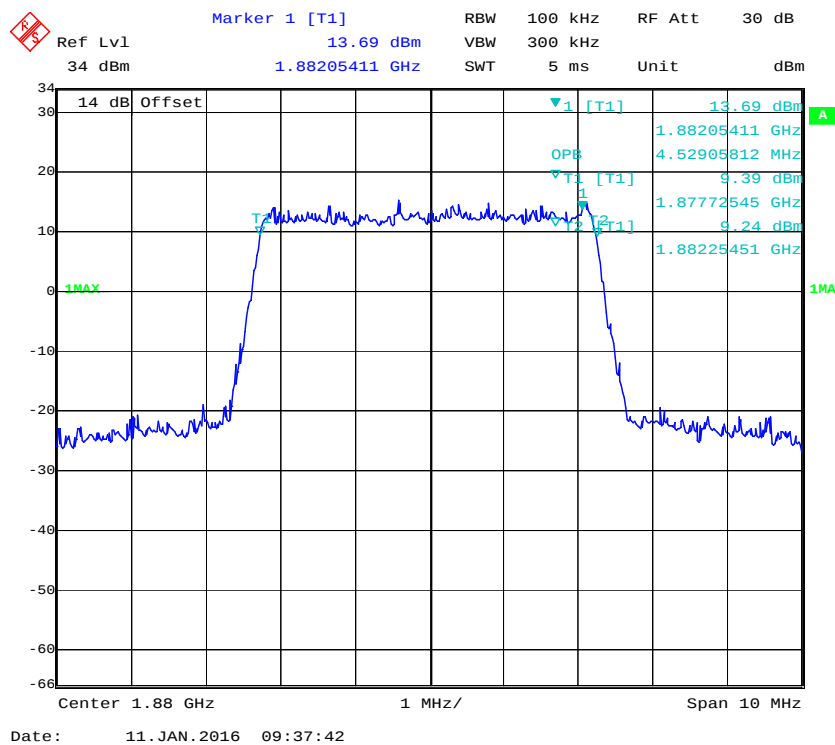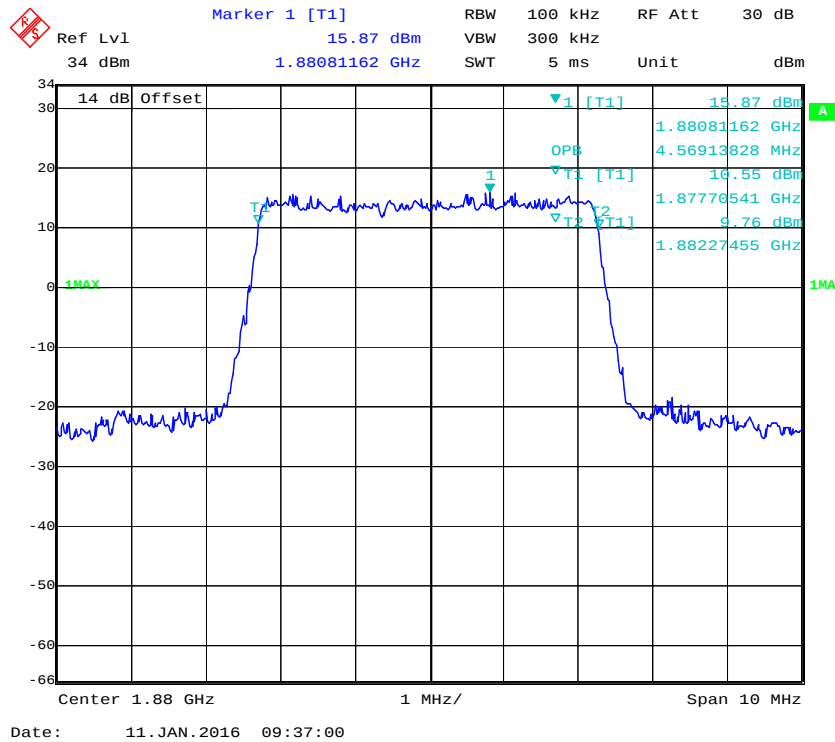


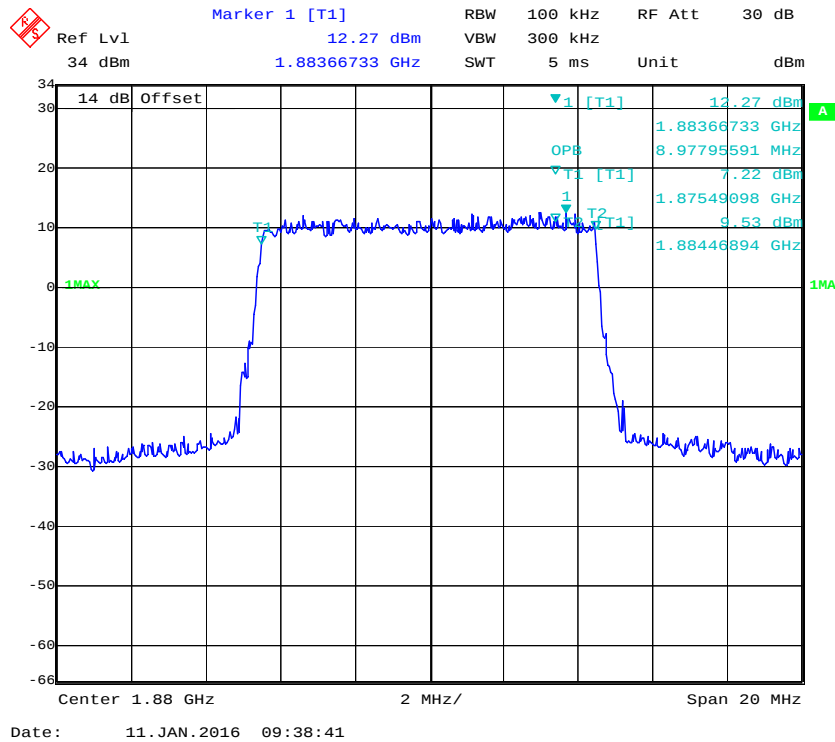
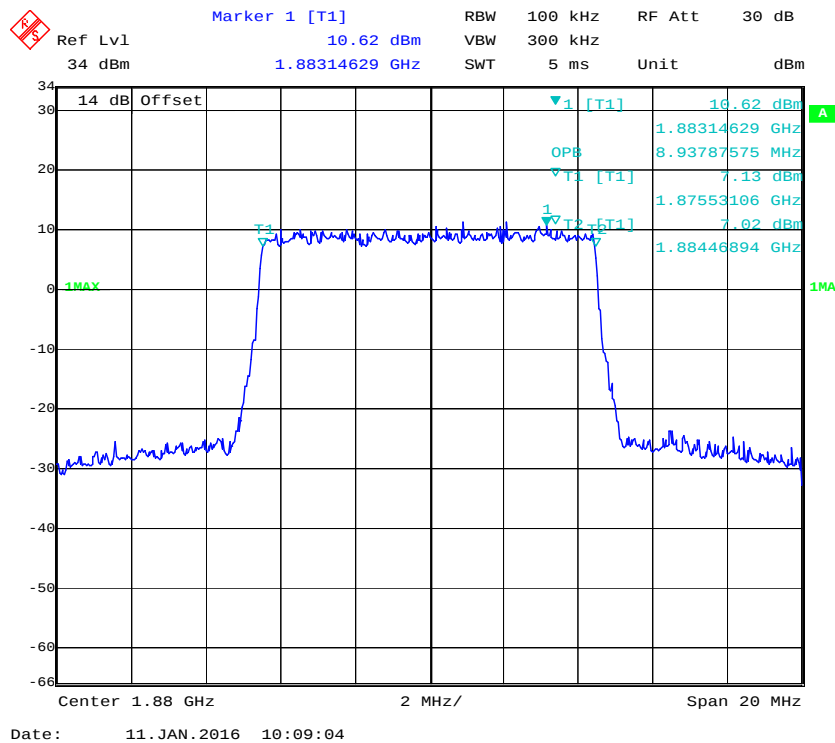
QPSK (10.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (10.0 MHz) - 99% Occupied Bandwidth, Middle channel**

QPSK (15.0 MHz) - 99% Occupied Bandwidth, Middle channel

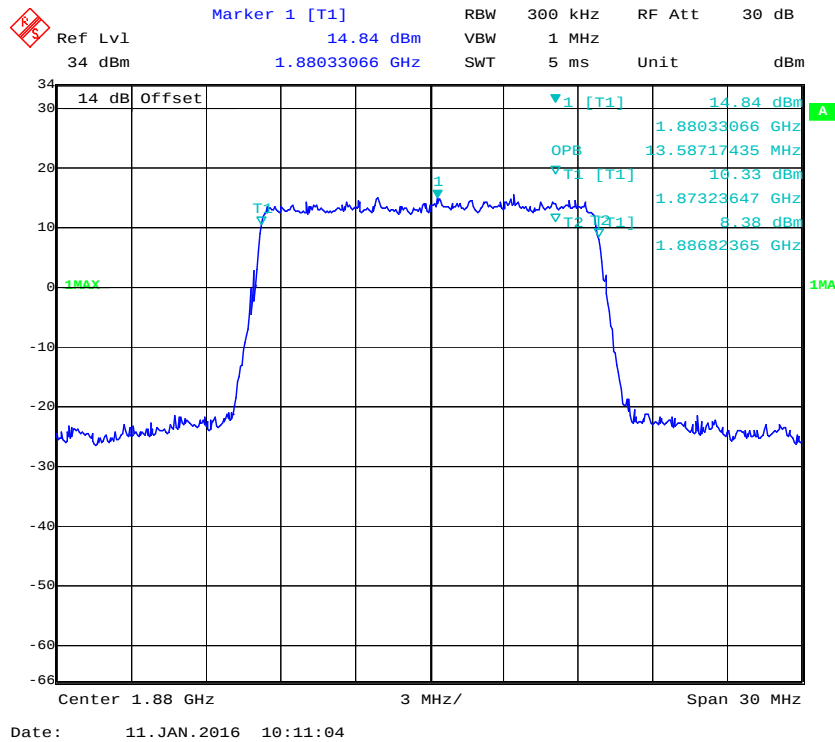


16-QAM (15.0 MHz) - 99% Occupied Bandwidth, Middle channel

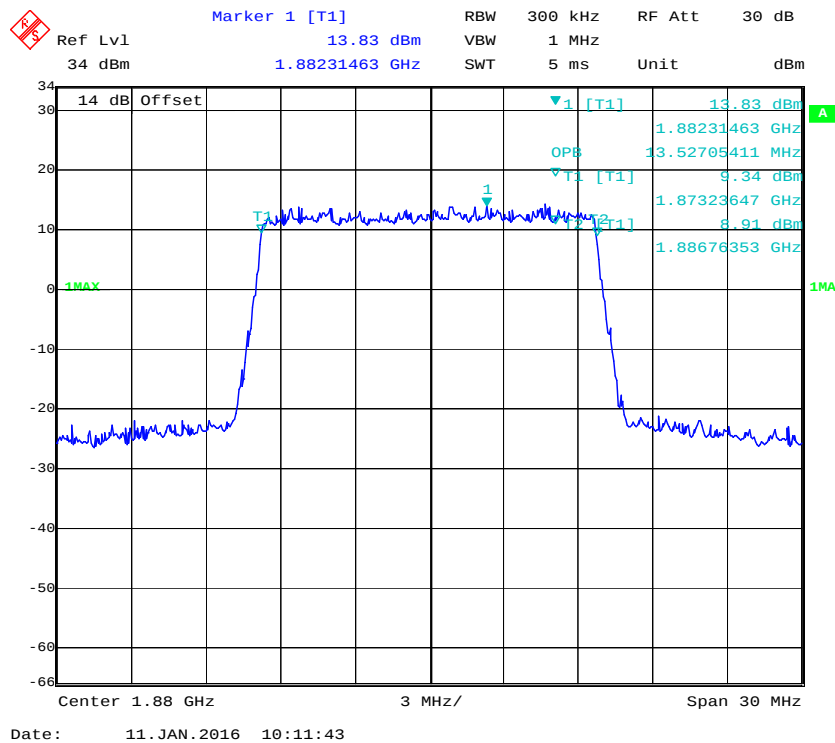


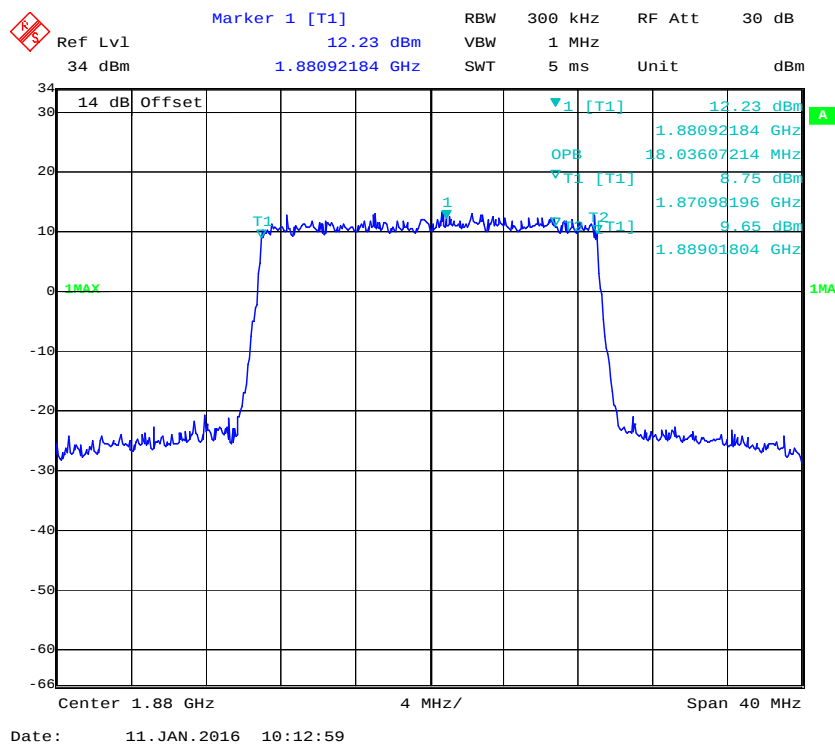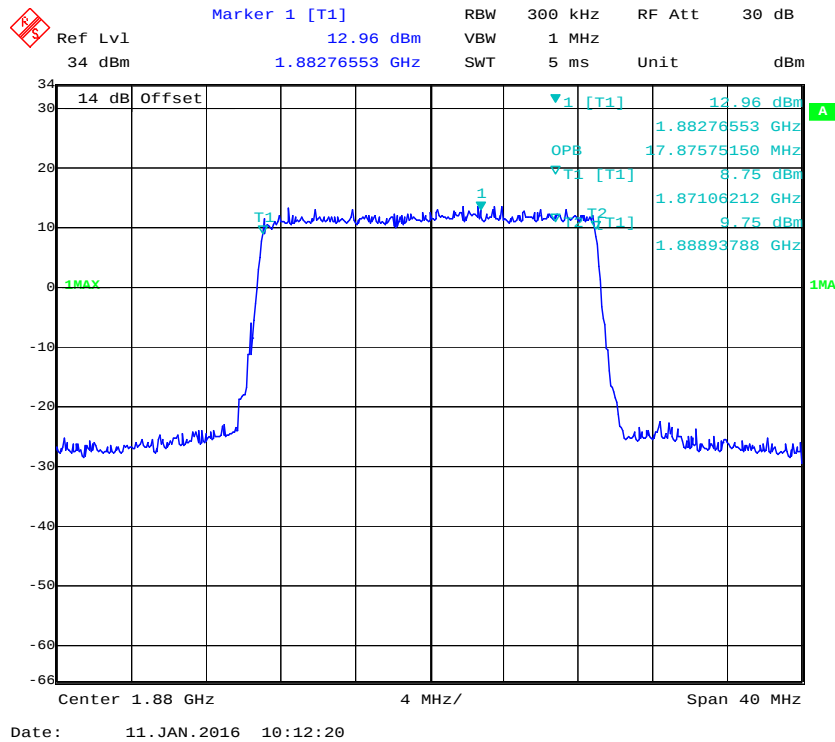


QPSK (1.4 MHz) - 26 dB Bandwidth, Middle channel

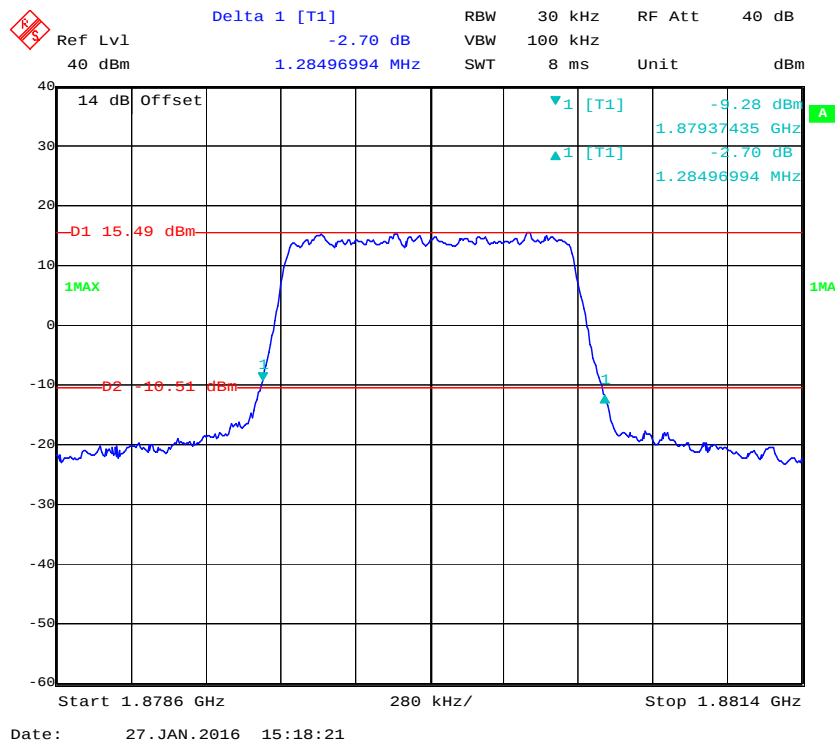


16-QAM (1.4 MHz) - 26 dB Bandwidth, Middle channel

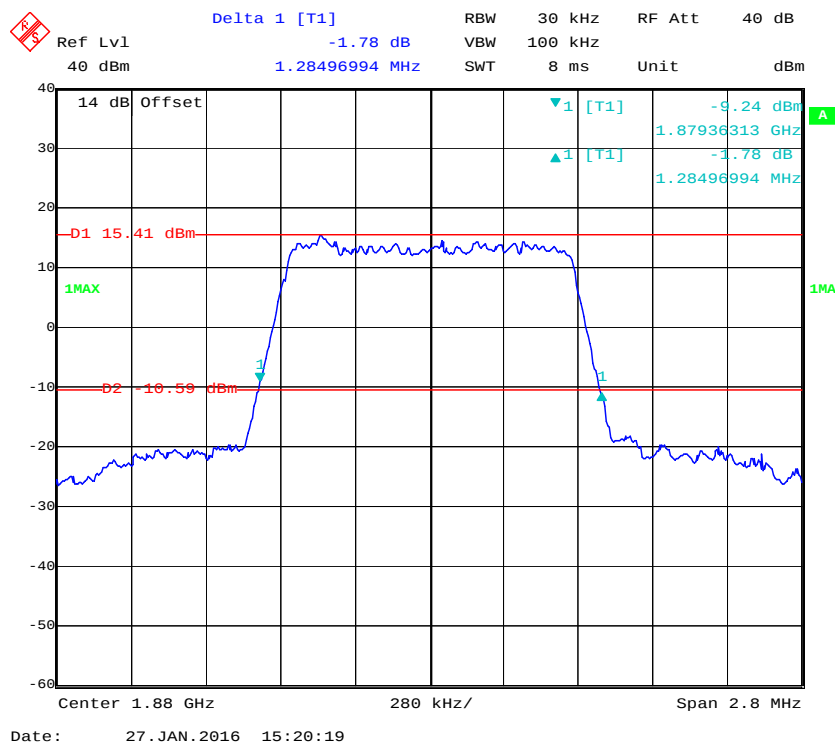


QPSK (3.0 MHz) - 26 dB Bandwidth, Middle channel

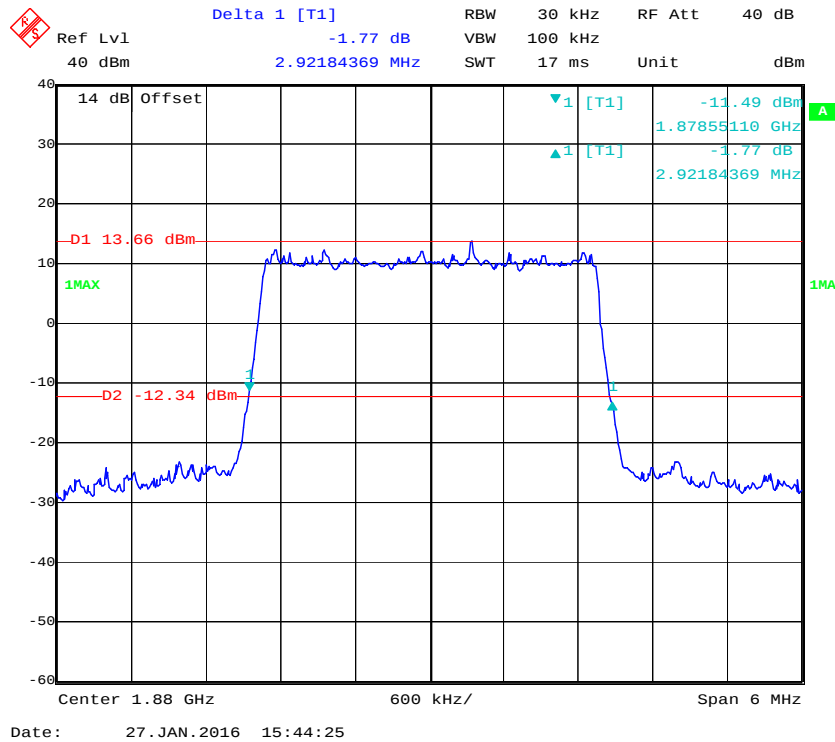


16-QAM (3.0 MHz) - 26 dB Bandwidth, Middle channel


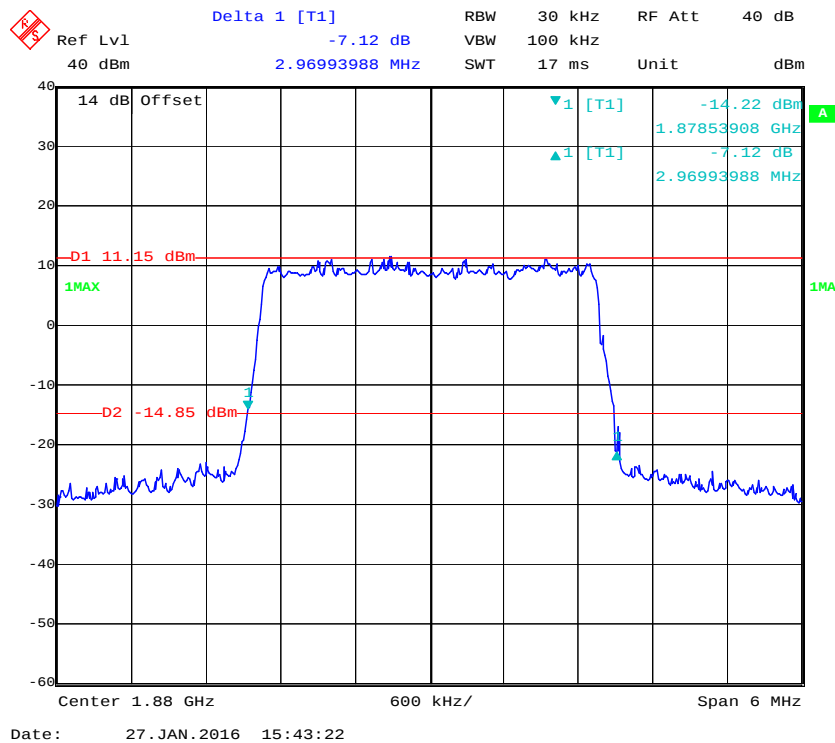


QPSK (5.0 MHz) - 26 dB Bandwidth, Middle channel

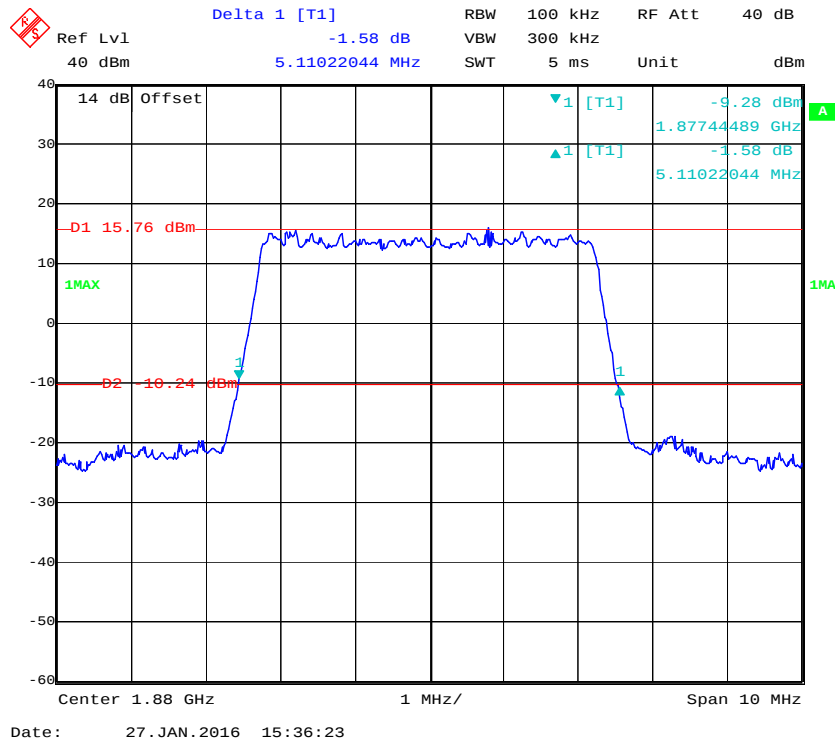

16-QAM (5.0 MHz) - 26 dB Bandwidth, Middle channel

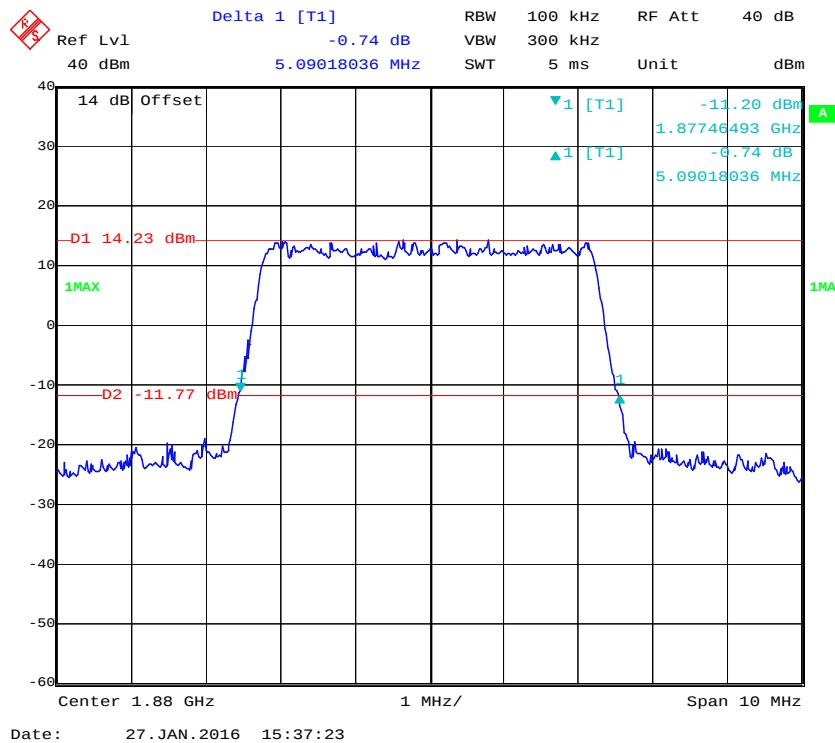

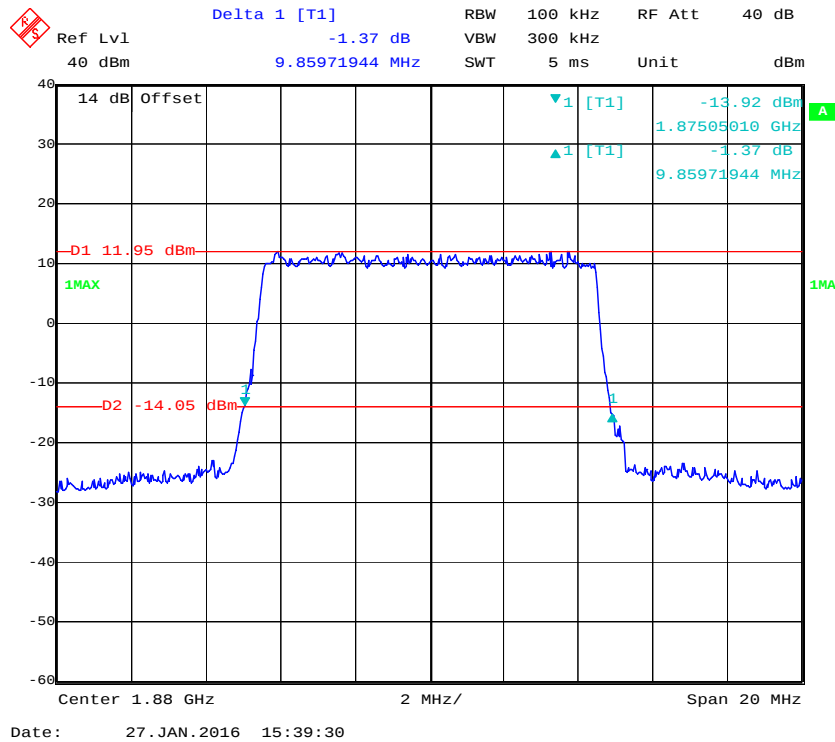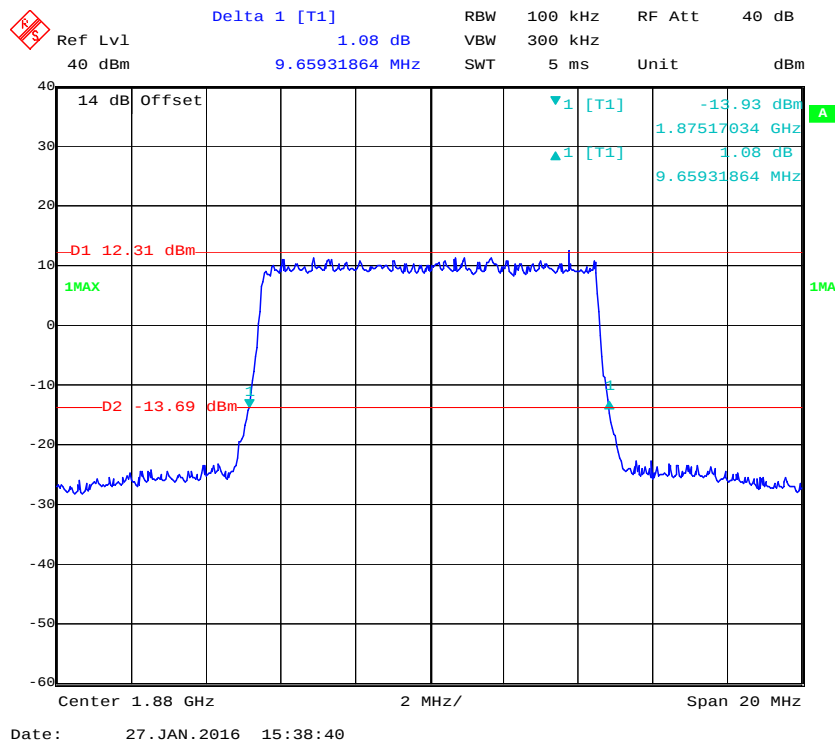QPSK (10.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (10.0 MHz) - 26 dB Bandwidth, Middle channel**

Delta 1 [T1]

Ref Lvl -3.09 dB

40 dBm 15.03006012 MHz

RBW 300 kHz RF Att 40 dB

VBW 1 MHz

SWT 5 ms Unit dBm

14 dB Offset

D1 15.48 dBm

1MAX

D2 -10.52 dBm

1 [T1] -8.25 dBm

1 [T1] -3.09 dB

15.03006012 MHz

1.87251503 GHz

Center 1.88 GHz

3 MHz/

Span 30 MHz

Date: 27. JAN. 2016 15:45:49

[illegible]

Delta 1 [T1]

Ref Lvl 14 dBm

40 dBm

-2.46 dBm

19.39879760 MHz

RBW 300 kHz

VBW 1 MHz

SWT 5 ms

RF Att 40 dB

Unit dBm

14 dB Offset

D1 15.16 dBm

1MAX

D2 -10.84 dBm

1

1 [T1]

-2.46 dBm

1.87034068 GHz

19.39879760 MHz

Center 1.88 GHz

4 MHz/

Span 40 MHz

Date: 27. JAN. 2016 15:49:17

A screenshot of a spectrum analyzer interface. The main display shows a signal with two distinct levels, D1 and D2, separated by a transition region. The signal is measured in dBm on the vertical axis (ranging from -60 to 40) against frequency in MHz on the horizontal axis (ranging from 1.88 to 1.92 MHz). The signal level D1 is at 13.45 dBm and D2 is at -12.55 dBm. The transition region is marked with a green arrow and labeled 'Delta 1 [T1]' with a value of -4.23 dB. The signal is measured at 19.47895792 MHz. The signal is labeled '1MAX' on the right side. The signal is measured at 1.87034068 GHz. The signal is measured at 19.47895792 MHz. The signal is measured at 1.87034068 GHz. The signal is measured at 19.47895792 MHz.

Parameters displayed at the top:

- Ref Lvl: 40 dBm
- Delta 1 [T1]: -4.23 dB
- RBW: 300 kHz
- VBW: 1 MHz
- SWT: 5 ms
- Unit: dBm
- RF Att: 40 dB

Measurements displayed on the right:

- 1 [T1]: -16.32 dBm
- 1.87034068 GHz
- 4.23 dB
- 19.47895792 MHz

Measurements displayed on the left:



- D1 13.45 dBm
- D2 -12.55 dBm

Center 1.88 GHz, 4 MHz/ Span 40 MHz


Date: 27. JAN. 2016 15:48:21

LTE Band 4: (Middle Channel)


Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.105	1.341
	16QAM	1.117	1.302
3.0	QPSK	2.693	2.934
	16QAM	2.693	2.970
5.0	QPSK	4.529	5.050
	16QAM	4.549	5.130
10.0	QPSK	9.018	10.060
	16QAM	8.938	9.739
15.0	QPSK	13.527	15.030
	16QAM	13.527	14.970
20.0	QPSK	18.036	19.719
	16QAM	17.956	19.639

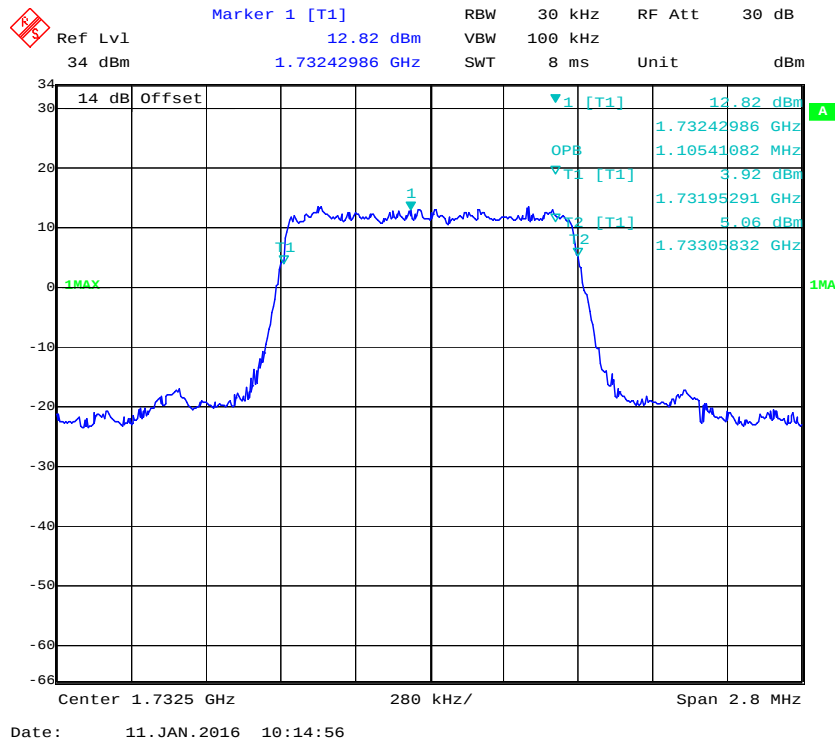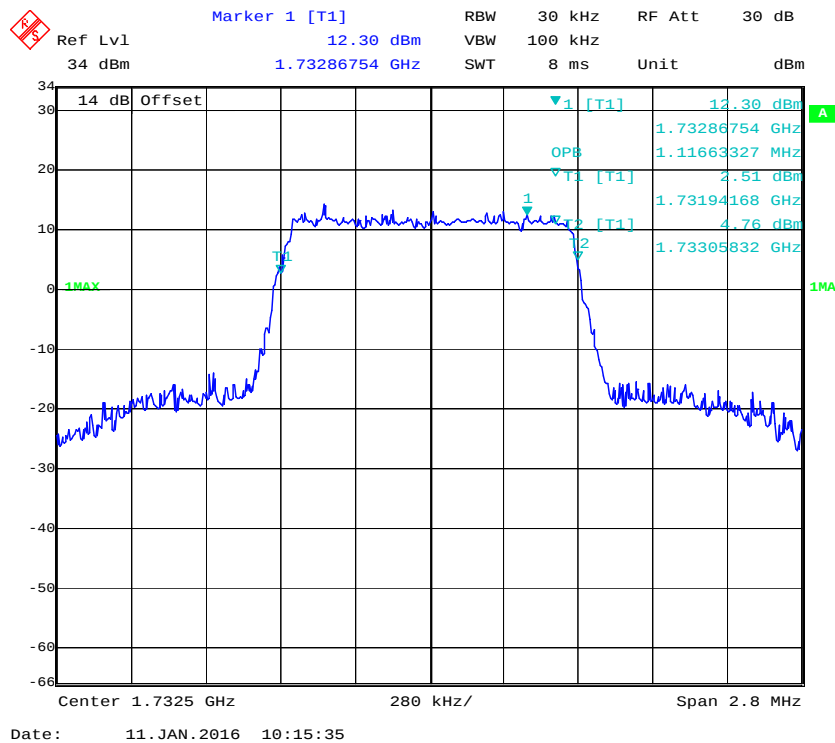QPSK (1.4 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (1.4 MHz) - 99% Occupied Bandwidth, Middle channel**

QPSK (3.0 MHz) - 99% Occupied Bandwidth, Middle channel

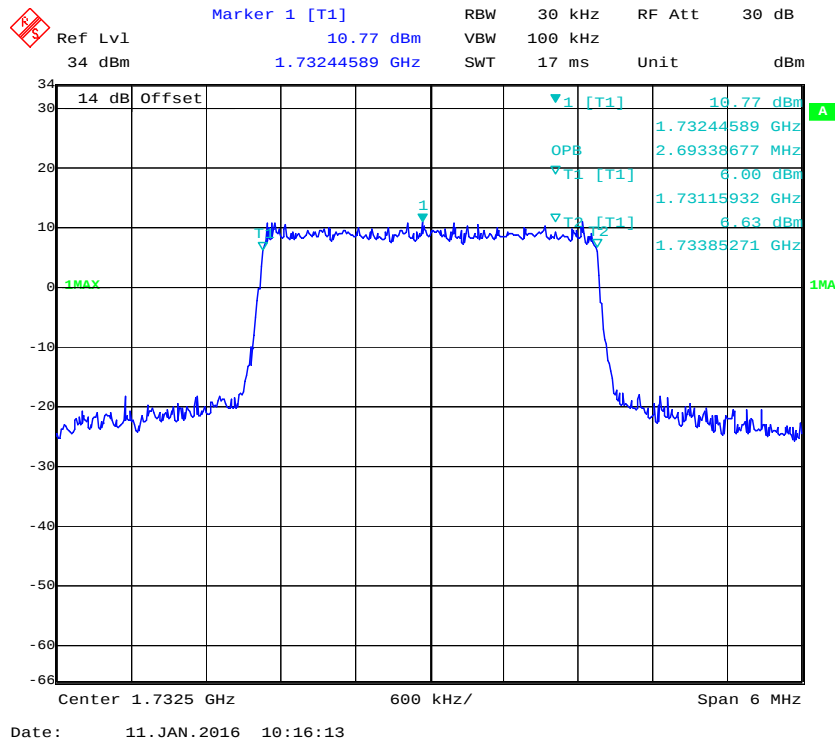

16-QAM (3.0 MHz) - 99% Occupied Bandwidth, Middle channel

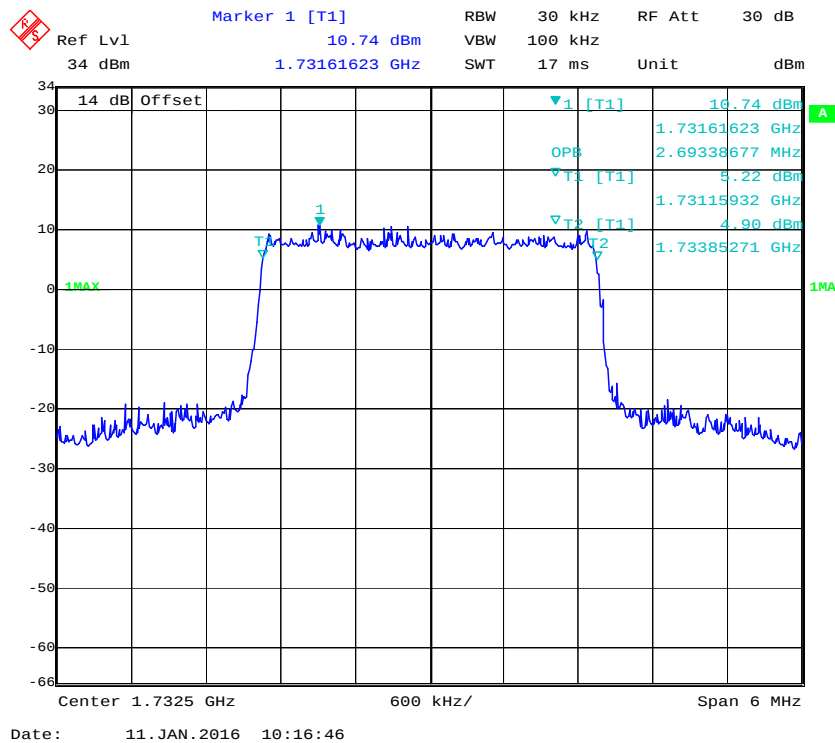

Ref Lvl 34 dBm
 Marker 1 [T1] 12.39 dBm
 RBW 100 kHz RF Att 30 dB
 VBW 300 kHz
 1.73238978 GHz
 Unit dBm
 5 ms
 14 dB Offset
 12.39 dBm
 1.73238978 GHz
 4.52905812 MHz
 8.34 dBm
 1.73022545 GHz
 7.26 dBm
 1.73475451 GHz
 1 MAX
 1 MAX
 Center 1.7325 GHz
 1 MHz/
 Span 10 MHz
 Date: 11. JAN. 2016 10:18:36


Ref Lvl 34 dBm
 Marker 1 [T1] 13.85 dBm
 1.73210922 GHz
 RBW 100 kHz
 VBW 300 kHz
 SWT 5 ms
 RF Att 30 dB
 Unit dBm

Label	Frequency (MHz)	Power (dBm)
1	1.73210922	13.85
OPB	4.54909820	5.81
T1	1.73020541	6.95
T1	1.73475451	-


Center 1.7325 GHz
 1 MHz/
 Span 10 MHz



Date: 11. JAN. 2016 10:17:32



QPSK (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

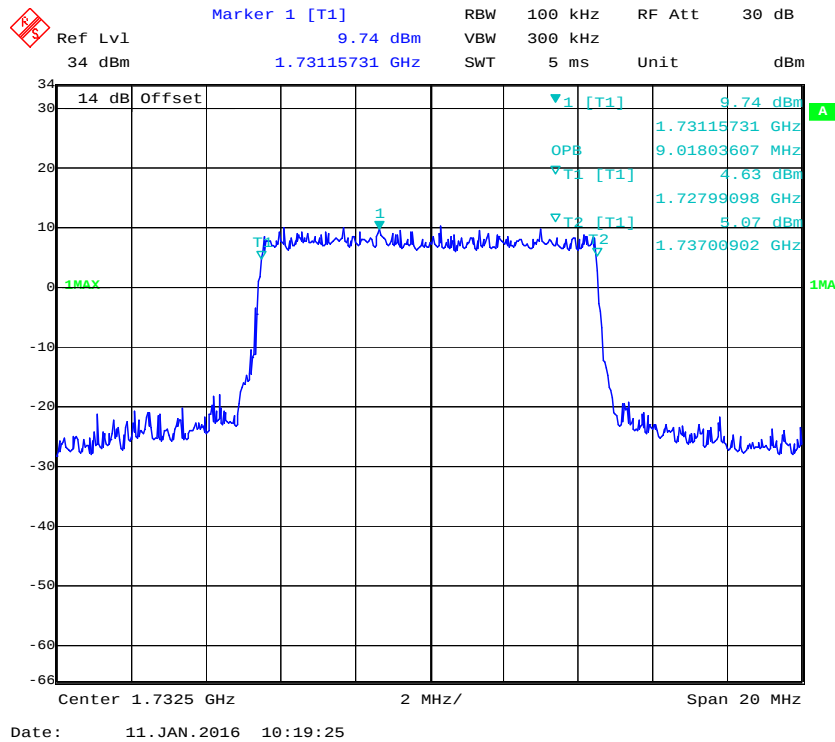


16-QAM (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

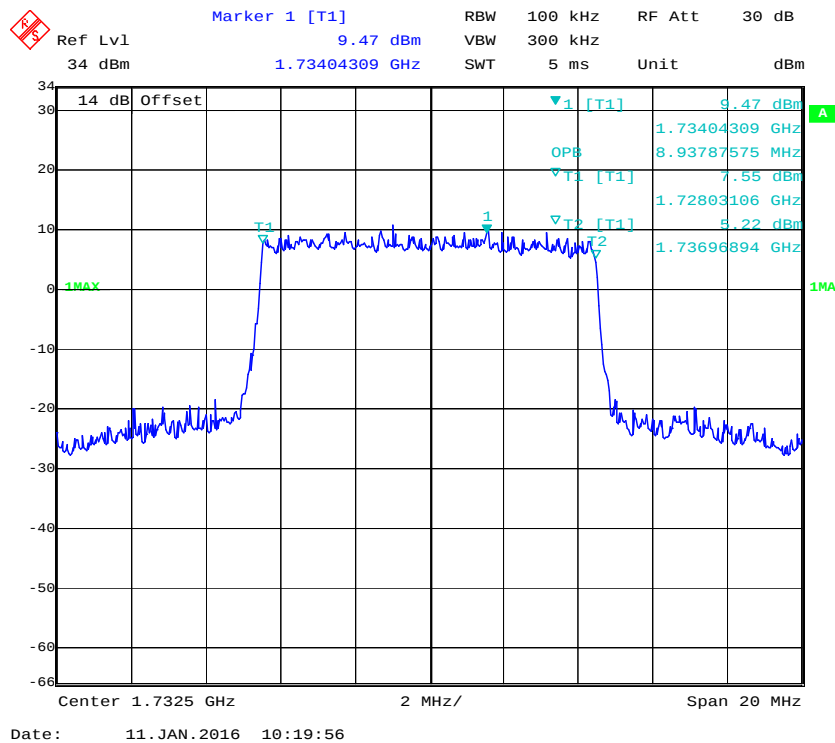

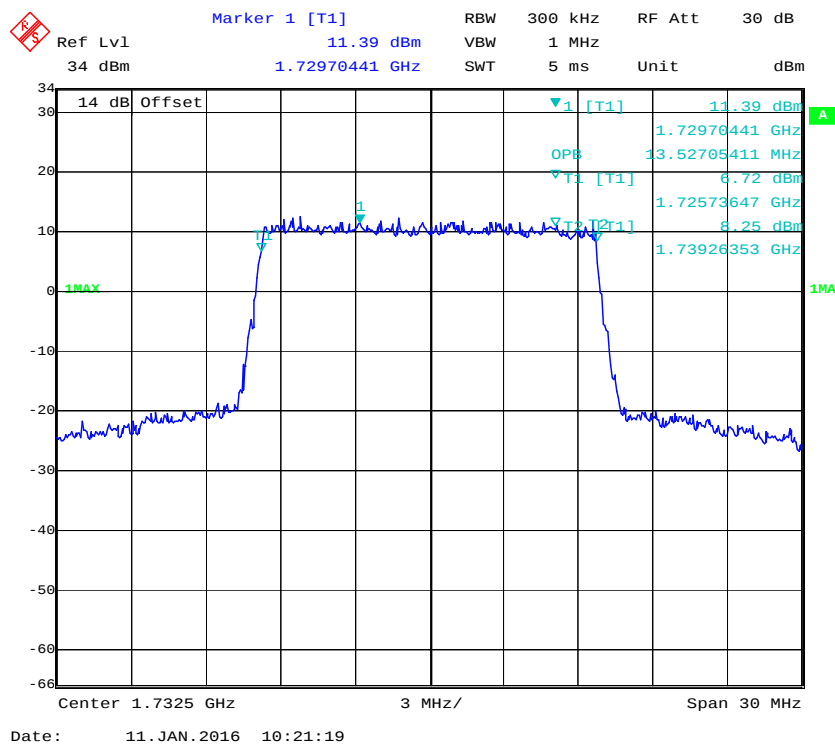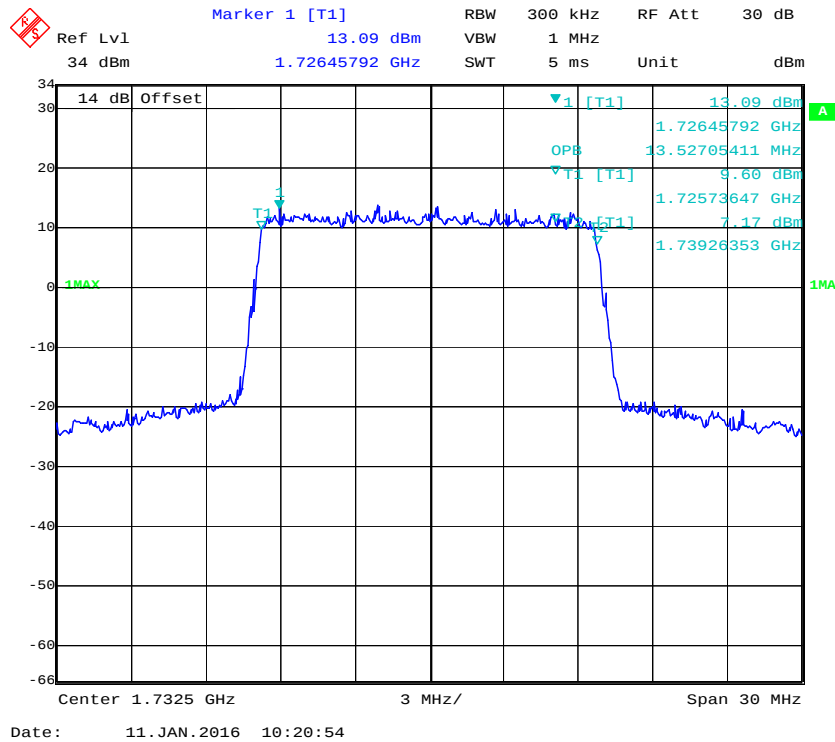


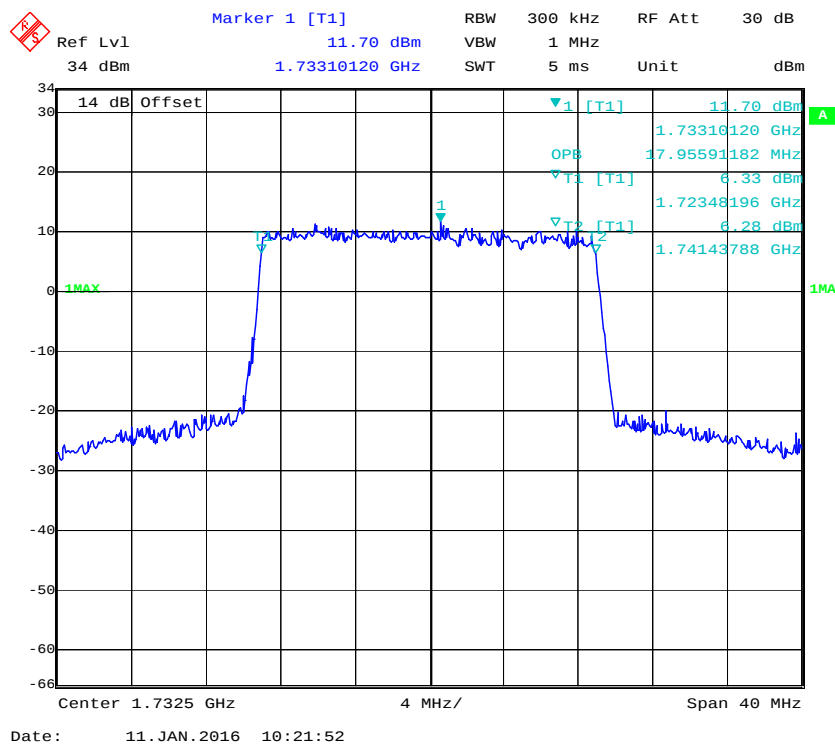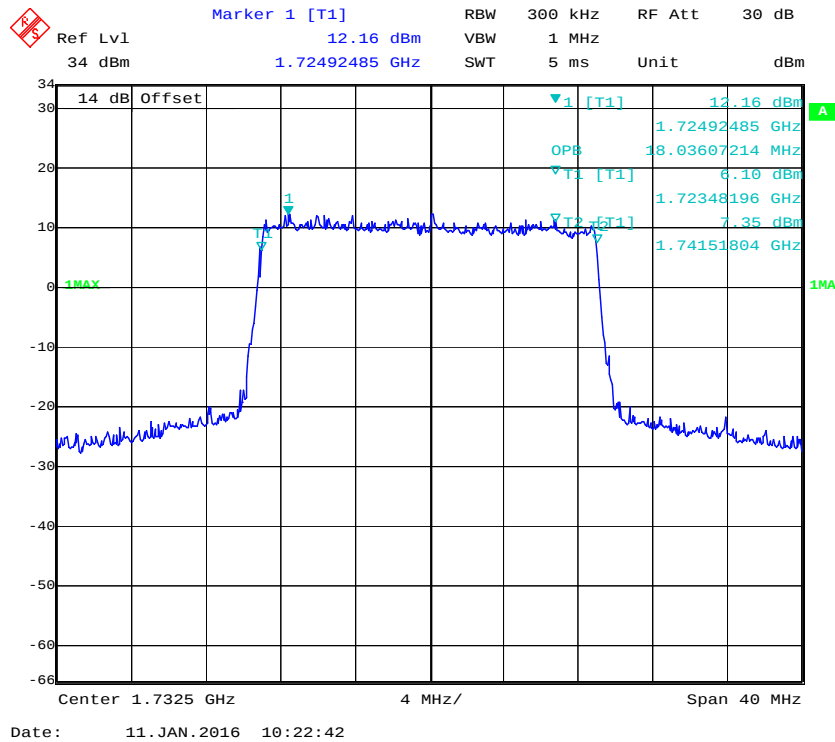

QPSK (1.4 MHz) - 26 dB Bandwidth, Middle channel

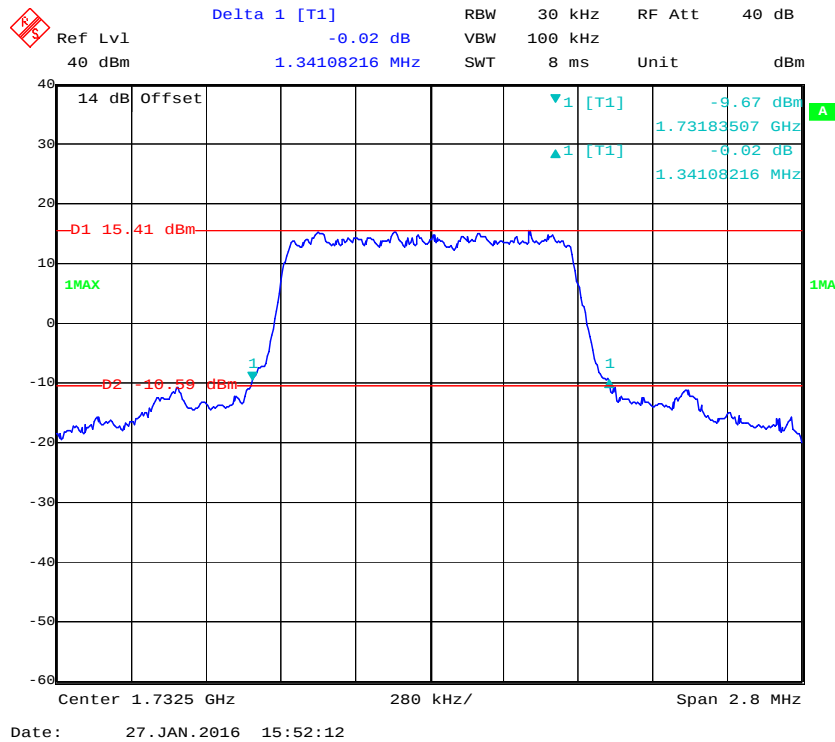

16-QAM (1.4 MHz) - 26 dB Bandwidth, Middle channel

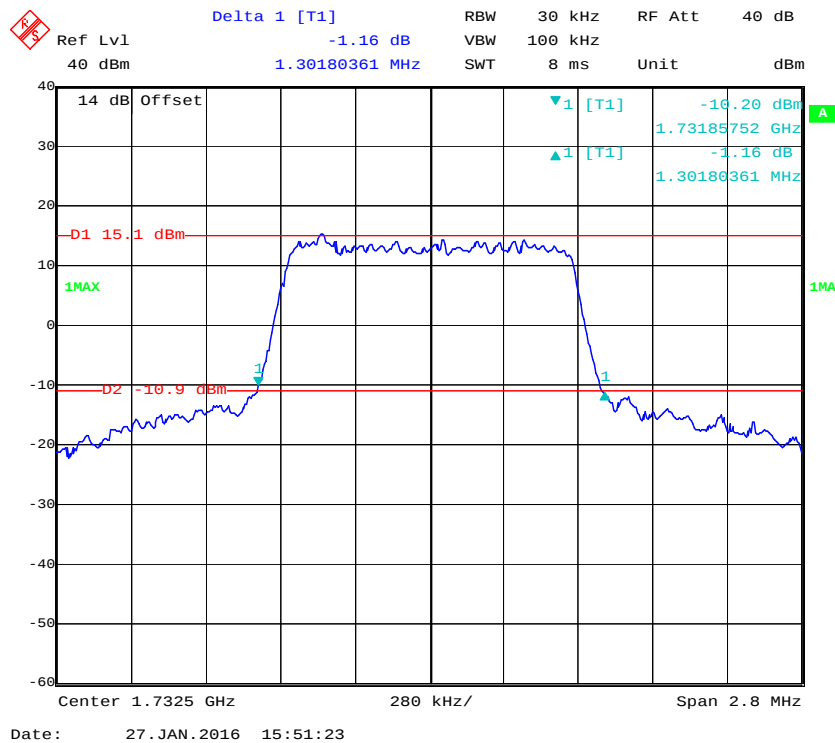

Ref Lvl 40 dBm

Delta 1 [T1] -3.14 dB

2.93386774 MHz

RBW 30 kHz

VBW 100 kHz

SWT 17 ms

RF Att 40 dB

Unit dBm

14 dB Offset

D1 13.07 dBm

D2 -12.93 dBm

1MAX

1 [T1] -11.14 dBm

1 [T1] -3.14 dB

1 [T1] 1.73105110 GHz

1 [T1] 2.93386774 MHz

Center 1.7325 GHz

600 kHz/

Span 6 MHz

Date: 27. JAN. 2016 15:53:31

Ref Lvl 40 dBm

Delta 1 [T1] -1.12 dB

RBW 30 kHz

VBW 100 kHz

RF Att 40 dB

SWT 17 ms

Unit dBm

14 dB Offset

D1 11.29 dBm

1MAX

D2 -14.71 dBm

1

1 [T1] -14.30 dBm

1.73103908 GHz

1 [T1] -1.12 dB

2.96993988 MHz


Center 1.7325 GHz

600 kHz/


Span 6 MHz

Date: 27. JAN. 2016 15:54:39


QPSK (5.0 MHz) - 26 dB Bandwidth, Middle channel

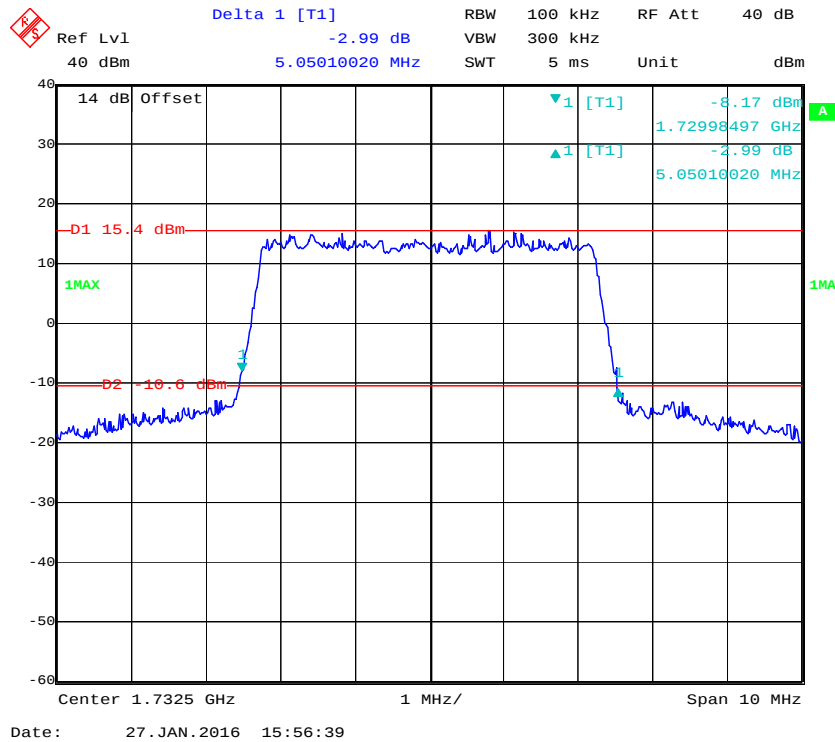


16-QAM (5.0 MHz) - 26 dB Bandwidth, Middle channel


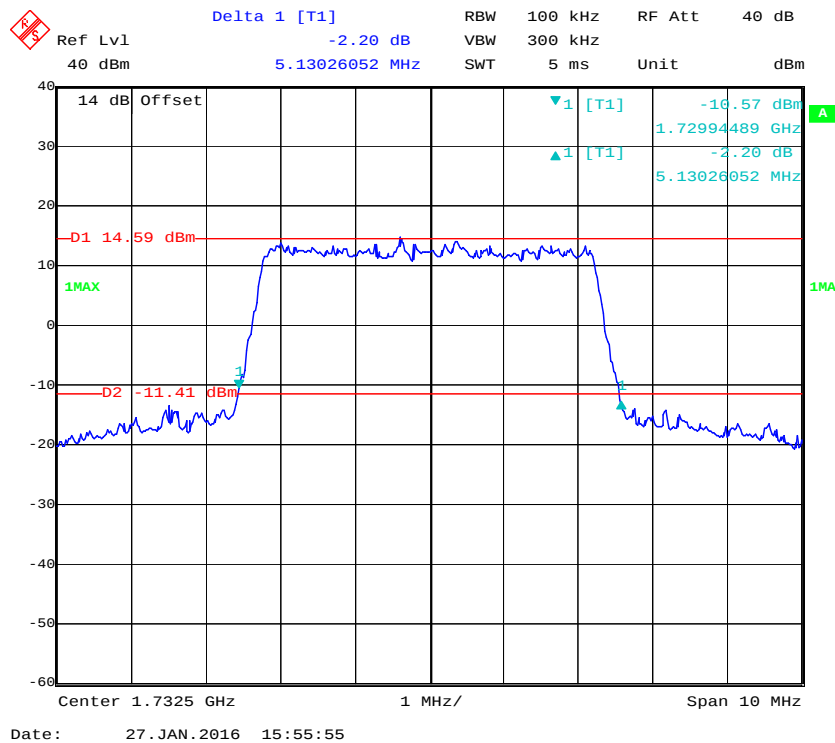




QPSK (10.0 MHz) - 26 dB Bandwidth, Middle channel

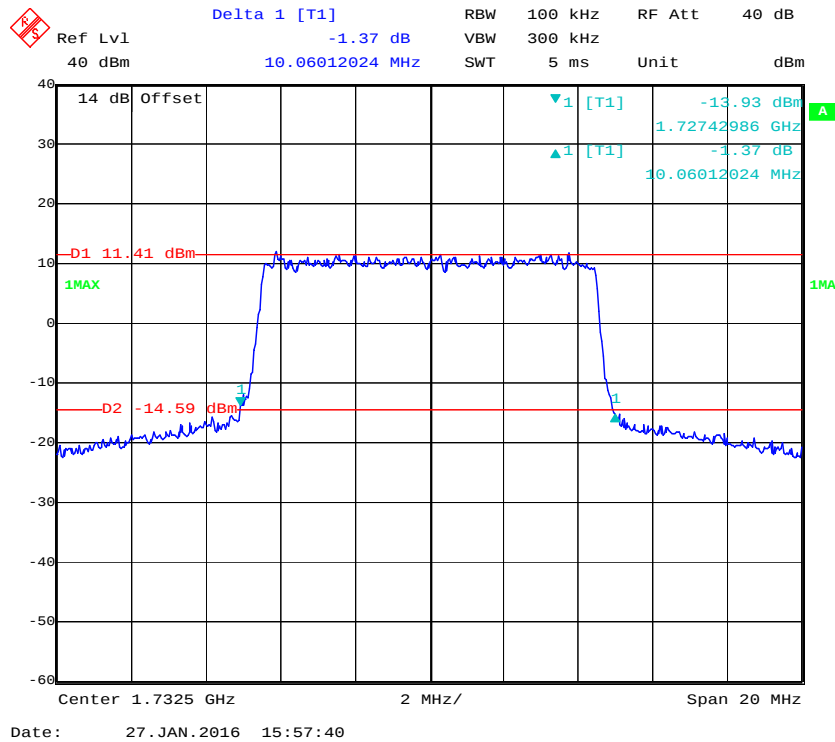

16-QAM (10.0 MHz) - 26 dB Bandwidth, Middle channel


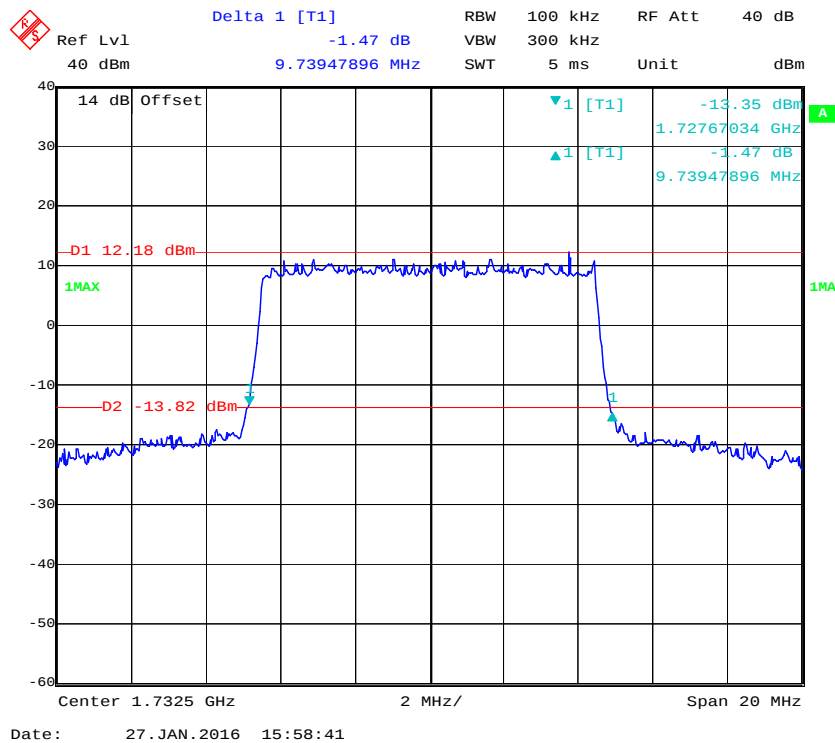


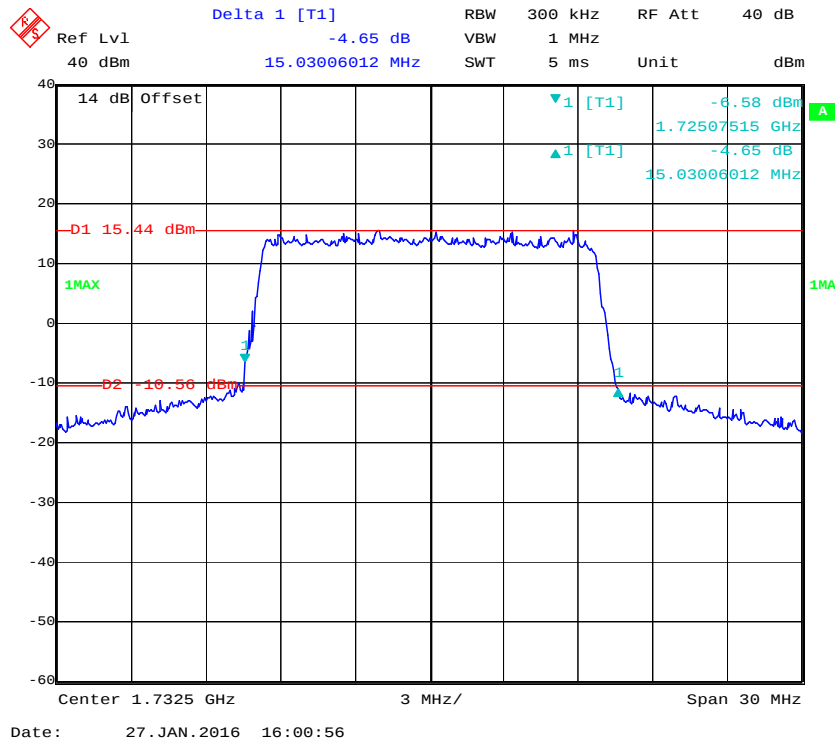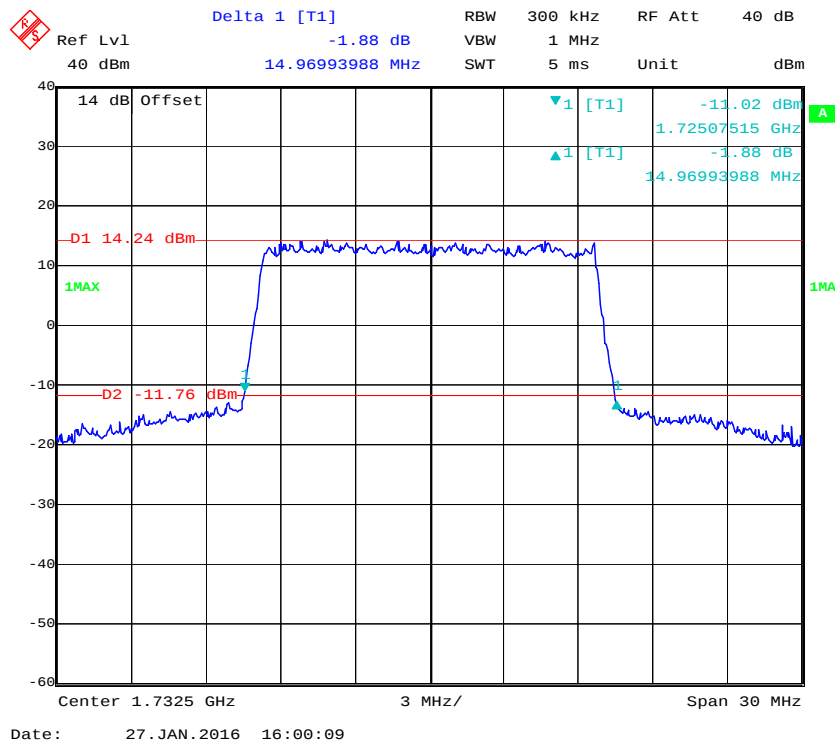QPSK (15.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (15.0 MHz) - 26 dB Bandwidth, Middle channel**

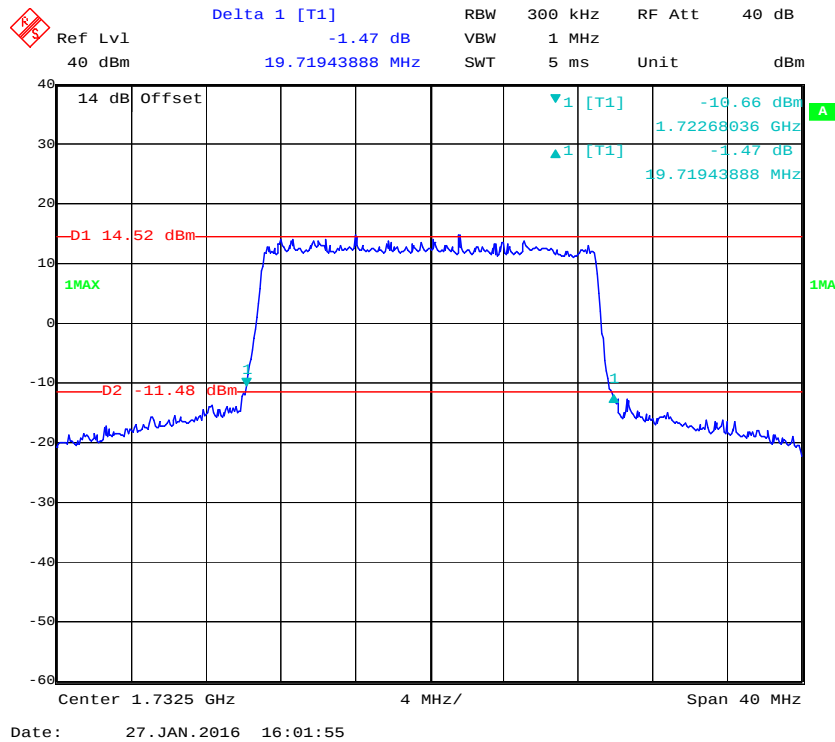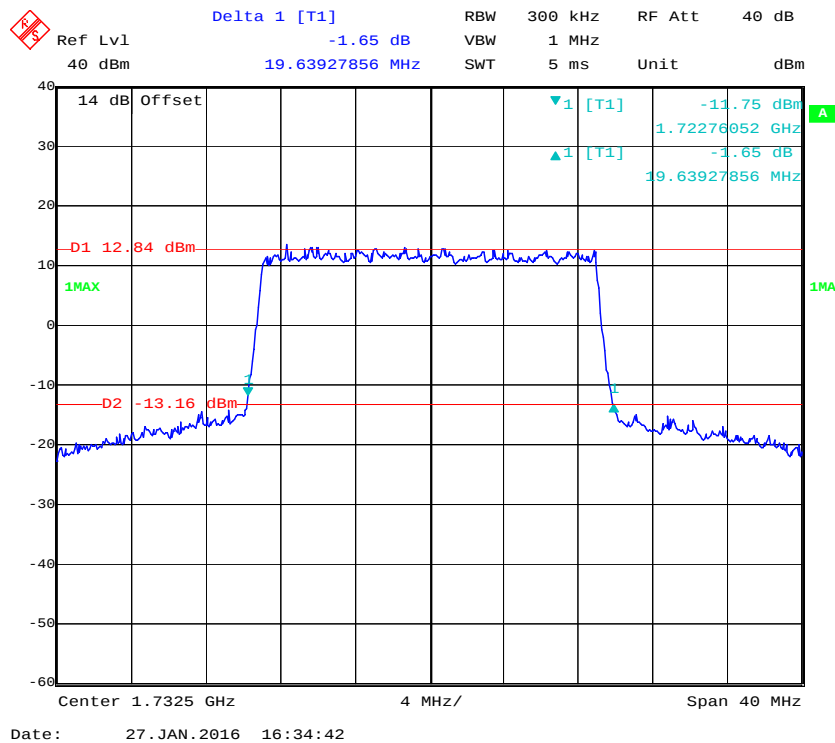
QPSK (20.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (20.0 MHz) - 26 dB Bandwidth, Middle channel**

LTE Band 7: (Middle Channel)


Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
5.0	QPSK	4.709	5.130
	16QAM	4.589	5.050
10.0	QPSK	9.138	9.860
	16QAM	9.098	9.780
15.0	QPSK	15.270	15.090
	16QAM	14.489	14.850
20.0	QPSK	18.116	19.319
	16QAM	18.196	19.559

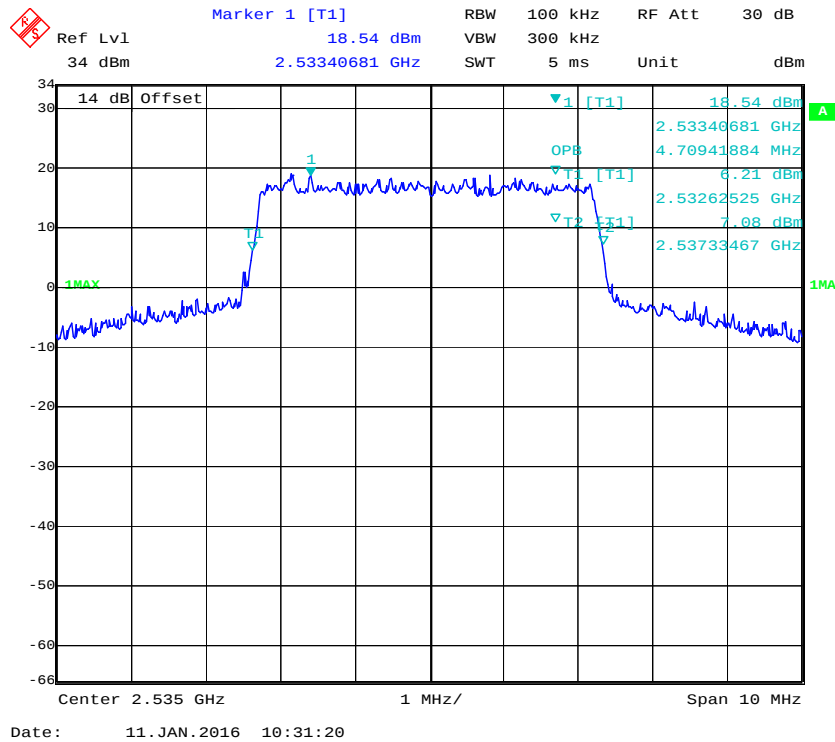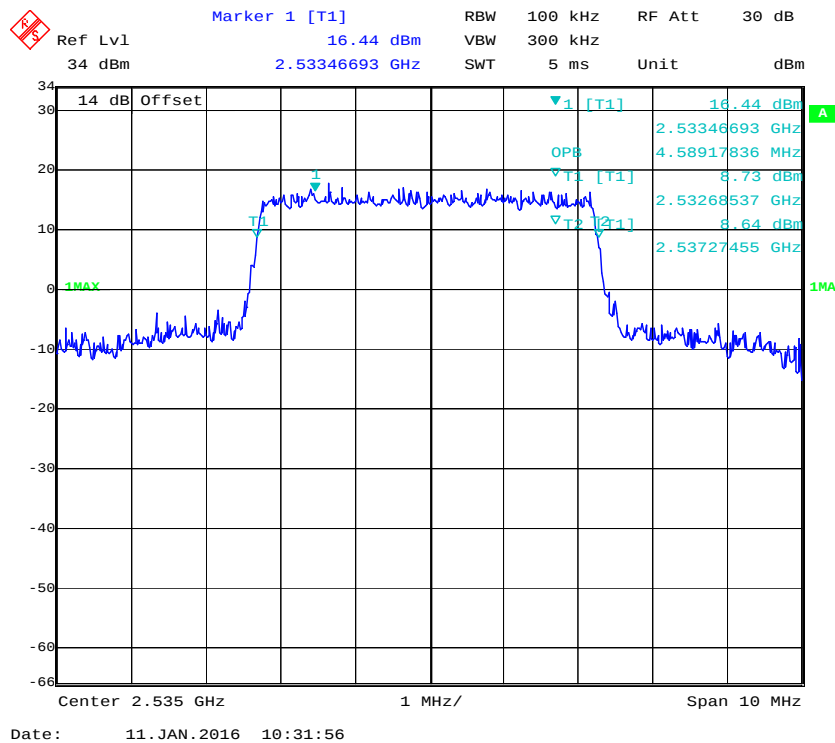QPSK (5.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Middle channel**


QPSK (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

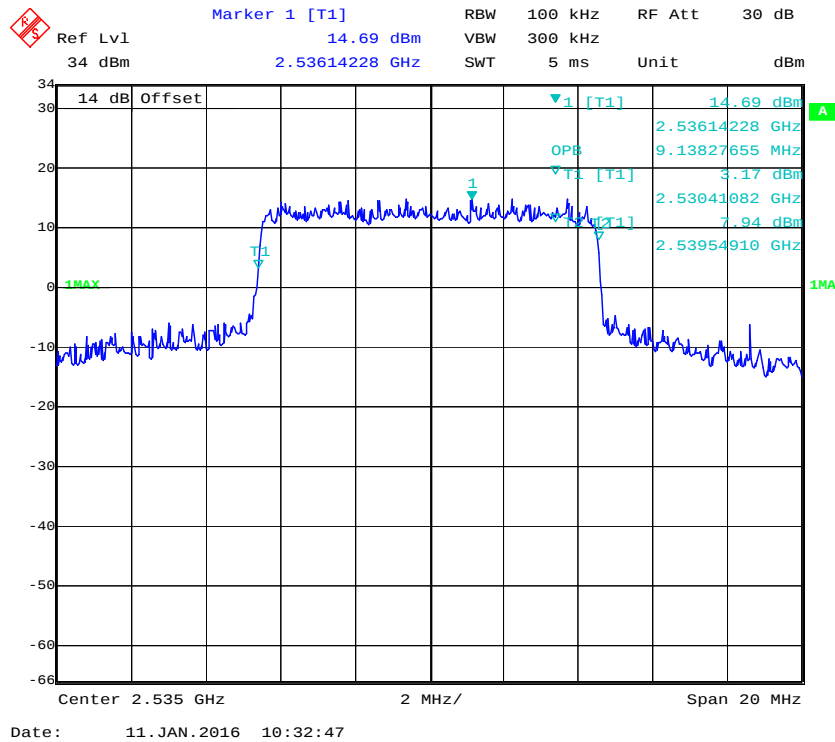


16-QAM (10.0MHz) - 99% Occupied Bandwidth, Middle channel


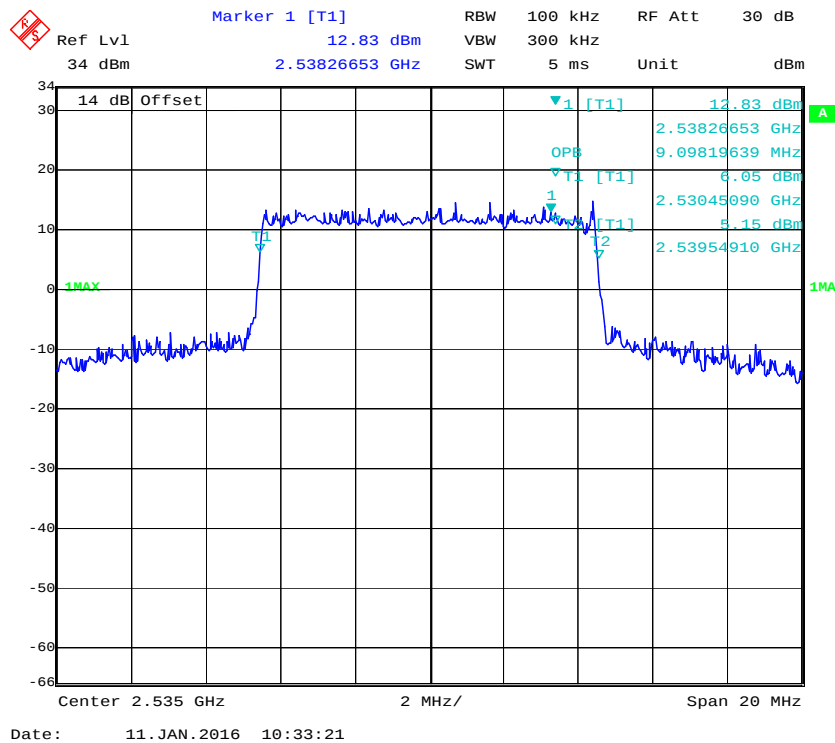


QPSK (15.0 MHz) - 99% Occupied Bandwidth, Middle channel

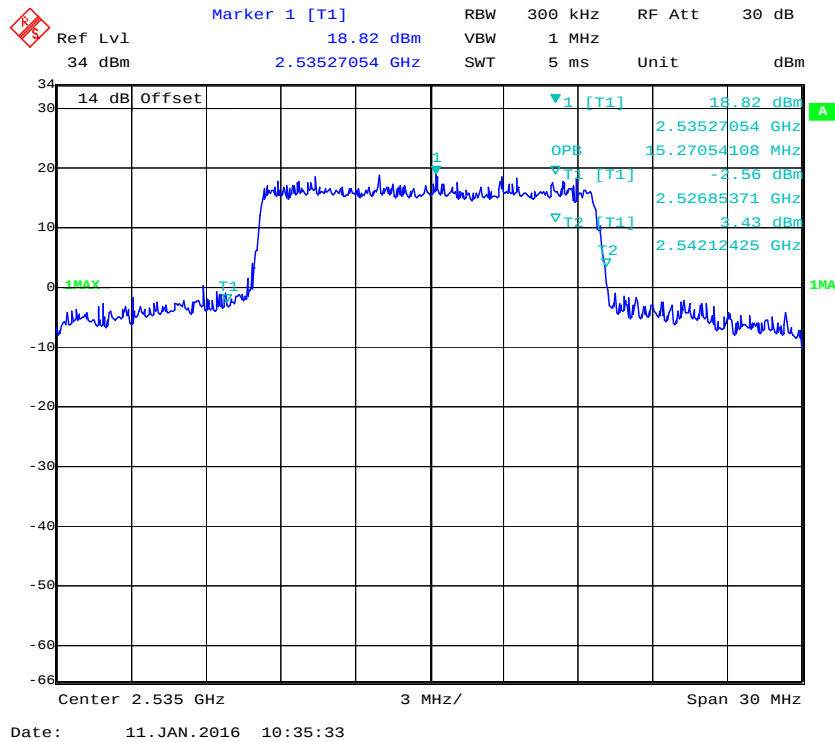


16-QAM (15.0 MHz) - 99% Occupied Bandwidth, Middle channel

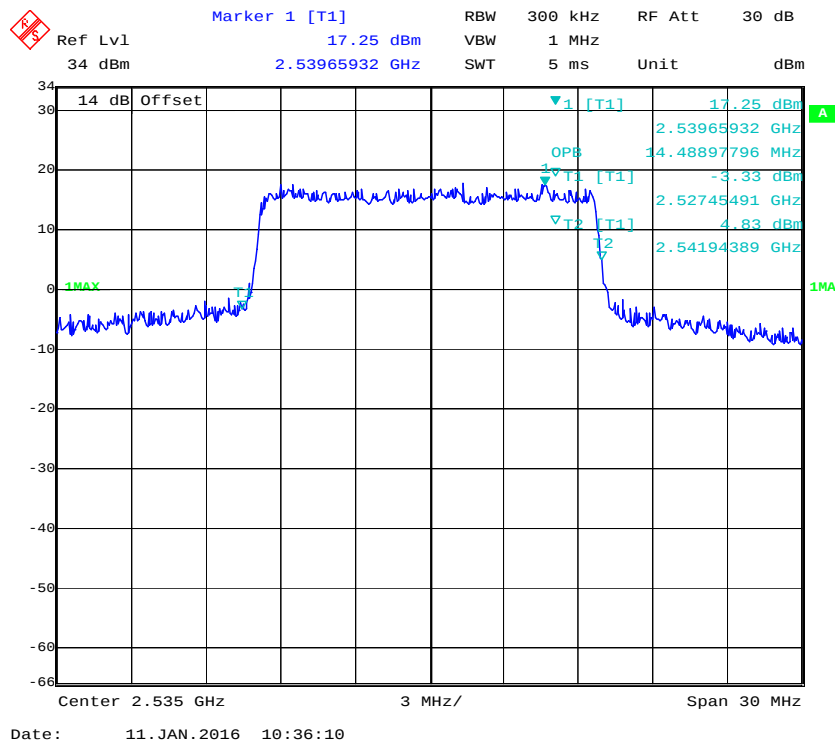


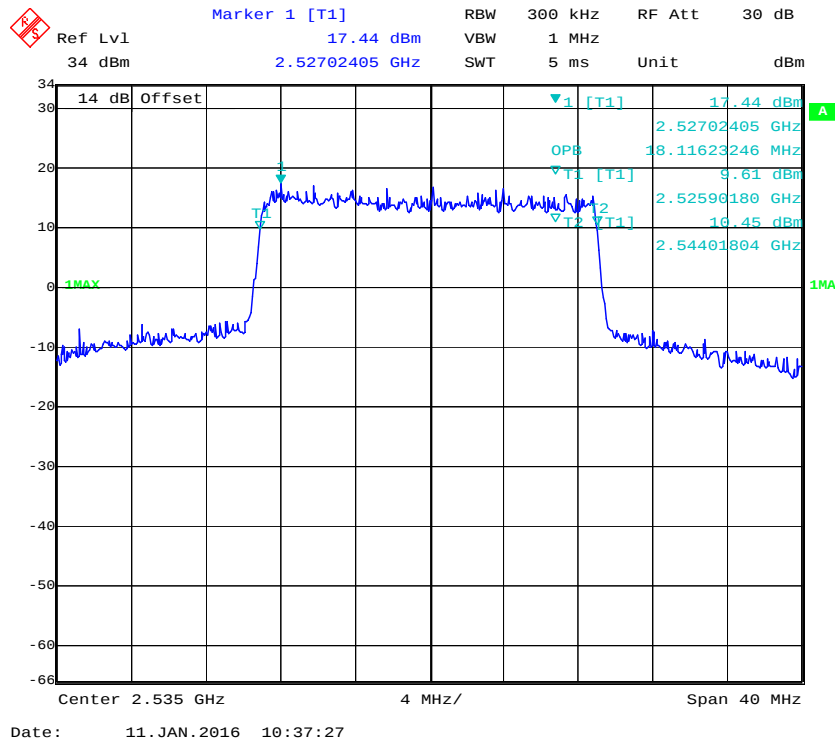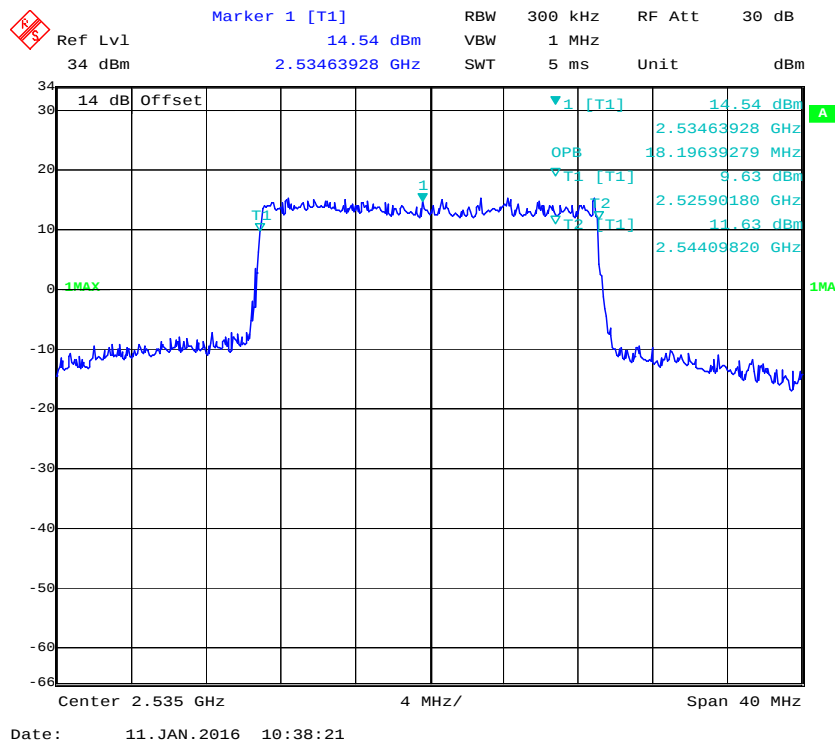QPSK (20.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (20.0 MHz) - 99% Occupied Bandwidth, Middle channel**


QPSK (5.0 MHz) - 26 dB Bandwidth, Middle channel

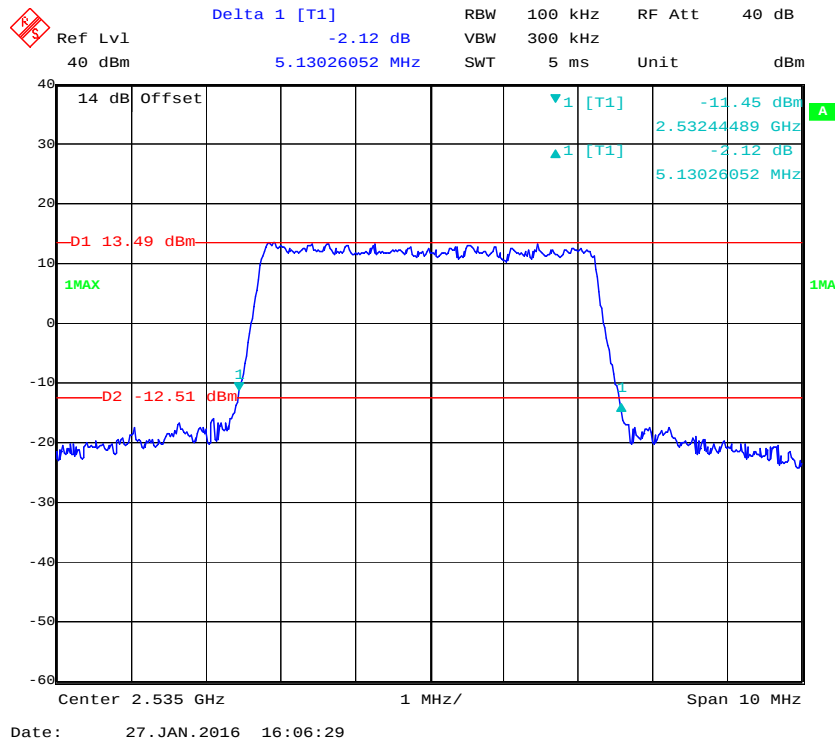


16-QAM (5.0 MHz) - 26 dB Bandwidth, Middle channel

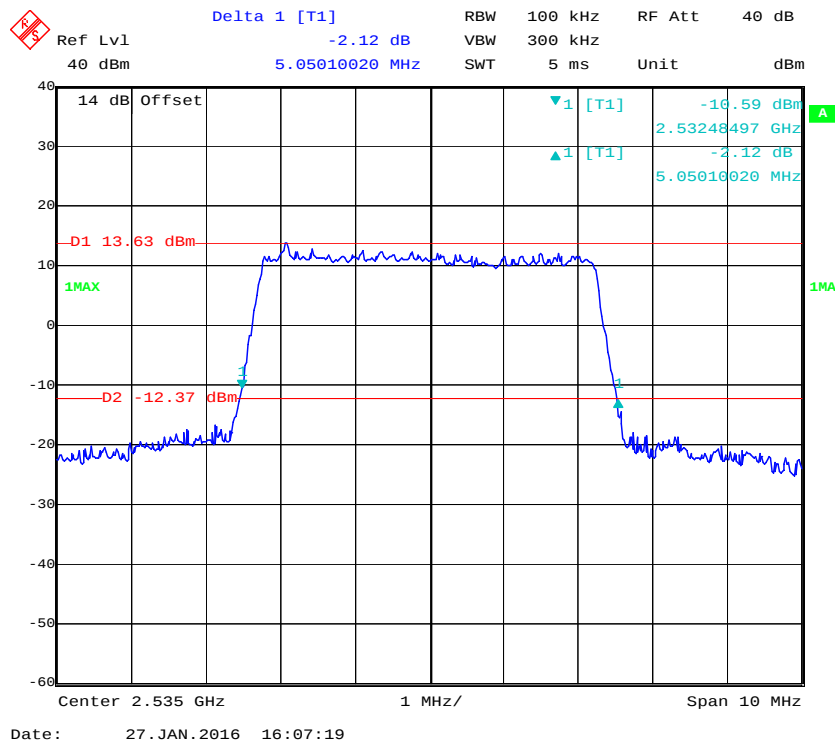


QPSK (10.0 MHz) - 26 dB Bandwidth, Middle channel

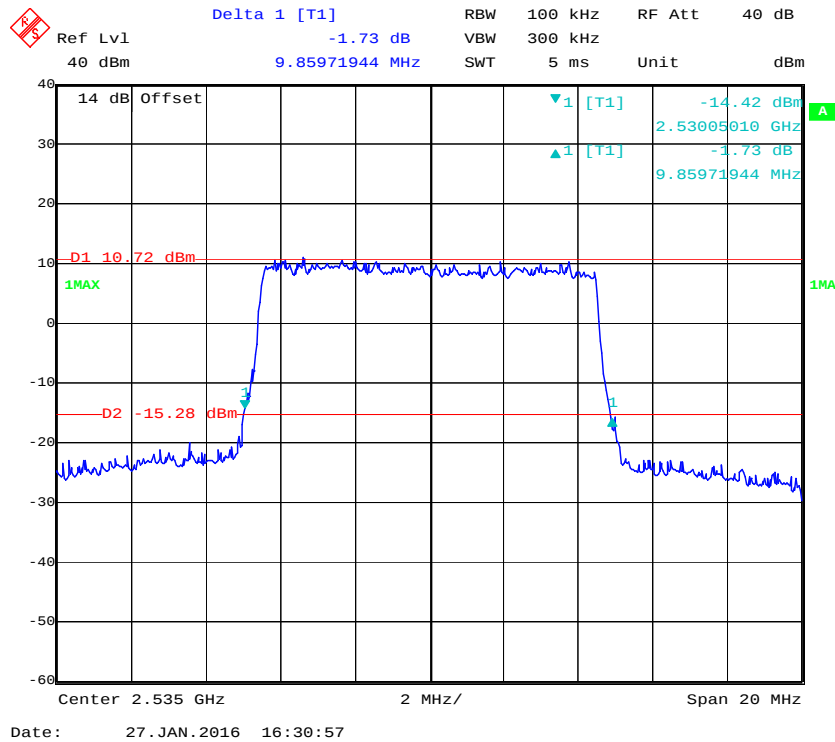


16-QAM (10.0 MHz) - 26 dB Bandwidth, Middle channel

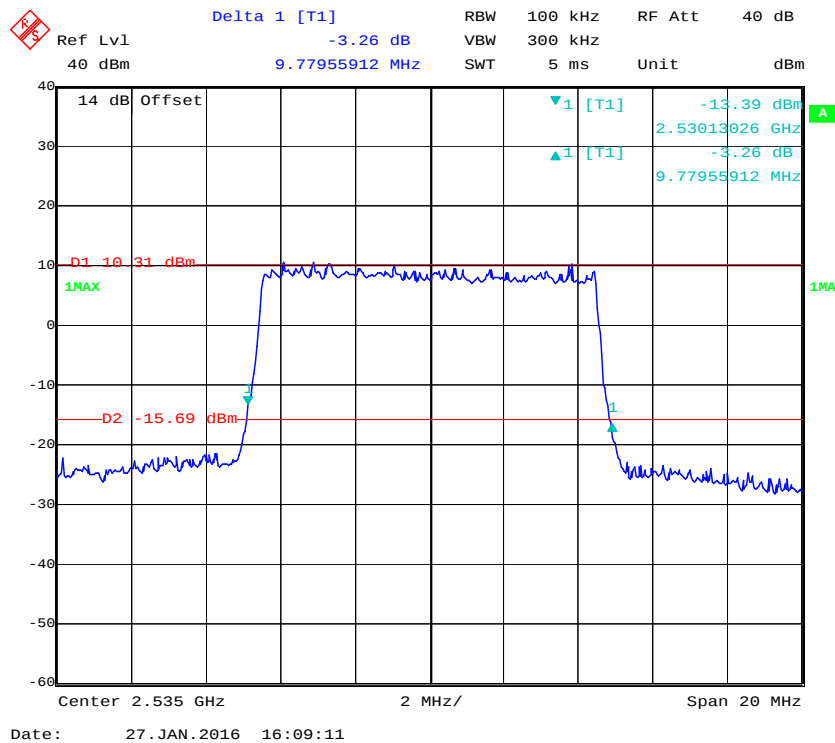


QPSK (15.0 MHz) - 26 dB Bandwidth, Middle channel

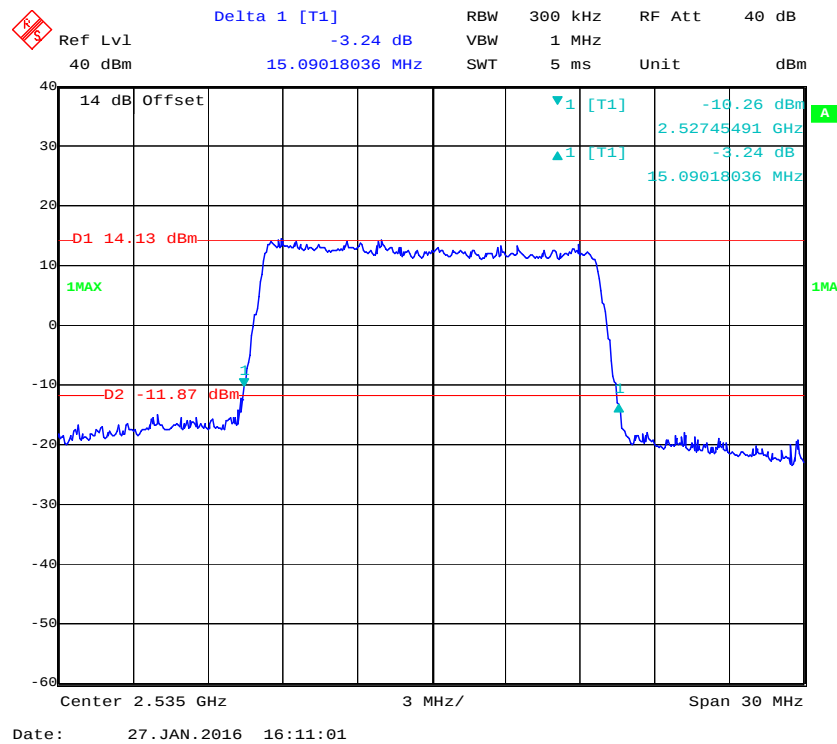


16-QAM (15.0 MHz) - 26 dB Bandwidth, Middle channel

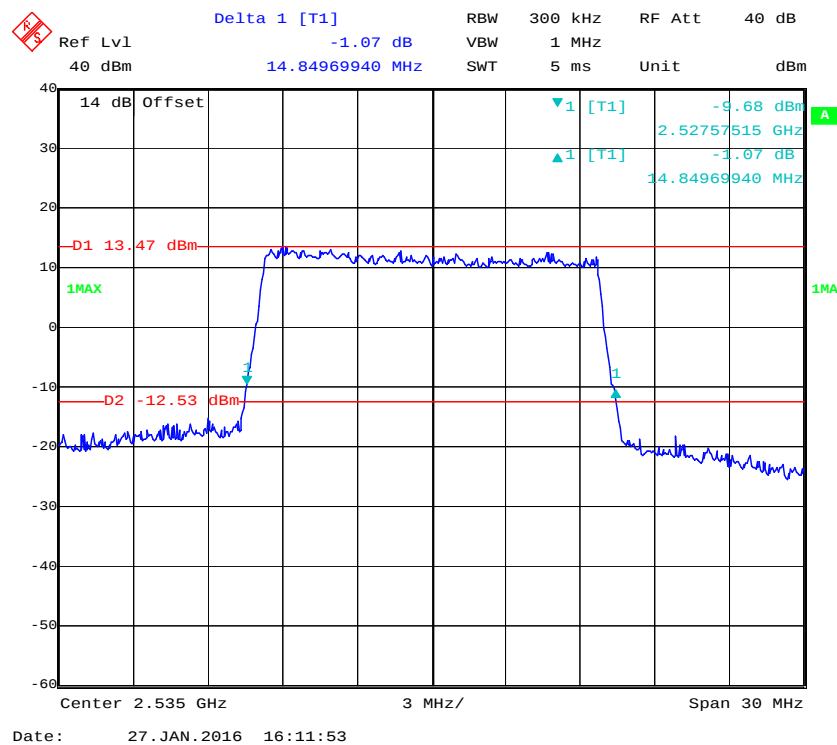

QPSK (20.0 MHz) - 26 dB Bandwidth, Middle channel


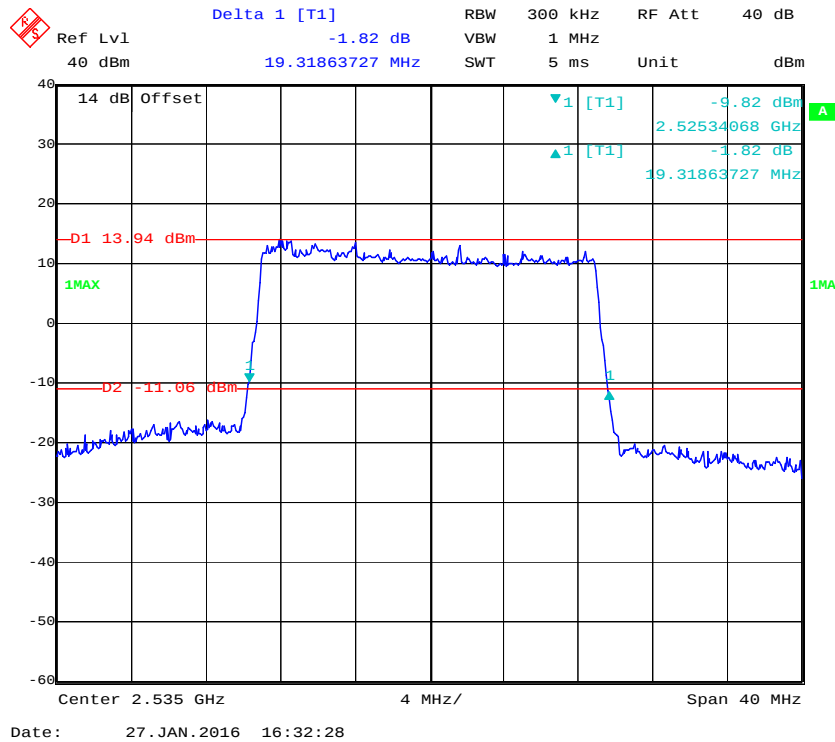




16-QAM (20.0 MHz) - 26 dB Bandwidth, Middle channel

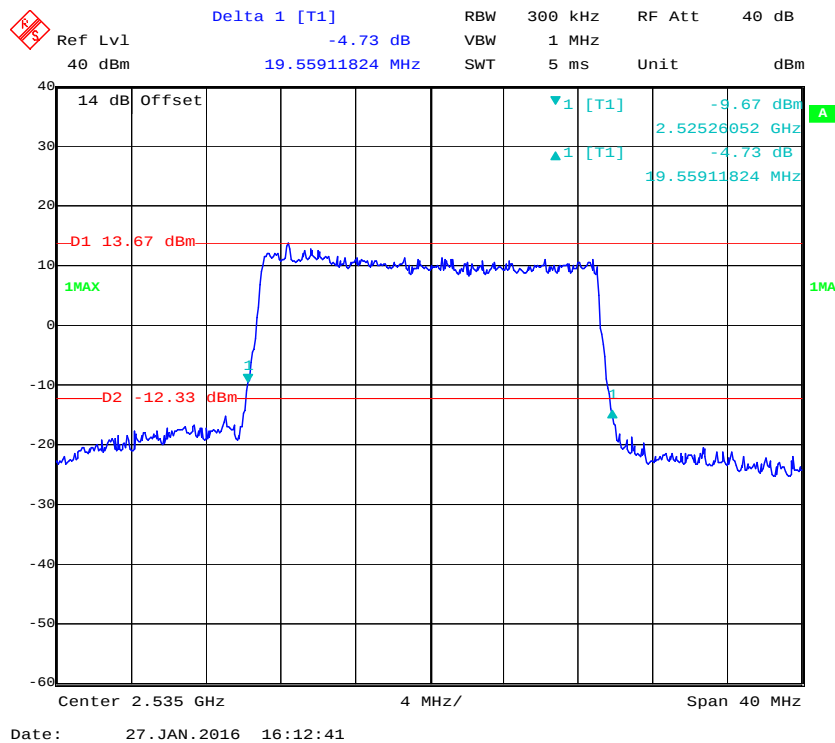

LTE Band 17: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
5.0	QPSK	4.569	5.170
	16QAM	4.569	5.110
10.0	QPSK	9.058	9.860
	16QAM	9.018	9.780

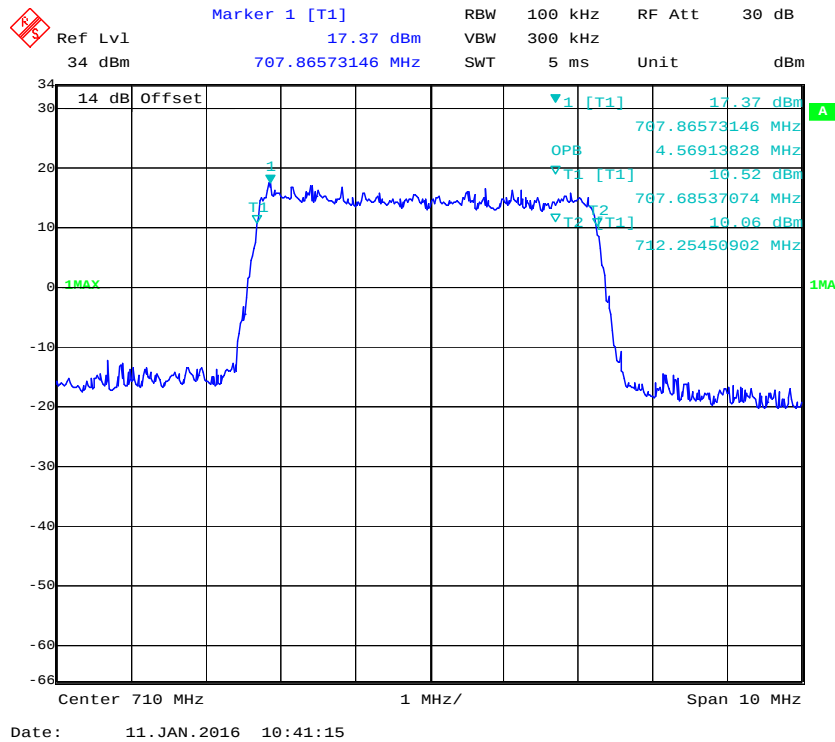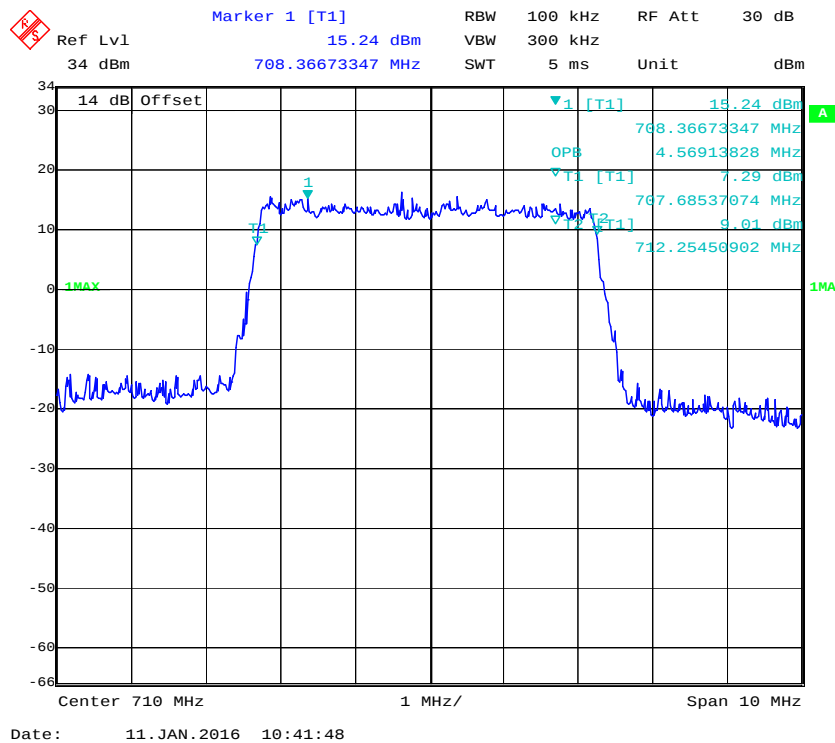QPSK (5.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Middle channel**

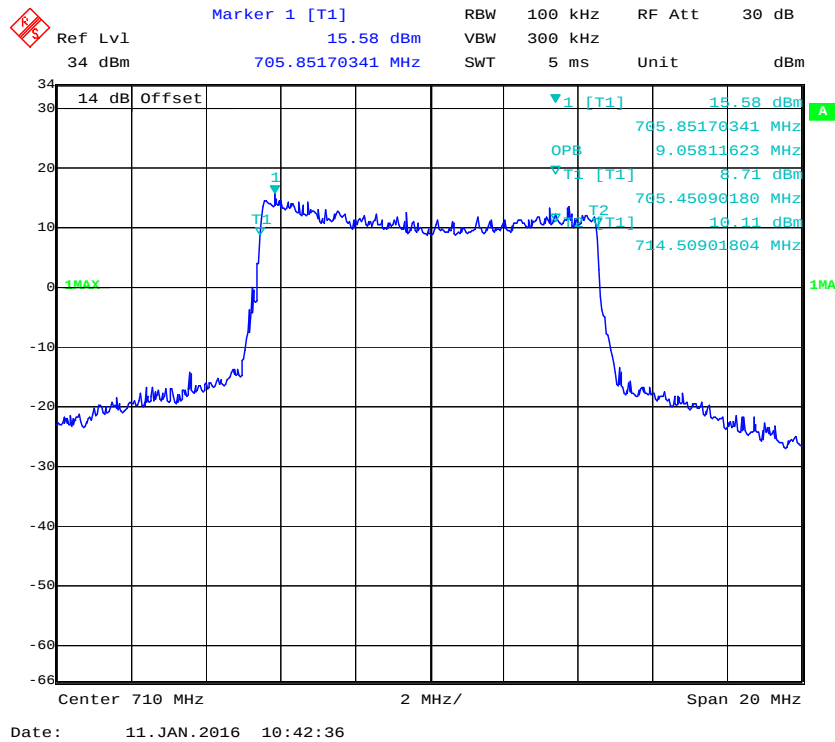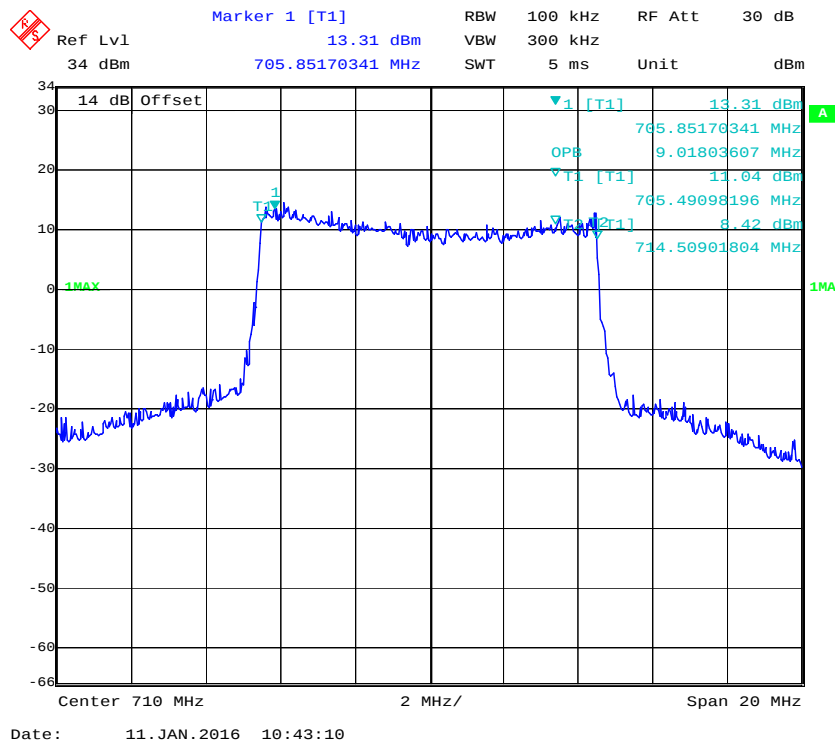QPSK (10.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (10.0 MHz) - 99% Occupied Bandwidth, Middle channel**

[illegible]

Ref Lvl 40 dBm

Delta 1 [T1] -1.76 dB

RBW 100 kHz

VBW 300 kHz

RF Att 40 dB

SWT 5 ms

Unit dBm

14 dB Offset

D1 15.78 dBm

D2 10.22 dBm

1 [T1] -6.59 dBm

1 [T1] -1.76 dB

1 [T1] 767.42484970 MHz

1 [T1] 5.11022044 MHz



1MAX

Center 710 MHz

1 MHz/

Span 10 MHz

Date: 27. JAN. 2016 16:17:10

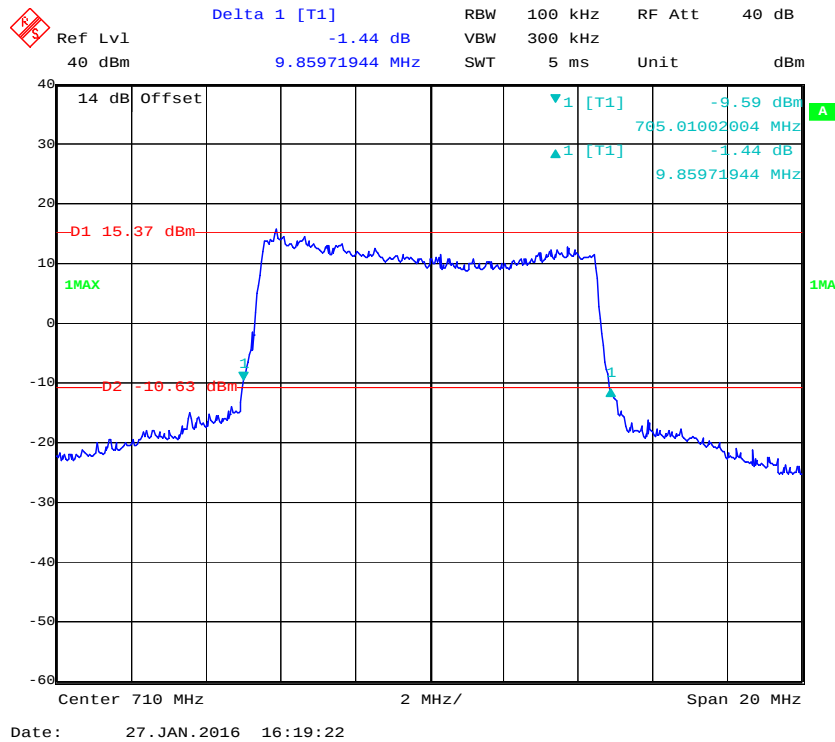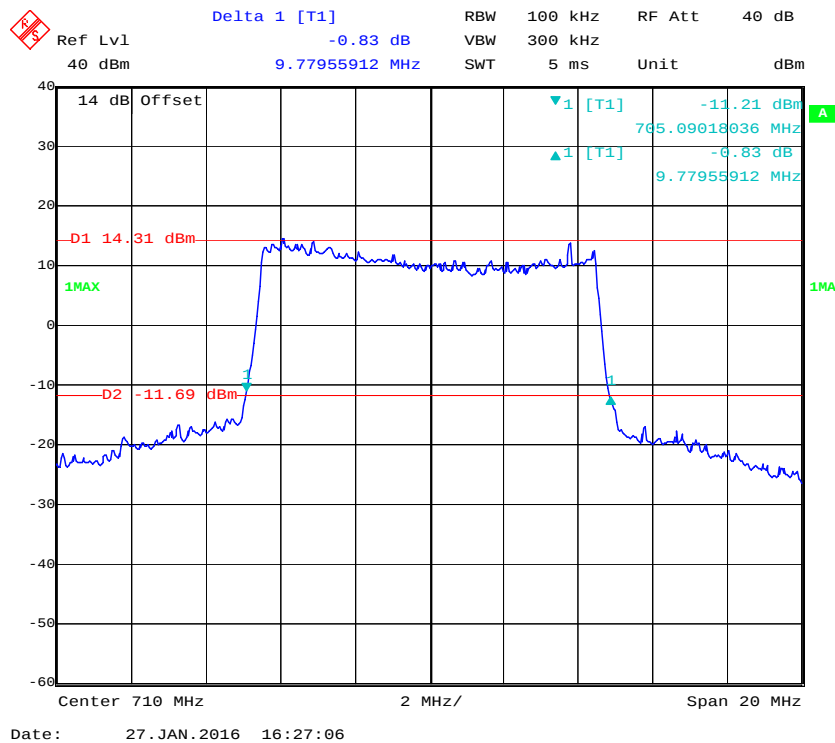QPSK (10.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (10.0 MHz) - 26 dB Bandwidth, Middle channel**

FCC §2.1051, §22.917(a) & §24.238(a) & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standards

FCC §2.1051, §22.917(a) and §24.238(a) and §27.53.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

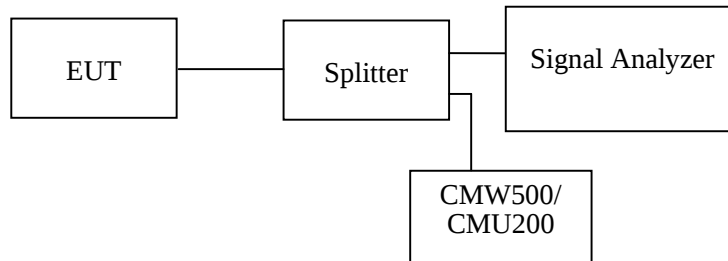

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-146520-wh	2015-11-23	2016-11-23
Ducommun technologies	RF Cable	RG-214	4	2015-06-15	2016-06-15
WEINSCHTEL	10dB Attenuator	5324	AU0709	2015-06-18	2016-06-18

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	10~23 °C
Relative Humidity:	48~55 %
ATM Pressure:	100.9~101.0kPa

The testing was performed by Haiguo Li on 2016-01-15 and 2016-01-27.

Please refer to the following plots.

Cellular Band (Part 22H)

30 MHz – 1 GHz (GSM Mode)

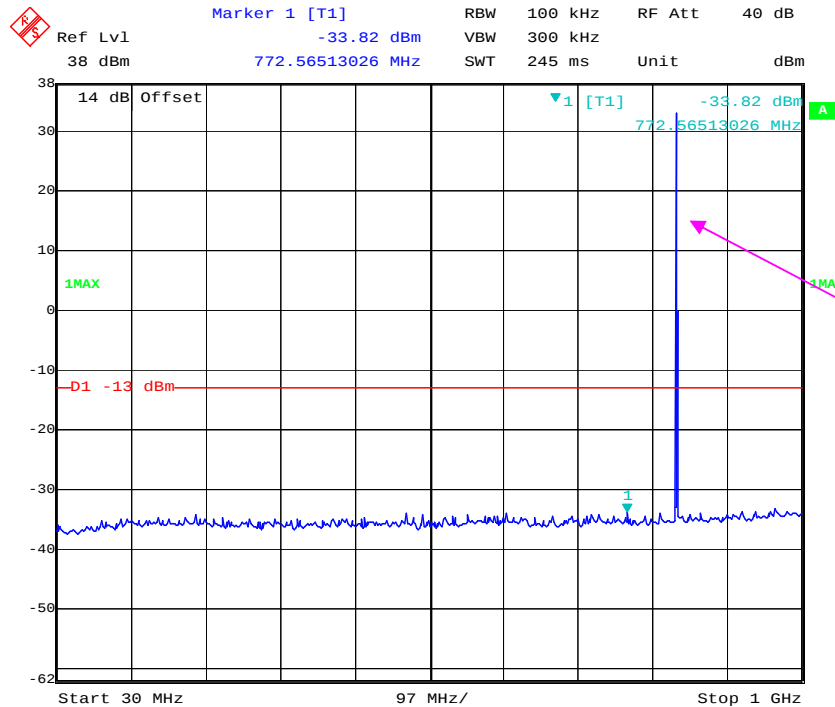


Date: 15.JAN.2016 07:37:54

1 GHz – 10 GHz (GSM Mode)




Date: 15.JAN.2016 07:36:29

30 MHz – 1 GHz (WCDMA Mode)

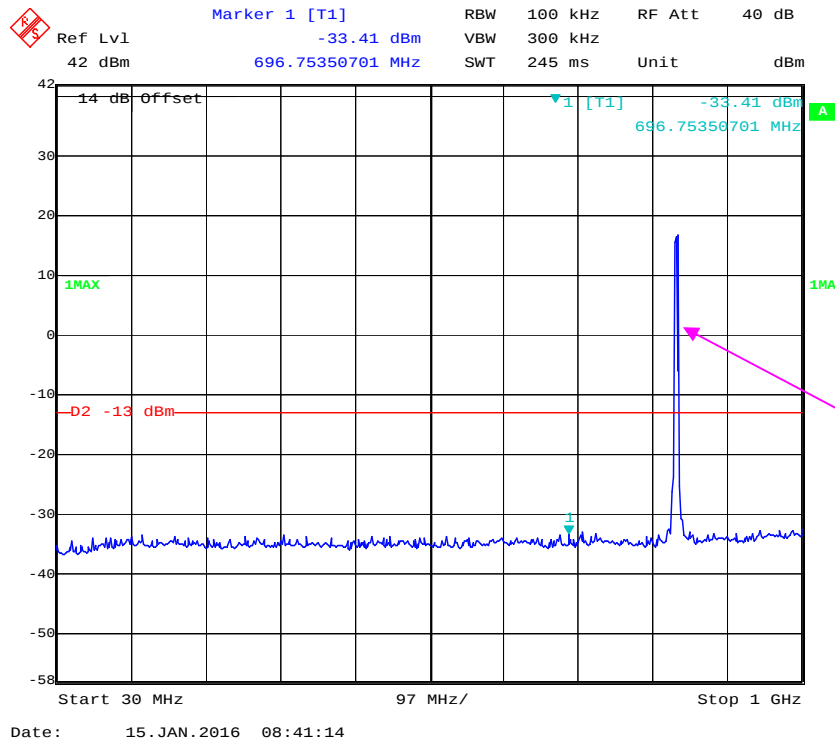


1 GHz – 10 GHz (WCDMA Mode)

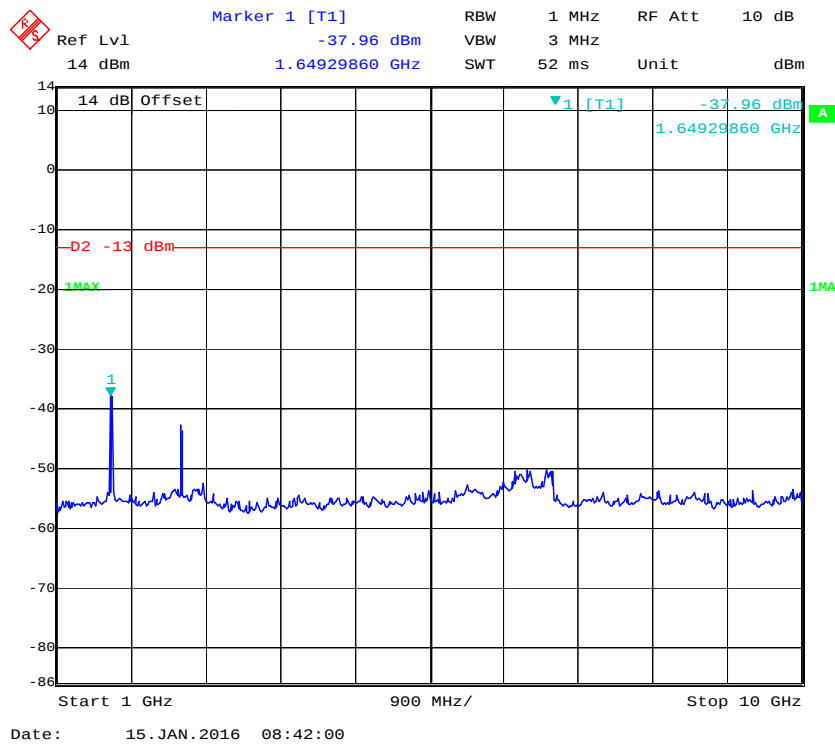


PCS Band (Part 24E)

30 MHz – 1 GHz (GSM Mode)

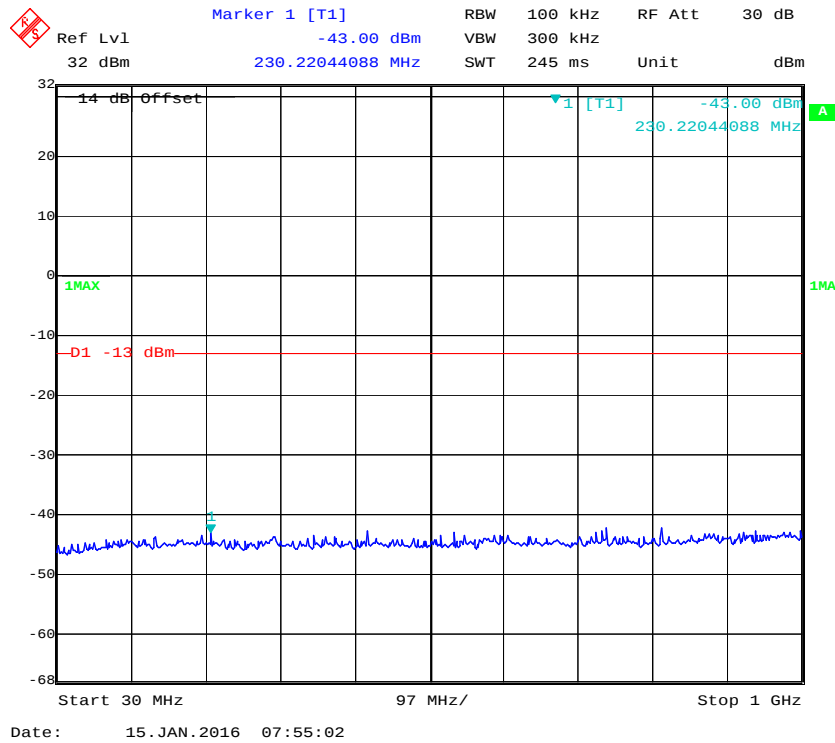


1 GHz – 2 GHz (GSM Mode)

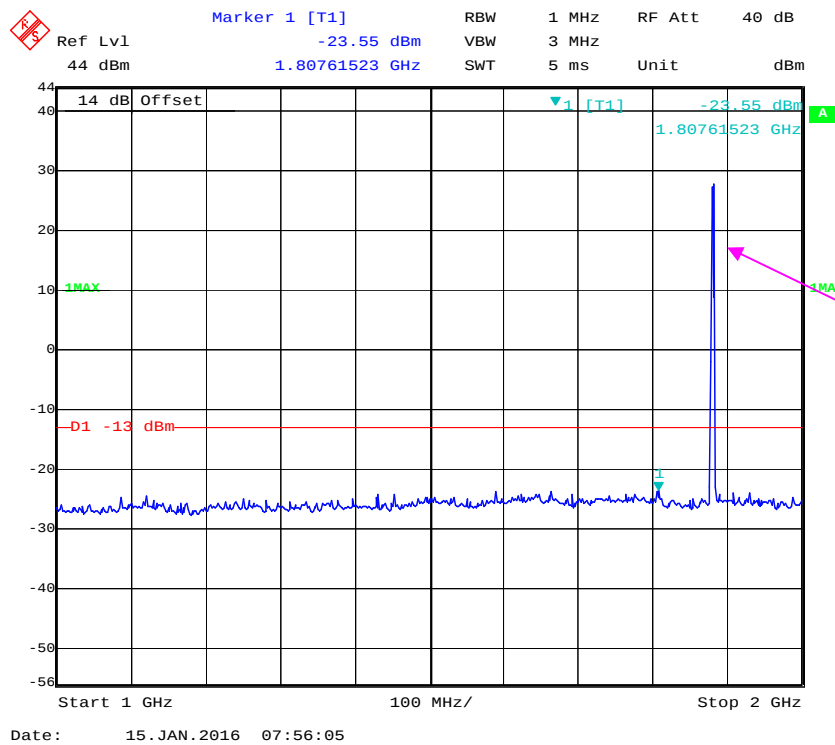


Fundamental test


2 GHz – 20 GHz (GSM Mode)

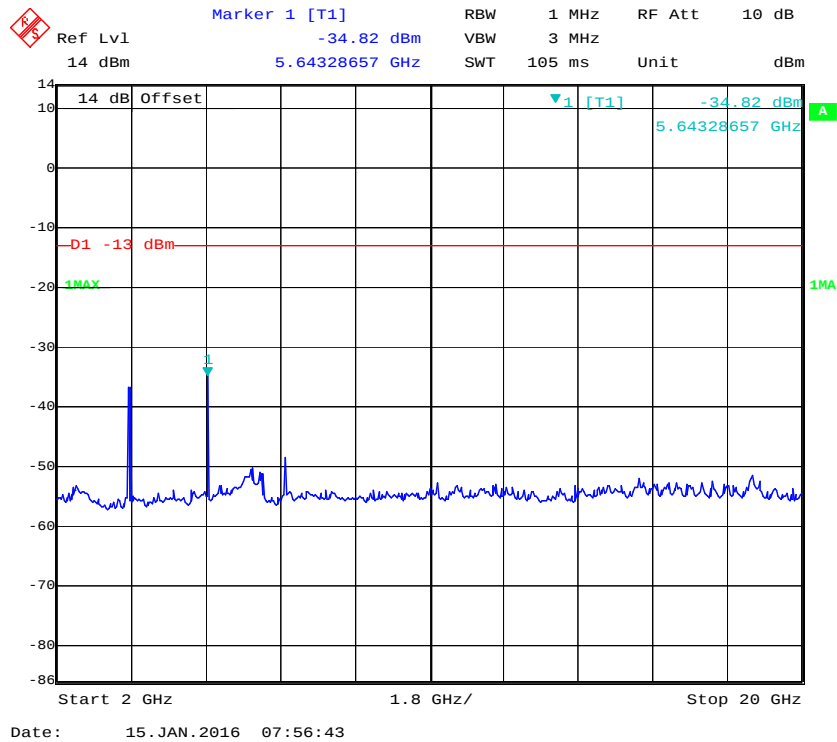


30 MHz – 1 GHz (WCDMA Mode)

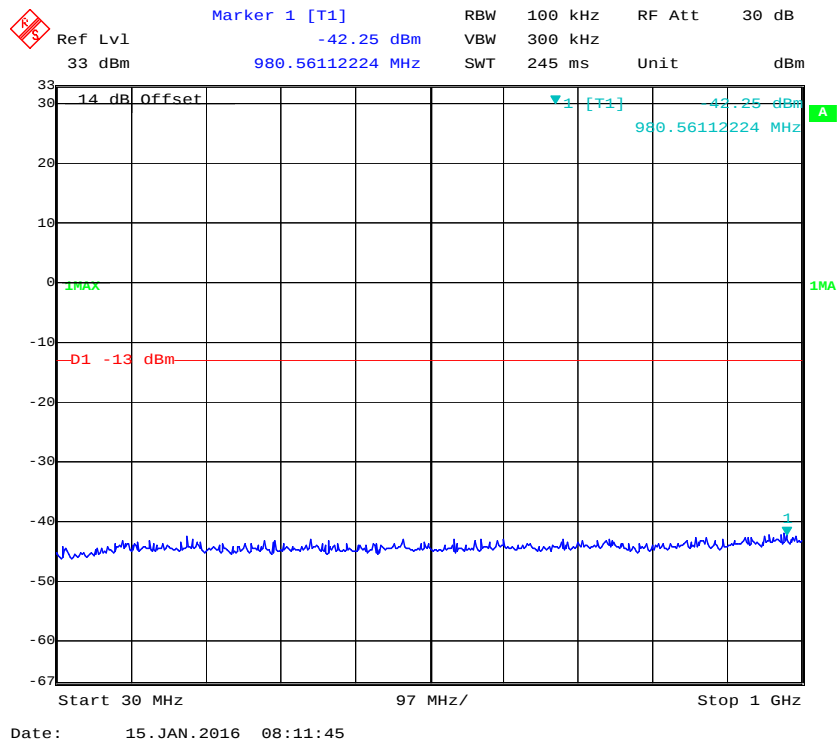

1 GHz – 2 GHz (WCDMA Mode)

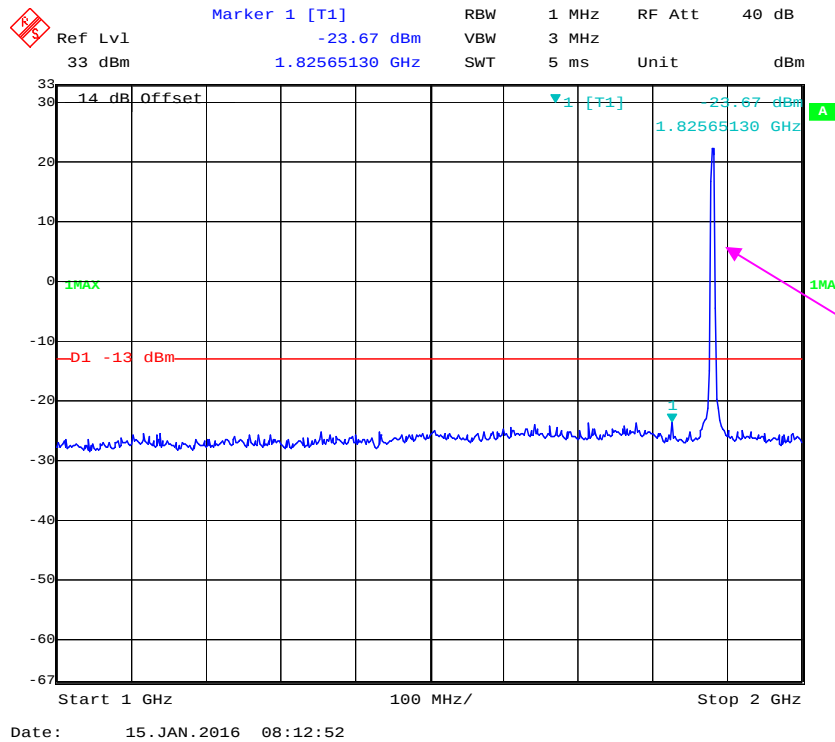


2 GHz – 20 GHz (WCDMA Mode)

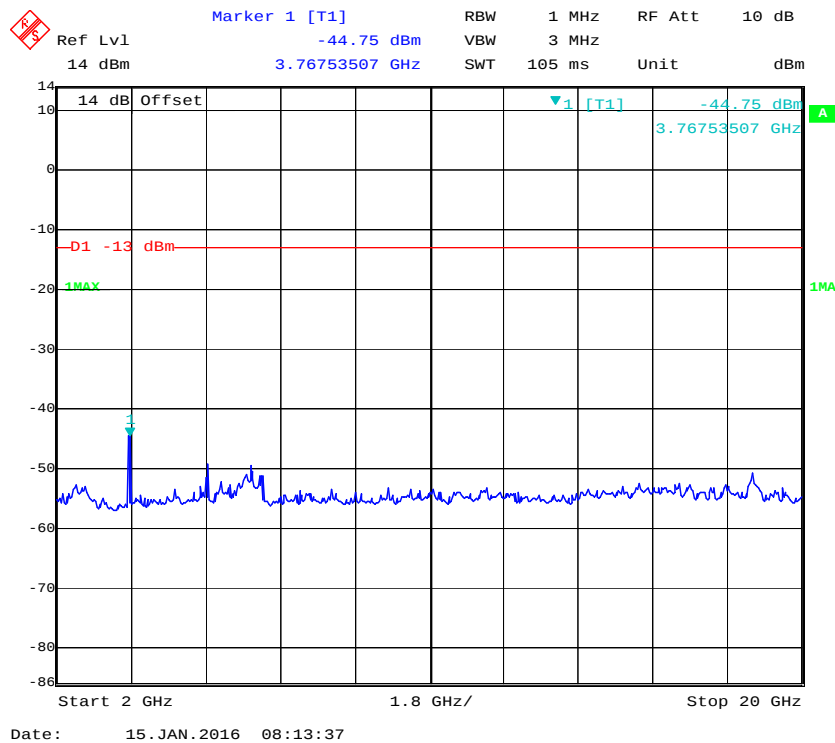


LTE Band 2:


30 MHz - 1 GHz (1.4 MHz, Middle Channel)

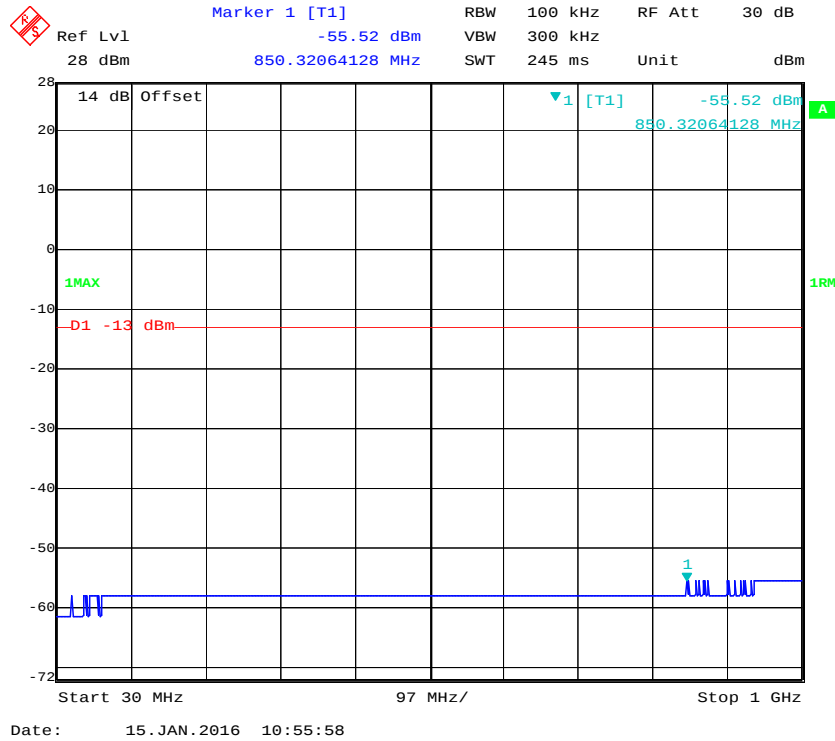


1 GHz - 2 GHz (1.4 MHz, Middle Channel)

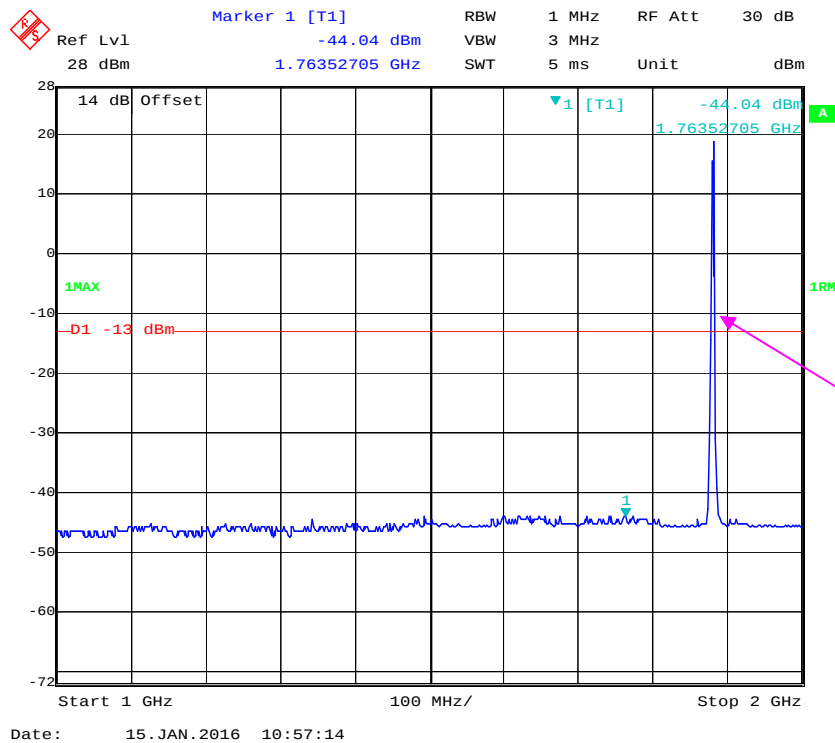


2 GHz – 20 GHz (1.4 MHz, Middle Channel)

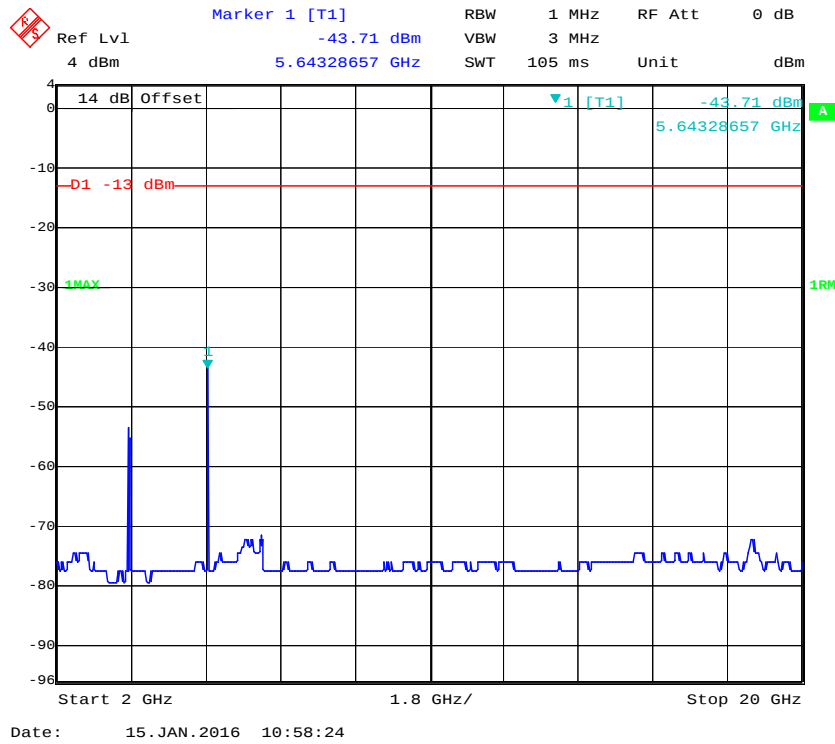


30 MHz - 1 GHz (3.0 MHz, Middle Channel)

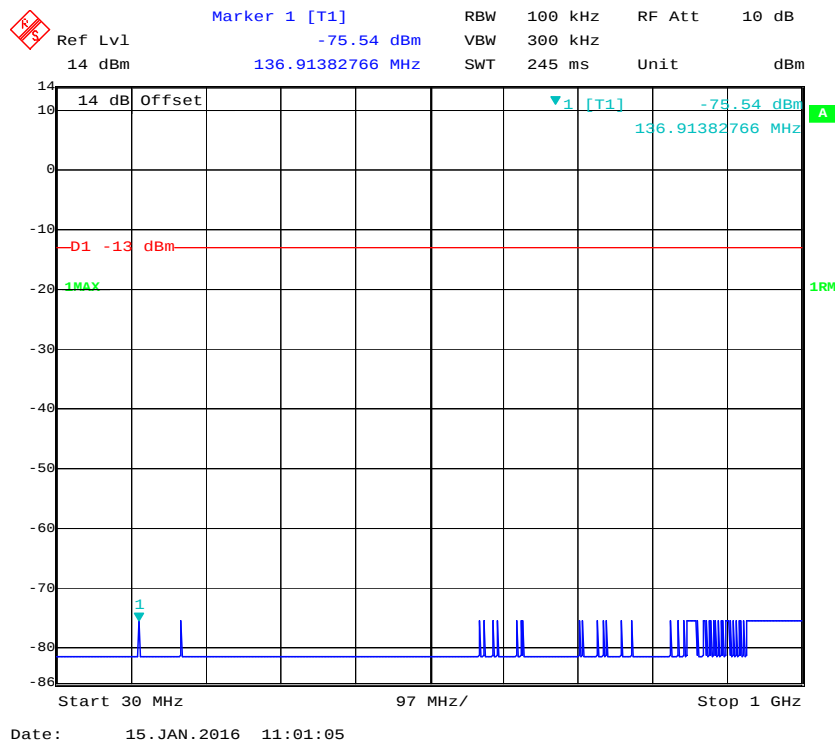


1 GHz – 2 GHz (3.0 MHz, Middle Channel)

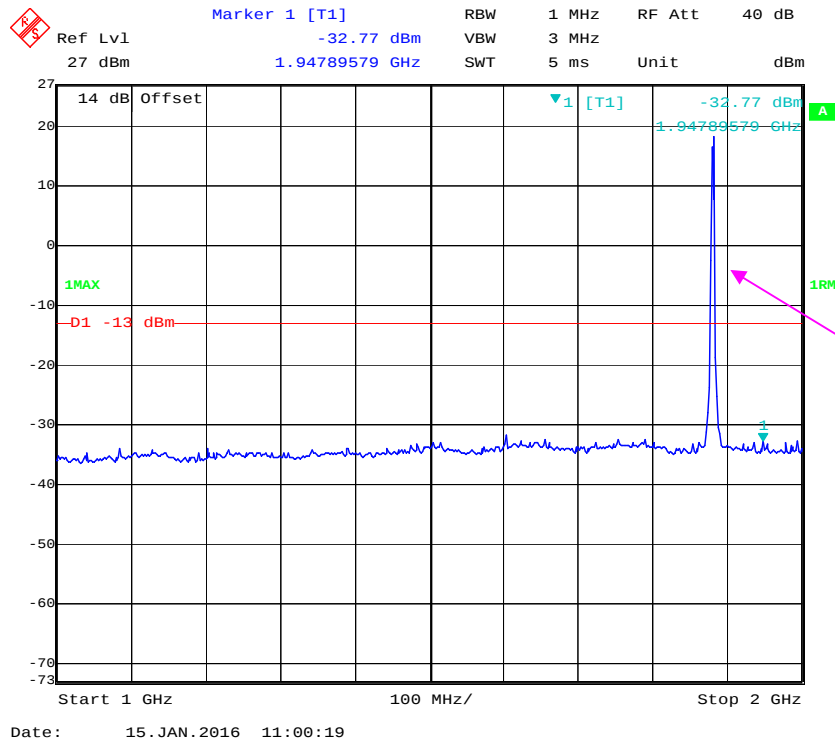


2 GHz – 20 GHz (3.0 MHz, Middle Channel)

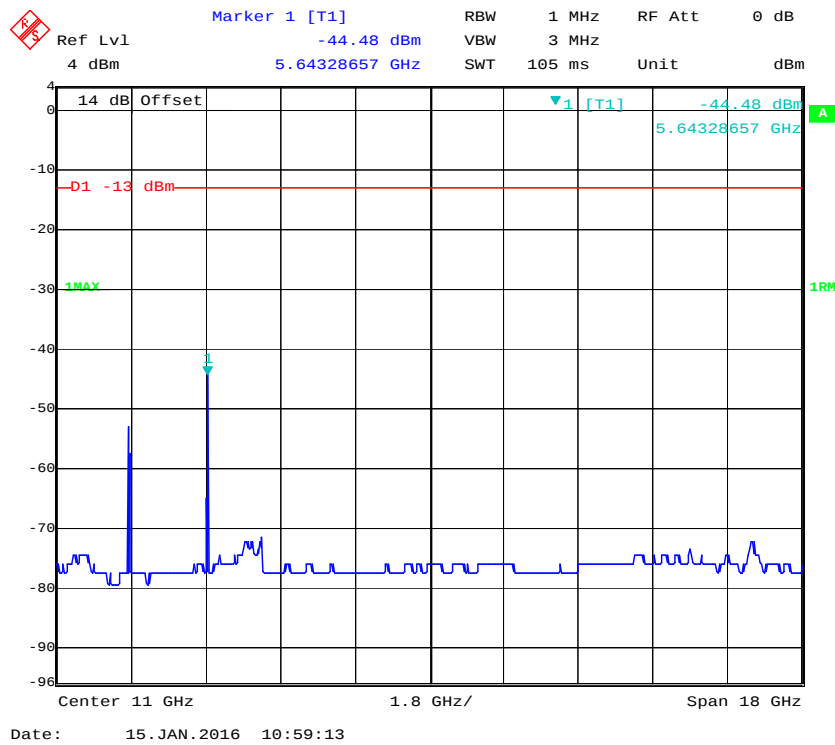


30 MHz - 1 GHz (5.0 MHz, Middle Channel)

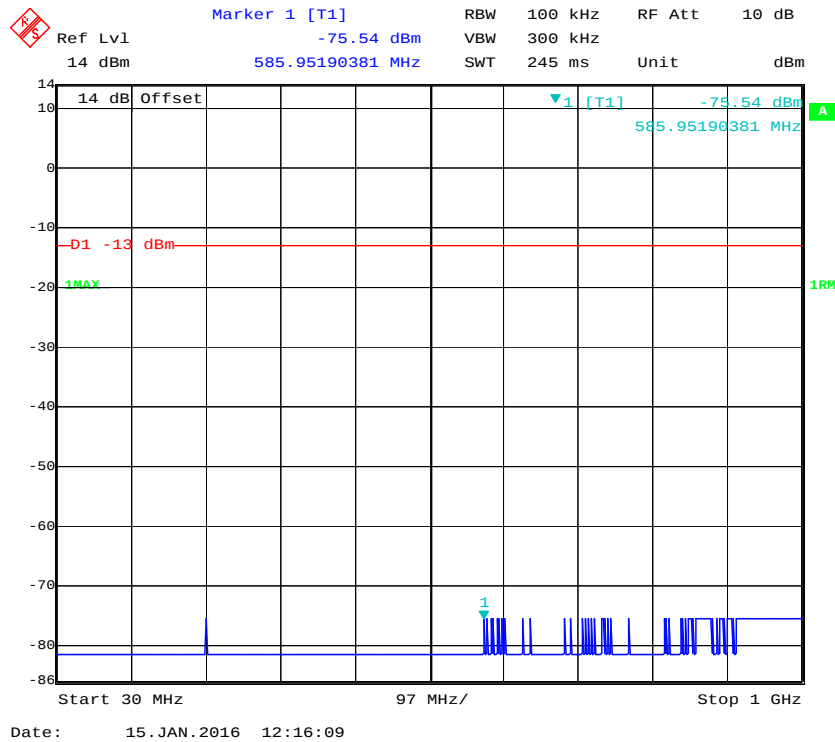


1 GHz - 2 GHz (5.0 MHz, Middle Channel)

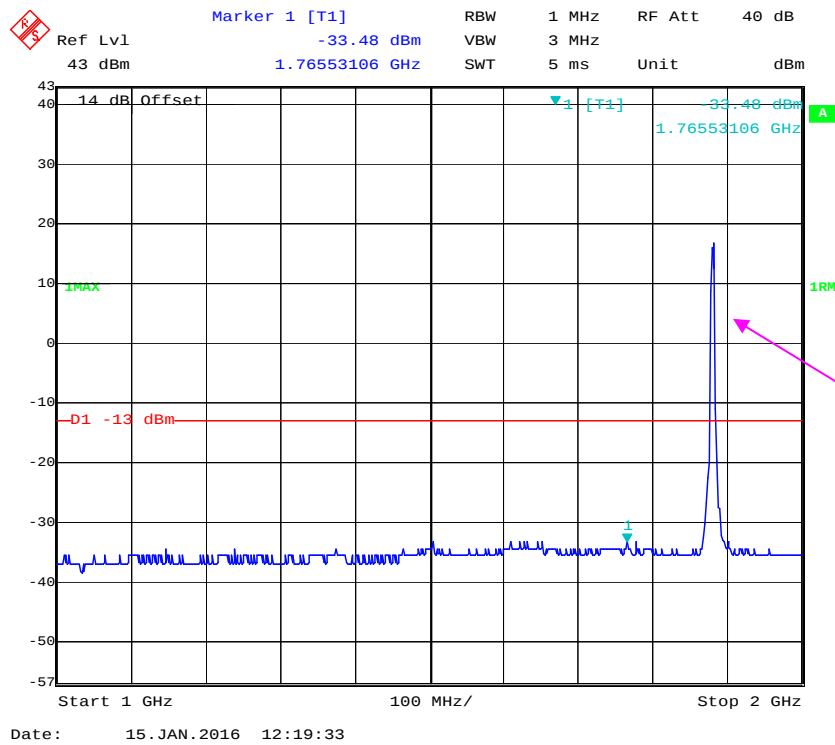


2 GHz – 20 GHz (5.0 MHz, Middle Channel)

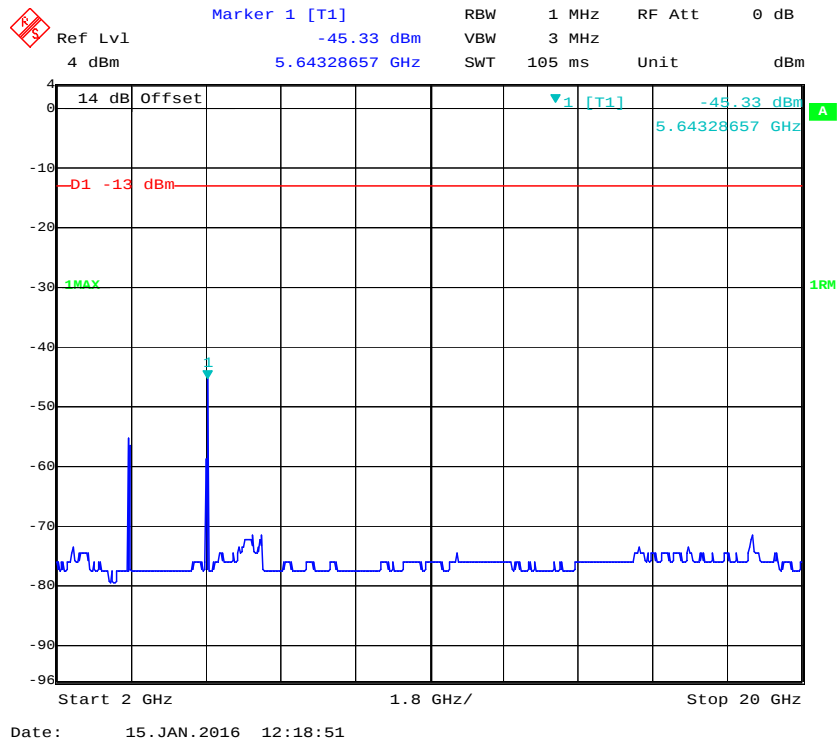


30 MHz - 1 GHz (10.0 MHz, Middle Channel)

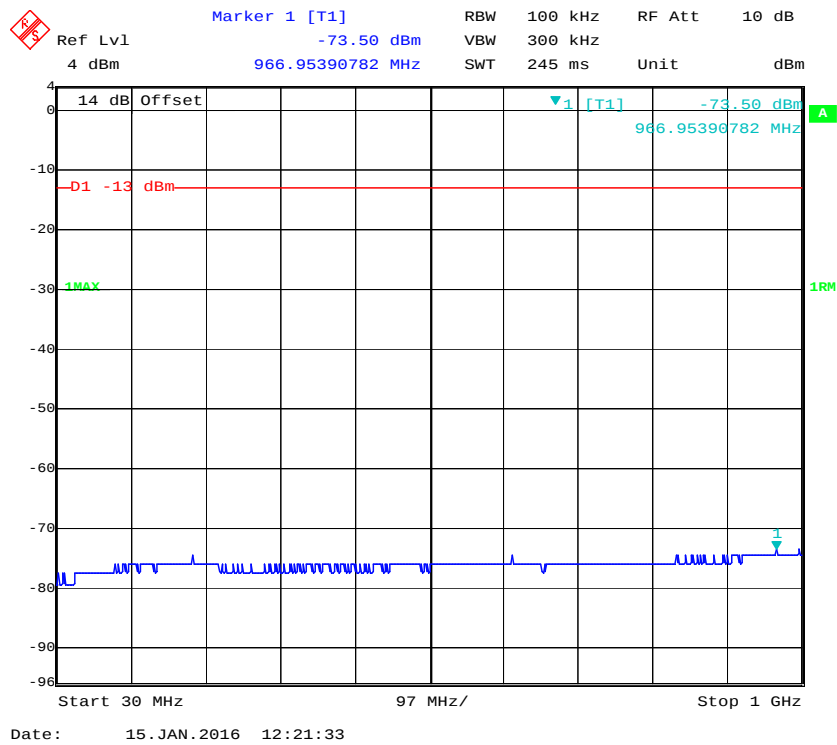


1 GHz – 2 GHz (10.0 MHz, Middle Channel)

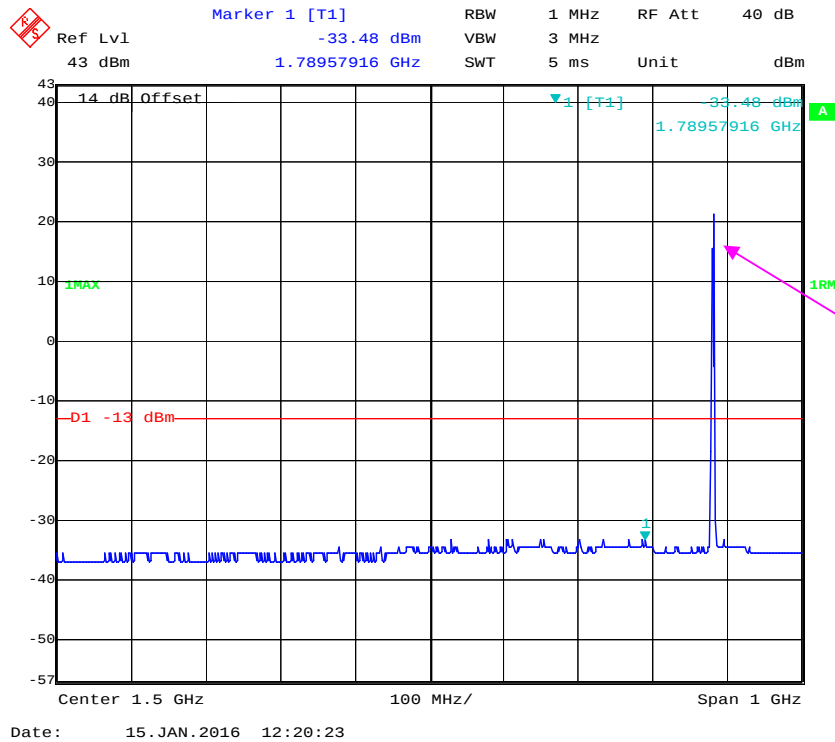


2 GHz – 20 GHz (10.0 MHz, Middle Channel)

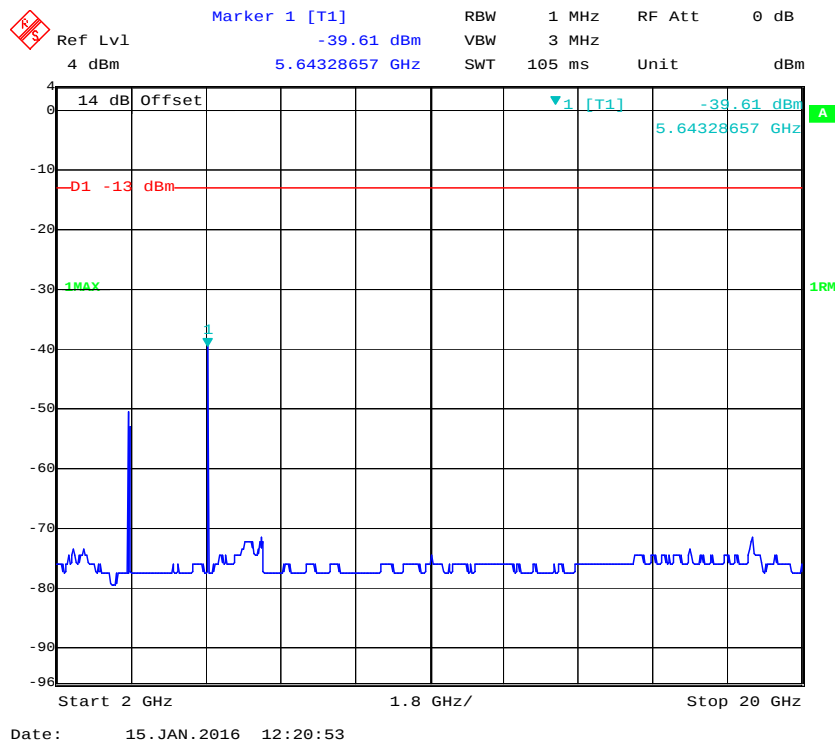


30 MHz - 1 GHz (15.0 MHz, Middle Channel)

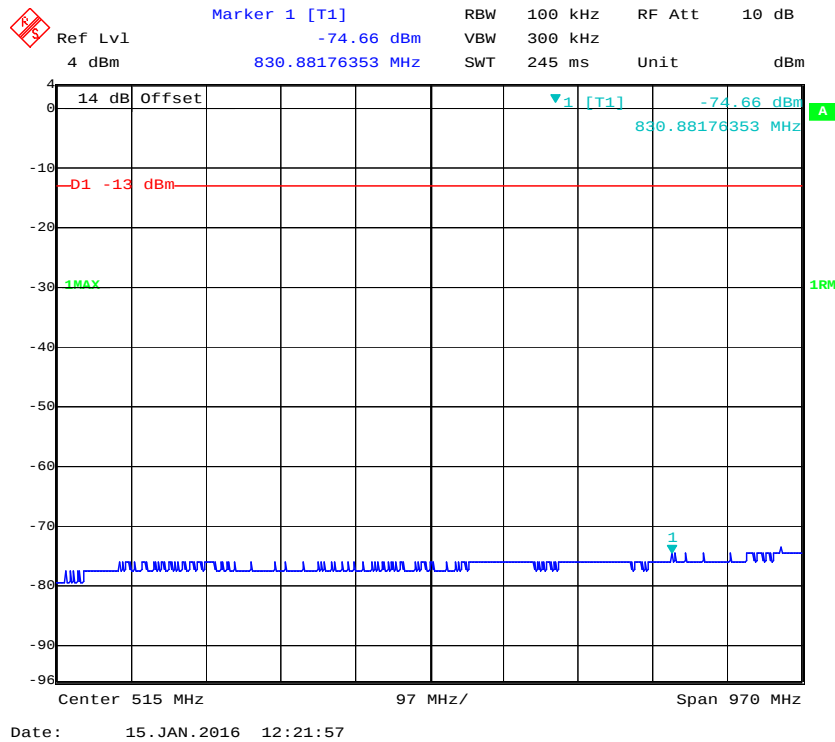


1 GHz - 2 GHz (15.0 MHz, Middle Channel)

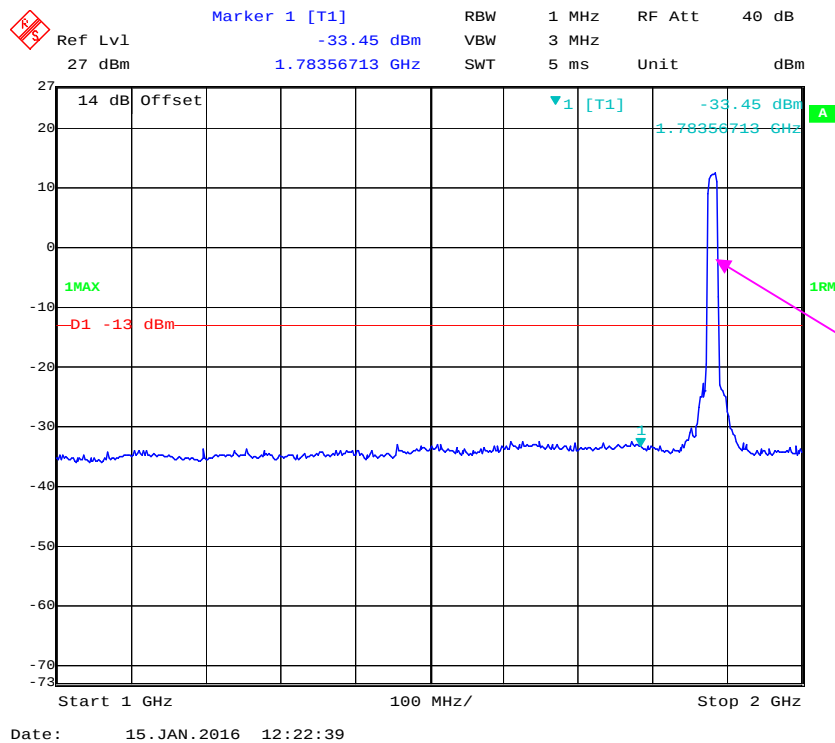


2 GHz –20 GHz (15.0 MHz, Middle Channel)

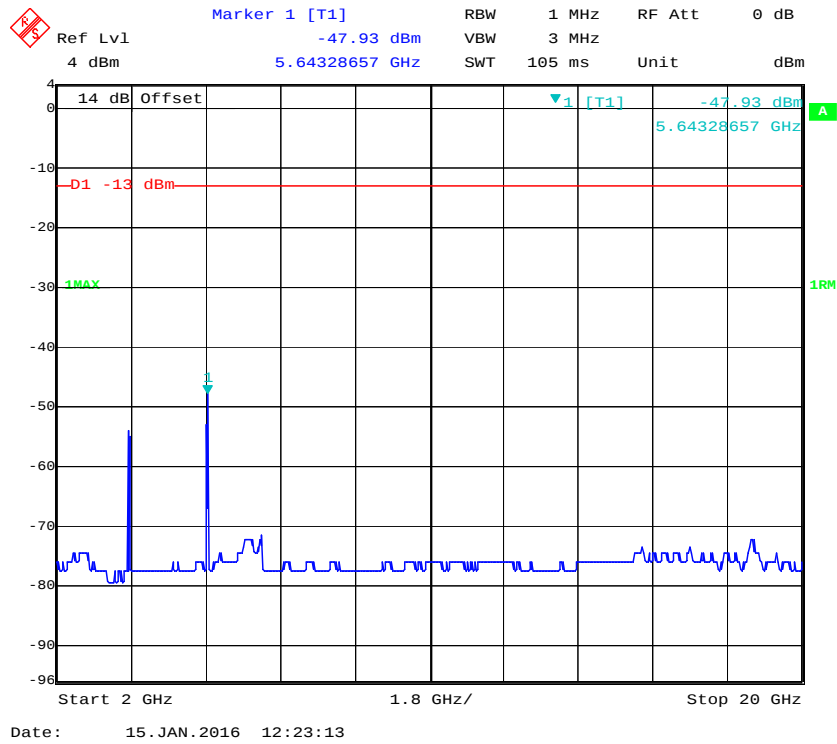


30 MHz - 1 GHz (20.0 MHz, Middle Channel)

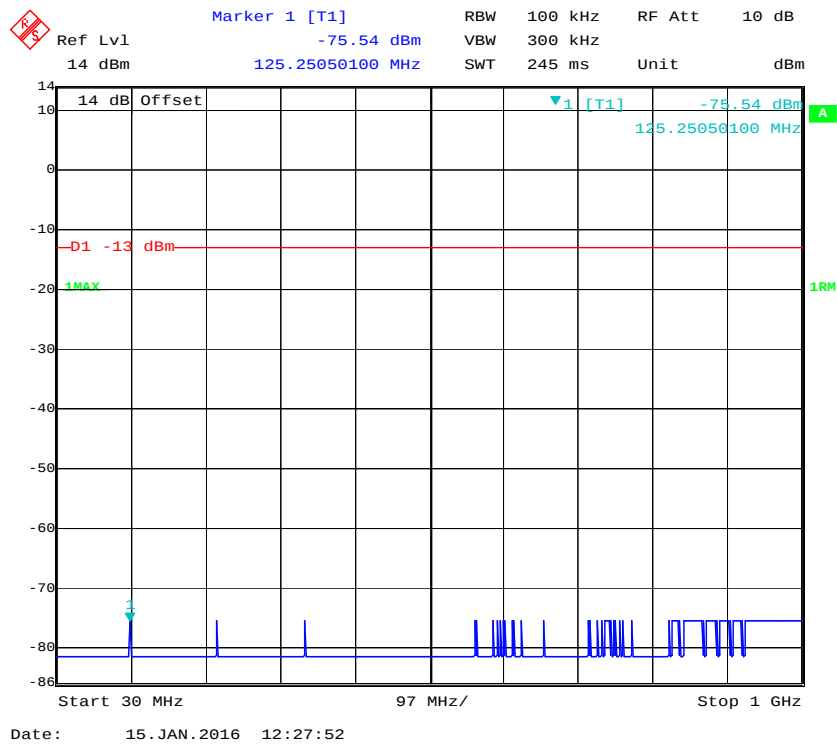

1 GHz – 2 GHz (20.0 MHz, Middle Channel)

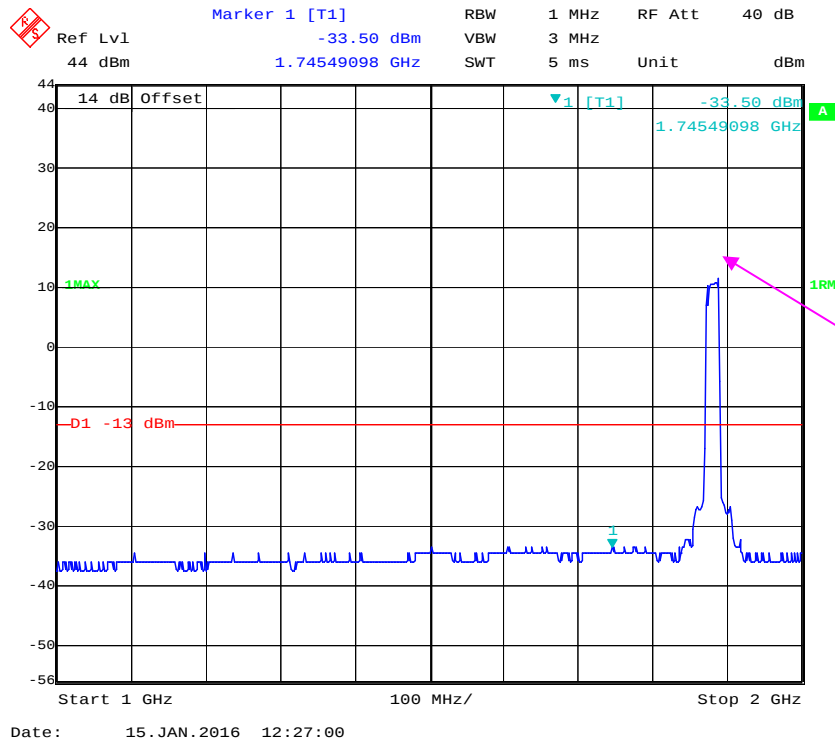


2 GHz – 20 GHz (20.0 MHz, Middle Channel)

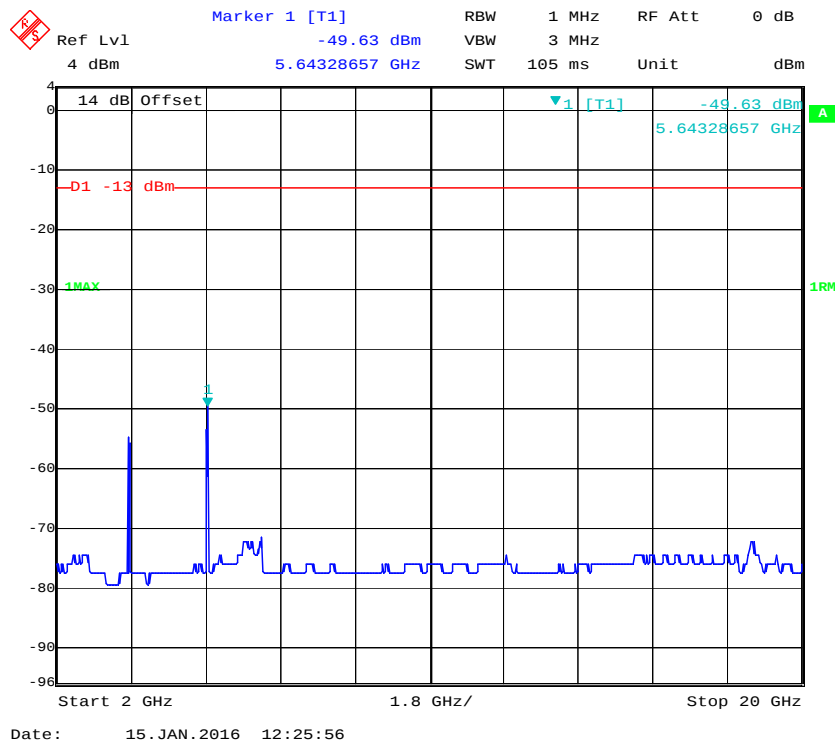


LTE Band 4:


30 MHz - 1 GHz (1.4 MHz, Middle Channel)

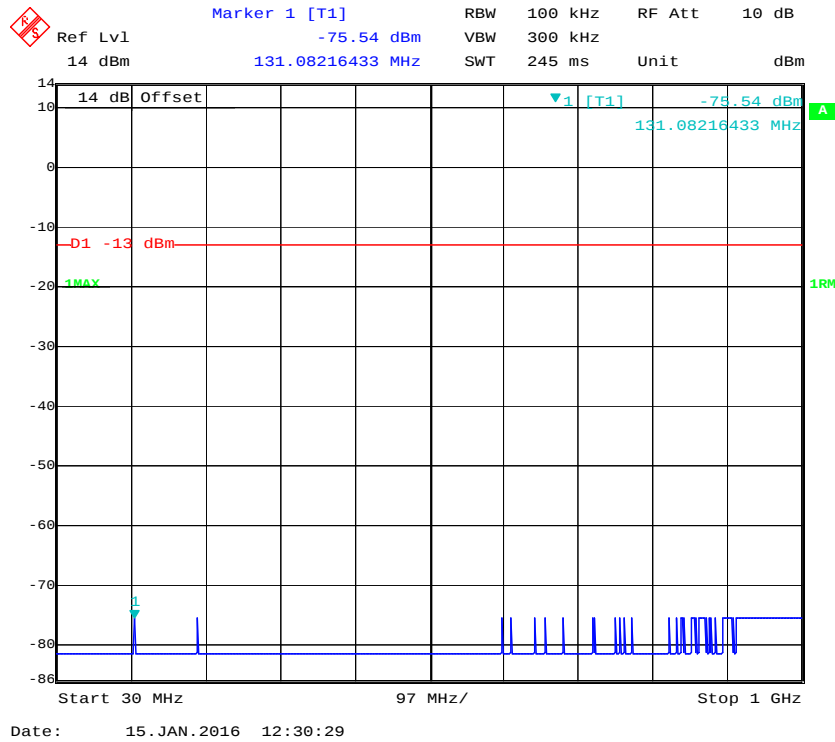


1 GHz - 2 GHz (1.4 MHz, Middle Channel)

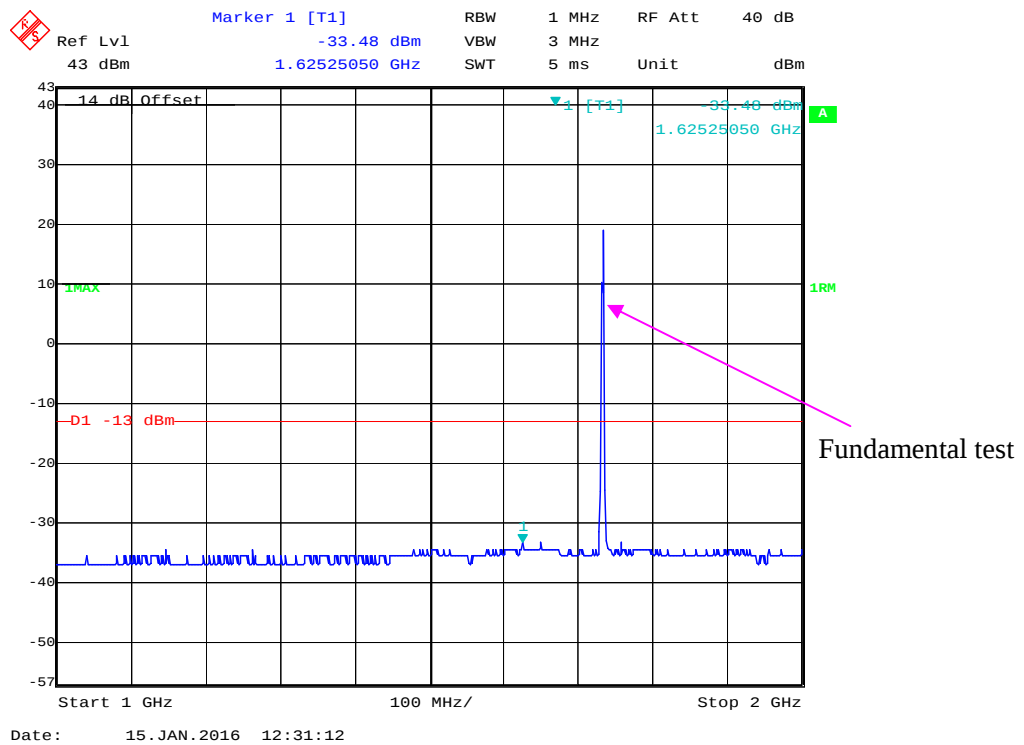


2 GHz – 20 GHz (1.4 MHz, Middle Channel)

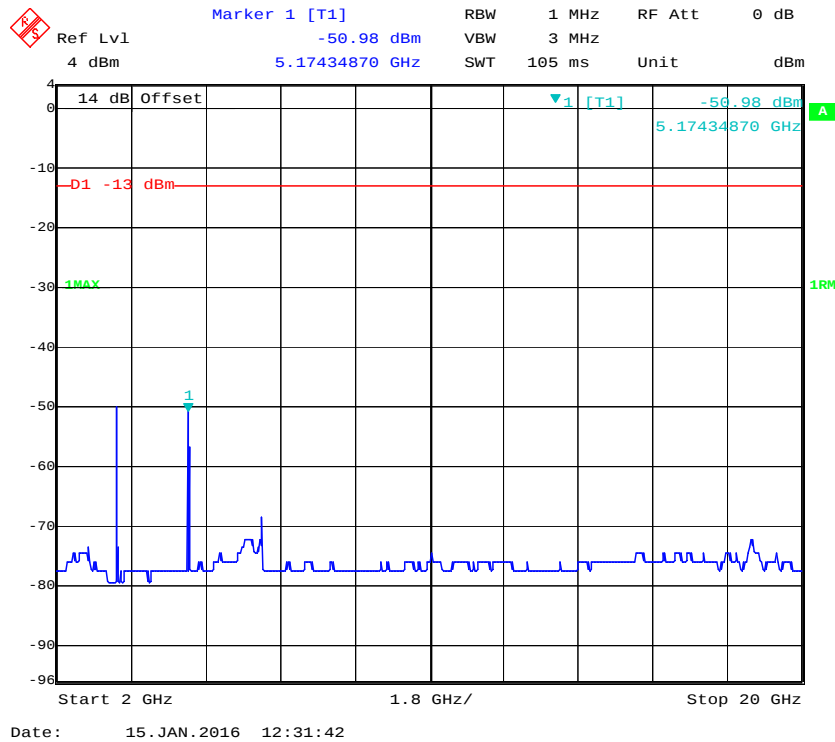


30 MHz - 1 GHz (3.0 MHz, Middle Channel)

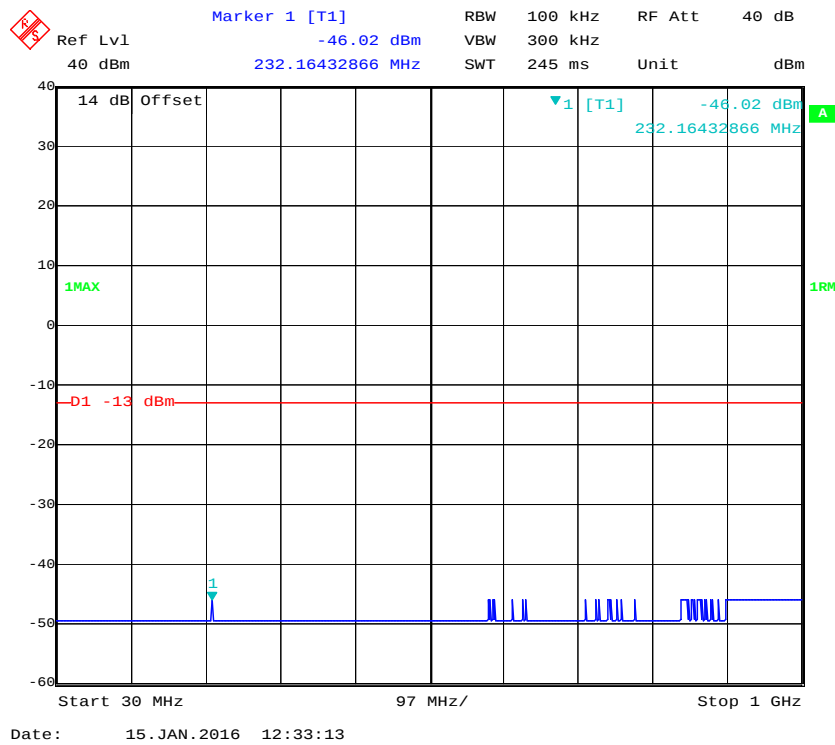


1 GHz – 2 GHz (3.0 MHz, Middle Channel)

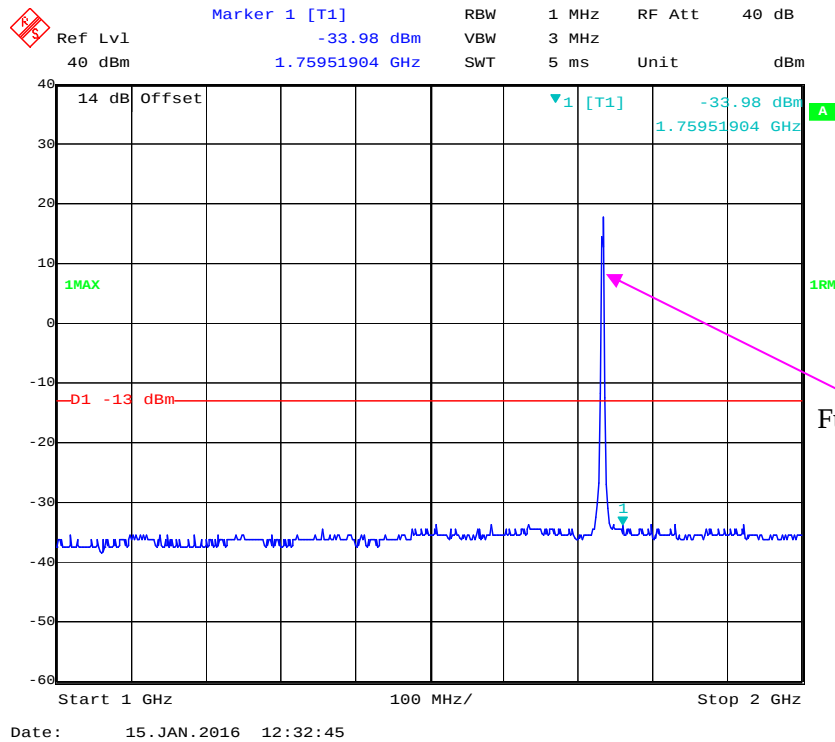


2 GHz – 20 GHz (3.0 MHz, Middle Channel)

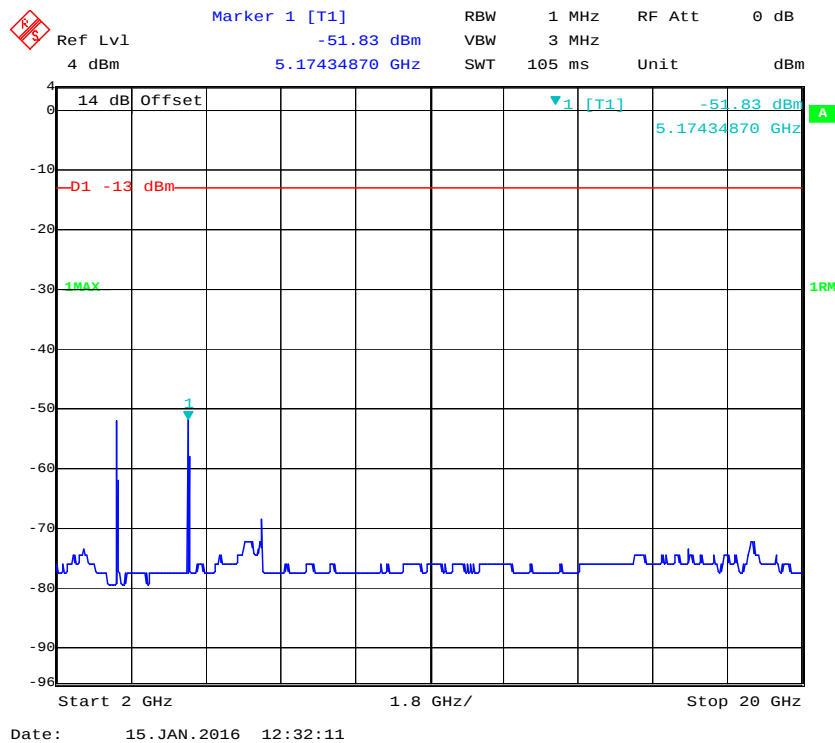


30 MHz - 1 GHz (5.0 MHz, Middle Channel)

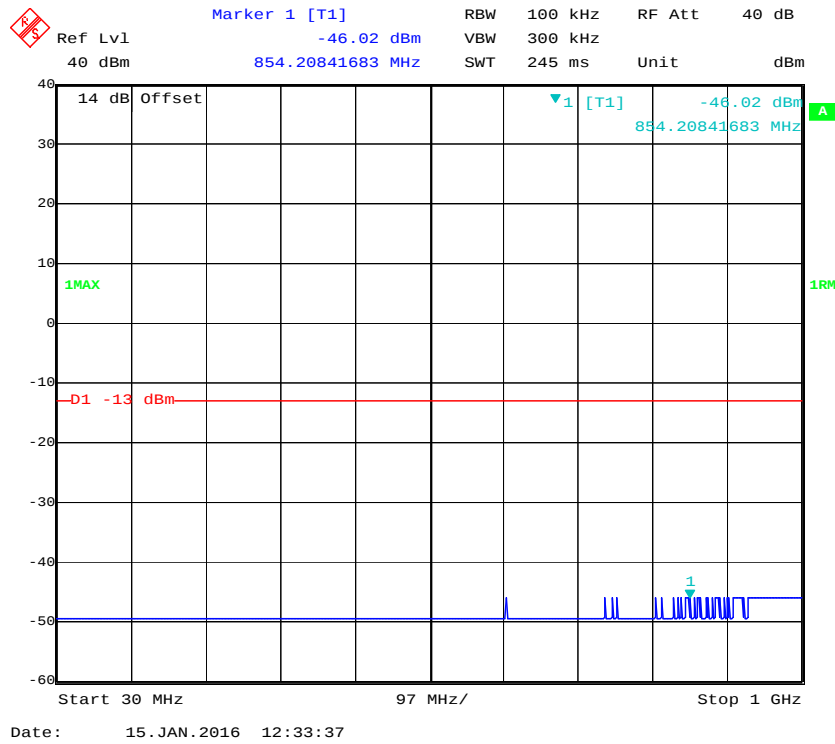


1 GHz - 2 GHz (5.0 MHz, Middle Channel)

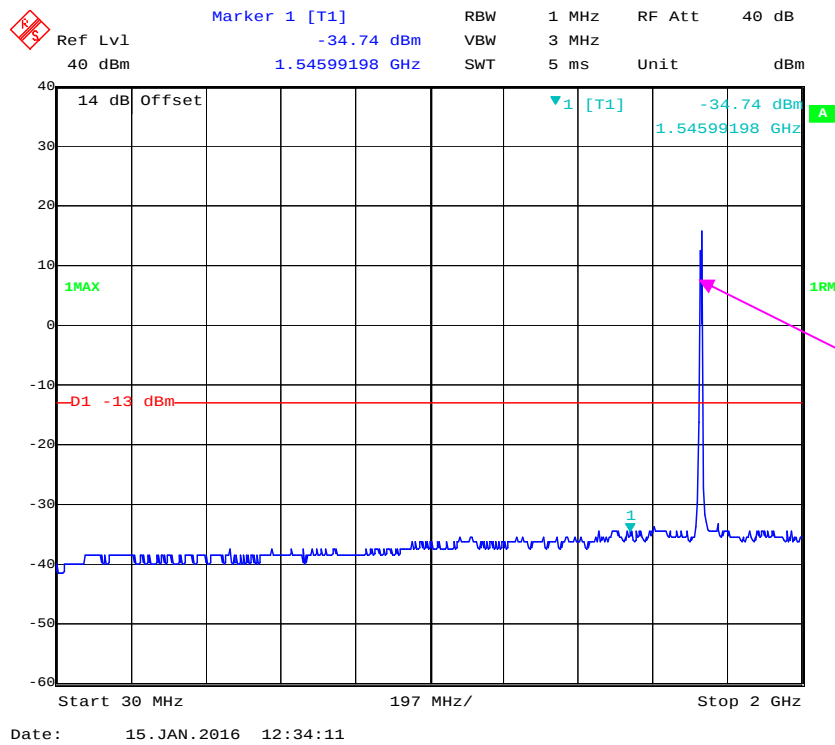


2 GHz – 20 GHz (5.0 MHz, Middle Channel)

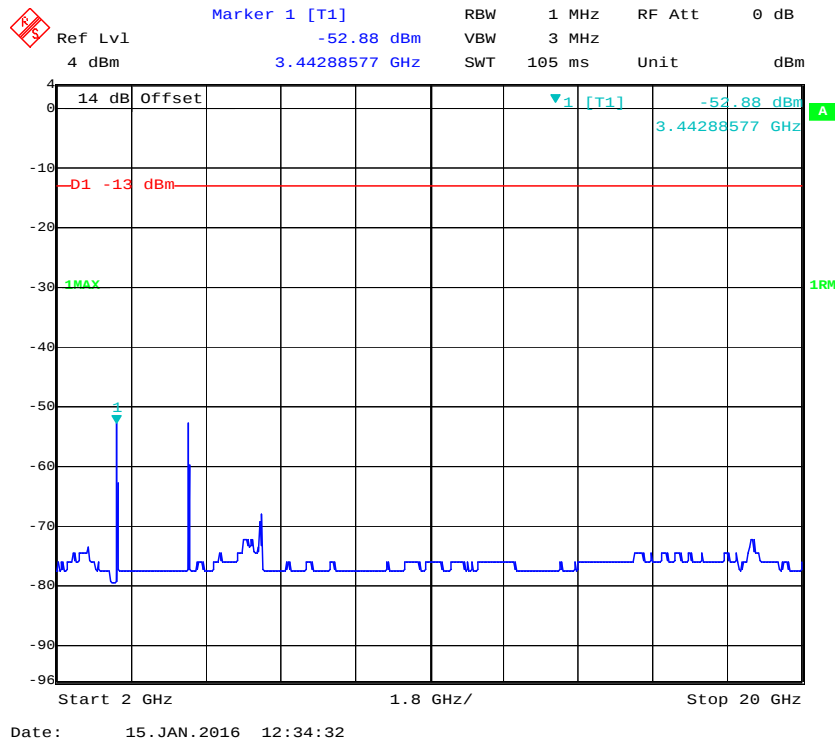


30 MHz - 1 GHz (10.0 MHz, Middle Channel)

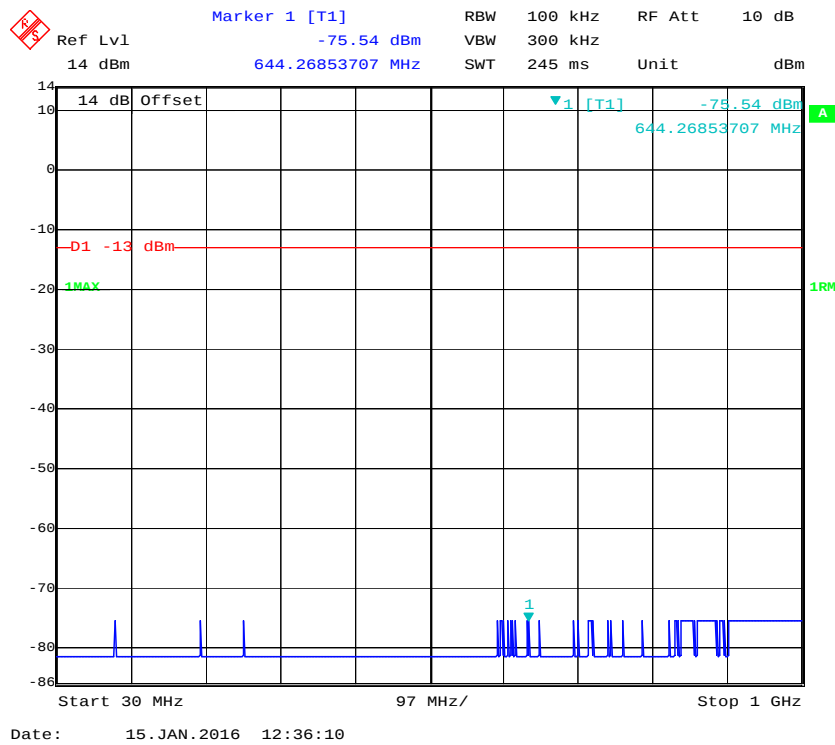


1 GHz – 2 GHz (10.0 MHz, Middle Channel)

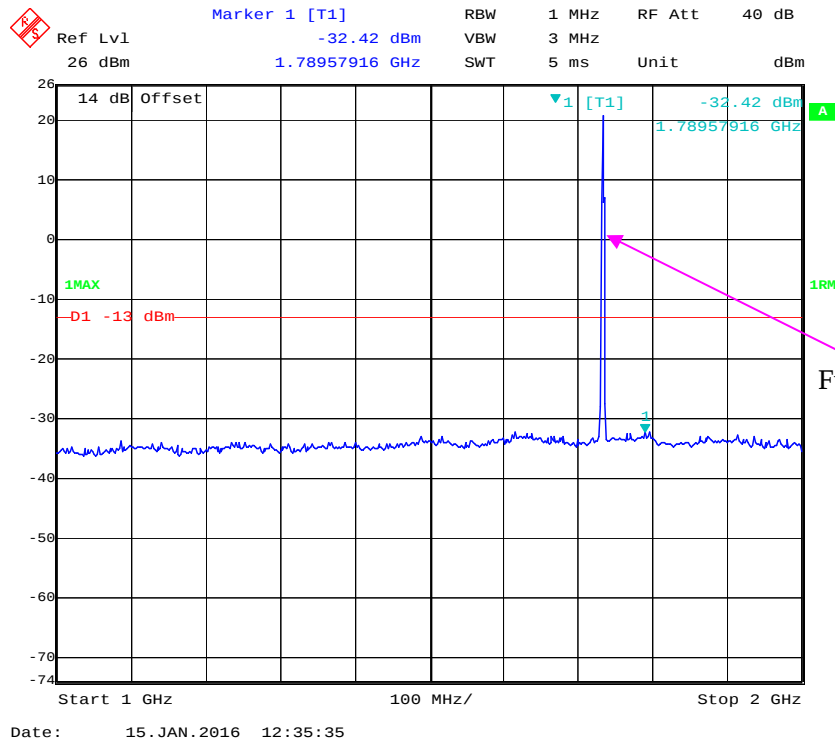


2 GHz – 20 GHz (10.0 MHz, Middle Channel)


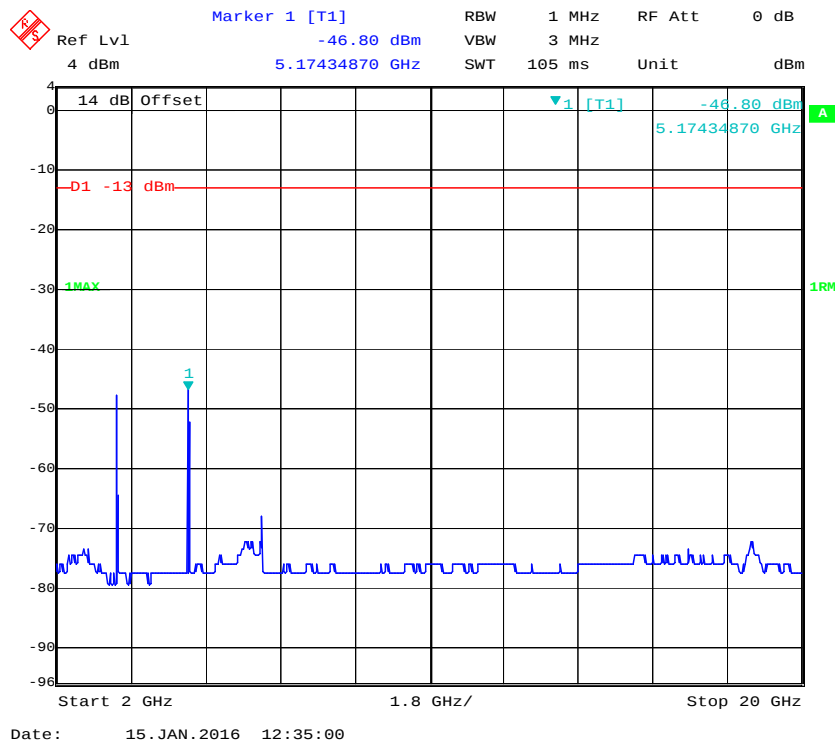




30 MHz - 1 GHz (15.0 MHz, Middle Channel)


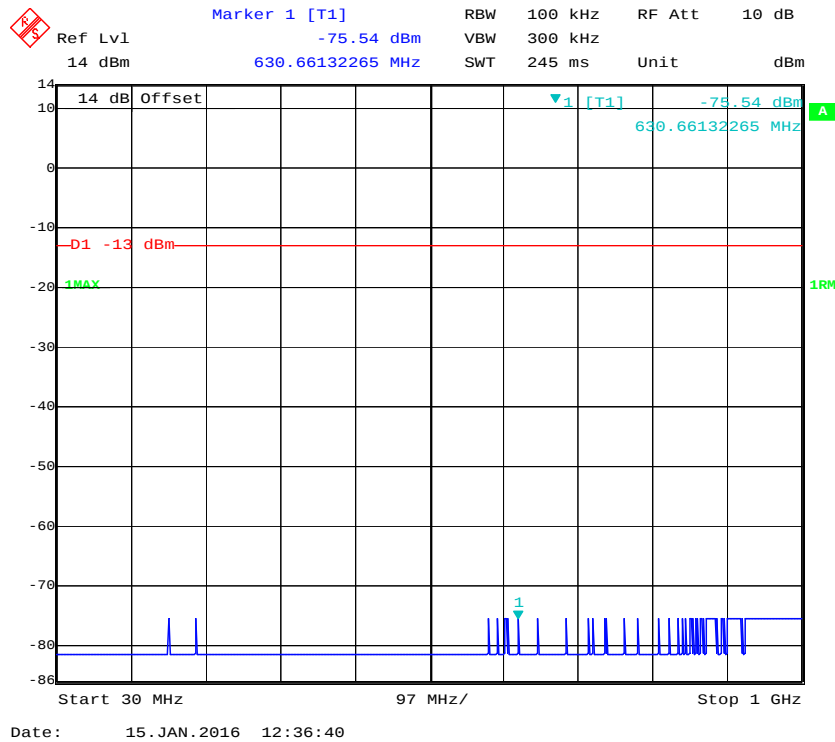


1 GHz - 2 GHz (15.0 MHz, Middle Channel)

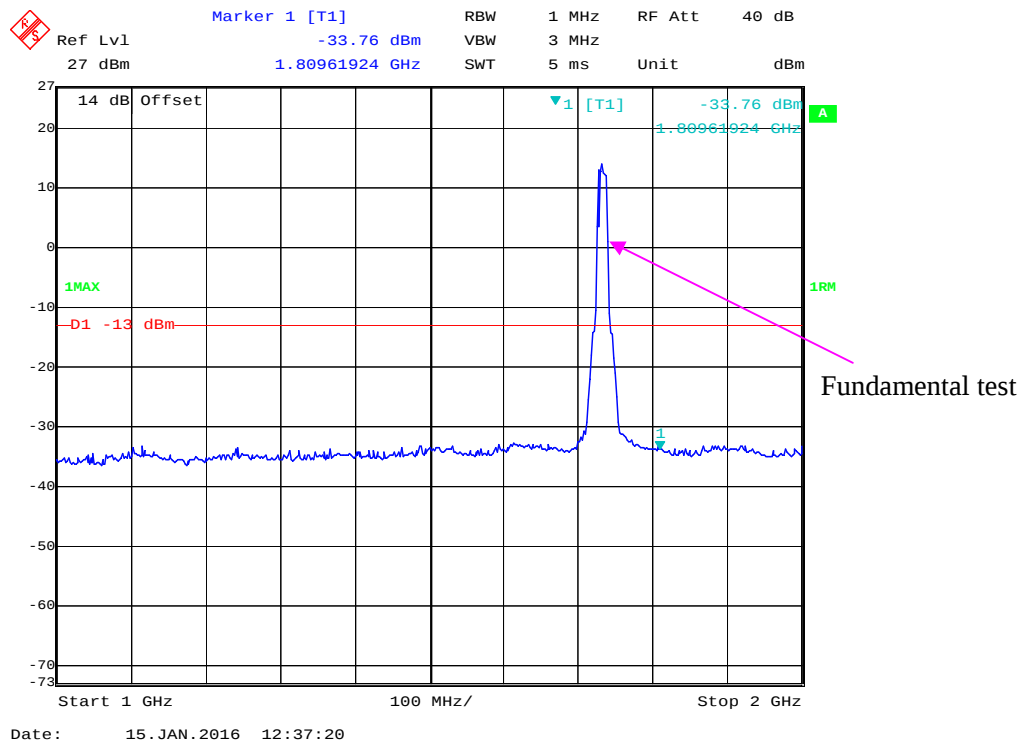


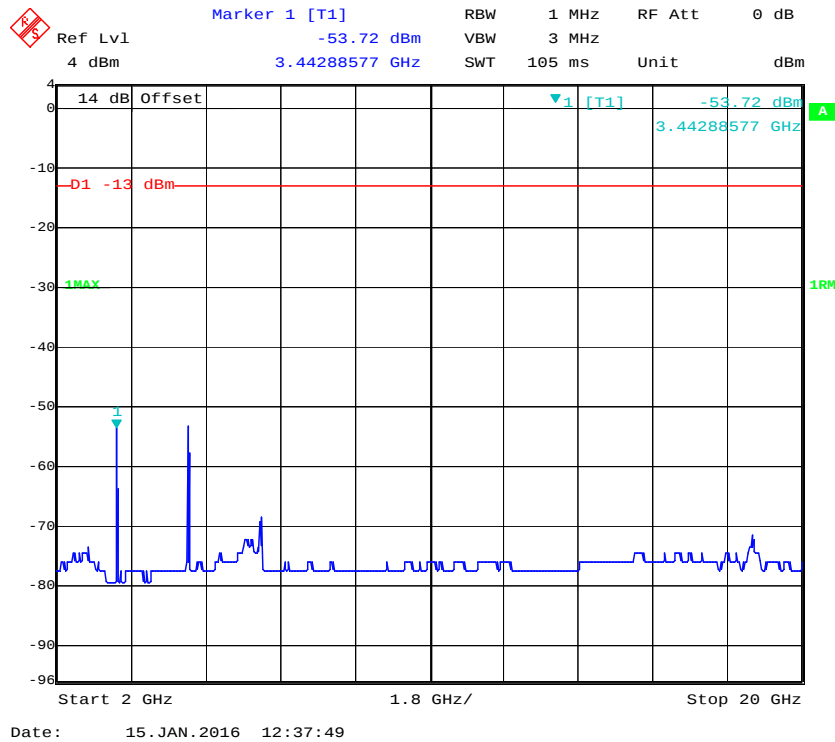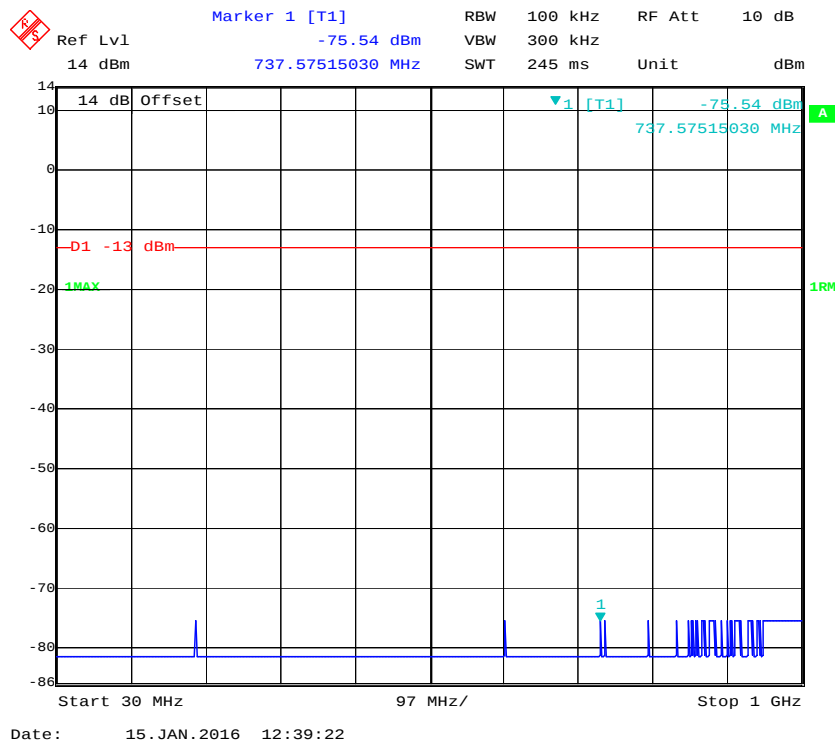2 GHz – 20GHz (15.0 MHz, Middle Channel)**30 MHz - 1 GHz (20.0 MHz, Middle Channel)**

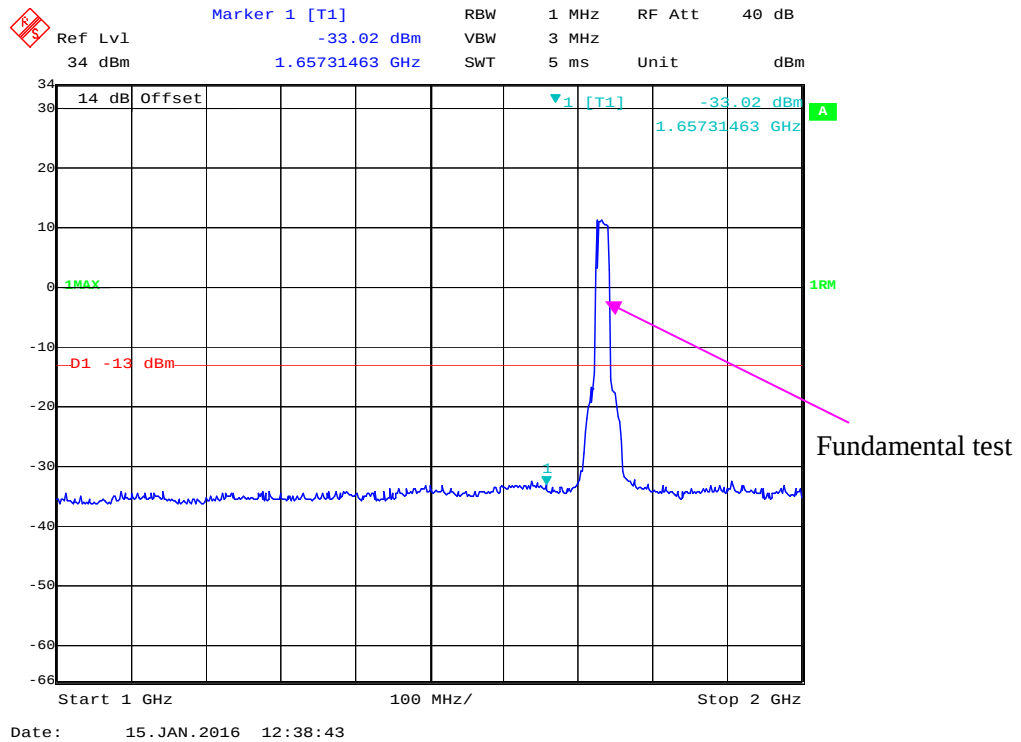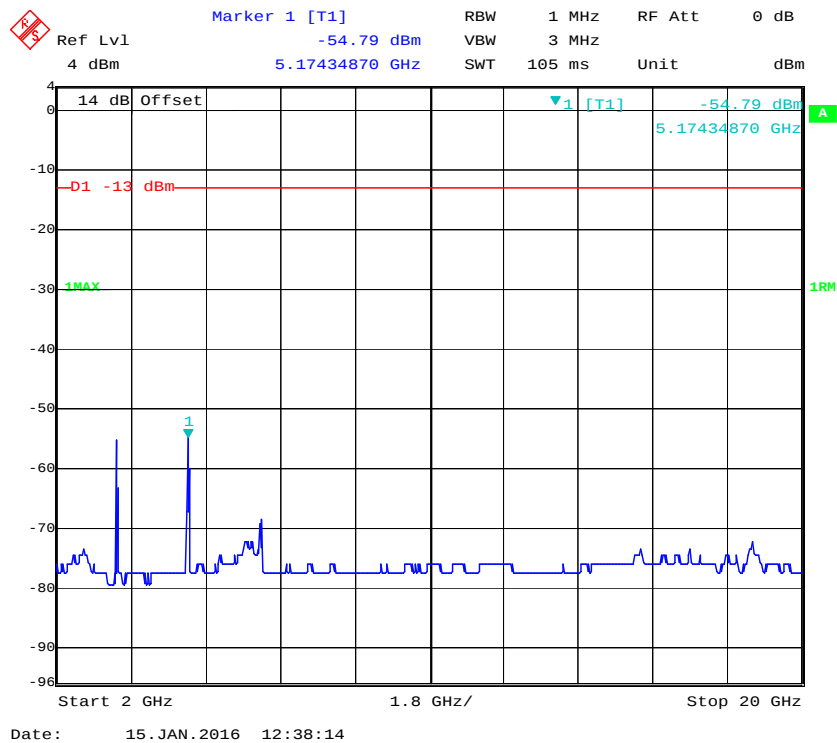
1 GHz –2 GHz (20.0 MHz, Middle Channel)**2 GHz –20 GHz (20.0 MHz, Middle Channel)**

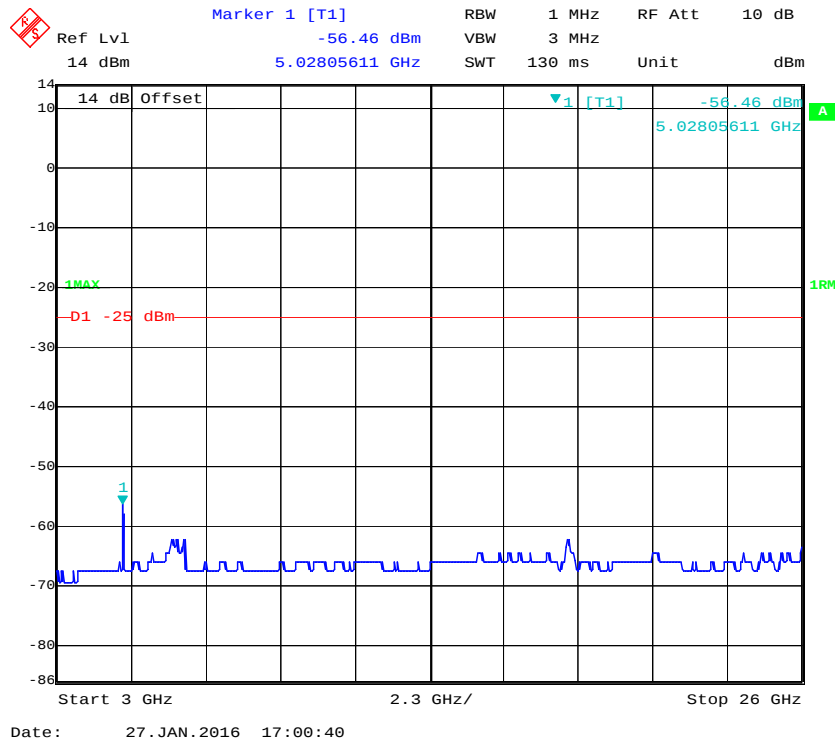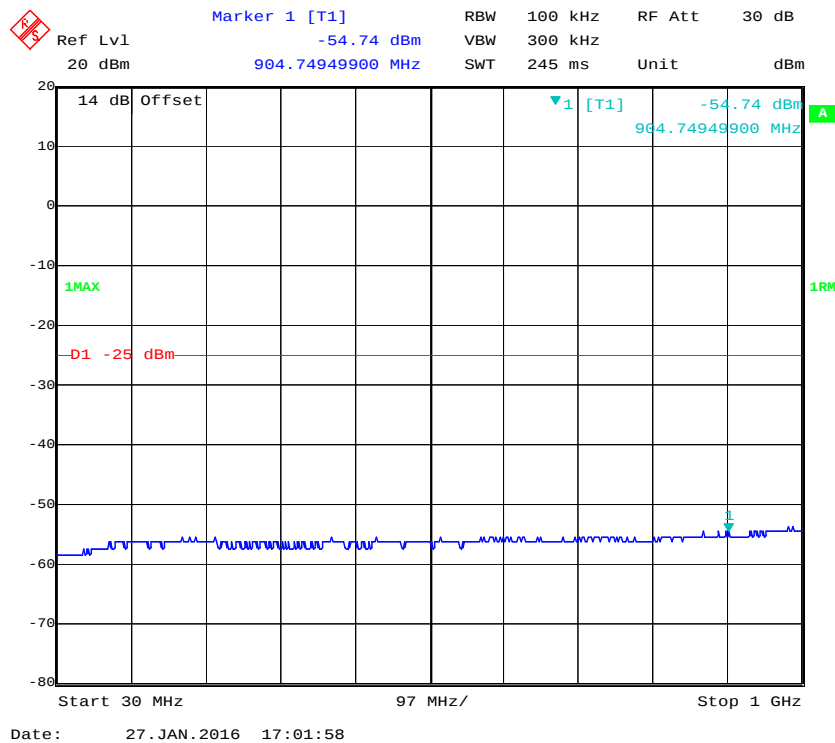3 GHz – 26 GHz (5.0 MHz, Middle Channel)**30 MHz - 1 GHz (10.0 MHz, Middle Channel)**


1 GHz – 3 GHz (10.0 MHz, Middle Channel)

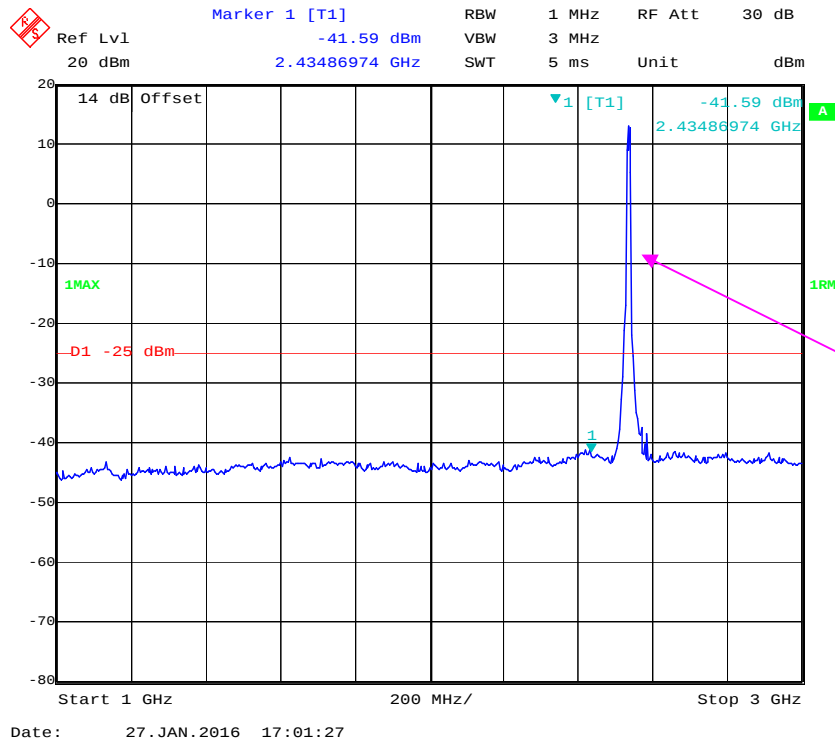


3 GHz – 26 GHz (10.0 MHz, Middle Channel)

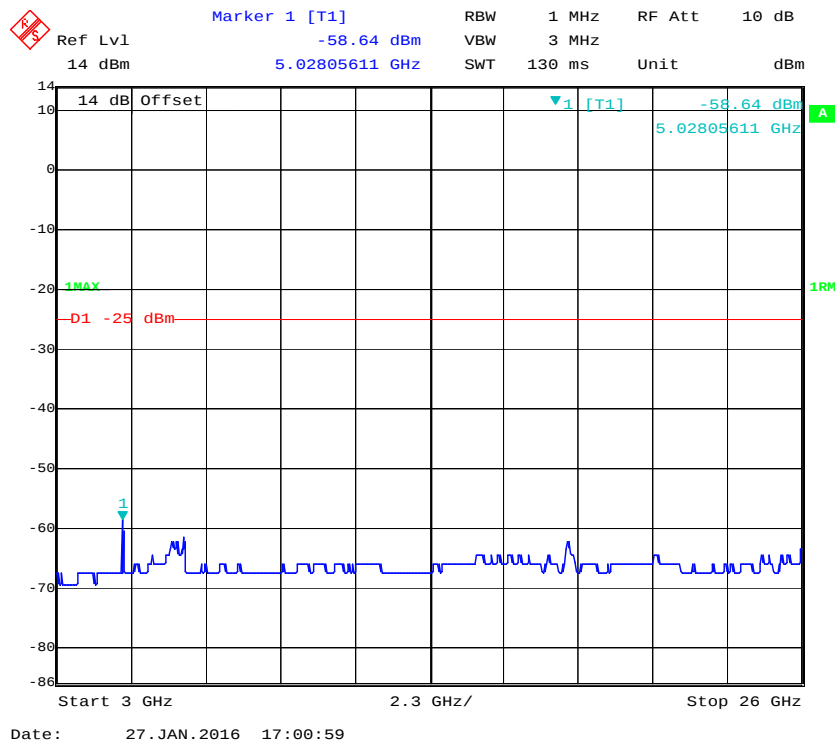

30 MHz - 1 GHz (15.0 MHz, Middle Channel)

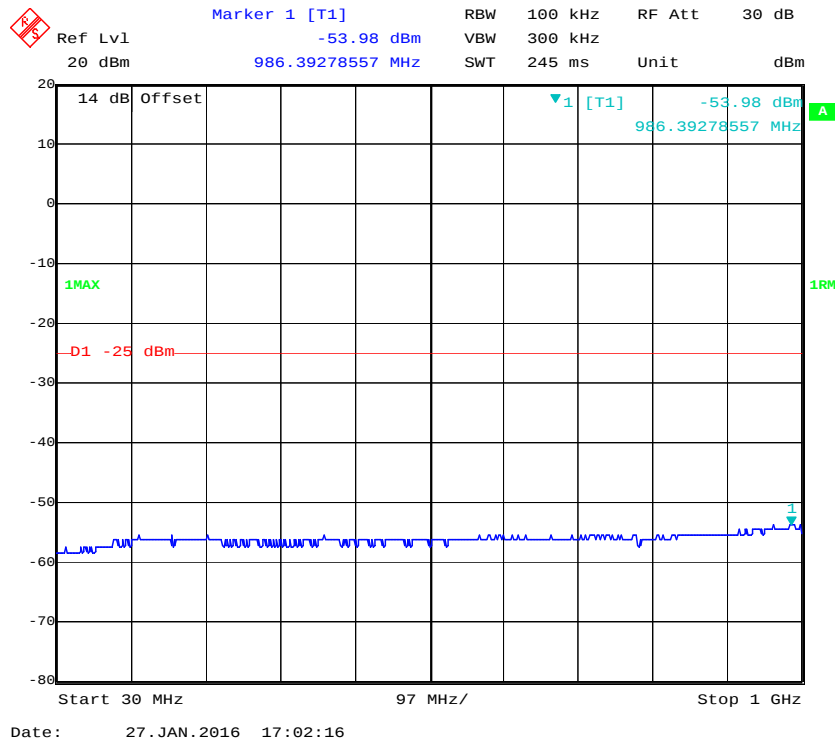

1 GHz - 3 GHz (15.0 MHz, Middle Channel)

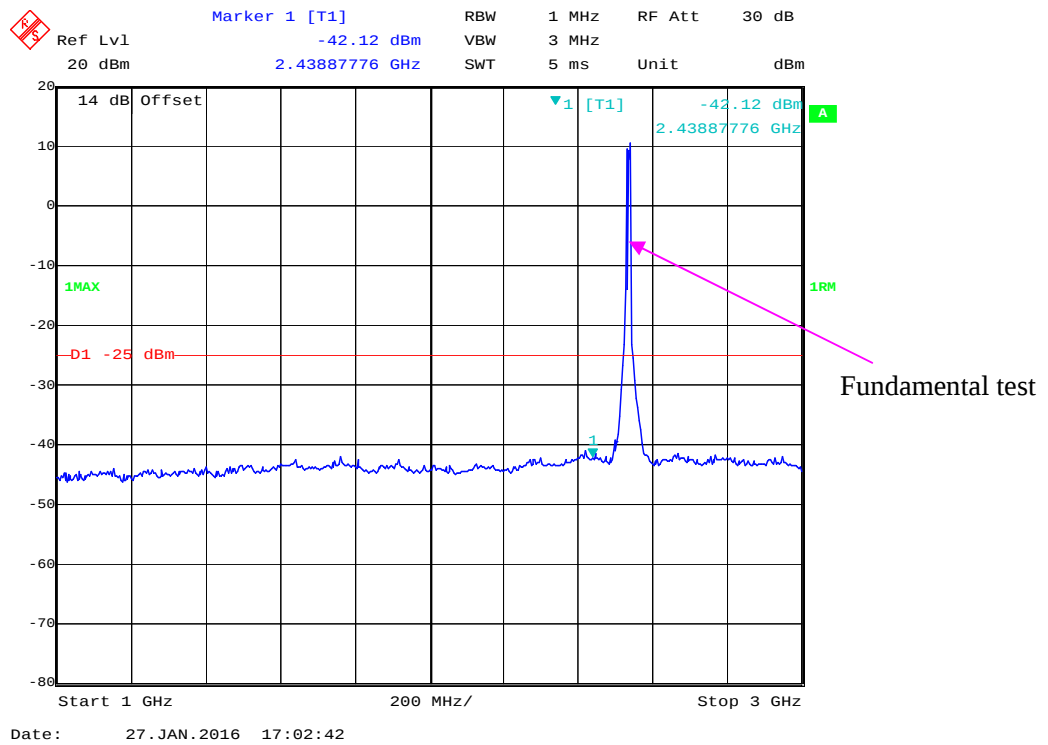

Marker 1 [T1]

Ref Lvl 14 dBm

RBW 1 MHz

VBW 3 MHz

RF Att 10 dB

SWT 130 ms

Unit dBm

14 dB Offset

1 [T1]

-60.74 dBm

5.02805611 GHz

-1MAX

D1 -25 dBm

1RM

Start 3 GHz

2.3 GHz/

Stop 26 GHz

Date: 27. JAN. 2016 17:03:08

Marker 1 [T1]

Ref Lvl 14 dBm

Offset

RBW 100 kHz

VBW 300 kHz

SWT 245 ms

RF Att 30 dB

Unit dBm

14 dB

Offset

1 [T1]

-53.96 dBm

976.67334669 MHz

-1MAX

D1 -25 dBm

1RM


Start 30 MHz

97 MHz/


Stop 1 GHz



Date: 27. JAN. 2016 17:04:16

1 GHz –3 GHz (20.0 MHz, Middle Channel)

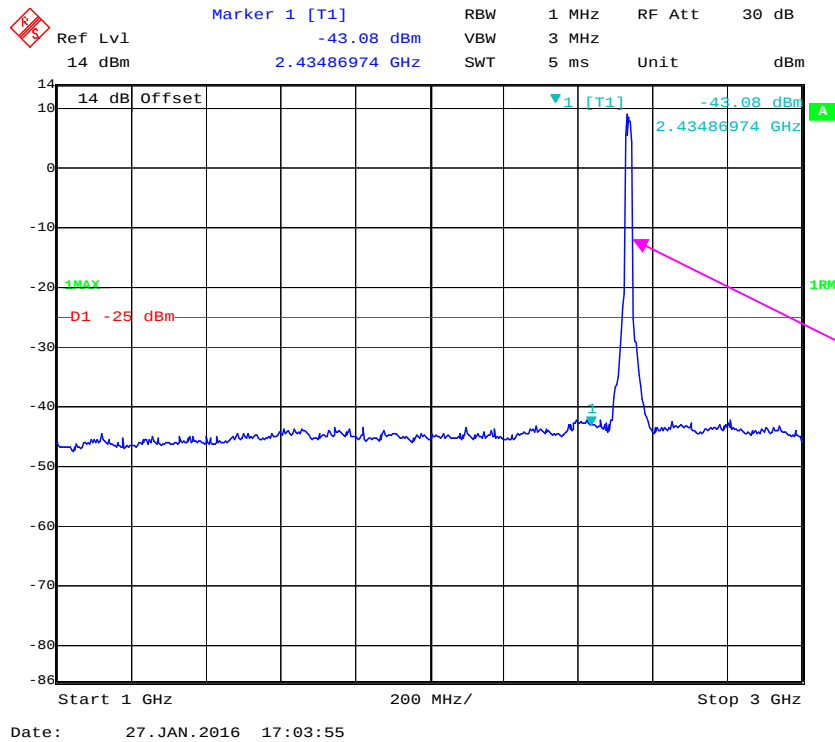


3 GHz –26 GHz (20.0 MHz, Middle Channel)

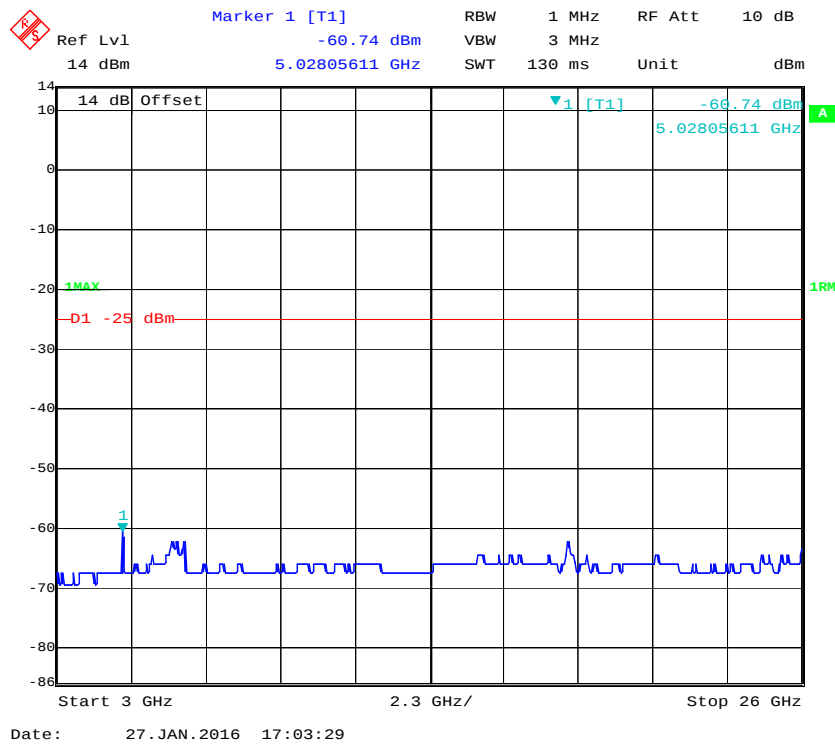


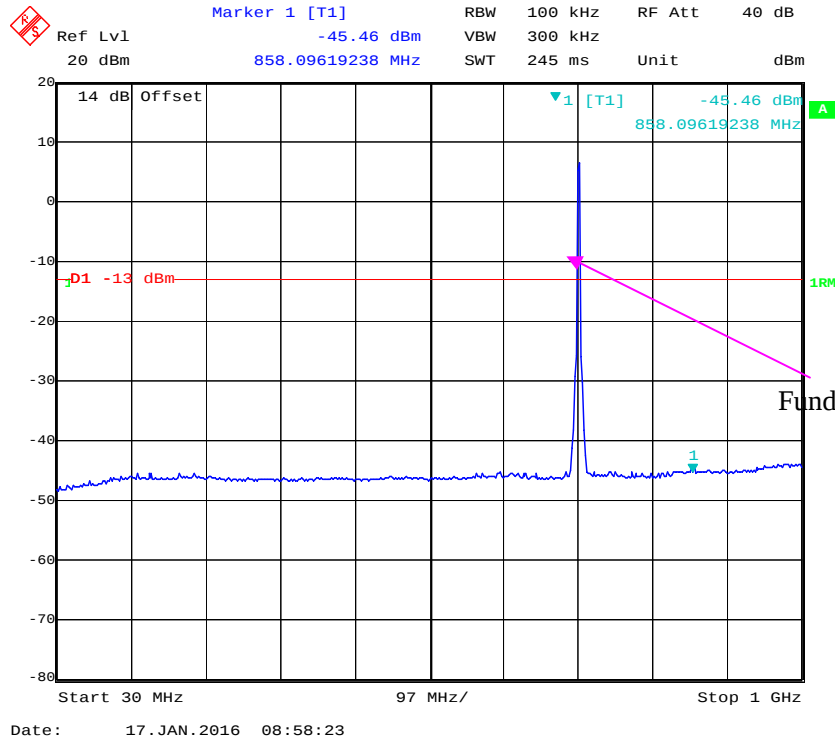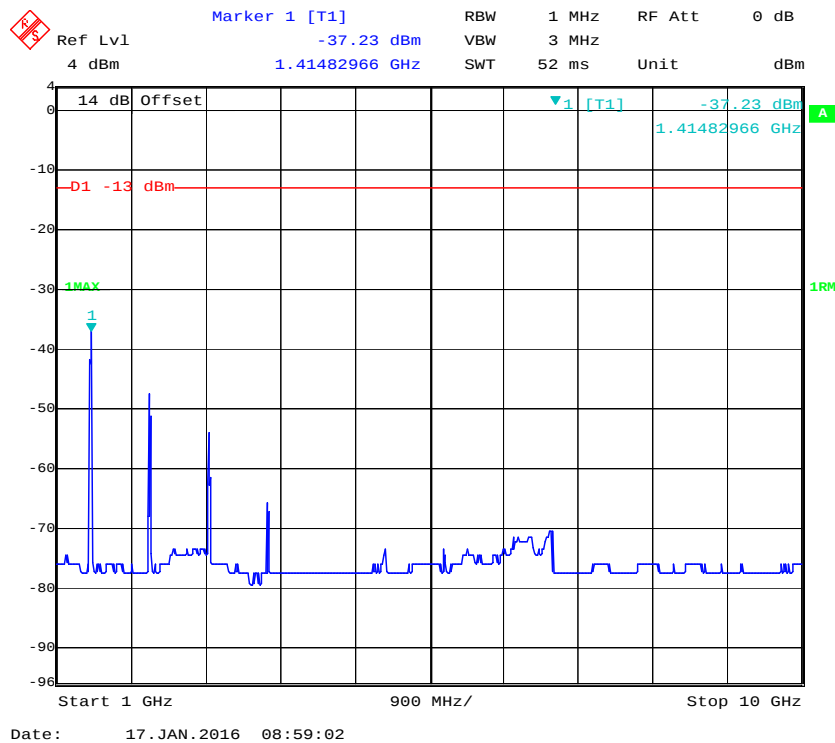LTE Band 17:**30 MHz - 1 GHz (5.0 MHz, Middle Channel)****1 GHz - 10 GHz (5.0 MHz, Middle Channel)**

30 MHz - 1 GHz (10.0 MHz, Middle Channel)

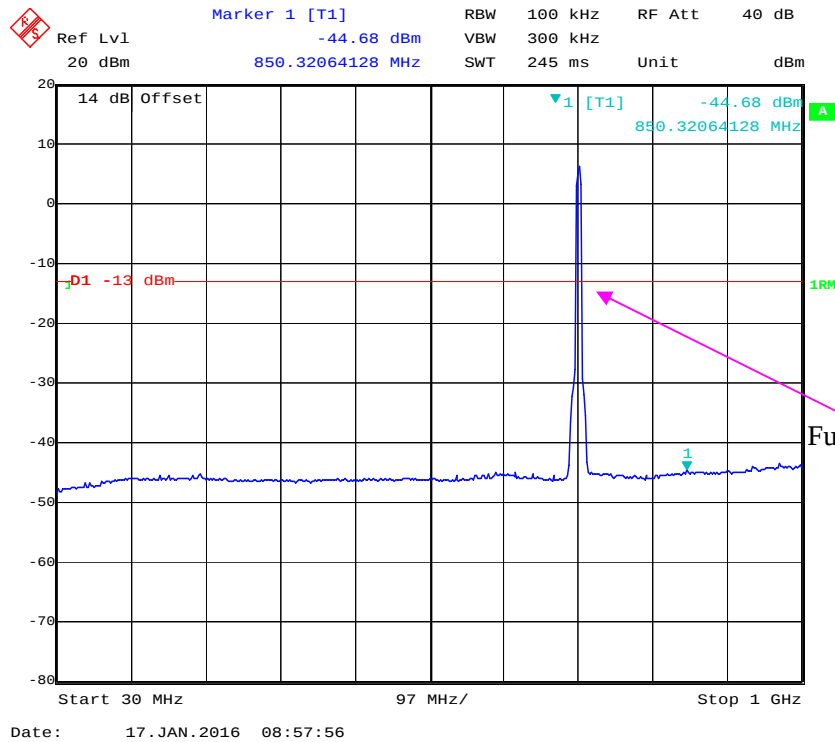

1 GHz – 10 GHz (10.0 MHz, Middle Channel)

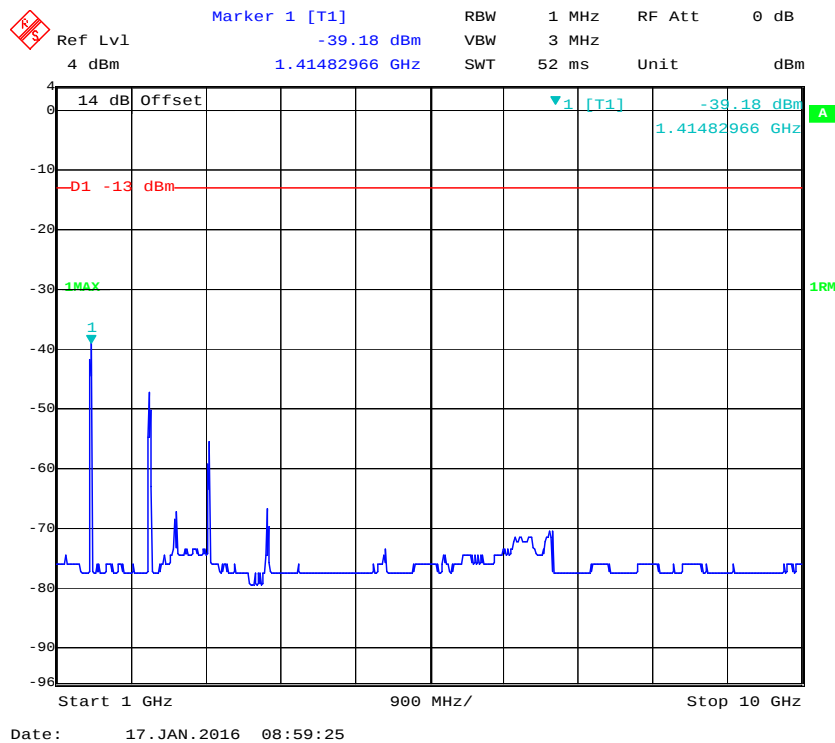

FCC §2.1053, §22.917 & §24.238 & §27.53 - SPURIOUS RADIATED EMISSIONS

Applicable Standards

FCC § 2.1053, §22.917 and § 24.238 and § 27.53.

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TX pwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \log_{10} (\text{power out in Watts})$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Horn Antenna	DRH-118	A052604	2014-12-29	2017-12-28
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-07	2017-12-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2015-04-23	2016-04-23
HP	Amplifier	HP8447E	1937A01046	2015-05-06	2016-05-06
HP	Signal Generator	HP 8341B	2624A00116	2015-07-02	2016-07-01
COM POWER	Dipole Antenna	AD-100	041000	2015-08-18	2016-08-18
A.H. System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2015-11-03	2016-11-03
Electro-Mechanics	Horn Antenna	3116	9510-2270	2013-10-14	2016-10-13
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-146520-wh	2015-11-23	2016-11-23
Ducommun technologies	RF Cable	UFA210A-1-4724-30050U	MFR64369 223410-001	2015-06-15	2016-06-15
Ducommun technologies	RF Cable	104PEA	218124002	2015-06-15	2016-06-15
Ducommun technologies	RF Cable	RG-214	1	2015-06-15	2016-06-15
Ducommun technologies	RF Cable	RG-214	2	2015-06-15	2016-06-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	101.0kPa

The testing was performed by Haiguo Li on 2016-01-15.

Test mode: Transmitting

Test mode: Transmitting (Pre-scan with Low, Middle, High channel, and the worse case data as below)

30 MHz ~ 10 GHz:

Cellular Band (Part 22H)

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
GSM Mode, Middle channel										
169.58	37.69	301	1.2	H	-59.3	0.28	0	-59.58	-13	46.58
169.58	36.57	220	1.7	V	-60.4	0.28	0	-60.68	-13	47.68
1673.20	62.33	336	1.0	H	-45.1	1.60	6.90	-39.80	-13	26.80
1673.20	64.81	166	1.8	V	-43.0	1.60	6.90	-37.70	-13	24.70
2509.80	70.76	216	1.6	H	-33.8	1.70	8.60	-26.90	-13	13.90
2509.80	63.89	81	2.3	V	-41.0	1.70	8.60	-34.10	-13	21.10
WCDMA Mode, Middle channel										
256.87	37.46	330	2.3	H	-59.5	0.32	0	-59.82	-13	46.82
256.87	36.53	221	2.3	V	-60.5	0.32	0	-60.82	-13	47.82
1673.20	49.71	104	1.5	H	-57.7	1.60	6.90	-52.40	-13	39.40
1673.20	46.61	26	1.5	V	-61.2	1.60	6.90	-55.90	-13	42.90

30 MHz ~ 20 GHz:**PCS Band (Part 24E)**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
GSM Mode, Middle channel										
169.58	37.27	123	1.3	H	-59.7	0.28	0	-59.98	-13	46.98
169.58	36.31	251	1.7	V	-60.7	0.28	0	-60.98	-13	47.98
3760.00	48.93	58	1.1	H	-50.5	1.90	9.90	-42.50	-13	29.50
3760.00	52.75	298	1.5	V	-46.3	1.90	9.90	-38.30	-13	25.30
5640.00	55.55	27	1.7	H	-40.9	2.10	10.30	-32.70	-13	19.70
5640.00	55.79	184	1.7	V	-40.1	2.10	10.30	-31.90	-13	18.90
WCDMA Mode, Middle channel										
256.87	37.86	16	1.8	H	-59.1	0.32	0	-59.42	-13	46.42
256.87	36.73	328	1.1	V	-60.3	0.32	0	-60.62	-13	47.62
3760.00	46.39	129	1.2	H	-53.1	1.90	9.90	-45.10	-13	32.10
3760.00	45.23	252	1.6	V	-53.8	1.90	9.90	-45.80	-13	32.80

Test mode: Transmitting (Pre-scan with all the bandwidth, and worse case as below)

Frequency	Receiver	Turntable	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
(MHz)	Reading (dBμV)	Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
Band 2										
221.34	36.35	166	2.4	H	-60.6	0.30	0	-60.90	-13	47.90
221.34	35.48	311	1.2	V	-61.5	0.30	0	-61.80	-13	48.80
3760.00	48.52	134	2.0	H	-51.0	1.90	9.90	-43.00	-13	30.00
3760.00	47.23	331	1.9	V	-51.8	1.90	9.90	-43.80	-13	30.80
5640.00	43.26	81	1.2	H	-53.2	2.10	10.30	-45.00	-13	32.00
5640.00	42.25	19	1.8	V	-53.6	2.10	10.30	-45.40	-13	32.40
Band 4										
221.34	36.75	63	1.0	H	-60.2	0.30	0	-60.50	-13	47.50
221.34	35.42	159	2.3	V	-61.6	0.30	0	-61.90	-13	48.90
3465.00	49.18	84	1.7	H	-46.4	1.90	10.00	-38.30	-13	25.30
3465.00	47.26	112	1.1	V	-48.4	1.90	10.00	-40.30	-13	27.30
5197.50	45.24	101	1.2	H	-48.6	1.80	10.10	-40.30	-13	27.30
5197.50	42.12	282	2.1	V	-51.1	1.80	10.10	-42.80	-13	29.80
Band 7										
221.34	36.86	351	1.7	H	-60.1	0.30	0	-60.40	-25	35.4
221.34	35.56	159	2.0	V	-61.4	0.30	0	-61.70	-25	36.7
5070.00	48.12	326	1.7	H	-48.2	2.30	10.10	-40.40	-25	15.4
5070.00	47.43	348	2.1	V	-48.1	2.30	10.10	-40.30	-25	15.3
7605.00	43.75	111	1.3	H	-46.6	4.70	10.80	-40.50	-25	15.5
7605.00	42.53	53	1.8	V	-48.7	4.70	10.80	-42.60	-25	17.6
Band 17										
221.34	36.84	133	2.5	H	-60.2	0.30	0	-60.50	-13	47.50
221.34	35.18	116	1.1	V	-61.8	0.30	0	-62.10	-13	49.10
1420.00	37.56	78	1.5	H	-70.9	1.20	6.40	-65.70	-13	52.70
1420.00	37.14	323	1.6	V	-71.3	1.20	6.40	-66.10	-13	53.10
2130.00	33.23	255	2.4	H	-71.0	1.60	7.80	-64.80	-13	51.80
2130.00	32.07	1	1.4	V	-71.7	1.60	7.80	-65.50	-13	52.50

Note:

- 1) Absolute Level = SG Level - Cable loss + Antenna Gain
- 2) Margin = Limit- Absolute Level

FCC §22.917(a) & §24.238(a) & §27.53 - BAND EDGES

Applicable Standards

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to FCC §27.53, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency

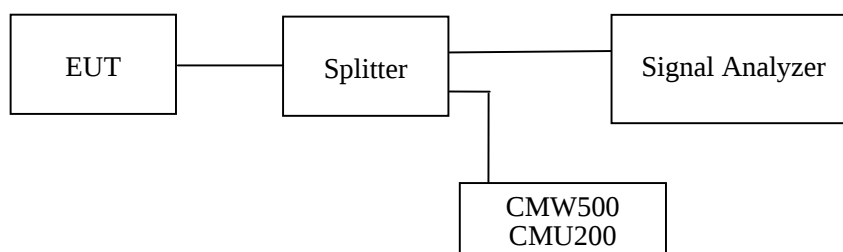

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-146520-wh	2015-11-23	2016-11-23
Ducommun technologies	RF Cable	RG-214	4	2015-06-15	2016-06-15
WEINSCHL	10dB Attenuator	5324	AU0709	2015-06-18	2016-06-18

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	101.0kPa

The testing was performed by Haiguo Li on 2016-01-15.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following plots.


Cellular Band, Left Band Edge for GSM (GMSK) Mode

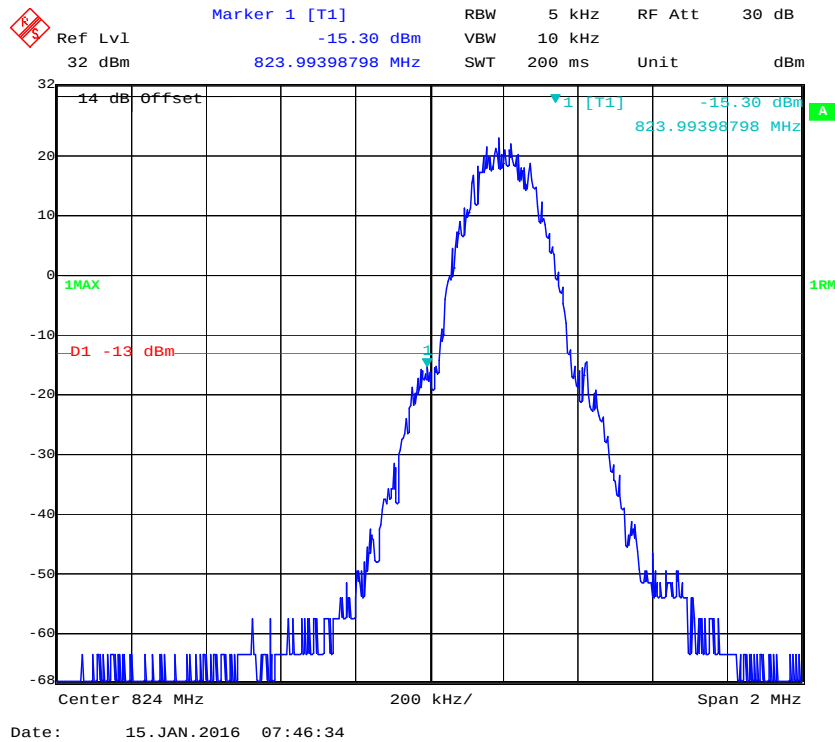


Cellular Band, Right Band Edge for GSM (GMSK) Mode


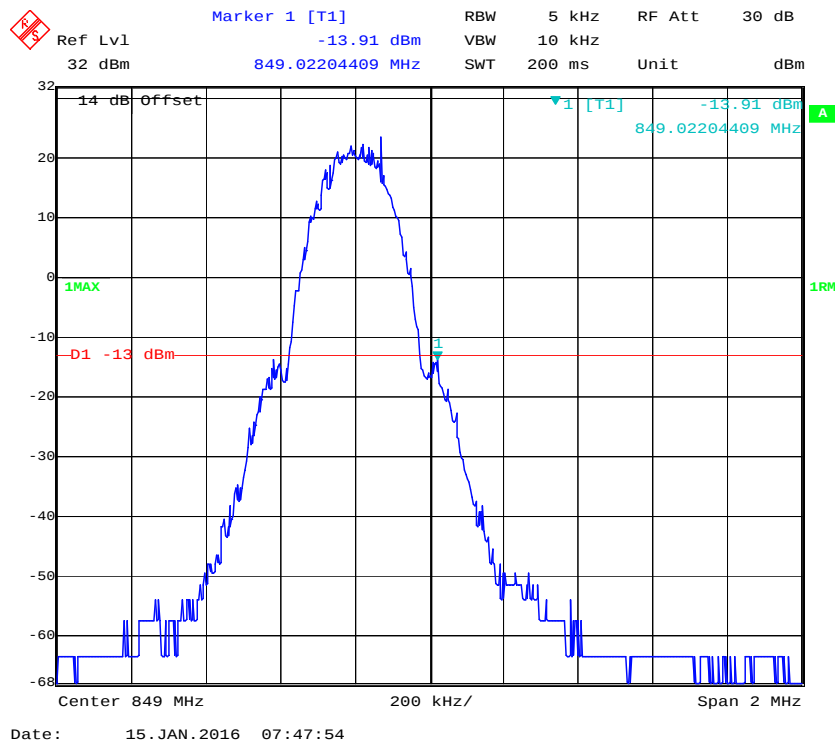


Cellular Band, Left Band Edge for EGPRS Mode

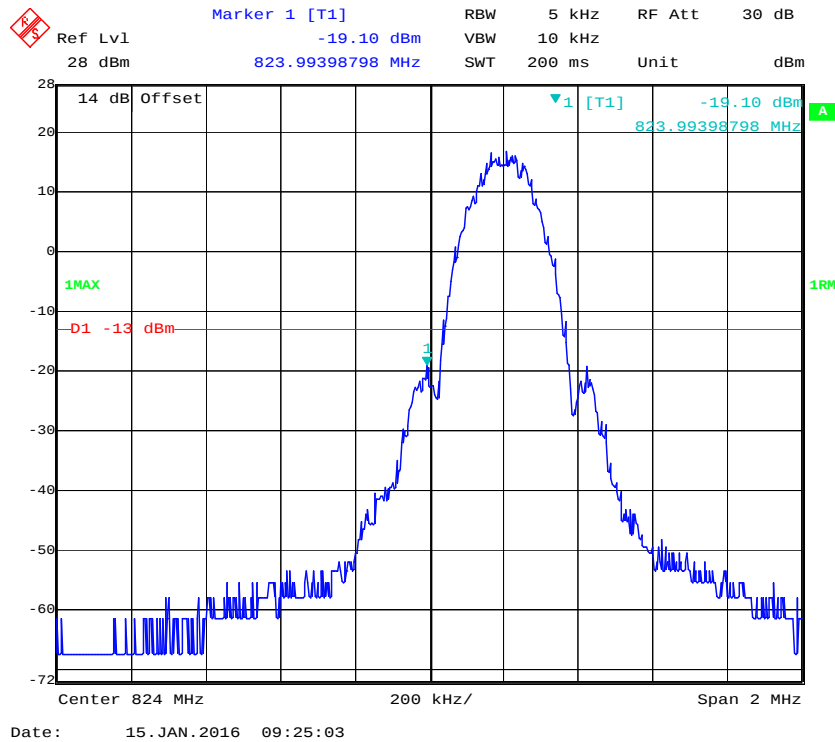


Cellular Band, Right Band Edge for EGPRS Mode

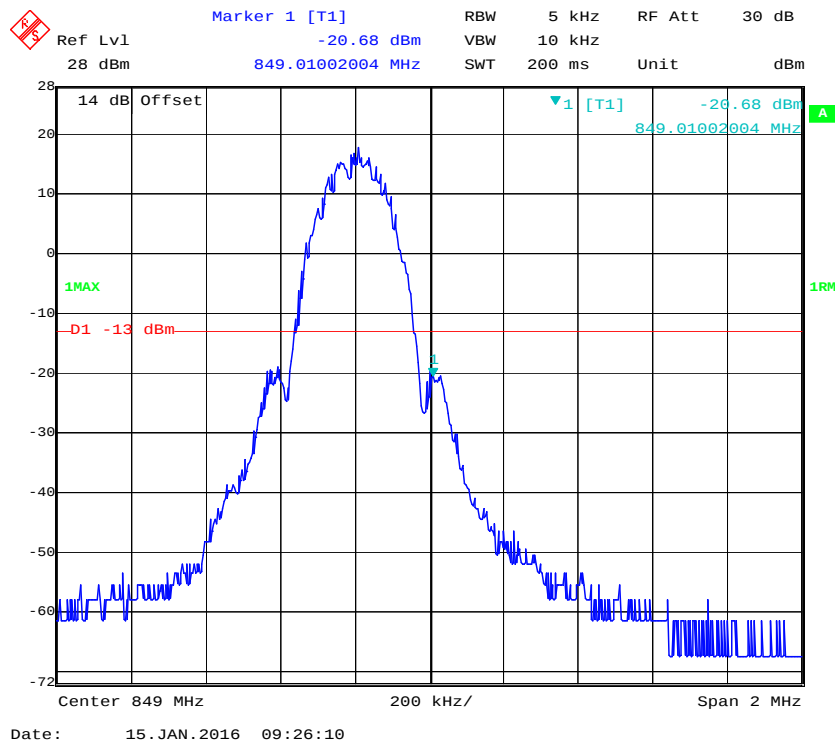


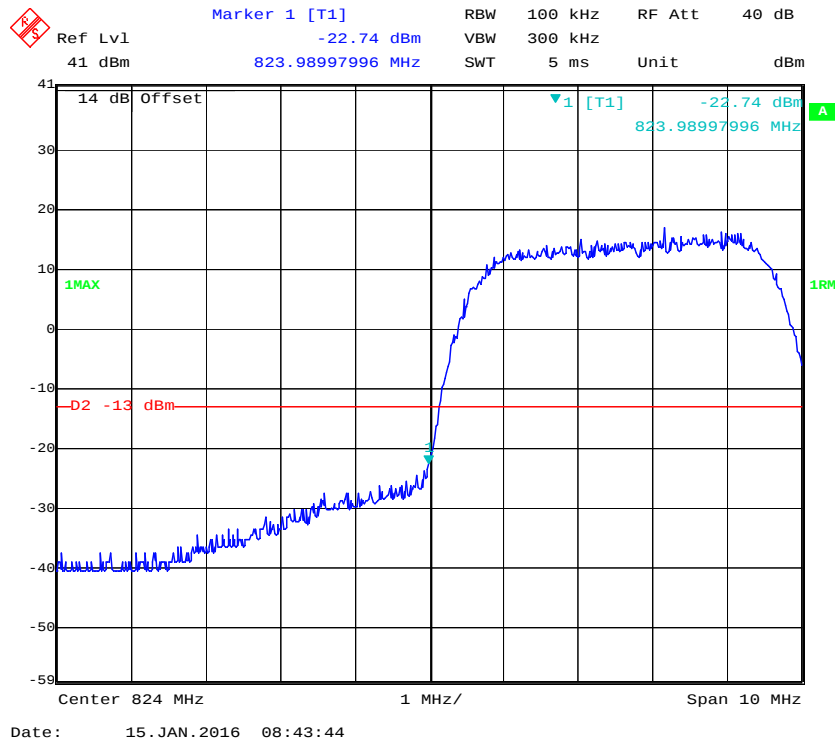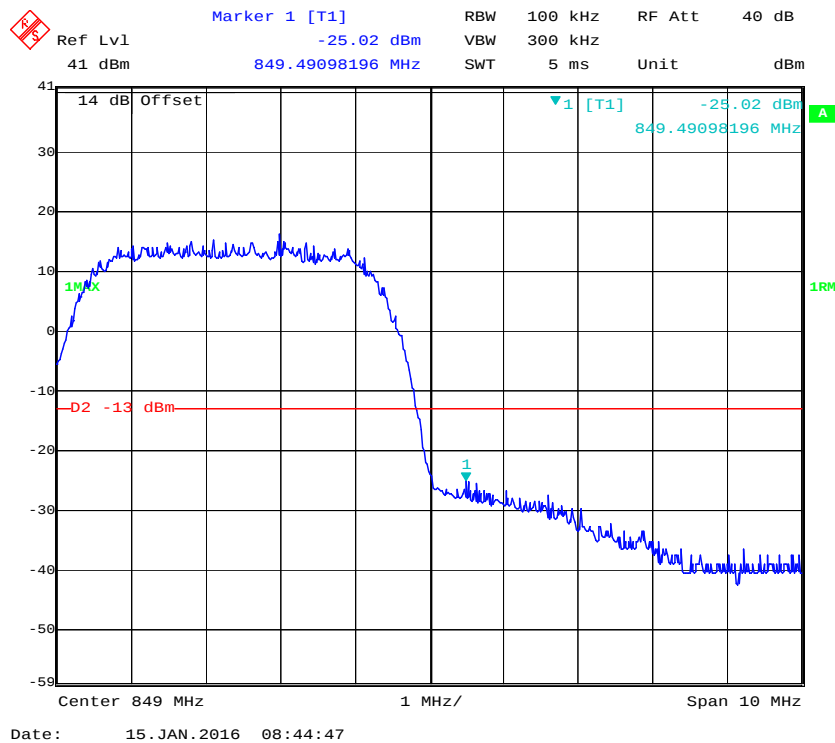Cellular Band, Left Band Edge for WCDMA (BPSK) Mode**Cellular Band, Right Band Edge for WCDMA (BPSK) Mode**


Cellular Band, Left Band Edge for HSDPA (16QAM) Mode

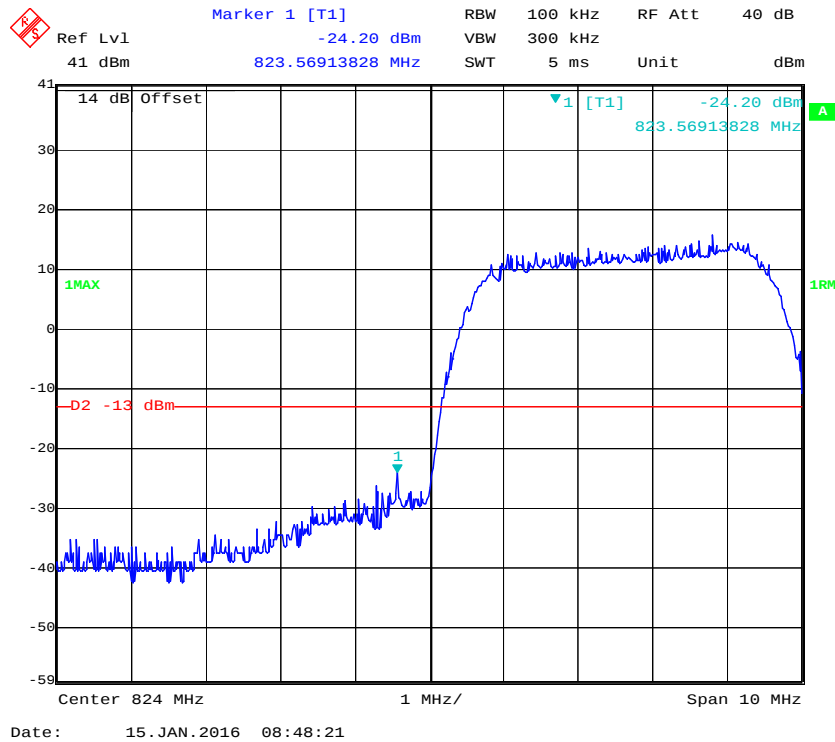


Cellular Band, Right Band Edge for HSDPA (16QAM) Mode

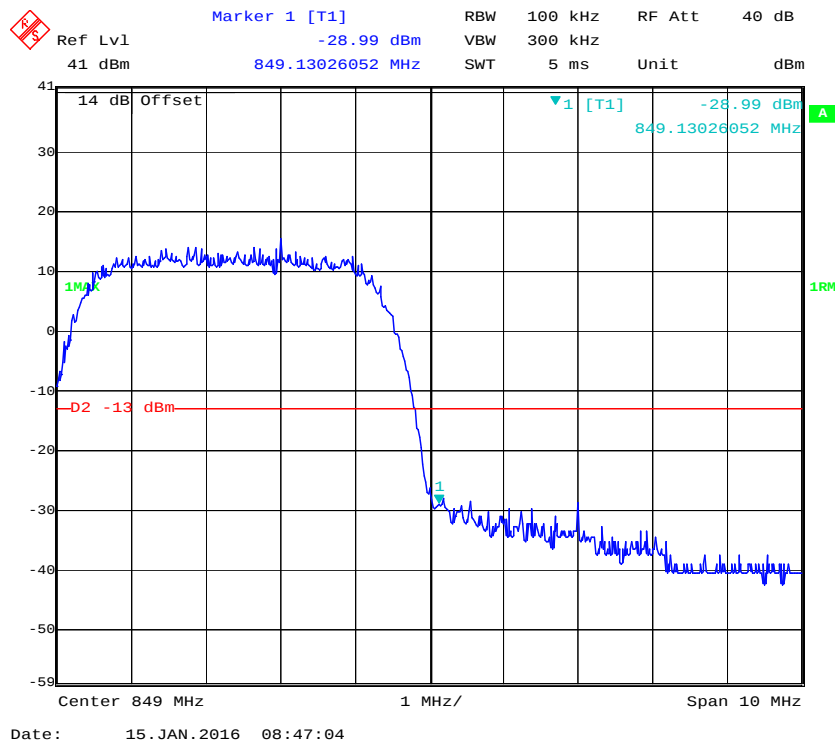


Cellular Band, Left Band Edge for HSUPA (BPSK) Mode

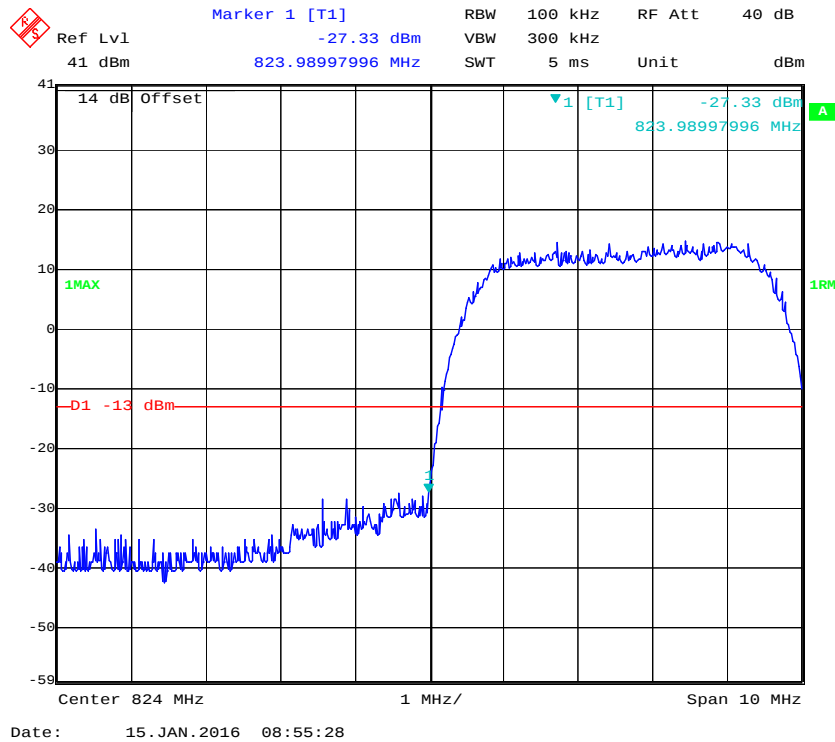


Cellular Band, Right Band Edge for HSUPA (BPSK) Mode

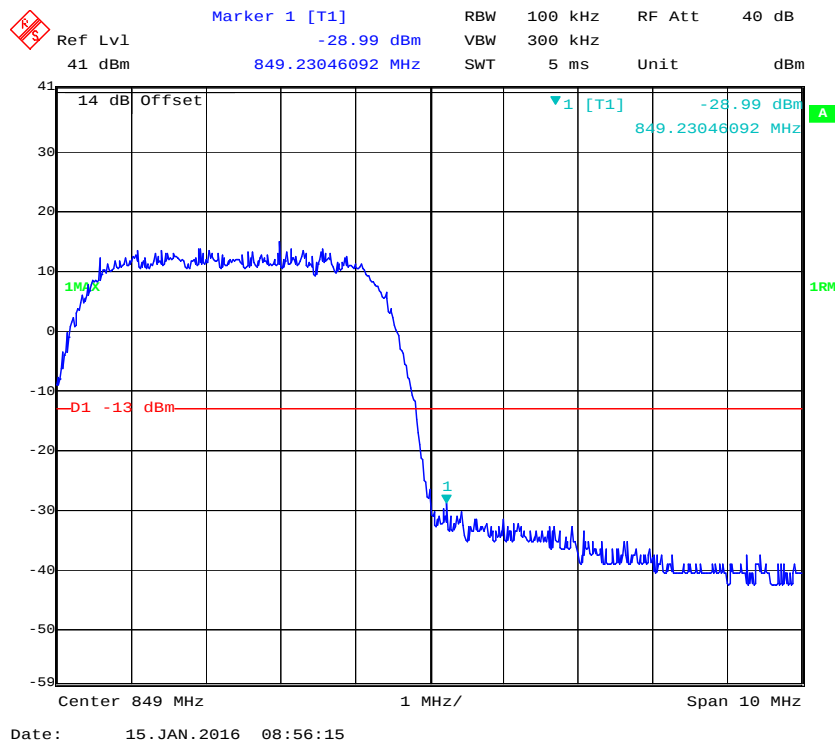


PCS Band, Left Band Edge for GSM (GMSK) Mode

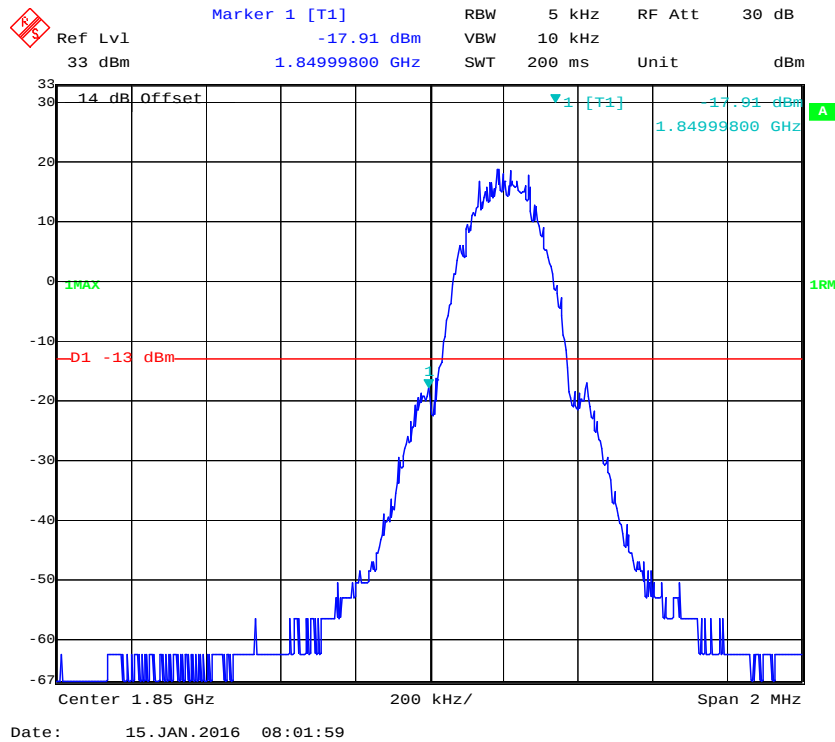


PCS Band, Right Band Edge for GSM (GMSK) Mode

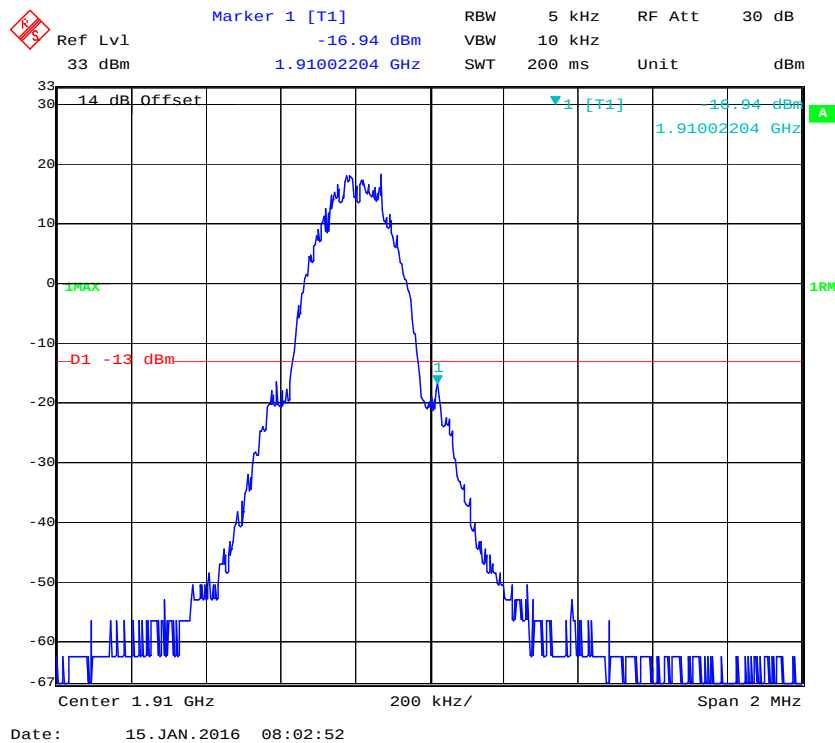


PCS Band, Left Band Edge for EGPRS Mode

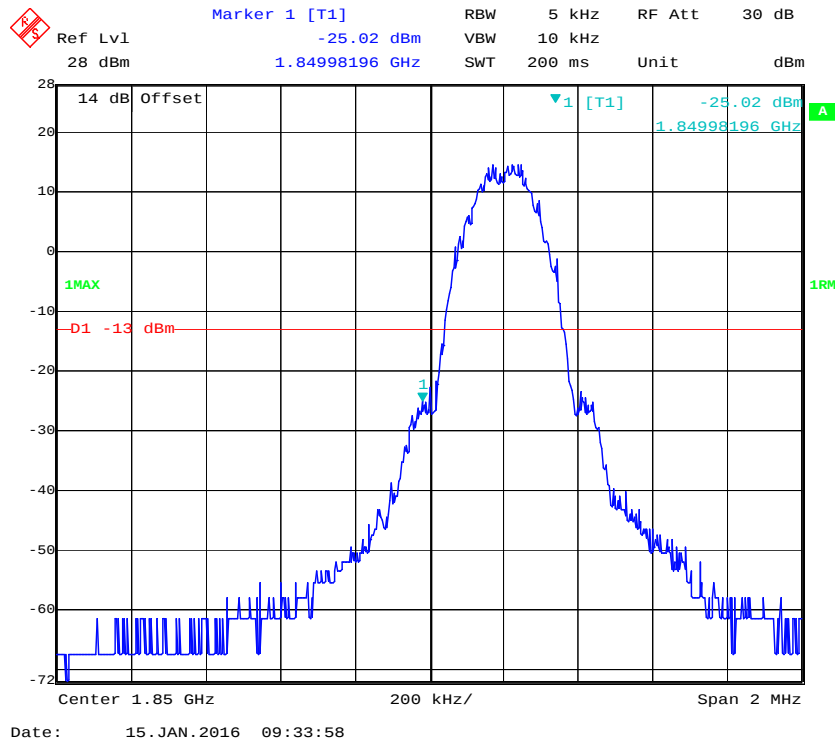


PCS Band, Right Band Edge for EGPRS Mode

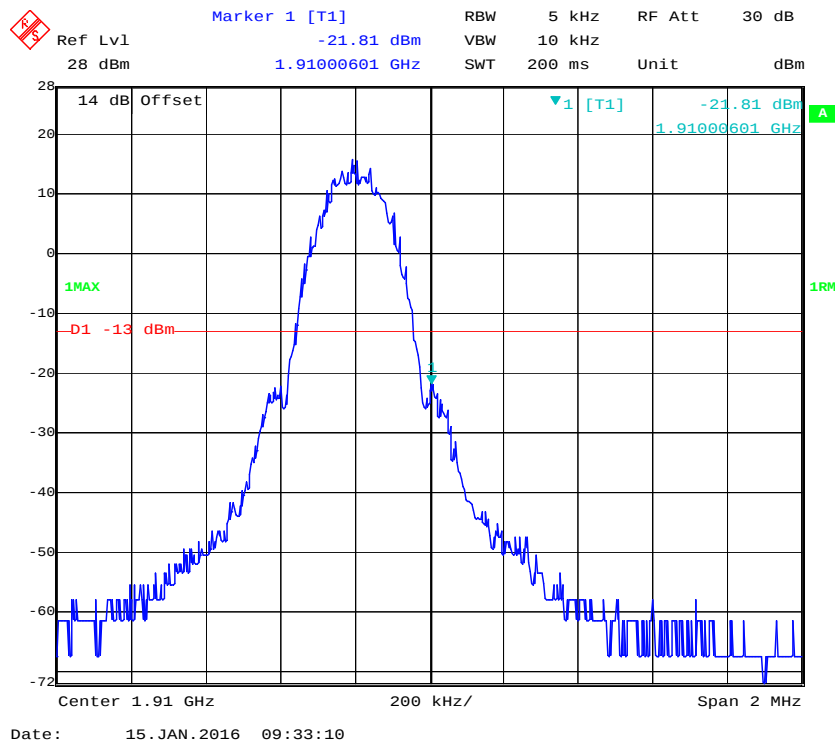


PCS Band, Left Band Edge for WCDMA (BPSK) Mode

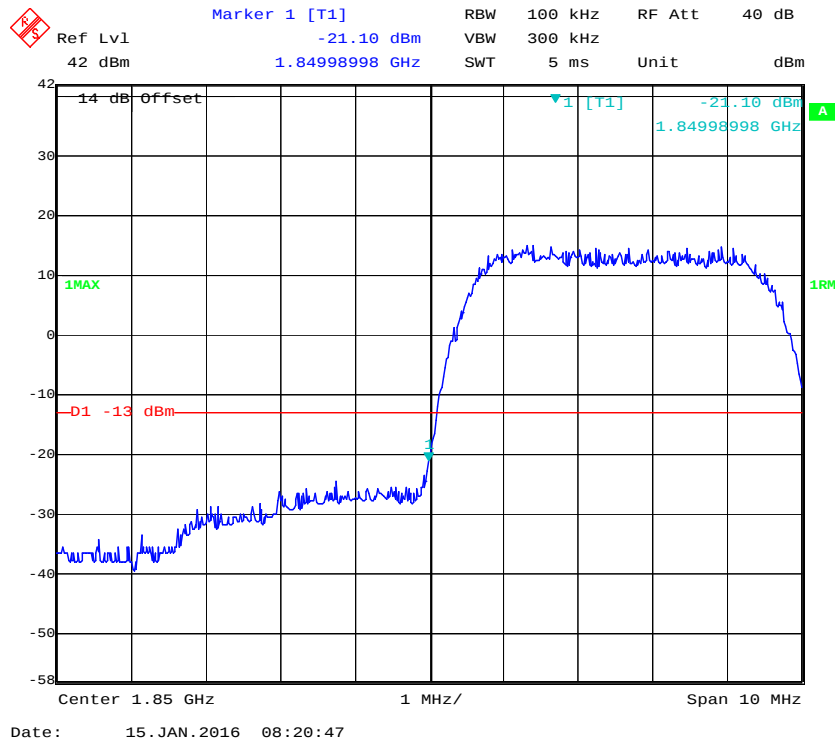


PCS Band, Right Band Edge for WCDMA (BPSK) Mode

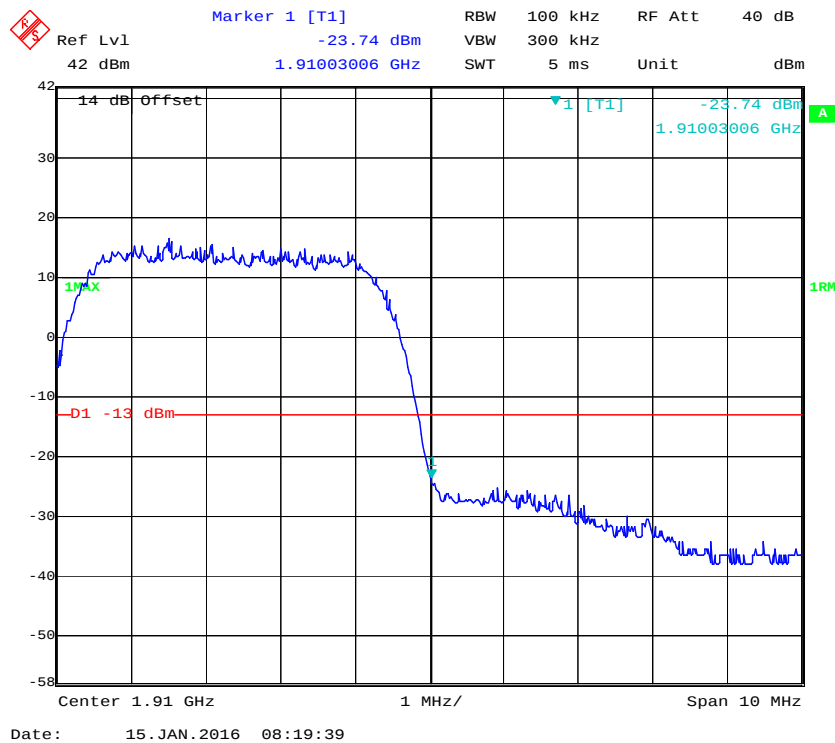


PCS Band, Left Band Edge for HSDPA (16QAM) Mode

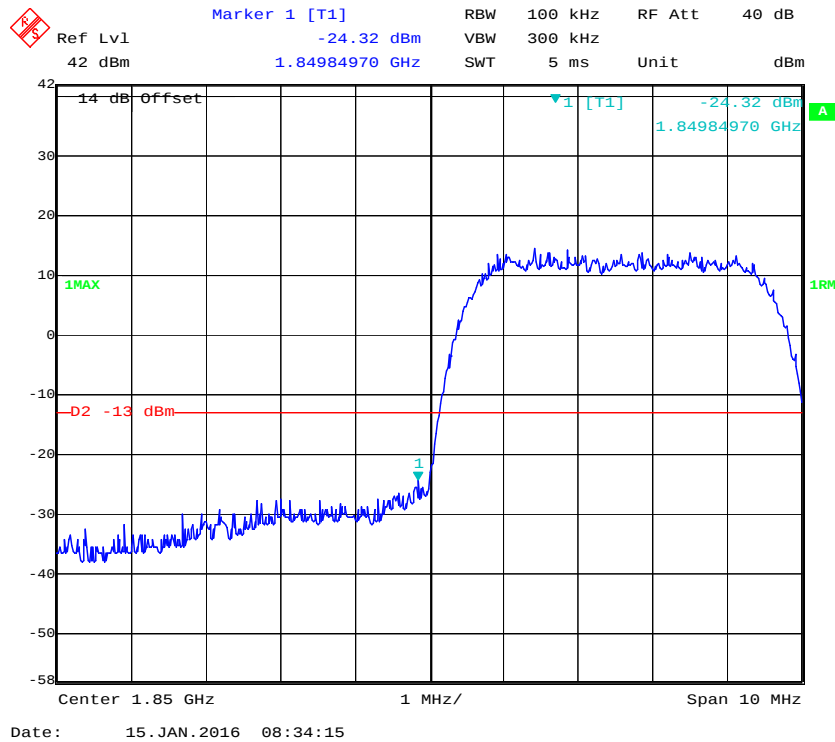


PCS Band, Right Band Edge for HSDPA (16QAM) Mode

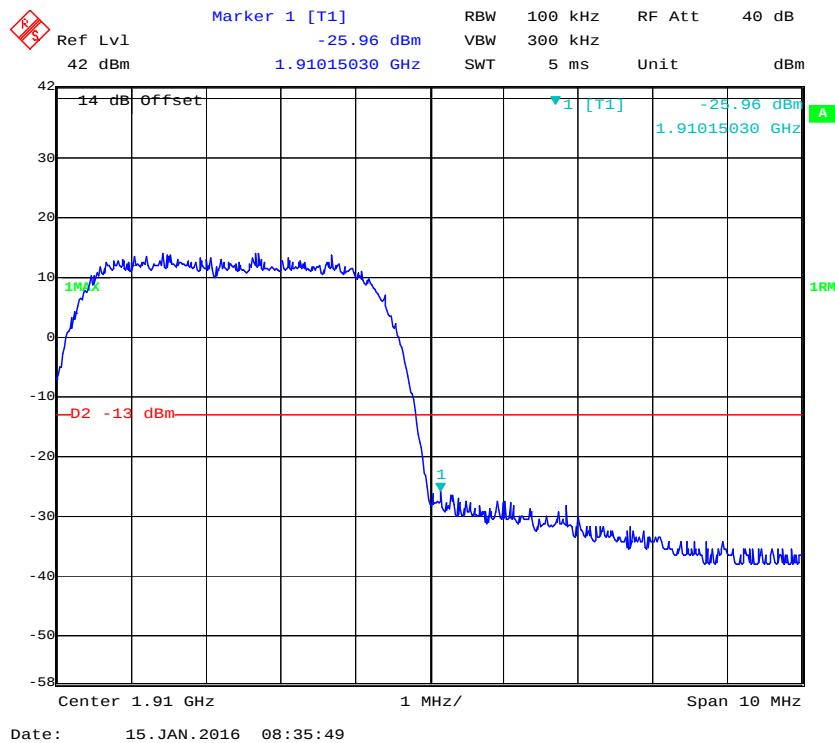

PCS Band, Left Band Edge for HSUPA (BPSK) Mode

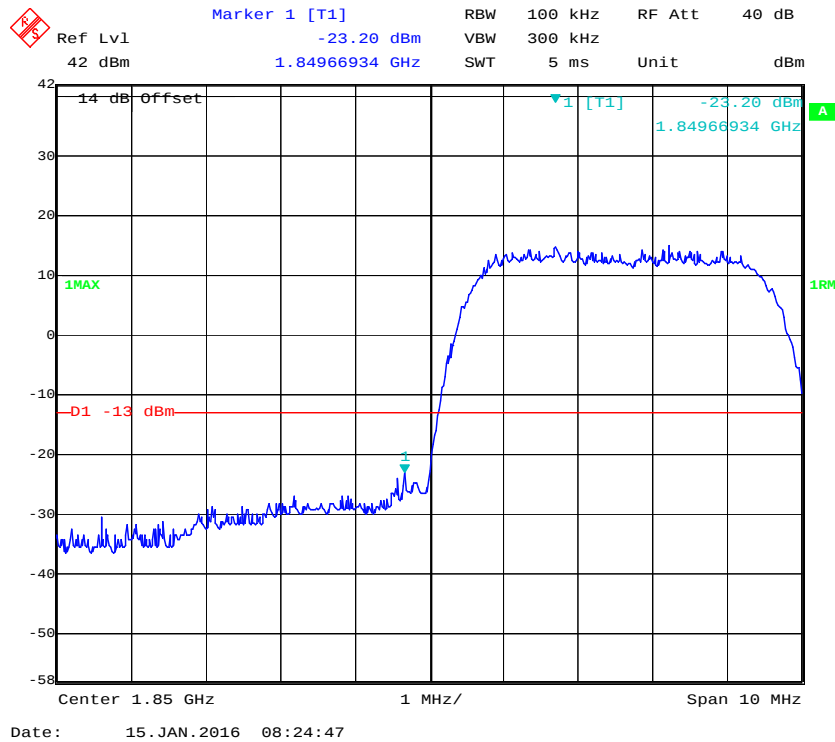


PCS Band, Right Band Edge for HSUPA (BPSK) Mode

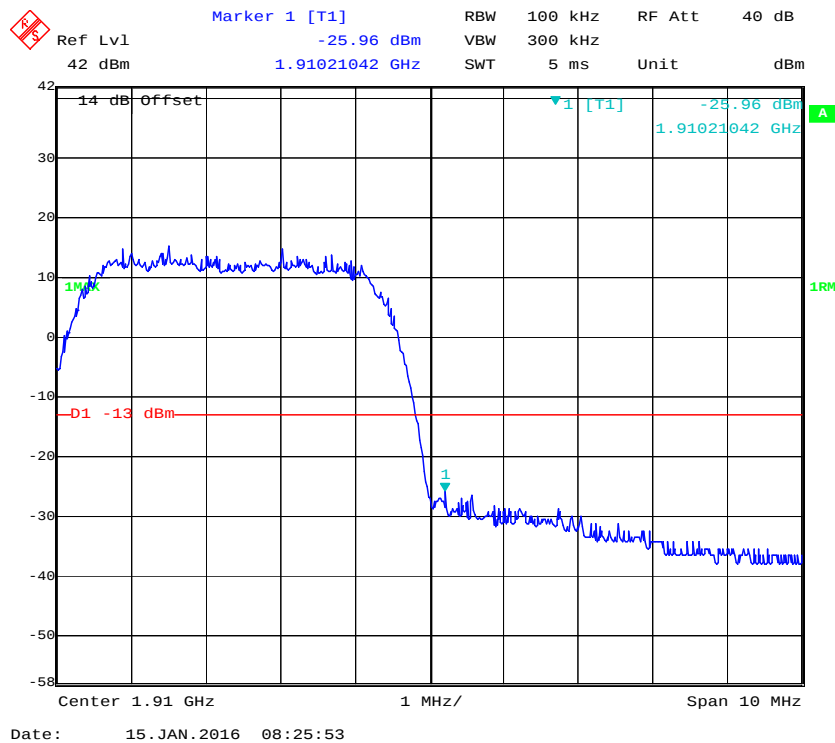


Band 2:


QPSK (1.4 MHz, FULL RB) - Left Band Edge

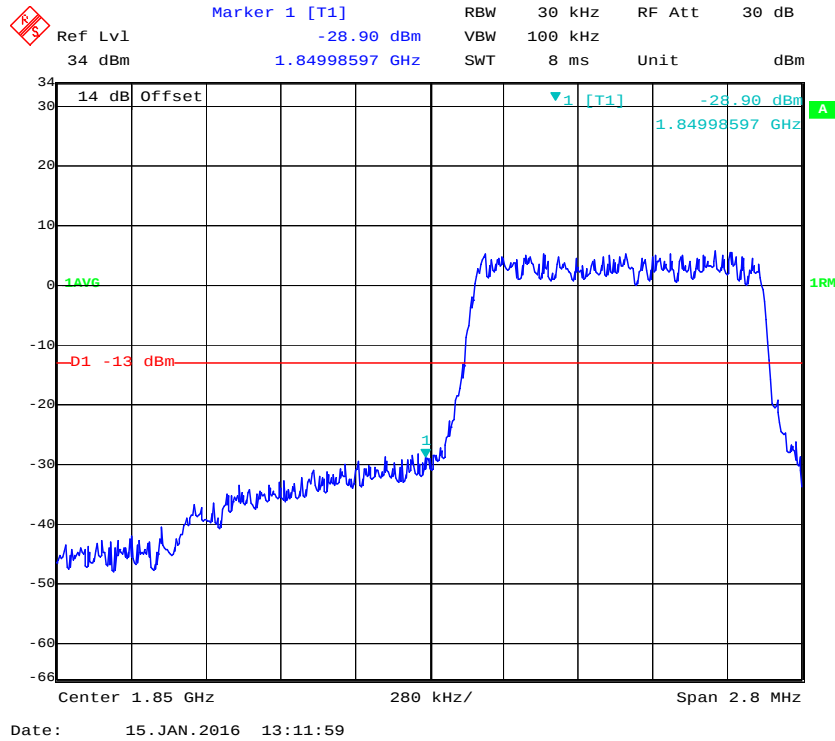


QPSK (1.4 MHz, FULL RB) - Right Band Edge

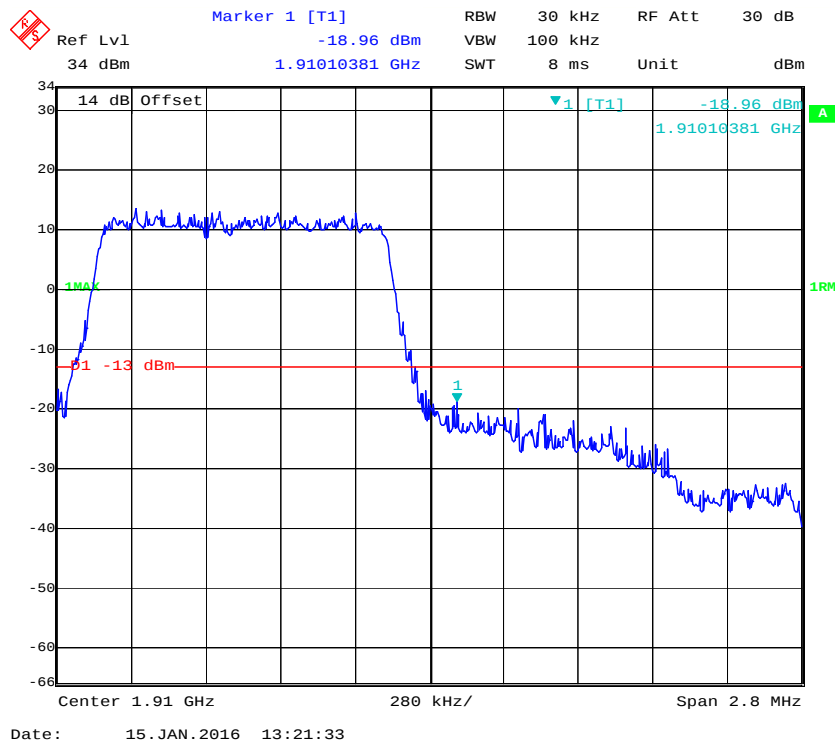


16-QAM (1.4 MHz, FULL RB) - Left Band Edge

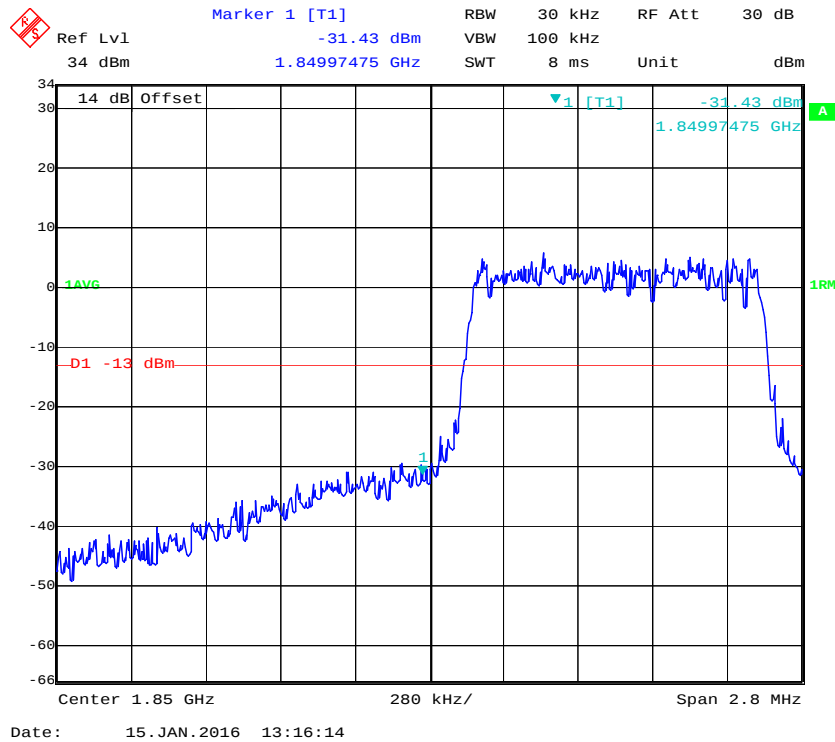


16-QAM (1.4 MHz, FULL RB) - Right Band Edge

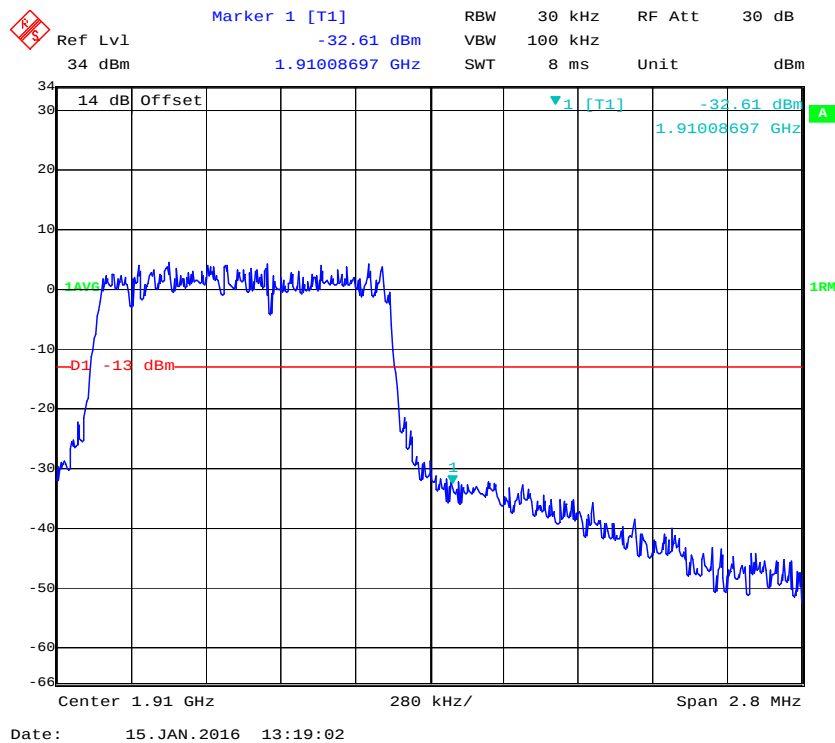

QPSK (3.0 MHz, FULL RB) - Left Band Edge

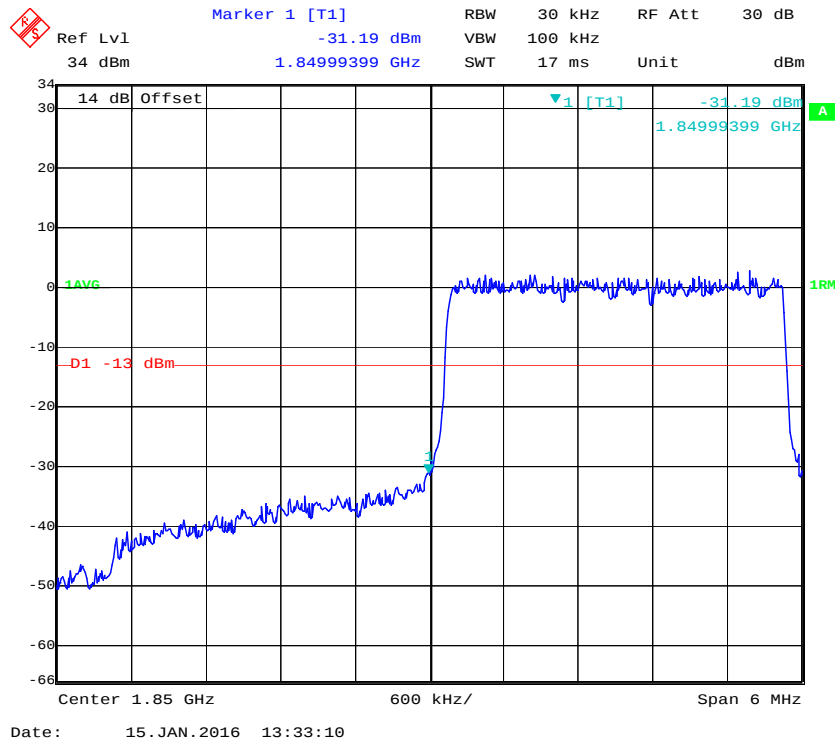

QPSK (3.0 MHz, FULL RB) - Right Band Edge

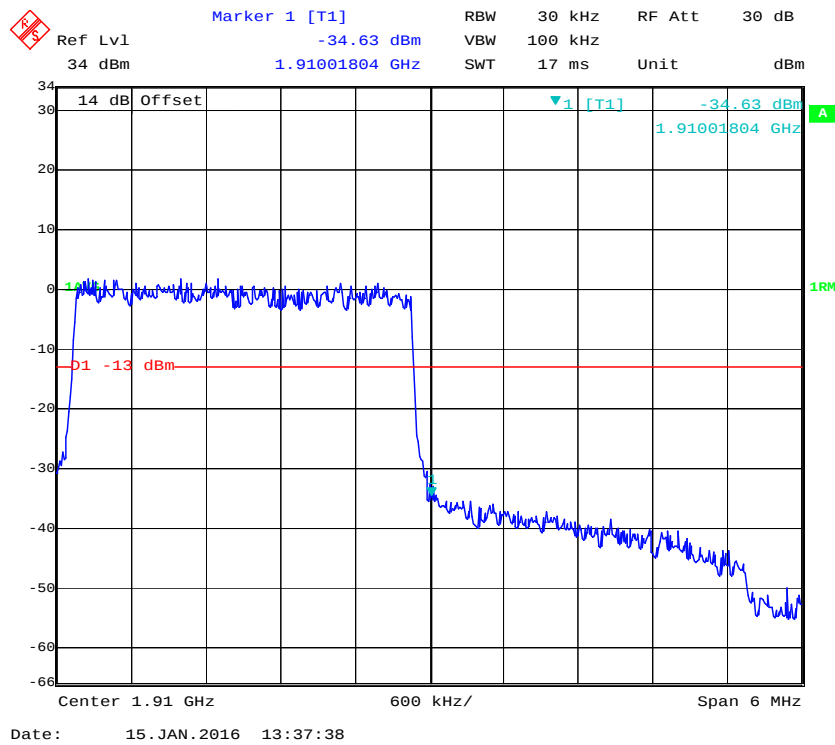

Ref Lvl: 34 dBm
 Marker 1 [T1]: -31.53 dBm
 RBW: 30 kHz
 VBW: 100 kHz
 RF Att: 30 dB
 Unit: dBm
 1.84999399 GHz
 SWT: 17 ms
 14 dB
 Offset
 1 [T1]
 -31.53 dBm
 1.84999399 GHz
 1AVG
 D1 -13 dBm
 1RM
 Center 1.85 GHz
 600 kHz/
 Span 6 MHz
 Date: 15. JAN. 2016 13:33:47

Marker 1 [T1]
 Ref Lvl -35.87 dBm
 34 dBm 1.91004208 GHz
 RBW 30 kHz RF Att 30 dB
 VBW 100 kHz SWT 17 ms Unit dBm


14 dB Offset
 1 [T1] -35.87 dBm
 1.91004208 GHz

-1AVG
 D1 -13 dBm


Center 1.91 GHz 600 kHz/ Span 6 MHz

Date: 15. JAN. 2016 13:38:03


QPSK (5.0 MHz, FULL RB) - Left Band Edge

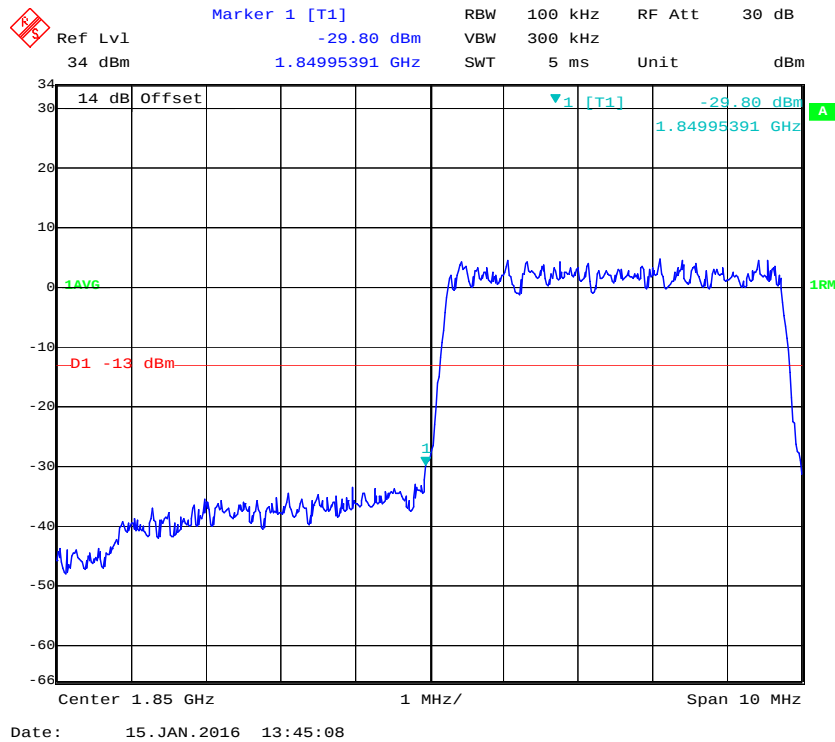


QPSK (5.0 MHz, FULL RB) - Right Band Edge

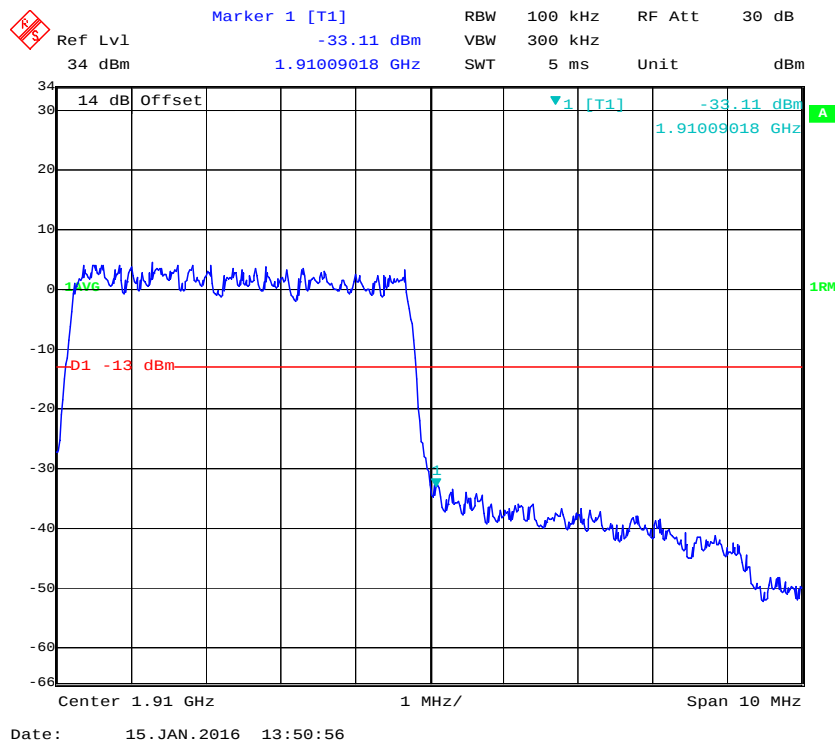


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

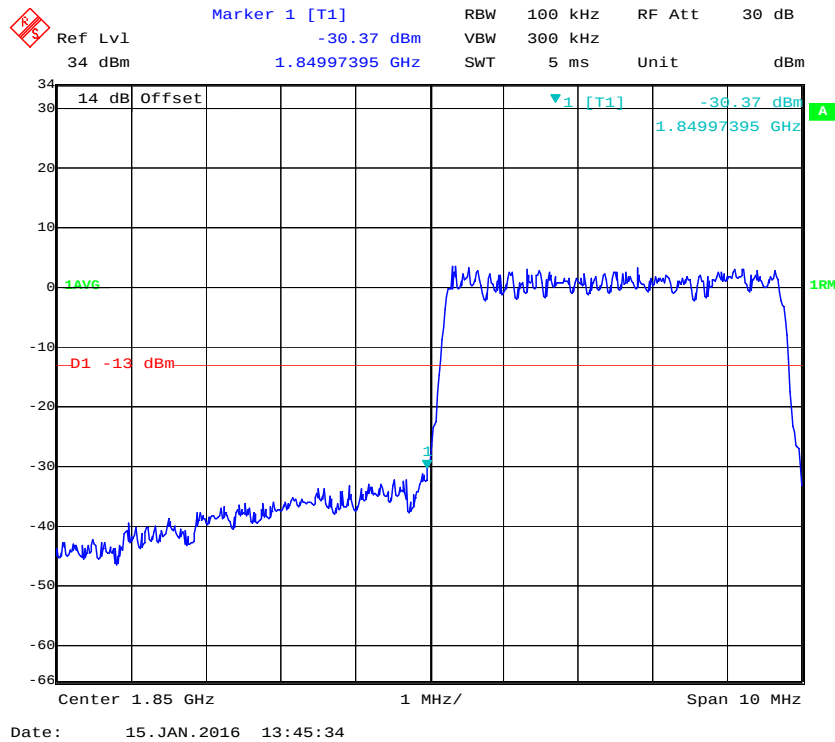


16-QAM (5.0 MHz, FULL RB) - Right Band Edge


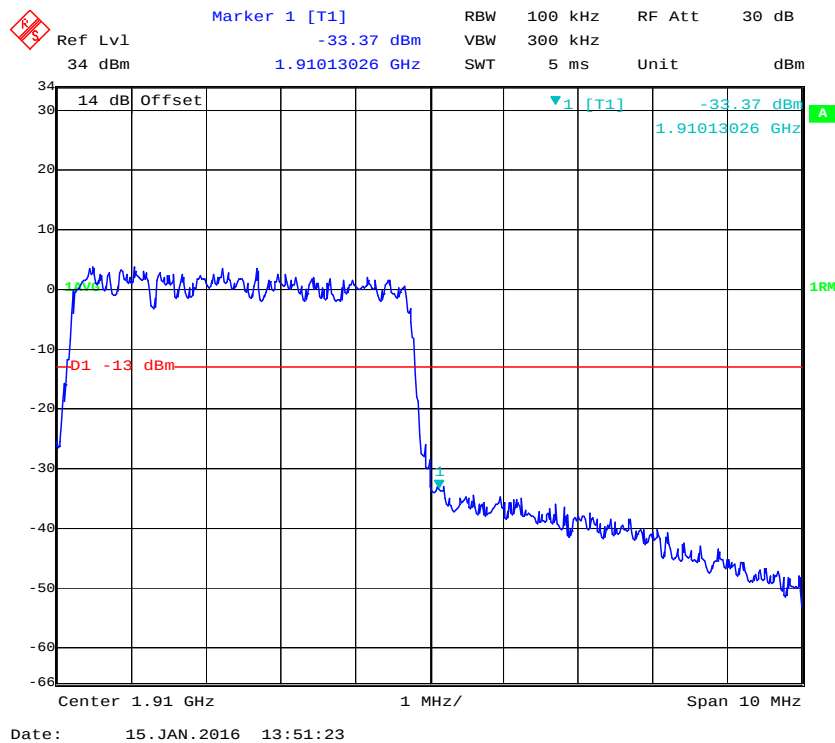


QPSK (10.0 MHz, FULL RB) - Left Band Edge

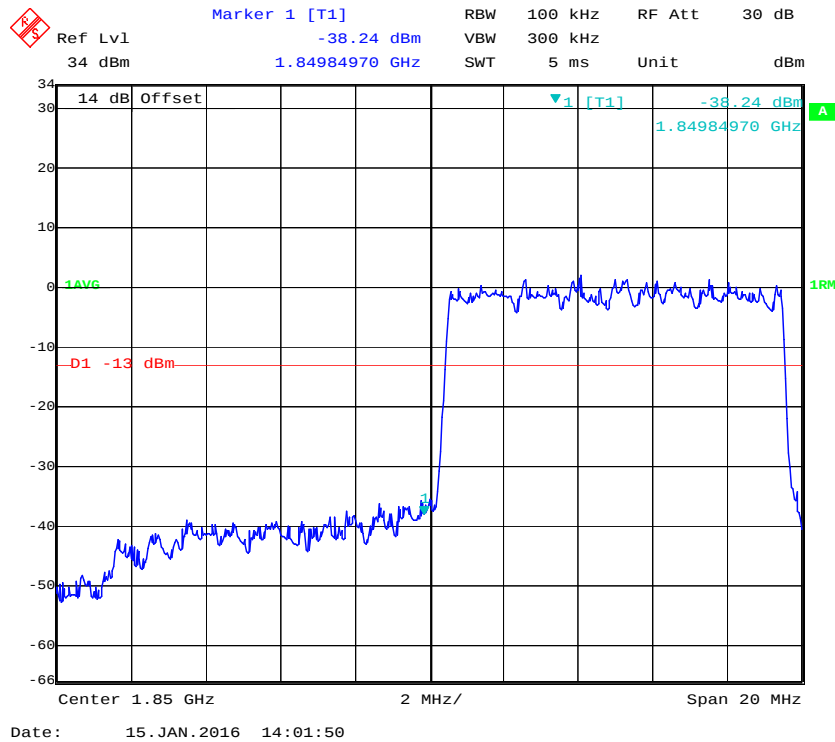


QPSK (10.0 MHz, FULL RB) - Right Band Edge

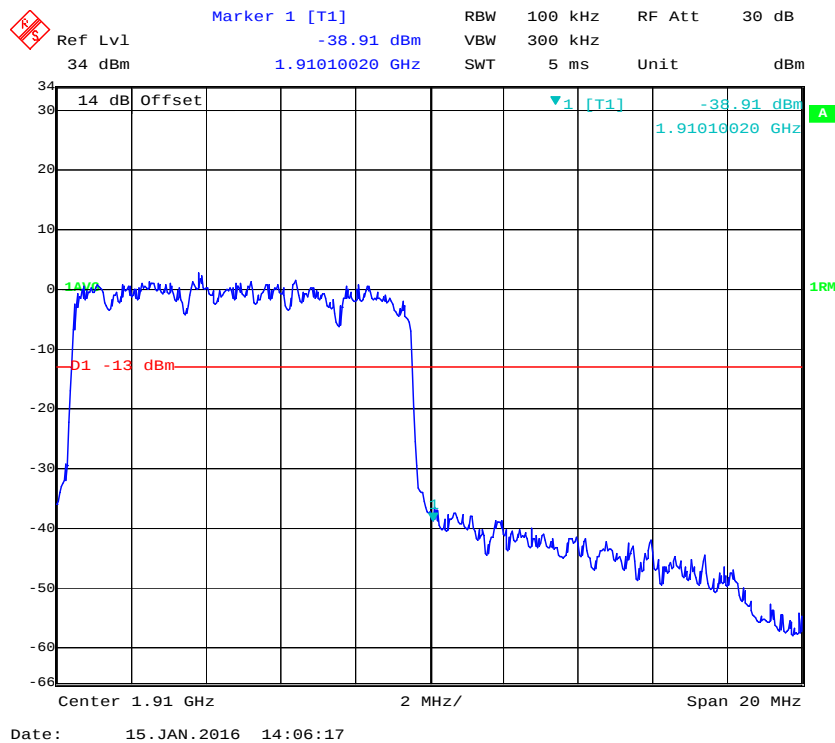


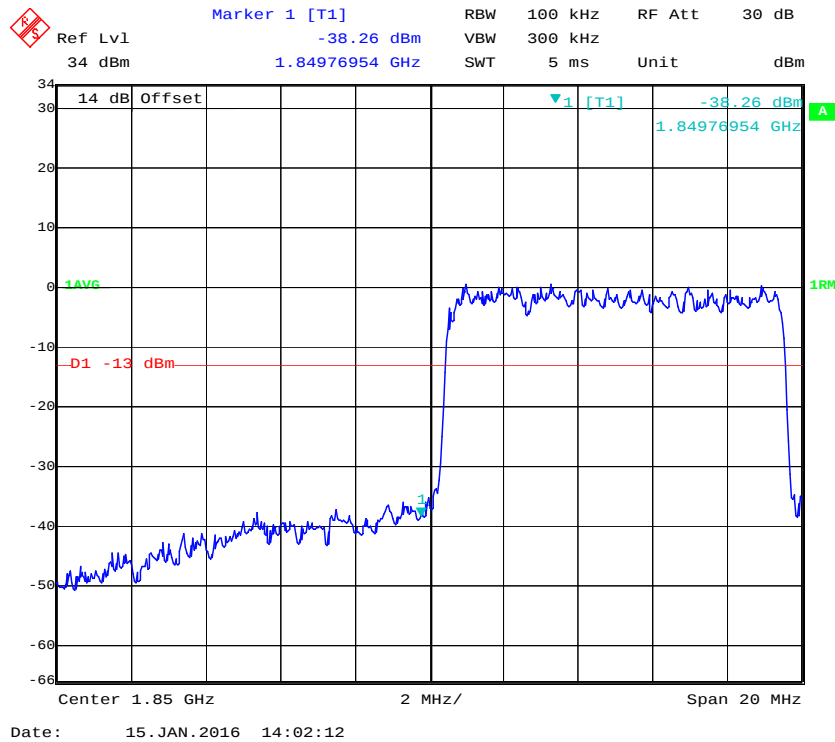
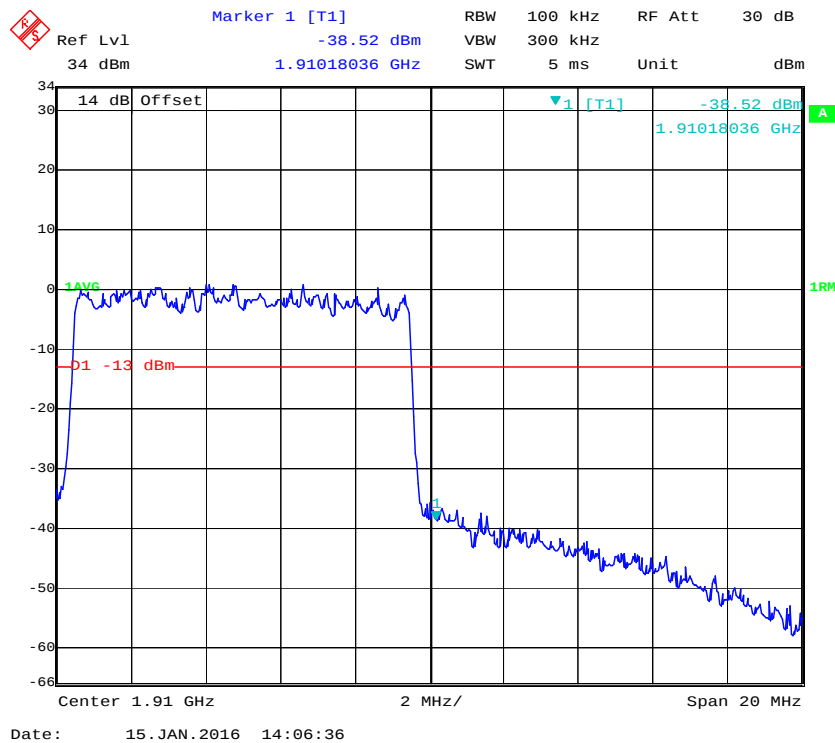
16-QAM (10.0 MHz, FULL RB) - Left Band Edge**16-QAM (10.0 MHz, FULL RB) - Right Band Edge**

QPSK (15.0 MHz, FULL RB) - Left Band Edge

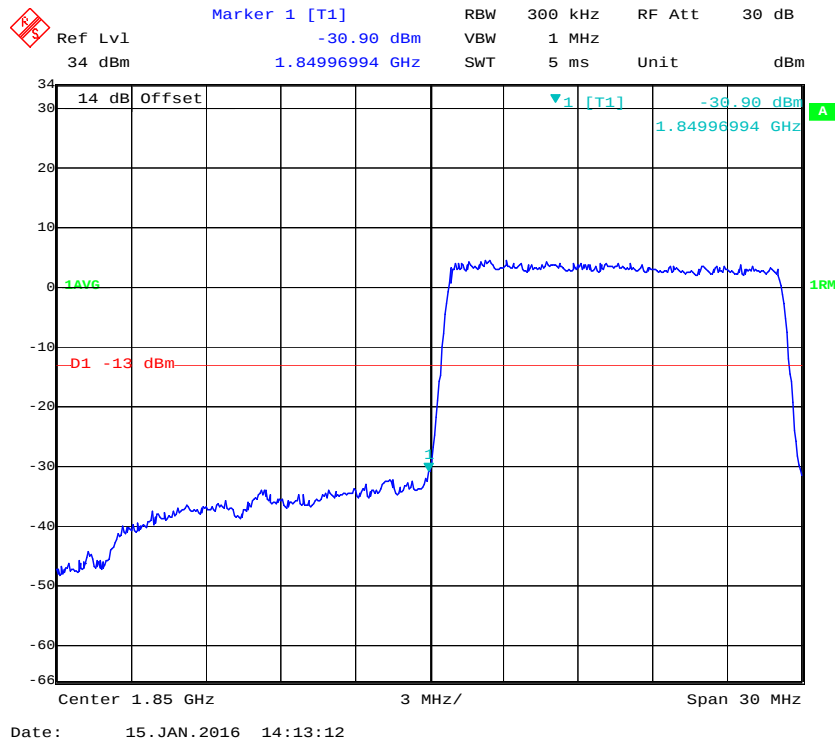


QPSK (15.0 MHz, FULL RB) - Right Band Edge

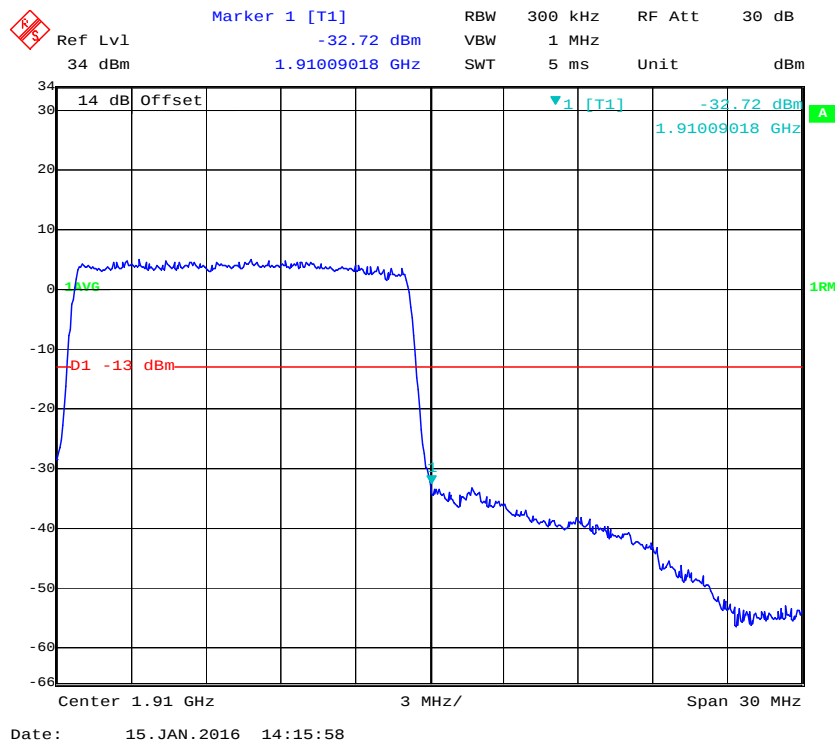


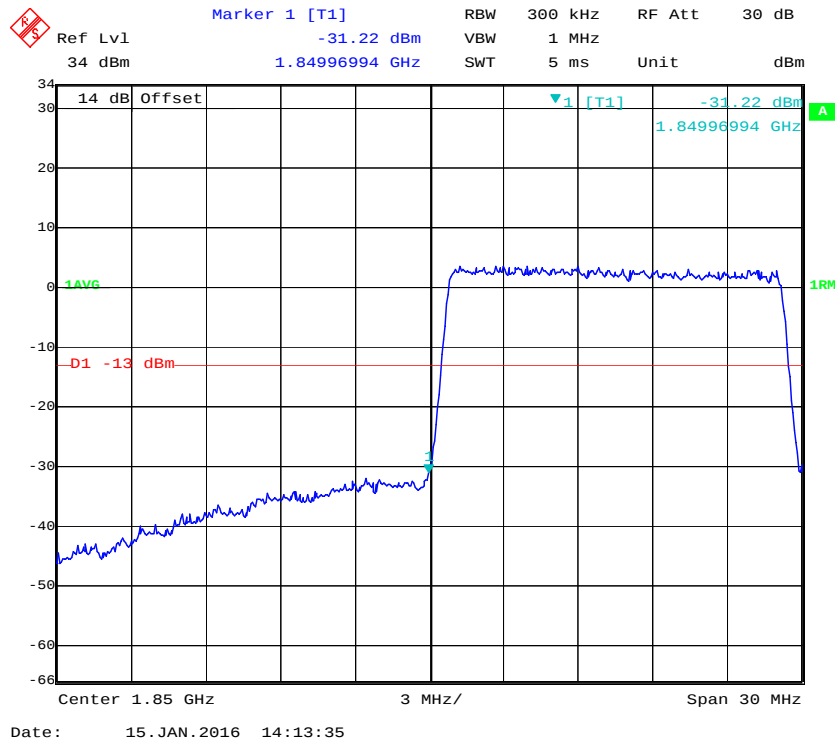
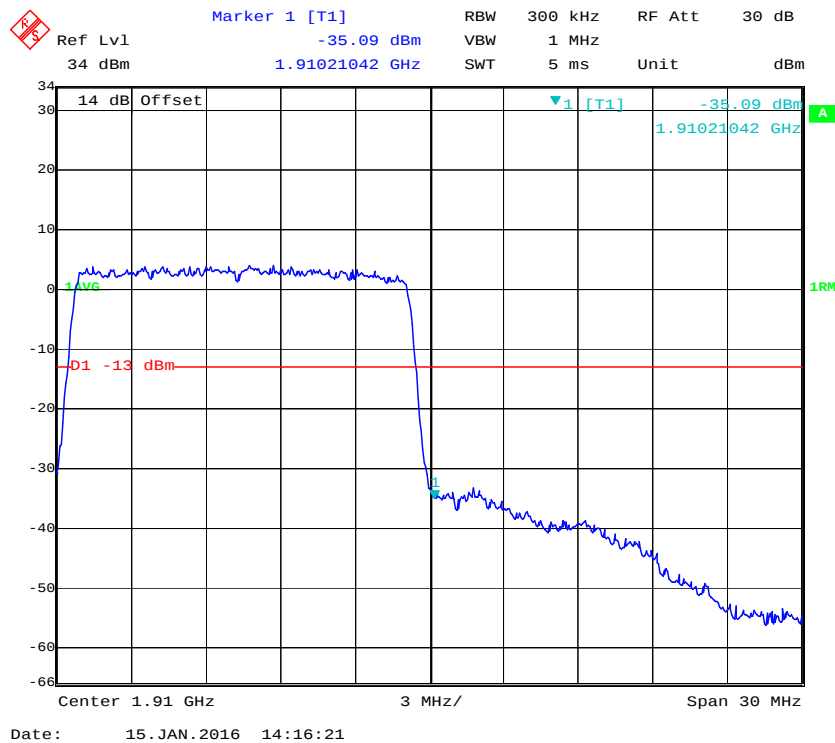
16-QAM (15.0 MHz, FULL RB) - Left Band Edge**16-QAM (15.0 MHz, FULL RB) - Right Band Edge**



QPSK (20.0 MHz, FULL RB) - Left Band Edge

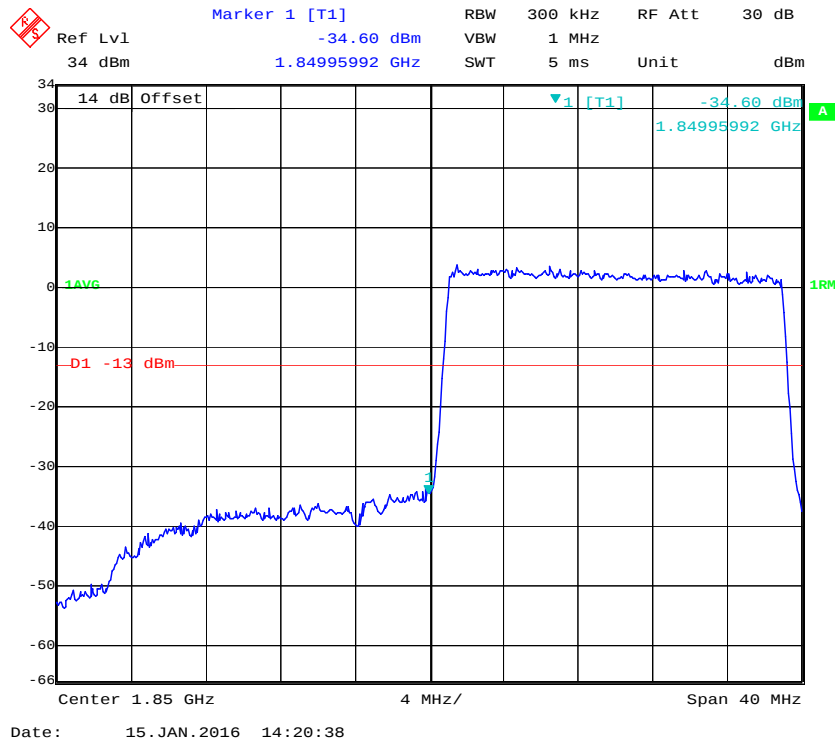


QPSK (20.0 MHz, FULL RB) - Right Band Edge

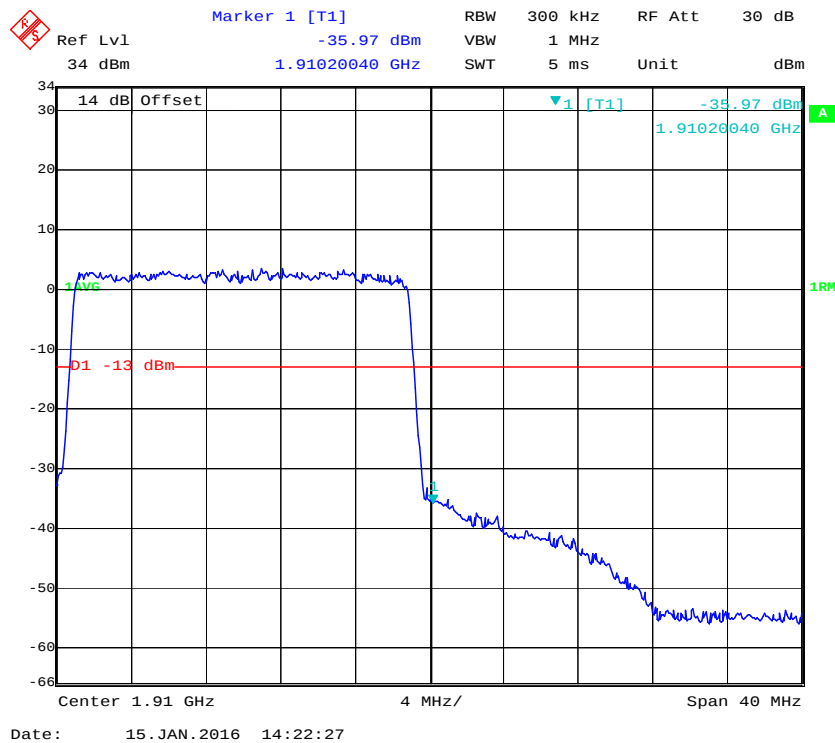

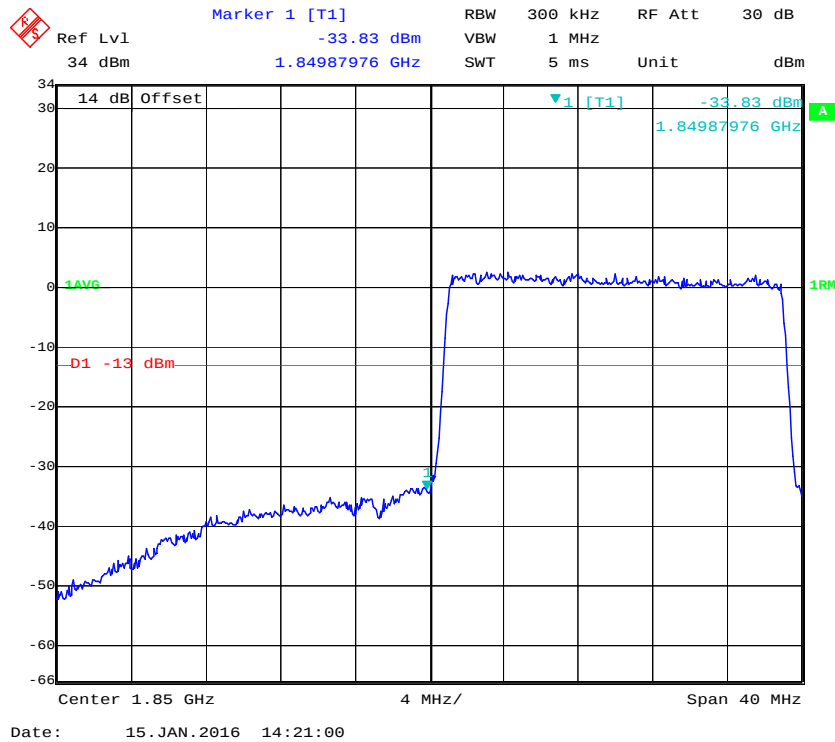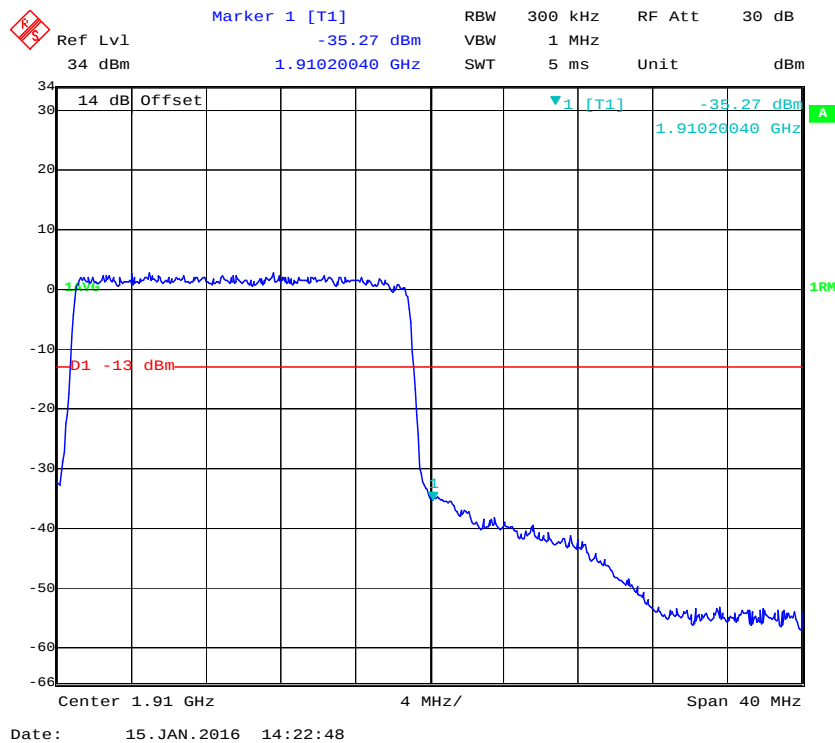
16-QAM (20.0 MHz, FULL RB) - Left Band Edge**16-QAM (20.0 MHz, FULL RB) - Right Band Edge**

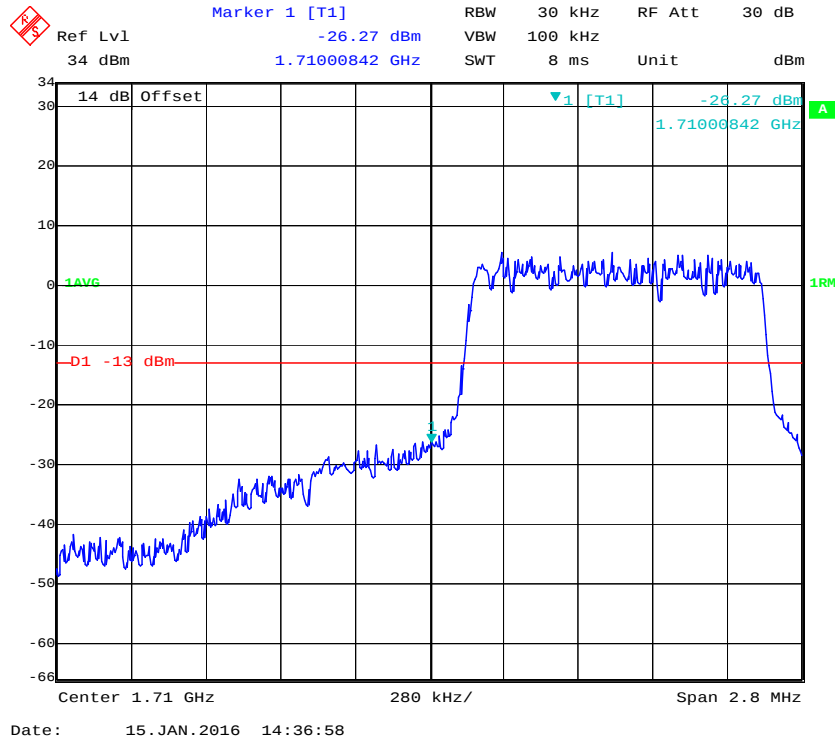
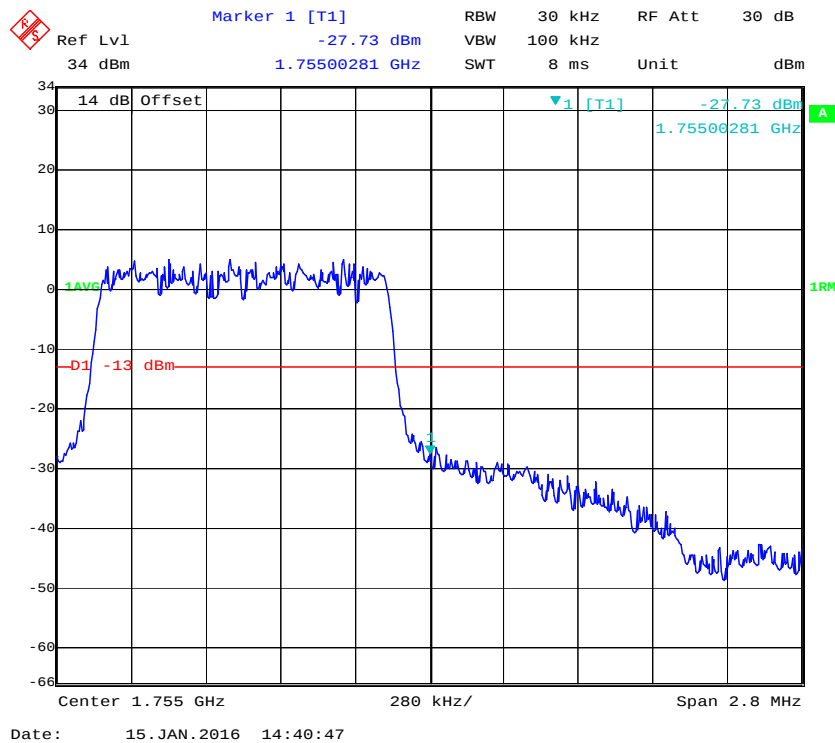
Band 4:**QPSK (1.4 MHz, FULL RB) - Left Band Edge****QPSK (1.4 MHz, FULL RB) - Right Band Edge**

16-QAM (1.4 MHz, FULL RB) - Left Band Edge

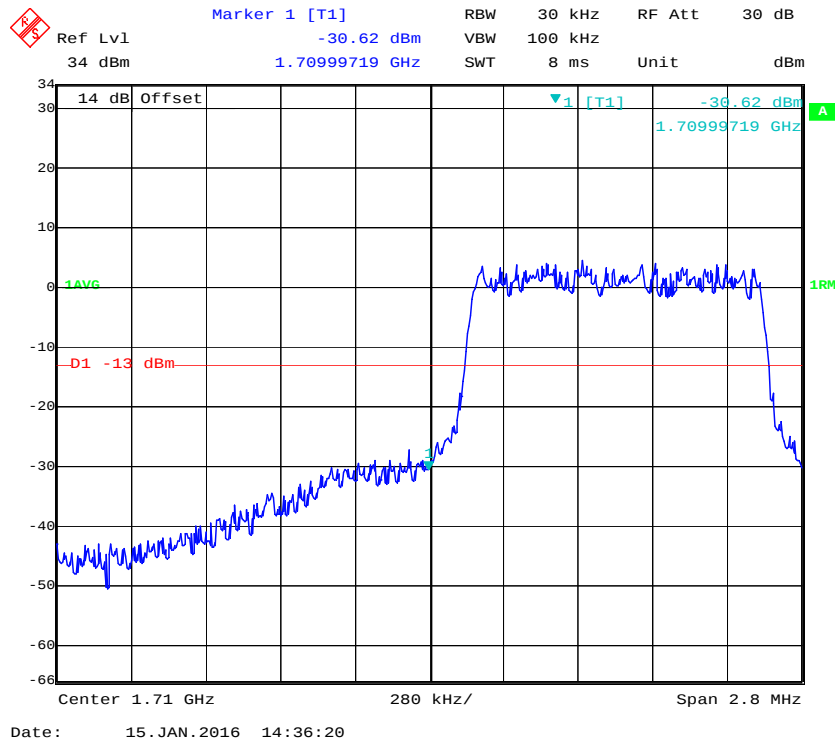


16-QAM (1.4 MHz, FULL RB) - Right Band Edge

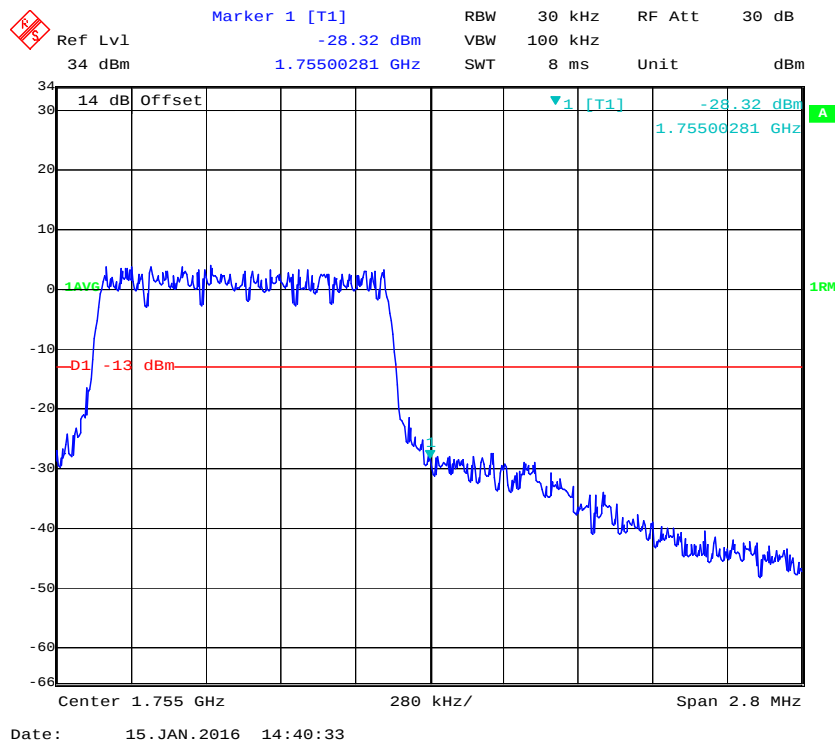


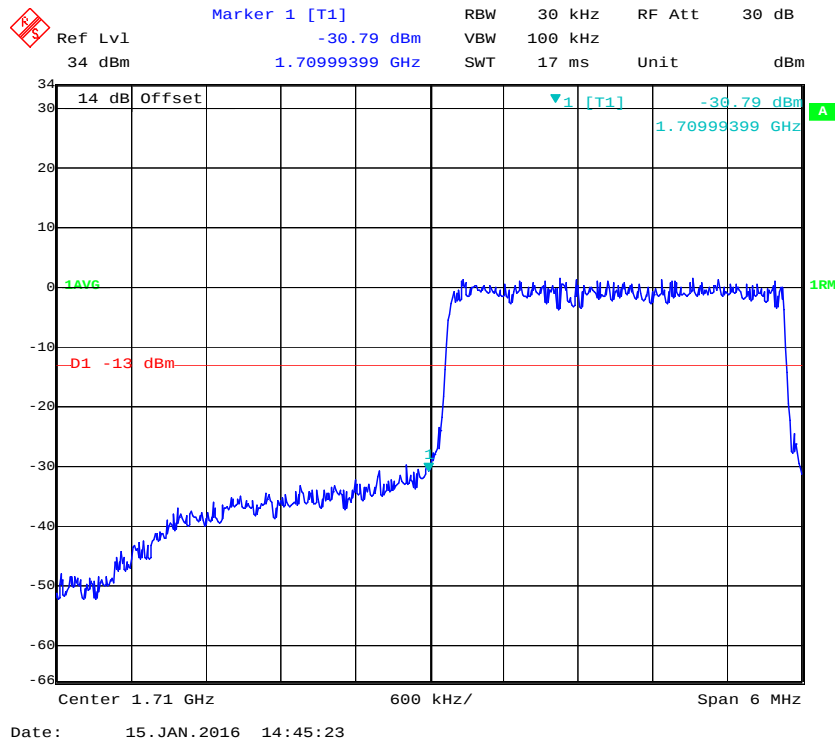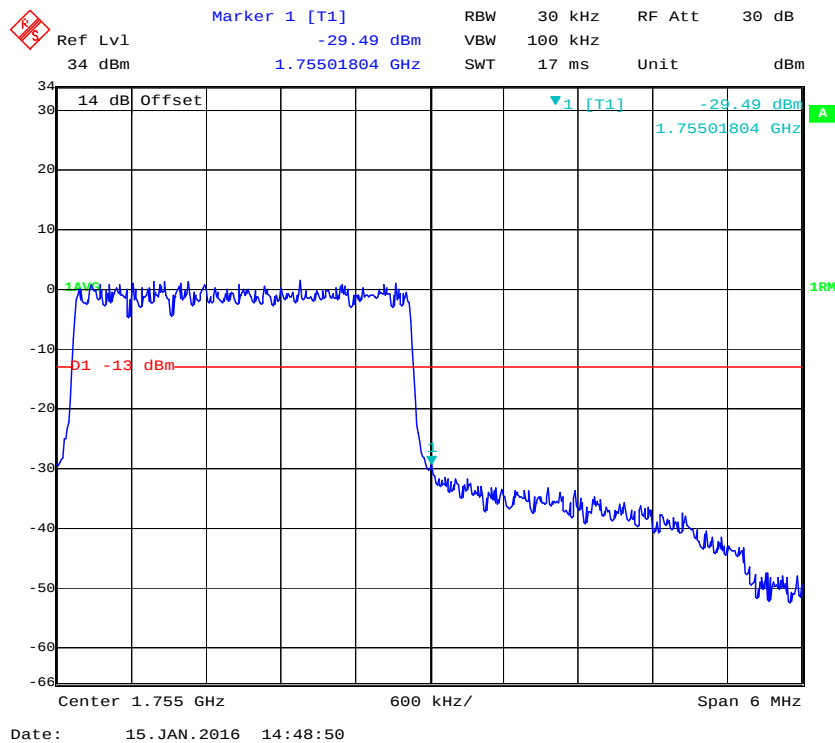QPSK (3.0 MHz, FULL RB) - Left Band Edge**QPSK (3.0 MHz, FULL RB) - Right Band Edge**


16-QAM (3.0 MHz, FULL RB) - Left Band Edge

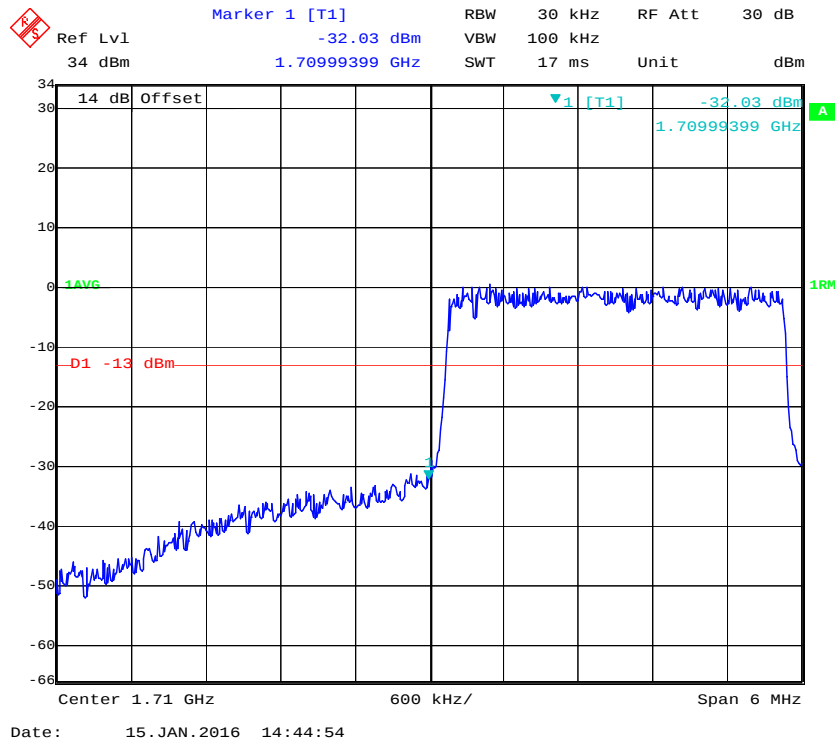


16-QAM (3.0 MHz, FULL RB) - Right Band Edge


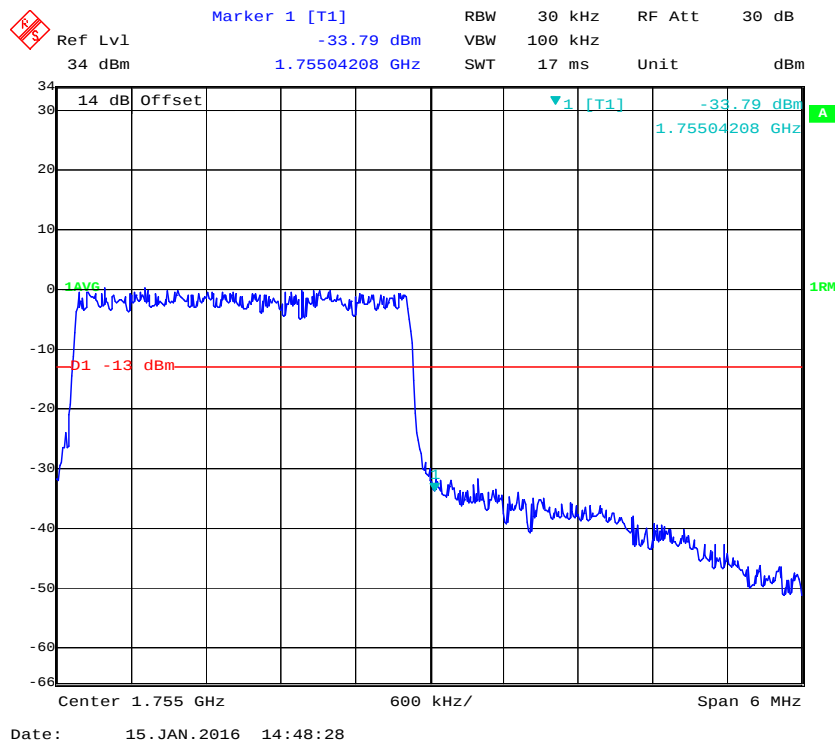


QPSK (5.0 MHz, FULL RB) - Left Band Edge

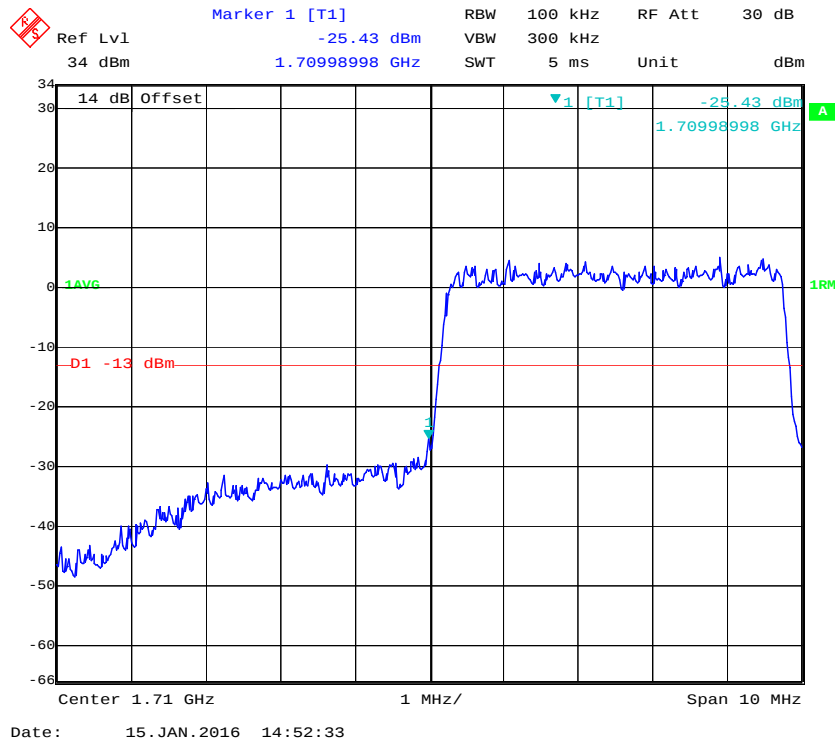


QPSK (5.0 MHz, FULL RB) - Right Band Edge

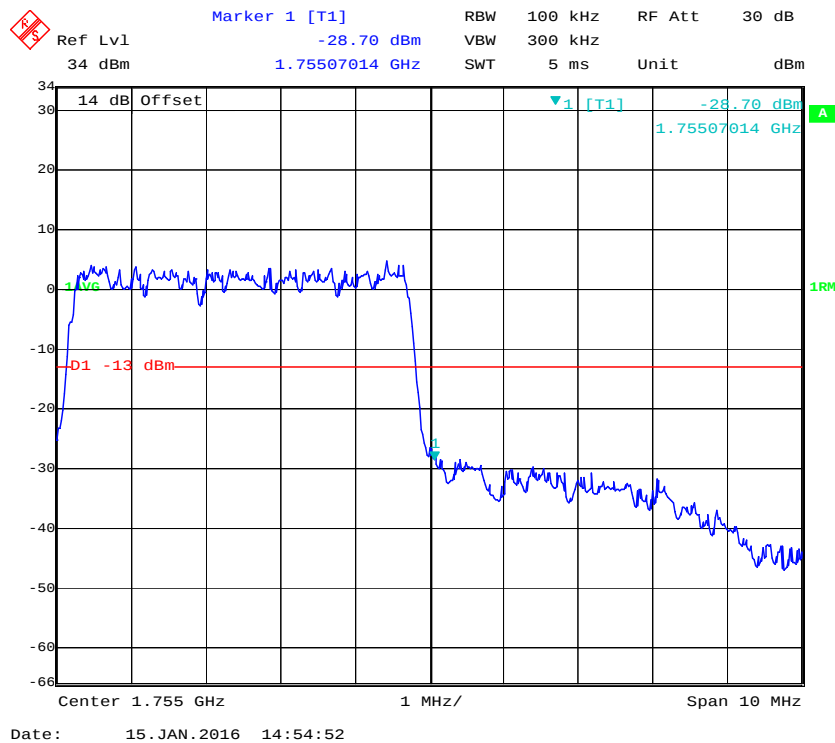


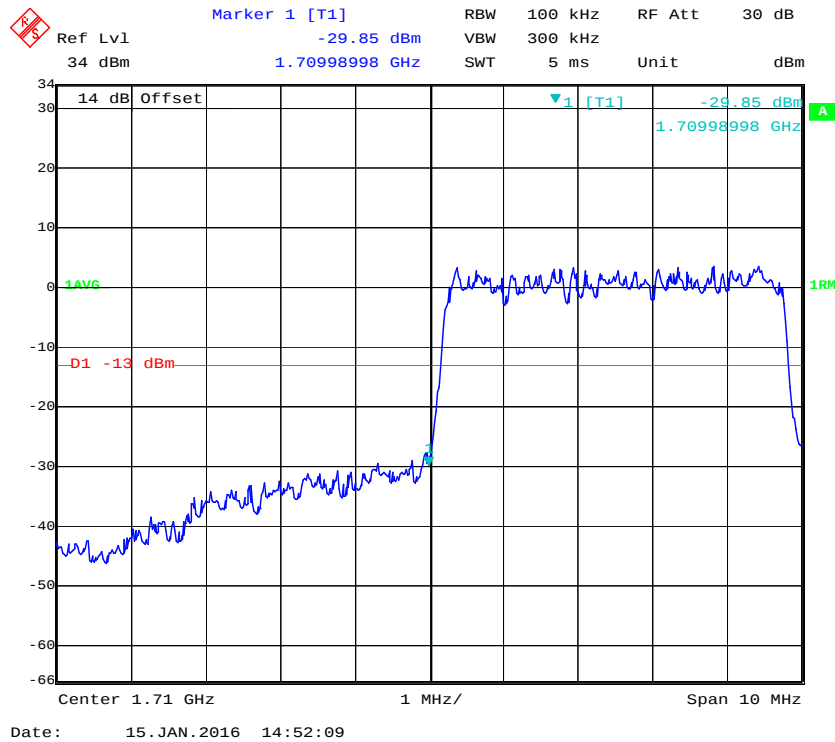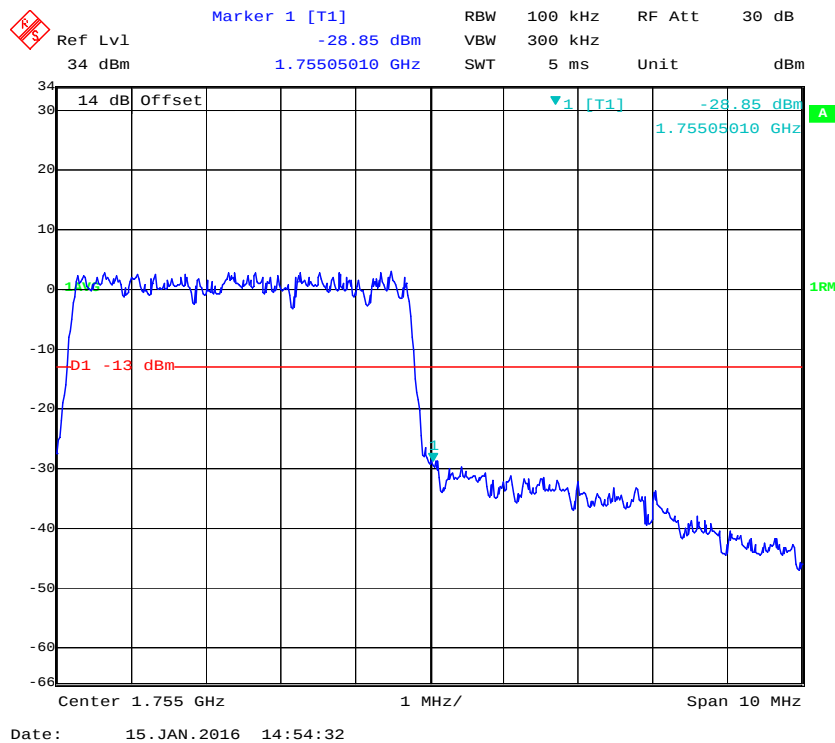16-QAM (5.0 MHz, FULL RB) - Left Band Edge**16-QAM (5.0 MHz, FULL RB) - Right Band Edge**


QPSK (10.0 MHz, FULL RB) - Left Band Edge

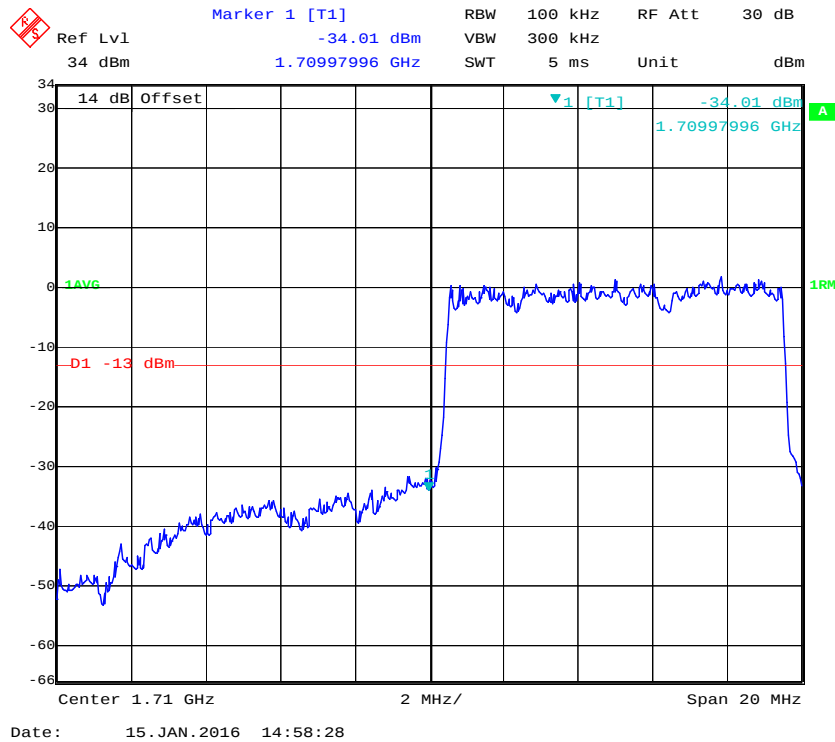


QPSK (10.0 MHz, FULL RB) - Right Band Edge

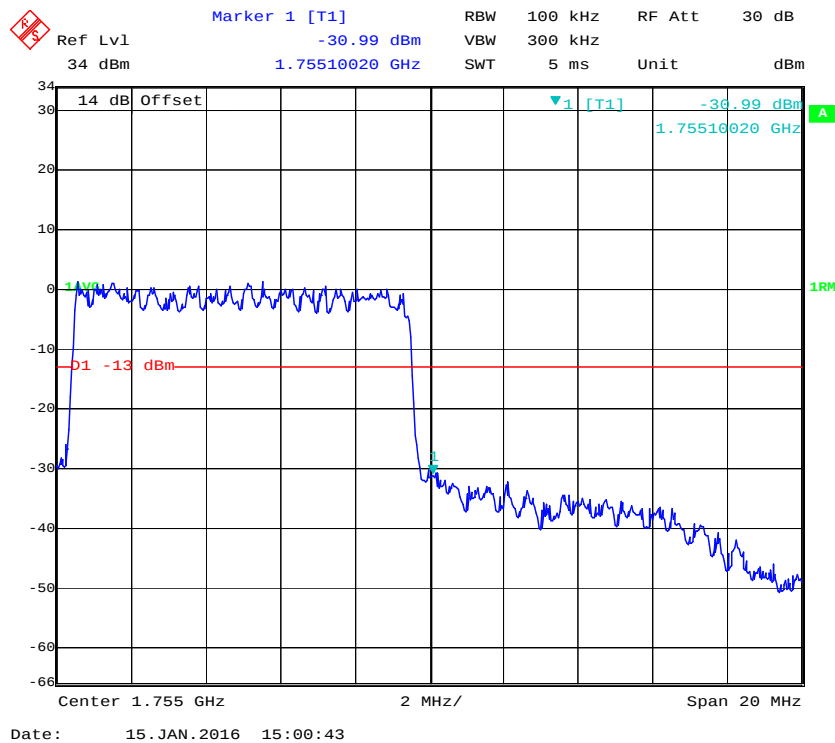


16-QAM (10.0 MHz, FULL RB) - Left Band Edge

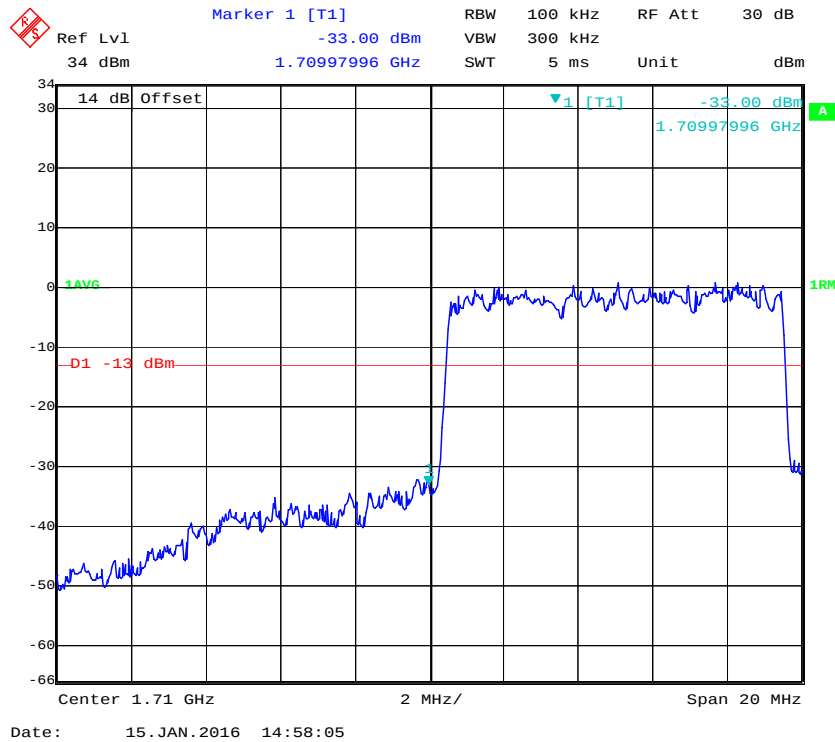


16-QAM (10.0 MHz, FULL RB) - Right Band Edge


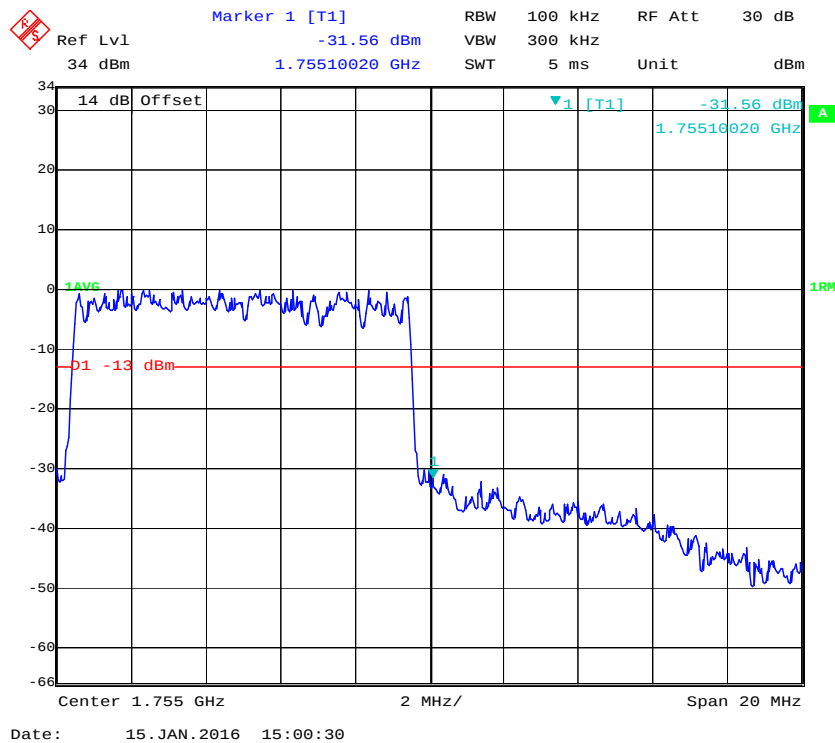


QPSK (15.0 MHz, FULL RB) - Left Band Edge

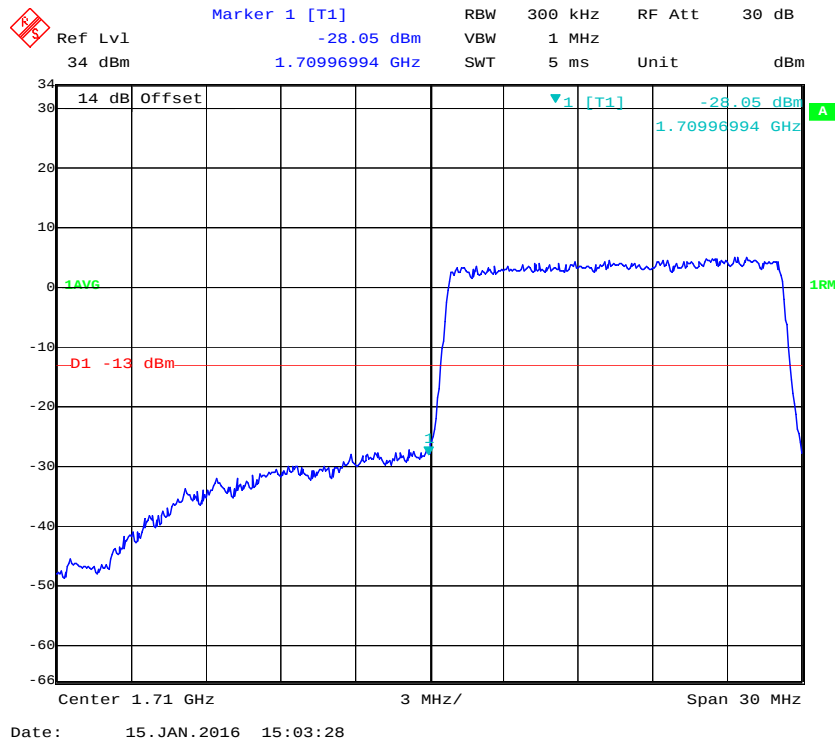


QPSK (15.0 MHz, FULL RB) - Right Band Edge

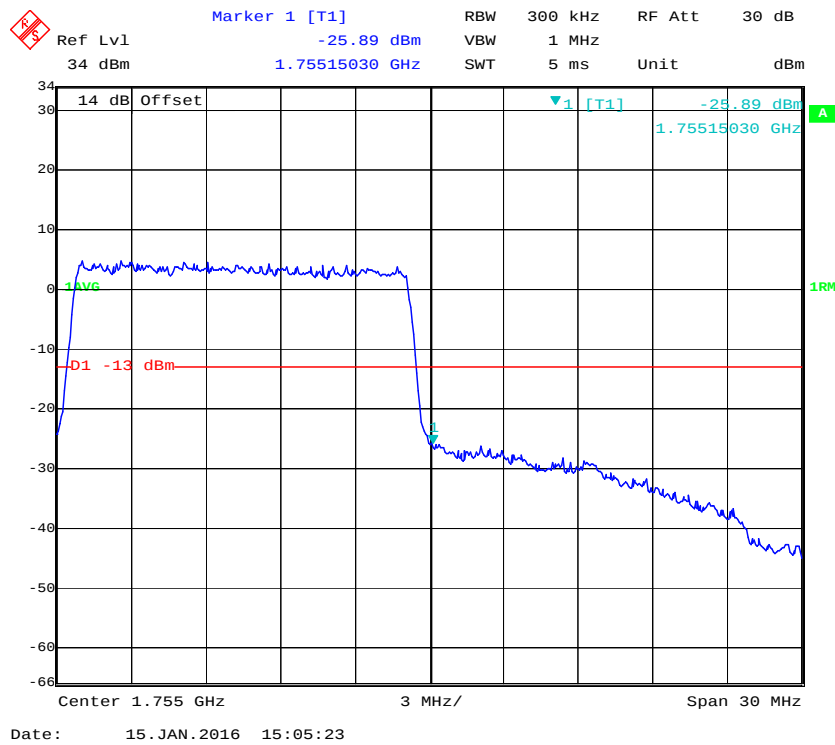


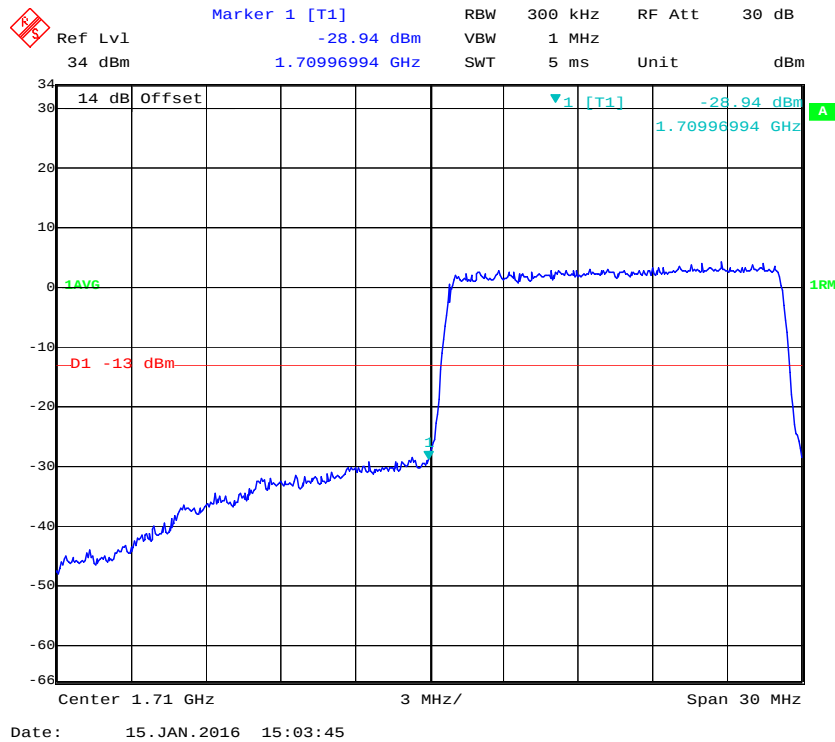
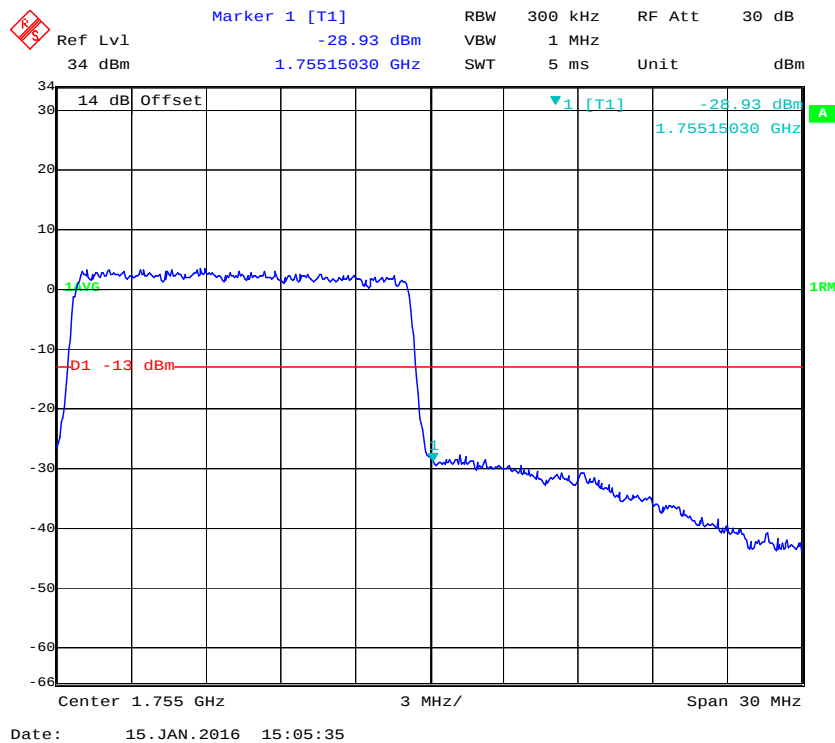
16-QAM (15.0 MHz, FULL RB) - Left Band Edge**16-QAM (15.0 MHz, FULL RB) - Right Band Edge**

QPSK (20.0 MHz, FULL RB) - Left Band Edge

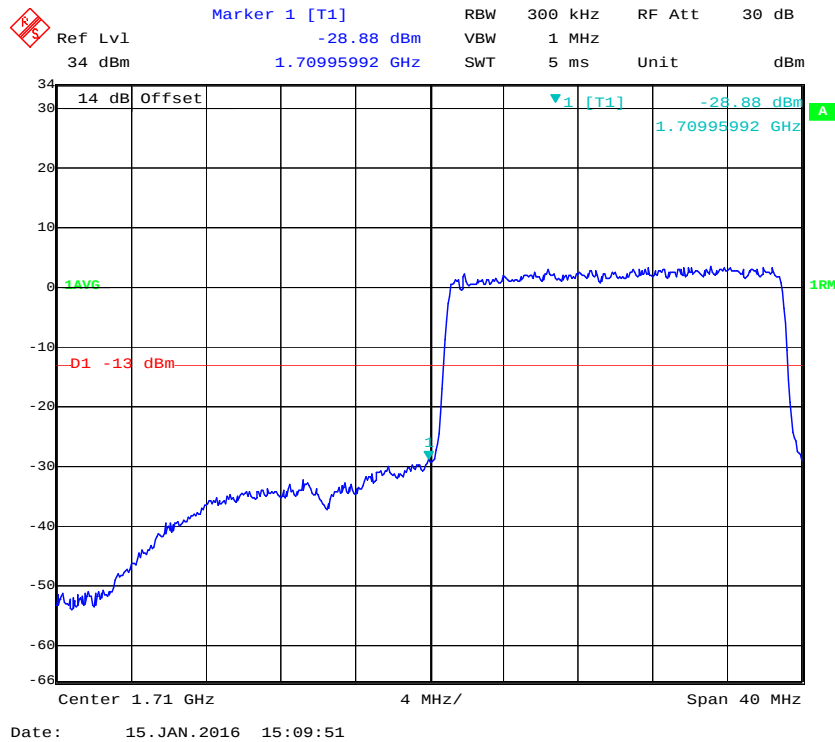


QPSK (20.0 MHz, FULL RB) - Right Band Edge

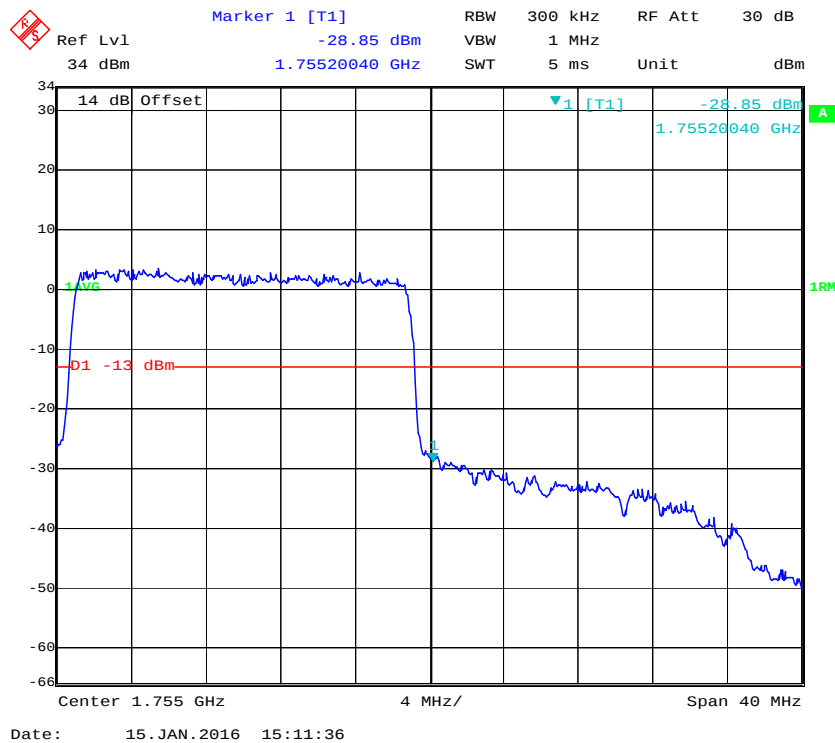

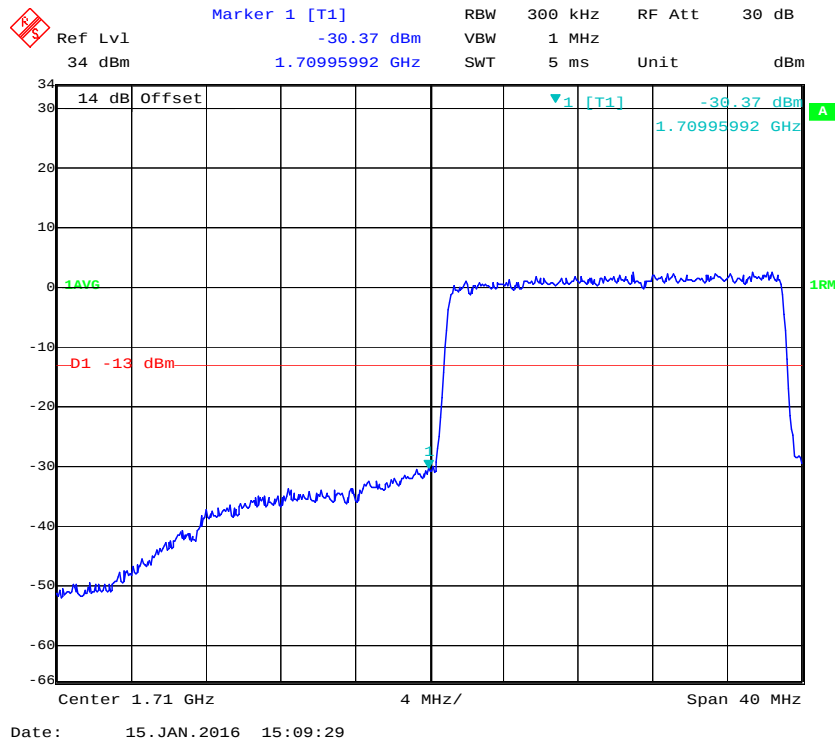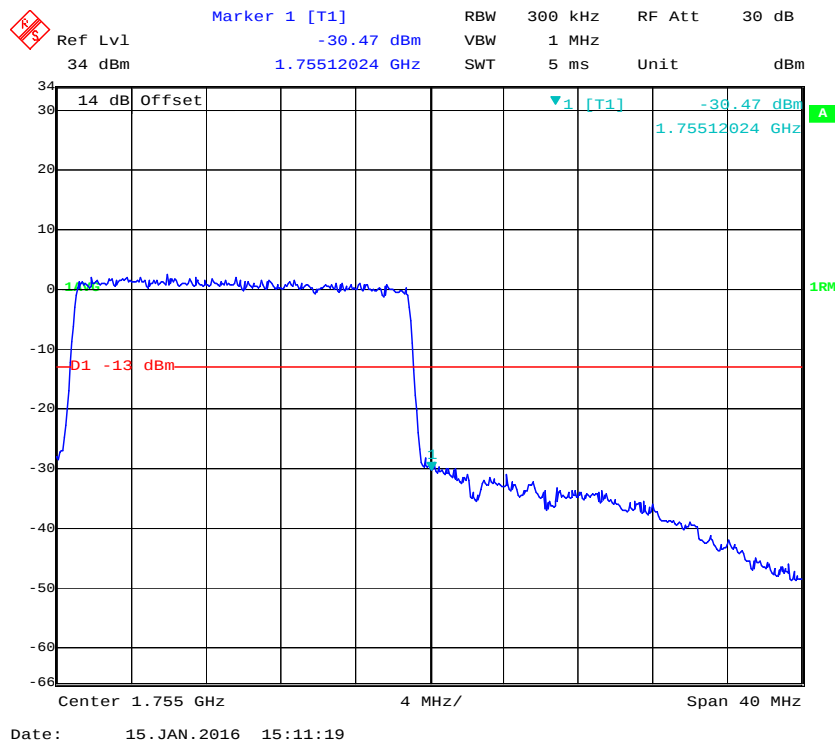
16-QAM (20.0 MHz, FULL RB) - Left Band Edge**16-QAM (20.0 MHz, FULL RB) - Right Band Edge**

Band 7:


QPSK (5.0 MHz, FULL RB) - Left Band Edge

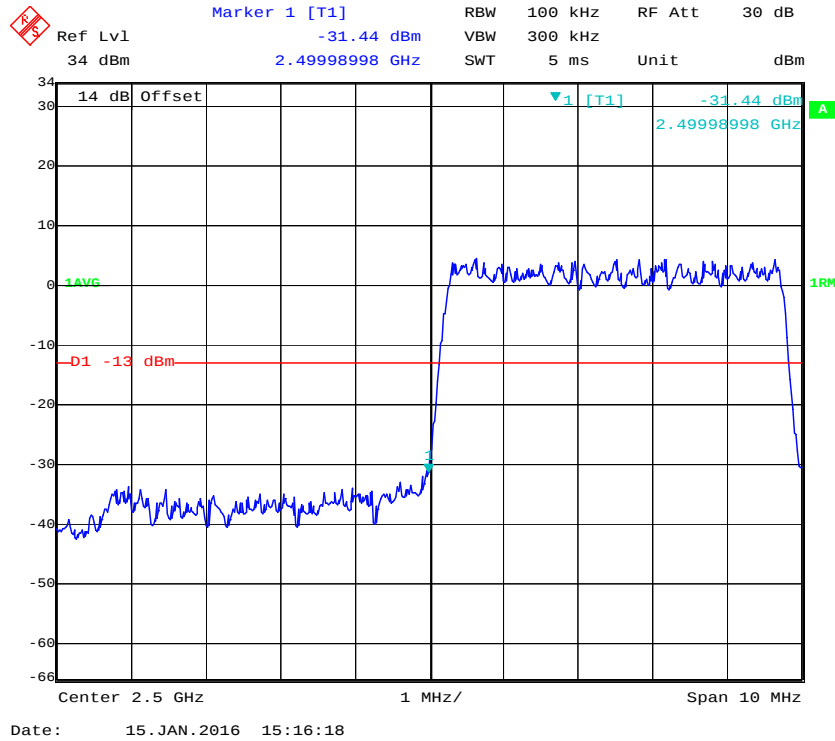


QPSK (5.0 MHz, FULL RB) - Right Band Edge

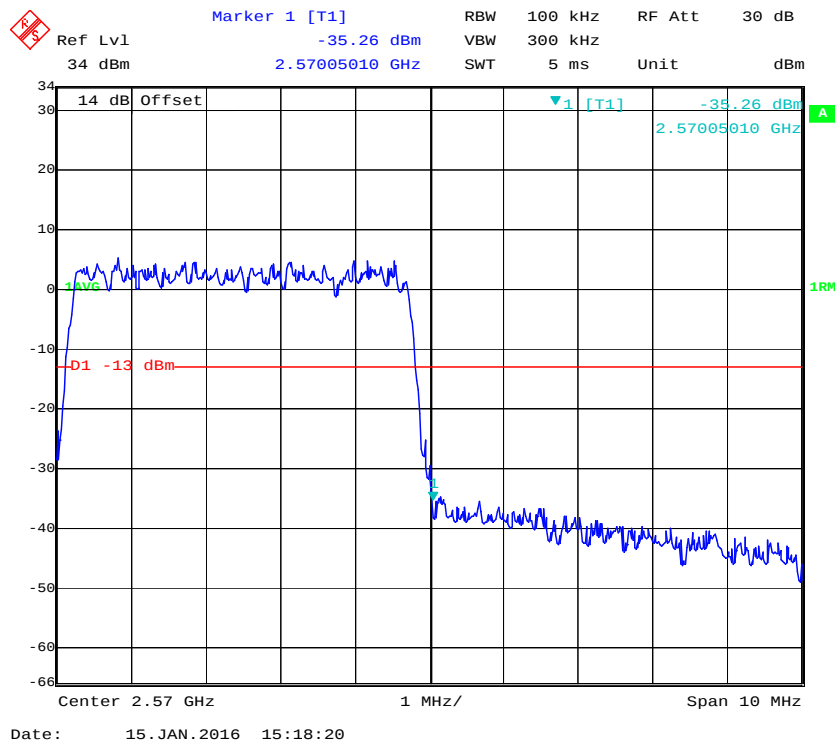


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

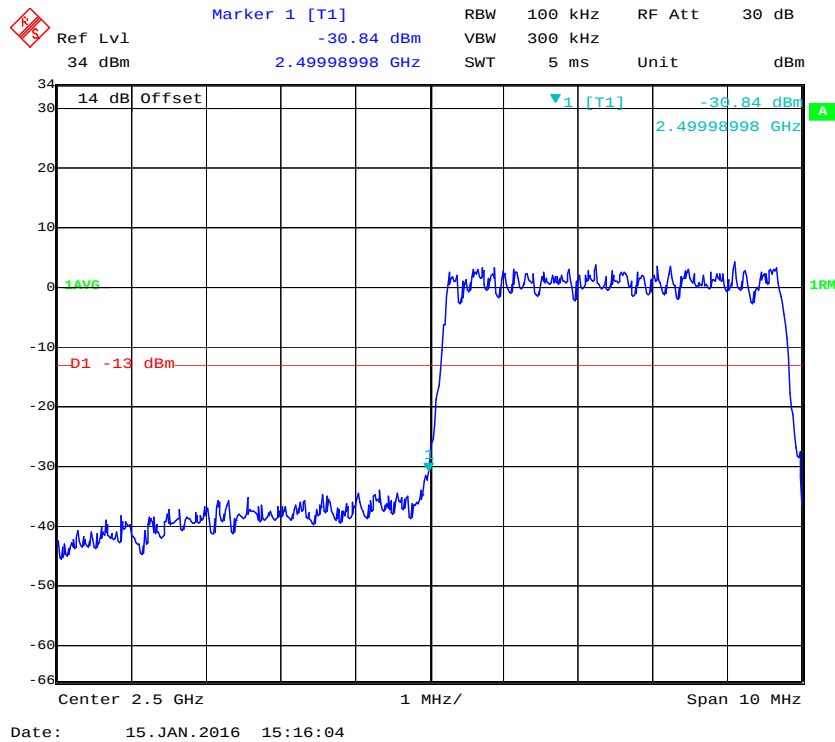


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

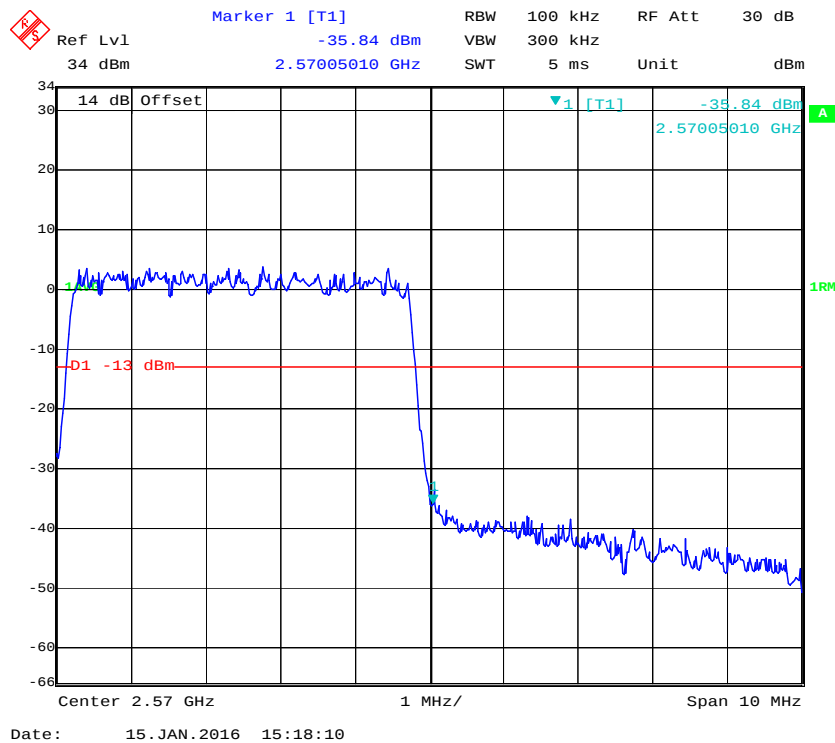


QPSK (10.0 MHz, FULL RB) - Left Band Edge

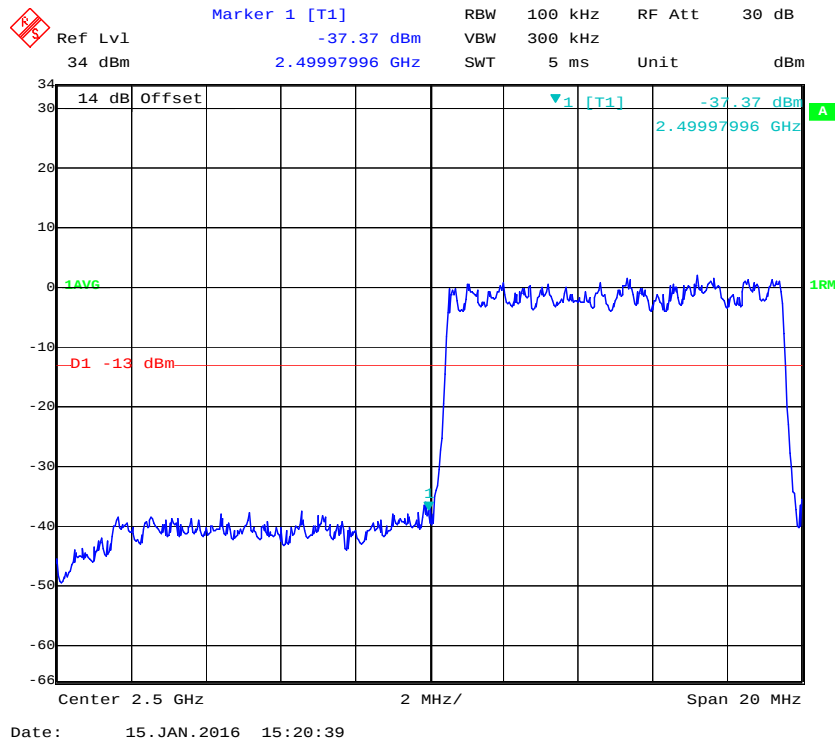


QPSK (10.0 MHz, FULL RB) - Right Band Edge

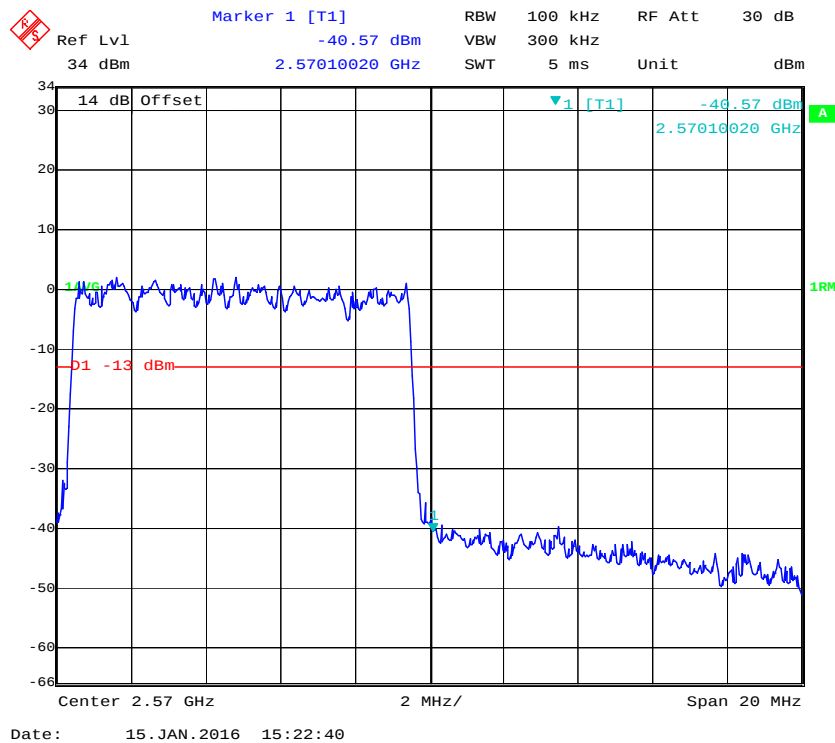


16-QAM (10.0 MHz, FULL RB) - Left Band Edge

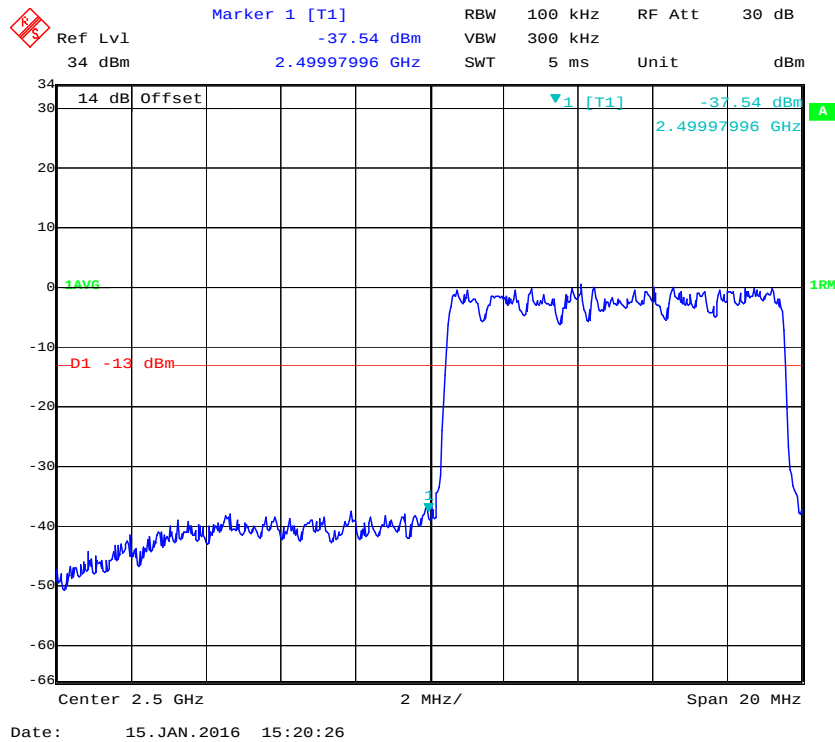


16-QAM (10.0 MHz, FULL RB) - Right Band Edge

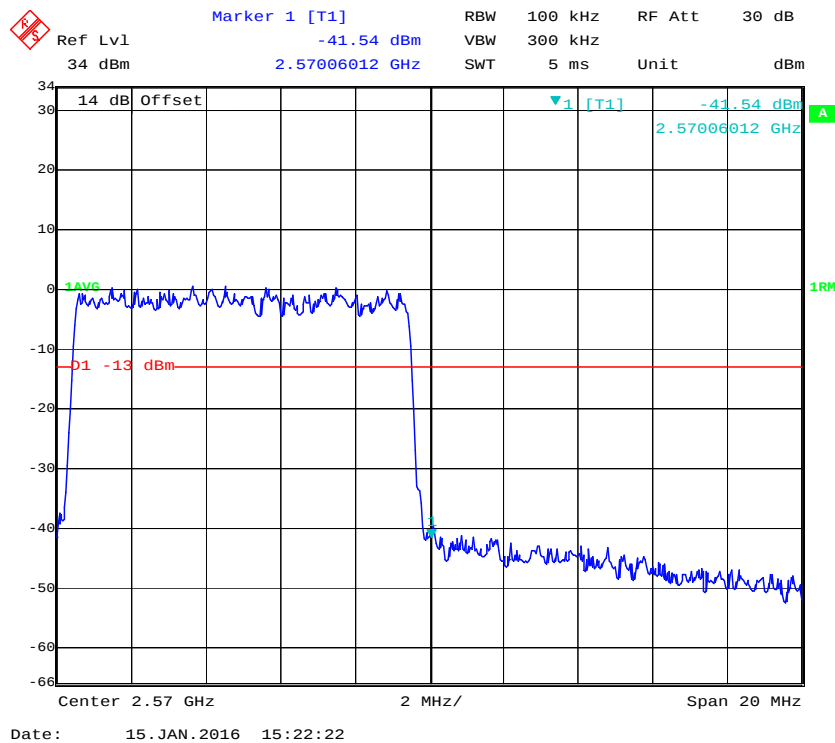


QPSK (15 MHz, FULL RB) - Left Band Edge

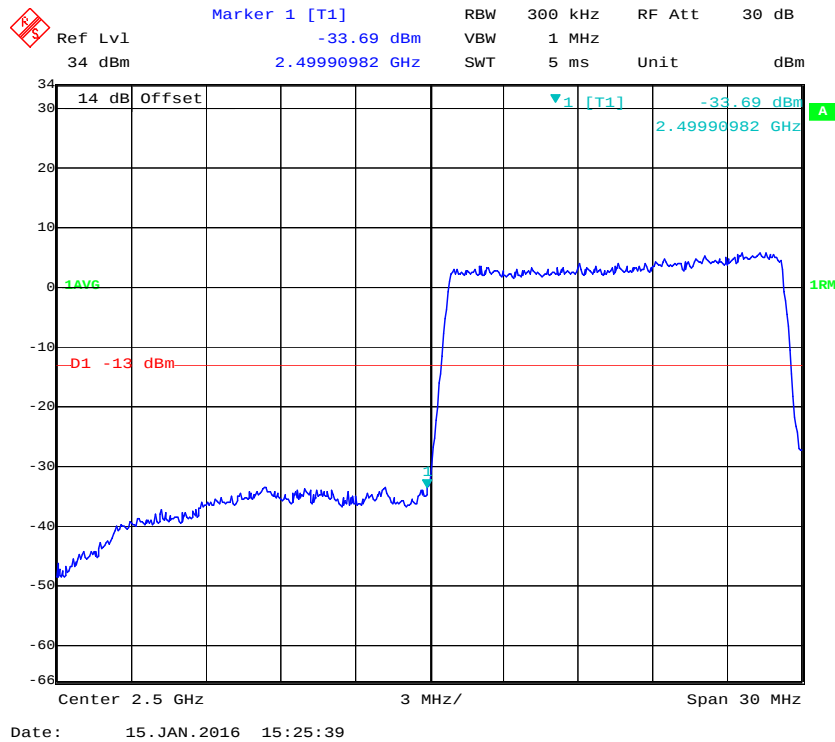


QPSK (15 MHz, FULL RB) - Right Band Edge

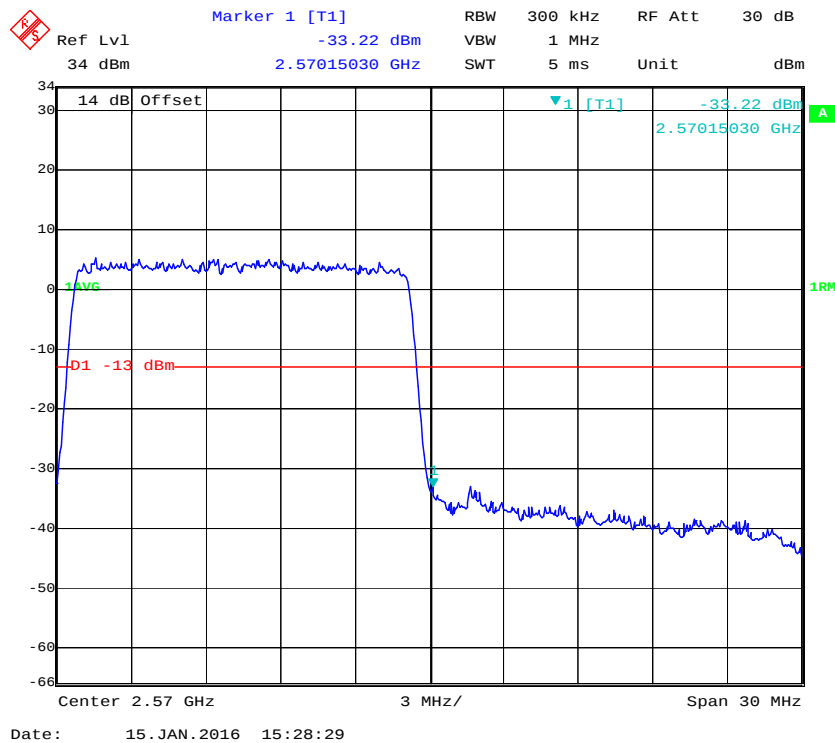


16-QAM (15 MHz, FULL RB) - Left Band Edge

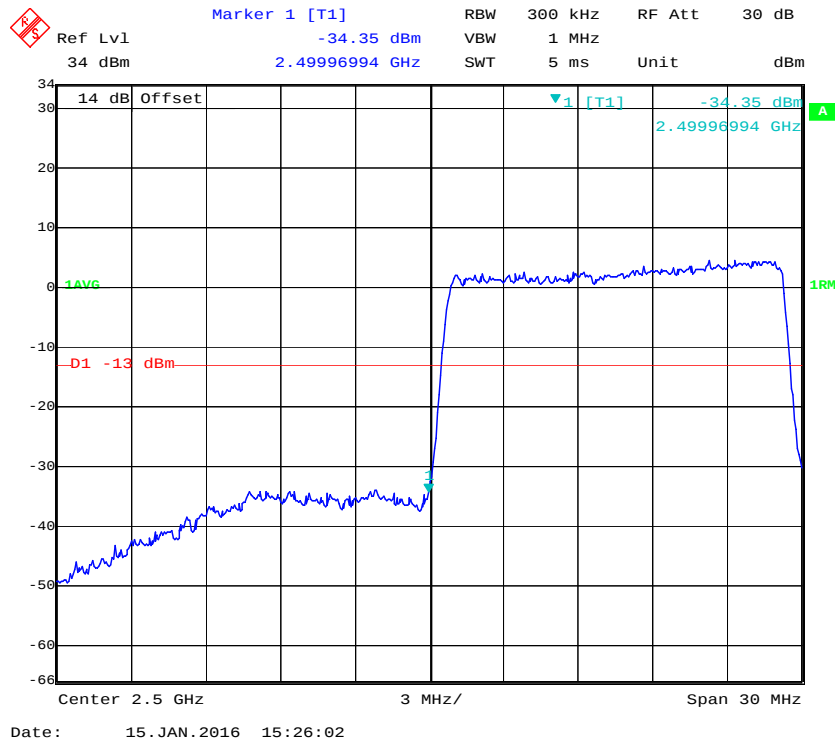


16-QAM (15 MHz, FULL RB) - Right Band Edge


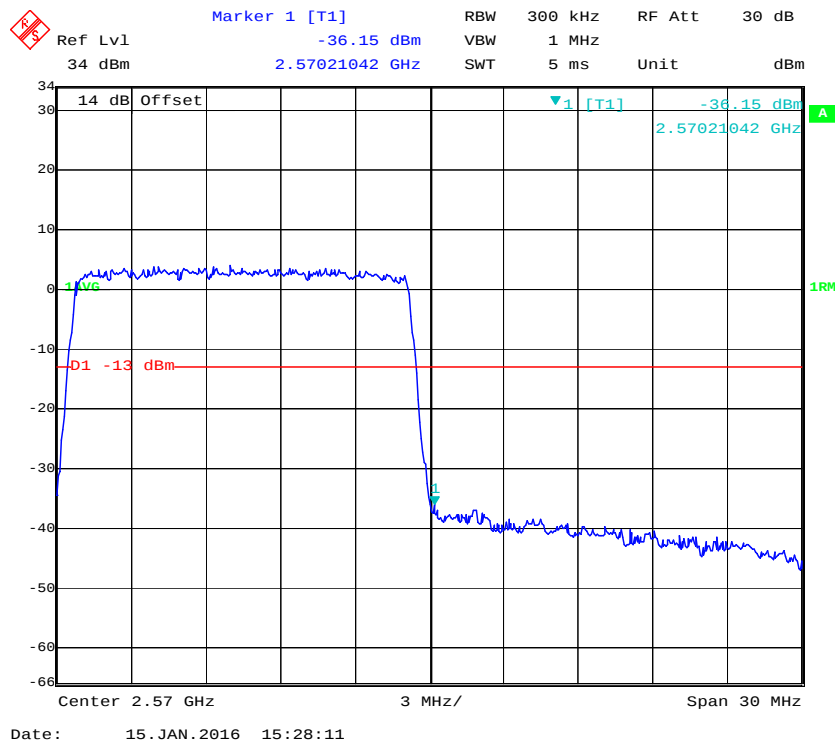


QPSK (20 MHz, FULL RB) - Left Band Edge

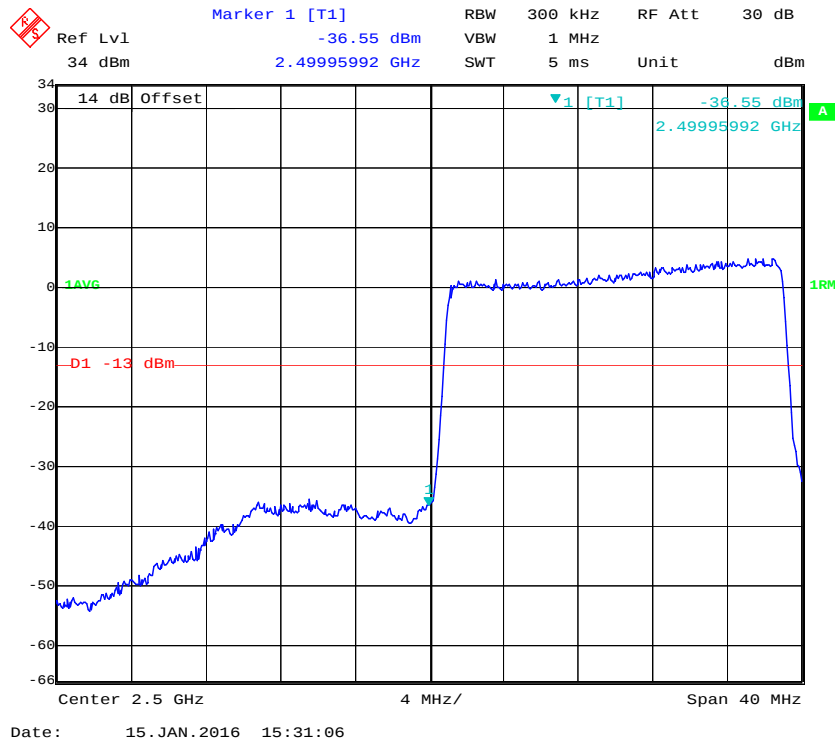


QPSK (20 MHz, FULL RB) - Right Band Edge

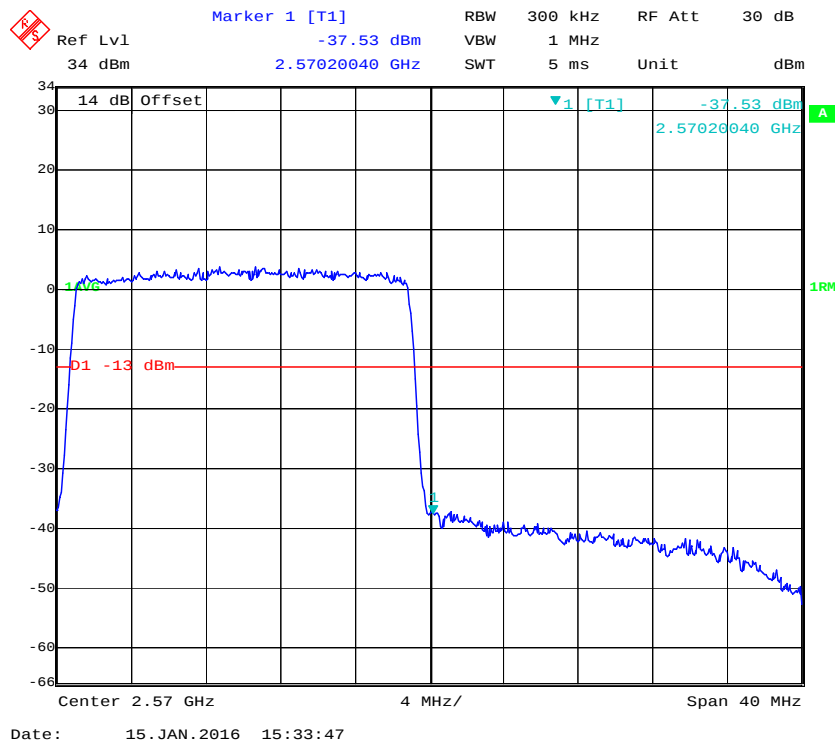

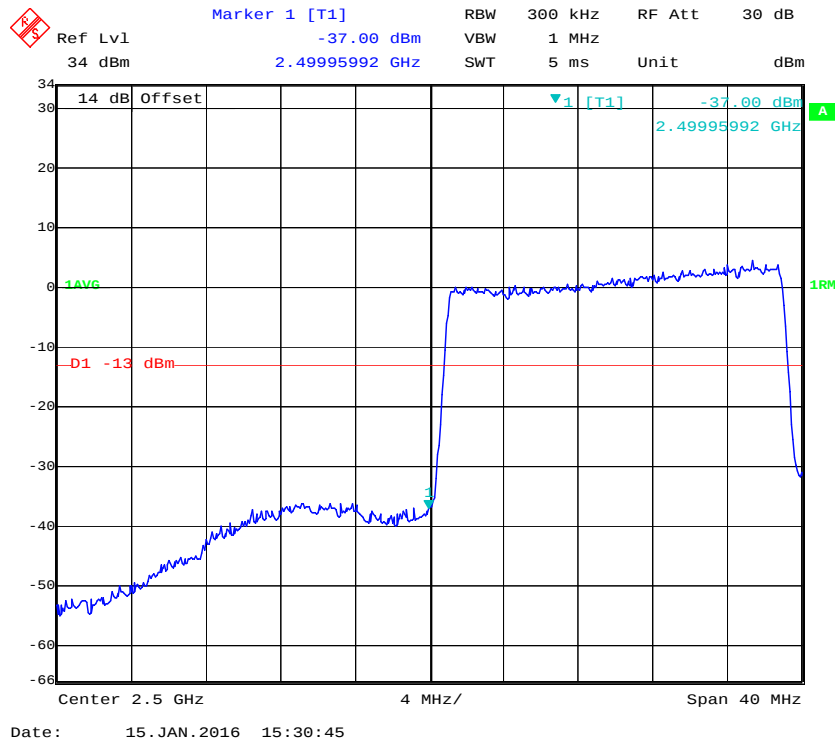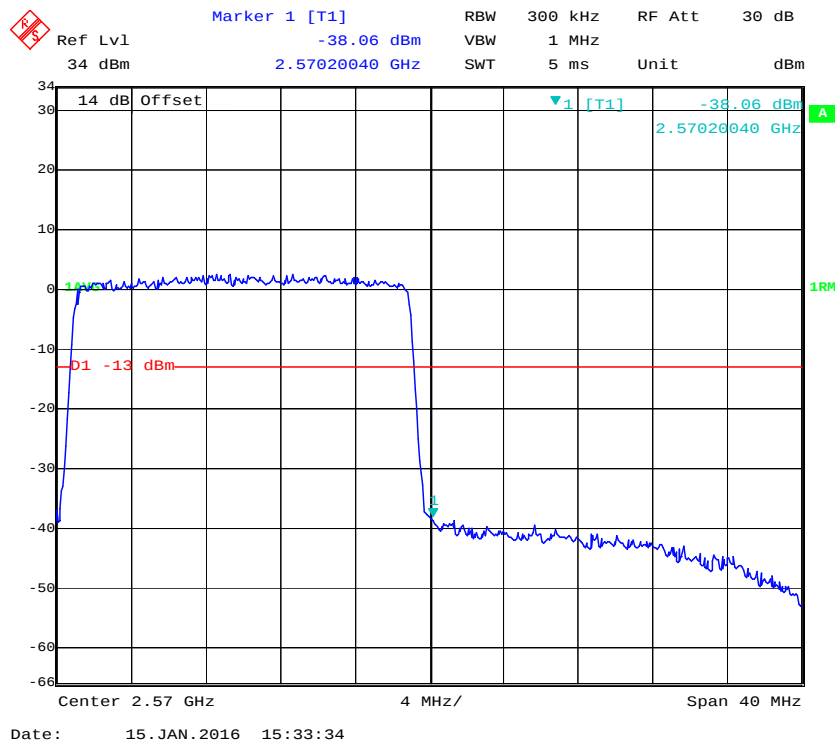
16-QAM (20 MHz, FULL RB) - Left Band Edge**16-QAM (20 MHz, FULL RB) - Right Band Edge**



Band 17:

QPSK (5.0 MHz, FULL RB) - Left Band Edge

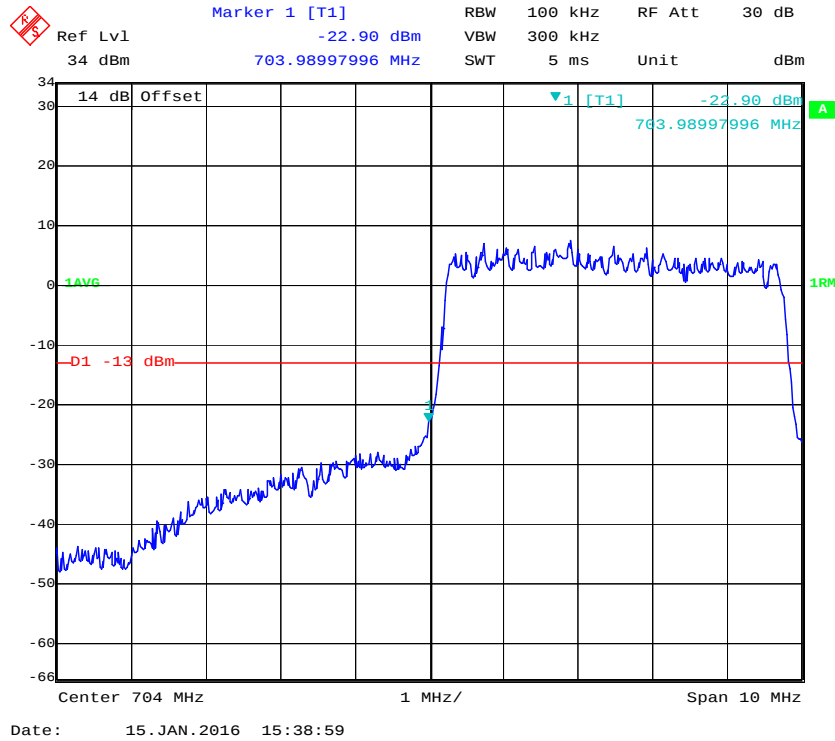


QPSK (5.0 MHz, FULL RB) - Right Band Edge

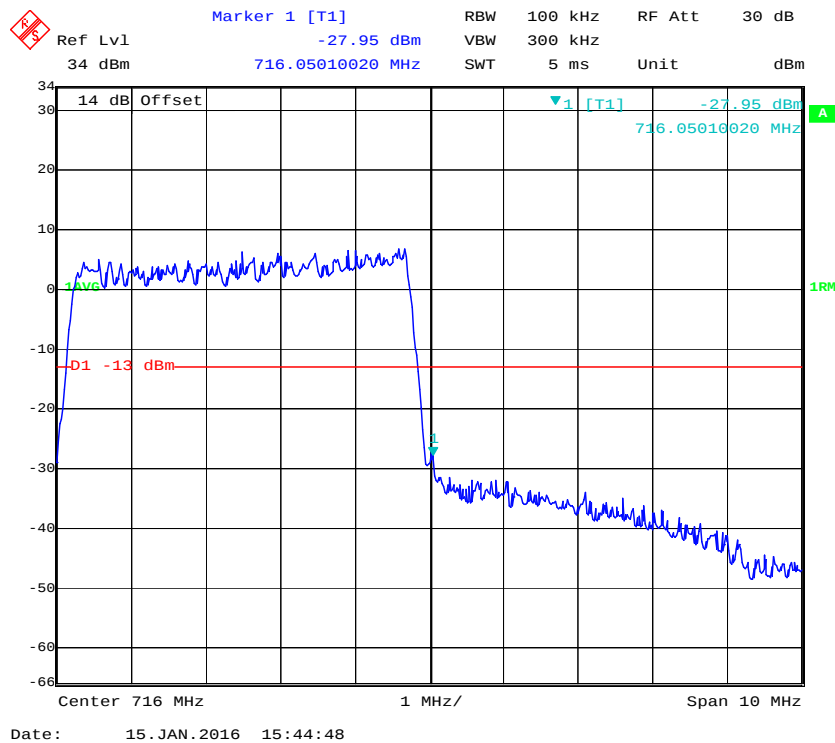


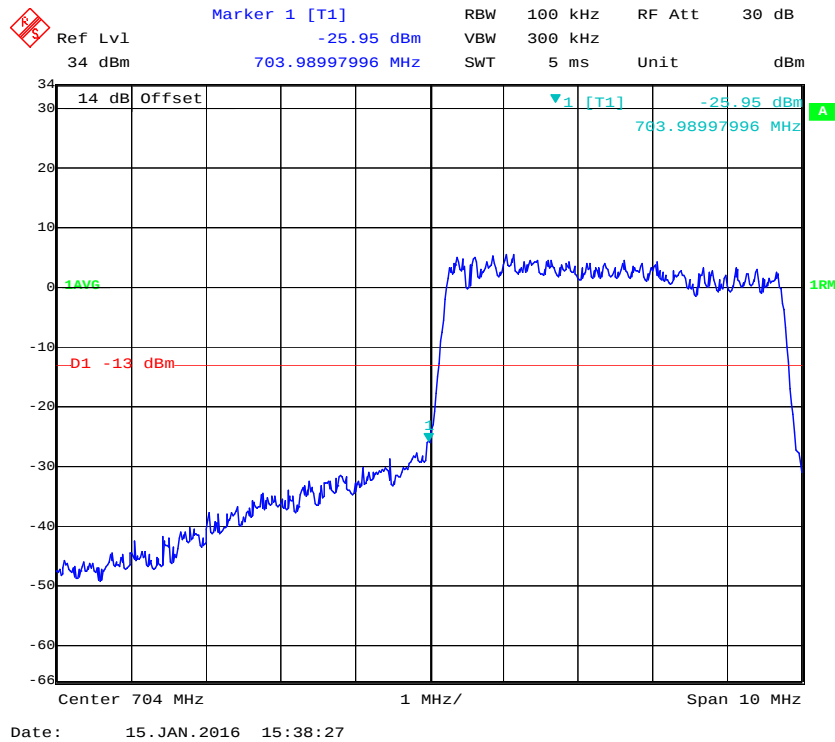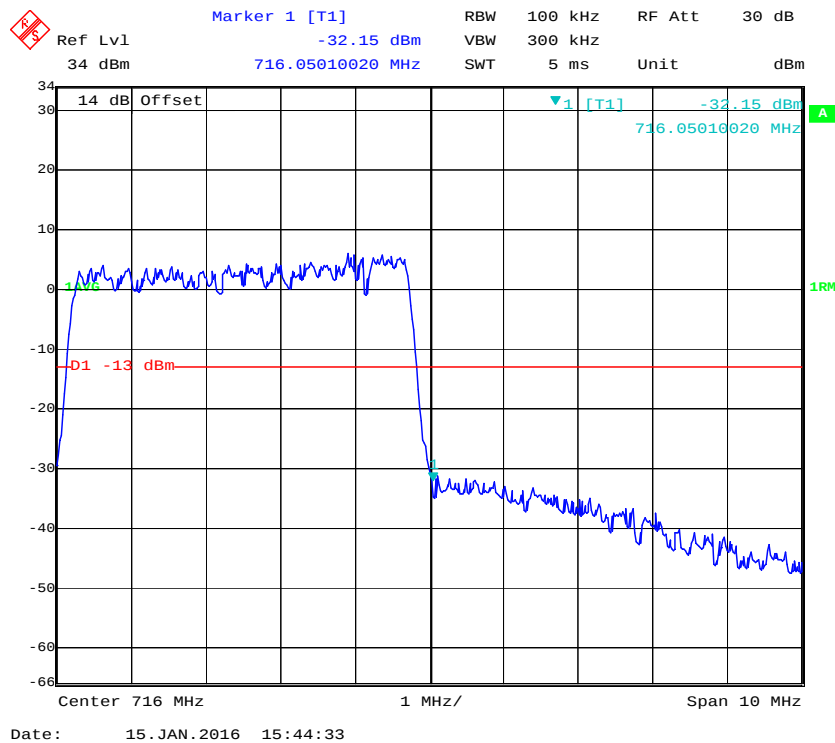16-QAM (5.0 MHz, FULL RB) - Left Band Edge**16-QAM (5.0 MHz, FULL RB) - Right Band Edge**


QPSK (10.0 MHz, FULL RB) - Left Band Edge

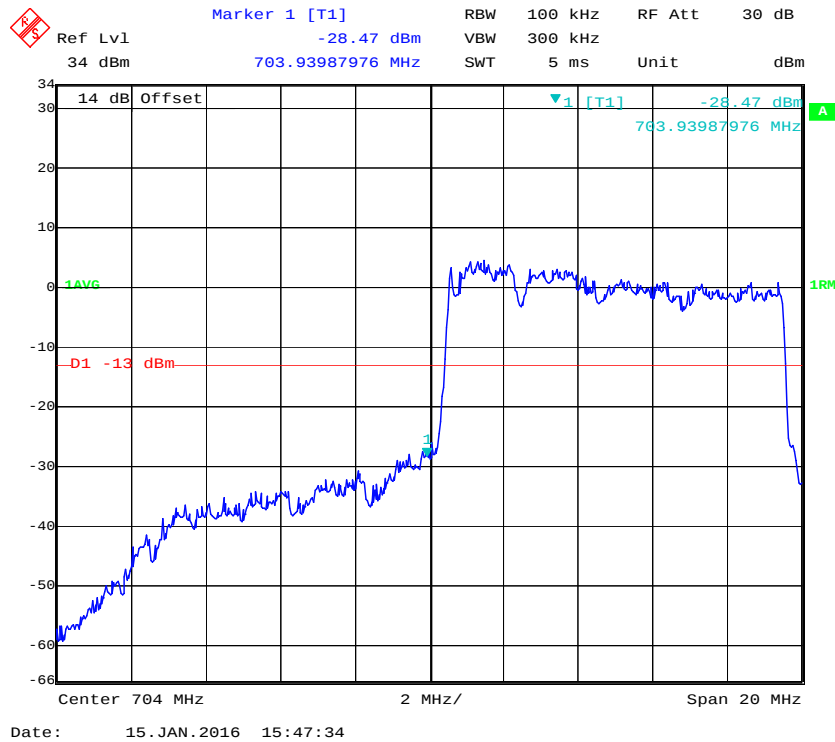


QPSK (10.0 MHz, FULL RB) - Right Band Edge

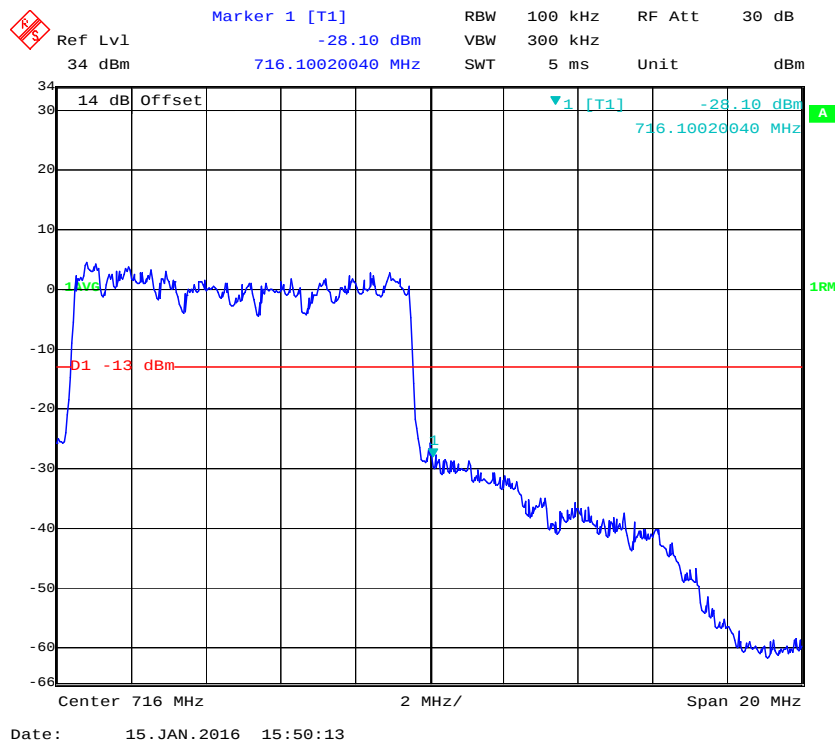

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

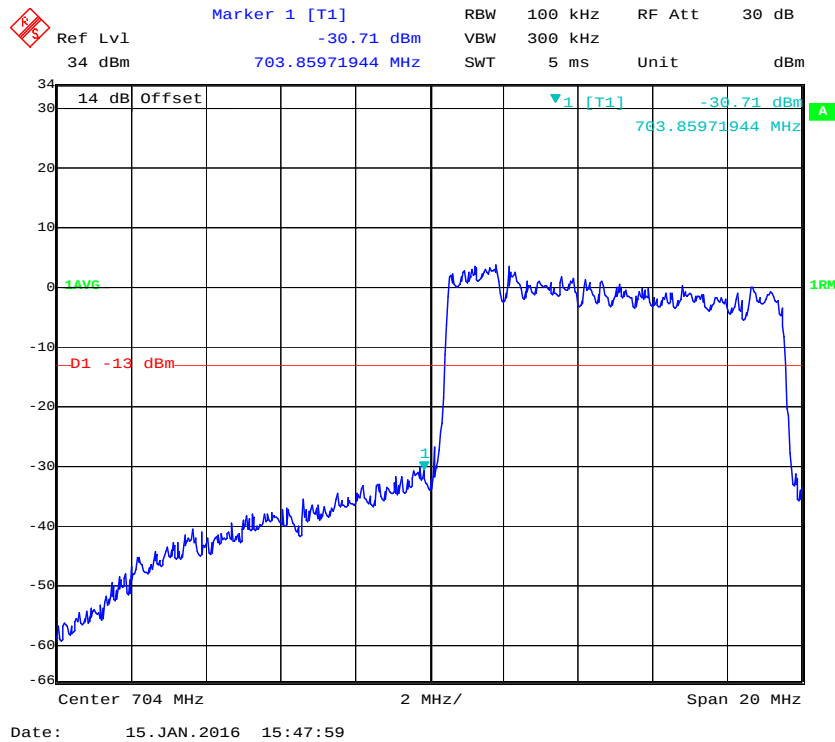

16-QAM (10.0 MHz, FULL RB) - Right Band Edge

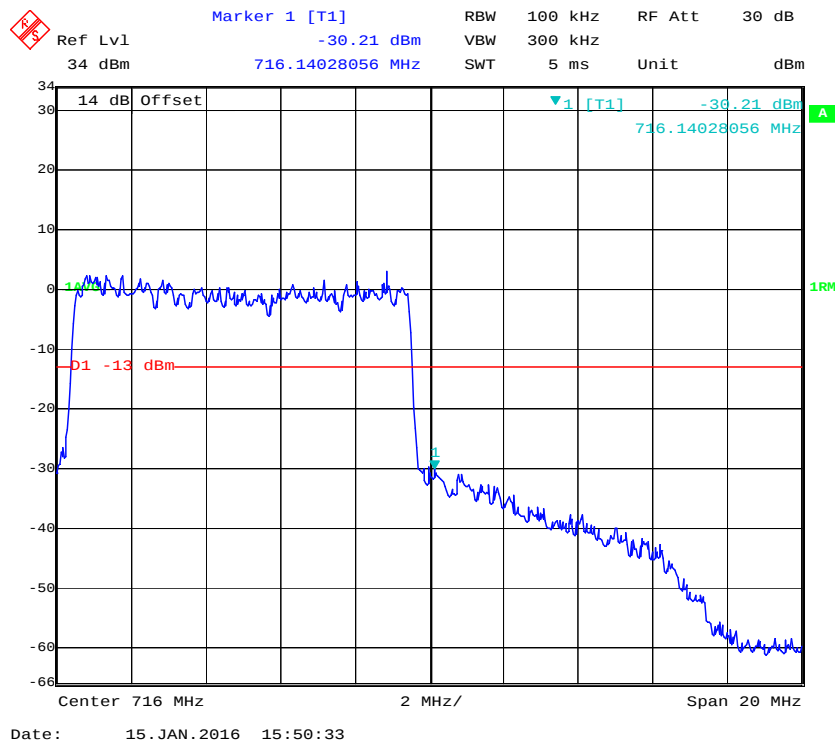

FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY**Applicable Standards**

FCC § 2.1055, §22.355, §24.235 and & §27.54.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

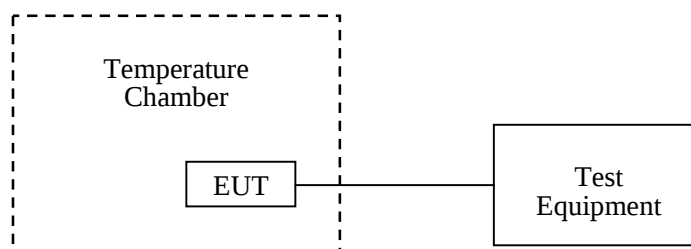

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2015-11-01	2016-11-01
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-146520-wh	2015-11-23	2016-11-23
Ducommun technologies	RF Cable	RG-214	4	2015-06-15	2016-06-15
WEINSCHL	10dB Attenuator	5324	AU0709	2015-06-18	2016-06-18

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	101.0kPa

The testing was performed by Haiguo Li on 2016-01-15.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables.

Cellular Band (Part 22H)**GSM Mode**

Middle Channel, $f_0=836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	22	0.02630	2.5
-20		22	0.02630	2.5
-10		18	0.02152	2.5
0		15	0.01793	2.5
10		15	0.01793	2.5
20		15	0.01793	2.5
30		13	0.01554	2.5
40		19	0.02271	2.5
50		20	0.02391	2.5
25	V min.= 3.5	21	0.02510	2.5
25	V max.= 4.2	21	0.02510	2.5

EDGE Mode

Middle Channel, $f_0=836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	25	0.02988	2.5
-20		25	0.02988	2.5
-10		16	0.01913	2.5
0		15	0.01793	2.5
10		15	0.01793	2.5
20		16	0.01913	2.5
30		16	0.01913	2.5
40		16	0.01913	2.5
50		16	0.01913	2.5
25	V min.= 3.5	23	0.02749	2.5
25	V max.= 4.2	25	0.02988	2.5

WCDMA Mode

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	18	0.02152	2.5
-20		18	0.02152	2.5
-10		15	0.01793	2.5
0		15	0.01793	2.5
10		10	0.01195	2.5
20		10	0.01195	2.5
30		10	0.01195	2.5
40		15	0.01793	2.5
50		15	0.01793	2.5
25	V min.= 3.5	18	0.02152	2.5
25	V max.= 4.2	18	0.02152	2.5

PCS Band (Part 24E)**GSM Mode**

Middle Channel, $f_0 = 1880.0$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	30	0.01596	pass
-20		28	0.01489	pass
-10		27	0.01436	pass
0		26	0.01383	pass
10		20	0.01064	pass
20		20	0.01064	pass
30		27	0.01436	pass
40		28	0.01489	pass
50		28	0.01489	pass
25	V min.= 3.5	30	0.01596	pass
25	V max.= 4.2	30	0.01596	pass

EDGE Mode

Middle Channel, $f_0 = 1880.0$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	29	0.01543	pass
-20		29	0.01543	pass
-10		24	0.01277	pass
0		24	0.01277	pass
10		24	0.01277	pass
20		20	0.01064	pass
30		20	0.01064	pass
40		20	0.01064	pass
50		26	0.01383	pass
25	V min.= 3.5	29	0.01543	pass
25	V max.= 4.2	29	0.01543	pass

WCDMA Mode

Middle Channel, $f_0 = 1880.0$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	21	0.01117	pass
-20		21	0.01117	pass
-10		19	0.01011	pass
0		19	0.01011	pass
10		15	0.00798	pass
20		12	0.00638	pass
30		12	0.00638	pass
40		19	0.01011	pass
50		19	0.01011	pass
25	V min.= 3.5	21	0.01117	pass
25	V max.= 4.2	21	0.01117	pass

Band 2:

	Temperature (°C)	QPSK (Hz)	QPSK (ppm)	Result
10.0 MHz, Middle Channel	-30	30	0.01596	Pass
	-20	30	0.01596	Pass
	-10	22	0.01170	Pass
	0	25	0.01330	Pass
	10	28	0.01489	Pass
	20	29	0.01543	Pass
	30	29	0.01543	Pass
	40	30	0.01596	Pass
	50	30	0.01596	Pass
	Voltage (V_{DC})	QPSK (Hz)	QPSK (ppm)	Result
	3.7	21	0.01117	Pass
	3.5	30	0.01596	Pass
	4.2	30	0.01596	Pass

Band 4:

	Temperature (°C)	QPSK (Hz)	QPSK (ppm)	Result
10.0 MHz, Middle Channel	-30	29	0.01674	Pass
	-20	29	0.01674	Pass
	-10	28	0.01616	Pass
	0	28	0.01616	Pass
	10	25	0.01443	Pass
	20	25	0.01443	Pass
	30	22	0.01270	Pass
	40	22	0.01270	Pass
	50	21	0.01212	Pass
	Voltage (V_{DC})	QPSK (Hz)	QPSK (ppm)	Result
	3.7	29	0.01674	Pass
	3.5	29	0.01674	Pass
	4.2	30	0.01732	Pass

Band 7:

	Temperature (°C)	QPSK (Hz)	QPSK (ppm)	Result
10.0 MHz, Middle Channel	-30	30	0.01183	Pass
	-20	30	0.01183	Pass
	-10	30	0.01183	Pass
	0	28	0.01105	Pass
	10	25	0.00986	Pass
	20	25	0.00986	Pass
	30	25	0.00986	Pass
	40	25	0.00986	Pass
	50	29	0.01144	Pass
	Voltage (V_{DC})	QPSK (Hz)	QPSK (ppm)	Result
	3.7	29	0.01144	Pass
	3.5	30	0.01183	Pass
	4.2	30	0.01183	Pass

Band 17:

	Temperature (°C)	QPSK (Hz)	QPSK (ppm)	Result
10.0 MHz, Middle Channel	-30	15	0.02113	Pass
	-20	15	0.02113	Pass
	-10	15	0.02113	Pass
	0	7	0.00986	Pass
	10	9	0.01268	Pass
	20	9	0.01268	Pass
	30	15	0.02113	Pass
	40	15	0.02113	Pass
	50	12	0.01690	Pass
	Voltage (V_{DC})	QPSK (Hz)	QPSK (ppm)	Result
	3.7	12	0.01690	Pass
	3.5	15	0.02113	Pass
	4.2	15	0.02113	Pass

PRODUCT SIMILARITY DECLARATION LETTER



DDM Brands LLC
1616 NW, 84TH Ave. Miami, Florida,
U.S.A
Tel: +13057750325 Fax: +13057750325

Product Similarity Declaration

February 22, 2016

To Whom It May Concern,

We, DDM Brands LLC, hereby declare that we have a product named as 4G mobile phone (Model number: AM55MLVR194) was tested by BACL, meanwhile, for our marketing purpose, we would like to list a series models (ANDY 5.5M LTE VR, ANDY 5.5ML LTE VR, ANDY C5.5ML LTE VR, AC55MLVR194) on reports and certificate, all the models are identical schematics, only named differently.

No other changes are made to them

We confirm that all information above is true, and we'll be responsible for all the consequences. Please contact me if you have any question.

Sincerely,

Signature:

Luis Sosa

CEO

******* END OF REPORT *******