

FCC PART 15.247 TEST REPORT

For

DDM Brands LLC

2323 NW, 82ND Ave. Doral, Florida, U.S.A 33122

FCC ID: A4JANDY5E3

Report Type: Original Report	Product Type: Mobile Phone
Test Engineer: Kobe Li <i>Kobe Li</i>	
Report Number: RSZ160715001-00B	
Report Date: 2016-07-27	
Reviewed By: RF Engineer Simon Wang <i>Simon Wang</i>	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE	9
APPLICABLE STANDARD	9
FCC §15.203 – ANTENNA REQUIREMENT	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
TEST EQUIPMENT LIST AND DETAILS.....	12
CORRECTED FACTOR & MARGIN CALCULATION	12
TEST RESULTS SUMMARY	13
TEST DATA	13
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	16
APPLICABLE STANDARD	16
MEASUREMENT UNCERTAINTY.....	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST RESULTS SUMMARY	19
TEST DATA	19
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST DATA	21
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	28
APPLICABLE STANDARD	28
TEST PROCEDURE	28
TEST EQUIPMENT LIST AND DETAILS.....	28

TEST DATA	28
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA	34
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST EQUIPMENT LIST AND DETAILS.....	37
TEST DATA	37
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	53
APPLICABLE STANDARD	53
TEST PROCEDURE	53
TEST EQUIPMENT LIST AND DETAILS.....	53
TEST DATA	53
FCC §15.247(d) - BAND EDGES TESTING	55
APPLICABLE STANDARD	55
TEST PROCEDURE	55
TEST EQUIPMENT LIST AND DETAILS.....	55
TEST DATA	56

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The DDM Brands LLC's product, model number: *Andy 5E (FCC ID: A4JANDY5E3)* or the "EUT" in this report was a *Mobile phone*, which was measured approximately: 14.3 cm (L) × 7.9 cm (W) × 0.8 cm (H), rated with input voltage: DC 3.7V rechargeable Li-ion battery or DC 5.0V from adapter.

Adapter Information:

Model: UAL-L1A1-011A1-R

Input: AC 100-240V, 50/60Hz, 0.2A

Output: DC 5.0V, 1A

Note: The serial models Andy 5E3, AM5E3054, AM5E3043, AndyC5E, Andy C5E3, AC5E3054, AC5E3043 and Andy 5E, the difference between them is only the model number due to marketing purpose. Model Andy 5E was selected for testing. The detail was explained in the attached product similarity declaration letter provided and guaranteed by applicant.

**All measurement and test data in this report was gathered from production sample serial number: 1602781 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2016-07-15.*

Objective

This test report is prepared on behalf of DDM Brands LLC in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

Part 15.247 DTS, FCC Part 22H & 24E & 27 PCE and Part 15B JBP submissions with FCC ID: A4JANDY5E3.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.81 dB for 30MHz-1GHz, and 4.88 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on October 31, 2013. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.10-2013.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

No exercise software was used.

Special Accessories

No special accessory.

Equipment Modifications


No modification was made to the EUT tested.

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-Shielding Detachable USB Cable	0.62	EUT	Adapter
Un-Shielding Detachable Earphone Cable	1.1	EUT	Earphone

Block Diagram of Test Setup

For conducted emission

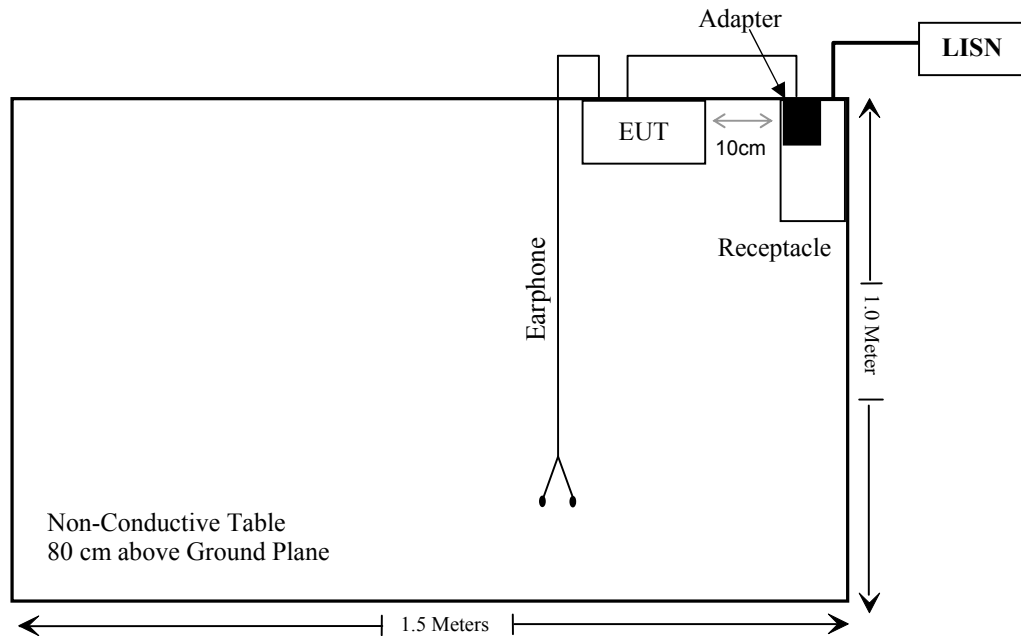

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

For worst case:

Frequency (MHz)	Maximum conducted Tune-up power		Distance (mm)	Calculated value	Threshold (1-g SAR)	SAR Test Exclusion
	power (dBm)	power (mW)				
2480	2.10	1.622	5	0.511	3.0	Yes

Result: No SAR test is required

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement for bluetooth, which was permanently attached and the antenna gain is -1 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements maybe receiver reading, attenuation of the connection between LISN and receiver, LISN voltage division factor, LISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report.

Port	Expanded Measurement uncertainty
AC Mains	3.34 dB (k=2, 95% level of confidence)
CAT 3	3.72 dB (k=2, 95% level of confidence)
CAT 5	3.74 dB (k=2, 95% level of confidence)
CAT 6	4.54 dB (k=2, 95% level of confidence)

EUT Setup



- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2016-06-01	2017-05-31
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2015-12-15	2016-12-14
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2016-05-14	2017-05-14
Ducommun technologies	Conducted Emission Cable	RG-214	CB031	2016-06-15	2017-06-15
Rohde & Schwarz	CE Test software	EMC 32	V8.53	NCR	NCR

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BACL, $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	16 %
ATM Pressure:	101.0 kPa

The testing was performed by Kobe Li on 2016-07-16.

EUT operation mode: Transmitting

AC 120V/60 Hz, Line:


EMI Auto Test L

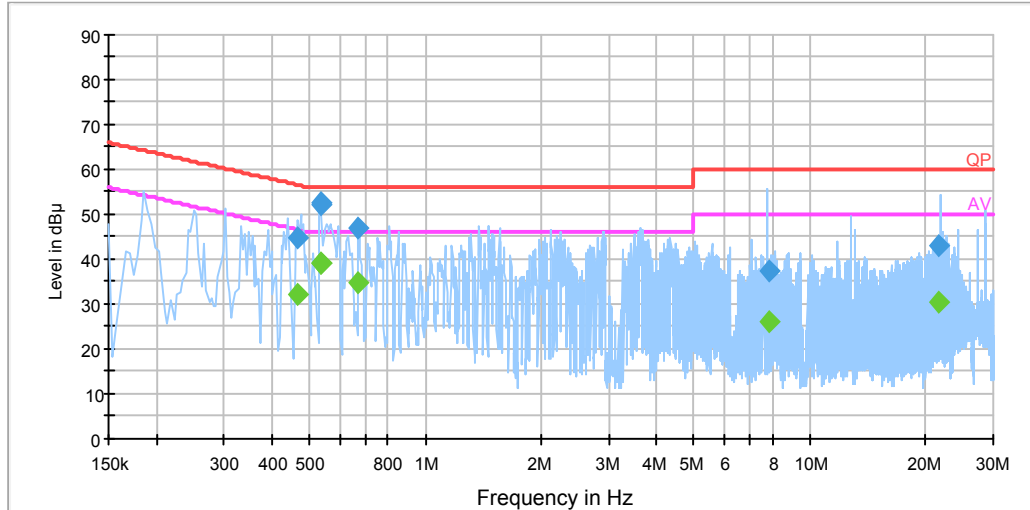

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.466890	44.8	19.9	56.6	11.8	QP
0.534050	52.1	19.9	56.0	3.9	QP
0.537930	52.4	19.9	56.0	3.6	QP
0.667890	46.8	19.9	56.0	9.2	QP
7.822230	37.3	20.1	60.0	22.7	QP
21.534970	43.1	20.1	60.0	16.9	QP
0.466890	32.2	19.9	46.6	14.4	Ave.
0.534050	39.0	19.9	46.0	7.0	Ave.
0.537930	39.3	19.9	46.0	6.7	Ave.
0.667890	34.8	19.9	46.0	11.2	Ave.
7.822230	26.2	20.1	50.0	23.8	Ave.
21.534970	30.5	20.1	50.0	19.5	Ave.

AC 120V/60 Hz, Neutral:

EMI Auto Test N

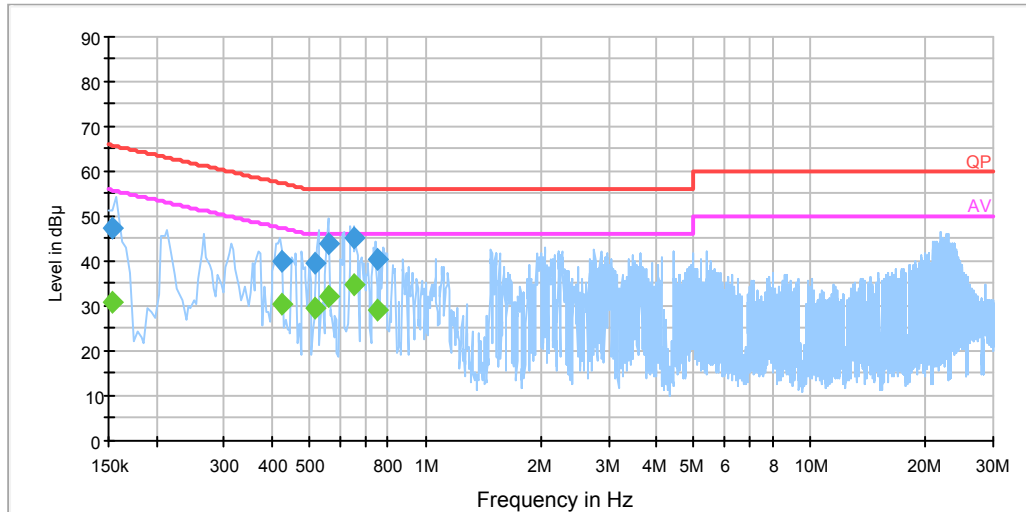

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.153500	47.6	20.0	65.8	18.2	QP
0.424270	40.2	19.9	57.4	17.2	QP
0.518110	39.7	19.9	56.0	16.3	QP
0.557630	43.8	19.9	56.0	12.2	QP
0.652250	45.1	19.9	56.0	10.9	QP
0.746870	40.6	19.9	56.0	15.4	QP
0.153500	31.0	20.0	55.8	24.8	Ave.
0.424270	30.6	19.9	47.4	16.8	Ave.
0.518110	29.4	19.9	46.0	16.6	Ave.
0.557630	32.3	19.9	46.0	13.7	Ave.
0.652250	34.8	19.9	46.0	11.2	Ave.
0.746870	29.1	19.9	46.0	16.9	Ave.

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard

FCC §15.205; §15.209; §15.247(d)


Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is 5.81 dB for 30MHz-1GHz and 4.88 dB for above 1GHz, 1.95dB for conducted measurement at antenna port. And the uncertainty will not be taken into consideration for the test data recorded in the report.

EUT Setup

Below 1 GHz:

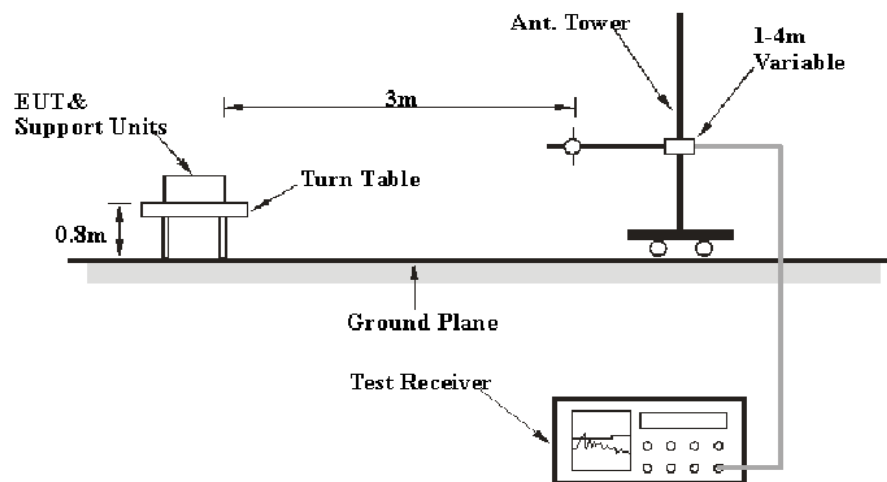

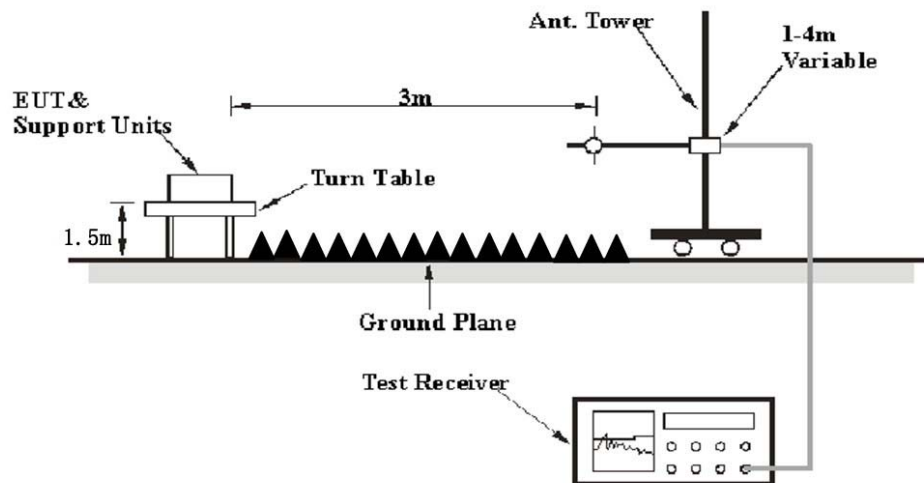Above 1GHz:

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447E	1937A01046	2016-05-06	2017-05-06
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2015-12-15	2016-12-14
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-07	2017-12-06
Mini	Amplifier	ZVA-183-S+	5969001149	2016-04-23	2017-04-23
A.H. System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2016-04-14	2017-04-14
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2013-10-14	2016-10-13
TDK	Chamber	Chamber A	2#	2013-10-15	2016-10-15
TDK	Chamber	Chamber B	1#	2014-07-22	2017-07-22
DUCOMMUN	Pre-amplifier	ALN-22093530-01	991373-01	2015-11-24	2016-11-23
R&S	Auto test Software	EMC32	V9.10	NCR	NCR
Ducommun technologies	RF Cable	UFA210A-1-4724-30050U	MFR64369223410-001	2015-10-22	2016-10-22
Ducommun technologies	RF Cable	104PEA	218124002	2015-10-22	2016-10-22
Ducommun technologies	RF Cable	RG-214	1	2016-05-06	2017-05-06
Ducommun technologies	RF Cable	RG-214	2	2016-05-06	2017-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{lim} + U_{cisp\text{r}}$$

In BACL, $U_{(L_m)}$ is less than $+ U_{cisp\text{r}}$, if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Kobe Li on 2016-07-18.

EUT operation mode: Transmitting

30 MHz -25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK, 8-DPSK mode, the worst case is BDR Mode (GFSK))

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2402 MHz)									
460.9	32.38	QP	149	1.3	V	-3.2	29.18	46	16.82
2402	79.76	PK	262	2.4	H	4.97	84.73	/	/
2402	68.44	Ave.	262	2.4	H	4.97	73.41	/	/
2402	76.78	PK	52	2.3	V	4.97	81.75	/	/
2402	65.53	Ave.	52	2.3	V	4.97	70.50	/	/
2371.48	33.01	PK	115	1.4	H	4.97	37.98	74	36.02
2371.48	18.24	Ave.	115	1.4	H	4.97	23.21	54	30.79
2388.55	33.63	PK	58	1.2	H	4.97	38.60	74	35.40
2388.55	18.35	Ave.	58	1.2	H	4.97	23.32	54	30.68
2485.05	33.67	PK	71	1.7	H	6.29	39.96	74	34.04
2485.05	19.53	Ave.	71	1.7	H	6.29	25.82	54	28.18
4804.00	31.46	PK	46	2.5	H	16.92	48.38	74	25.62
4804.00	16.33	Ave.	46	2.5	H	16.92	33.25	54	20.75

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Middle Channel (2441 MHz)									
460.9	32.31	QP	196	1.6	V	-3.2	29.11	46	16.89
2441	76.57	PK	143	1.2	H	4.97	81.54	/	/
2441	65.17	Ave.	143	1.2	H	4.97	70.14	/	/
2441	75.53	PK	35	1.1	V	4.97	80.50	/	/
2441	64.59	Ave.	35	1.1	V	4.97	69.56	/	/
2377.65	32.85	PK	53	1.4	H	4.97	37.82	74	36.18
2377.65	18.33	Ave.	53	1.4	H	4.97	23.30	54	30.70
2486.27	33.84	PK	286	2.4	H	6.29	40.13	74	33.87
2486.27	19.64	Ave.	286	2.4	H	6.29	25.93	54	28.07
2490.61	33.71	PK	352	1.6	H	6.29	40.00	74	34.00
2490.61	19.54	Ave.	352	1.6	H	6.29	25.83	54	28.17
4882.00	31.55	PK	332	1.2	H	16.91	48.46	74	25.54
4882.00	16.29	Ave.	332	1.2	H	16.91	33.20	54	20.80
High Channel (2480 MHz)									
460.9	31.46	QP	316	2.3	V	-3.2	28.26	46	17.74
2480	76.71	PK	81	2.2	H	6.29	83.00	/	/
2480	64.13	Ave.	81	2.2	H	6.29	70.42	/	/
2480	74.81	PK	62	1.5	V	6.29	81.10	/	/
2480	63.37	Ave.	62	1.5	V	6.29	69.66	/	/
2370.28	34.02	PK	250	1.5	H	4.97	38.99	74	35.01
2370.28	18.69	Ave.	250	1.5	H	4.97	23.66	54	30.34
2487.99	33.55	PK	210	2.2	H	6.29	39.84	74	34.16
2487.99	19.63	Ave.	210	2.2	H	6.29	25.92	54	28.08
2491.93	32.39	PK	20	1.2	H	6.29	38.68	74	35.32
2491.93	18.71	Ave.	20	1.2	H	6.29	25.00	54	29.00
4960.00	32.41	PK	308	1.3	H	17.91	50.32	74	23.68
4960.00	16.59	Ave.	308	1.3	H	17.91	34.50	54	19.50

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude

The other spurious emission which is 20dB to the limit was not recorded.

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2016-04-14	2017-04-14
Ducommun technologies	RF Cable	RG-214	3	2016-05-06	2017-05-06
WEINSCHEL	3dB Attenuator	5321	AU0709	2015-07-18	2016-07-18

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Kobe Li on 2016-07-16.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots


Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	$\geq$ Limit (MHz)	Result
BDR (GFSK)	Low	2402	1.002	0.625	Pass
	Adjacent	2403			
	Middle	2441	0.998	0.628	Pass
	Adjacent	2442			
	High	2480	0.994	0.623	Pass
	Adjacent	2479			
EDR ($\pi/4$-DQPSK)	Low	2402	1.004	0.838	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.838	Pass
	Adjacent	2442			
	High	2480	0.998	0.838	Pass
	Adjacent	2479			
EDR (8DPSK)	Low	2402	0.998	0.846	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.850	Pass
	Adjacent	2442			
	High	2480	0.998	0.846	Pass
	Adjacent	2479			

Note: Limit = 20 dB bandwidth *2/3

BDR (GFSK): Low Channel

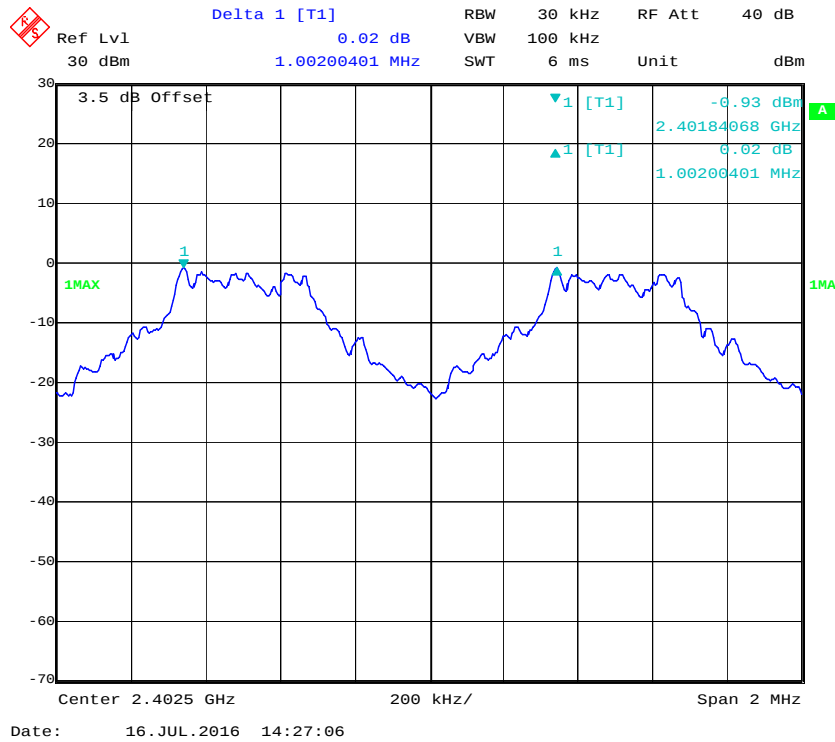

BDR (GFSK): Middle Channel

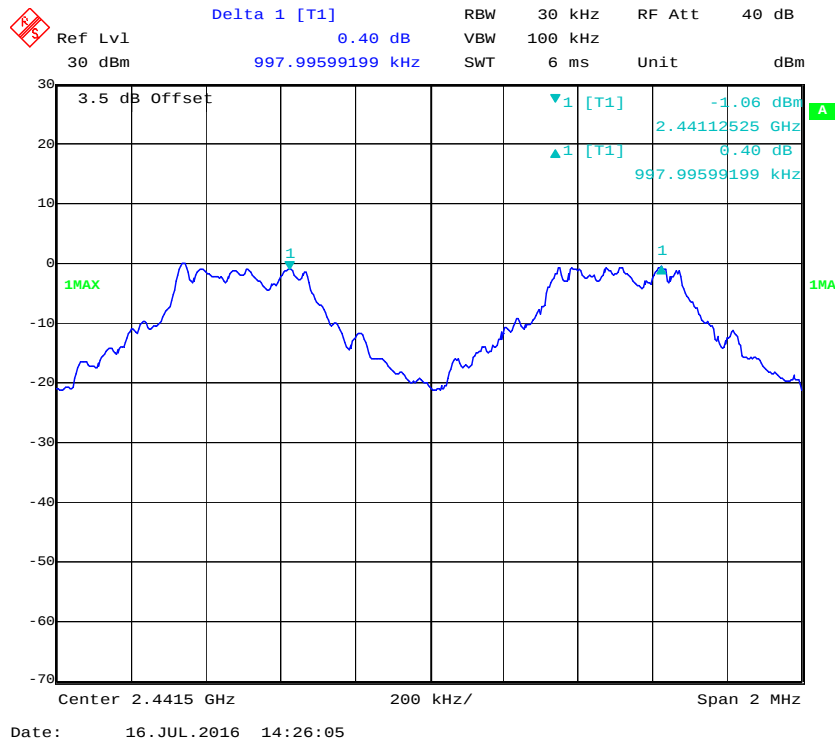

Ref Lvl 30 dBm Delta 1 [T1] 0.07 dB RBW 30 kHz RF Att 40 dB
 30 dBm 993.98797595 kHz SWT 6 ms Unit dBm

3.5 dB Offset

1 [T1] 6.45 dBm
 1 [T1] 2.4784068 GHz
 0.07 dB
 993.98797595 kHz

1MAX

Center 2.4795 GHz 200 kHz/ Span 2 MHz

Date: 16. JUL. 2016 14:24:15

Ref Lvl 23.5 dBm Delta 1 [T1] 0.11 dB RBW 30 kHz RF Att 30 dB
 3.5 dB Offset 2.40400802 MHz SWT 8.5 ms Unit dBm


23.5
 20
 10
 0
 -10
 -20
 -30
 -40
 -50
 -60
 -70
 -76.5

3.5 dB Offset


1 [T1] -1.90 dBm
 1 [T1] 2.40184168 GHz 0.11 dB
 1.00400802 MHz

Center 2.4025 GHz 300 kHz/ Span 3 MHz


EDR ($\pi/4$ -DQPSK): Middle Channel

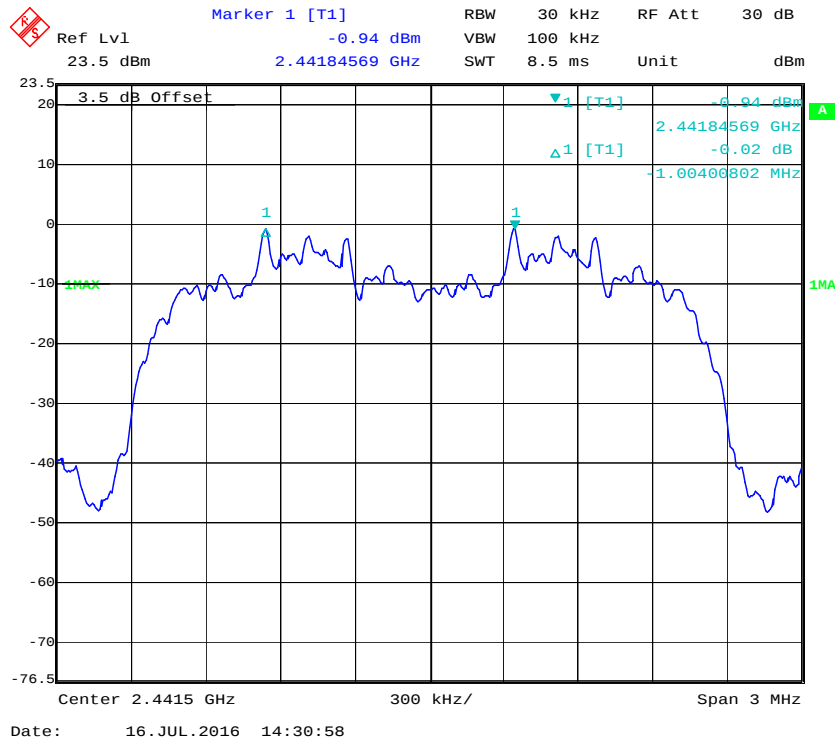


EDR ($\pi/4$ -DQPSK): High Channel

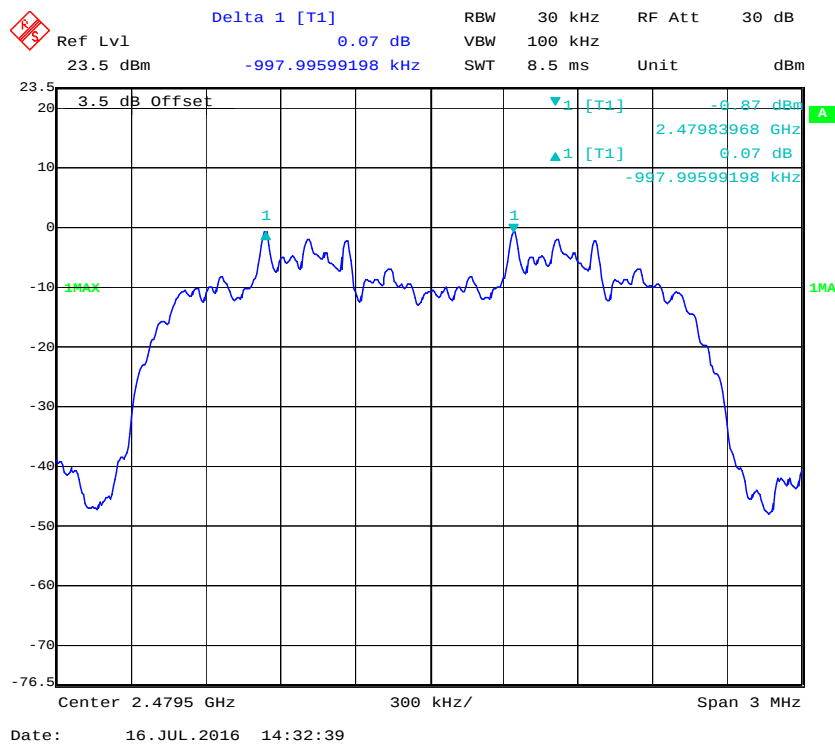


EDR (8DPSK): Low Channel

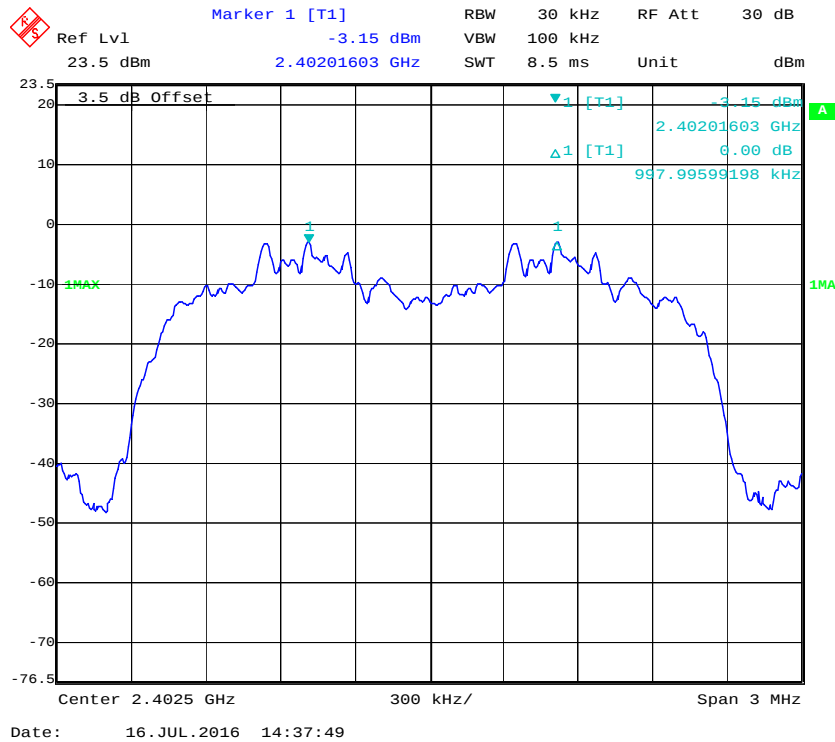

EDR (8DPSK): Middle Channel

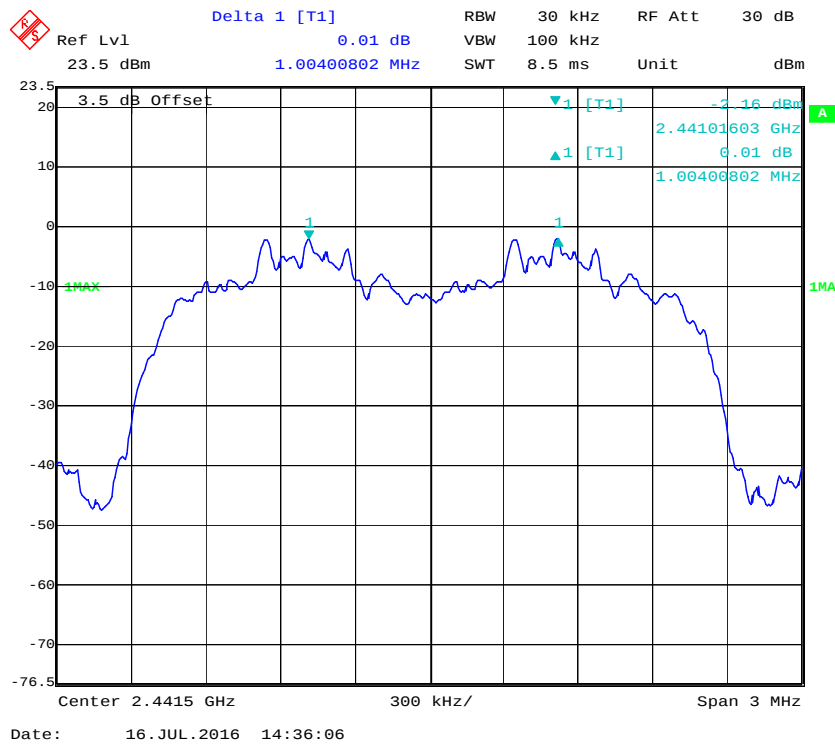

EDR (8DPSK): High Channel

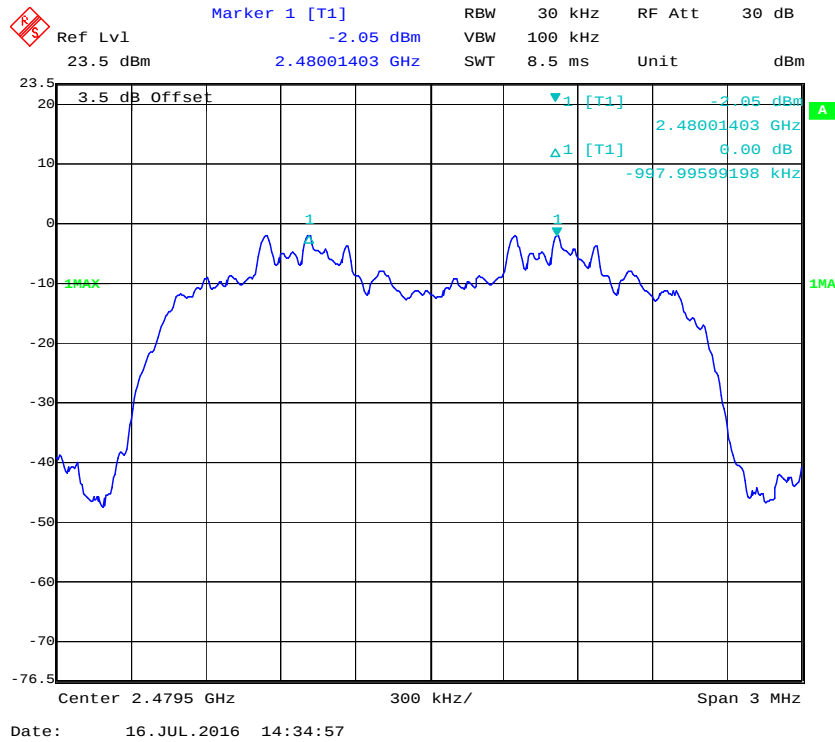

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2016-04-14	2017-04-14
Ducommun technologies	RF Cable	RG-214	3	2016-05-06	2017-05-06
WEINSCHTEL	3dB Attenuator	5321	AU0709	2015-07-18	2016-07-18

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Kobe Li on 2016-07-16.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.938
	Middle	2441	0.942
	High	2480	0.934
EDR ($\pi/4$ -DQPSK)	Low	2402	1.257
	Middle	2441	1.257
	High	2480	1.257
EDR (8DPSK)	Low	2402	1.269
	Middle	2441	1.275
	High	2480	1.269

Ref Lvl 30 dBm Delta 1 [T1] -0.53 dB RBW 30 kHz RF Att 40 dB VBW 100 kHz SWT 6 ms Unit dBm

3.5 dB Offset

1 [T1] -0.53 dBm 2.40154910 GHz

2 [T1] -0.53 dBm 937.87575150 kHz

3 [T1] -0.91 dBm 2.40184168 GHz

4 [T1] -0.91 dBm

5 [T1] -0.91 dBm

6 [T1] -0.91 dBm

7 [T1] -0.91 dBm

8 [T1] -0.91 dBm

9 [T1] -0.91 dBm

10 [T1] -0.91 dBm

11 [T1] -0.91 dBm

12 [T1] -0.91 dBm

13 [T1] -0.91 dBm

14 [T1] -0.91 dBm

15 [T1] -0.91 dBm

16 [T1] -0.91 dBm

17 [T1] -0.91 dBm

18 [T1] -0.91 dBm

19 [T1] -0.91 dBm

20 [T1] -0.91 dBm

21 [T1] -0.91 dBm

22 [T1] -0.91 dBm

23 [T1] -0.91 dBm

24 [T1] -0.91 dBm

25 [T1] -0.91 dBm

26 [T1] -0.91 dBm

27 [T1] -0.91 dBm

28 [T1] -0.91 dBm

29 [T1] -0.91 dBm

30 [T1] -0.91 dBm

31 [T1] -0.91 dBm

32 [T1] -0.91 dBm

33 [T1] -0.91 dBm

34 [T1] -0.91 dBm

35 [T1] -0.91 dBm

36 [T1] -0.91 dBm

37 [T1] -0.91 dBm

38 [T1] -0.91 dBm

39 [T1] -0.91 dBm

40 [T1] -0.91 dBm

41 [T1] -0.91 dBm

42 [T1] -0.91 dBm

43 [T1] -0.91 dBm

44 [T1] -0.91 dBm

45 [T1] -0.91 dBm

46 [T1] -0.91 dBm

47 [T1] -0.91 dBm

48 [T1] -0.91 dBm

49 [T1] -0.91 dBm

50 [T1] -0.91 dBm

51 [T1] -0.91 dBm

52 [T1] -0.91 dBm

53 [T1] -0.91 dBm

54 [T1] -0.91 dBm

55 [T1] -0.91 dBm

56 [T1] -0.91 dBm

57 [T1] -0.91 dBm

58 [T1] -0.91 dBm

59 [T1] -0.91 dBm

60 [T1] -0.91 dBm

61 [T1] -0.91 dBm

62 [T1] -0.91 dBm

63 [T1] -0.91 dBm

64 [T1] -0.91 dBm

65 [T1] -0.91 dBm

66 [T1] -0.91 dBm

67 [T1] -0.91 dBm

68 [T1] -0.91 dBm

69 [T1] -0.91 dBm

70 [T1] -0.91 dBm

71 [T1] -0.91 dBm

72 [T1] -0.91 dBm

73 [T1] -0.91 dBm

74 [T1] -0.91 dBm

75 [T1] -0.91 dBm

76 [T1] -0.91 dBm

77 [T1] -0.91 dBm

78 [T1] -0.91 dBm

79 [T1] -0.91 dBm

80 [T1] -0.91 dBm

81 [T1] -0.91 dBm

82 [T1] -0.91 dBm

83 [T1] -0.91 dBm

84 [T1] -0.91 dBm

85 [T1] -0.91 dBm

86 [T1] -0.91 dBm

87 [T1] -0.91 dBm

88 [T1] -0.91 dBm

89 [T1] -0.91 dBm

90 [T1] -0.91 dBm

91 [T1] -0.91 dBm

92 [T1] -0.91 dBm

93 [T1] -0.91 dBm

94 [T1] -0.91 dBm

95 [T1] -0.91 dBm

96 [T1] -0.91 dBm

97 [T1] -0.91 dBm

98 [T1] -0.91 dBm

99 [T1] -0.91 dBm

100 [T1] -0.91 dBm

101 [T1] -0.91 dBm

102 [T1] -0.91 dBm

103 [T1] -0.91 dBm

104 [T1] -0.91 dBm

105 [T1] -0.91 dBm

106 [T1] -0.91 dBm

107 [T1] -0.91 dBm

108 [T1] -0.91 dBm

109 [T1] -0.91 dBm

110 [T1] -0.91 dBm

111 [T1] -0.91 dBm

112 [T1] -0.91 dBm

113 [T1] -0.91 dBm

114 [T1] -0.91 dBm

115 [T1] -0.91 dBm

116 [T1] -0.91 dBm

117 [T1] -0.91 dBm

118 [T1] -0.91 dBm

119 [T1] -0.91 dBm

120 [T1] -0.91 dBm

121 [T1] -0.91 dBm

122 [T1] -0.91 dBm

123 [T1] -0.91 dBm

124 [T1] -0.91 dBm

125 [T1] -0.91 dBm

126 [T1] -0.91 dBm

127 [T1] -0.91 dBm

128 [T1] -0.91 dBm

129 [T1] -0.91 dBm

130 [T1] -0.91 dBm

131 [T1] -0.91 dBm

132 [T1] -0.91 dBm

133 [T1] -0.91 dBm

134 [T1] -0.91 dBm

135 [T1] -0.91 dBm

136 [T1] -0.91 dBm

137 [T1] -0.91 dBm

138 [T1] -0.91 dBm

139 [T1] -0.91 dBm

140 [T1] -0.91 dBm

141 [T1] -0.91 dBm

142 [T1] -0.91 dBm

143 [T1] -0.91 dBm

144 [T1] -0.91 dBm

145 [T1] -0.91 dBm

146 [T1] -0.91 dBm

147 [T1] -0.91 dBm

148 [T1] -0.91 dBm

149 [T1] -0.91 dBm

150 [T1] -0.91 dBm

151 [T1] -0.91 dBm

152 [T1] -0.91 dBm

153 [T1] -0.91 dBm

154 [T1] -0.91 dBm

155 [T1] -0.91 dBm

156 [T1] -0.91 dBm

157 [T1] -0.91 dBm

158 [T1] -0.91 dBm

159 [T1] -0.91 dBm

160 [T1] -0.91 dBm

161 [T1] -0.91 dBm

162 [T1] -0.91 dBm

163 [T1] -0.91 dBm

164 [T1] -0.91 dBm

165 [T1] -0.91 dBm

166 [T1] -0.91 dBm

167 [T1] -0.91 dBm

168 [T1] -0.91 dBm

169 [T1] -0.91 dBm

170 [T1] -0.91 dBm

171 [T1] -0.91 dBm

172 [T1] -0.91 dBm

173 [T1] -0.91 dBm

174 [T1] -0.91 dBm

175 [T1] -0.91 dBm

176 [T1] -0.91 dBm

177 [T1] -0.91 dBm

178 [T1] -0.91 dBm

179 [T1] -0.91 dBm

180 [T1] -0.91 dBm

181 [T1] -0.91 dBm

182 [T1] -0.91 dBm

183 [T1] -0.91 dBm

184 [T1] -0.91 dBm

185 [T1] -0.91 dBm

186 [T1] -0.91 dBm

187 [T1] -0.91 dBm

188 [T1] -0.91 dBm

189 [T1] -0.91 dBm

190 [T1] -0.91 dBm

191 [T1] -0.91 dBm

192 [T1] -0.91 dBm

193 [T1] -0.91 dBm



194 [T1] -0.91 dBm



195 [T1] -0.91 dBm



196 [T1] -0.91 dBm

197 [T1] -0.91 dBm


198 [T1] -0.91 dBm</

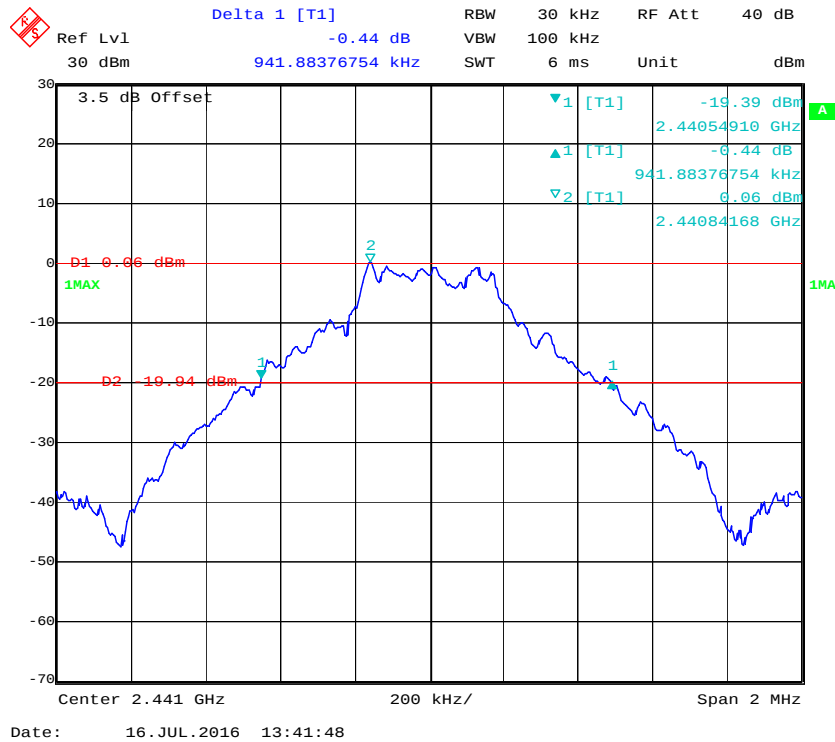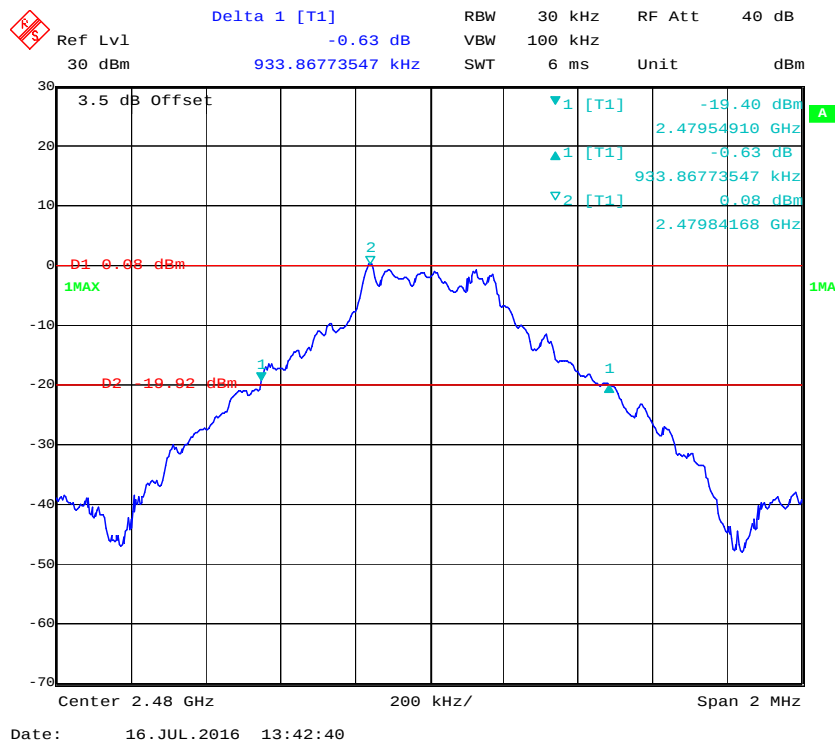BDR (GFSK): Middle Channel**BDR (GFSK): High Channel**

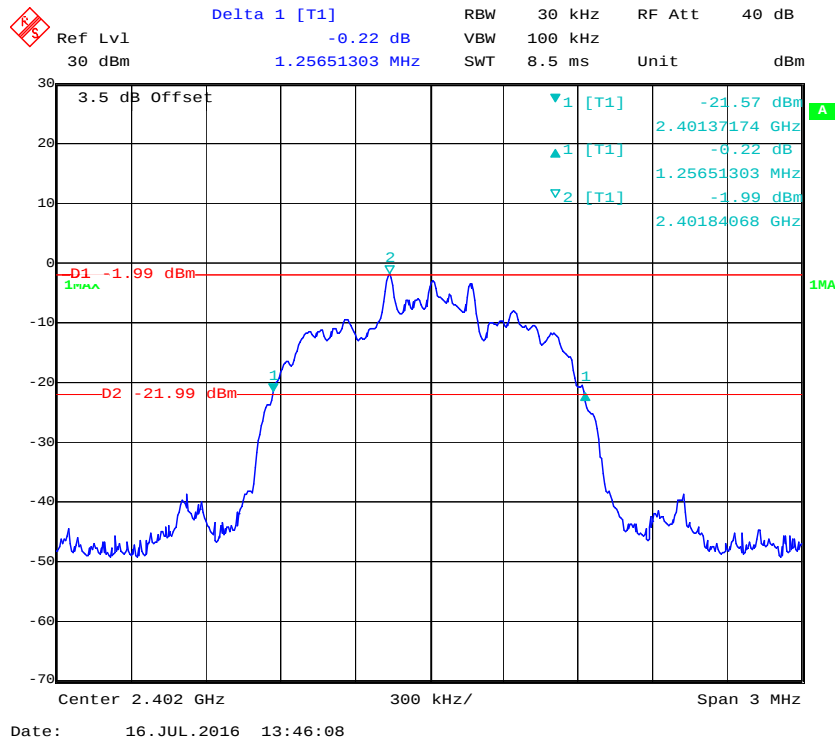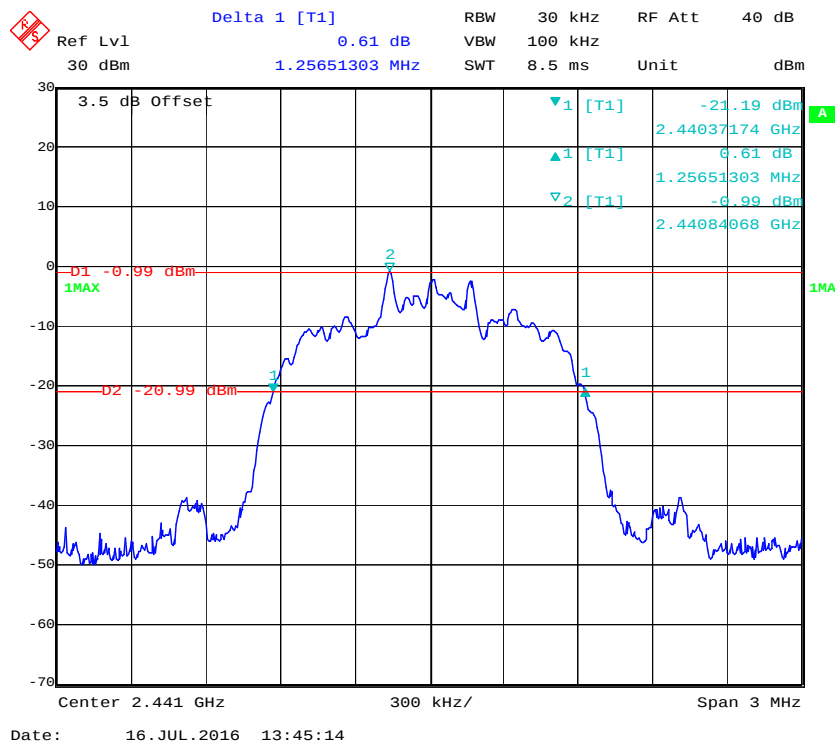
EDR ($\pi/4$ -DQPSK): Low ChannelEDR ($\pi/4$ -DQPSK): Middle Channel

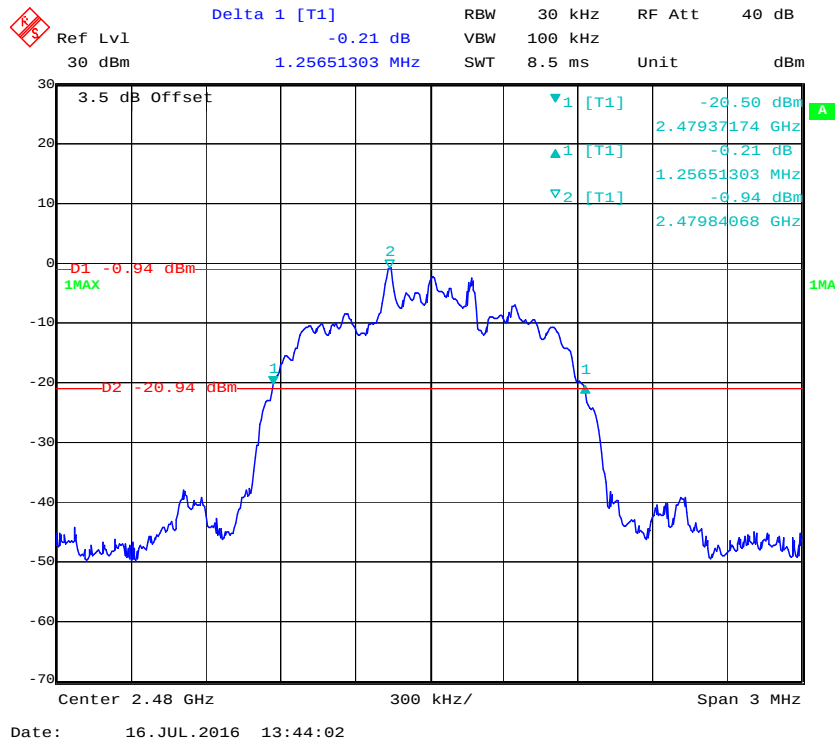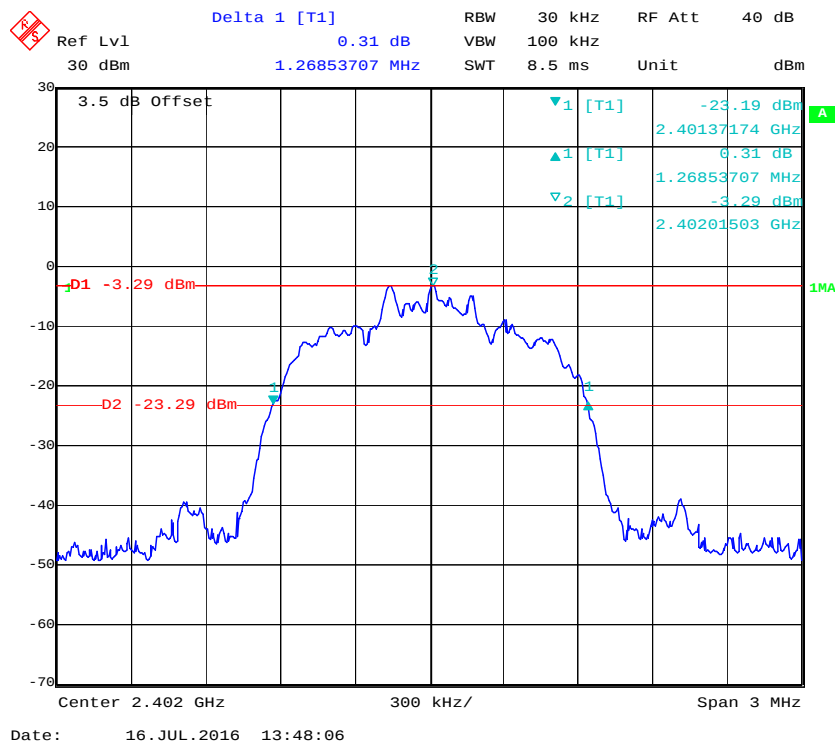EDR ($\pi/4$ -DQPSK): High Channel**EDR (8DPSK): Low Channel**

EDR (8DPSK): Middle Channel

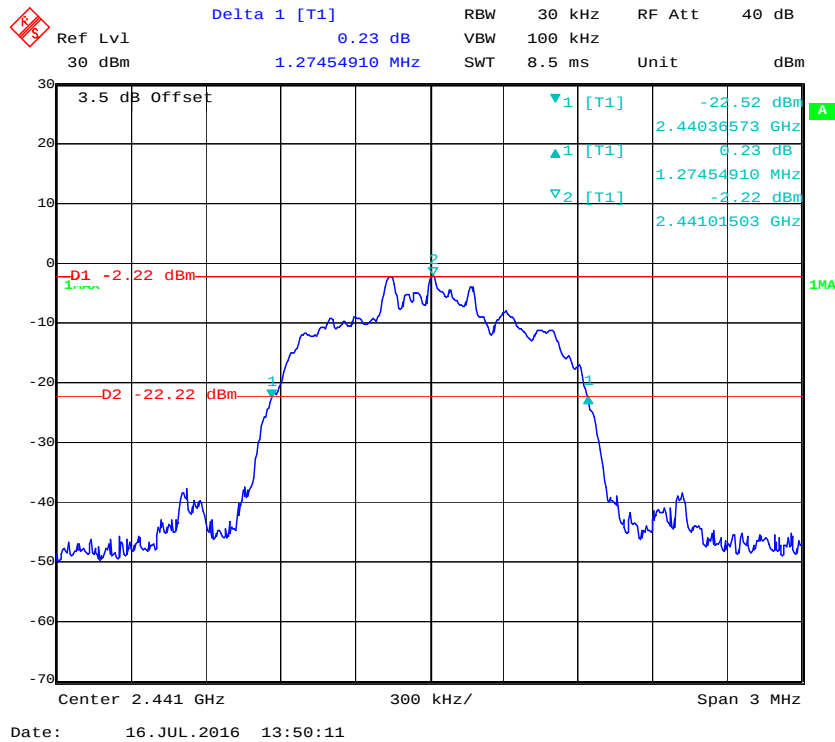

EDR (8DPSK): High Channel

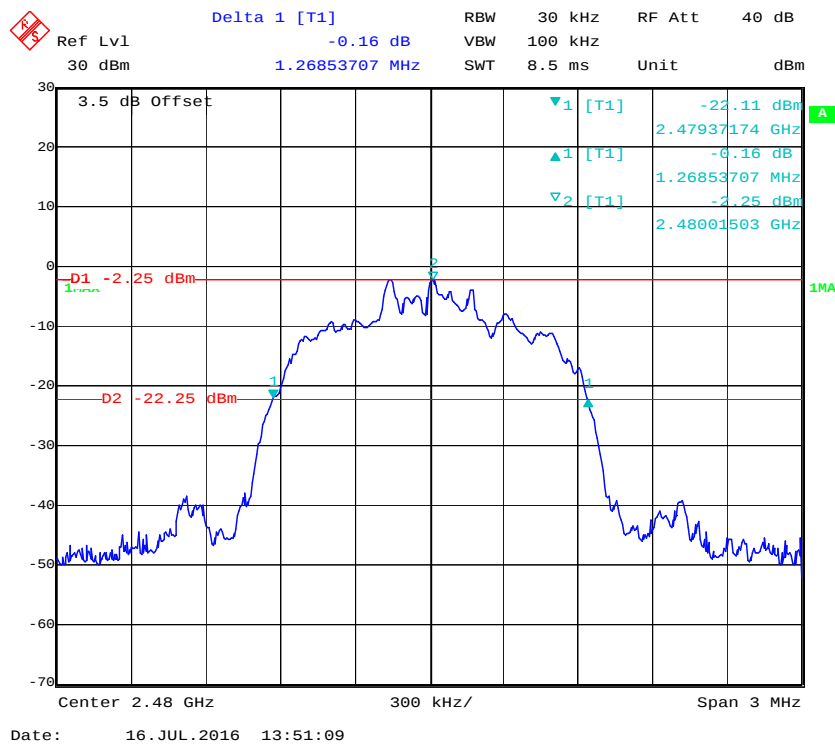

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2016-04-14	2017-04-14
Ducommun technologies	RF Cable	RG-214	3	2016-05-06	2017-05-06
WEINSCHL	3dB Attenuator	5321	AU0709	2015-07-18	2016-07-18

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa


The testing was performed by Kobe Li on 2016-07-16.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.


Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	15
EDR ($\pi/4$ -DQPSK)	2400-2483.5	79	15
EDR (8DPSK)	2400-2483.5	79	15

BDR (GFSK): Number of Hopping Channels

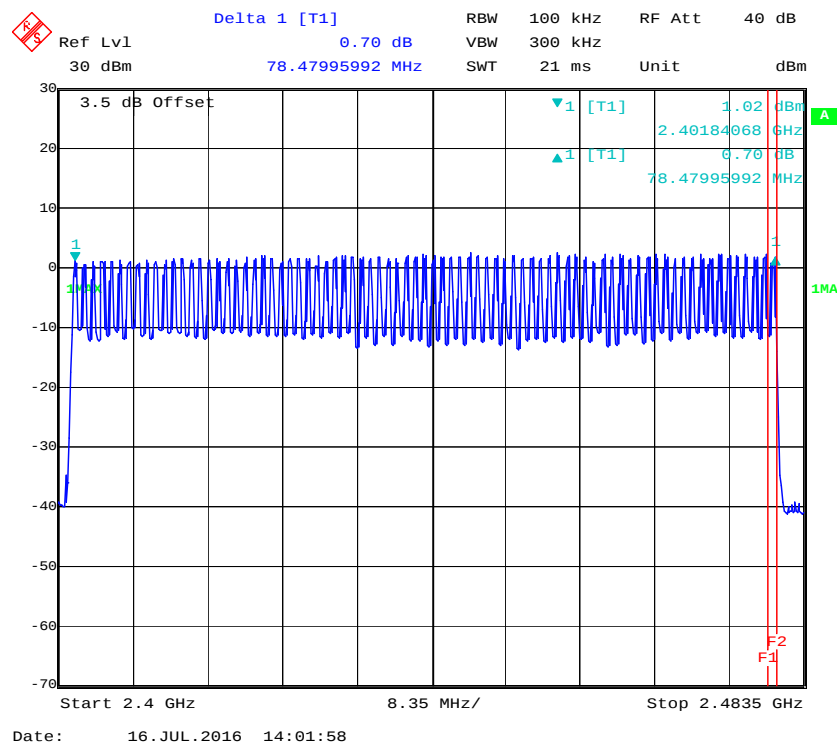

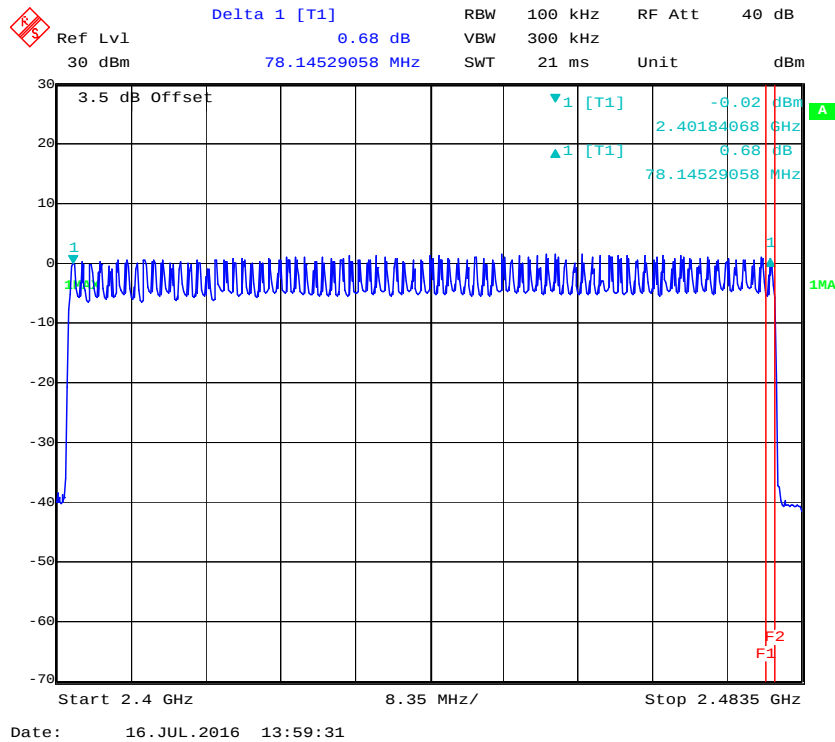EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

EDR (8DPSK): Number of Hopping Channels

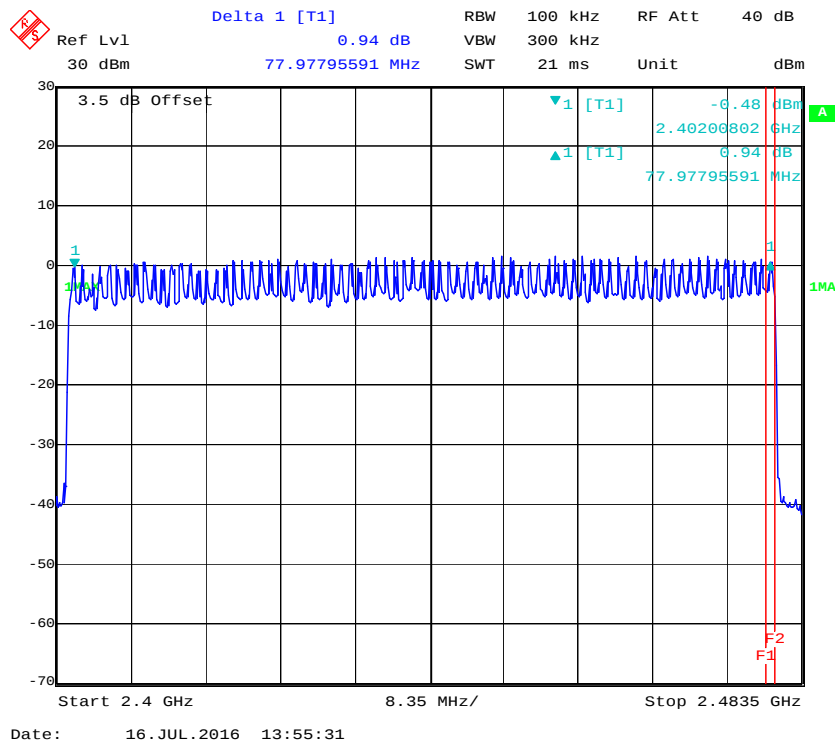

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2016-04-14	2017-04-14
Ducommun technologies	RF Cable	RG-214	3	2016-05-06	2017-05-06
WEINSCHL	3dB Attenuator	5321	AU0709	2015-07-18	2016-07-18

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions



Temperature:	26 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Kobe Li on 2016-07-16.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.


Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
BDR (GFSK)	DH 1	Low	0.377	0.121	0.4	Pass
		Middle	0.377	0.121	0.4	Pass
		High	0.377	0.121	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.641	0.263	0.4	Pass
		Middle	1.641	0.263	0.4	Pass
		High	1.647	0.264	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.896	0.309	0.4	Pass
		Middle	2.896	0.309	0.4	Pass
		High	2.906	0.310	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ($\pi/4$ -DQPSK)	2DH 1	Low	0.385	0.123	0.4	Pass
		Middle	0.385	0.123	0.4	Pass
		High	0.385	0.123	0.4	Pass
		Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	2DH 3	Low	1.647	0.264	0.4	Pass
		Middle	1.647	0.264	0.4	Pass
		High	1.647	0.264	0.4	Pass
		Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	2DH 5	Low	2.906	0.310	0.4	Pass
		Middle	2.906	0.310	0.4	Pass
		High	2.906	0.310	0.4	Pass
		Note: 2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	3DH 1	Low	0.385	0.123	0.4	Pass
		Middle	0.385	0.123	0.4	Pass
		High	0.385	0.123	0.4	Pass
		Note: 3DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	3DH 3	Low	1.647	0.264	0.4	Pass
		Middle	1.647	0.264	0.4	Pass
		High	1.647	0.264	0.4	Pass
		Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	3DH 5	Low	2.906	0.310	0.4	Pass
		Middle	2.906	0.310	0.4	Pass
		High	2.916	0.311	0.4	Pass
		Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				

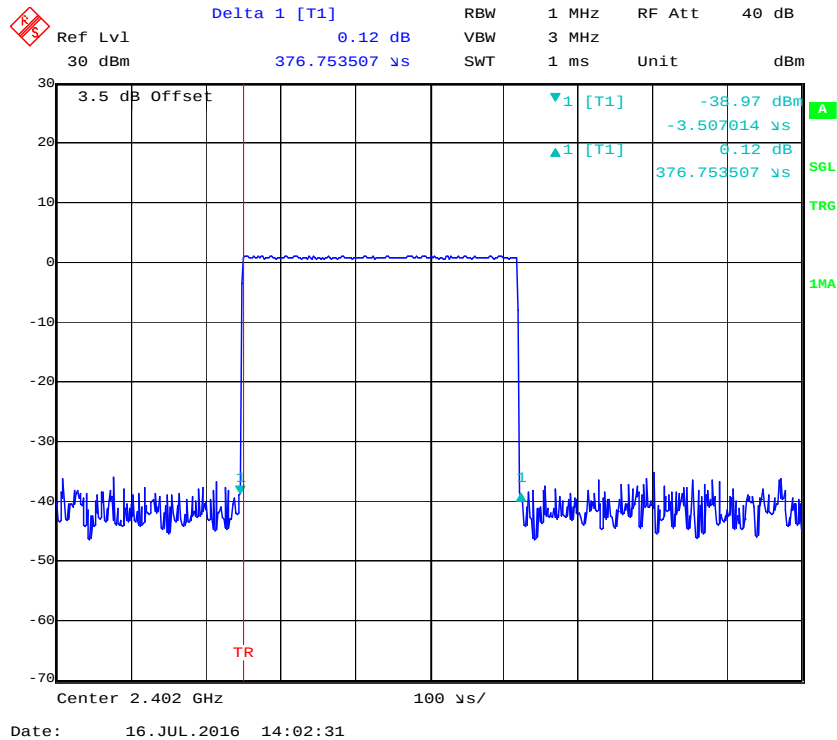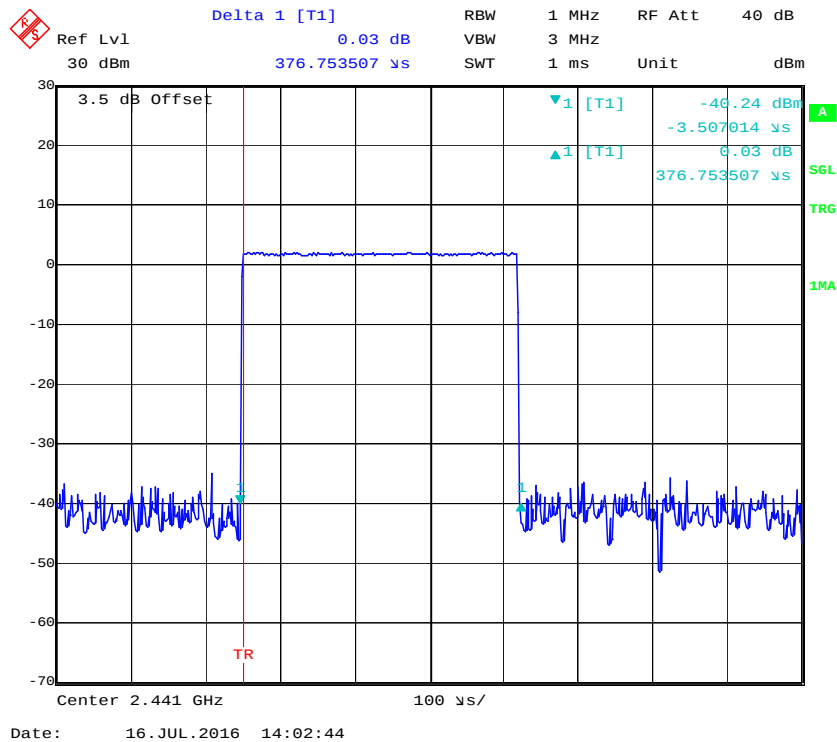**BDR (GFSK):
Pulse time, Low Channel, DH1****Pulse time, Middle Channel, DH1**


Pulse time, High Channel, DH1

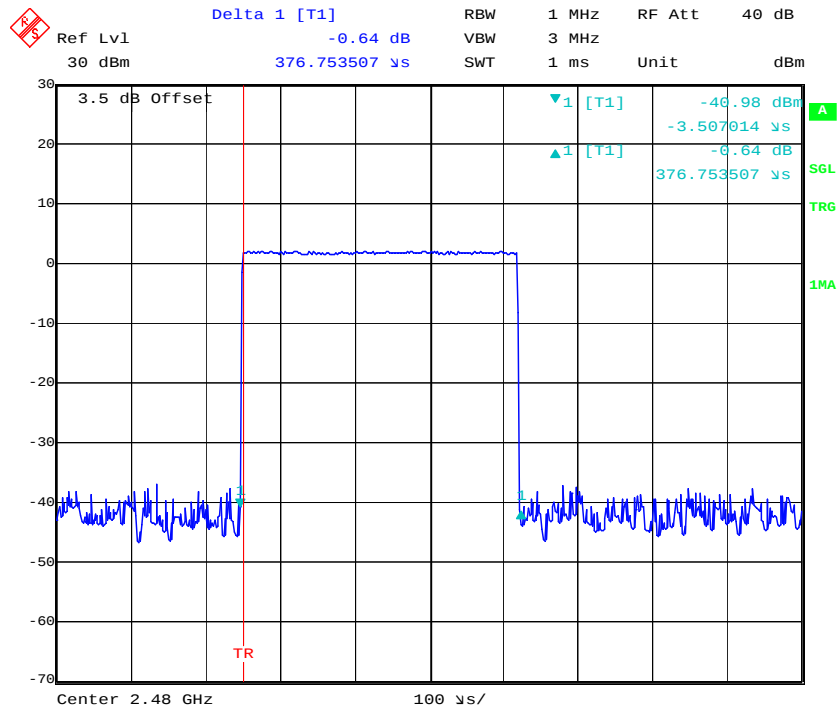

Pulse time, Low Channel, DH3

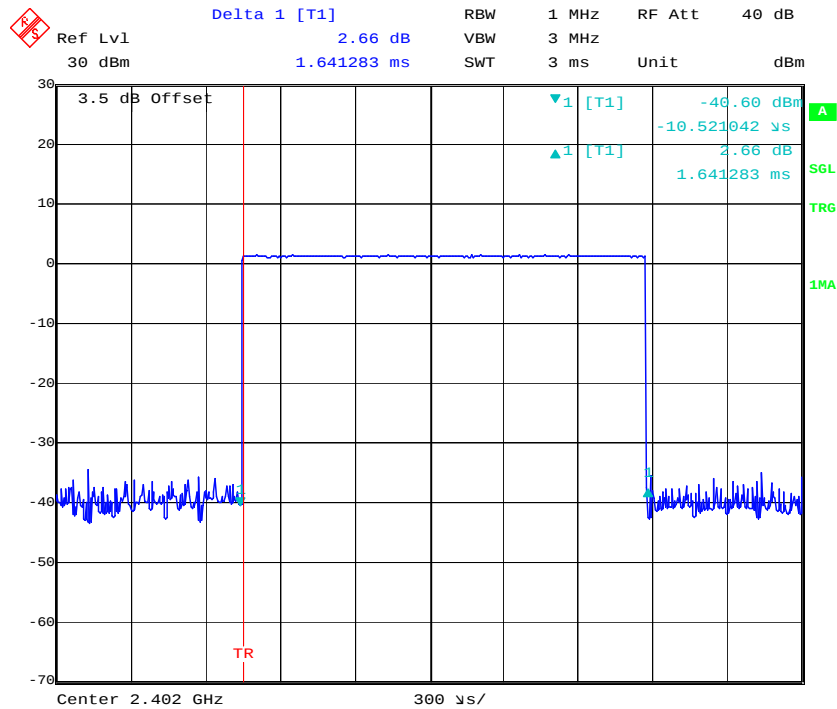


Pulse time, Middle Channel, DH3

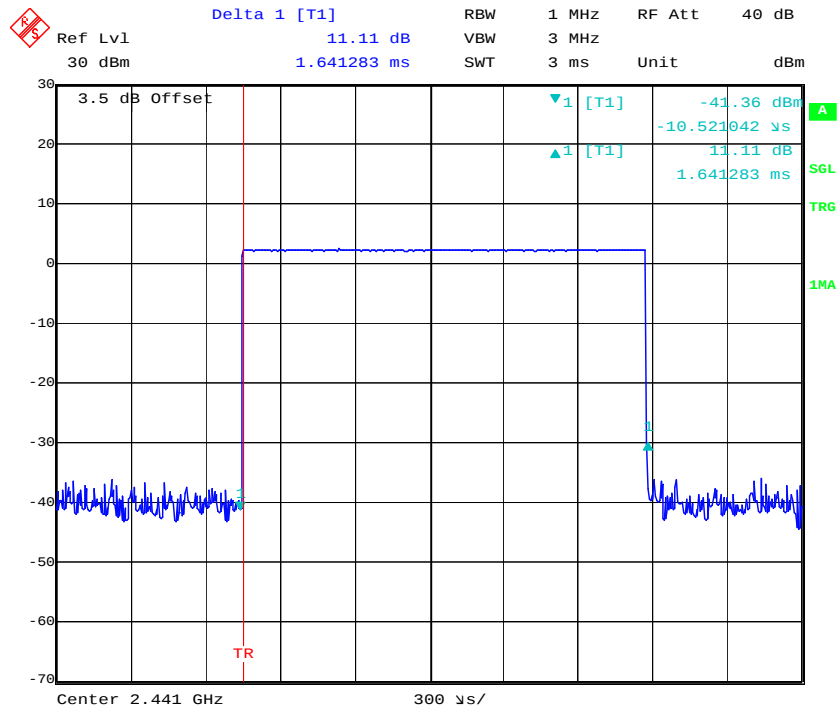


Date: 16.JUL.2016 14:04:24

Pulse time, High Channel, DH3

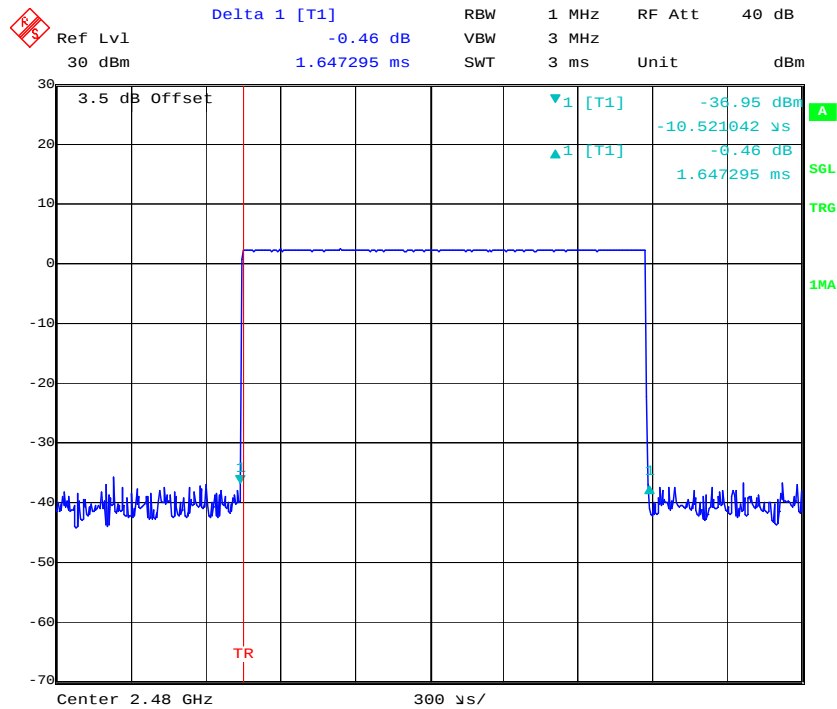


Date: 16.JUL.2016 14:04:35

Pulse time, Low Channel, DH5

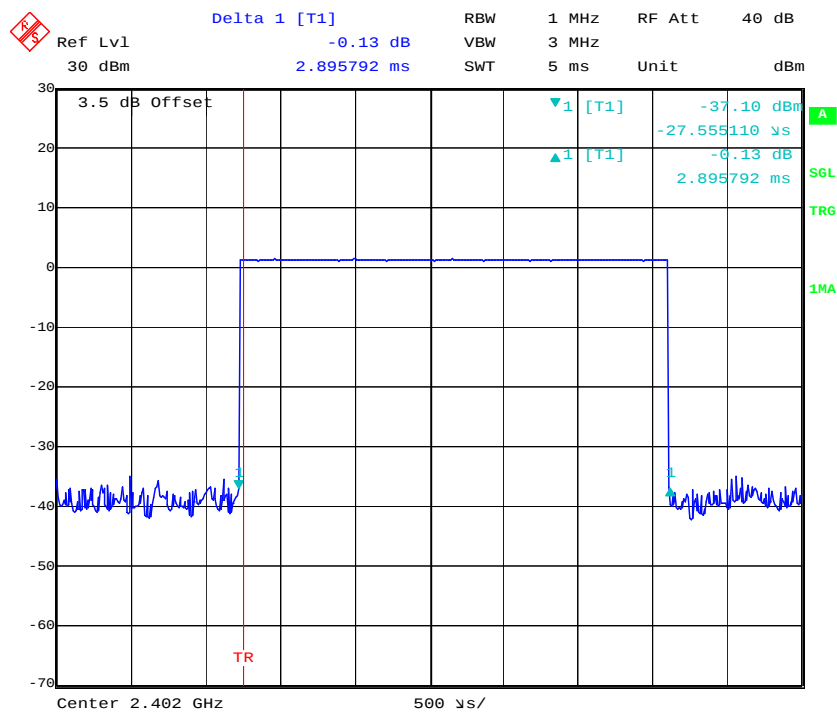

Date: 16.JUL.2016 14:05:09

Pulse time, Middle Channel, DH5

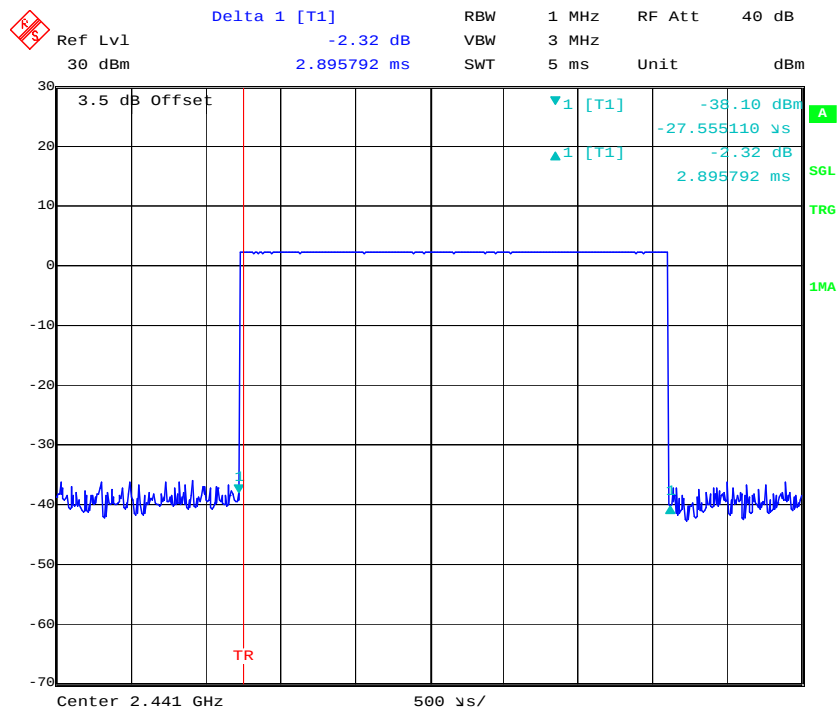

Date: 16.JUL.2016 14:05:19

Ref Lvl 30 dBm
Delta 1 [T1] -1.66 dB
2.905812 ms
RBW 1 MHz
VBW 3 MHz
SWT 5 ms
RF Att 40 dB
Unit dBm

3.5 dB Offset
-36.60 dBm
-27.555110 μ s
-1.66 dB
2.905812 ms

Center 2.48 GHz
500 μ s/

Date: 16.JUL.2016 14:05:30

Ref Lvl 30 dBm

Delta 1 [T1] -4.06 dB

RBW 1 MHz

VBW 3 MHz

SWT 1 ms

RF Att 40 dB

Unit dBm

3.5 dB Offset

▼1 [T1] -36.12 dBm

▲1 [T1] -3.507014 us

-4.06 dB

384.769539 us


TR

Center 2.402 GHz

100 us/


Date: 16.JUL.2016 14:06:42

Pulse time, Middle Channel, 2DH1

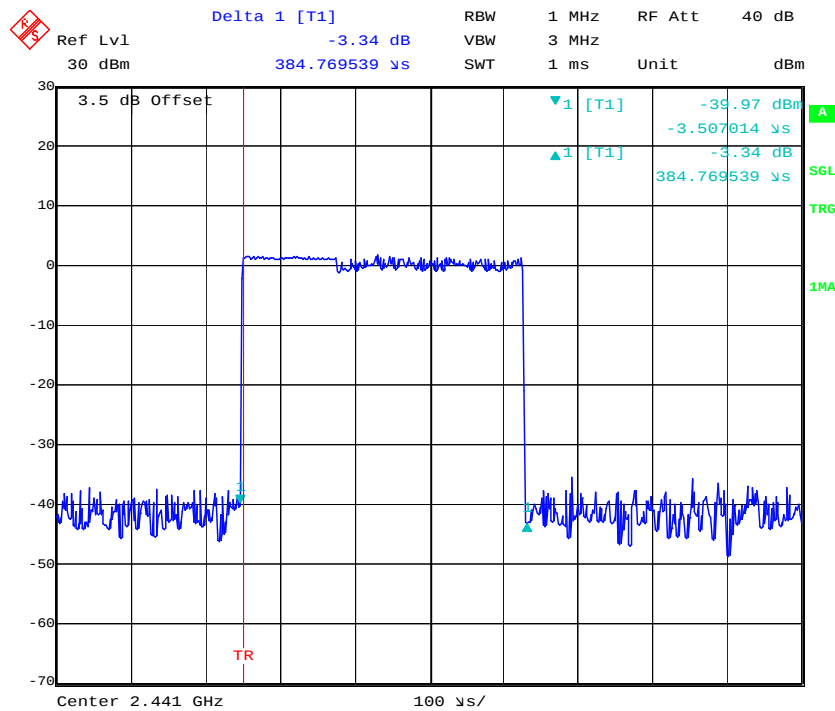


Date: 16.JUL.2016 14:06:53

Pulse time, High Channel, 2DH1

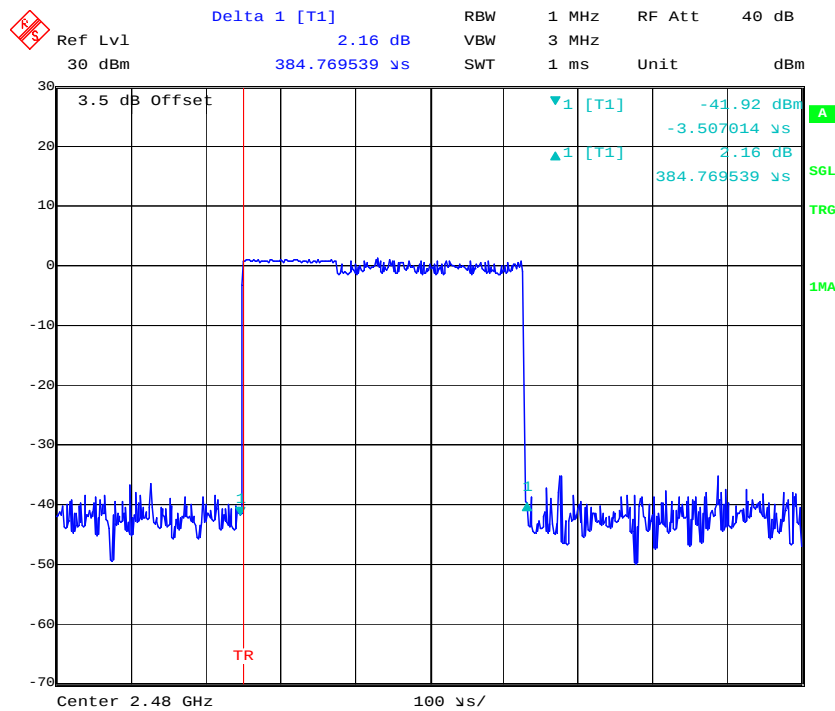


Date: 16.JUL.2016 14:07:04

Pulse time, Low Channel, 2DH3

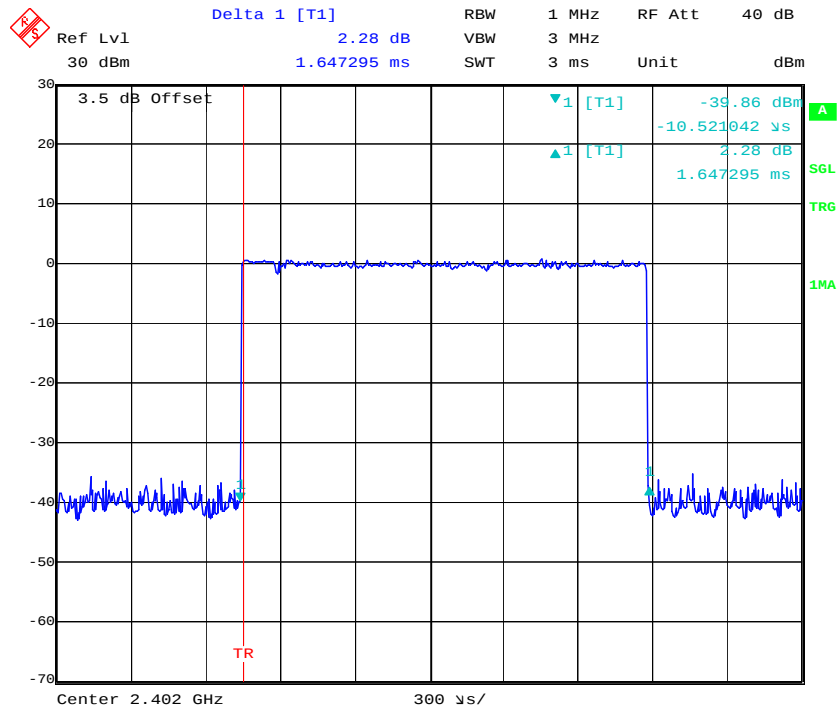


Date: 16.JUL.2016 14:07:44

Pulse time, Middle Channel, 2DH3

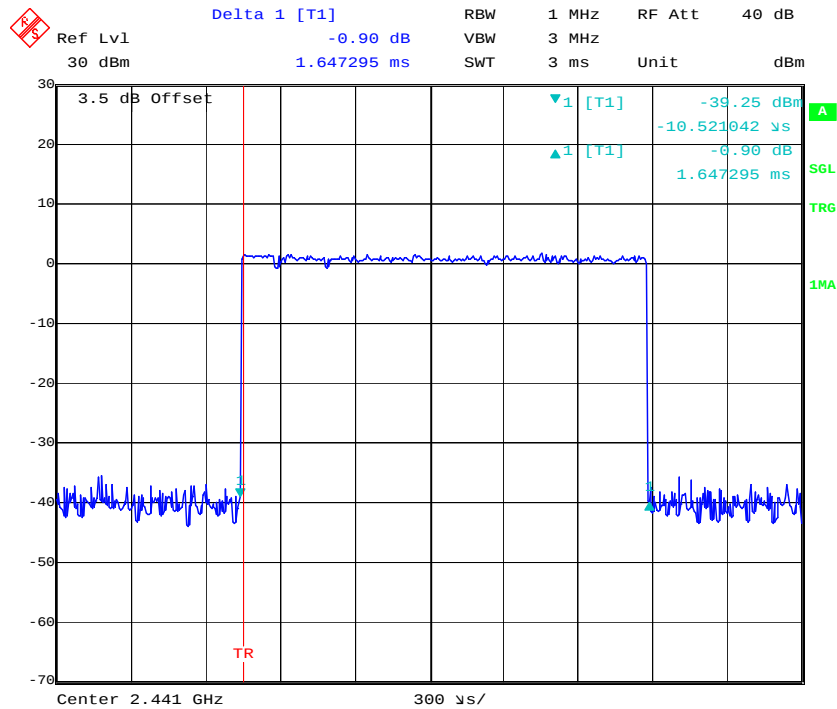


Date: 16.JUL.2016 14:07:54

Pulse time, High Channel, 2DH3

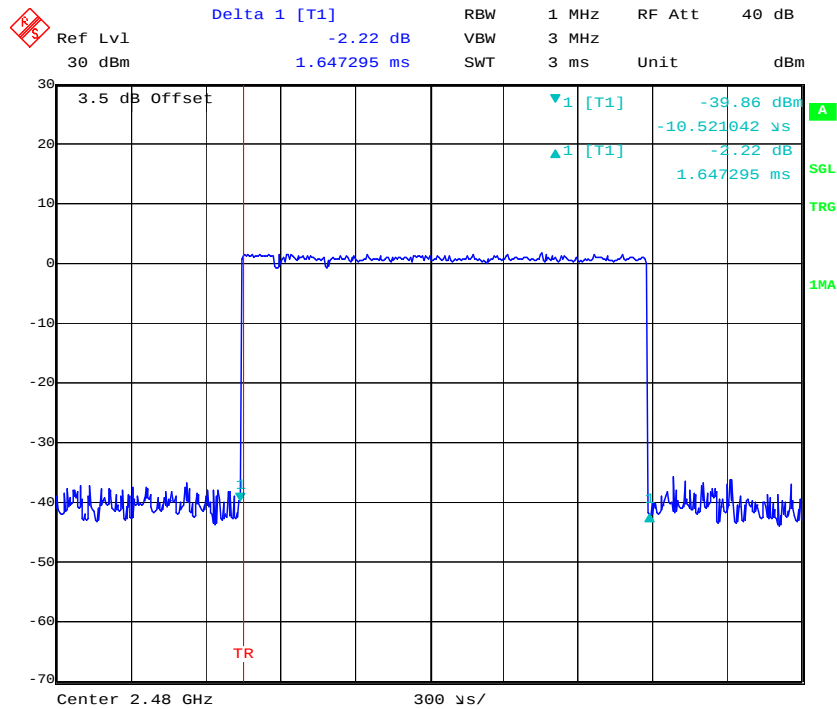

Date: 16.JUL.2016 14:08:04


Pulse time, Low Channel, 2DH5

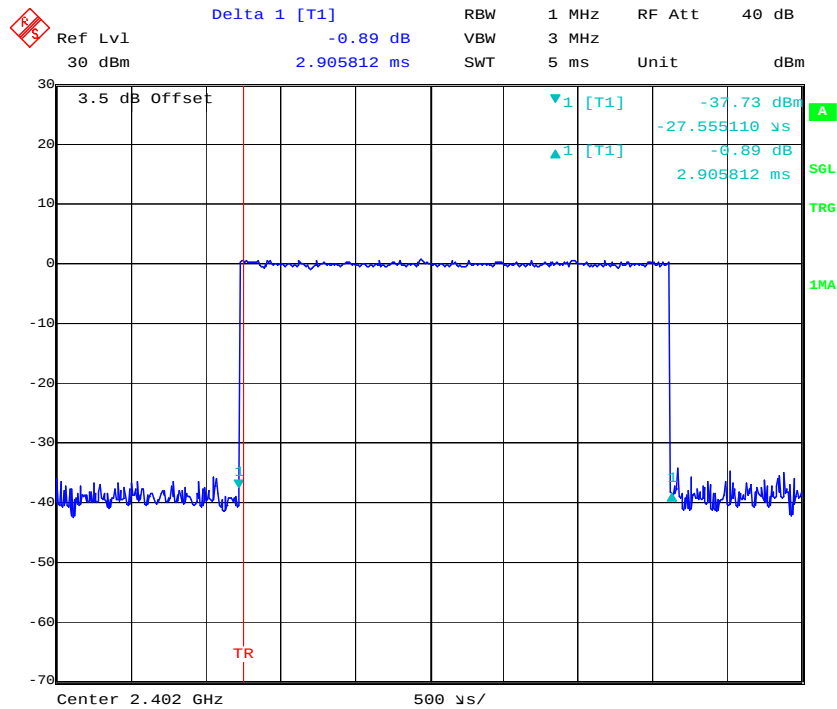

Date: 16.JUL.2016 14:14:41


Ref Lvl 30 dBm Delta 1 [T1] 2.79 dB RBW 1 MHz RF Att 40 dB
 3.5 dB Offset 2.905812 ms VBW 3 MHz Unit dBm
 3.5 dB Offset
 Delta 1 [T1]
 -35.32 dBm
 -27.555110 us
 2.79 dB
 2.905812 ms
 TR
 Center 2.441 GHz 500 us/

Pulse time, High Channel, 2DH5

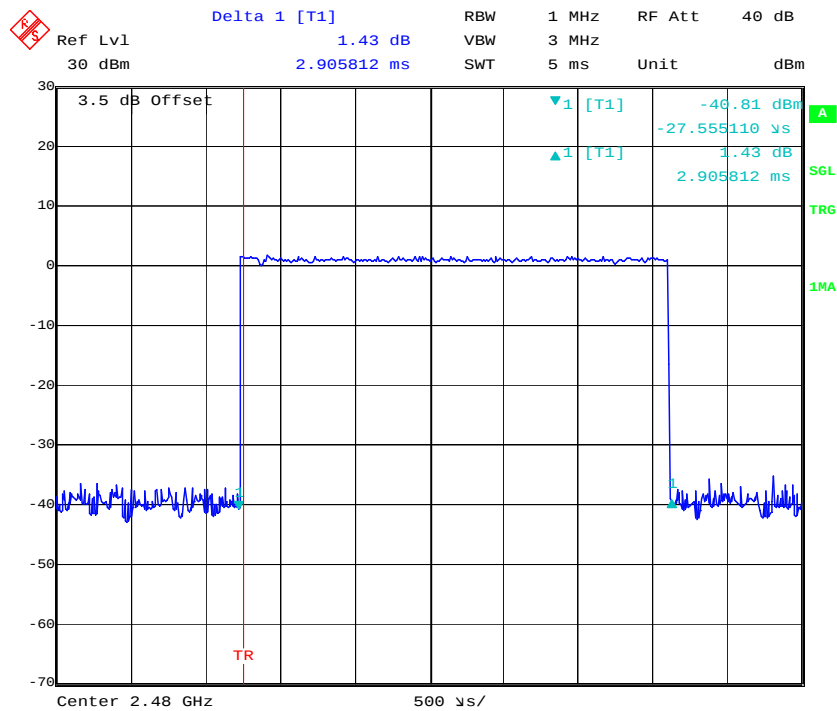


Date: 16.JUL.2016 14:16:32


EDR (8DPSK):
Pulse time, Low Channel, 3DH1

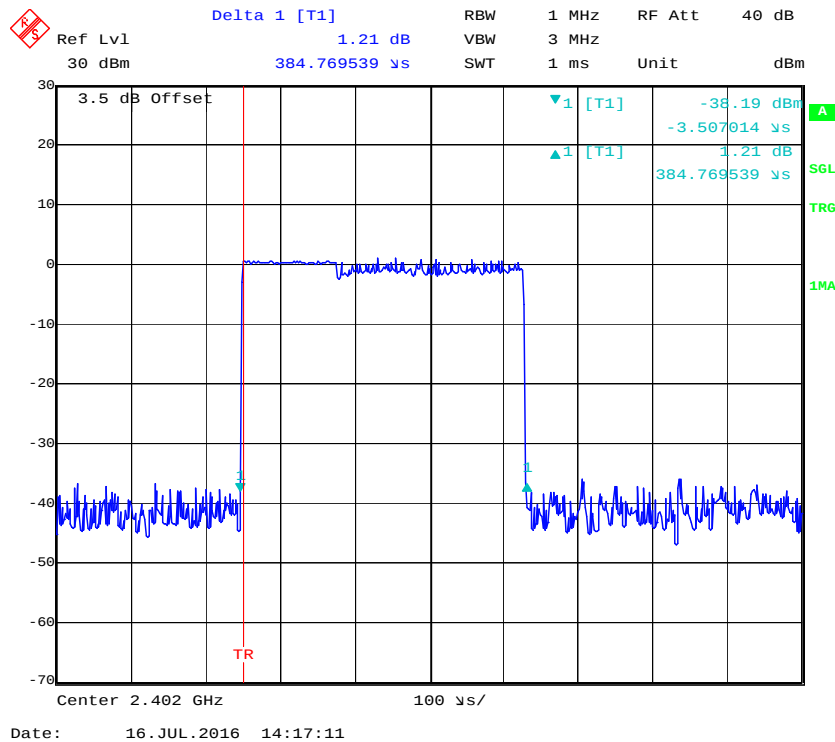


Pulse time, Middle Channel, 3DH1

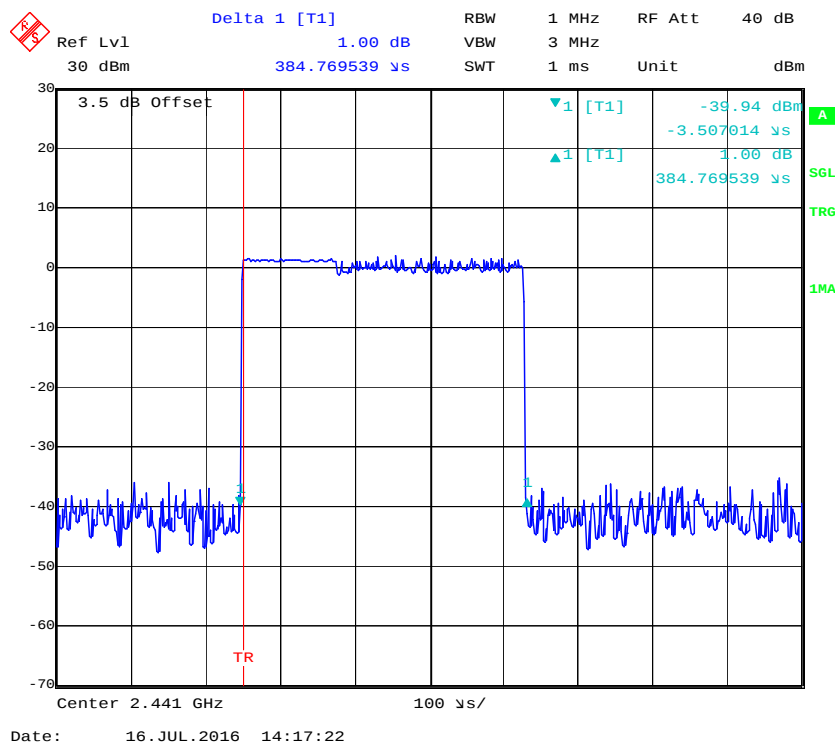


Pulse time, High Channel, 3DH1

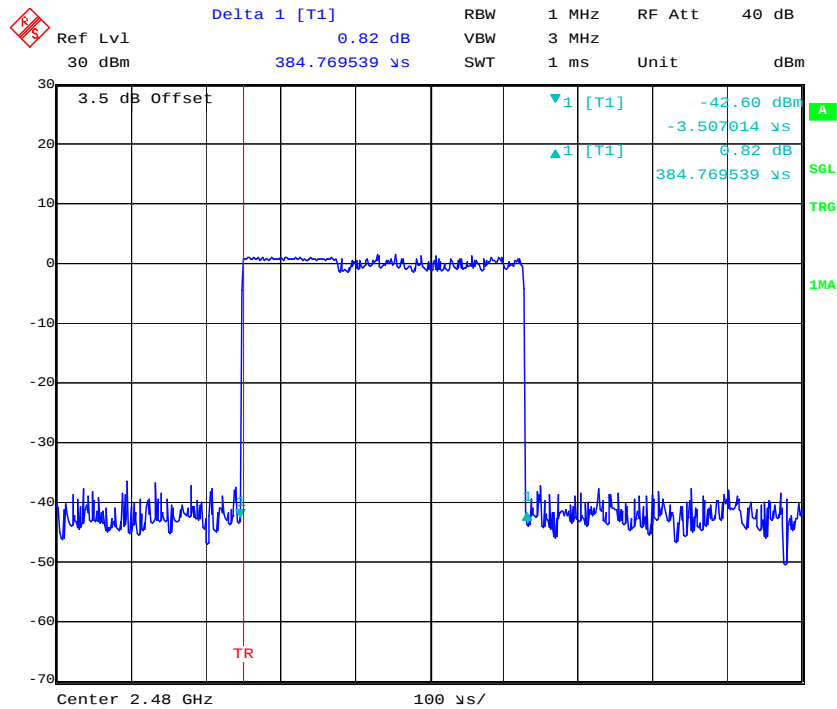

Pulse time, Low Channel, 3DH3

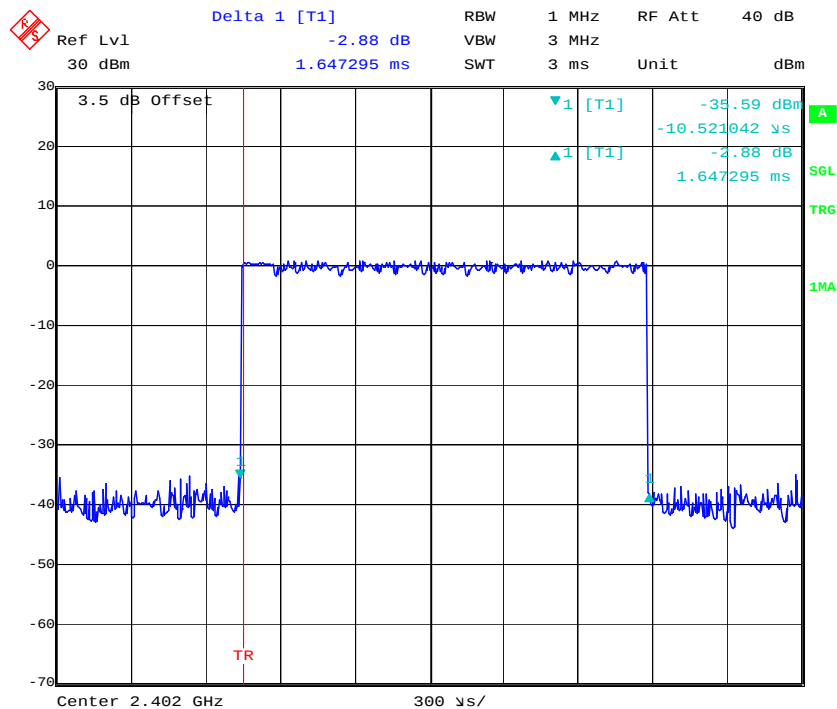


Pulse time, Middle Channel, 3DH3

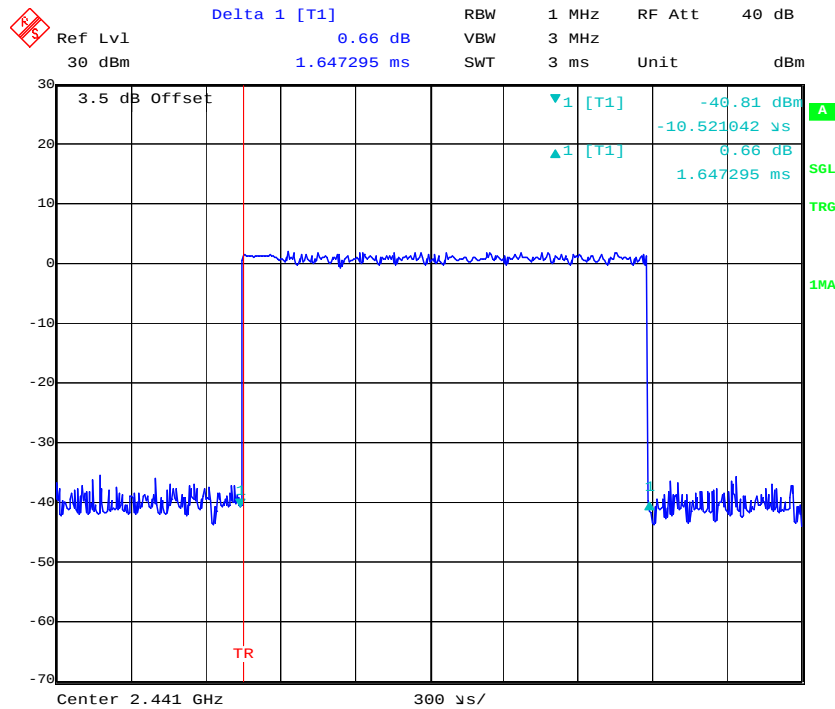


Date: 16.JUL.2016 14:19:42

Pulse time, High Channel, 3DH3

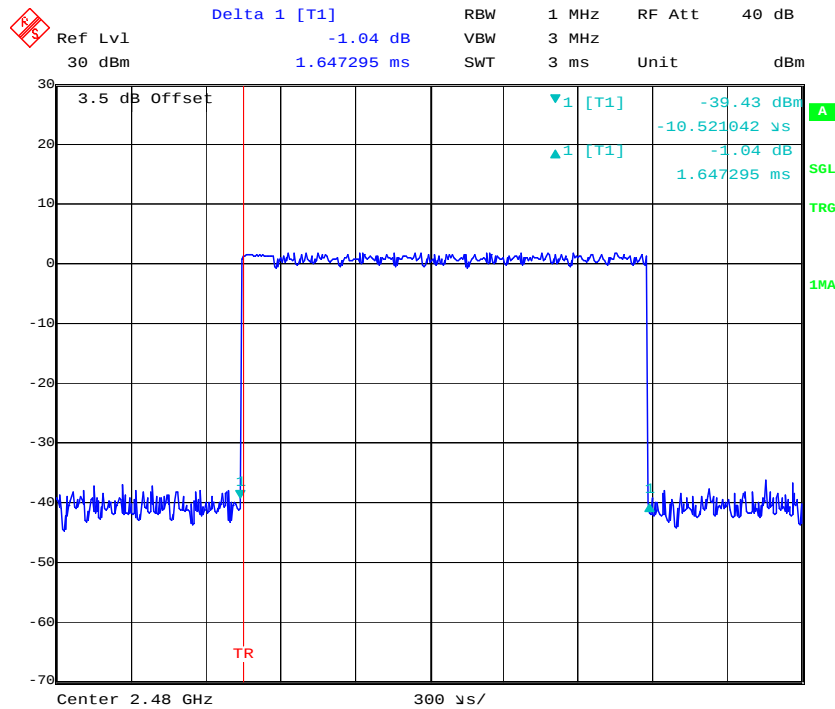


Date: 16.JUL.2016 14:19:52

Pulse time, Low Channel, 3DH5

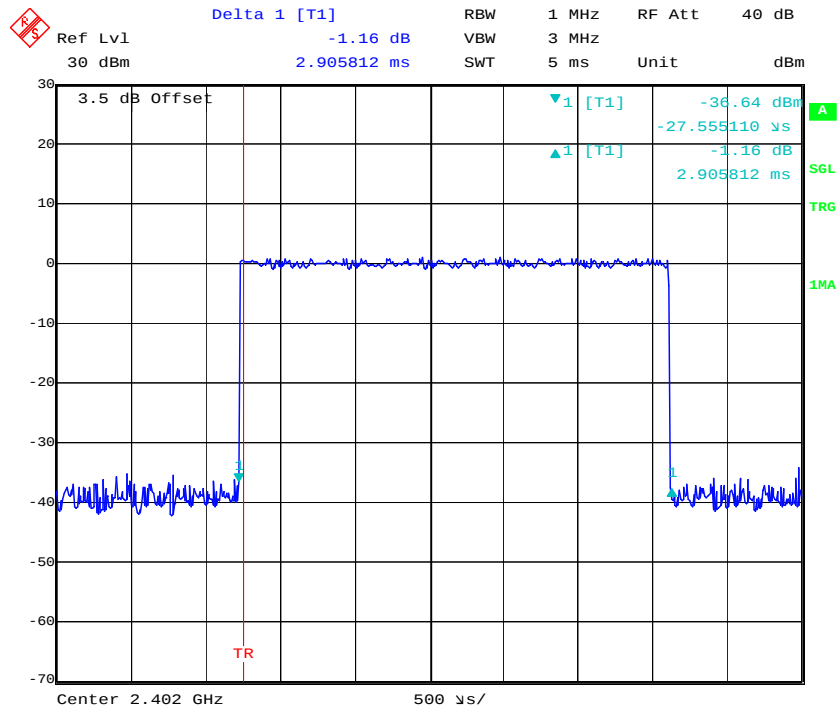


Date: 16.JUL.2016 14:20:30

Pulse time, Middle Channel, 3DH5

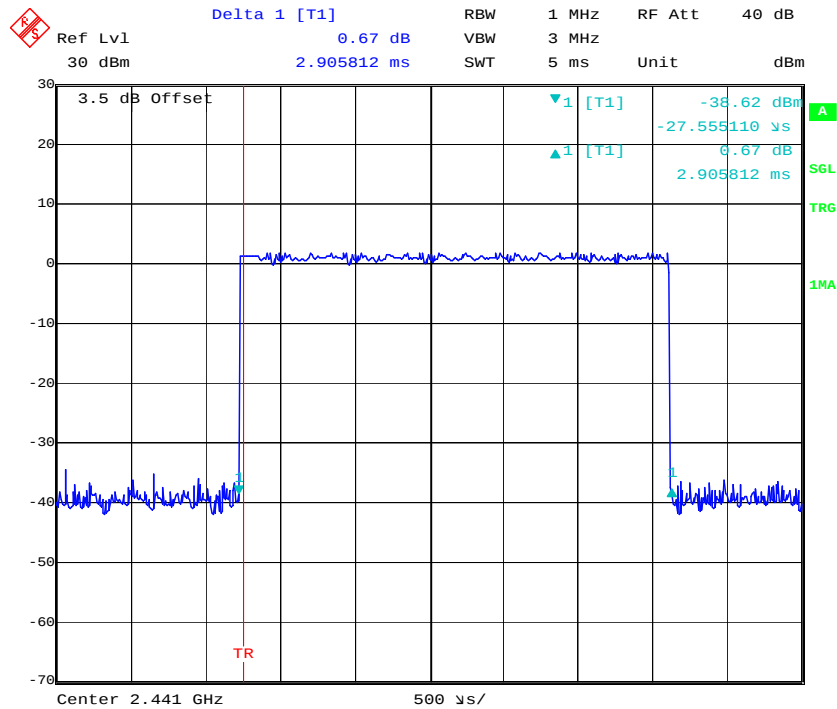

Date: 16.JUL.2016 14:20:40

Pulse time, High Channel, 3DH5

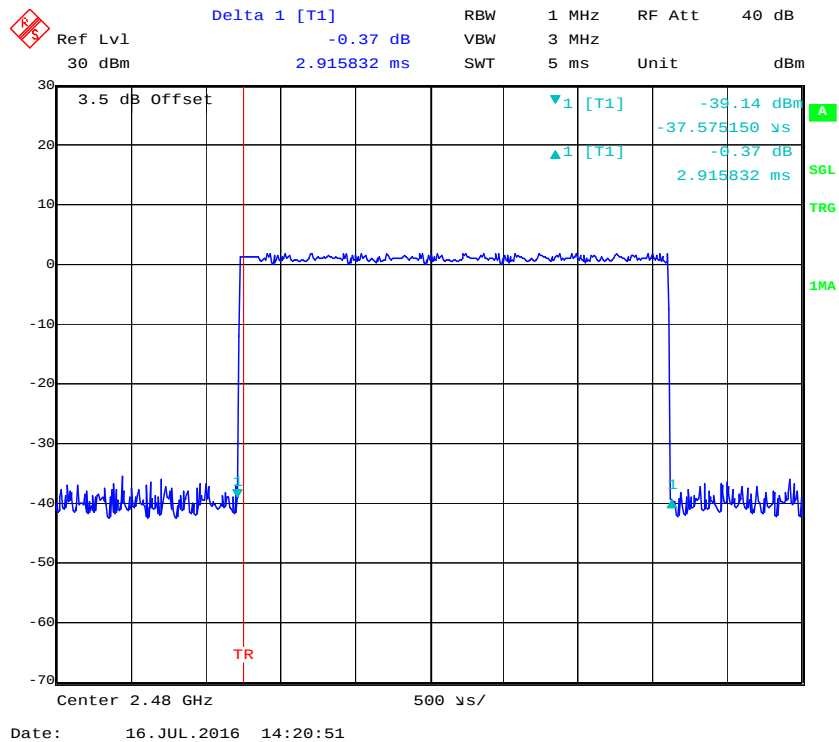

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Power Meter	N1912A	MY5000448	2015-12-18	2016-12-17
HP	Power Sensor	N1921A	MY54210016	2015-12-18	2016-12-17
Ducommun technologies	RF Cable	RG-214	3	2016-05-06	2017-05-06
WEINSCHEL	3dB Attenuator	5321	AU0709	2015-07-18	2016-07-18

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Kobe Li on 2016-07-16.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table.

Mode	Channel	Frequency (MHz)	Peak Output Power		Limit (dBm)
			(dBm)	(mW)	
BDR (GFSK)	Low	2402	1.04	1.271	30
	Middle	2441	2.07	1.611	30
	High	2480	2.07	1.611	30
EDR ($\pi/4$-DQPSK)	Low	2402	0.91	1.233	30
	Middle	2441	1.81	1.517	30
	High	2480	1.81	1.517	30
EDR (8DPSK)	Low	2402	1.04	1.271	30
	Middle	2441	1.94	1.563	30
	High	2480	1.94	1.563	30

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2016-04-14	2017-04-14
Ducommun technologies	RF Cable	RG-214	3	2016-05-06	2017-05-06
WEINSCHEL	3dB Attenuator	5321	AU0709	2015-07-18	2016-07-18

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Kobe Li on 2016-07-16.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following plots.

Ref Lvl 30 dBm

Marker 2 [T1] -39.17 dBm

RBW 100 kHz

VBW 300 kHz

SWT 5 ms

RF Att 40 dB

Unit dBm

3.5 dB Offset

1MAX

18.83 dBm

2 [T1] -39.17 dBm

2.39835671 GHz

1 [T1] 1.17 dBm

2.40183567 GHz

1

Center 2.4 GHz

800 kHz/

Span 8 MHz

Date: 16.JUL.2016 13:41:06

Ref Lvl 30 dBm

Marker 2 [T1] -39.83 dBm

RBW 100 kHz RF Att 40 dB

VBW 300 kHz

SWT 5 ms Unit dBm

3.5 dB Offset

1MAX

2 [T1] -39.83 dBm

2.48674048 GHz

2.15 dBm

2.48014729 GHz


Center 2.4835 GHz

1.4 MHz/


Span 14 MHz



Date: 16.JUL.2016 13:43:14

EDR ($\pi/4$ -DQPSK): Band Edge-Low

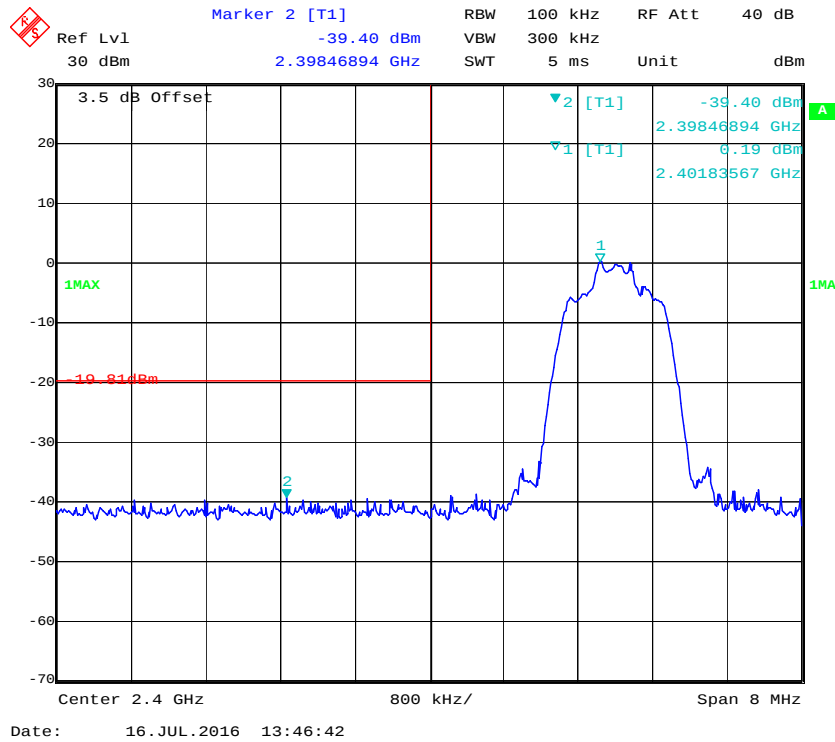

EDR ($\pi/4$ -DQPSK): Band Edge-High

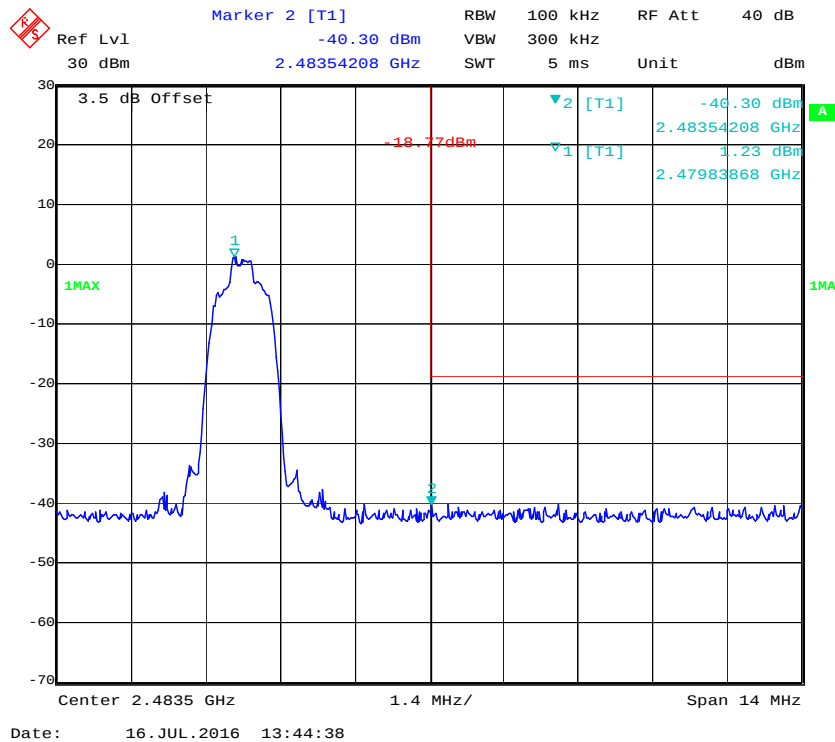

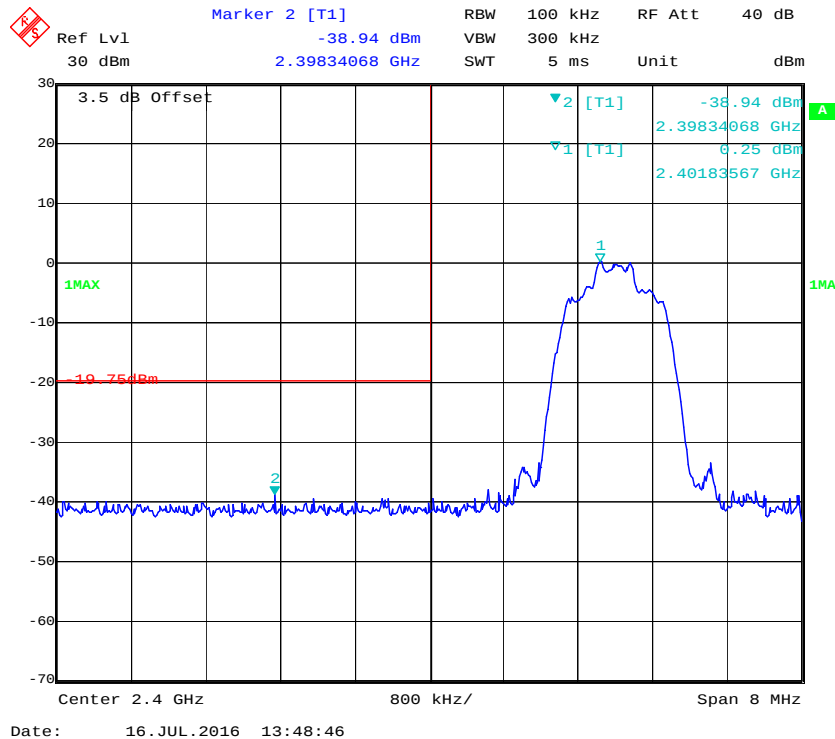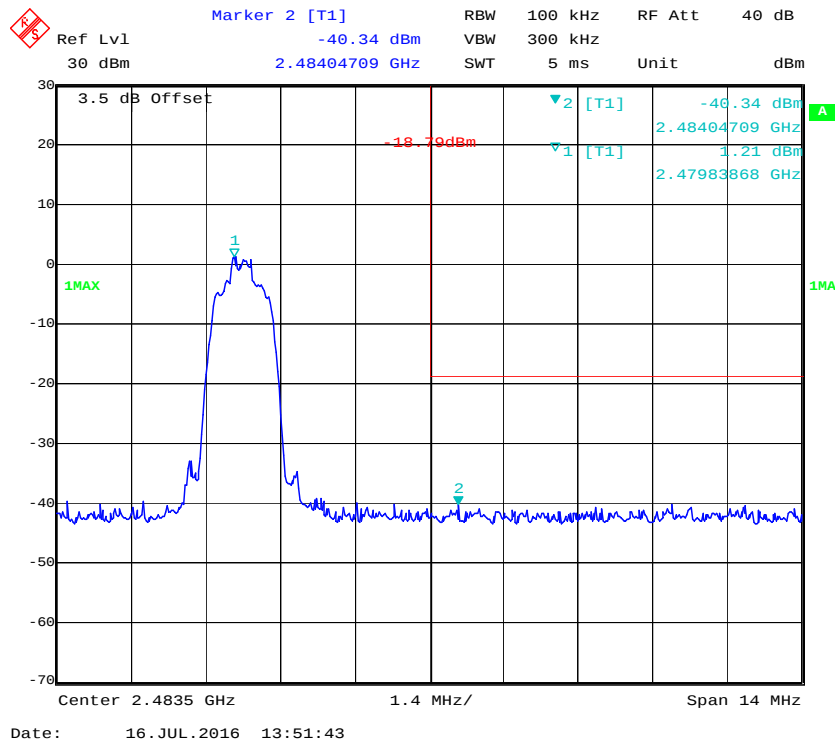EDR (8DPSK): Band Edge-Low**BDR (8DPSK): Band Edge-High********* END OF REPORT *******