



# FCC RADIO TEST REPORT

**FCC ID** : A4RG4QUR  
**Equipment** : Phone  
**Model Name** : G4QUR  
**Applicant** : Google LLC  
1600 Amphitheatre Parkway,  
Mountain View, California, 94043 USA  
**Standard** : FCC Part 15 Subpart C §15.225

The product was received on Nov. 29, 2024 and testing was performed from Dec. 27, 2024 to Feb. 12, 2025. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

**Sportun International Inc. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



## Table of Contents

<b>History of this test report.....</b>	<b>3</b>
<b>Summary of Test Result.....</b>	<b>4</b>
<b>1. General Description .....</b>	<b>5</b>
1.1    Product Feature of Equipment Under Test.....	5
1.2    Modification of EUT .....	5
1.3    Testing Location .....	6
1.4    Applicable Standards.....	6
<b>2. Test Configuration of Equipment Under Test.....</b>	<b>7</b>
2.1    Descriptions of Test Mode.....	7
2.2    Connection Diagram of Test System.....	8
2.3    Table for Supporting Units.....	9
2.4    EUT Operation Test Setup .....	9
<b>3. Test Results .....</b>	<b>10</b>
3.1    AC Power Line Conducted Emissions Measurement .....	10
3.2    20dB and 99% OBW Spectrum Bandwidth Measurement.....	12
3.3    Frequency Stability Measurement .....	13
3.4    Field Strength of Fundamental Emissions and Mask Measurement.....	14
3.5    Radiated Emissions Measurement .....	16
3.6    Antenna Requirements.....	19
<b>4. List of Measuring Equipment .....</b>	<b>20</b>
<b>5. Measurement Uncertainty.....</b>	<b>21</b>

### Appendix A. Test Results of Conducted Emission Test

### Appendix B. Test Results of Near Field Test Items

B1. Test Result of 20dB Spectrum Bandwidth

B2. Test Result of Frequency Stability

### Appendix C. Test Results of Radiated Test Items

C1. Test Result of Field Strength of Fundamental Emissions

C2. Results of Radiated Emissions (9 kHz~30MHz)

C3. Results of Radiated Emissions (30MHz~1GHz)

### Appendix D. Spot Check Evaluation on GTF7P, G3Y12

### Appendix E. Setup Photographs



## History of this test report



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.207	AC Power Line Conducted Emissions	Pass	13.16 dB under the limit at 0.18MHz
3.2	15.215(c)	20dB Spectrum Bandwidth	Pass	-
	2.1049	99% OBW Spectrum Bandwidth	Pass	-
3.3	15.225(e)	Frequency Stability	Pass	-
3.4	15.225(a)(b)(c)	Field Strength of Fundamental Emissions	Pass	Max level 23.16 dB $\mu$ V/m at 13.56 MHz
3.5	15.225(d) 15.209	Radiated Spurious Emissions	Pass	6.32 dB under the limit at 30.00MHz
3.6	15.203	Antenna Requirements	Pass	-

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by:** William Chen

**Report Producer:** Ming Chen



## 1. General Description

### 1.1 Product Feature of Equipment Under Test

Product Feature	
<b>General Specs</b> GSM/WCDMA/LTE/5G NR/NTN, Bluetooth, BLE, BLE channel sounding, Thread, Wi-Fi 802.11be, NFC, WPC Rx, UWB and GNSS Rx.	
<b>Antenna Type</b> NFC: Loop Antenna	

**Remark:** The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

EUT Information List	
S/N	Performed Test Item
4B181FDCH0004E	RF Near Field
4B201FDCH0000U	Conducted Emission
	Radiated Spurious Emission

### 1.2 Modification of EUT

No modifications made to the EUT during the testing.



### 1.3 Testing Location

<b>Test Site</b>	Sportun International Inc. EMC & Wireless Communications Laboratory		
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978		
<b>Test Site No.</b>	<b>Sportun Site No.</b>		
	TH03-HY	CO05-HY	03CH07-HY
<b>Test Engineer</b>	Eric Wu	Tom Lee	Jesse Wan and Stan Hsieh
<b>Temperature</b>	18.9~20.9 °C	23~26°C	19.3~20.2°C
<b>Relative Humidity</b>	50.0~52.0 %	45~55%	58.7~60.3%

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190

### 1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.225
- FCC KDB 414788 D01 Radiated Test Site v01r01
- ANSI C63.10-2013

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



## 2. Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

Investigation has been done on all the possible configurations.

The following table is a list of the test modes shown in this test report.

Test Items	
AC Power Line Conducted Emissions	Field Strength of Fundamental Emissions
20dB Spectrum Bandwidth	Frequency Stability
Radiated Emissions 9kHz~30MHz	Radiated Emissions 30MHz~1GHz


The EUT pre-scanned with app “adb” installed in the notebook (enable continuous transmission with type A/B/F/V tag respectively) and reader mode with NFC tag (four NFC type A, B, F, V). Both with and without tag modes are verified. Based on the highest field strength of fundamental and spurious emissions, the worst case type (type F) with tag was recorded in this report.

The measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), Accessory (Adapter or Earphone) and three receiving antenna orientations (parallel, perpendicular, and ground-parallel) for Loop Antenna, and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find Z Plane with Adapter as worst plane.


Test Cases	
AC Conducted Emission	Mode 1: GSM Idle + WLAN Idle + Bluetooth Idle + NFC Read + USB Cable 2 (Charging from AC Adapter 1)
<b>Remark:</b> For Radiated Test Cases, the tests were performed with AC Adapter 1 and USB Cable 2	

## 2.2 Connection Diagram of Test System

### <AC Conducted Emission Mode>

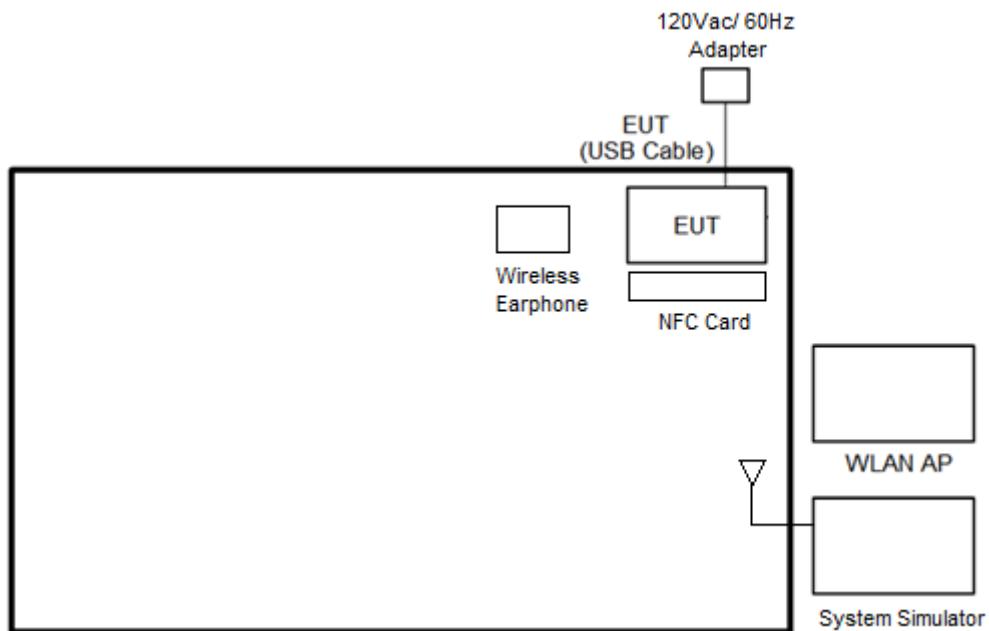

### <NFC Tx with Adapter Mode>

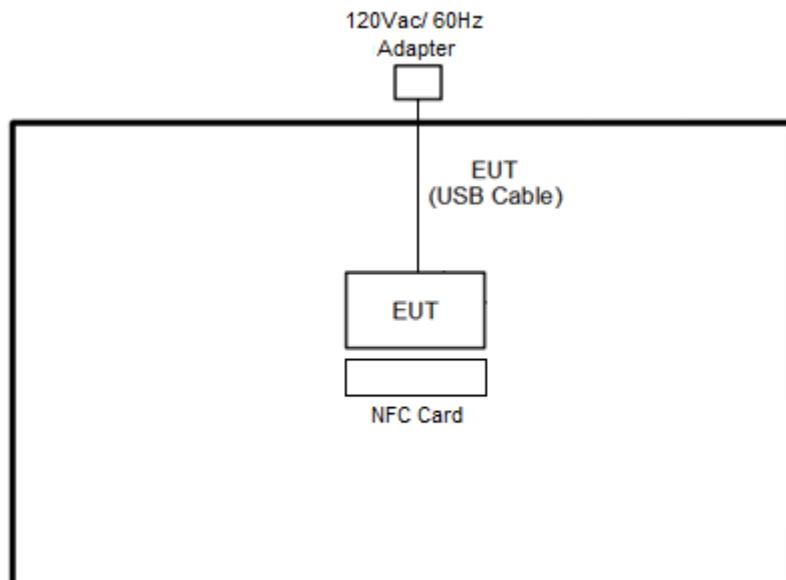



## 2.3 Table for Supporting Units

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	WLAN AP	ASUS	RT-AC66U	N/A	Unshielded, 1.8 m
3.	NFC Card	SAINOSIM	N/A	N/A	N/A	N/A
4.	NFC Card	N/A	N/A	N/A	N/A	N/A
5.	Wireless Earphone	N/A	G1007/G1008	A4RG1007/ A4RG1008	N/A	N/A
6.	AC Adapter	N/A	G9BR1	N/A	N/A	N/A

## 2.4 EUT Operation Test Setup

The EUT is programmed to be in continuously transmitting mode.

The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmitting signal (Power Level: Default) at 13.56MHz.

The RF test items, utility “adb” is installed in Notebook which is programmed in order to make the EUT get into the engineering modes to provide channel selection, power level (Power setting: Default), data rate (Type F Bit Rate: 424kbps) and the application type and for continuous transmitting signals.



### 3. Test Results

#### 3.1 AC Power Line Conducted Emissions Measurement

##### 3.1.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

For terminal test result, the testing follows FCC KDB 174176.


##### 3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

##### 3.1.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.1.4 Test setup

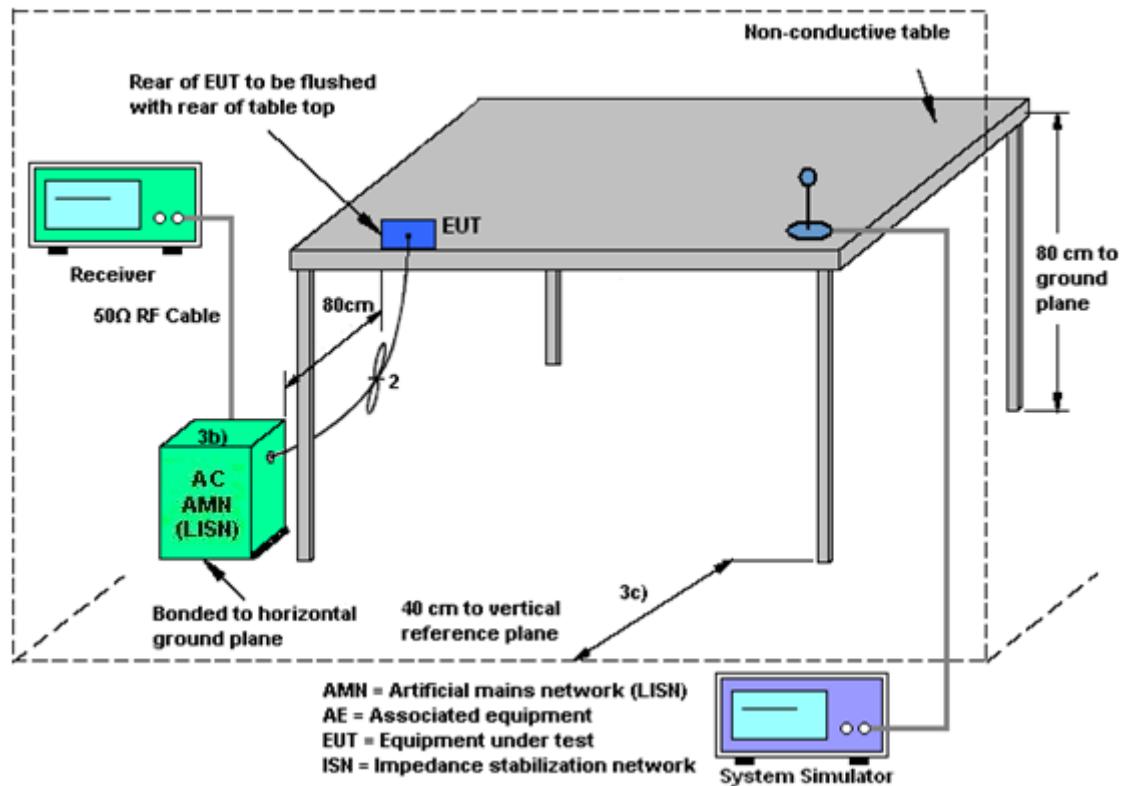

### 3.1.5 Test Result of AC Conducted Emission

Please refer to Appendix A.

**Note:**

(1) with antenna

Remark: 13.560MHz is the NFC RF fundamental signal.

(2) with dummy load

Remark: Only the fundamental NFC signal needs to be retested.



## 3.2 20dB and 99% OBW Spectrum Bandwidth Measurement

### 3.2.1 Limit

Intentional radiators must be designed to ensure that the 20 dB and 99% emission bandwidth in the specific band 13.553~13.567 MHz.


### 3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.2.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max Hold Mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
3. Measured the spectrum width with power higher than 20 dB below carrier.
4. Measured the 99% OBW.

### 3.2.4 Test Setup

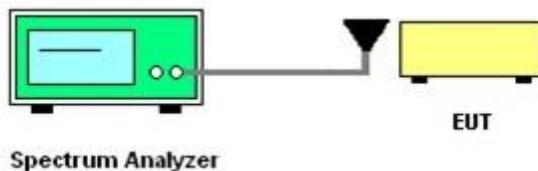

### 3.2.5 Test Result of Near Field Test Items

Please refer to Appendix B.

### 3.3 Frequency Stability Measurement

#### 3.3.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed by using a new battery.


#### 3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.3.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT.
2. EUT has transmitted signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
5. The fc is declaring of channel frequency. Then the frequency error formula is  $(fc-f)/fc \times 10^6$  ppm and the limit is less than +/-100ppm.
6. Extreme temperature rule is -20°C~50°C.

#### 3.3.4 Test Setup

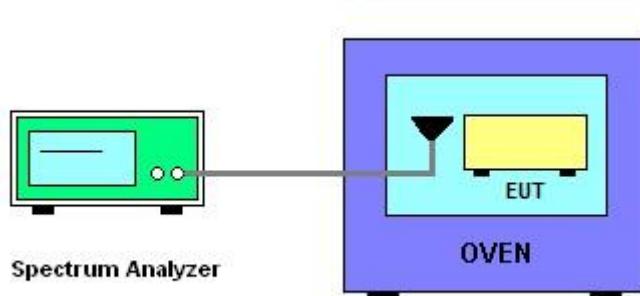

#### 3.3.5 Test Result of Near Field Test Items

Please refer to Appendix B.



### 3.4 Field Strength of Fundamental Emissions and Mask Measurement

#### 3.4.1 Limit

Rules and specifications	FCC CFR 47 Part 15 section 15.225			
Description	Compliance with the spectrum mask is tested with RBW set to 9kHz.			
Freq. of Emission (MHz)	Field Strength ( $\mu$ V/m) at 30m	Field Strength (dB $\mu$ V/m) at 30m	Field Strength (dB $\mu$ V/m) at 10m	Field Strength (dB $\mu$ V/m) at 3m
1.705~13.110	30	29.5	48.58	69.5
13.110~13.410	106	40.5	59.58	80.5
13.410~13.553	334	50.5	69.58	90.5
13.553~13.567	15848	84.0	103.08	124.0
13.567~13.710	334	50.5	69.58	90.5
13.710~14.010	106	40.5	59.58	80.5
14.010~30.000	30	29.5	48.58	69.5

**Remark:**

1. The field strength test result is in 3m test distance, follow test rules the test data use distance extrapolation factor and reported in this report at 30m test result.
2. Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB)

#### 3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


### 3.4.3 Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT is placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower is placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable is rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna is fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested with RBW set to 9 kHz.

Note: Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m).

### 3.4.4 Test Setup

#### For radiated test below 30MHz

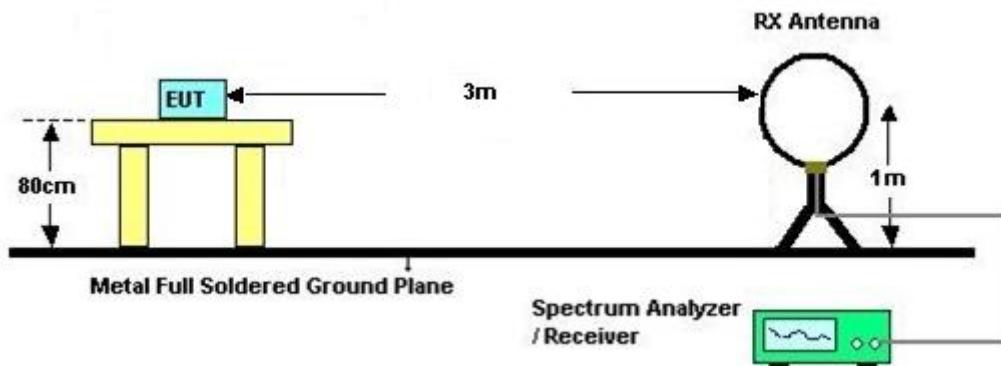

### 3.4.5 Test Result of Field Strength of Fundamental Emissions and Mask

Please refer to Appendix C.



### 3.5 Radiated Emissions Measurement

#### 3.5.1 Limit

The field strength of any emissions which appear outside of 13.110 ~14.010MHz band shall not exceed the general radiated emissions limits.

Frequencies (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.5.3 Measuring Instrument Setting

The following table is the setting of receiver:

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

**Note:** The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz and 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.




### 3.5.4 Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT is placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower is placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable is rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna is varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower is scanned (from 1 M to 4 M) and then the turntable is rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
7. In case the emission is lower than 30 MHz, loop antenna has to be used for measurement and the recorded data shall be QP measured by receiver.
8. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.

### 3.5.5 Test Setup

For radiated test below 30MHz

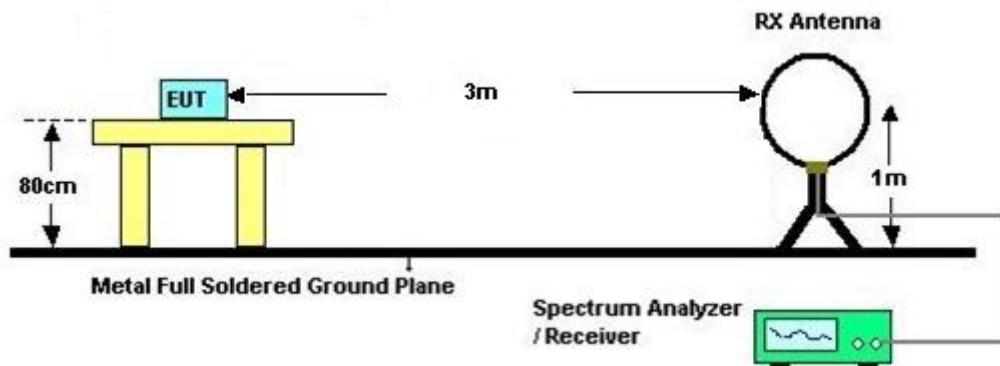

For radiated test above 30MHz

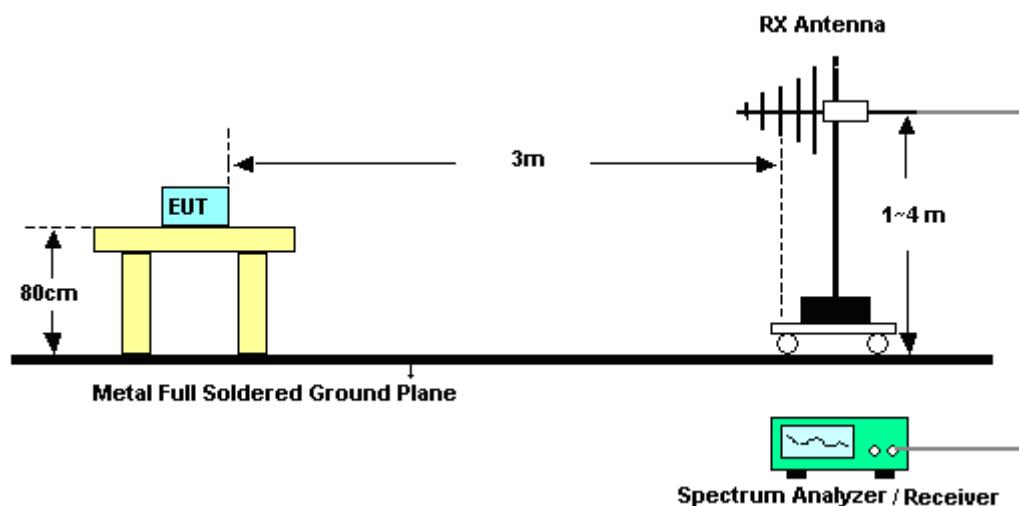

### 3.5.6 Test Result of Radiated Emissions Measurement

Please refer to Appendix C.

**Remark:**

1. There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.
2. After pre-scan three receiving antenna orientations parallel (horizontal), perpendicular (vertical), and ground-parallel for Loop Antenna, the worst case is receiving antenna parallel.



## 3.6 Antenna Requirements

### 3.6.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### 3.6.2 Antenna Anti-Replacement Construction

- b) Unique (non-standard) antenna connector.
- (3) Use of a standard connector is also allowed if the connector is within the transmitter enclosure and can only be accessed by disassembly of the transmitter, where such disassembly is not normally required. The user manual must not show that user has access to the connector.



## 4. List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jan. 07, 2025~Jan. 17, 2025	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 10, 2024	Jan. 07, 2025~Jan. 17, 2025	Dec. 09, 2025	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Oct. 14, 2024	Jan. 07, 2025~Jan. 17, 2025	Oct. 13, 2025	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 14, 2024	Jan. 07, 2025~Jan. 17, 2025	Nov. 13, 2025	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Jan. 07, 2025~Jan. 17, 2025	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	00691	N/A	Jul. 30, 2024	Jan. 07, 2025~Jan. 17, 2025	Jul. 29, 2025	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	MQT2408250 1	N/A	Oct. 15, 2024	Jan. 07, 2025~Jan. 17, 2025	Oct. 14, 2025	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100472	20Hz~26.5GHz	Feb. 01, 2024	Dec. 27, 2024	Jan. 31, 2025	Radiation (03CH07-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	35419 & 03	30MHz~1GHz	Apr. 22, 2024	Dec. 27, 2024	Apr. 21, 2025	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Feb. 23, 2024	Dec. 27, 2024	Feb. 22, 2025	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Oct. 01, 2024	Dec. 27, 2024	Sep. 30, 2025	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4 MY15682/4	30MHz to 18GHz	Feb. 21, 2024	Dec. 27, 2024	Feb. 20, 2025	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4	9kHz to 30MHz	Feb. 21, 2024	Dec. 27, 2024	Feb. 20, 2025	Radiation (03CH07-HY)
Controller	EMEC	EM1000	N/A	Control Ant Mast	N/A	Dec. 27, 2024	N/A	Radiation (03CH07-HY)
Controller	MF	MF-7802	N/A	Control Turn table	N/A	Dec. 27, 2024	N/A	Radiation (03CH07-HY)
Antenna Mast	EMEC	AM-BS-4500E	N/A	Boresight mast 1M~4M	N/A	Dec. 27, 2024	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Dec. 27, 2024	N/A	Radiation (03CH07-HY)
Software	Audix	E3	N/A	N/A	N/A	Dec. 27, 2024	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPTEL	TR-32	HE17XB2495	N/A	Mar. 01, 2024	Dec. 27, 2024	Feb. 28, 2025	Radiation (03CH07-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Sep. 25, 2024	Feb. 12, 2025	Sep. 24, 2025	Near Field (TH03-HY)
DC Power Supply	GW Instek	GPE-2323	GEU871221	0V~64V ; 0A~6A	Apr. 09, 2024	Feb. 12, 2025	Apr. 08, 2025	Near Field (TH03-HY)
Temperature & Humidity Cabinet Chamber	ESPEC	SH-641	92013720	-40°C~90°C	Sep. 06, 2024	Feb. 12, 2025	Sep. 05, 2025	Near Field (TH03-HY)
Hygrometer	TECPTEL	DTM-303B	TP200886	N/A	Mar. 14, 2024	Feb. 12, 2025	Mar. 13, 2025	Near Field (TH03-HY)



## 5. Measurement Uncertainty

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_{C(y)}$ )	3.7 dB
---	--------

### Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_{C(y)}$ )	3.8 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)


Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_{C(y)}$ )	6.2 dB
---	--------



## **Appendix A. Test Results of Conducted Emission Test**

**<Original>**


Report NO : 4N0917  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

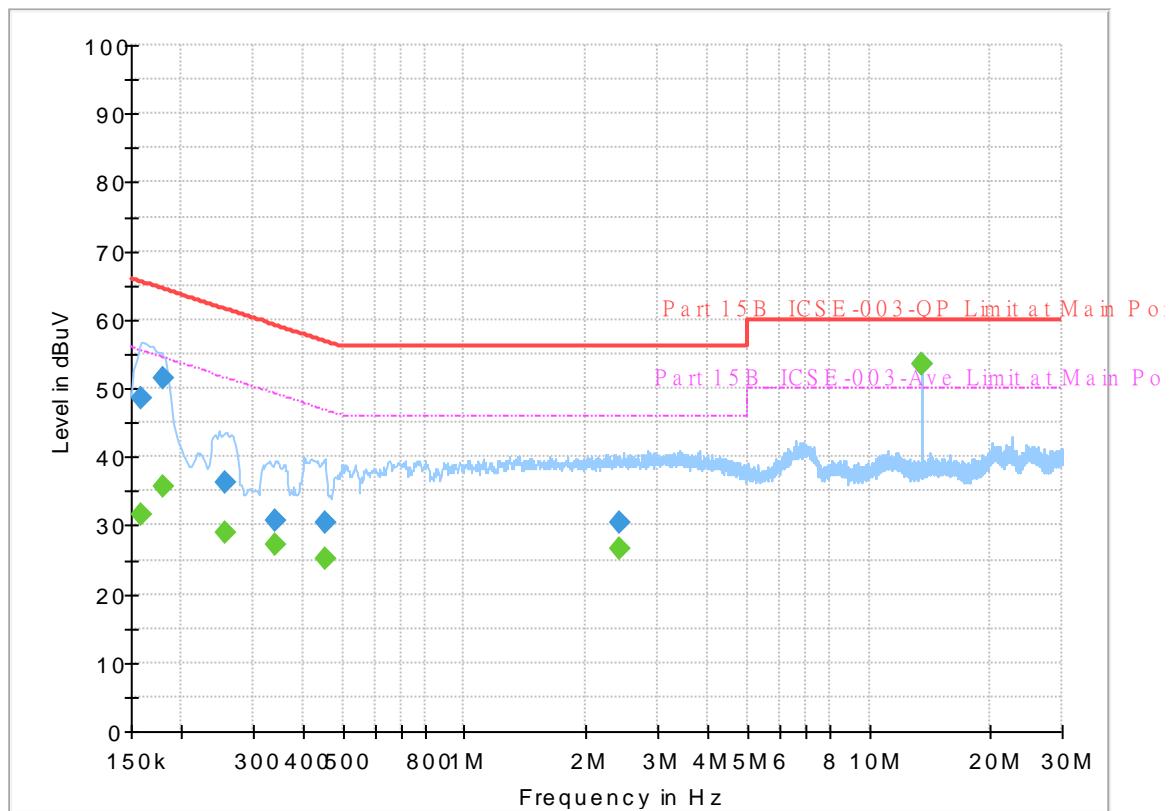**Full Spectrum****Final Result**

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.159000	---	31.62	55.52	23.90	L1	OFF	19.8
0.159000	48.64	---	65.52	16.88	L1	OFF	19.8
0.179250	---	35.57	54.52	18.95	L1	OFF	19.8
0.179250	51.36	---	64.52	13.16	L1	OFF	19.8
0.255750	---	28.88	51.57	22.69	L1	OFF	19.8
0.255750	36.31	---	61.57	25.26	L1	OFF	19.8
0.341250	---	27.22	49.17	21.95	L1	OFF	19.8
0.341250	30.73	---	59.17	28.44	L1	OFF	19.8
0.451500	---	25.19	46.85	21.66	L1	OFF	19.8
0.451500	30.54	---	56.85	26.31	L1	OFF	19.8
2.420250	---	26.58	46.00	19.42	L1	OFF	19.9
2.420250	30.44	---	56.00	25.56	L1	OFF	19.9
13.560000	---	53.65	50.00	-3.65	L1	OFF	20.5
13.560000	53.65	---	60.00	6.35	L1	OFF	20.5

Report NO : 4N0917  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

## Full Spectrum

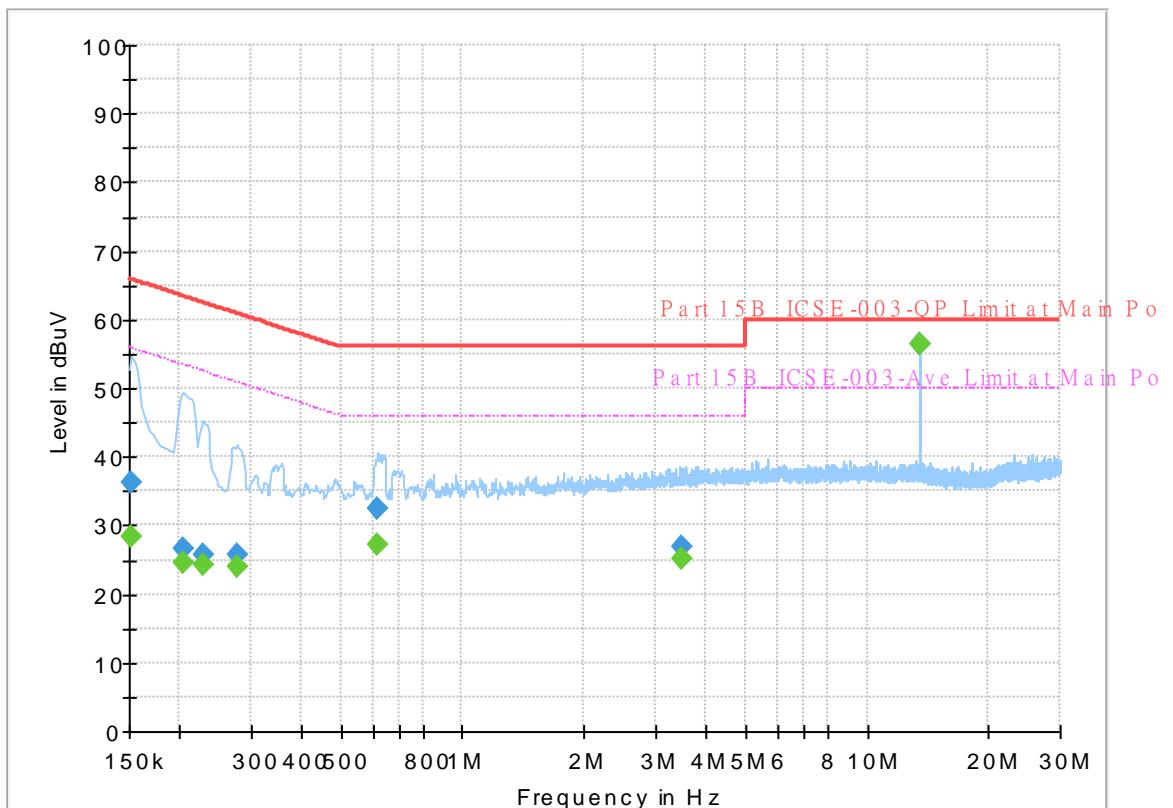


## Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	28.41	55.88	27.47	N	OFF	19.8
0.152250	36.40	---	65.88	29.48	N	OFF	19.8
0.204000	---	24.59	53.45	28.86	N	OFF	19.8
0.204000	26.71	---	63.45	36.74	N	OFF	19.8
0.228750	---	24.22	52.50	28.28	N	OFF	19.8
0.228750	25.76	---	62.50	36.74	N	OFF	19.8
0.278250	---	23.90	50.87	26.97	N	OFF	19.8
0.278250	25.71	---	60.87	35.16	N	OFF	19.8
0.618000	---	27.25	46.00	18.75	N	OFF	19.8
0.618000	32.59	---	56.00	23.41	N	OFF	19.8
3.471000	---	25.13	46.00	20.87	N	OFF	19.9
3.471000	26.98	---	56.00	29.02	N	OFF	19.9
13.560000	---	56.35	50.00	-6.35	N	OFF	20.5
13.560000	56.30	---	60.00	3.70	N	OFF	20.5

**<Terminal>**

Report NO : 4N0917  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line  
 Test Date : 2025/01/17


Full Spectrum

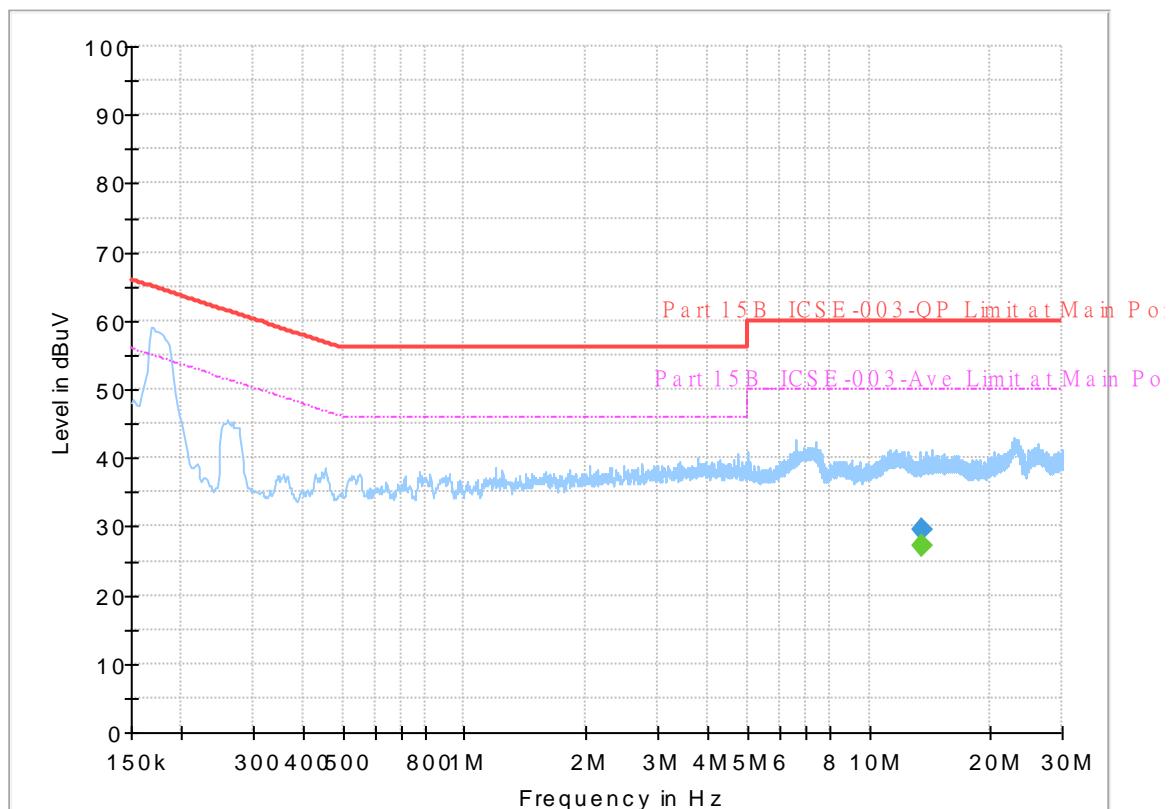**Final Result**

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
13.560000	---	27.08	50.00	22.92	L1	OFF	20.5
13.560000	29.65	---	60.00	30.35	L1	OFF	20.5

Report NO : 4N0917  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral  
 Test Date : 2025/01/17

Full Spectrum


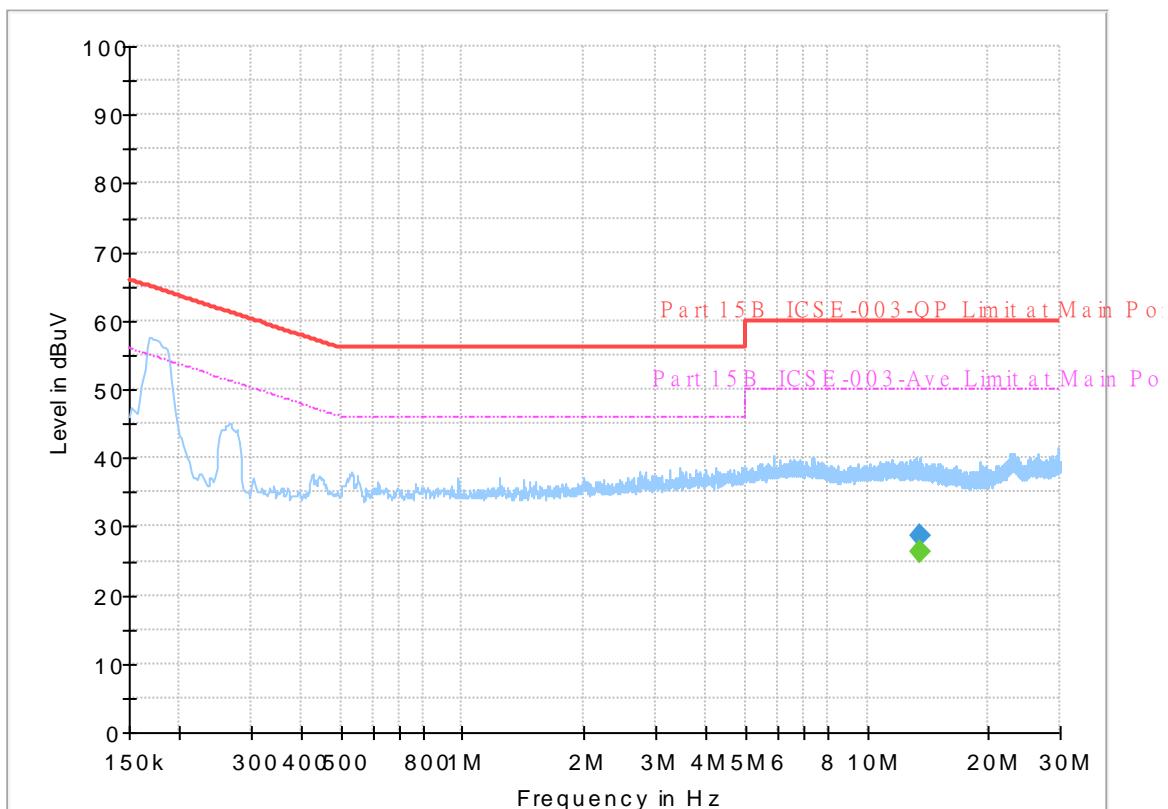


## Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
13.560000	---	26.38	50.00	23.62	N	OFF	20.5
13.560000	28.60	---	60.00	31.40	N	OFF	20.5

## Appendix B. Test Results of Near Field Test Items

### B1. Test Result of 20dB Spectrum Bandwidth

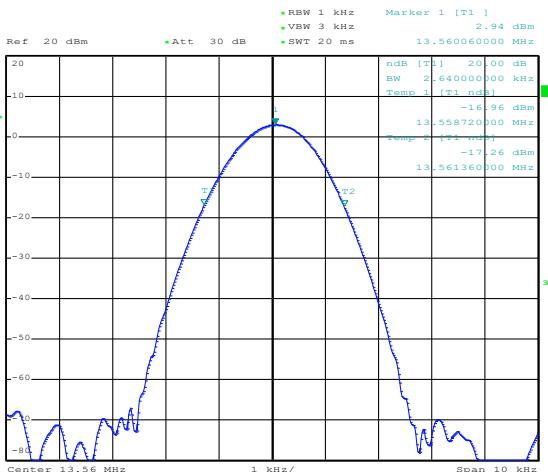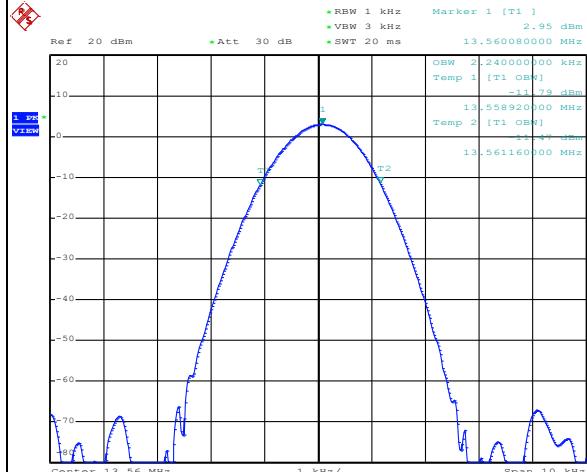Test mode	NFC Tx	Test Frequency (MHz)	13.56
	 <p>RBW 1 kHz VBW 3 kHz SWT 20 ms Ref 20 dBm Att 30 dB</p> <p>Marker 1 [T1] 2.94 dBm 13.560060000 MHz</p> <p>ndB [T1] 20.00 dB BW 2.640000000 kHz Temp 1 [T1 (dBm)] -16.96 dBm 13.558720000 MHz Temp 2 [T1 (dBm)] -17.26 dBm 13.561360000 MHz</p> <p>3dB</p>		
	 <p>RBW 1 kHz VBW 3 kHz SWT 20 ms Ref 20 dBm Att 30 dB</p> <p>Marker 1 [T1] 2.95 dBm 13.560080000 MHz</p> <p>OBW 2.240000000 kHz Temp 1 [T1 (dBm)] -11.79 dBm 13.558920000 MHz Temp 2 [T1 (dBm)] -14.79 dBm 13.561160000 MHz</p> <p>3dB</p>		
20dB Bandwidth (kHz)	2.640	99% OccupiedBW(kHz)	2.240
Frequency range (MHz)	$f_L > 13.553$	13.55892	Test Result
	$f_H < 13.567$	13.56116	Complies

**Remark:** Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

**B2. Test Result of Frequency Stability**

Voltage vs. Frequency Stability		Temperature vs. Frequency Stability		
Voltage (Vdc)	Measurement Frequency (MHz)	Temperature (°C)	Time (min)	Measurement Frequency (MHz)
3.9	13.560040	-20	0	13.560140
3.6	13.560020		2	13.560140
4.5	13.560040		5	13.560130
			10	13.560120
		-10	0	13.560140
			2	13.560140
			5	13.560140
			10	13.560140
		0	0	13.560120
			2	13.560120
			5	13.560130
			10	13.560130
		10	0	13.560100
			2	13.560100
			5	13.560100
			10	13.560100
		20	0	13.560080
			2	13.560070
			5	13.560070
			10	13.560070
		30	0	13.560040
			2	13.560040
			5	13.560040
			10	13.560040
		40	0	13.560020
			2	13.560020
			5	13.560020
			10	13.560020




Voltage vs. Frequency Stability		Temperature vs. Frequency Stability		
Voltage (Vdc)	Measurement Frequency (MHz)	Temperature (°C)	Time (min)	Measurement Frequency (MHz)
		50	0	13.560010
			2	13.560010
			5	13.560000
			10	13.560020
Max.Deviation (MHz)	0.000040	Max.Deviation (MHz)		0.000140
Max.Deviation (ppm)	2.9499	Max.Deviation (ppm)		10.3245
Limit	FS < ±100 ppm	Limit		FS < ±100 ppm
Test Result	PASS	Test Result		PASS



## Appendix C. Test Results of Radiated Test Items

### C1. Test Result of Field Strength of Fundamental Emissions

Test Mode :	NFC Tx with Adapter	Test Frequency (MHz)	13.56							
			Date: 2024-12-27							
Site : 03CH07-HY Condition : 15.225 3m LOOP_AN(H)_100315 HORIZONTAL										
Frequency ( MHz )	Level ( dB $\mu$ V/m )	Distance extrapolation Factor ( dB )	Margin ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
13.56	23.16	40	-60.84	84	41.85	21	0.31	100	298	QP

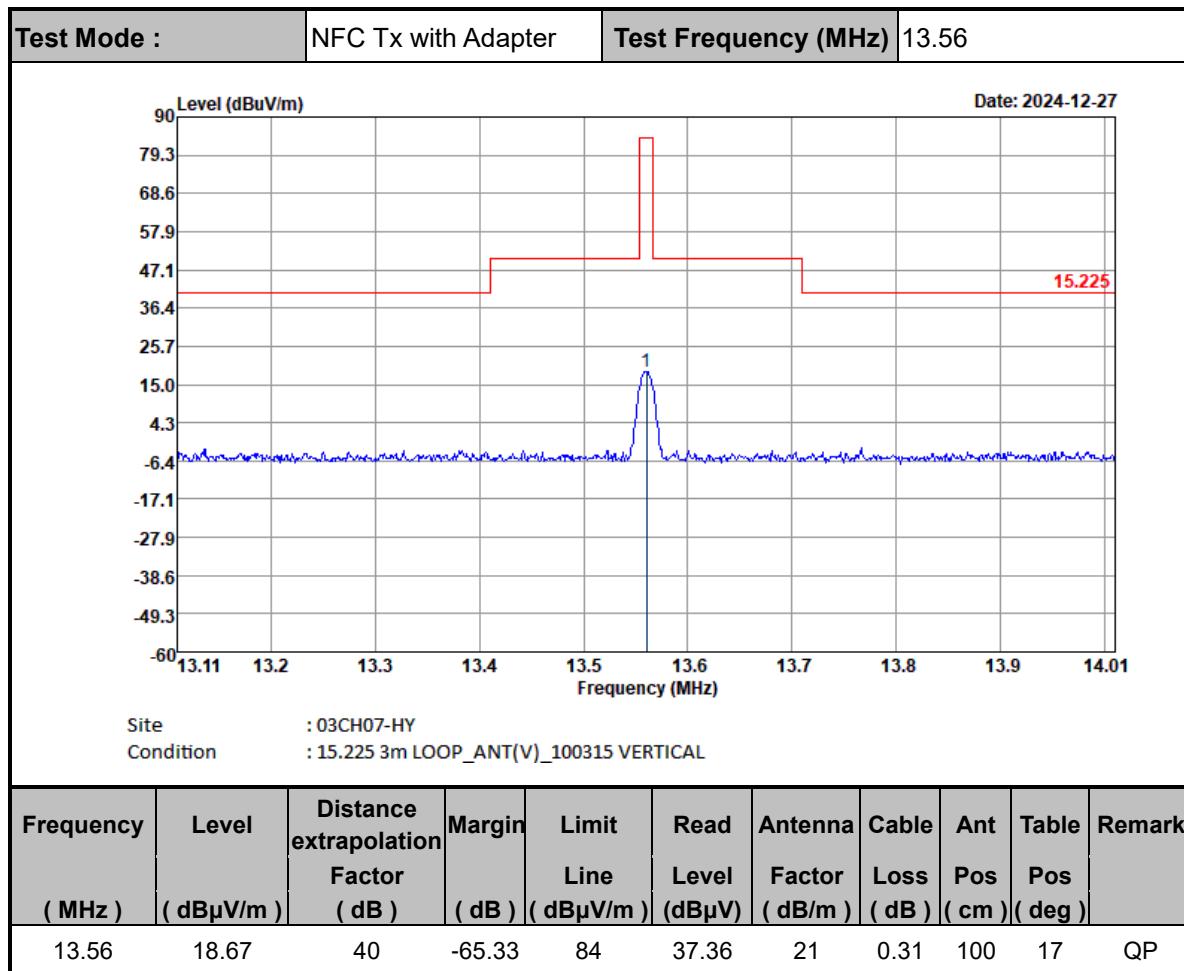
**Note :**

1. Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB)
2. Level = Antenna Factor + Cable Loss + Read Level - Distance extrapolation factor.



## C2. Results of Radiated Spurious Emissions (9 kHz~30MHz)

Test Mode :		NFC Tx with Adapter		Polarization :				Horizontal			
Site : 03CH07-HY Condition : 15.209 LIMIT LINE 3m LOOP_AN(H)_100315 HORIZONTAL											
Frequency ( MHz )	Level ( dB $\mu$ V/m )	Distance extrapolation Factor ( dB )	Margin ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark	
0.01915	-13.07	80	-55.03	41.96	47.05	19.87	0.01	-	-	Average	
0.06717	-35.52	80	-66.58	31.06	25.87	18.6	0.01	-	-	Average	
0.09356	-43.81	80	-71.99	28.18	18.02	18.16	0.01	-	-	QP	
0.12452	-45.99	80	-71.69	25.7	15.75	18.25	0.01	-	-	Average	
0.1636	-38.3	80	-61.63	23.33	23.21	18.48	0.01	-	-	Average	
1.632	-5.83	40	-29.18	23.35	15.37	18.71	0.09	-	-	QP	
10.536	-2.92	40	-32.42	29.5	15.86	20.96	0.26	-	-	QP	
13.56	23.16	40	-6.34	29.5	41.85	21	0.31	-	-	QP	
24.928	-1.37	40	-30.87	29.5	14.66	23.52	0.45	-	-	QP	
29.135	-1.07	40	-30.57	29.5	14.82	23.15	0.96	-	-	QP	

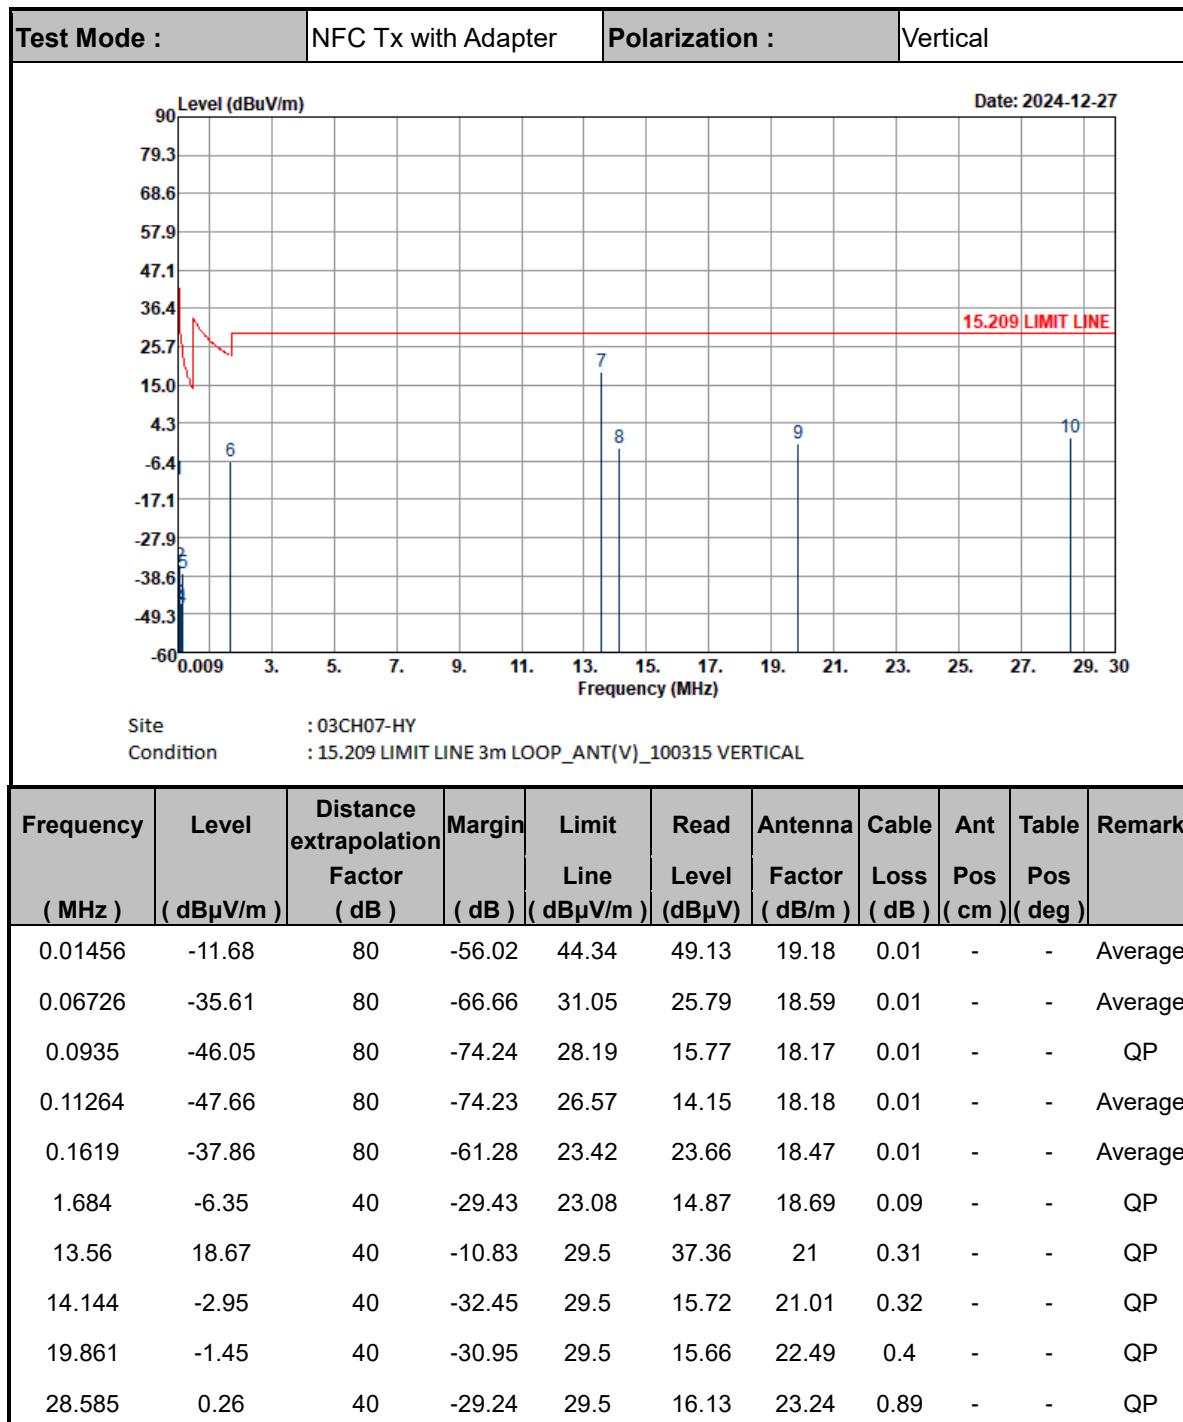
**Note :**

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB)
3. Level = Antenna Factor + Cable Loss + Read Level - Distance extrapolation factor.
4. 13.56 MHz is fundamental signal which can be ignored



## C3. Results of Radiated Spurious Emissions (30MHz~1GHz)

Test Mode :	NFC Tx with Adapter		Polarization :		Horizontal																																																																																																				
Level (dBuV/m)						Date: 2024-12-27																																																																																																			
Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(6)_H HORIZONTAL Project : 4N0917 Mode : 1																																																																																																									
<table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th rowspan="2">Level</th> <th>Over</th> <th>Limit</th> <th>Read</th> <th>Antenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>51.06</td> <td>26.35</td> <td>-13.65</td> <td>40.00</td> <td>40.89</td> <td>14.02</td> <td>1.38</td> <td>29.94</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>219.81</td> <td>28.74</td> <td>-17.26</td> <td>46.00</td> <td>40.62</td> <td>15.22</td> <td>2.73</td> <td>29.83</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>285.42</td> <td>34.30</td> <td>-11.70</td> <td>46.00</td> <td>42.20</td> <td>18.84</td> <td>3.09</td> <td>29.83</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>767.60</td> <td>29.99</td> <td>-16.01</td> <td>46.00</td> <td>27.40</td> <td>27.05</td> <td>4.92</td> <td>29.38</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>843.20</td> <td>31.80</td> <td>-14.20</td> <td>46.00</td> <td>27.72</td> <td>27.95</td> <td>5.20</td> <td>29.07</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>959.40</td> <td>33.28</td> <td>-12.72</td> <td>46.00</td> <td>26.64</td> <td>29.74</td> <td>5.43</td> <td>28.53</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>						Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark	Line	Limit	Level	Factor	Loss	Factor	cm	deg	51.06	26.35	-13.65	40.00	40.89	14.02	1.38	29.94	---	---	Peak	219.81	28.74	-17.26	46.00	40.62	15.22	2.73	29.83	---	---	Peak	285.42	34.30	-11.70	46.00	42.20	18.84	3.09	29.83	---	---	Peak	767.60	29.99	-16.01	46.00	27.40	27.05	4.92	29.38	---	---	Peak	843.20	31.80	-14.20	46.00	27.72	27.95	5.20	29.07	---	---	Peak	959.40	33.28	-12.72	46.00	26.64	29.74	5.43	28.53	---	---	Peak															
Freq	Level	Over	Limit	Read	Antenna			Cable	Preamp	A/Pos	T/Pos	Remark																																																																																													
		Line	Limit	Level	Factor	Loss	Factor	cm	deg																																																																																																
51.06	26.35	-13.65	40.00	40.89	14.02	1.38	29.94	---	---	Peak																																																																																															
219.81	28.74	-17.26	46.00	40.62	15.22	2.73	29.83	---	---	Peak																																																																																															
285.42	34.30	-11.70	46.00	42.20	18.84	3.09	29.83	---	---	Peak																																																																																															
767.60	29.99	-16.01	46.00	27.40	27.05	4.92	29.38	---	---	Peak																																																																																															
843.20	31.80	-14.20	46.00	27.72	27.95	5.20	29.07	---	---	Peak																																																																																															
959.40	33.28	-12.72	46.00	26.64	29.74	5.43	28.53	---	---	Peak																																																																																															
<table border="1"> <thead> <tr> <th>Frequency</th> <th>Level</th> <th>Margin</th> <th>Limit</th> <th>Read</th> <th>Antenna</th> <th>Cable</th> <th>Preamp</th> <th>Ant</th> <th>Table</th> <th>Remark</th> </tr> <tr> <th>( MHz )</th> <th>( dB<math>\mu</math>V/m )</th> <th>( dB )</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Cable</th> <th>Factor</th> <th>Pos</th> <th>Pos</th> <th></th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th>( dB<math>\mu</math>V )</th> <th>( dB<math>\mu</math>V )</th> <th>( dB/m )</th> <th>( dB )</th> <th>( cm )</th> <th>( deg )</th> <th></th> </tr> </thead> <tbody> <tr> <td>51.06</td> <td>26.35</td> <td>-13.65</td> <td>40</td> <td>40.89</td> <td>14.02</td> <td>1.38</td> <td>29.94</td> <td>-</td> <td>-</td> <td>Peak</td> </tr> <tr> <td>219.81</td> <td>28.74</td> <td>-17.26</td> <td>46</td> <td>40.62</td> <td>15.22</td> <td>2.73</td> <td>29.83</td> <td>-</td> <td>-</td> <td>Peak</td> </tr> <tr> <td>285.42</td> <td>34.3</td> <td>-11.7</td> <td>46</td> <td>42.2</td> <td>18.84</td> <td>3.09</td> <td>29.83</td> <td>-</td> <td>-</td> <td>Peak</td> </tr> <tr> <td>767.6</td> <td>29.99</td> <td>-16.01</td> <td>46</td> <td>27.4</td> <td>27.05</td> <td>4.92</td> <td>29.38</td> <td>-</td> <td>-</td> <td>Peak</td> </tr> <tr> <td>843.2</td> <td>31.8</td> <td>-14.2</td> <td>46</td> <td>27.72</td> <td>27.95</td> <td>5.2</td> <td>29.07</td> <td>-</td> <td>-</td> <td>Peak</td> </tr> <tr> <td>959.4</td> <td>33.28</td> <td>-12.72</td> <td>46</td> <td>26.64</td> <td>29.74</td> <td>5.43</td> <td>28.53</td> <td>-</td> <td>-</td> <td>Peak</td> </tr> </tbody> </table>							Frequency	Level	Margin	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark	( MHz )	( dB $\mu$ V/m )	( dB )	Line	Level	Factor	Cable	Factor	Pos	Pos						( dB $\mu$ V )	( dB $\mu$ V )	( dB/m )	( dB )	( cm )	( deg )		51.06	26.35	-13.65	40	40.89	14.02	1.38	29.94	-	-	Peak	219.81	28.74	-17.26	46	40.62	15.22	2.73	29.83	-	-	Peak	285.42	34.3	-11.7	46	42.2	18.84	3.09	29.83	-	-	Peak	767.6	29.99	-16.01	46	27.4	27.05	4.92	29.38	-	-	Peak	843.2	31.8	-14.2	46	27.72	27.95	5.2	29.07	-	-	Peak	959.4	33.28	-12.72	46	26.64	29.74	5.43	28.53	-	-	Peak
Frequency	Level	Margin	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark																																																																																															
( MHz )	( dB $\mu$ V/m )	( dB )	Line	Level	Factor	Cable	Factor	Pos	Pos																																																																																																
				( dB $\mu$ V )	( dB $\mu$ V )	( dB/m )	( dB )	( cm )	( deg )																																																																																																
51.06	26.35	-13.65	40	40.89	14.02	1.38	29.94	-	-	Peak																																																																																															
219.81	28.74	-17.26	46	40.62	15.22	2.73	29.83	-	-	Peak																																																																																															
285.42	34.3	-11.7	46	42.2	18.84	3.09	29.83	-	-	Peak																																																																																															
767.6	29.99	-16.01	46	27.4	27.05	4.92	29.38	-	-	Peak																																																																																															
843.2	31.8	-14.2	46	27.72	27.95	5.2	29.07	-	-	Peak																																																																																															
959.4	33.28	-12.72	46	26.64	29.74	5.43	28.53	-	-	Peak																																																																																															

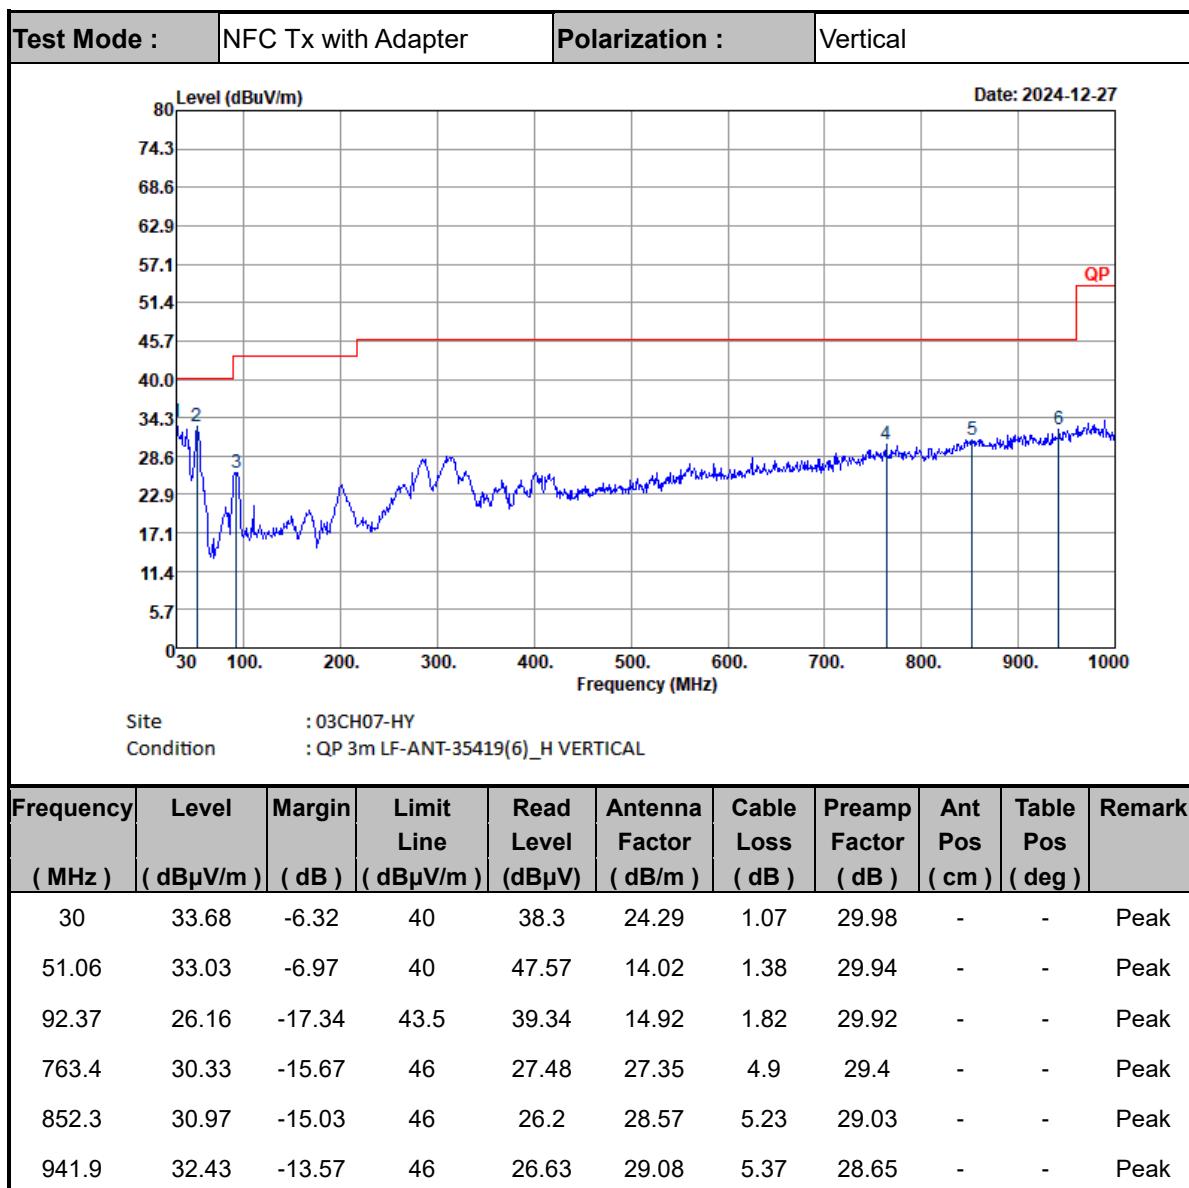**Note:**

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.
4. The emission position marked as “-” means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.

—————THE END—————