



FCC RADIO TEST REPORT

FCC ID : A4RGXQ96
Equipment : Phone
Model Name : GXQ96
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, California, 94043 USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on May 21, 2024 and testing was performed from May 28, 2024 to Aug. 17, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 Test Result.....	12
3.1 Number of Channel Measurement	12
3.2 Hopping Channel Separation Measurement	13
3.3 Dwell Time Measurement.....	14
3.4 20dB and 99% Bandwidth Measurement	15
3.5 Output Power Measurement.....	16
3.6 Conducted Band Edges Measurement.....	17
3.7 Conducted Spurious Emission Measurement	18
3.8 Radiated Band Edges and Spurious Emission Measurement	19
3.9 AC Conducted Emission Measurement.....	23
3.10 Antenna Requirements.....	25
4 List of Measuring Equipment	26
5 Measurement Uncertainty	28
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR451606K	01	Initial issue of report	Sep. 27, 2024

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(1)	Number of Channels	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	Pass	-
3.4	2.1049	99% Occupied Bandwidth	Pass	-
3.5	15.247(b)(1) 15.247(b)(4)	Peak Output Power	Pass	-
3.6	15.247(d)	Conducted Band Edges	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	7.95 dB under the limit at 41.64 MHz
3.9	15.207	AC Conducted Emission	Pass	13.04 dB under the limit at 0.17 MHz
3.10	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: William Chen
Report Producer: Rebecca Wu



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs GSM/WCDMA/LTE/5G NR, Bluetooth, BLE, BLE channel sounding, Wi-Fi 802.11ax, NFC, WPC Rx and GNSS.
Antenna Type Bluetooth: <Ant. 4>: IFA Antenna <Ant. 3>: IFA Antenna

EUT Information List	
S/N	Performed Test Item
44291JEBF05085	RF Conducted Measurement
46181JEBF10909	Radiated Spurious Emission
44291JEBF05116	Conducted Emission

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	Ant.3: 0.8 Ant.4: -4.4

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. CO05-HY (TAF Code: 1190)
Remark	The AC Conducted Emission test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, 03CH16-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2404-2478 MHz	2	2404	32	2434	59	2461
	3	2405	33	2435	60	2462
	4	2406	34	2436	61	2463
	5	2407	35	2437	62	2464
	6	2408	36	2438	63	2465
	7	2409	37	2439	64	2466
	8	2410	38	2440	65	2467
	9	2411	39	2441	66	2468
	10	2412	40	2442	67	2469
	11	2413	41	2443	68	2470
	12	2414	42	2444	69	2471
	13	2415	43	2445	70	2472
	14	2416	44	2446	71	2473
	15	2417	45	2447	72	2474
	16	2418	46	2448	73	2475
	17	2419	47	2449	74	2476
	18	2420	48	2450	75	2477
	19	2421	49	2451	76	2478
	20	2422	50	2452	-	-
	21	2423	51	2453	-	-
	22	2424	52	2454	-	-
	26	2428	53	2455	-	-
	27	2429	54	2456	-	-
	28	2430	55	2457	-	-
	29	2431	56	2458	-	-
	30	2432	57	2459	-	-
	31	2433	58	2460	-	-

2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz) radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find Z plane with Adapter as worst plane.
- b. AC power line Conducted Emission was tested under maximum output power.


The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases		
Test Item	Data Rate / Modulation	
Conducted Test Cases	Bluetooth LE 1Mbps CS ASK	Bluetooth LE 2Mbps CS ASK
	Mode 1: CH02_2404 MHz	Mode 4: CH02_2404 MHz
	Mode 2: CH38_2440 MHz	Mode 5: CH38_2440 MHz
	Mode 3: CH76_2478 MHz	Mode 6: CH76_2478 MHz
Radiated Test Cases	Bluetooth LE CS ASK	
	<Ant.3>	
	Mode 1: CH02_2404 MHz_1Mbps	
	Mode 2: CH38_2440 MHz_1Mbps	
	Mode 3: CH76_2478 MHz_1Mbps	
	Mode 4: CH02_2404 MHz_2Mbps	
	Mode 5: CH38_2440 MHz_2Mbps	
	Mode 6: CH76_2478 MHz_2Mbps	
	<Ant.4>	
	Mode 1: CH02_2404 MHz_1Mbps	
	Mode 2: CH38_2440 MHz_1Mbps	
	Mode 3: CH76_2478 MHz_1Mbps	
	Mode 4: CH02_2404 MHz_2Mbps	
	Mode 5: CH38_2440 MHz_2Mbps	
	Mode 6: CH76_2478 MHz_2Mbps	

Summary table of Test Cases	
Test Item	Data Rate / Modulation
AC Conducted Emission	Mode 1 : LTE Band 13 Idle + WLAN (2.4GHz) Link + Bluetooth Idle + USB Cable 1 (Charging from AC Adapter) + Battery < 50% + Google Meet (Front Camera)
Remark: 1. For Radiated Test Cases, the worst mode data rate 2Mbps was reported only since the highest RF output power in the preliminary tests. The conducted spurious emissions and conducted band edge measurement for other data rates were not worse than 2Mbps, and no other significantly frequencies found in conducted spurious emission. 2. For Radiated Test Cases, the tests were performed with USB Cable 2. 3. During the preliminary test, both charging modes (Adapter mode and WPC Rx mode) were verified. It is determined that the adaptor mode is the worst case for official test.	

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

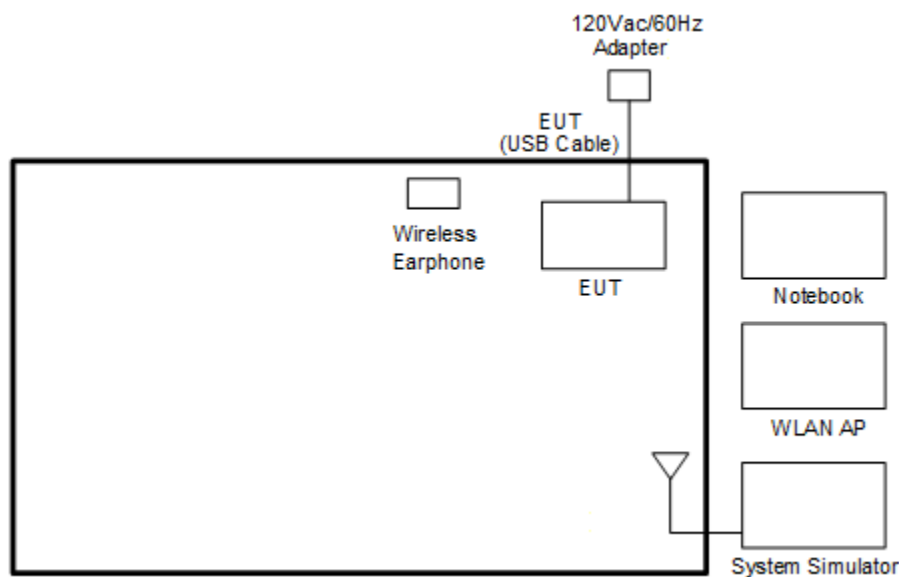
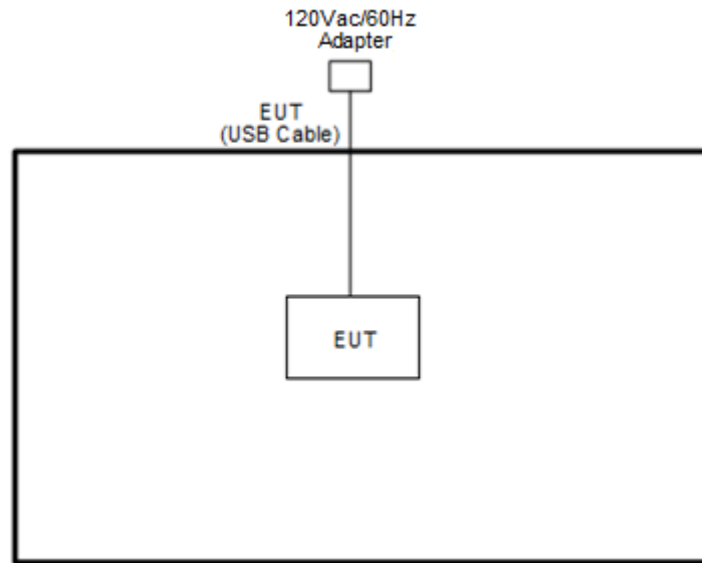
<Bluetooth-LE CS Tx Mode>

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	ASUS	GT-AXE11000	FCC DoC	N/A	Unshielded,1.8m
3.	Notebook	DELL	Latitude 3420	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Wireless Earphone	N/A	G1007/G1008	A4RG1007/ A4RG1008	N/A	N/A
5.	GPS Station	Pendulum	GSG-54	N/A	N/A	Unshielded,1.8m
6.	Adapter	N/A	GW8L7	N/A	N/A	N/A



2.5 EUT Operation Test Setup

The RF test items, utility "BT DUT Ver 03-04-24" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;
RBW = 300 kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

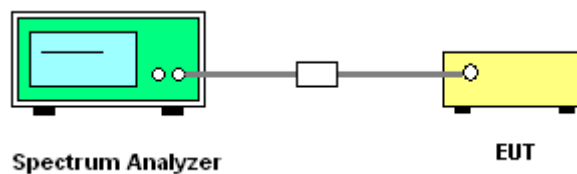

3.1.5 Test Result of Number of Hopping Frequency

Please refer to Appendix A.

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 300 kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Hopping Channel Separation

Please refer to Appendix A.

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

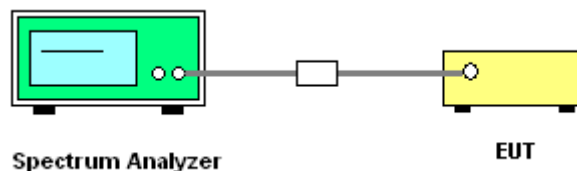

3.3.5 Test Result of Dwell Time

Please refer to Appendix A.

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Use the following spectrum analyzer settings for 20 dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq 1\%$ of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
RBW within 1-5% of the 99% bandwidth; VBW $\geq 3 * \text{RBW}$; Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup



3.4.5 Test Result of 20dB Bandwidth

Please refer to Appendix A.

3.4.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:
For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.
If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi.


3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. The average power is compensated with duty factor.
6. Record the results in the test report.

3.5.4 Test Setup

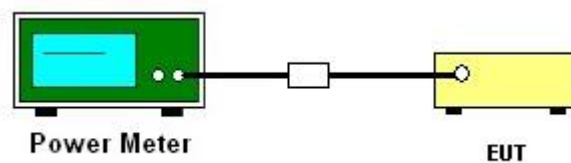

3.5.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.5.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set the maximum power setting and enable the EUT to transmit continuously.
3. Set RBW = 100 kHz, VBW = 300 kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2 and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

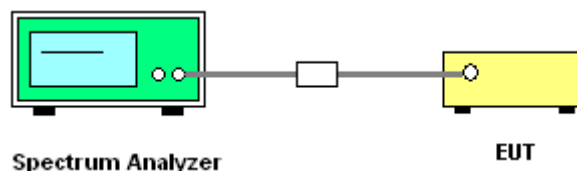

3.6.5 Test Result of Conducted Band Edges

Please refer to Appendix A.

3.6.6 Test Result of Conducted Hopping Mode Band Edges

Please refer to Appendix A.

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, scan up through 10th harmonic. All harmonics / spurious must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

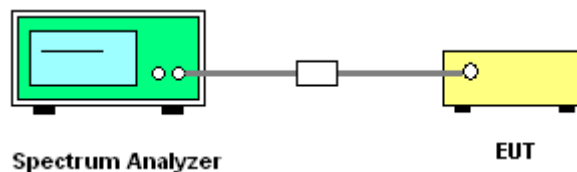

3.7.5 Test Result of Conducted Spurious Emission

Please refer to Appendix A.

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics / spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.8.3 Test Procedures


1. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT is arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz, RBW = 1 MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: Set RBW = 100 kHz for $f < 1$ GHz, RBW = 1 MHz for $f > 1$ GHz ; VBW $\geq$ 10Hz; Sweep = auto; Detector function = peak; Trace = max hold for average
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
8. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.

3.8.4 Test Setup


For radiated test below 30MHz

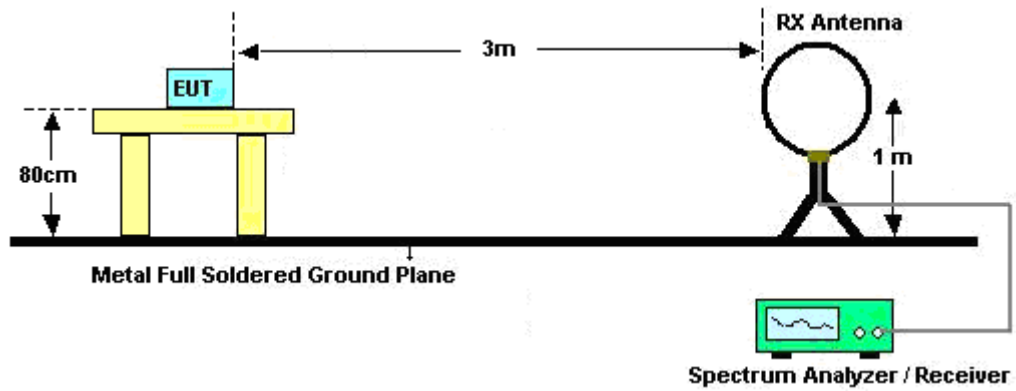


For radiated test from 30MHz to 1GHz

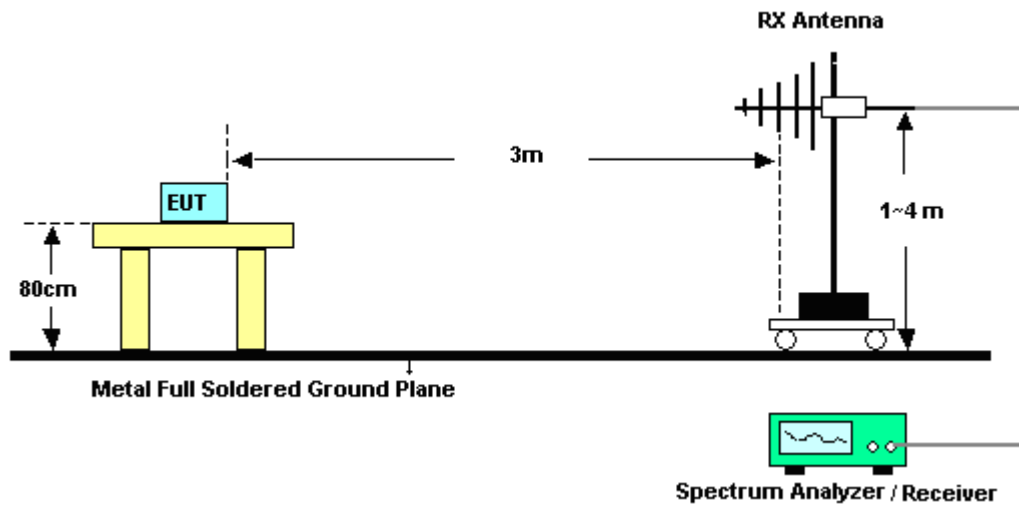

For radiated test from 1GHz to 18GHz

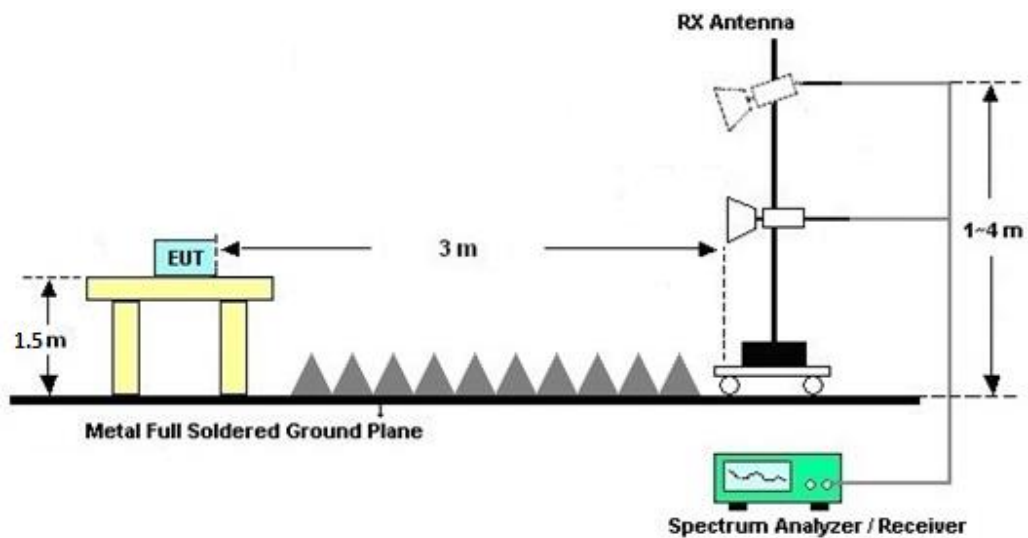

For radiated test above 18GHz

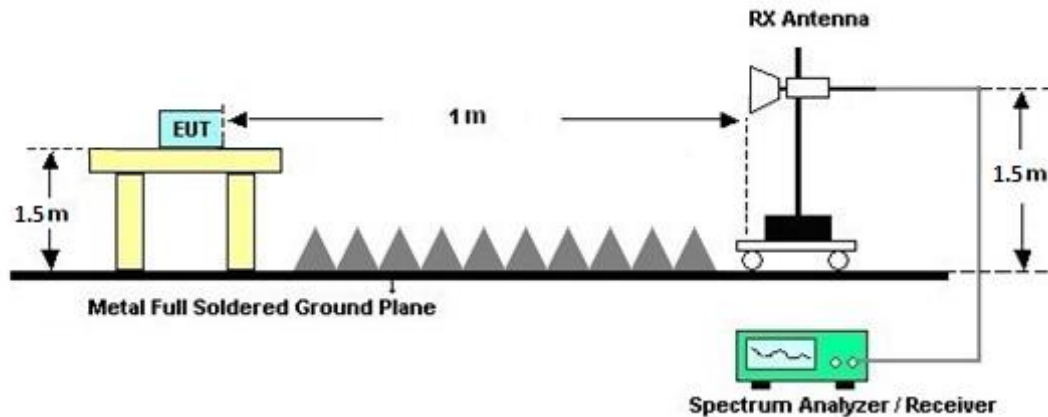

3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.8.7 Duty Cycle

Please refer to Appendix D.

3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.9.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.9.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup



3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.10 Antenna Requirements

3.10.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.10.2 Antenna Anti-Replacement Construction

b) Unique (non-standard) antenna connector.

Use of a standard connector is also allowed if the connector is within the transmitter enclosure and can only be accessed by disassembly of the transmitter, where such disassembly is not normally required. The user manual must not show that user has access to the connector.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 12, 2023	Jun. 06, 2024~ Aug. 17, 2024	Sep. 11, 2024	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01N -06	47020 & 06	30MHz to 1GHz	Oct. 07, 2023	Jun. 06, 2024~ Aug. 17, 2024	Oct. 06, 2024	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1522	1G~18GHz	Mar. 28, 2024	Jun. 06, 2024~ Aug. 17, 2024	Mar. 27, 2025	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00993	18GHz~40GHz	Nov. 24, 2023	Jun. 06, 2024~ Aug. 17, 2024	Nov. 23, 2024	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY57290111	3Hz~26.5GHz	Dec. 04, 2023	Jun. 06, 2024~ Aug. 17, 2024	Dec. 03, 2024	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1GHz	Jul. 03, 2023	Jun. 06, 2024~ Jul. 01, 2024	Jul. 02, 2024	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1GHz	Jul. 02, 2024	Jul. 02, 2024~ Aug. 17, 2024	Jul. 01, 2025	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz~26.5GHz	Dec. 07, 2023	Jun. 06, 2024~ Aug. 17, 2024	Dec. 06, 2024	Radiation (03CH16-HY)
Preamplifier	EMEC	EM1G18G	060812	1GHz~18GHz	Dec. 25, 2023	Jun. 06, 2024~ Aug. 17, 2024	Dec. 24, 2024	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060872	18GHz~40GHz	Sep. 06, 2023	Jun. 06, 2024~ Aug. 17, 2024	Sep. 05, 2024	Radiation (03CH16-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN17	1.53GHz Low Pass Filter	Jan. 15, 2024	Jun. 06, 2024~ Aug. 17, 2024	Jan. 14, 2025	Radiation (03CH16-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0ST	SN3	3GHz High Pass Filter	Jun. 29, 2023	Jun. 06, 2024~ Jun. 27, 2024	Jun. 28, 2024	Radiation (03CH16-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0ST	SN3	3GHz High Pass Filter	Jun. 28, 2024	Jun. 28, 2024~ Aug. 17, 2024	Jun. 27, 2025	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 06, 2024	Jun. 06, 2024~ Aug. 17, 2024	Mar. 05, 2025	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102/SUCOFLE X 104	EC-A5-300-57 57,805935/4,8 02434/4	30MHz~18GHz	Aug. 08, 2023	Jun. 06, 2024~ Aug. 06, 2024	Aug. 07, 2024	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102/SUCOFLE X 104	EC-A5-300-57 57,805935/4,8 02434/4	30MHz~18GHz	Aug. 07, 2024	Aug. 07, 2024~ Aug. 17, 2024	Aug. 06, 2025	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,8040 12/2	18G~40GHz	Jan. 02, 2024	Jun. 06, 2024~ Aug. 17, 2024	Jan. 01, 2025	Radiation (03CH16-HY)
Software	Audix	E3 230621 V9	RK-002393	N/A	N/A	Jun. 06, 2024~ Aug. 17, 2024	N/A	Radiation (03CH16-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Jun. 06, 2024~ Aug. 17, 2024	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jun. 06, 2024~ Aug. 17, 2024	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Jun. 06, 2024~ Aug. 17, 2024	N/A	Radiation (03CH16-HY)
Hygrometer	TECEPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	May 28, 2024~ Jun. 25, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Power Meter	Agilent	E4416A	GB41292344	N/A	Jul. 12, 2023	May 28, 2024~ Jun. 25, 2024	Jul. 11, 2024	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US40441548	50MHz~18GHz	Jul. 12, 2023	May 28, 2024~ Jun. 25, 2024	Jul. 11, 2024	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2023	May 28, 2024~ Jun. 25, 2024	Aug. 22, 2024	Conducted (TH05-HY)
Switch Box & RF Cable	E-Instument	ETF-1405-0	EC1900067	N/A	Jul. 10, 2023	May 28, 2024~ Jun. 25, 2024	Jul. 09, 2024	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_ version1.0	N/A	N/A	N/A	May 28, 2024~ Jun. 25, 2024	N/A	Conducted (TH05-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Aug. 07, 2024	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 06, 2023	Aug. 07, 2024	Dec. 05, 2024	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Oct. 26, 2023	Aug. 07, 2024	Oct. 25, 2024	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 22, 2023	Aug. 07, 2024	Nov. 21, 2024	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Aug. 07, 2024	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	00691	N/A	Jul. 30, 2024	Aug. 07, 2024	Jul. 29, 2025	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 28, 2023	Aug. 07, 2024	Dec. 27, 2024	Conduction (CO05-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Hank Hsu	Temperature:	21~25	°C
Test Date:	2024/05/28 ~ 2024/06/25	Relative Humidity:	51~54	%

<Ant. 3>

TEST RESULTS DATA**20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	20dB BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
ASK	1Mbps	1	02	2404	0.130	0.382	0.999	0.0868	Pass
	1Mbps	1	38	2440	0.130	0.476	0.986	0.0863	Pass
	1Mbps	1	76	2478	0.148	0.492	1.007	0.0984	Pass
ASK	2Mbps	1	02	2404	0.127	0.541	1.007	0.0849	Pass
	2Mbps	1	38	2440	0.124	0.422	0.990	0.0825	Pass
	2Mbps	1	76	2478	0.125	0.464	1.003	0.0830	Pass

TEST RESULTS DATA**Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time (hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
ASK	72	1750	0.044	0.077	0.4	Pass

TEST RESULTS DATA**Peak Power Table**

DH	CH.	N _{TX}	Peak Power (dBm)	Power Limit (dBm)	Test Result
ASK 1Mbps	02	1	18.70	20.97	Pass
	38	1	18.63	20.97	Pass
	76	1	20.09	20.97	Pass
ASK 2Mbps	02	1	19.00	20.97	Pass
	38	1	18.97	20.97	Pass
	76	1	20.28	20.97	Pass

TEST RESULTS DATA**Average Power Table
(Reporting Only)**

DH	CH.	N _{TX}	Average Power (dBm)	Duty Factor (dB)
ASK 1Mbps	02	1	18.43	8.21
	38	1	18.37	8.21
	76	1	19.83	8.21
ASK 2Mbps	02	1	18.46	8.01
	38	1	18.45	8.01
	76	1	19.73	8.01

TEST RESULTS DATA**Number of Hopping Frequency**

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
72	20	> 15	Pass

<Ant. 4>

TEST RESULTS DATA									
20dB and 99% Occupied Bandwidth and Hopping Channel Separation									
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	20dB BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
ASK	1Mbps	1	02	2404	0.130	0.382	1.003	0.0868	Pass
	1Mbps	1	38	2440	0.130	0.454	1.003	0.0868	Pass
	1Mbps	1	76	2478	0.130	0.482	1.012	0.0868	Pass
ASK	2Mbps	1	02	2404	0.127	0.482	0.999	0.0849	Pass
	2Mbps	1	38	2440	0.127	0.412	1.003	0.0844	Pass
	2Mbps	1	76	2478	0.125	0.448	0.999	0.0830	Pass

TEST RESULTS DATA						
Dwell Time						
Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time (hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
ASK	72	1802	0.044	0.079	0.4	Pass

TEST RESULTS DATA					
Peak Power Table					
DH	CH.	N _{TX}	Peak Power (dBm)	Power Limit (dBm)	Test Result
ASK 1Mbps	02	1	20.34	20.97	Pass
	38	1	20.64	20.97	Pass
	76	1	19.89	20.97	Pass
ASK 2Mbps	02	1	20.70	20.97	Pass
	38	1	20.83	20.97	Pass
	76	1	19.99	20.97	Pass

TEST RESULTS DATA				
Average Power Table				
(Reporting Only)				
DH	CH.	N _{TX}	Average Power (dBm)	Duty Factor (dB)
ASK 1Mbps	02	1	19.77	8.01
	38	1	20.14	8.01
	76	1	19.43	8.01
ASK 2Mbps	02	1	20.26	8.01
	38	1	20.29	8.01
	76	1	19.59	8.01


TEST RESULTS DATA			
Number of Hopping Frequency			
Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
72	20	> 15	Pass




<Ant.3>

Number of Hopping Frequency

<1Mbps>

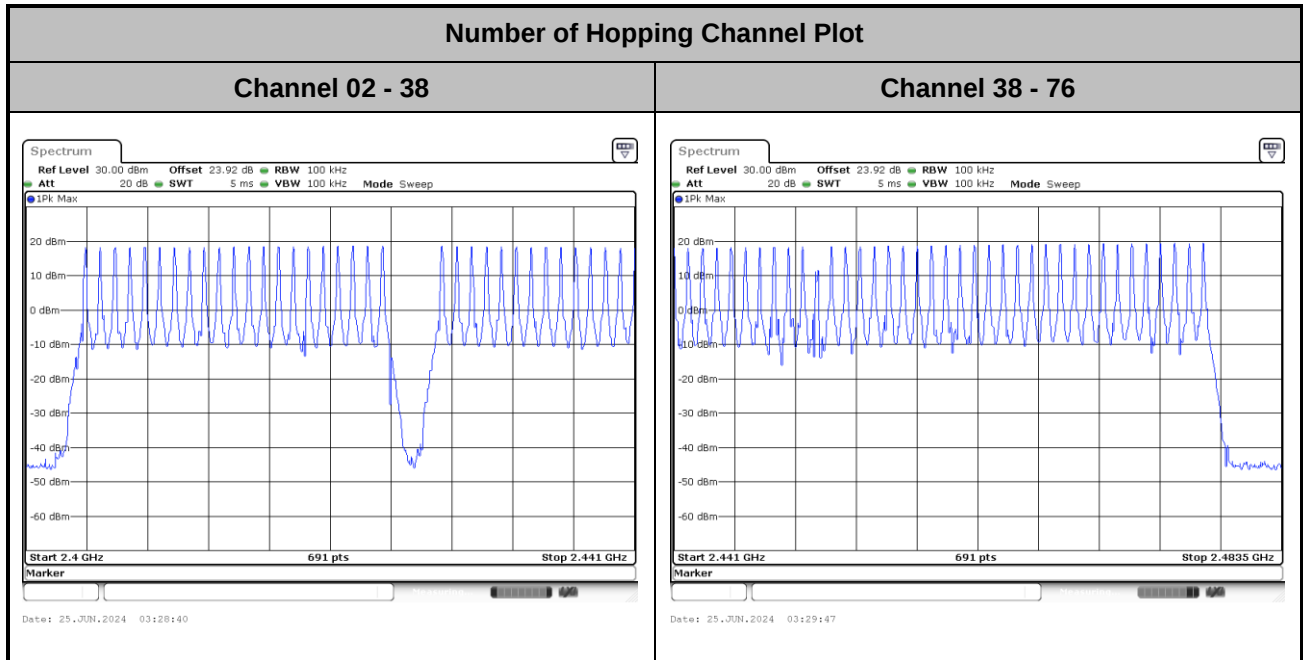

<2Mbps>

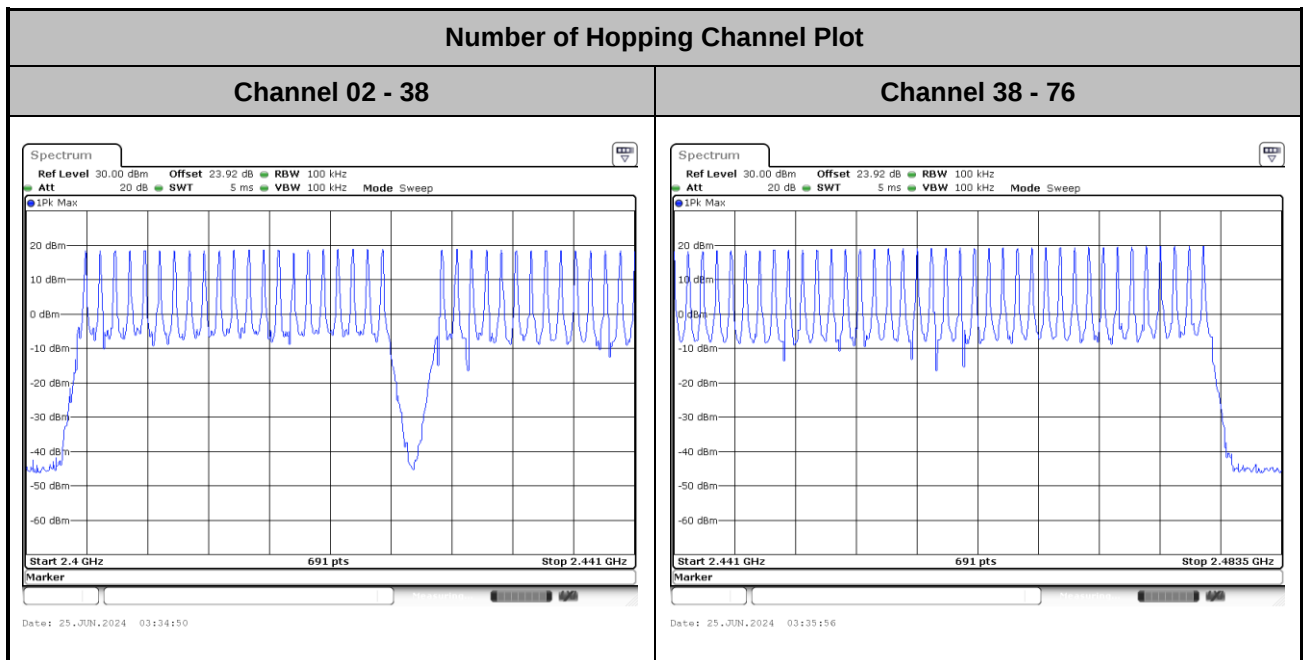





Hopping Channel Separation

<1Mbps>


Channel Separation Plot on Channel 02 - 03

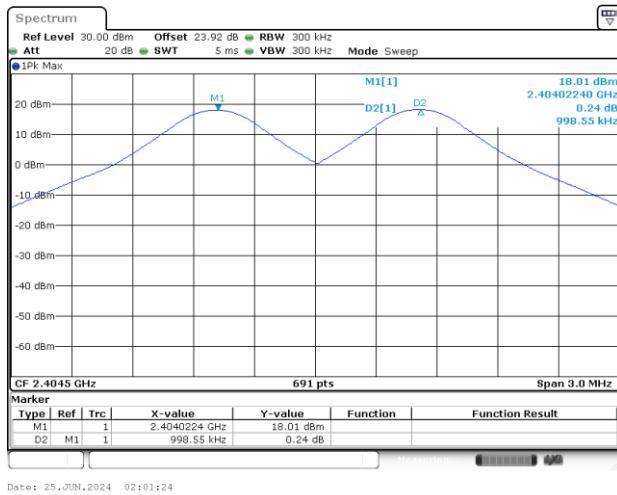

Channel Separation Plot on Channel 38 - 39

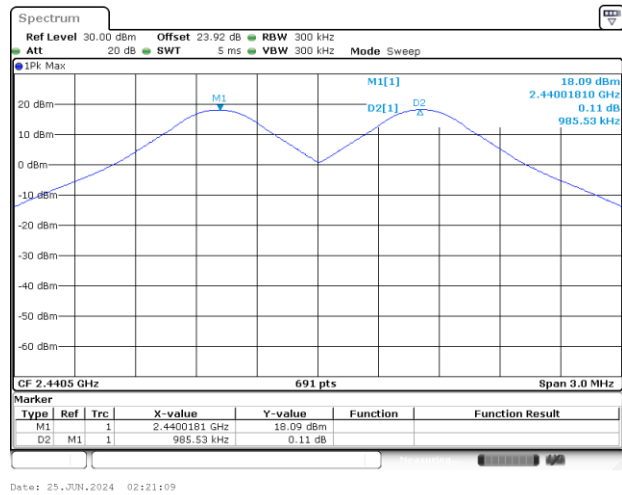


Channel Separation Plot on Channel 75 - 76

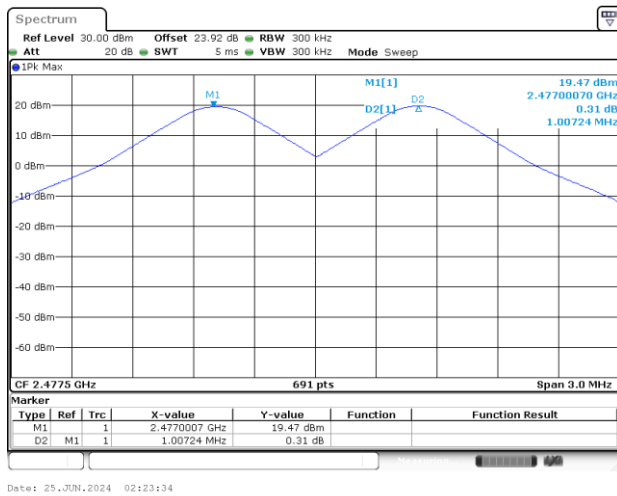




<2Mbps>


Channel Separation Plot on Channel 02 - 03

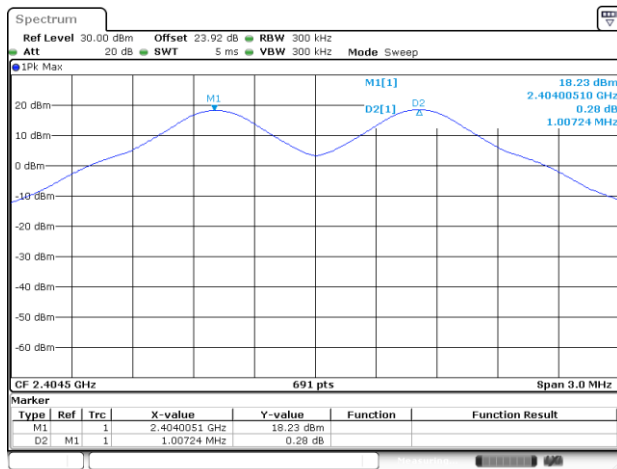


Channel Separation Plot on Channel 38 - 39

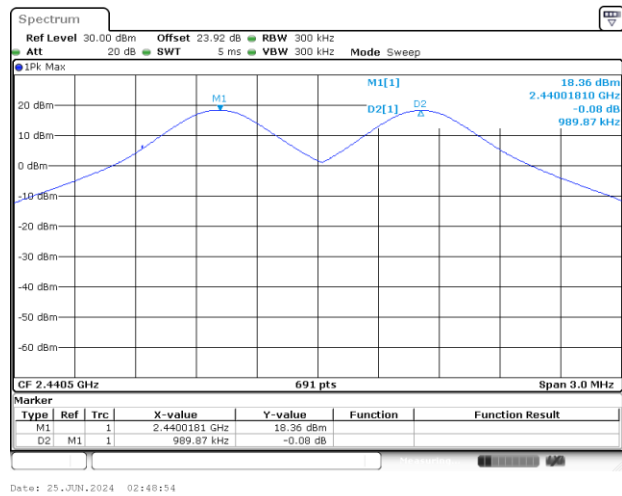

Channel Separation Plot on Channel 75 - 76

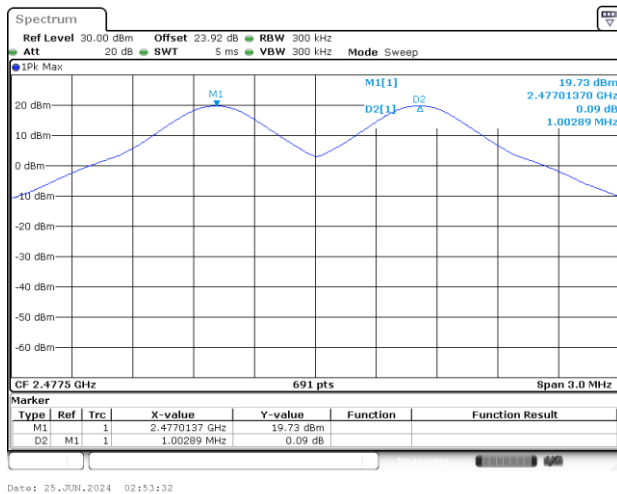


Dwell Time

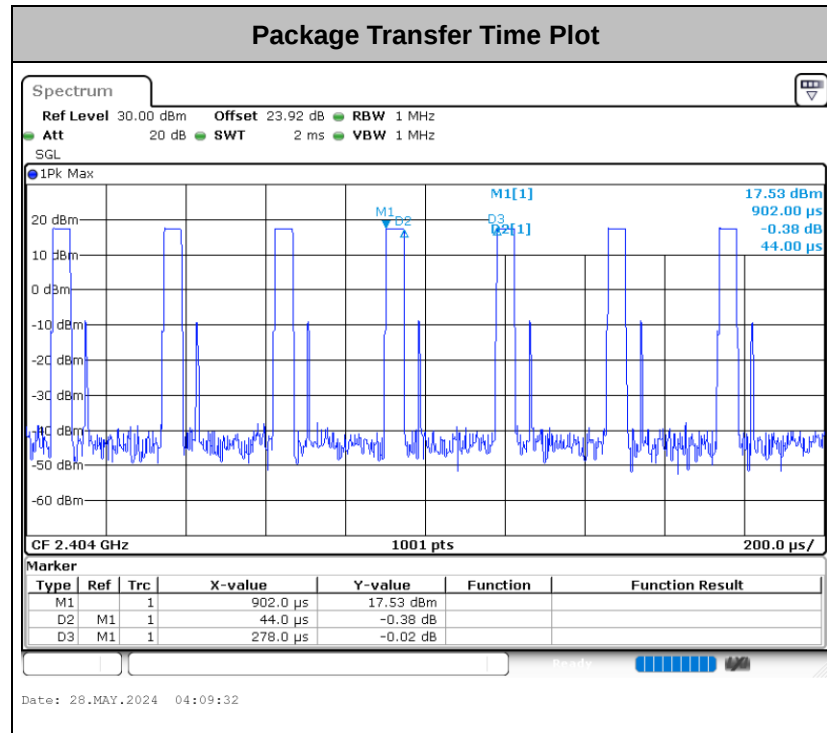

Remark:

- Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time
= 1750 x 0.044 ms = 0.077 sec
- The observation Occupancy time is hopping channel 72 channels x 400ms = 28.8sec using sweep point 30,000. This shows that 1ms per on-time contains 1 hop. The total hops is finally counted via computer analysis.

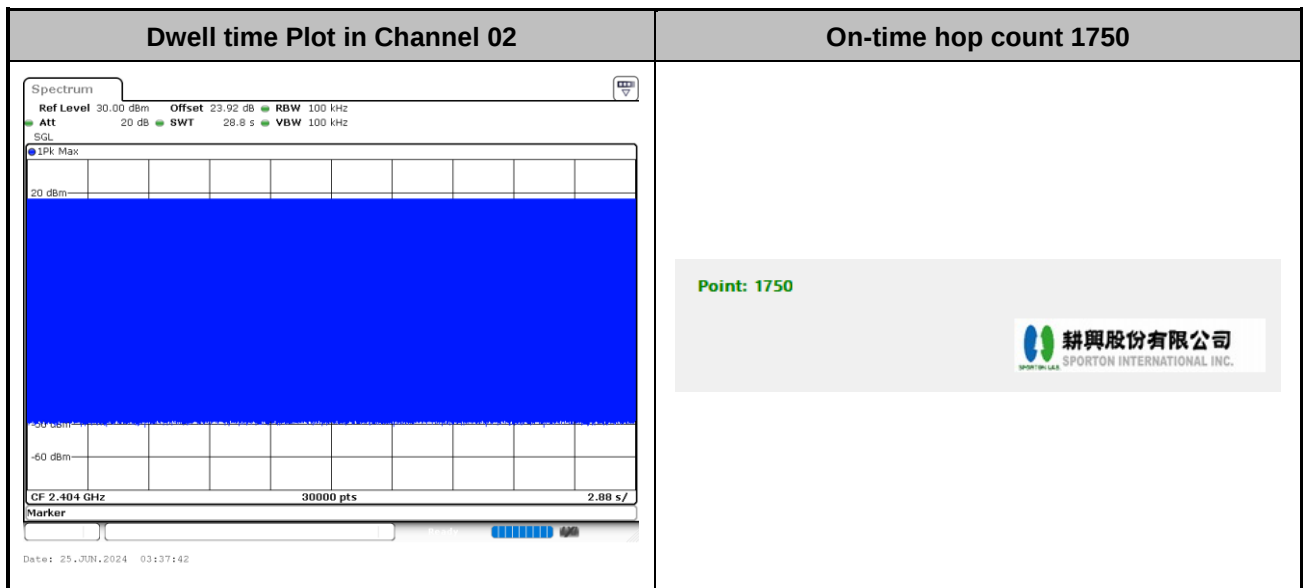





20dB Bandwidth

<1Mbps>


20 dB Bandwidth Plot in Channel 02

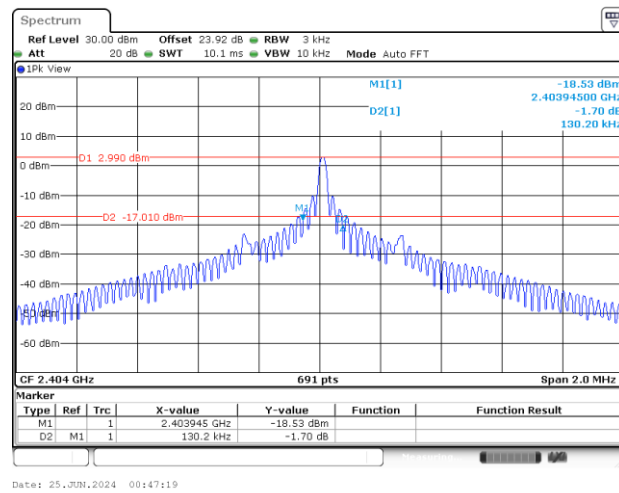

20 dB Bandwidth Plot in Channel 38

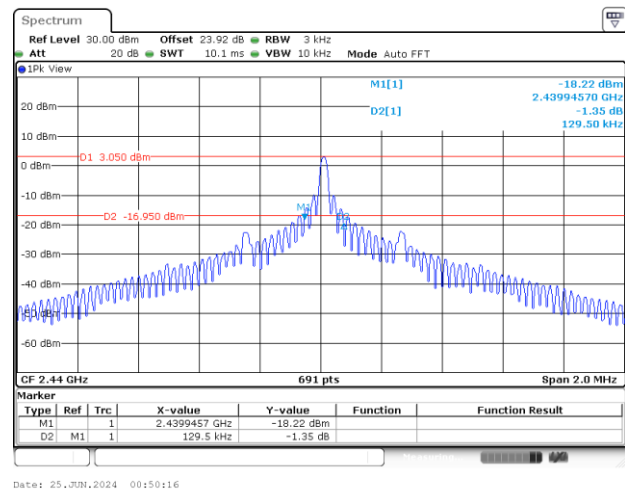


20 dB Bandwidth Plot in Channel 76

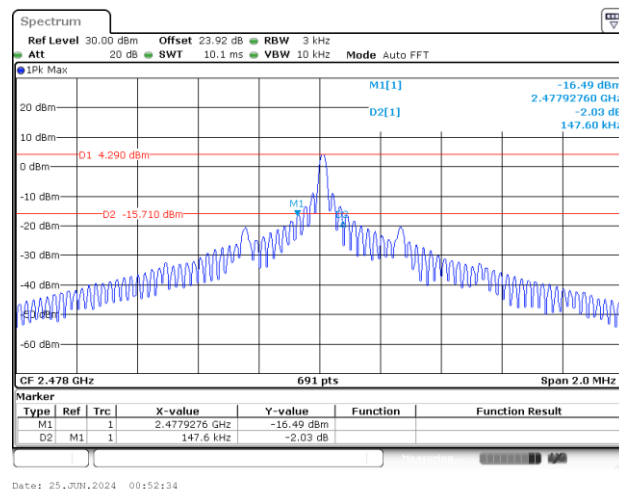




<2Mbps>


20 dB Bandwidth Plot in Channel 02

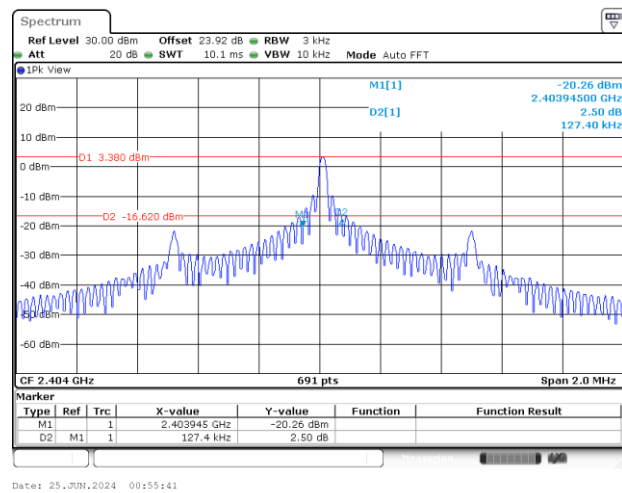

20 dB Bandwidth Plot in Channel 38

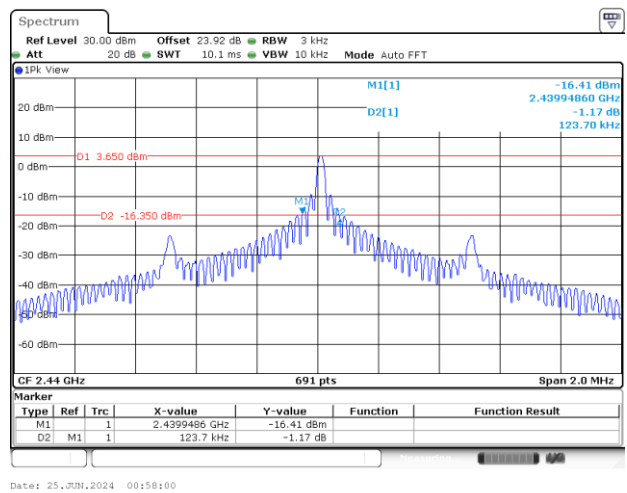

20 dB Bandwidth Plot in Channel 76

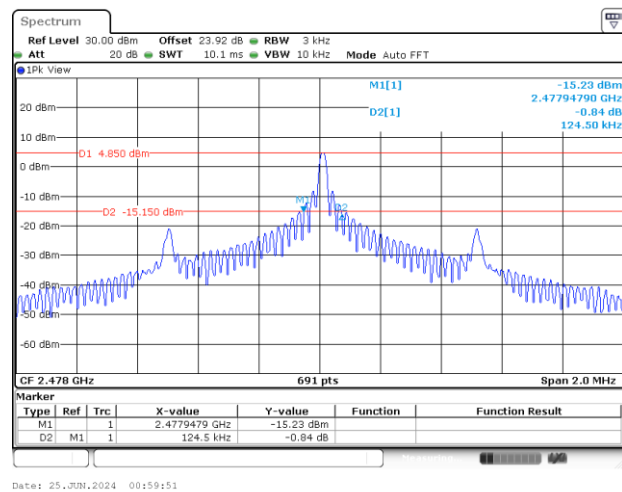





99% Occupied Bandwidth

<1Mbps>


99% Occupied Bandwidth on Channel 02

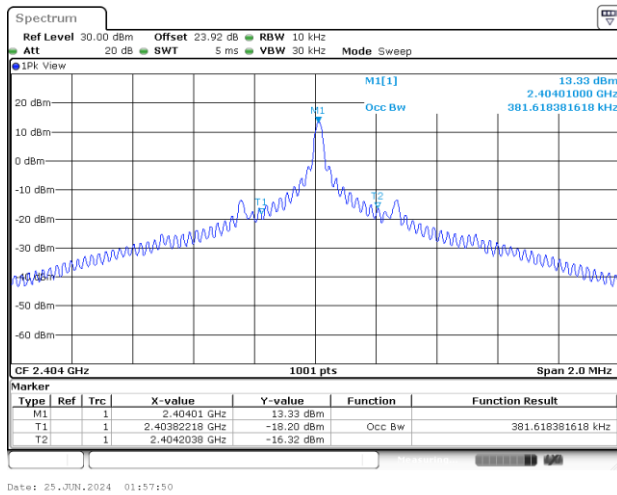

99% Occupied Bandwidth on Channel 38

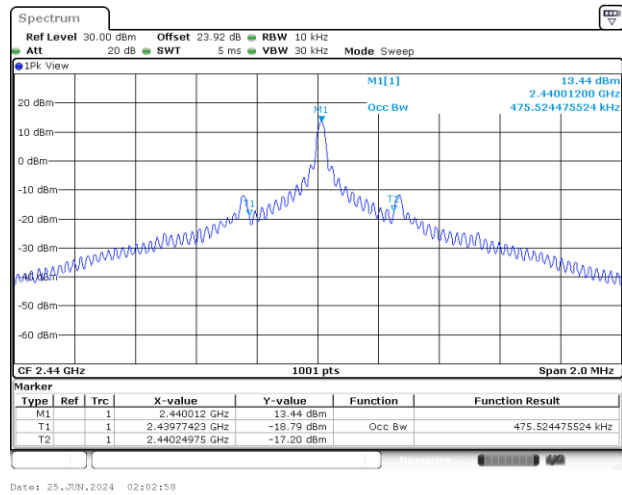


99% Occupied Bandwidth on Channel 76

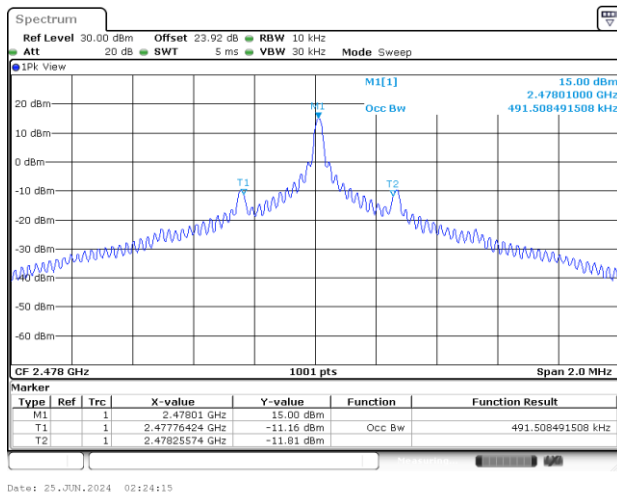




<2Mbps>


99% Occupied Bandwidth on Channel 02

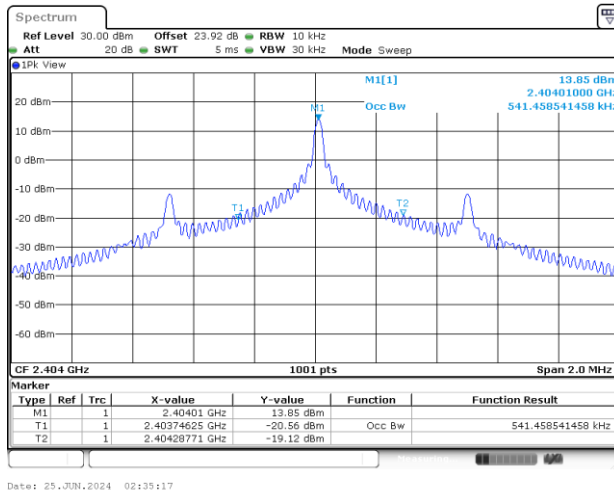

99% Occupied Bandwidth on Channel 38

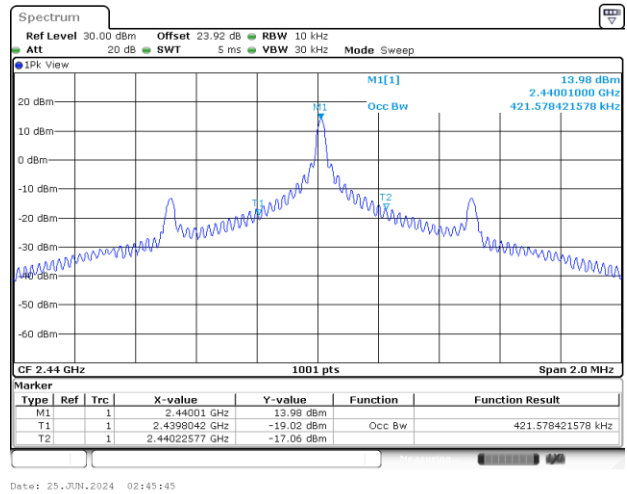


99% Occupied Bandwidth on Channel 76

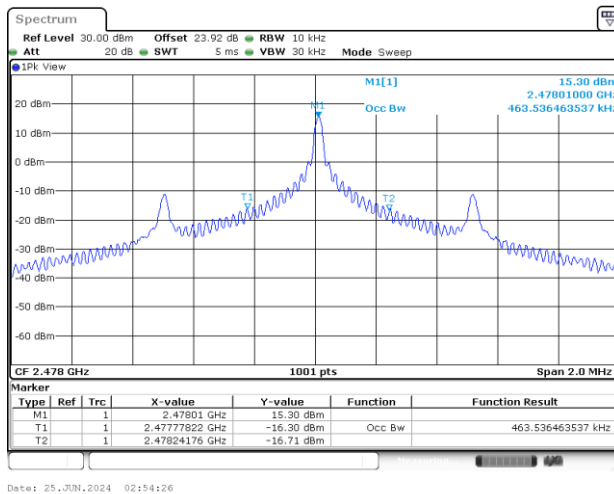




Band Edges

<1Mbps>

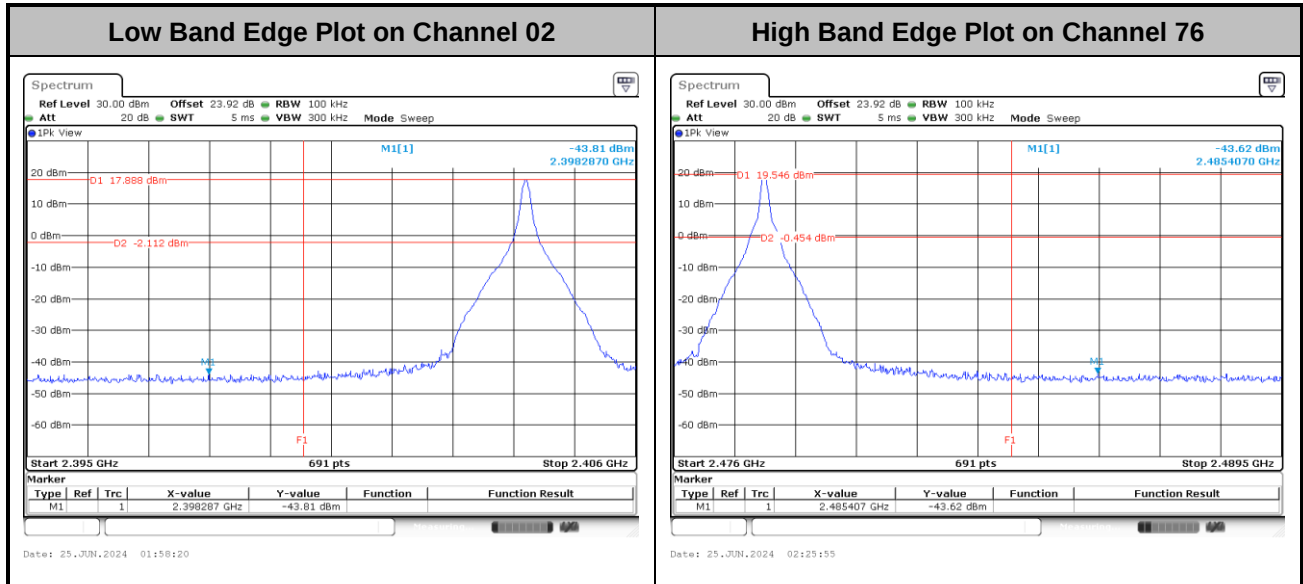


<2Mbps>

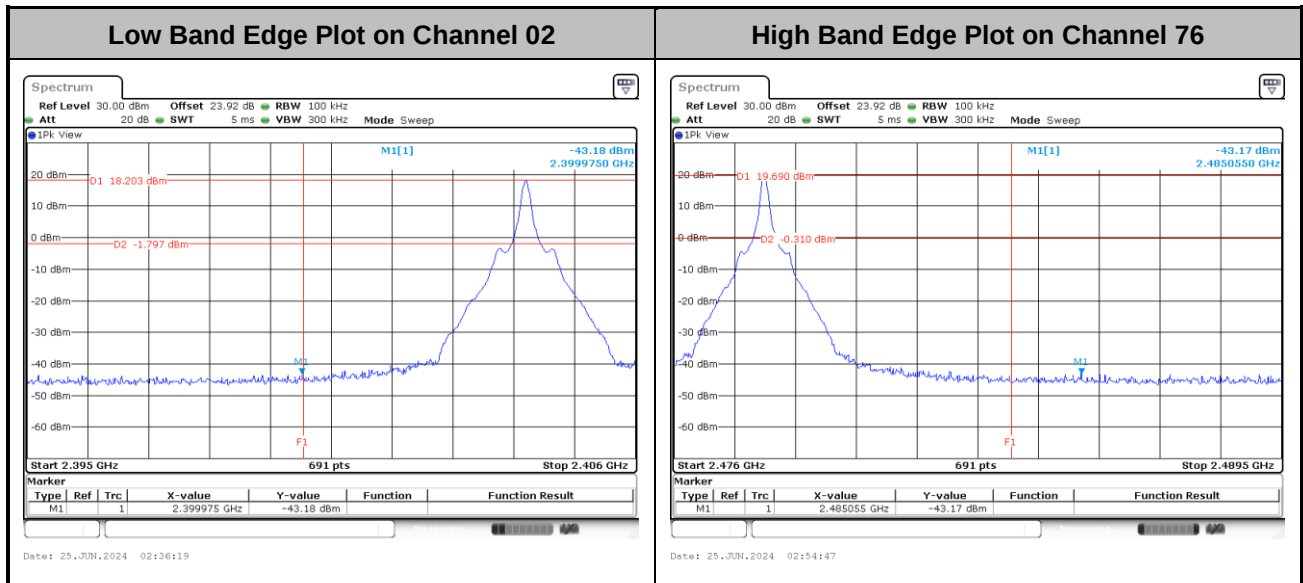




Hopping Mode Band Edges

<1Mbps>

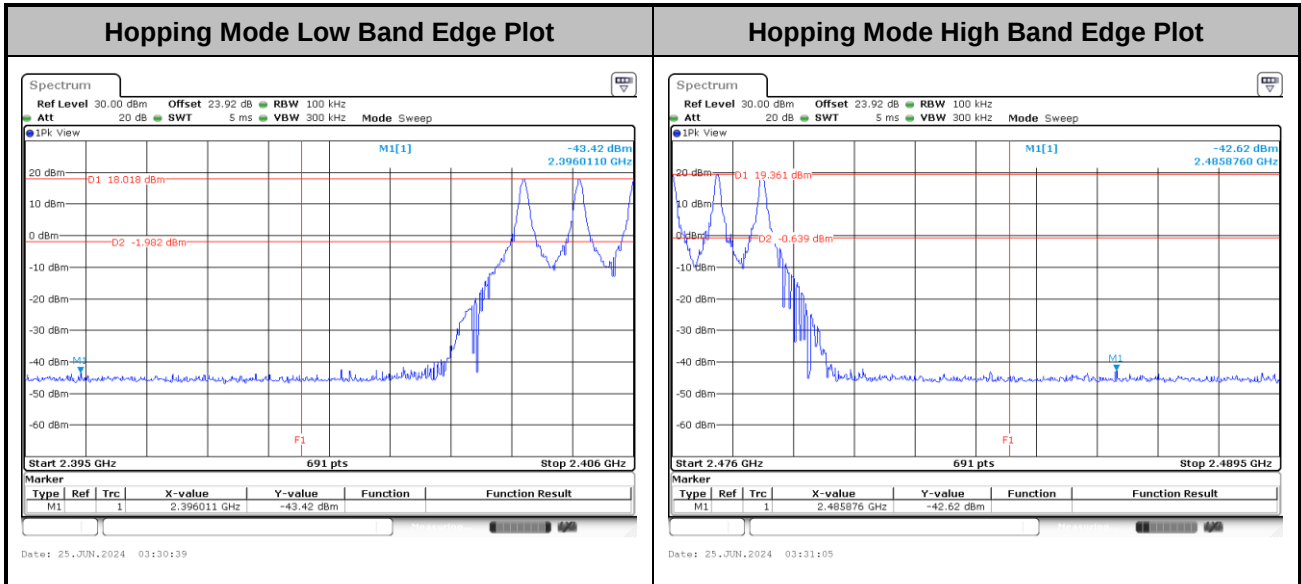

<2Mbps>

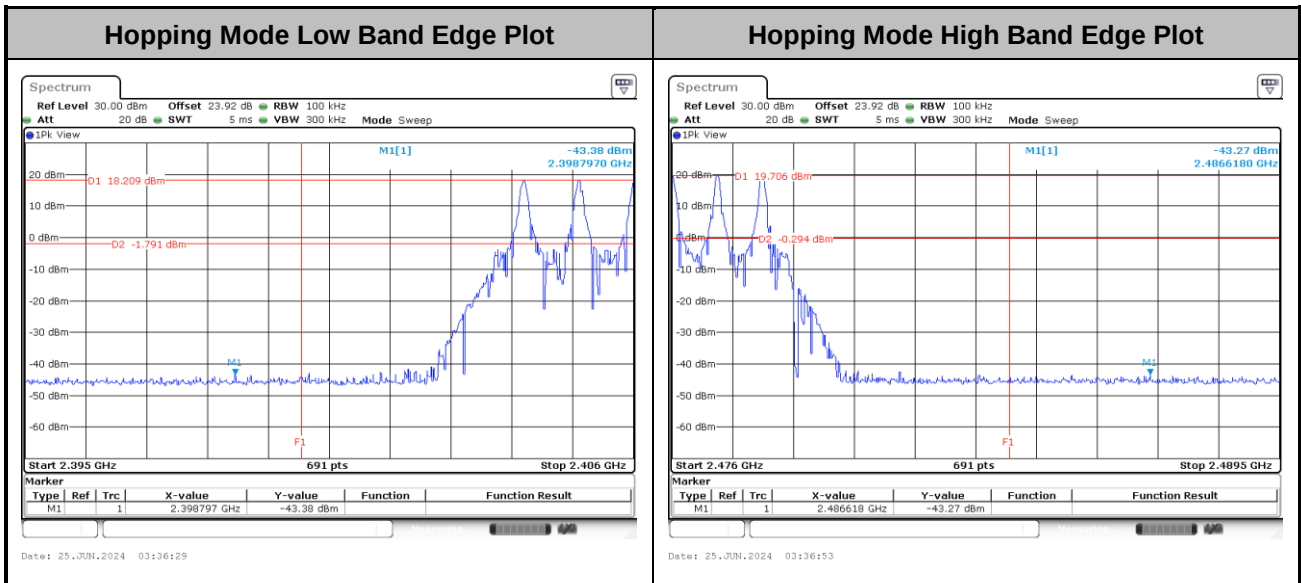





Conducted Spurious Emission

<1Mbps>


CSE Plot on Low Ch between 30MHz ~ 1 GHz

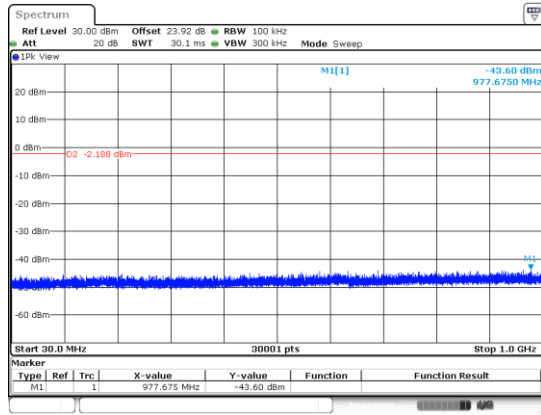


CSE Plot on Low Ch between 1GHz ~ 26.5GHz

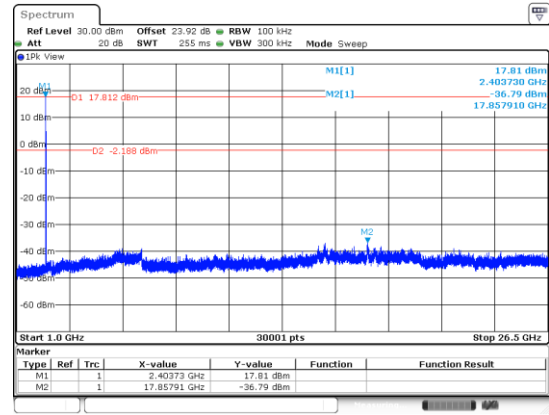


CSE Plot on Mid. Ch between 30MHz ~ 1 GHz

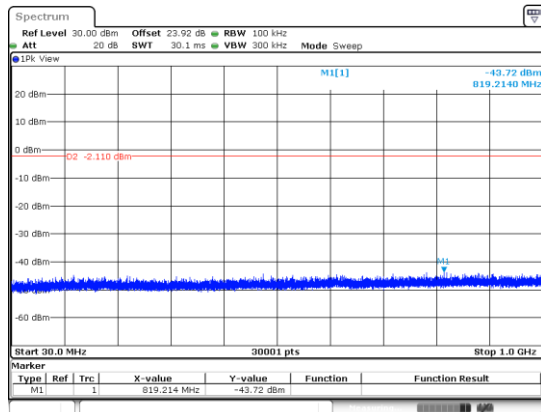


CSE Plot on Mid. Ch between 1GHz ~ 26.5GHz

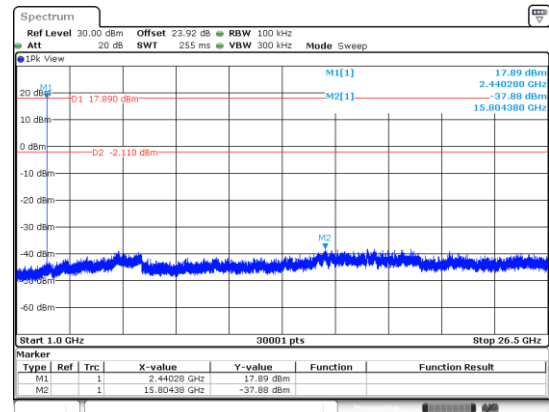

CSE Plot on High Ch between 30MHz ~ 1 GHz

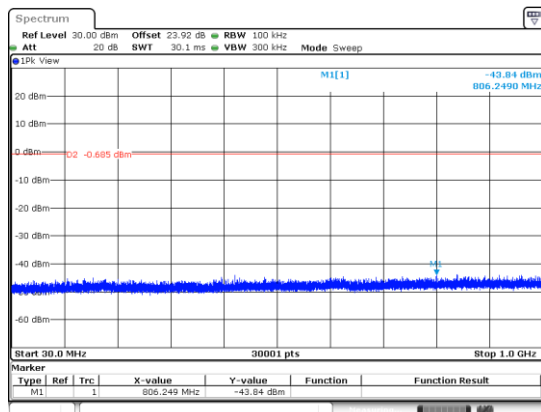

CSE Plot on High Ch between 1GHz ~ 26.5GHz

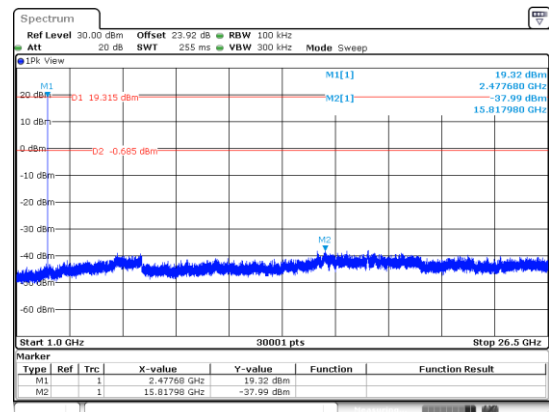





<Ant.4>

Number of Hopping Frequency

<1Mbps>

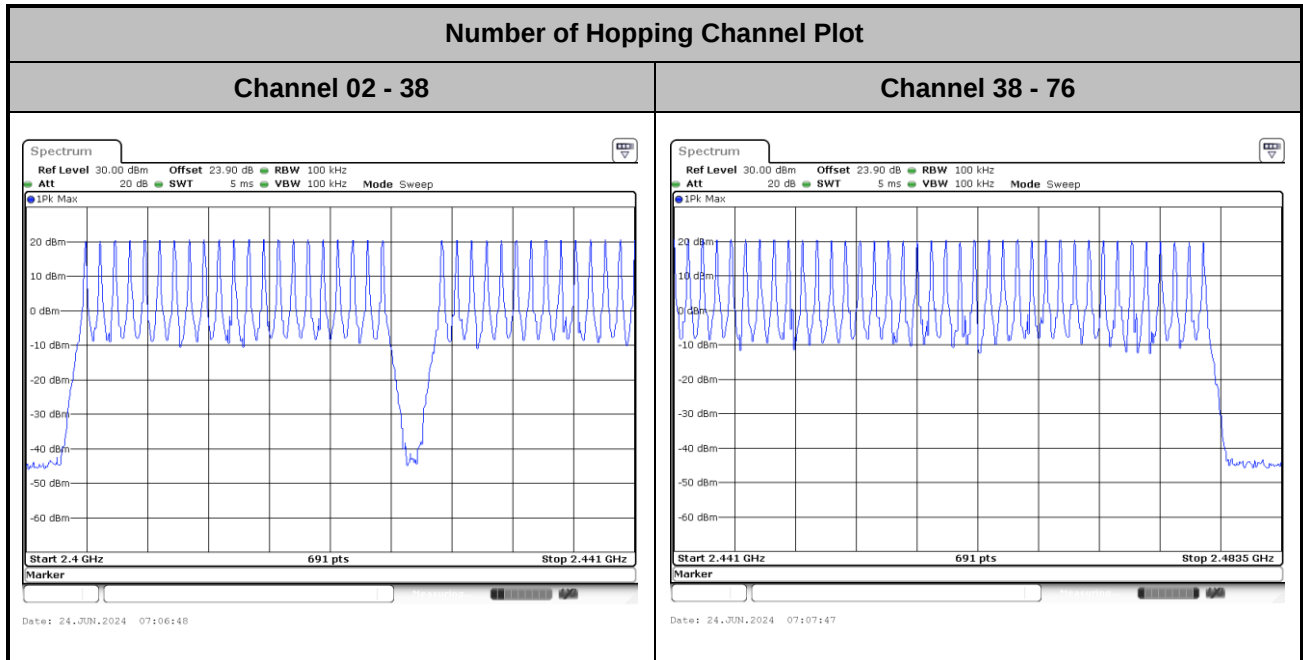

<2Mbps>

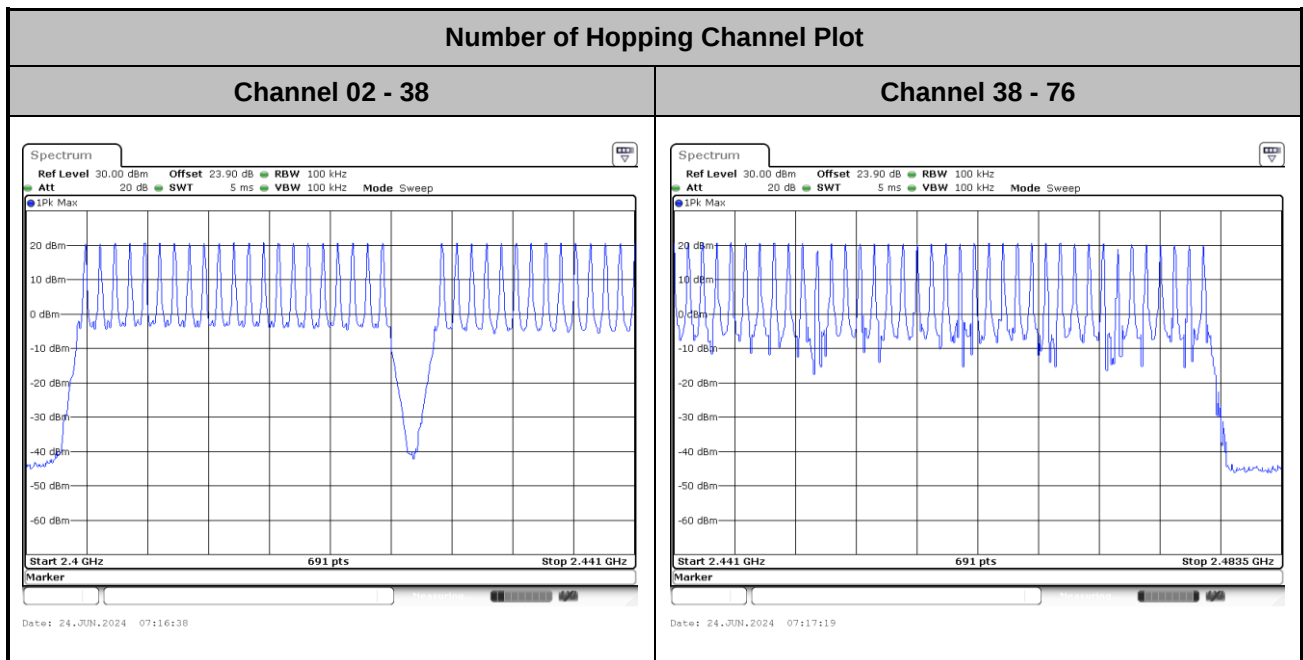





Hopping Channel Separation

<1Mbps>


Channel Separation Plot on Channel 02 - 03

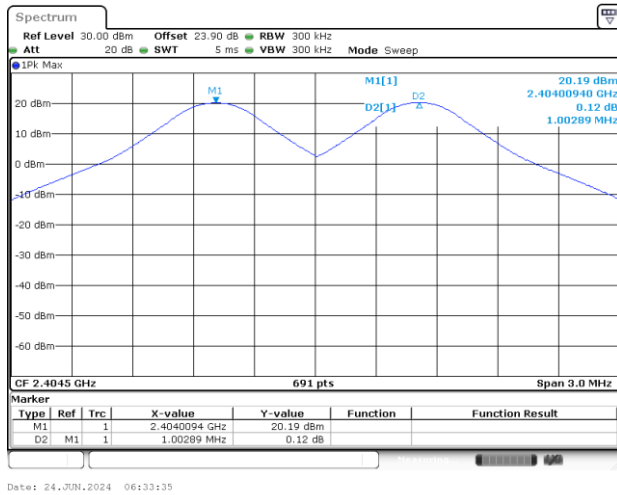

Channel Separation Plot on Channel 38 - 39

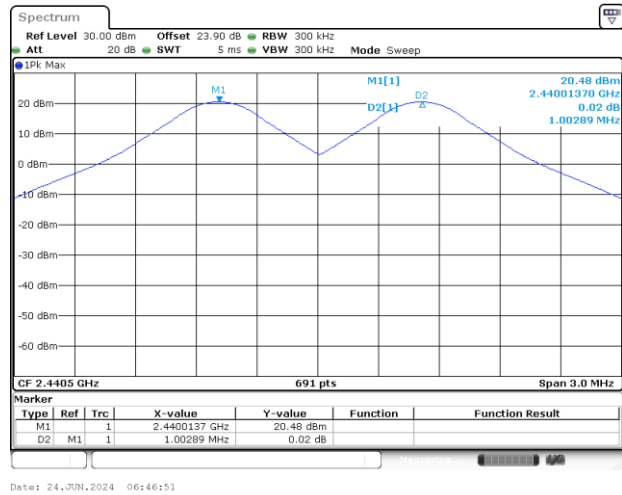


Channel Separation Plot on Channel 75 - 76

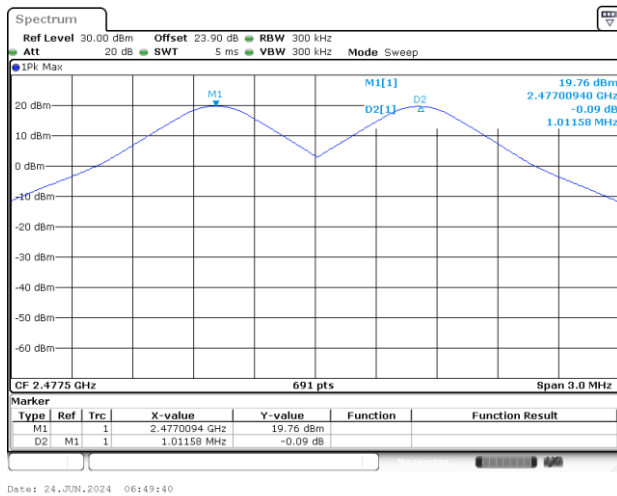




<2Mbps>


Channel Separation Plot on Channel 02 - 03

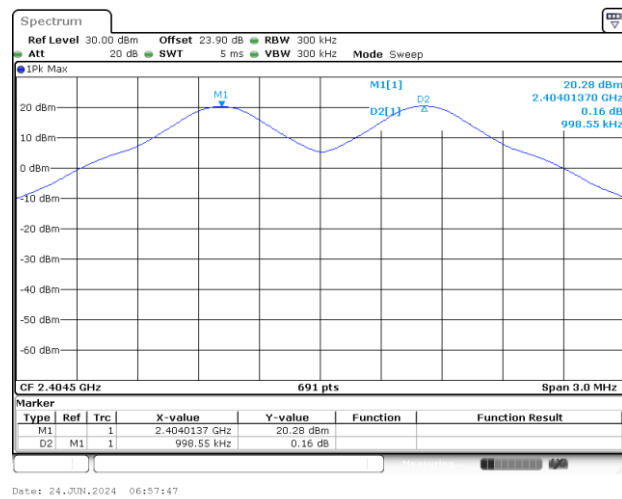


Channel Separation Plot on Channel 38 - 39

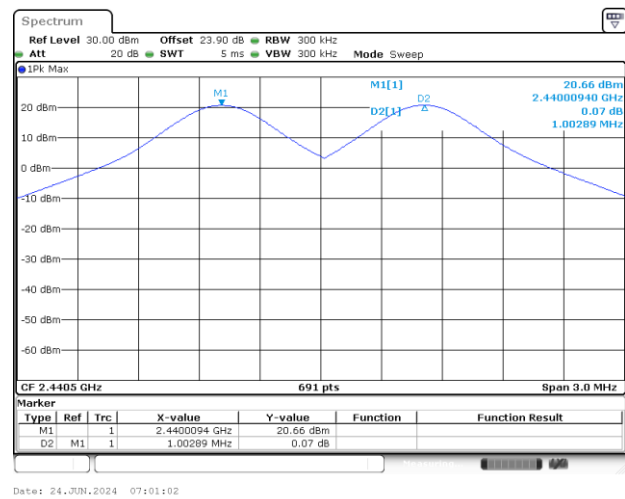

Channel Separation Plot on Channel 75 - 76

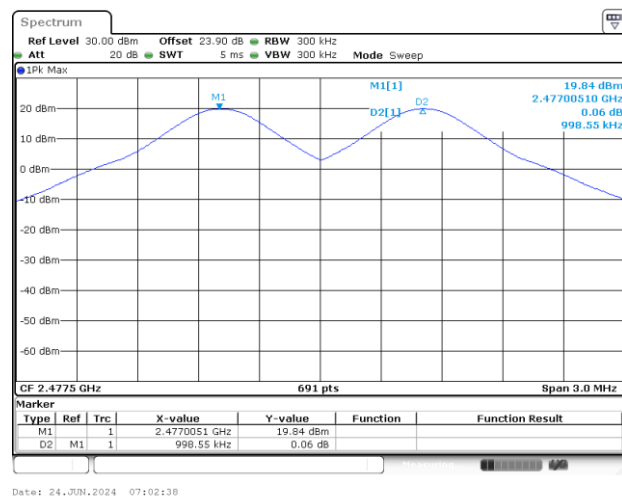


Dwell Time

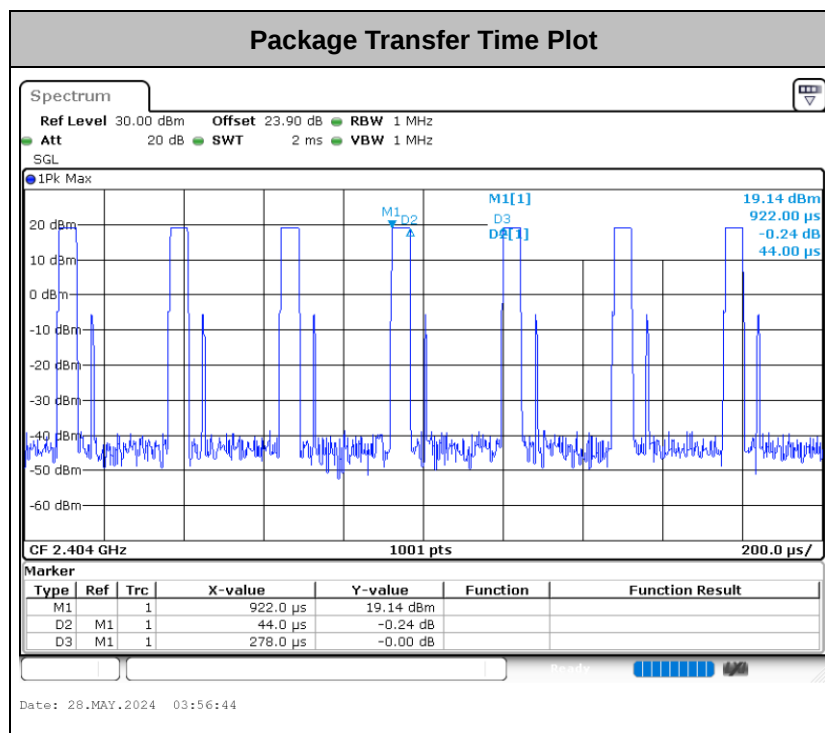

Remark:

- Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time
= 1802 x 0.044 ms = 0.079 sec
- The observation Occupancy time is hopping channel 72 channels x 400ms = 28.8sec using sweep point 30,000. This shows that 1ms per on-time contains 1 hop. The total hops is finally counted via computer analysis.

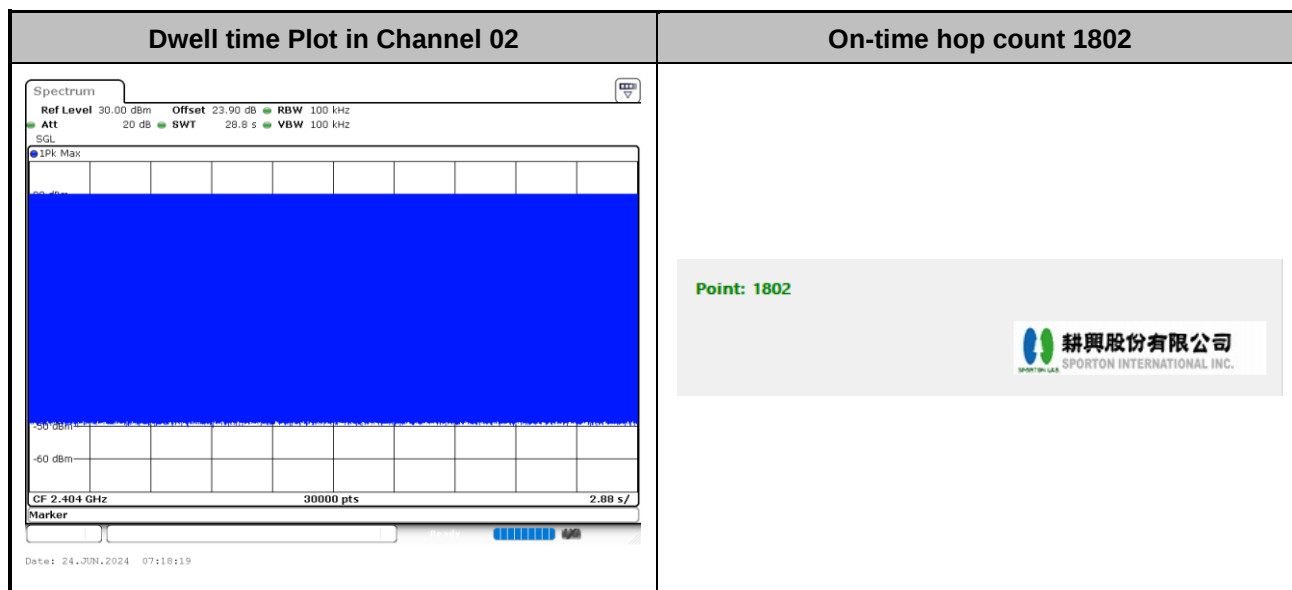





20dB Bandwidth

<1Mbps>


20 dB Bandwidth Plot in Channel 02

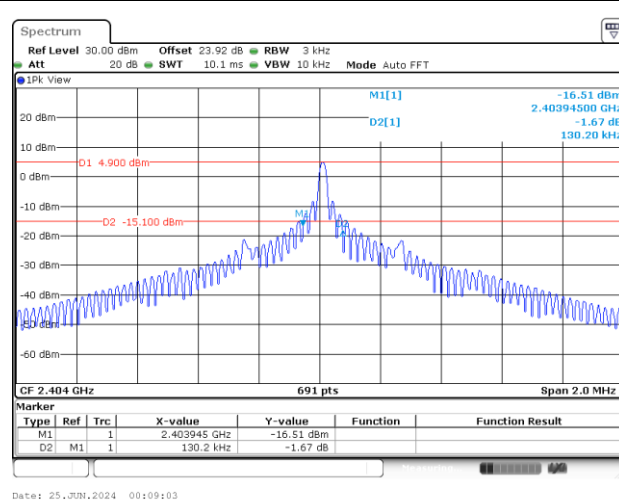

20 dB Bandwidth Plot in Channel 38

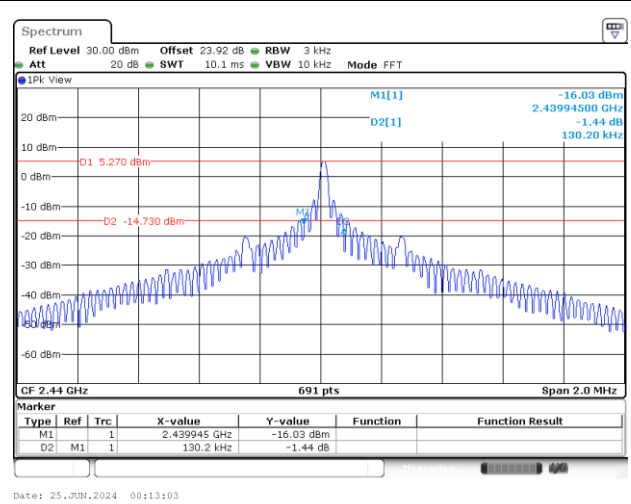


20 dB Bandwidth Plot in Channel 76

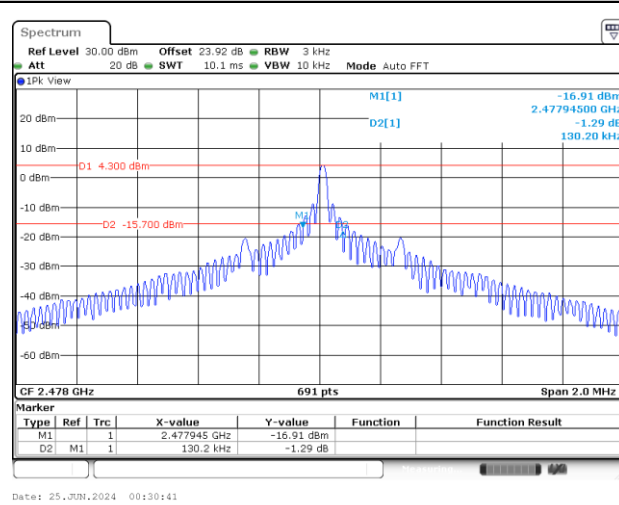




<2Mbps>


20 dB Bandwidth Plot in Channel 02

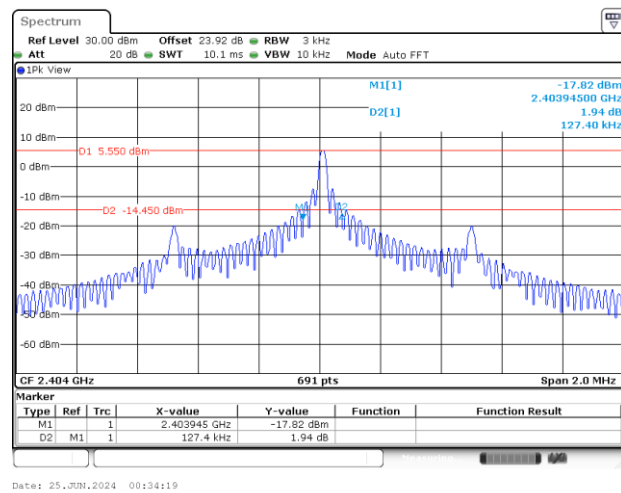

20 dB Bandwidth Plot in Channel 38

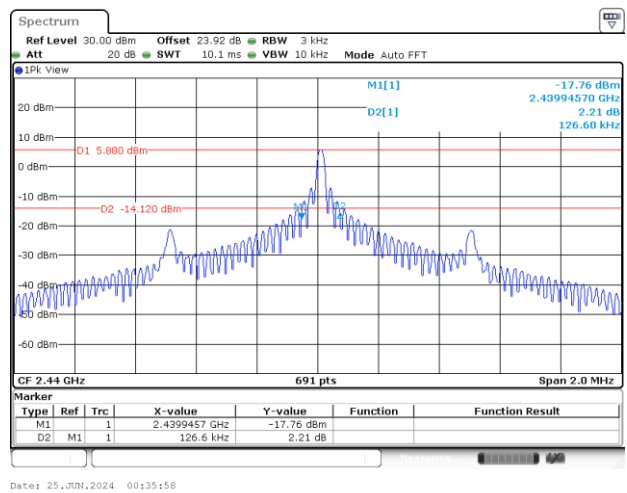

20 dB Bandwidth Plot in Channel 76

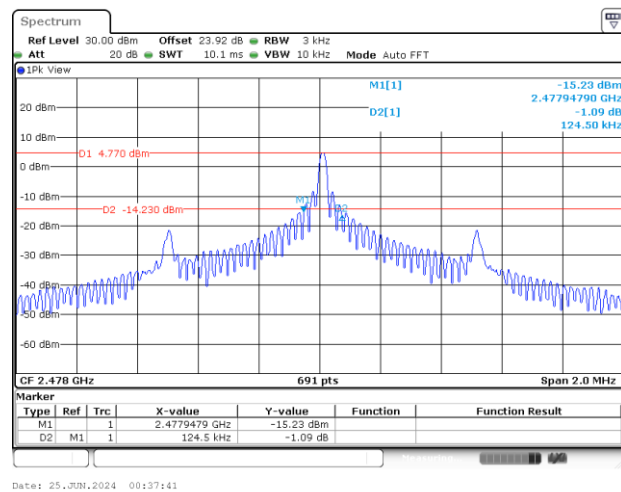





99% Occupied Bandwidth

<1Mbps>


99% Occupied Bandwidth on Channel 02

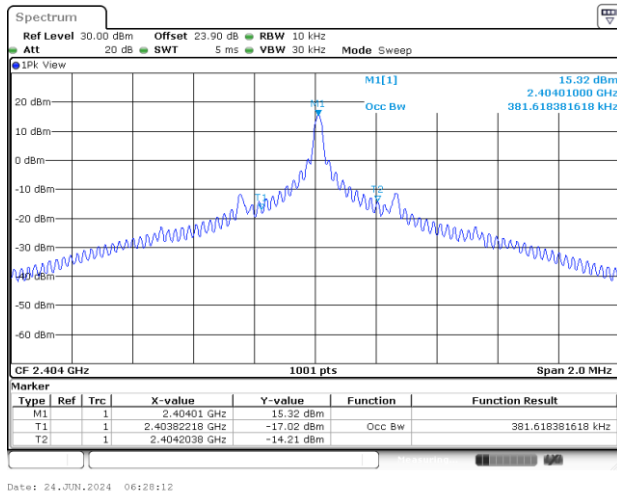

99% Occupied Bandwidth on Channel 38

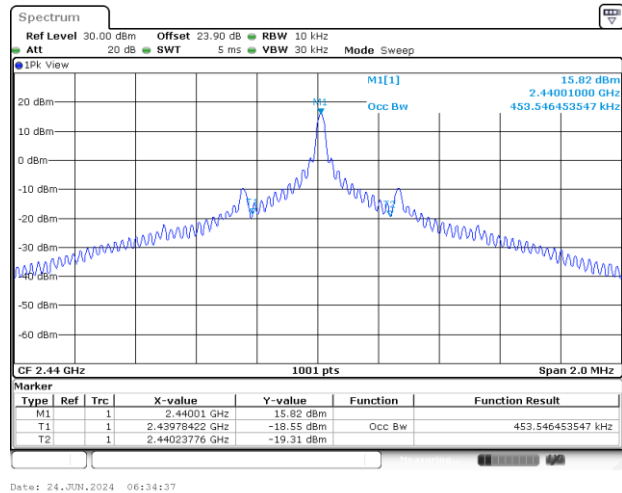


99% Occupied Bandwidth on Channel 76

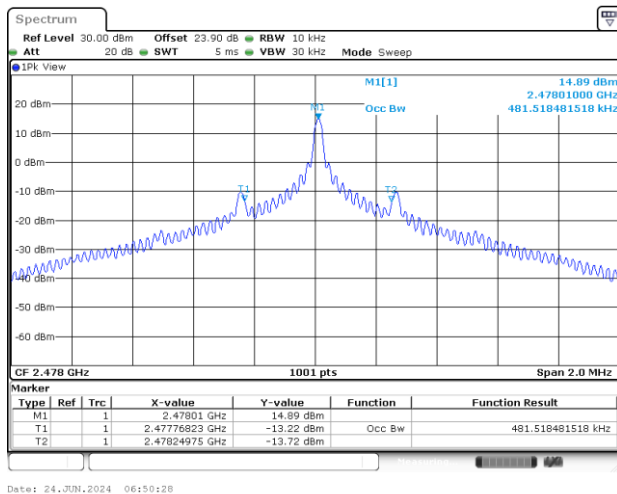




<2Mbps>


99% Occupied Bandwidth on Channel 02

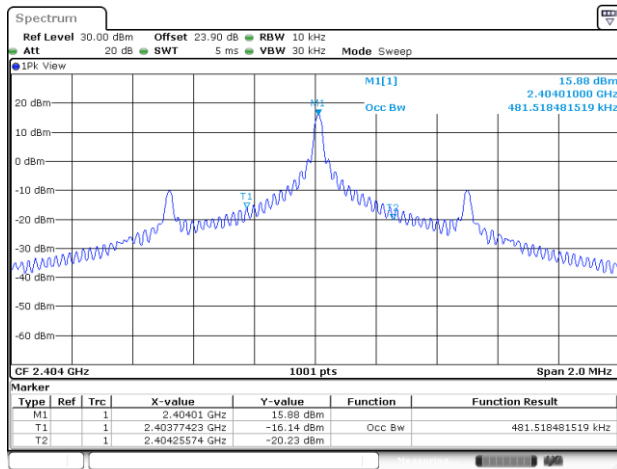

99% Occupied Bandwidth on Channel 38

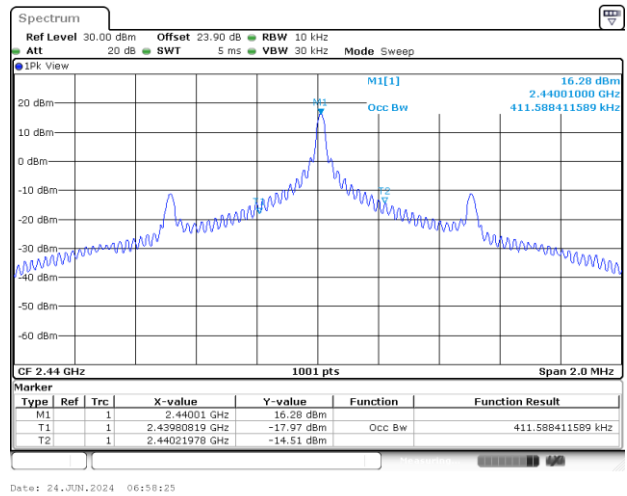


99% Occupied Bandwidth on Channel 76

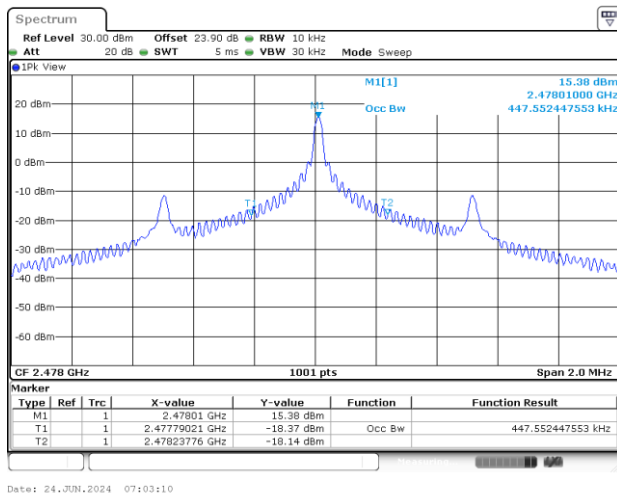




Band Edges

<1Mbps>

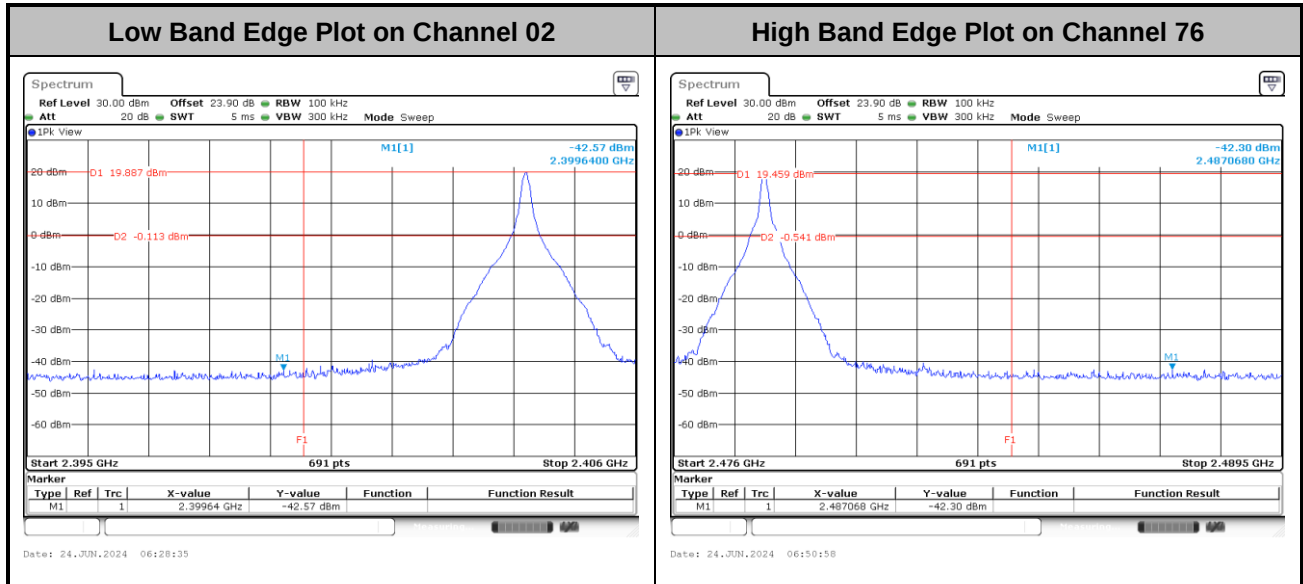


<2Mbps>

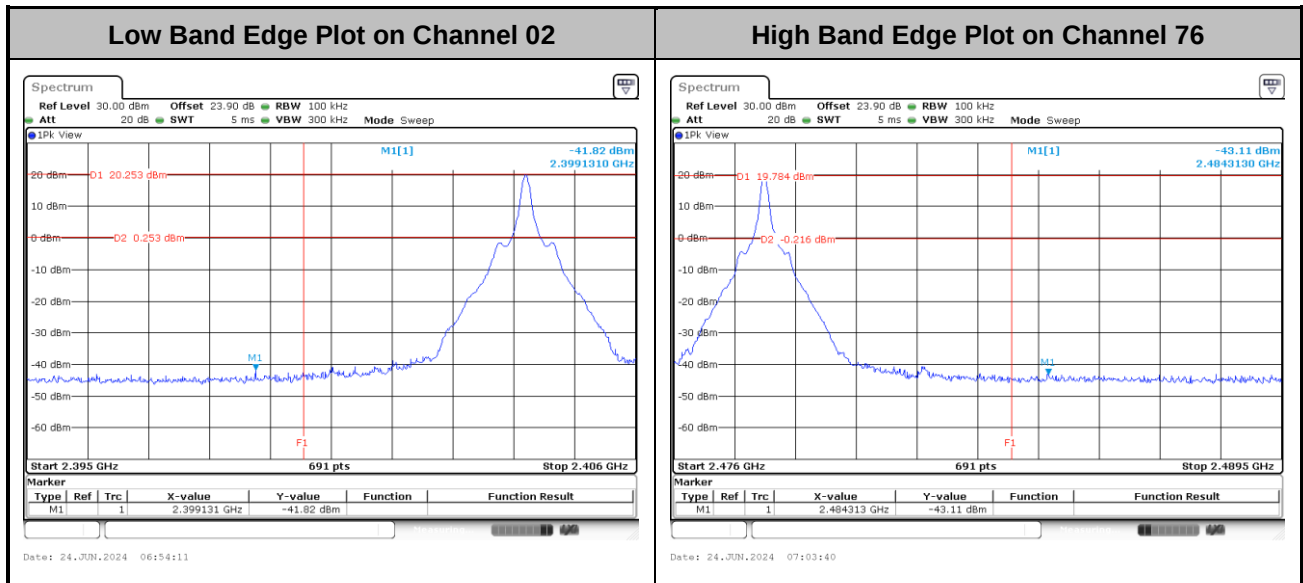




Hopping Mode Band Edges

<1Mbps>

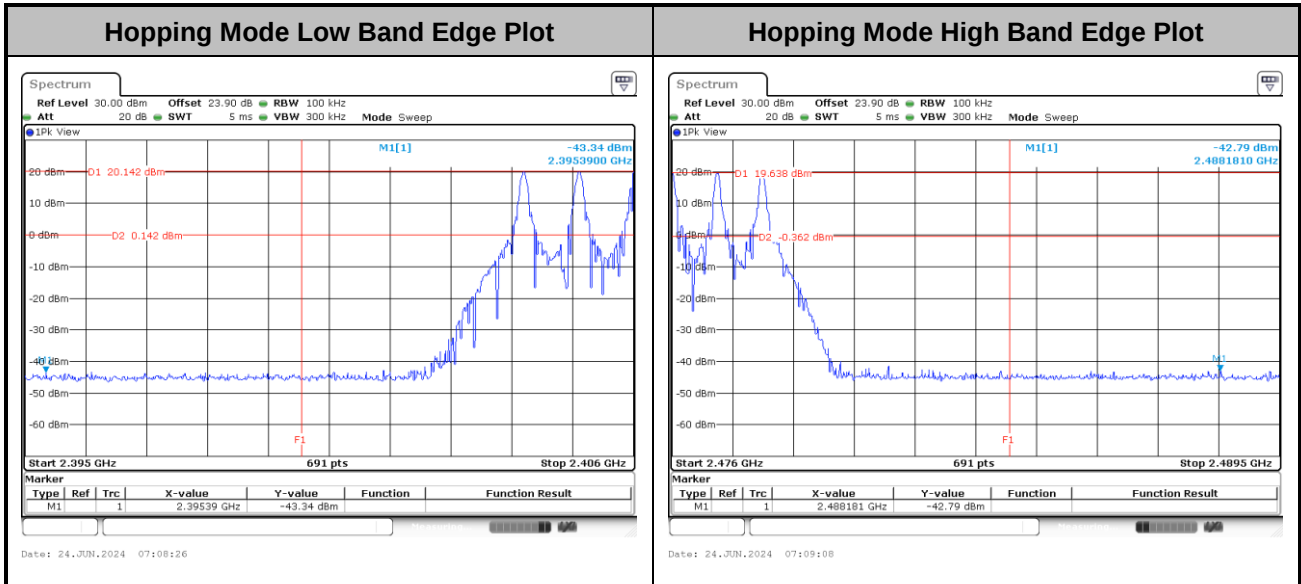

<2Mbps>

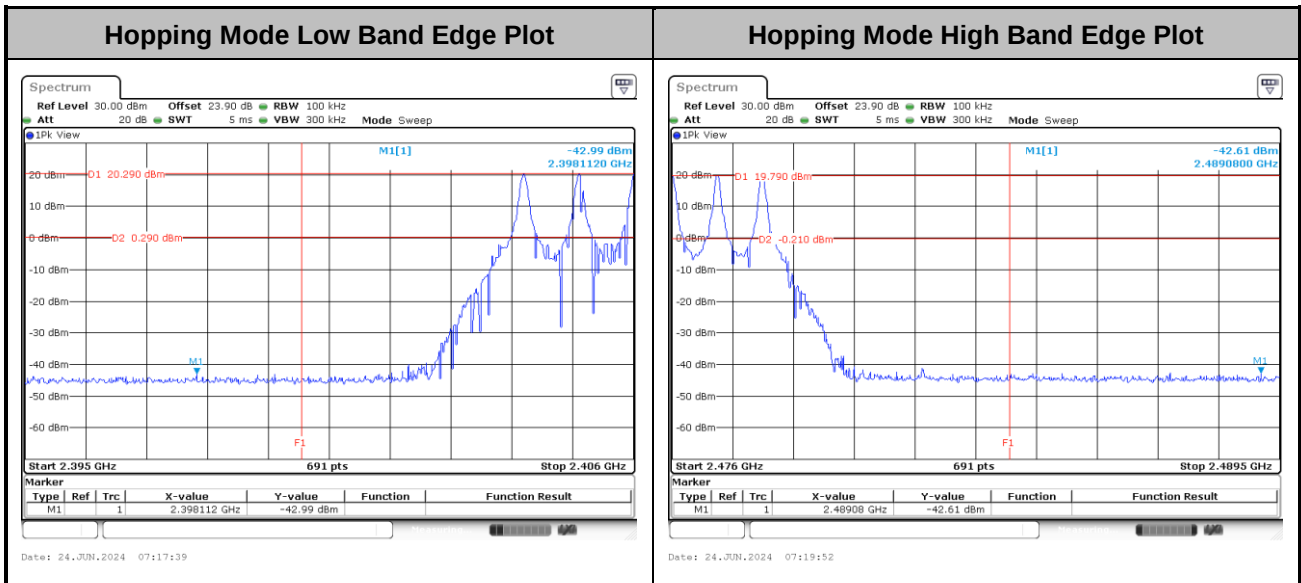





Conducted Spurious Emission

<1Mbps>


CSE Plot on Low Ch between 30MHz ~ 1 GHz

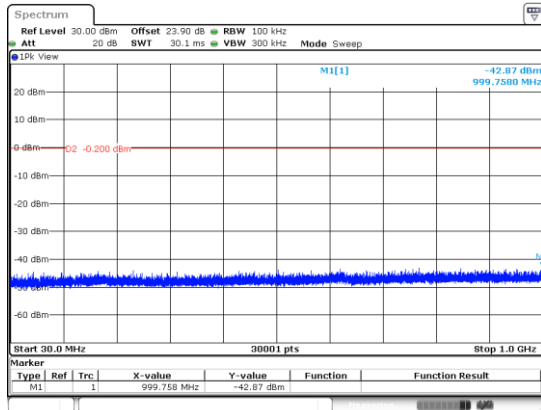


CSE Plot on Low Ch between 1GHz ~ 26.5GHz

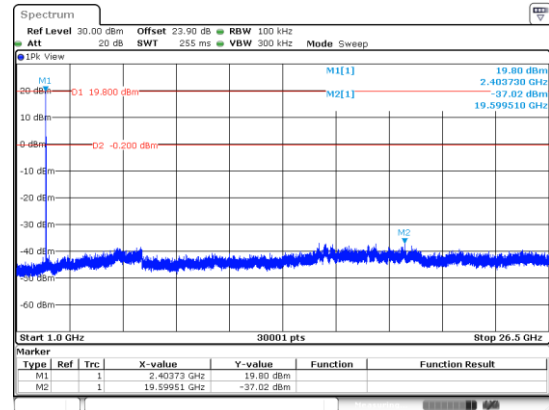


CSE Plot on Mid. Ch between 30MHz ~ 1 GHz

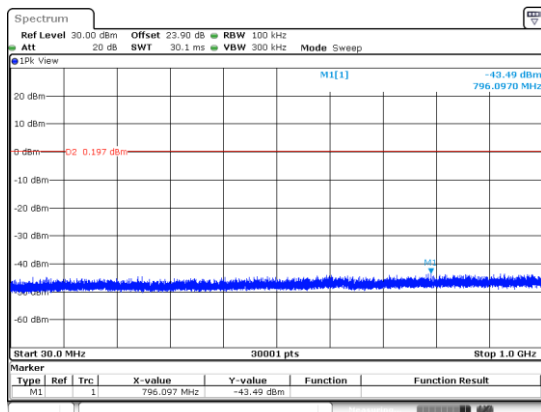


CSE Plot on Mid. Ch between 1GHz ~ 26.5GHz

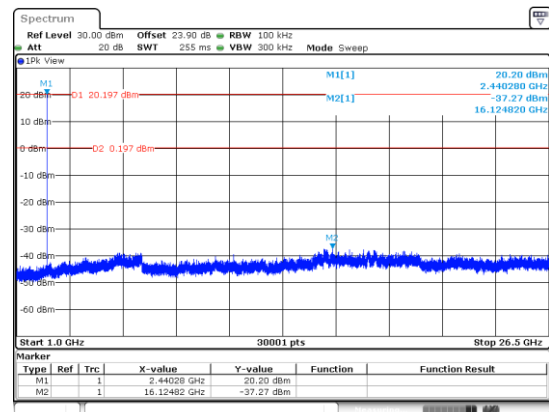

CSE Plot on High Ch between 30MHz ~ 1 GHz

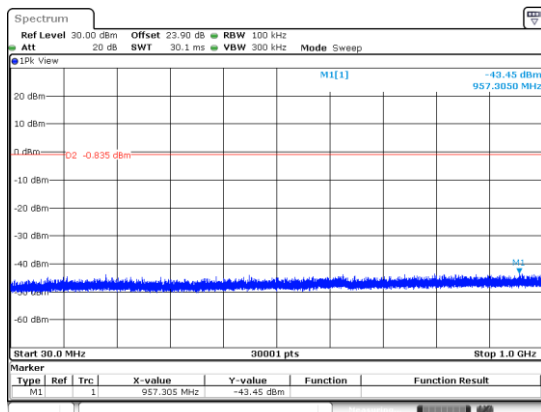


CSE Plot on High Ch between 1GHz ~ 26.5GHz

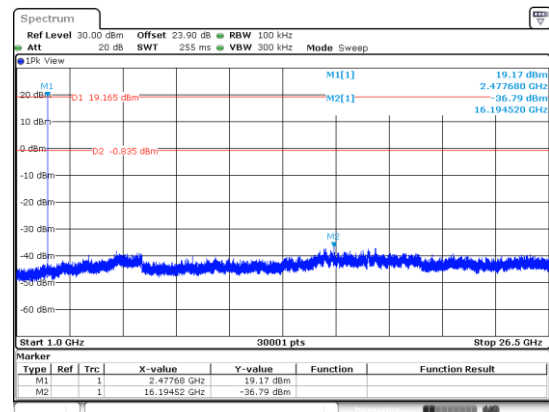




<2Mbps>

CSE Plot on Low Ch between 30MHz ~ 1 GHz

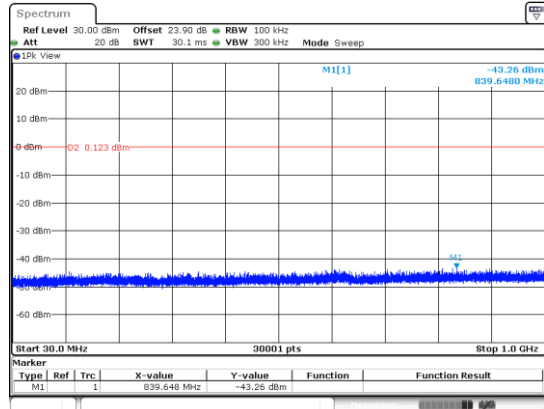


Date: 24 JUN 2024 06:55:31

CSE Plot on Low Ch between 1GHz ~ 26.5GHz

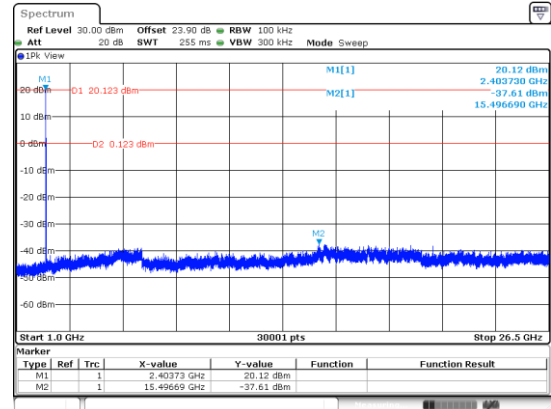


Date: 24 JUN 2024 06:55:03

CSE Plot on Mid. Ch between 30MHz ~ 1 GHz

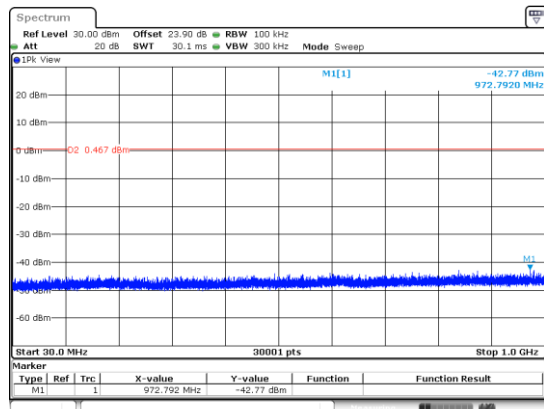


Date: 24 JUN 2024 06:59:38

CSE Plot on Mid. Ch between 1GHz ~ 26.5GHz

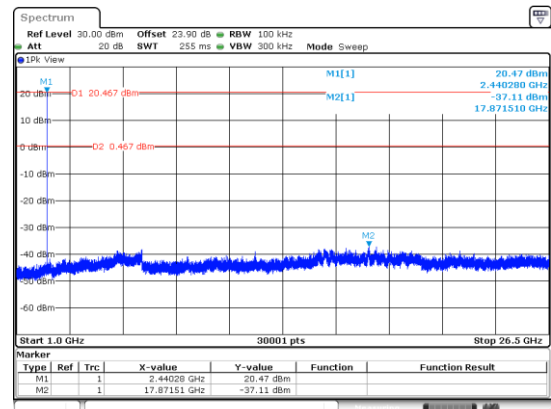


Date: 24 JUN 2024 06:59:13

CSE Plot on High Ch between 30MHz ~ 1 GHz

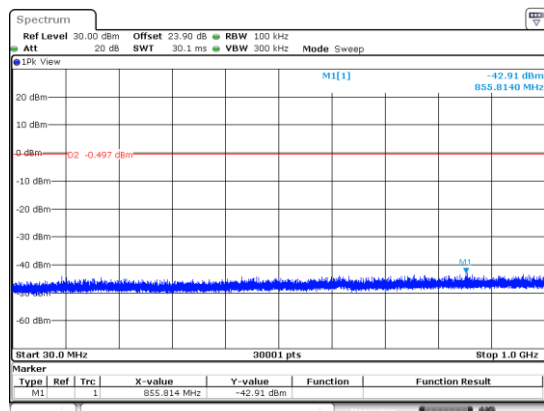

Date: 24 JUN 2024 07:05:14

CSE Plot on High Ch between 1GHz ~ 26.5GHz

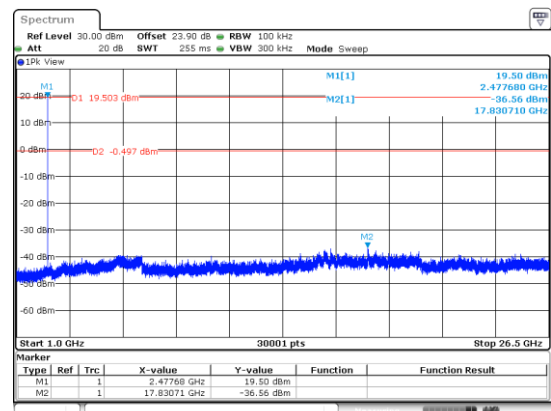

Date: 24 JUN 2024 07:04:44



Appendix B. AC Conducted Emission Test Results


Test Engineer :	Calvin Wang	Temperature :	23~26℃
		Relative Humidity :	45~55%

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

451606
Mode 1
120Vac/60Hz
Line

Full Spectrum

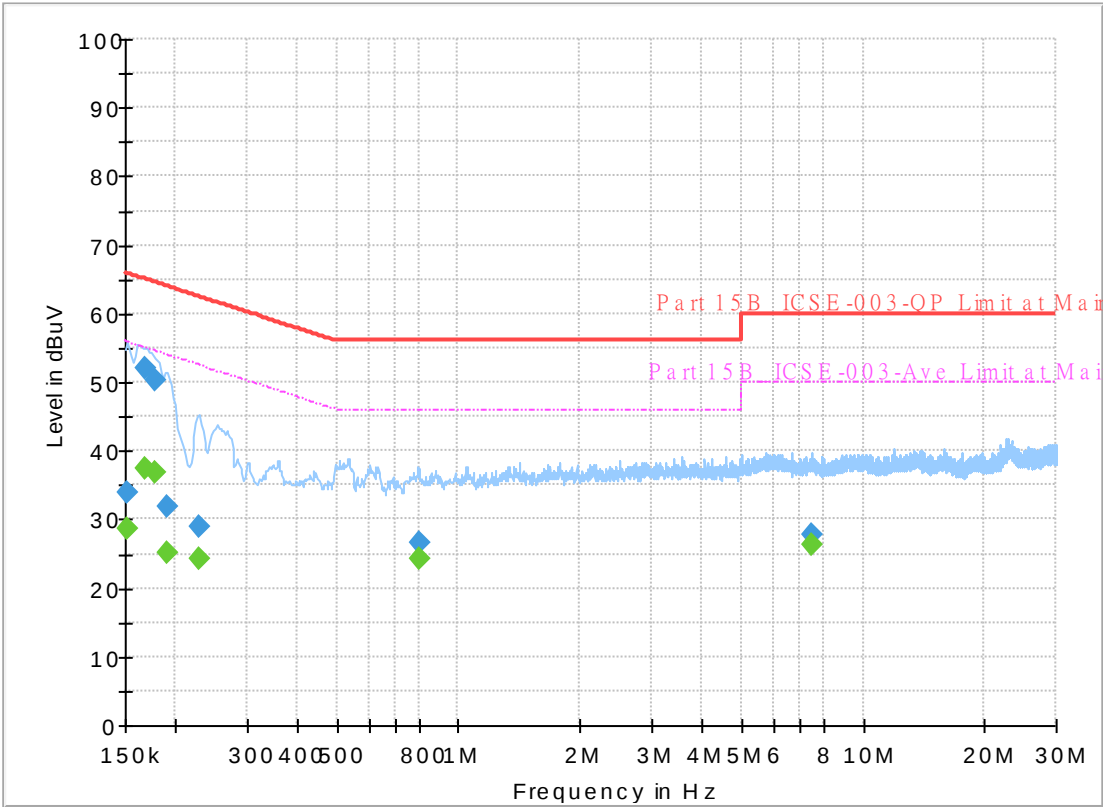

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	28.62	55.88	27.26	L1	OFF	19.8
0.152250	33.80	---	65.88	32.08	L1	OFF	19.8
0.168000	---	37.53	55.06	17.53	L1	OFF	19.8
0.168000	52.02	---	65.06	13.04	L1	OFF	19.8
0.177000	---	36.95	54.63	17.68	L1	OFF	19.8
0.177000	50.40	---	64.63	14.23	L1	OFF	19.8
0.190500	---	25.20	54.02	28.82	L1	OFF	19.8
0.190500	31.74	---	64.02	32.28	L1	OFF	19.8
0.228750	---	24.29	52.50	28.21	L1	OFF	19.8
0.228750	28.90	---	62.50	33.60	L1	OFF	19.8
0.798000	---	24.18	46.00	21.82	L1	OFF	19.8
0.798000	26.55	---	56.00	29.45	L1	OFF	19.8
7.471500	---	26.27	50.00	23.73	L1	OFF	20.1
7.471500	27.76	---	60.00	32.24	L1	OFF	20.1

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

451606
Mode 1
120Vac/60Hz
Neutral

Full Spectrum

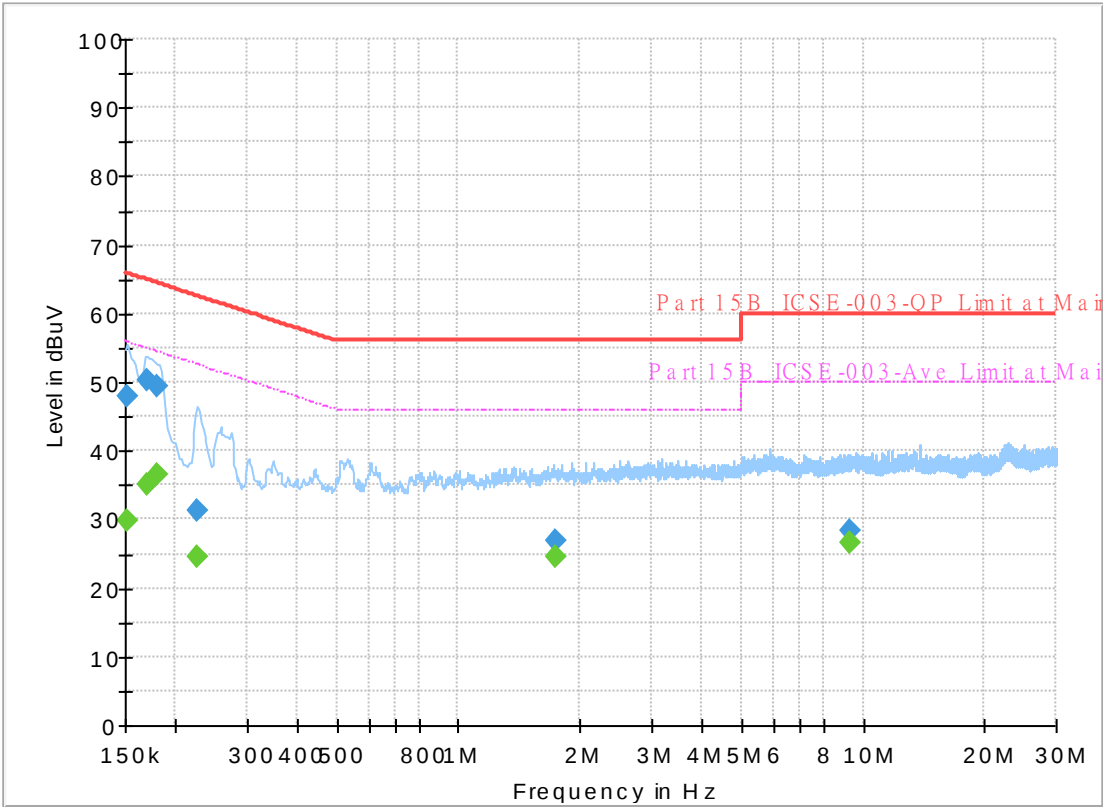

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	29.81	55.88	26.07	N	OFF	19.8
0.152250	47.86	---	65.88	18.02	N	OFF	19.8
0.170250	---	35.01	54.95	19.94	N	OFF	19.8
0.170250	50.30	---	64.95	14.65	N	OFF	19.8
0.179250	---	36.45	54.52	18.07	N	OFF	19.8
0.179250	49.53	---	64.52	14.99	N	OFF	19.8
0.226500	---	24.44	52.58	28.14	N	OFF	19.8
0.226500	31.34	---	62.58	31.24	N	OFF	19.8
1.734000	---	24.70	46.00	21.30	N	OFF	19.9
1.734000	26.92	---	56.00	29.08	N	OFF	19.9
9.289500	---	26.55	50.00	23.45	N	OFF	20.3
9.289500	28.31	---	60.00	31.69	N	OFF	20.3



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Bill Chang, Gary Guo, and Steven Wu	Temperature :	18.2~20.2℃
		Relative Humidity :	54.2~56.1%

Note symbol

-L	Low channel location
-R	High channel location

**C1. Radiated Spurious Emission Test Modes**

<Ant. 3>

<1Mbps>

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	3	Bluetooth-LE_ASK	02	2404	1Mbps	-	-
Mode 2	2400-2483.5	3	Bluetooth-LE_ASK	38	2440	1Mbps	-	-
Mode 3	2400-2483.5	3	Bluetooth-LE_ASK	76	2478	1Mbps	-	-

<2Mbps>

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 4	2400-2483.5	3	Bluetooth-LE_ASK	02	2404	2Mbps	-	-
Mode 5	2400-2483.5	3	Bluetooth-LE_ASK	38	2440	2Mbps	-	-
Mode 6	2400-2483.5	3	Bluetooth-LE_ASK	76	2478	2Mbps	-	-
Mode 13	2400-2483.5	3	Bluetooth-LE_ASK	76	2478	2Mbps	-	LF
Mode 14	2400-2483.5	3	Bluetooth-LE_ASK	76	2478	2Mbps	-	SHF

<Ant. 4>

<1Mbps>

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 7	2400-2483.5	4	Bluetooth-LE_ASK	02	2404	1Mbps	-	-
Mode 8	2400-2483.5	4	Bluetooth-LE_ASK	38	2440	1Mbps	-	-
Mode 9	2400-2483.5	4	Bluetooth-LE_ASK	76	2478	1Mbps	-	-

<2Mbps>

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 10	2400-2483.5	4	Bluetooth-LE_ASK	02	2404	2Mbps	-	-
Mode 11	2400-2483.5	4	Bluetooth-LE_ASK	38	2440	2Mbps	-	-
Mode 12	2400-2483.5	4	Bluetooth-LE_ASK	76	2478	2Mbps	-	-
Mode 15	2400-2483.5	4	Bluetooth-LE_ASK	76	2478	2Mbps	-	LF
Mode 16	2400-2483.5	4	Bluetooth-LE_ASK	76	2478	2Mbps	-	SHF

**C2. Summary of each worse mode**

<Ant. 3>

<1Mbps>

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	Bluetooth-LE_ASK	02	2388.58	56.84	74.00	-17.16	V	Peak	Pass	-	Band Edge
	Bluetooth-LE_ASK	02	4808.00	39.79	74.00	-34.21	H	Peak	Pass	-	Harmonic
2	Bluetooth-LE_ASK	38	2484.22	56.74	74.00	-17.26	H	Peak	Pass	-	Band Edge
	Bluetooth-LE_ASK	38	7320.00	45.22	74.00	-28.78	H	Peak	Pass	-	Harmonic
3	Bluetooth-LE_ASK	76	2483.57	62.63	74.00	-11.37	V	Peak	Pass	-	Band Edge
	Bluetooth-LE_ASK	76	7434.00	44.40	74.00	-29.60	H	Peak	Pass	-	Harmonic

<2Mbps>

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
4	Bluetooth-LE_ASK	02	2389.90	56.64	74.00	-17.36	V	Peak	Pass	-	Band Edge
	Bluetooth-LE_ASK	02	4808.00	39.46	74.00	-34.54	V	Peak	Pass	-	Harmonic
5	Bluetooth-LE_ASK	38	2495.86	57.15	74.00	-16.85	H	Peak	Pass	-	Band Edge
	Bluetooth-LE_ASK	38	7320.00	45.05	74.00	-28.95	V	Peak	Pass	-	Harmonic
6	Bluetooth-LE_ASK	76	2483.57	63.47	74.00	-10.53	V	Peak	Pass	-	Band Edge
	Bluetooth-LE_ASK	76	7434.00	44.71	74.00	-29.29	V	Peak	Pass	-	Harmonic
13	Bluetooth-LE_ASK	76	41.64	31.96	40.00	-8.04	V	QP	Pass	-	LF
14	Bluetooth-LE_ASK	76	24124.74	38.75	74.00	-35.25	H	Peak	Pass	-	SHF

<Ant. 4>

<1Mbps>

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
7	Bluetooth-LE_ASK	02	2382.66	56.06	74.00	-17.94	H	Peak	Pass	-	Band Edge
	Bluetooth-LE_ASK	02	4808.00	40.18	74.00	-33.82	V	Peak	Pass	-	Harmonic
8	Bluetooth-LE_ASK	38	2489.68	56.72	74.00	-17.28	V	Peak	Pass	-	Band Edge
	Bluetooth-LE_ASK	38	7320.00	46.25	74.00	-27.75	V	Peak	Pass	-	Harmonic
9	Bluetooth-LE_ASK	76	2485.06	57.82	74.00	-16.18	V	Peak	Pass	-	Band Edge
	Bluetooth-LE_ASK	76	7434.00	44.79	74.00	-29.21	V	Peak	Pass	-	Harmonic



**<2Mbps>**

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
10	Bluetooth-LE_ASK	02	2345.91	56.09	74.00	-17.91	V	Peak	Pass	-	Band Edge
	Bluetooth-LE_ASK	02	4808.00	39.42	74.00	-34.58	V	Peak	Pass	-	Harmonic
11	Bluetooth-LE_ASK	38	2489.50	56.53	74.00	-17.47	H	Peak	Pass	-	Band Edge
	Bluetooth-LE_ASK	38	7320.00	45.01	74.00	-28.99	V	Peak	Pass	-	Harmonic
12	Bluetooth-LE_ASK	76	2485.02	58.01	74.00	-15.99	H	Peak	Pass	-	Band Edge
	Bluetooth-LE_ASK	76	7434.00	43.98	74.00	-30.02	H	Peak	Pass	-	Harmonic
15	Bluetooth-LE_ASK	76	41.64	32.05	40.00	-7.95	V	QP	Pass	-	LF
16	Bluetooth-LE_ASK	76	24952.97	39.16	74.00	-34.84	H	Peak	Pass	-	SHF





<Ant. 3>



<1Mbps>

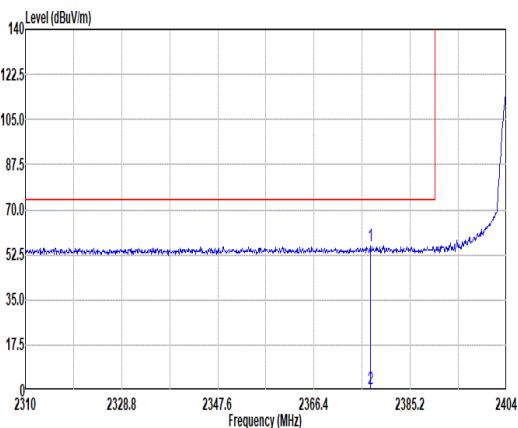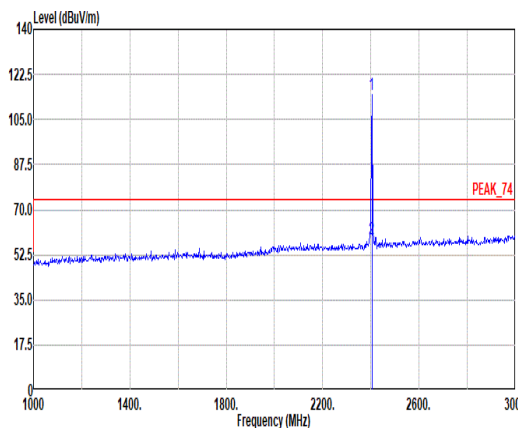Mode	1																																																																																																																													
	Band Edge																																																																																																																													
	2400-2483.5_Bluetooth-LE_ASK_CH02_2404MHz																																																																																																																													
ANT	3																																																																																																																													
Pol.	Horizontal						Fundamental																																																																																																																							
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2377.49</td><td>56.25</td><td>74.00</td><td>-17.75</td><td>41.38</td><td>27.20</td><td>7.67</td><td>29.92</td><td>9.92</td><td>298</td><td>225</td><td>PEAK</td></tr><tr><td>2</td><td>2377.49</td><td>0.33</td><td>54.00</td><td>-53.67</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2377.49	56.25	74.00	-17.75	41.38	27.20	7.67	29.92	9.92	298	225	PEAK	2	2377.49	0.33	54.00	-53.67	--	--	--	--	--	--	--	AVERAGE	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>114.59</td><td>-----</td><td>-----</td><td>99.47</td><td>27.40</td><td>7.71</td><td>29.91</td><td>9.92</td><td>298</td><td>225</td><td>PEAK</td></tr><tr><td>2</td><td>2404.00</td><td>58.67</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	114.59	-----	-----	99.47	27.40	7.71	29.91	9.92	298	225	PEAK	2	2404.00	58.67	-----	-----	--	--	--	--	--	--	--	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2377.49	56.25	74.00	-17.75	41.38	27.20	7.67	29.92	9.92	298	225	PEAK																																																																																																																		
2	2377.49	0.33	54.00	-53.67	--	--	--	--	--	--	--	AVERAGE																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2404.00	114.59	-----	-----	99.47	27.40	7.71	29.91	9.92	298	225	PEAK																																																																																																																		
2	2404.00	58.67	-----	-----	--	--	--	--	--	--	--	AVERAGE																																																																																																																		



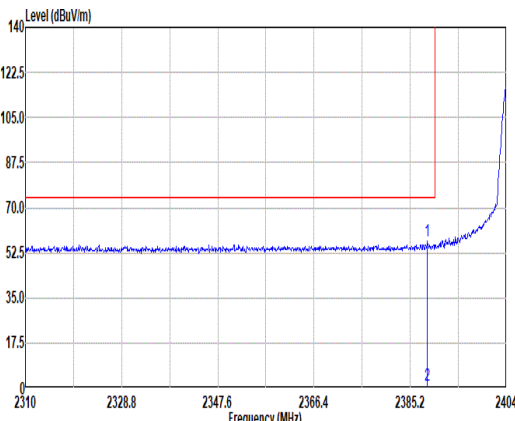
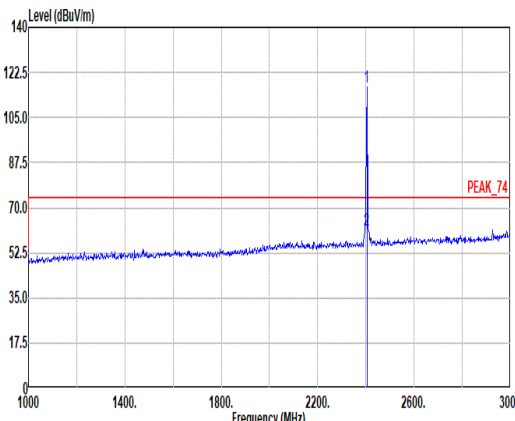


Mode	1																																																																																																																												
	Band Edge																																																																																																																												
	2400-2483.5_Bluetooth-LE_ASK_CH02_2404MHz																																																																																																																												
ANT	3																																																																																																																												
Pol.	Vertical						Fundamental																																																																																																																						
Peak																																																																																																																													
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.58</td><td>56.84</td><td>74.00</td><td>-17.16</td><td>41.85</td><td>27.29</td><td>7.69</td><td>29.91</td><td>9.92</td><td>105</td><td>293</td><td>PEAK</td></tr><tr><td>2</td><td>2388.58</td><td>0.92</td><td>54.00</td><td>-53.08</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.58	56.84	74.00	-17.16	41.85	27.29	7.69	29.91	9.92	105	293	PEAK	2	2388.58	0.92	54.00	-53.08	--	--	--	--	--	--	--	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>116.96</td><td>-----</td><td>-----</td><td>101.84</td><td>27.40</td><td>7.71</td><td>29.91</td><td>9.92</td><td>105</td><td>293</td><td>PEAK</td></tr><tr><td>2</td><td>2404.00</td><td>61.04</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	116.96	-----	-----	101.84	27.40	7.71	29.91	9.92	105	293	PEAK	2	2404.00	61.04	-----	-----	--	--	--	--	--	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	2388.58	56.84	74.00	-17.16	41.85	27.29	7.69	29.91	9.92	105	293	PEAK																																																																																																																	
2	2388.58	0.92	54.00	-53.08	--	--	--	--	--	--	--	AVERAGE																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	2404.00	116.96	-----	-----	101.84	27.40	7.71	29.91	9.92	105	293	PEAK																																																																																																																	
2	2404.00	61.04	-----	-----	--	--	--	--	--	--	--	AVERAGE																																																																																																																	

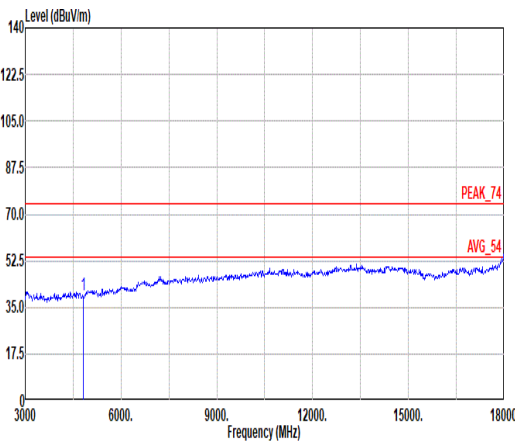
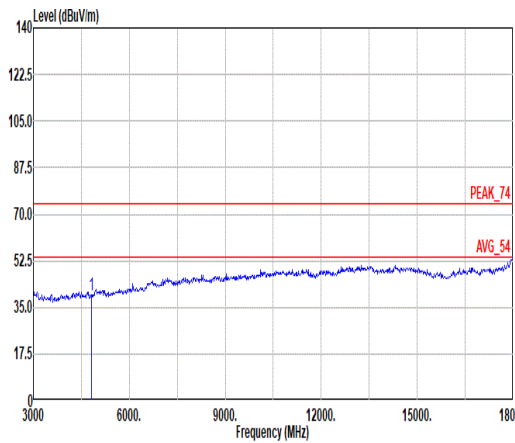


Mode	1																																																																	
	Harmonic																																																																	
	2400-2483.5_Bluetooth-LE_ASK_CH02_2404MHz																																																																	
ANT	3																																																																	
Pol.	Horizontal						Vertical																																																											
Peak Avg.																																																																		
	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4808.00</td><td>39.79</td><td>74.00</td><td>-34.21</td><td>62.49</td><td>32.33</td><td>10.69</td><td>66.16</td><td>0.44</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>4808.00</td><td>-16.13</td><td>54.00</td><td>-70.13</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4808.00	39.79	74.00	-34.21	62.49	32.33	10.69	66.16	0.44	--	PEAK	2	4808.00	-16.13	54.00	-70.13	--	--	--	--	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	4808.00	39.79	74.00	-34.21	62.49	32.33	10.69	66.16	0.44	--	PEAK																																																							
2	4808.00	-16.13	54.00	-70.13	--	--	--	--	--	--	AVERAGE																																																							
Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL																																																																		
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4808.00</td><td>39.57</td><td>74.00</td><td>-34.43</td><td>62.27</td><td>32.33</td><td>10.69</td><td>66.16</td><td>0.44</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>4808.00</td><td>-16.35</td><td>54.00</td><td>-70.35</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4808.00	39.57	74.00	-34.43	62.27	32.33	10.69	66.16	0.44	--	PEAK	2	4808.00	-16.35	54.00	-70.35	--	--	--	--	--	--	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	4808.00	39.57	74.00	-34.43	62.27	32.33	10.69	66.16	0.44	--	PEAK																																																							
2	4808.00	-16.35	54.00	-70.35	--	--	--	--	--	--	AVERAGE																																																							

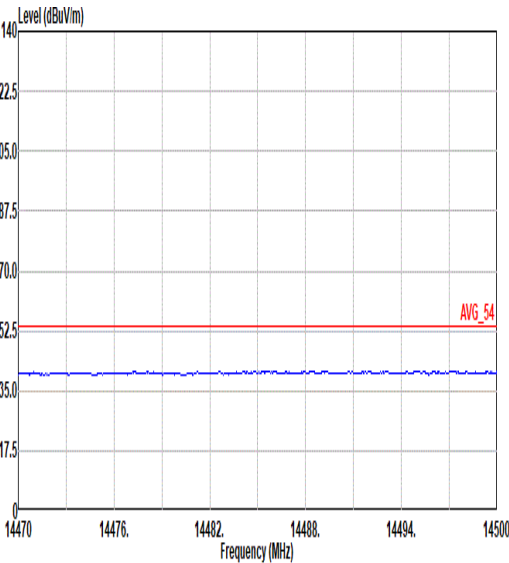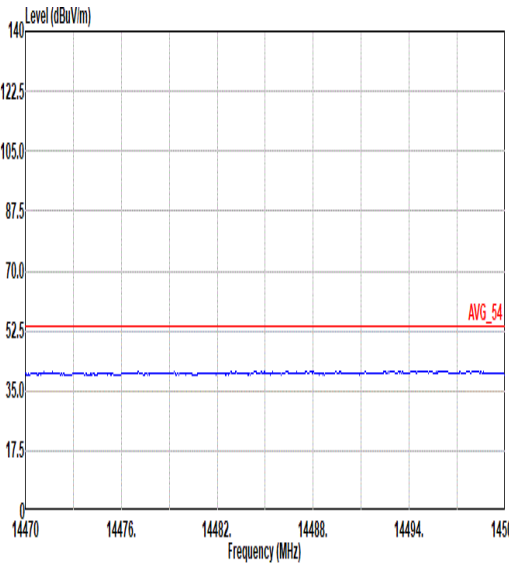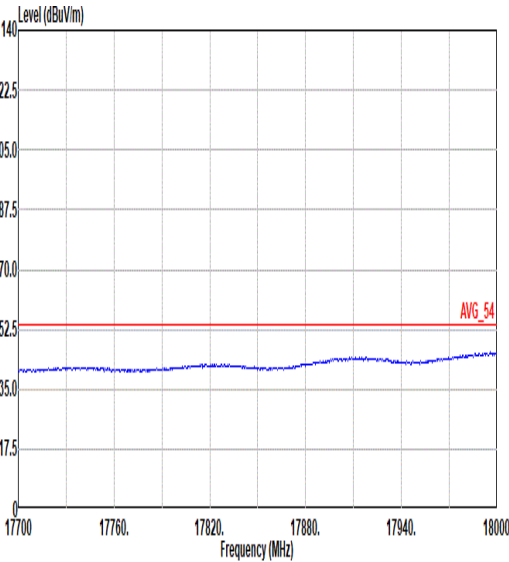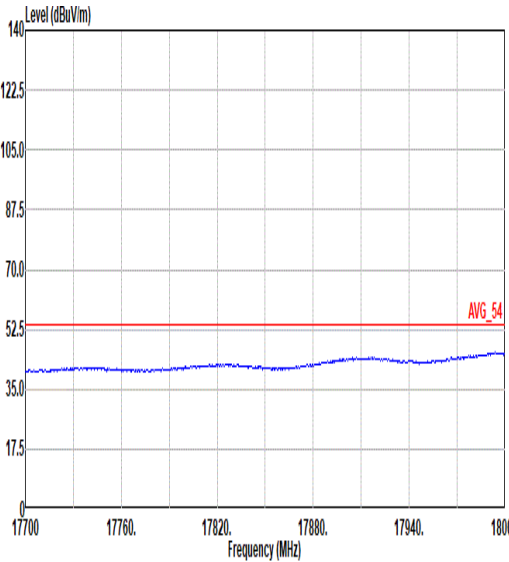


Mode	1	
	Harmonic	
	2400-2483.5_Bluetooth-LE_ASK_CH02_2404MHz	
ANT	3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg.	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL
17.7G ~18G Avg.	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL

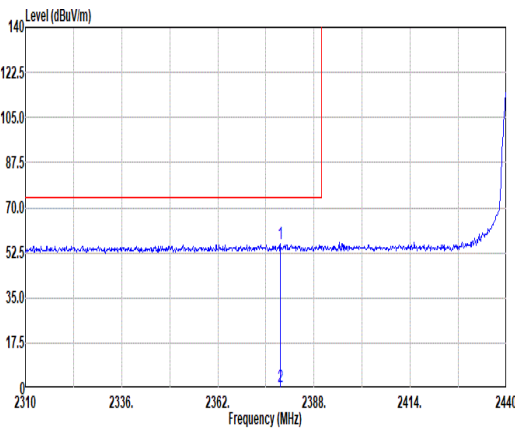
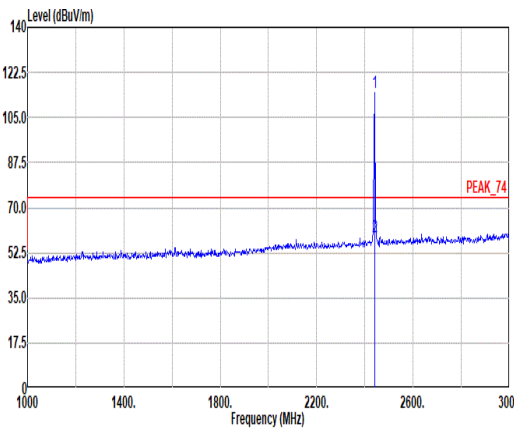


Mode	2																																																																																																																												
	Band Edge - L																																																																																																																												
	2400-2483.5_Bluetooth-LE_ASK_CH38_2440MHz																																																																																																																												
ANT	3																																																																																																																												
Pol.	Horizontal						Fundamental																																																																																																																						
Peak																																																																																																																													
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2378.90</td><td>56.19</td><td>74.00</td><td>-17.81</td><td>41.32</td><td>27.20</td><td>7.67</td><td>29.92</td><td>9.92</td><td>294</td><td>227</td><td>PEAK</td></tr><tr><td>2</td><td>2378.90</td><td>0.27</td><td>54.00</td><td>-53.73</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2378.90	56.19	74.00	-17.81	41.32	27.20	7.67	29.92	9.92	294	227	PEAK	2	2378.90	0.27	54.00	-53.73	--	--	--	--	--	--	--	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>114.70</td><td>-----</td><td>-----</td><td>99.40</td><td>27.60</td><td>7.68</td><td>29.90</td><td>9.92</td><td>294</td><td>227</td><td>PEAK</td></tr><tr><td>2</td><td>2440.00</td><td>58.78</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	114.70	-----	-----	99.40	27.60	7.68	29.90	9.92	294	227	PEAK	2	2440.00	58.78	-----	-----	--	--	--	--	--	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	2378.90	56.19	74.00	-17.81	41.32	27.20	7.67	29.92	9.92	294	227	PEAK																																																																																																																	
2	2378.90	0.27	54.00	-53.73	--	--	--	--	--	--	--	AVERAGE																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	2440.00	114.70	-----	-----	99.40	27.60	7.68	29.90	9.92	294	227	PEAK																																																																																																																	
2	2440.00	58.78	-----	-----	--	--	--	--	--	--	--	AVERAGE																																																																																																																	

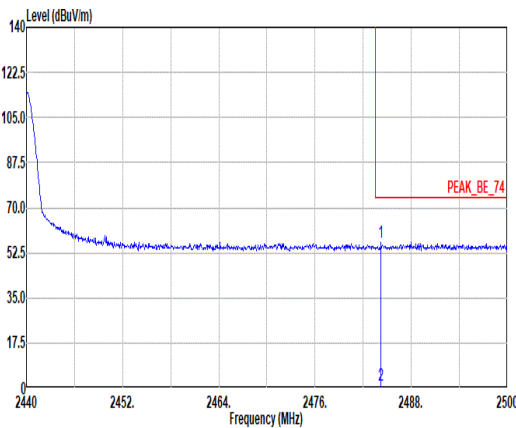


Mode	2																																																										
	Band Edge - R																																																										
	2400-2483.5_Bluetooth-LE_ASK_CH38_2440MHz																																																										
ANT	3																																																										
Pol.	Horizontal	Fundamental																																																									
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.22</td><td>56.74</td><td>74.00</td><td>-17.26</td><td>41.36</td><td>27.70</td><td>7.64</td><td>29.88</td><td>9.92</td><td>294</td><td>227</td><td>PEAK</td></tr><tr><td>2</td><td>2484.22</td><td>0.82</td><td>54.00</td><td>-53.18</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2484.22	56.74	74.00	-17.26	41.36	27.70	7.64	29.88	9.92	294	227	PEAK	2	2484.22	0.82	54.00	-53.18	--	--	--	--	--	--	--	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																		
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																	
1	2484.22	56.74	74.00	-17.26	41.36	27.70	7.64	29.88	9.92	294	227	PEAK																																															
2	2484.22	0.82	54.00	-53.18	--	--	--	--	--	--	--	AVERAGE																																															

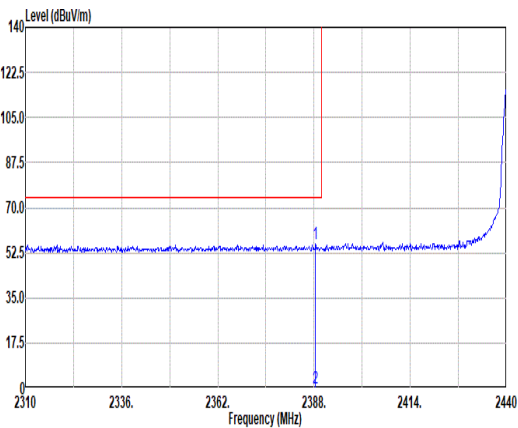
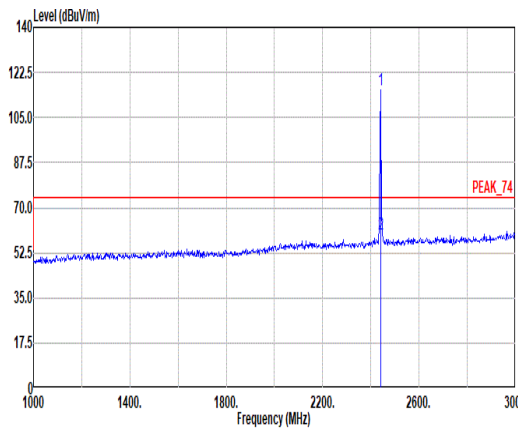


Mode	2																																																																																																																								
	Band Edge - L																																																																																																																								
	2400-2483.5_Bluetooth-LE_ASK_CH38_2440MHz																																																																																																																								
ANT	3																																																																																																																								
Pol.	Vertical						Fundamental																																																																																																																		
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.39</td><td>55.89</td><td>74.00</td><td>-18.11</td><td>40.91</td><td>27.28</td><td>7.69</td><td>29.91</td><td>9.92</td><td>101</td><td>294 PEAK</td></tr><tr><td>2</td><td>2388.39</td><td>-0.03</td><td>54.00</td><td>-54.03</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.39	55.89	74.00	-18.11	40.91	27.28	7.69	29.91	9.92	101	294 PEAK	2	2388.39	-0.03	54.00	-54.03	--	--	--	--	--	--	AVERAGE	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>115.74</td><td>-----</td><td>-----</td><td>100.44</td><td>27.60</td><td>7.68</td><td>29.90</td><td>9.92</td><td>101</td><td>294 PEAK</td></tr><tr><td>2</td><td>2440.00</td><td>59.82</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	115.74	-----	-----	100.44	27.60	7.68	29.90	9.92	101	294 PEAK	2	2440.00	59.82	-----	-----	--	--	--	--	--	--	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	2388.39	55.89	74.00	-18.11	40.91	27.28	7.69	29.91	9.92	101	294 PEAK																																																																																																														
2	2388.39	-0.03	54.00	-54.03	--	--	--	--	--	--	AVERAGE																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	2440.00	115.74	-----	-----	100.44	27.60	7.68	29.90	9.92	101	294 PEAK																																																																																																														
2	2440.00	59.82	-----	-----	--	--	--	--	--	--	AVERAGE																																																																																																														




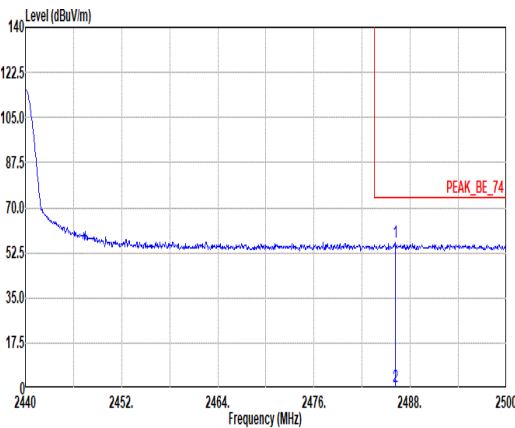


Mode	2																																																										
	Band Edge - R																																																										
	2400-2483.5_Bluetooth-LE_ASK_CH38_2440MHz																																																										
ANT	3																																																										
Pol.	Vertical	Fundamental																																																									
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240320 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.14</td><td>56.41</td><td>74.00</td><td>-17.59</td><td>41.03</td><td>27.70</td><td>7.64</td><td>29.88</td><td>9.92</td><td>101</td><td>294</td><td>PEAK</td></tr><tr><td>2</td><td>2486.14</td><td>0.49</td><td>54.00</td><td>-53.51</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.14	56.41	74.00	-17.59	41.03	27.70	7.64	29.88	9.92	101	294	PEAK	2	2486.14	0.49	54.00	-53.51	--	--	--	--	--	--	--	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	2486.14	56.41	74.00	-17.59	41.03	27.70	7.64	29.88	9.92	101	294	PEAK																																															
2	2486.14	0.49	54.00	-53.51	--	--	--	--	--	--	--	AVERAGE																																															

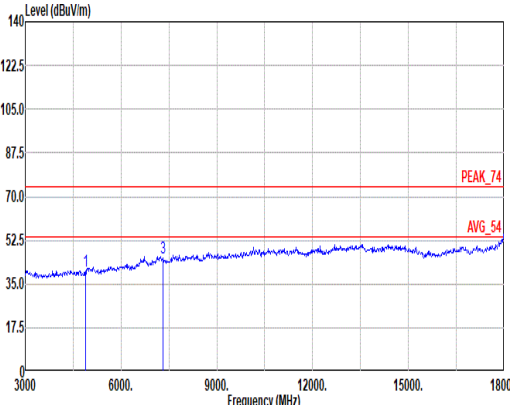
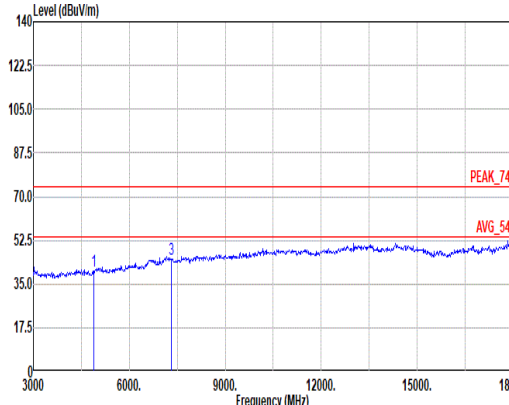


Mode	2																																																																																									
	Harmonic																																																																																									
	2400-2483.5_Bluetooth-LE_ASK_CH38_2440MHz																																																																																									
ANT	3																																																																																									
Pol.	Horizontal																																																																																									
Peak Avg.																																																																																										
	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>40.37</td><td>74.00</td><td>-33.63</td><td>62.45</td><td>32.62</td><td>10.88</td><td>66.02</td><td>0.44</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>-15.55</td><td>54.00</td><td>-69.55</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr><tr><td>3</td><td>7320.00</td><td>45.22</td><td>74.00</td><td>-28.78</td><td>60.10</td><td>36.78</td><td>13.36</td><td>65.46</td><td>0.44</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>7320.00</td><td>-10.70</td><td>54.00</td><td>-64.70</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	40.37	74.00	-33.63	62.45	32.62	10.88	66.02	0.44	--	PEAK	2	4880.00	-15.55	54.00	-69.55	--	--	--	--	--	--	AVERAGE	3	7320.00	45.22	74.00	-28.78	60.10	36.78	13.36	65.46	0.44	--	PEAK	4	7320.00	-10.70	54.00	-64.70	--	--	--	--	--	--	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	4880.00	40.37	74.00	-33.63	62.45	32.62	10.88	66.02	0.44	--	PEAK																																																																															
2	4880.00	-15.55	54.00	-69.55	--	--	--	--	--	--	AVERAGE																																																																															
3	7320.00	45.22	74.00	-28.78	60.10	36.78	13.36	65.46	0.44	--	PEAK																																																																															
4	7320.00	-10.70	54.00	-64.70	--	--	--	--	--	--	AVERAGE																																																																															
Vertical																																																																																										
																																																																																										
Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL																																																																																										
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>40.15</td><td>74.00</td><td>-33.85</td><td>62.23</td><td>32.62</td><td>10.88</td><td>66.02</td><td>0.44</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>-15.77</td><td>54.00</td><td>-69.77</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr><tr><td>3</td><td>7320.00</td><td>45.01</td><td>74.00</td><td>-28.99</td><td>59.09</td><td>36.78</td><td>13.36</td><td>65.46</td><td>0.44</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>7320.00</td><td>-10.91</td><td>54.00</td><td>-64.91</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	40.15	74.00	-33.85	62.23	32.62	10.88	66.02	0.44	--	PEAK	2	4880.00	-15.77	54.00	-69.77	--	--	--	--	--	--	AVERAGE	3	7320.00	45.01	74.00	-28.99	59.09	36.78	13.36	65.46	0.44	--	PEAK	4	7320.00	-10.91	54.00	-64.91	--	--	--	--	--	--	AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	4880.00	40.15	74.00	-33.85	62.23	32.62	10.88	66.02	0.44	--	PEAK																																																																															
2	4880.00	-15.77	54.00	-69.77	--	--	--	--	--	--	AVERAGE																																																																															
3	7320.00	45.01	74.00	-28.99	59.09	36.78	13.36	65.46	0.44	--	PEAK																																																																															
4	7320.00	-10.91	54.00	-64.91	--	--	--	--	--	--	AVERAGE																																																																															

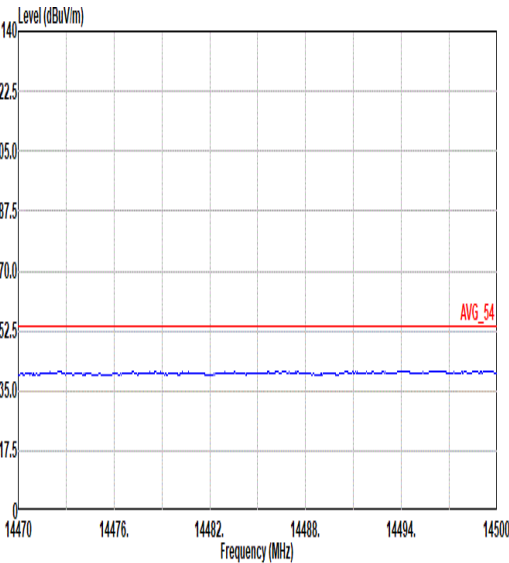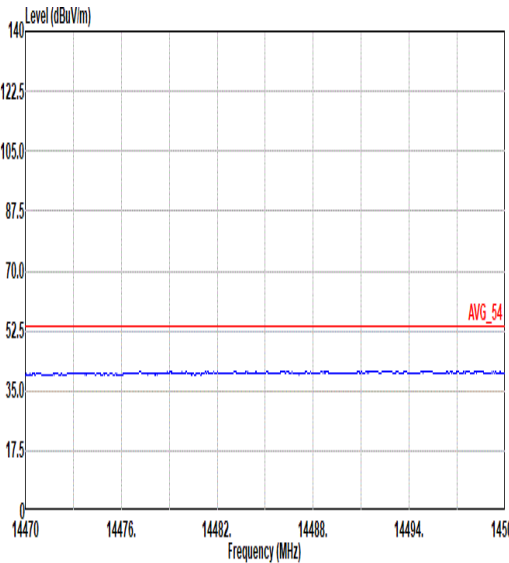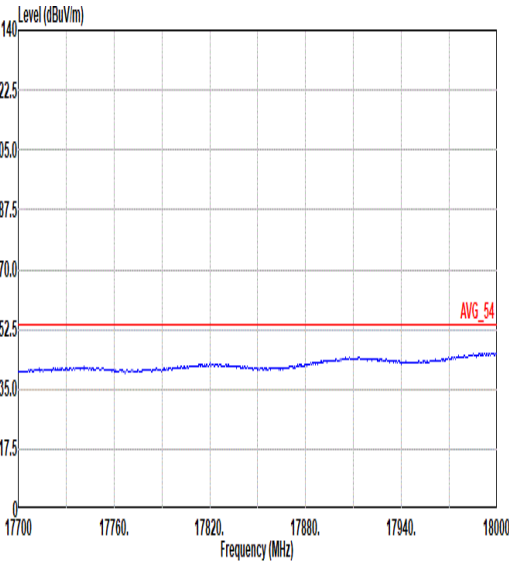
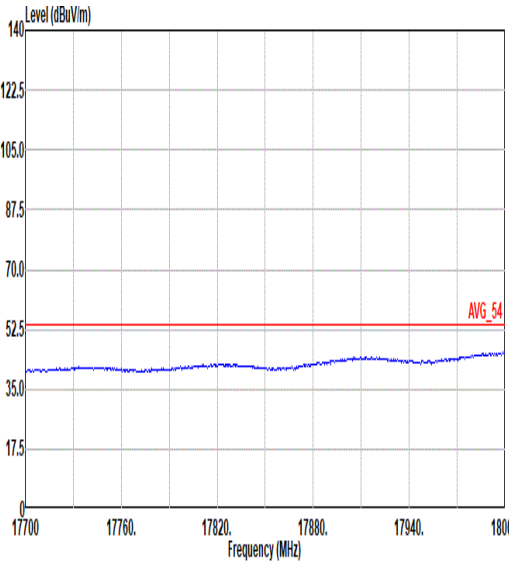


Mode	2	
	Harmonic	
	2400-2483.5_Bluetooth-LE_ASK_CH38_2440MHz	
ANT	3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg.	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL
17.7G ~18G Avg.	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL

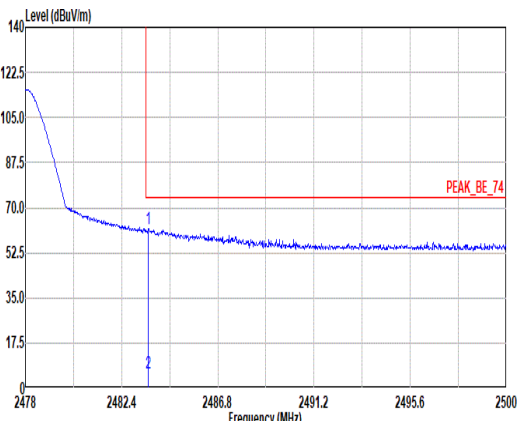
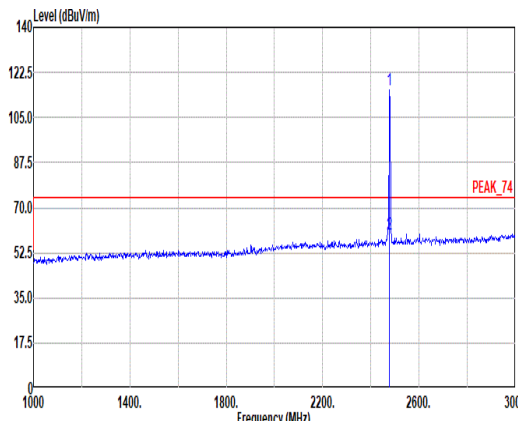


Mode	3																																																																																																																													
	Band Edge																																																																																																																													
	2400-2483.5_Bluetooth-LE_ASK_CH76_2478MHz																																																																																																																													
ANT	3																																																																																																																													
Pol.	Horizontal						Fundamental																																																																																																																							
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.63</td><td>61.83</td><td>74.00</td><td>-12.17</td><td>46.45</td><td>27.70</td><td>7.64</td><td>29.88</td><td>9.92</td><td>193</td><td>219</td><td>PEAK</td></tr><tr><td>2</td><td>2483.63</td><td>5.91</td><td>54.00</td><td>-48.09</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.63	61.83	74.00	-12.17	46.45	27.70	7.64	29.88	9.92	193	219	PEAK	2	2483.63	5.91	54.00	-48.09	--	--	--	--	--	--	--	AVERAGE	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>115.83</td><td>-----</td><td>-----</td><td>100.47</td><td>27.68</td><td>7.65</td><td>29.89</td><td>9.92</td><td>193</td><td>219</td><td>PEAK</td></tr><tr><td>2</td><td>2478.00</td><td>59.91</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	115.83	-----	-----	100.47	27.68	7.65	29.89	9.92	193	219	PEAK	2	2478.00	59.91	-----	-----	--	--	--	--	--	--	--	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2483.63	61.83	74.00	-12.17	46.45	27.70	7.64	29.88	9.92	193	219	PEAK																																																																																																																		
2	2483.63	5.91	54.00	-48.09	--	--	--	--	--	--	--	AVERAGE																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2478.00	115.83	-----	-----	100.47	27.68	7.65	29.89	9.92	193	219	PEAK																																																																																																																		
2	2478.00	59.91	-----	-----	--	--	--	--	--	--	--	AVERAGE																																																																																																																		



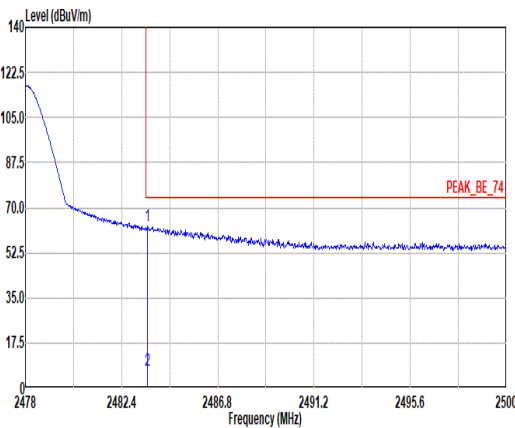
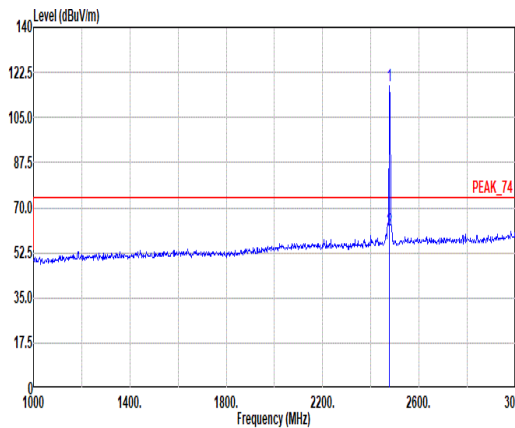


Mode	3																																																																																																																												
	Band Edge																																																																																																																												
	2400-2483.5_Bluetooth-LE_ASK_CH76_2478MHz																																																																																																																												
ANT	3																																																																																																																												
Pol.	Vertical						Fundamental																																																																																																																						
Peak																																																																																																																													
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																																																						
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.57</td><td>62.63</td><td>74.00</td><td>-11.37</td><td>47.25</td><td>27.70</td><td>7.64</td><td>29.88</td><td>9.92</td><td>100</td><td>269</td><td>PEAK</td></tr><tr><td>2</td><td>2483.57</td><td>6.71</td><td>54.00</td><td>-47.29</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.57	62.63	74.00	-11.37	47.25	27.70	7.64	29.88	9.92	100	269	PEAK	2	2483.57	6.71	54.00	-47.29	--	--	--	--	--	--	--	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2478.00</td><td>117.31</td><td>-----</td><td>-----</td><td>101.95</td><td>27.68</td><td>7.65</td><td>29.89</td><td>9.92</td><td>100</td><td>269</td><td>PEAK</td></tr><tr><td>2</td><td>2478.00</td><td>61.39</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	117.31	-----	-----	101.95	27.68	7.65	29.89	9.92	100	269	PEAK	2	2478.00	61.39	-----	-----	--	--	--	--	--	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	2483.57	62.63	74.00	-11.37	47.25	27.70	7.64	29.88	9.92	100	269	PEAK																																																																																																																	
2	2483.57	6.71	54.00	-47.29	--	--	--	--	--	--	--	AVERAGE																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	2478.00	117.31	-----	-----	101.95	27.68	7.65	29.89	9.92	100	269	PEAK																																																																																																																	
2	2478.00	61.39	-----	-----	--	--	--	--	--	--	--	AVERAGE																																																																																																																	

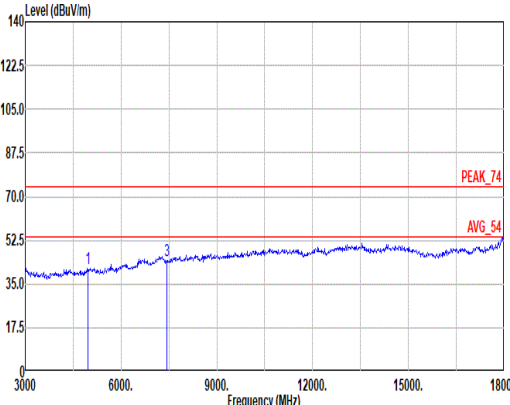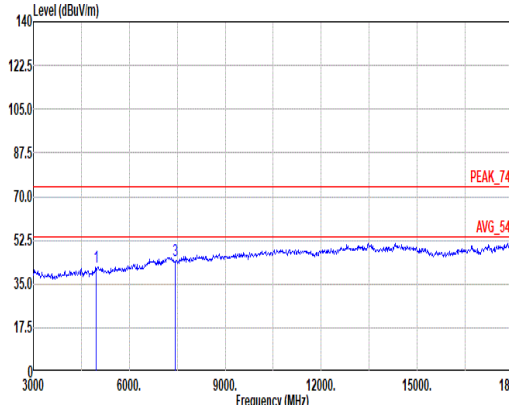



Mode	3																																																																																																																																																																								
	Harmonic																																																																																																																																																																								
	2400-2483.5_Bluetooth-LE_ASK_CH76_2478MHz																																																																																																																																																																								
ANT	3																																																																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																																																																		
Peak Avg.																																																																																																																																																																									
	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL						Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL																																																																																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4956.00</td><td>41.00</td><td>74.00</td><td>-33.00</td><td>62.34</td><td>33.01</td><td>11.08</td><td>65.88</td><td>0.45</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>4956.00</td><td>-14.92</td><td>54.00</td><td>-68.92</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr><tr><td>3</td><td>7434.00</td><td>44.40</td><td>74.00</td><td>-29.60</td><td>59.66</td><td>36.33</td><td>13.47</td><td>65.46</td><td>0.40</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>7434.00</td><td>-11.52</td><td>54.00</td><td>-65.52</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	41.00	74.00	-33.00	62.34	33.01	11.08	65.88	0.45	--	PEAK	2	4956.00	-14.92	54.00	-68.92	--	--	--	--	--	--	AVERAGE	3	7434.00	44.40	74.00	-29.60	59.66	36.33	13.47	65.46	0.40	--	PEAK	4	7434.00	-11.52	54.00	-65.52	--	--	--	--	--	--	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4956.00</td><td>41.48</td><td>74.00</td><td>-32.52</td><td>62.82</td><td>33.01</td><td>11.08</td><td>65.88</td><td>0.45</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>4956.00</td><td>-14.44</td><td>54.00</td><td>-68.44</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr><tr><td>3</td><td>7434.00</td><td>44.19</td><td>74.00</td><td>-29.81</td><td>59.45</td><td>36.33</td><td>13.47</td><td>65.46</td><td>0.40</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>7434.00</td><td>-11.73</td><td>54.00</td><td>-65.73</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	41.48	74.00	-32.52	62.82	33.01	11.08	65.88	0.45	--	PEAK	2	4956.00	-14.44	54.00	-68.44	--	--	--	--	--	--	AVERAGE	3	7434.00	44.19	74.00	-29.81	59.45	36.33	13.47	65.46	0.40	--	PEAK	4	7434.00	-11.73	54.00	-65.73	--	--	--	--	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																															
1	4956.00	41.00	74.00	-33.00	62.34	33.01	11.08	65.88	0.45	--	PEAK																																																																																																																																																														
2	4956.00	-14.92	54.00	-68.92	--	--	--	--	--	--	AVERAGE																																																																																																																																																														
3	7434.00	44.40	74.00	-29.60	59.66	36.33	13.47	65.46	0.40	--	PEAK																																																																																																																																																														
4	7434.00	-11.52	54.00	-65.52	--	--	--	--	--	--	AVERAGE																																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																															
1	4956.00	41.48	74.00	-32.52	62.82	33.01	11.08	65.88	0.45	--	PEAK																																																																																																																																																														
2	4956.00	-14.44	54.00	-68.44	--	--	--	--	--	--	AVERAGE																																																																																																																																																														
3	7434.00	44.19	74.00	-29.81	59.45	36.33	13.47	65.46	0.40	--	PEAK																																																																																																																																																														
4	7434.00	-11.73	54.00	-65.73	--	--	--	--	--	--	AVERAGE																																																																																																																																																														

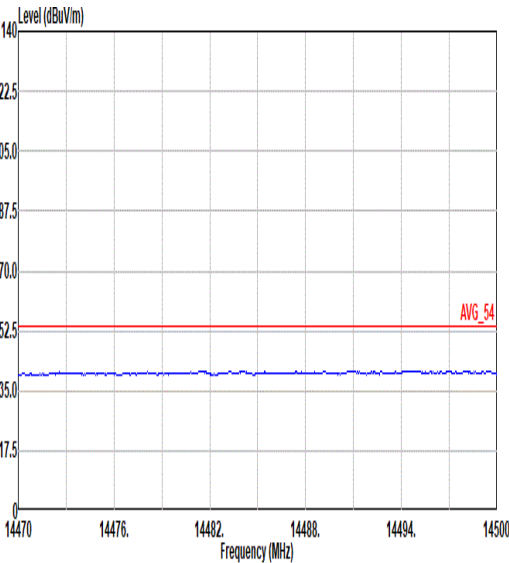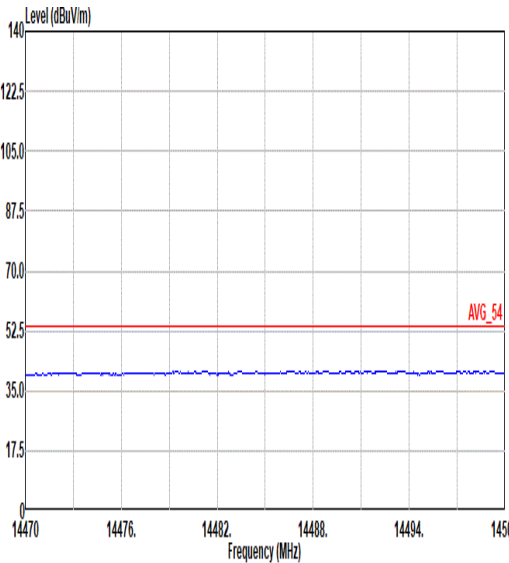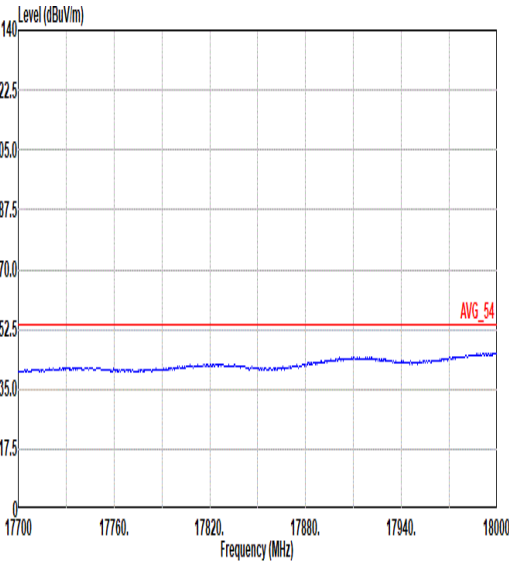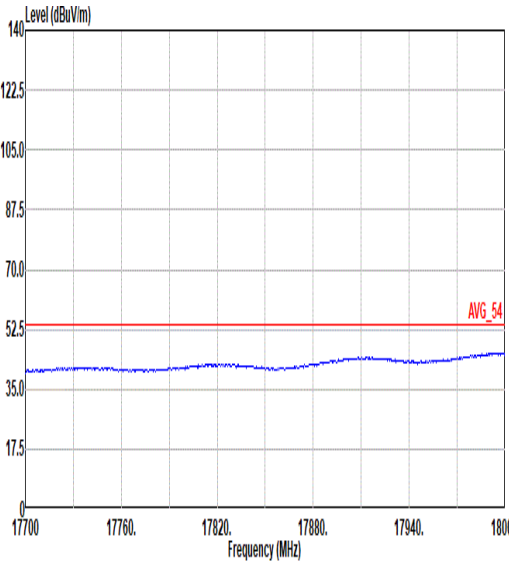



Mode	3	
	Harmonic	
	2400-2483.5_Bluetooth-LE_ASK_CH76_2478MHz	
ANT	3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg.	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL
17.7G ~18G Avg.	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL





<2Mbps>

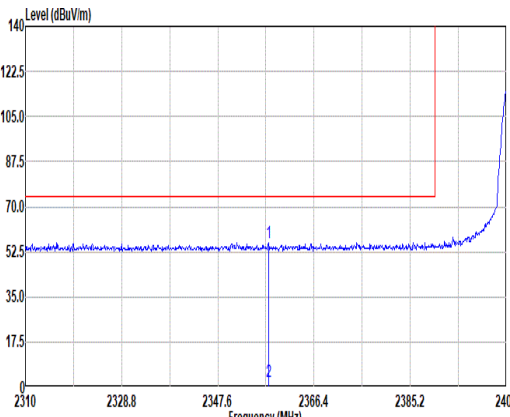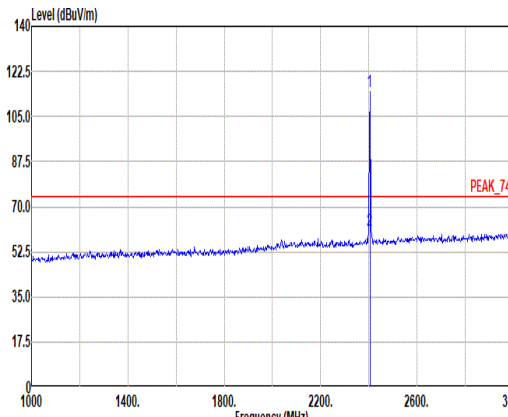Mode	4																																																																																																																													
	Band Edge																																																																																																																													
	2400-2483.5_Bluetooth-LE_ASK_CH02_2404MHz																																																																																																																													
ANT	3																																																																																																																													
Pol.	Horizontal						Fundamental																																																																																																																							
Peak																																																																																																																														
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2357.47</td><td>56.07</td><td>74.00</td><td>-17.93</td><td>41.26</td><td>27.17</td><td>7.64</td><td>29.92</td><td>9.92</td><td>301</td><td>227</td><td>PEAK</td></tr><tr><td>2</td><td>2357.47</td><td>2.09</td><td>54.00</td><td>-51.91</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2357.47	56.07	74.00	-17.93	41.26	27.17	7.64	29.92	9.92	301	227	PEAK	2	2357.47	2.09	54.00	-51.91	--	--	--	--	--	--	--	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>114.70</td><td>-----</td><td>-----</td><td>99.58</td><td>27.40</td><td>7.71</td><td>29.91</td><td>9.92</td><td>301</td><td>227</td><td>PEAK</td></tr><tr><td>2</td><td>2404.00</td><td>60.72</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2404.00	114.70	-----	-----	99.58	27.40	7.71	29.91	9.92	301	227	PEAK	2	2404.00	60.72	-----	-----	--	--	--	--	--	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2357.47	56.07	74.00	-17.93	41.26	27.17	7.64	29.92	9.92	301	227	PEAK																																																																																																																		
2	2357.47	2.09	54.00	-51.91	--	--	--	--	--	--	--	AVERAGE																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																			
1	2404.00	114.70	-----	-----	99.58	27.40	7.71	29.91	9.92	301	227	PEAK																																																																																																																		
2	2404.00	60.72	-----	-----	--	--	--	--	--	--	--	AVERAGE																																																																																																																		



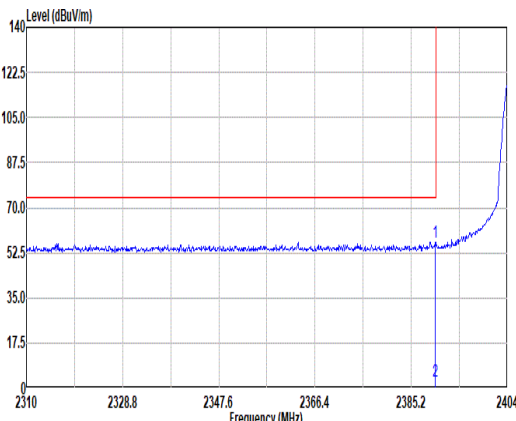
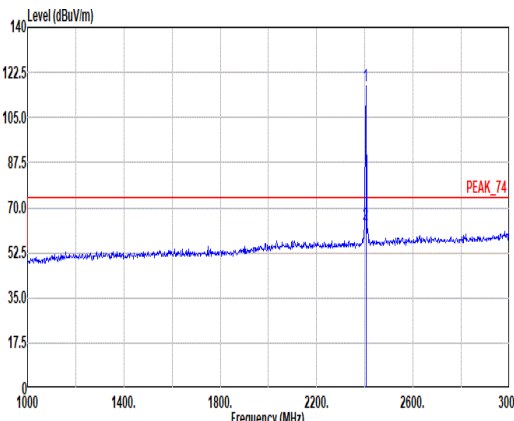


Mode	4																																																																																																																							
	Band Edge																																																																																																																							
	2400-2483.5_Bluetooth-LE_ASK_CH02_2404MHz																																																																																																																							
ANT	3																																																																																																																							
Pol.	Vertical						Fundamental																																																																																																																	
Peak																																																																																																																								
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.90</td><td>56.64</td><td>74.00</td><td>-17.36</td><td>41.64</td><td>27.30</td><td>7.69</td><td>29.91</td><td>9.92</td><td>106</td><td>277 PEAK</td></tr><tr><td>2</td><td>2389.90</td><td>2.66</td><td>54.00</td><td>-51.34</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.90	56.64	74.00	-17.36	41.64	27.30	7.69	29.91	9.92	106	277 PEAK	2	2389.90	2.66	54.00	-51.34	--	--	--	--	--	--	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>117.21</td><td>-----</td><td>-----</td><td>102.09</td><td>27.40</td><td>7.71</td><td>29.91</td><td>9.92</td><td>106</td><td>277 PEAK</td></tr><tr><td>2</td><td>2404.00</td><td>63.23</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	117.21	-----	-----	102.09	27.40	7.71	29.91	9.92	106	277 PEAK	2	2404.00	63.23	-----	-----	--	--	--	--	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	2389.90	56.64	74.00	-17.36	41.64	27.30	7.69	29.91	9.92	106	277 PEAK																																																																																																													
2	2389.90	2.66	54.00	-51.34	--	--	--	--	--	--	AVERAGE																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	2404.00	117.21	-----	-----	102.09	27.40	7.71	29.91	9.92	106	277 PEAK																																																																																																													
2	2404.00	63.23	-----	-----	--	--	--	--	--	--	AVERAGE																																																																																																													

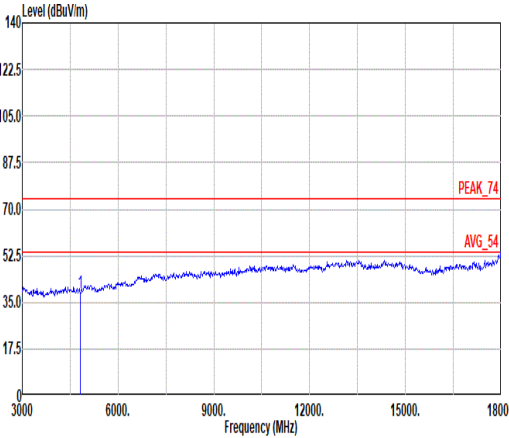
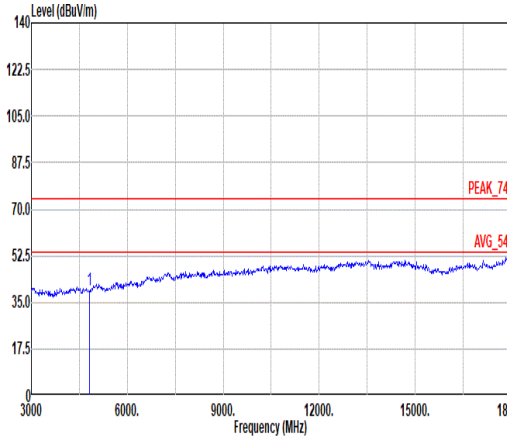


Mode	4																																																																																																																		
	Harmonic																																																																																																																		
	2400-2483.5_Bluetooth-LE_ASK_CH02_2404MHz																																																																																																																		
ANT	3																																																																																																																		
Pol.	Horizontal						Vertical																																																																																																												
Peak Avg.																																																																																																																			
	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL						Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL																																																																																																												
<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable</th><th colspan="2">Preamp</th><th colspan="2">Aux</th><th colspan="2">APos</th><th colspan="2">TPos</th><th colspan="2"></th></tr><tr><th colspan="2">Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Remark</th></tr><tr><th colspan="2">MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4808.00</td><td>38.62</td><td>74.00</td><td>-35.38</td><td>61.32</td><td>32.33</td><td>10.69</td><td>66.16</td><td>0.44</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>4808.00</td><td>-14.88</td><td>54.00</td><td>-68.88</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>														Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos				Freq		Level	Line Margin	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Remark	MHz		dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	cm	deg		1	4808.00	38.62	74.00	-35.38	61.32	32.33	10.69	66.16	0.44	--	--	--	--	--	--	--	--	--	--	PEAK	2	4808.00	-14.88	54.00	-68.88	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	AVERAGE
		Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos																																																																																																			
Freq		Level	Line Margin	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Remark																																																																																															
MHz		dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	cm	deg																																																																																																
1	4808.00	38.62	74.00	-35.38	61.32	32.33	10.69	66.16	0.44	--	--	--	--	--	--	--	--	--	--	PEAK																																																																																															
2	4808.00	-14.88	54.00	-68.88	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	AVERAGE																																																																																															
<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable</th><th colspan="2">Preamp</th><th colspan="2">Aux</th><th colspan="2">APos</th><th colspan="2">TPos</th><th colspan="2"></th></tr><tr><th colspan="2">Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Remark</th></tr><tr><th colspan="2">MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4808.00</td><td>39.46</td><td>74.00</td><td>-34.54</td><td>62.16</td><td>32.33</td><td>10.69</td><td>66.16</td><td>0.44</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>4808.00</td><td>-14.52</td><td>54.00</td><td>-68.52</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>														Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos				Freq		Level	Line Margin	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Remark	MHz		dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	cm	deg		1	4808.00	39.46	74.00	-34.54	62.16	32.33	10.69	66.16	0.44	--	--	--	--	--	--	--	--	--	--	PEAK	2	4808.00	-14.52	54.00	-68.52	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	AVERAGE
		Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos																																																																																																			
Freq		Level	Line Margin	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Remark																																																																																															
MHz		dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	cm	deg																																																																																																
1	4808.00	39.46	74.00	-34.54	62.16	32.33	10.69	66.16	0.44	--	--	--	--	--	--	--	--	--	--	PEAK																																																																																															
2	4808.00	-14.52	54.00	-68.52	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	AVERAGE																																																																																															

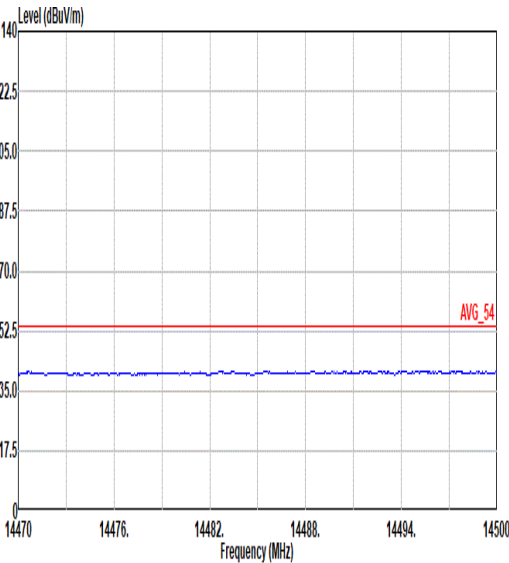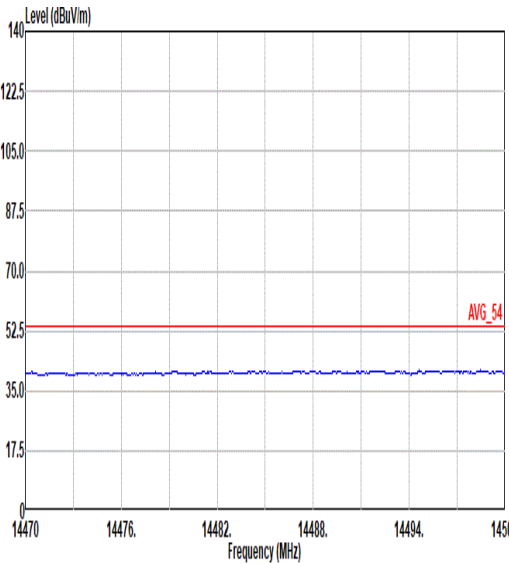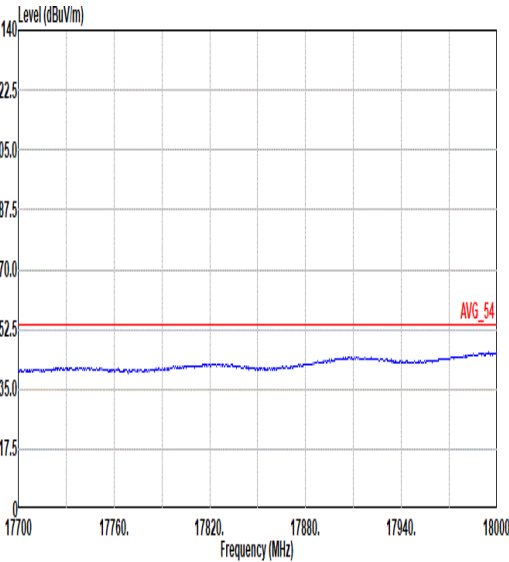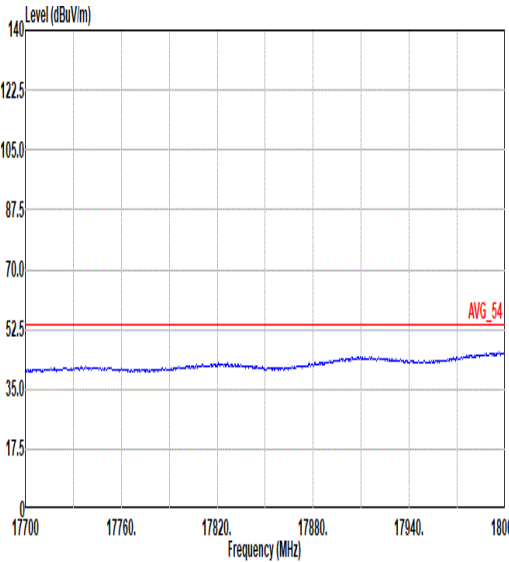

Mode	4	
	Harmonic	
	2400-2483.5_Bluetooth-LE_ASK_CH02_2404MHz	
ANT	3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg.	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL
	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL

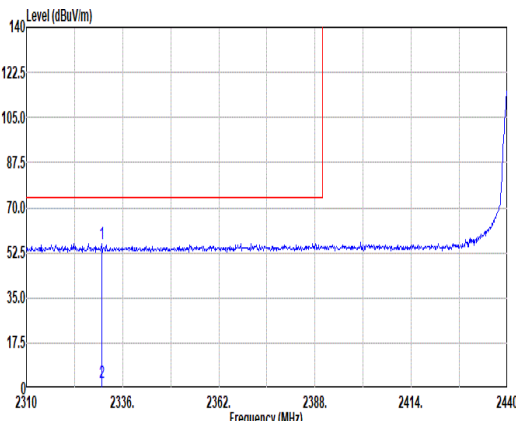
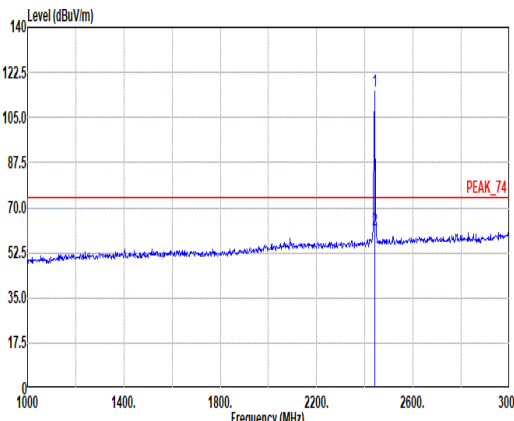


Mode	5																																																																				
	Band Edge - L																																																																				
	2400-2483.5_Bluetooth-LE_ASK_CH38_2440MHz																																																																				
ANT	3																																																																				
Pol.	Horizontal						Fundamental																																																														
Peak																																																																					
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2330.28</td><td>56.10</td><td>74.00</td><td>-17.90</td><td>41.42</td><td>27.10</td><td>7.59</td><td>29.93</td><td>9.92</td><td>294</td><td>228</td><td>PEAK</td></tr><tr><td>2</td><td>2330.28</td><td>2.12</td><td>54.00</td><td>-51.88</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2330.28	56.10	74.00	-17.90	41.42	27.10	7.59	29.93	9.92	294	228	PEAK	2	2330.28	2.12	54.00	-51.88	--	--	--	--	--	--	--	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	2330.28	56.10	74.00	-17.90	41.42	27.10	7.59	29.93	9.92	294	228	PEAK																																																									
2	2330.28	2.12	54.00	-51.88	--	--	--	--	--	--	--	AVERAGE																																																									
	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>115.38</td><td>-----</td><td>-----</td><td>100.00</td><td>27.60</td><td>7.68</td><td>29.90</td><td>9.92</td><td>294</td><td>228</td><td>PEAK</td></tr><tr><td>2</td><td>2440.00</td><td>61.40</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	115.38	-----	-----	100.00	27.60	7.68	29.90	9.92	294	228	PEAK	2	2440.00	61.40	-----	-----	--	--	--	--	--	--	--	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	2440.00	115.38	-----	-----	100.00	27.60	7.68	29.90	9.92	294	228	PEAK																																																									
2	2440.00	61.40	-----	-----	--	--	--	--	--	--	--	AVERAGE																																																									




Mode	5																																																																			
	Band Edge - R																																																																			
	2400-2483.5_Bluetooth-LE_ASK_CH38_2440MHz																																																																			
ANT	3																																																																			
Pol.	Horizontal						Fundamental																																																													
Peak	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2495.86</td><td>57.15</td><td>74.00</td><td>-16.85</td><td>41.78</td><td>27.70</td><td>7.63</td><td>29.88</td><td>9.92</td><td>294</td><td>228</td><td>PEAK</td></tr><tr><td>2</td><td>2495.86</td><td>3.17</td><td>54.00</td><td>-50.83</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2495.86	57.15	74.00	-16.85	41.78	27.70	7.63	29.88	9.92	294	228	PEAK	2	2495.86	3.17	54.00	-50.83	--	--	--	--	--	--	--	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																										
1	2495.86	57.15	74.00	-16.85	41.78	27.70	7.63	29.88	9.92	294	228	PEAK																																																								
2	2495.86	3.17	54.00	-50.83	--	--	--	--	--	--	--	AVERAGE																																																								

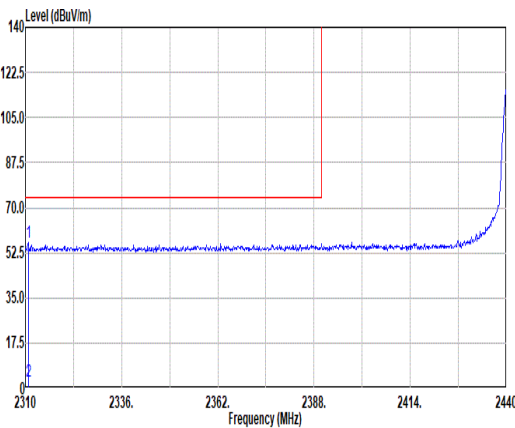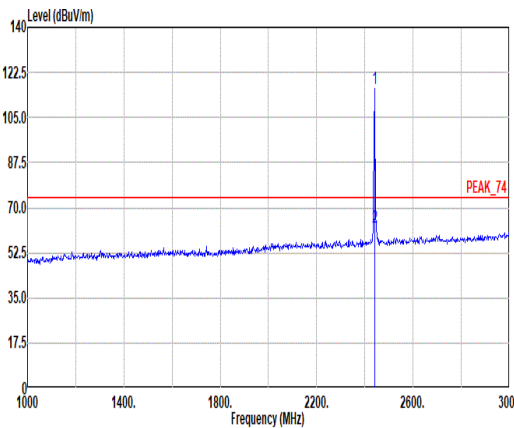

Mode	5																																																																																																																											
	Band Edge - L																																																																																																																											
	2400-2483.5_Bluetooth-LE_ASK_CH38_2440MHz																																																																																																																											
ANT	3																																																																																																																											
Pol.	Vertical						Fundamental																																																																																																																					
Peak																																																																																																																												
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2310.78</td><td>56.53</td><td>74.00</td><td>-17.47</td><td>41.90</td><td>27.10</td><td>7.55</td><td>29.94</td><td>9.92</td><td>105</td><td>294</td><td>PEAK</td></tr><tr><td>2</td><td>2310.78</td><td>2.55</td><td>54.00</td><td>-51.45</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2310.78	56.53	74.00	-17.47	41.90	27.10	7.55	29.94	9.92	105	294	PEAK	2	2310.78	2.55	54.00	-51.45	--	--	--	--	--	--	--	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>116.16</td><td>-----</td><td>-----</td><td>100.86</td><td>27.60</td><td>7.68</td><td>29.90</td><td>9.92</td><td>105</td><td>294</td><td>PEAK</td></tr><tr><td>2</td><td>2440.00</td><td>62.18</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	116.16	-----	-----	100.86	27.60	7.68	29.90	9.92	105	294	PEAK	2	2440.00	62.18	-----	-----	--	--	--	--	--	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	2310.78	56.53	74.00	-17.47	41.90	27.10	7.55	29.94	9.92	105	294	PEAK																																																																																																																
2	2310.78	2.55	54.00	-51.45	--	--	--	--	--	--	--	AVERAGE																																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	2440.00	116.16	-----	-----	100.86	27.60	7.68	29.90	9.92	105	294	PEAK																																																																																																																
2	2440.00	62.18	-----	-----	--	--	--	--	--	--	--	AVERAGE																																																																																																																

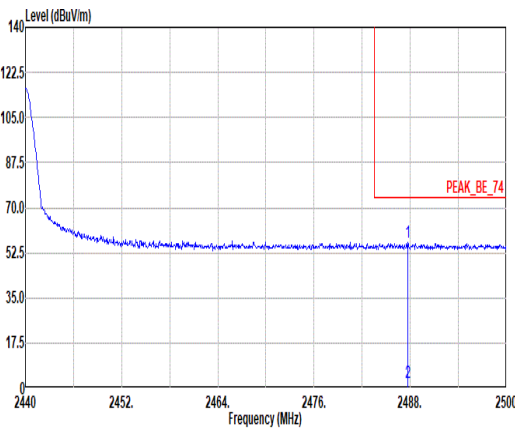

Mode	5																																																																				
	Band Edge - R																																																																				
	2400-2483.5_Bluetooth-LE_ASK_CH38_2440MHz																																																																				
ANT	3																																																																				
Pol.	Vertical						Fundamental																																																														
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.70</td><td>56.28</td><td>74.00</td><td>-17.72</td><td>40.90</td><td>27.70</td><td>7.64</td><td>29.88</td><td>9.92</td><td>105</td><td>294</td><td>PEAK</td></tr><tr><td>2</td><td>2487.70</td><td>2.30</td><td>54.00</td><td>-51.70</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.70	56.28	74.00	-17.72	40.90	27.70	7.64	29.88	9.92	105	294	PEAK	2	2487.70	2.30	54.00	-51.70	--	--	--	--	--	--	--	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	2487.70	56.28	74.00	-17.72	40.90	27.70	7.64	29.88	9.92	105	294	PEAK																																																									
2	2487.70	2.30	54.00	-51.70	--	--	--	--	--	--	--	AVERAGE																																																									