

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT
OF**

+CAM ROBOT-O HD/+CAM PT

MODEL No.: QCP-A311, QCP-A310

FCC ID: A5JC31410

REPORT NO.: ES140523238E

ISSUE DATE: July 2, 2014

Prepared for

Quadrant Technology(Shenzhen) Co., Ltd.

**3rd floor, 7TH building, Hongfa JiaTeLi Hi-Tech park of ShiXin Village,
Shiyan Town, Shenzhen City, Guangdong province, China.**

Prepared by

SHENZHEN EMTEK CO., LTD.

**Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China**

TEL: 86-755-26954280

FAX: 86-755-26954282

VERIFICATION OF COMPLIANCE

Applicant:	Quadrant Technology(Shenzhen) Co., Ltd. 3rd floor, 7TH building, Hongfa JiaTeLi Hi-Tech park of ShiXin Village, Shiyan Town, Shenzhen City, Guangdong province, China.
Manufacturer:	Quadrant Technology(Shenzhen) Co., Ltd. 3rd floor, 7TH building, Hongfa JiaTeLi Hi-Tech park of ShiXin Village, Shiyan Town, Shenzhen City, Guangdong province, China.
Product Description:	+CAM ROBOT-O HD/+CAM PT
Model Number:	QCP-A311, QCP-A310
Trade mark	Imogenstudio
File Number:	ES140523238E
Date of Test:	May 24, 2014 to July 2, 2014

We hereby certify that:

The above equipment was tested by SHENZHEN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : May 24, 2014 to July 2, 2014

Prepared by : 
Jack Li/Editor

Reviewer : 
Joe Xia/Supervisor

Approve & Authorized Signer : 
Lisa Wang/Manager

Table of Contents

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION	5
1.2 RELATED SUBMITTAL(S) / GRANT(S)	5
1.3 TEST METHODOLOGY	6
1.4 SPECIAL ACCESSORIES	6
1.5 EQUIPMENT MODIFICATIONS	6
1.6 TEST FACILITY	6
2. SYSTEM TEST CONFIGURATION	7
2.1 EUT CONFIGURATION	7
2.2 EUT EXERCISE	7
2.3 TEST PROCEDURE	7
2.4 CONFIGURATION OF TESTED SYSTEM	7
3. DESCRIPTION OF TEST MODES	9
4. SUMMARY OF TEST RESULTS	10
5. CONDUCTED EMISSIONS TEST	11
5.1 MEASUREMENT PROCEDURE	11
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	11
5.3 MEASUREMENT EQUIPMENT USED	11
5.4 CONDUCTED EMISSION LIMIT	11
5.5 MEASUREMENT RESULT	12
6. RADIATED EMISSION TEST	14
6.1 MEASUREMENT PROCEDURE	14
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
6.3 MEASUREMENT EQUIPMENT USED	16
6.4 RADIATED EMISSION LIMIT	16
6.5 MEASUREMENT RESULT	18
7. 6DB BANDWIDTH TEST	24
7.1 MEASUREMENT PROCEDURE	24
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	24
7.3 MEASUREMENT EQUIPMENT USED	24
7.4 MEASUREMENT RESULTS	24
8. MAXIMUM PEAK OUTPUT POWER TEST	33
8.1 MEASUREMENT PROCEDURE	33
8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	33
8.3 MEASUREMENT EQUIPMENT USED	33
8.4 PEAK POWER OUTPUT LIMIT	33
8.5 MEASUREMENT RESULTS	33
9. BAND EDGE TEST	37
9.1 MEASUREMENT PROCEDURE	37
9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	37
9.3 MEASUREMENT EQUIPMENT USED	37
9.4 MEASUREMENT RESULTS	37
10. POWER DENSITY	40
10.1 TEST EQUIPMENT	40
10.2 MEASURING INSTRUMENTS AND SETTING	40
10.3 TEST PROCEDURES	40
10.4 BLOCK DIAGRAM OF TEST SETUP	40

10.5	LIMIT.....	40
10.6	TEST RESULT	40
11.	ANTENNA PORT EMISSION.....	57
11.1	TEST EQUIPMENT	57
11.2	MEASURING INSTRUMENTS AND SETTING.....	57
11.3	TEST PROCEDURES.....	57
11.4	BLOCK DIAGRAM OF TEST SETUP	57
11.5	TEST RESULT	57
12.	ANTENNA APPLICATION	64
12.1	ANTENNA REQUIREMENT	64
12.2	RESULT.....	64

1. General Information

1.1 Product Description

A major technical descriptions of EUT is described as following:

- A). Standards: IEEE802.11b/g/n
- B). Operation Frequency: 802.11b/g/n HT20: 2412-2462MHz;
802.11n HT40: 2422-2452 MHz
- C). Modulation: OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n,
DSSS with DBPSK/DQPSK/CCK for 802.11b
- D). Number of Channel: 802.11b/g/n(HT20): 11Channels,
802.11n(HT40): 7 Channels
- E). Support Data Rate: 1, 2, 5.5, 11, 6, 9, 12, 24, 36, 48, 54, 65, 72.2Mbps
- F). Conducted Power: 24.94dBm MAX
- G). Antenna Gain: Chain A: 2.0dBi, Chain B: 2.0dBi
- H). Antenna Type: Chip Antenna
- I). Power Supply: DC 5V from AC Adapter
- J). Adapter1: Model: XKD-C2000IC5.0-12W
Input: 100-240V~, 50/60Hz, 0.5A MAX
Output: DC 5.0V, 2A
- K). Adapter2: Model: DSA-12PFA-05 FUS 050200
Input: 100-240V~, 50/60Hz, 0.5A
Output: DC 5.0V, 2A
- L). Adapter3: Model: DSA-12PFA-05 FUK 050200
Input: 100-240V~, 50/60Hz, 0.5A
Output: DC 5.0V, 2A

(Note: Adapter2 and Adapter3 are identical in circuitry and electrical, mechanical and physical construction; the only differences are the Pin location.)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Note:

1. This device is included 802.11b, 802.11g, and 802.11n 2.4GHz transceiver function.
2. Test of channel was included the lowest middle and highest frequency in lowest data rate and to perform the test, then record on this report.

1.2 Related Submittal(s) / Grant(s)

This submittal(s) (test report) is intended for **FCC ID: A5JC31410** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system is compliance with Subpart B is authorized under a DOC procedure.

1.3 Test Methodology

All the test program has follow FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02, Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2009). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

1.6 Test Facility

Site Description

EMC Lab.

: Accredited by CNAS, 2013.10.29
The certificate is valid until 2014.10.28
The Laboratory has been assessed and proved to be in compliance with CNAS/CL01: 2006(identical to ISO/IEC17025: 2005)
The Certificate Registration Number is L2291

Accredited by TUV Rheinland Shenzhen 2010.5.25
The Laboratory has been assessed according to the requirements ISO/IEC 17025

Accredited by FCC, October 28, 2010
The Certificate Registration Number is 406365.

Accredited by Industry Canada, March 05, 2010
The Certificate Registration Number is 46405-4480.

Name of Firm : SHENZHEN EMTEK CO., LTD.

Site Location : Bldg 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2009 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. Emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1.	+CAM ROBOT-O HD/+CAM PT	Imogenstudio	QCP-A311	A5JC31410	N/A	EUT
2.	Adapter1	MOSO	XKD-C2000IC5.0-1 2W	N/A	N/A	
	Adapter2	DVE	DSA-12PFA-05 FUS 050200	N/A	N/A	

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column, device(s) used in tested system is a support equipment.

3. Description of Test Modes

The Transmitter of EUT is an +CAM ROBOT-O HD/+CAM PT and powered by host equipment; these is Digital Transmission system (DTS) and have modulation OFDM, DSSS, DBPSK, DQPSK, CCK, 16QAM, 64QAM. According exploratory test, EUT will have maximum output power in those data rate (802.11b: 11 Mbps; 802.11g: 6 Mbps; 802.11n: MCS0), so those data rate were used for all test.

The equipment enables high-speed access without wires to network assets. This adapter uses the IEEE 802.11 protocol to enable wireless communications between the host and Wireless router.

Preliminary tests were performed in different data rate to find the worst radiated emission. The min data rate 802.11b (1Mbps), 802.11g (6Mbps), 802.11n (MCS0) was the worst-case rate with all test items. EUT has two antennas, and different modes support different transmit mode what describe as following form:

Mode	Tx/Rx
11b, 11g, 11n (HT20, HT40)MCS 0-7	1Tx, 1Rx
11n(HT20, HT40) MCS 8-15	2Tx, 2Rx

We take data rate (11b 11 Mbps, 11g 6 Mbps, 11n (HT20, HT40) MCS0) to test. And the worst test data was recorded in this report.

For 802.11b/g/n H20:

For lowest channel : 2412MHz (Channel 1)

For middle channel : 2437MHz (Channel 6)

For highest channel: 2462MHz (Channel 11)

For 802.11n H40:

For lowest channel : 2422MHz (Channel 3)

For middle channel : 2437MHz (Channel 6)

For highest channel: 2452MHz (Channel 9)

4. Summary of Test Results


FCC Rules	Description Of Test	Result
§15.247(a)(2)	6dB bandwidth	Pass
§15.247(b)(3)	Max Peak output Power test	Pass
§15.247(e)	Power density	Pass
§15.247(d)	Band edge test	Pass
§15.207	AC Power Conducted Emission	Pass
§15.247(d), §15.209	Radiated Emission	Pass
§15.247(d)	Antenna Port Emission	Pass
§15.247(b)&§15.203	Antenna Application	Pass

5. Conducted Emissions Test

5.1 Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

5.2 Test SET-UP (Block Diagram of Configuration)

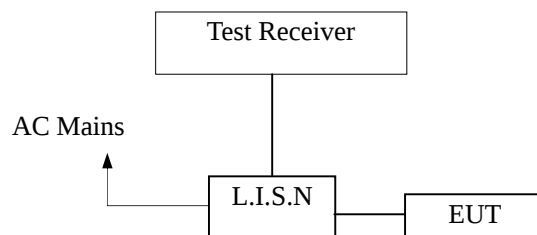

5.3 Measurement Equipment Used

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/17/2014	05/16/2015
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/17/2014	05/16/2015
50Ω Coaxial Switch	Anritsu	MP59B	M20531	N/A	N/A
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	05/17/2014	05/16/2015
Voltage Probe	Rohde & Schwarz	TK9416	N/A	05/17/2014	05/16/2015

5.4 Conducted Emission Limit

Conducted Emission Frequency(MHz)

0.15-0.5

0.5-5.0

5.0-30.0

Quasi-peak

66-56

56

60

Average

56-46

46

50

Note: 1. The lower limit shall apply at the transition frequencies

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.5 Measurement Result

Adapter1:

Date of Test:	May 27, 2014	Temperature:	22℃
Frequency Detector:	0.15~30MHz	Humidity:	50%
Test Result:	PASS	Test Mode:	WIFI Mode

Test Line	Frequency MHz	Emission Level QP dB(μV)	Emission Level AV dB(μV)	Limits QP dB(μV)	Limits AV dB(μV)	Over QP dB(μV)	Over AV dB(μV)
Line	0.17	47.70	28.65	65.21	55.21	-17.51	-26.56
	0.27	39.68	30.61	61.12	51.12	-21.44	-20.51
	0.42	34.29	25.62	57.55	47.55	-23.26	-21.93
	0.61	35.34	23.66	56.00	46.00	-20.66	-22.34
	7.23	37.29	21.81	60.00	50.00	-22.71	-28.19
	24.00	35.48	30.76	60.00	50.00	-24.52	-19.24
Neutral	0.15	46.16	23.19	65.91	55.91	-19.75	-32.72
	0.30	41.81	22.16	60.38	50.38	-18.57	-28.22
	0.84	29.82	10.65	56.00	46.00	-26.18	-35.35
	6.00	32.62	16.33	60.00	50.00	-27.38	-33.67
	7.84	31.99	15.53	60.00	50.00	-28.01	-34.47
	24.00	32.77	26.11	60.00	50.00	-27.23	-23.89

Adapter2:

Date of Test:	June 1, 2014	Temperature:	24°C
Frequency Detector:	0.15~30MHz	Humidity:	53%
Test Result:	PASS	Test Mode:	WIFI Mode

Test Line	Frequency MHz	Emission Level QP dB(μV)	Emission Level AV dB(μV)	Limits QP dB(μV)	Limits AV dB(μV)	Over QP dB(μV)	Over AV dB(μV)
Line	0.16	46.13	27.57	65.73	55.73	-19.60	-28.16
	0.21	43.76	27.42	63.41	53.41	-19.65	-25.99
	0.26	39.95	29.06	61.43	51.43	-21.48	-22.37
	0.70	31.71	21.51	56.00	46.00	-24.29	-24.49
	1.51	32.49	20.53	56.00	46.00	-23.51	-25.47
	24.00	33.36	28.50	60.00	50.00	-26.64	-21.50
Neutral	0.16	45.81	24.68	65.46	55.46	-19.65	-30.78
	0.28	39.55	15.89	60.97	50.97	-21.42	-35.08
	0.83	28.31	9.66	56.00	46.00	-27.69	-36.34
	6.62	33.05	15.62	60.00	50.00	-26.95	-34.38
	17.30	27.14	12.72	60.00	50.00	-32.86	-37.28
	24.00	32.27	25.49	60.00	50.00	-27.73	-24.51

6. Radiated Emission Test

6.1 Measurement Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured was complete.

When spectrum scanned from 30 MHz to 1GHz setting resolution bandwidth 120 kHz and video bandwidth 300kHz.

EMI Test Receiver	Setting
Attenuation	Auto
RB	120kHz
VB	300kHz
Detector	QP
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz.


EMI Test Receiver	Setting
Attenuation	Auto
RB	1M
VB	3M
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz.


EMI Test Receiver	Setting
Attenuation	Auto
RB	1M
VB	10Hz
Detector	AVG
Trace	Max hold

6.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

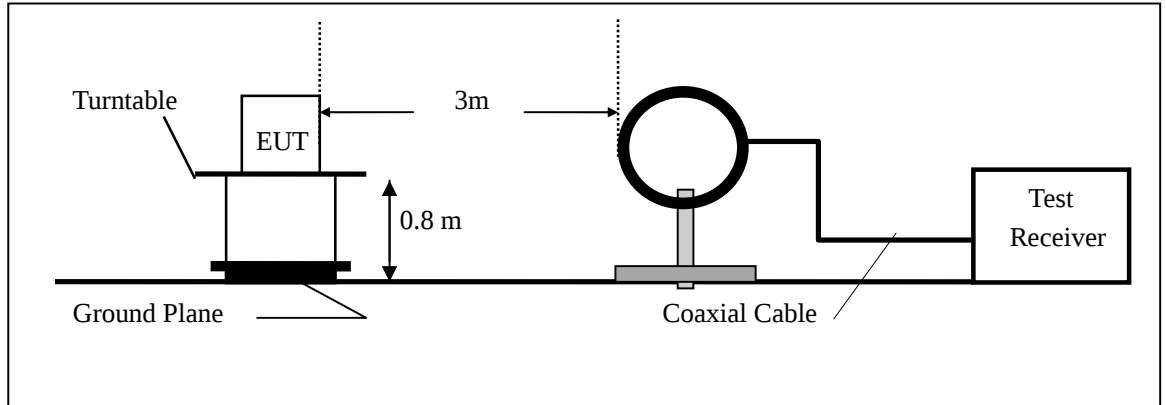

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

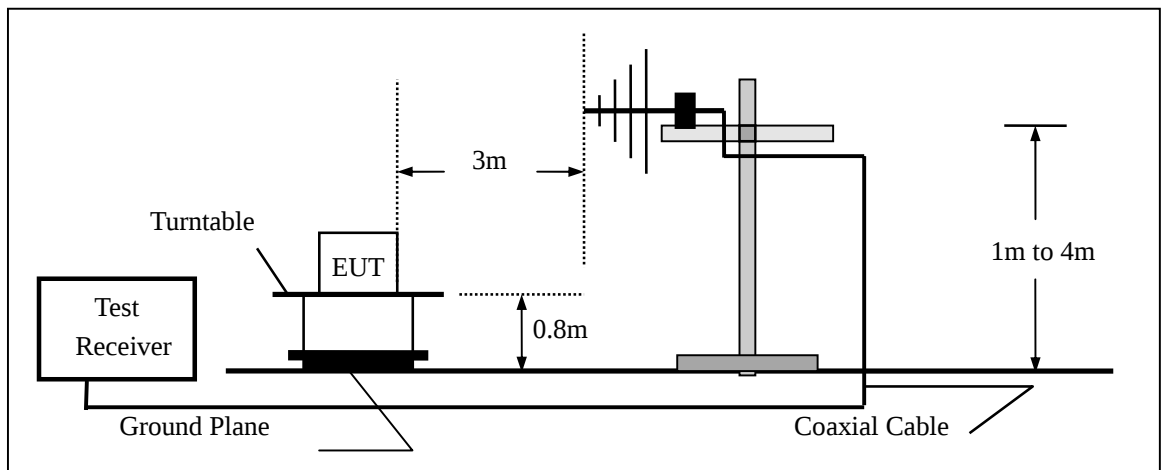

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

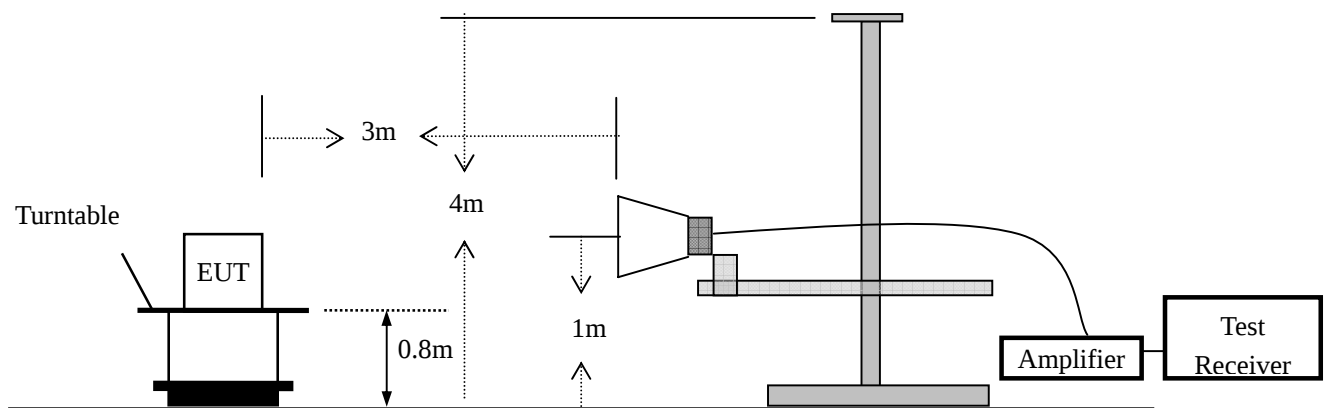

6.3 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/17/2014	05/16/2015
Pre-Amplifier	HP	8447D	2944A07999	05/17/2014	05/16/2015
Bilog Antenna	Schwarzbeck	VULB9163	142	05/17/2014	05/16/2015
Loop Antenna	ARA	PLA-1030/B	1029	05/17/2014	05/16/2015
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/17/2014	05/16/2015
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/17/2014	05/16/2015
Cable	Schwarzbeck	AK9513	ACRX1	05/17/2014	05/16/2015
Cable	Rosenberger	N/A	FP2RX2	05/17/2014	05/16/2015
Cable	Schwarzbeck	AK9513	CRPX1	05/17/2014	05/16/2015
Cable	Schwarzbeck	AK9513	CRRX2	05/17/2014	05/16/2015

6.4 Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

- Remark 1. Emission level in dBuV/m=20 log (uV/m)
 : 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

6.5 Measurement Result

All the modulation modes with all adapters were tested the data of the worst mode (802.11b) are recorded in the following pages.

Operation Mode: TX Mode Test Date : May 30, 2014
Frequency Range: 30~1000MHz Temperature : 24℃
Test Result: PASS Humidity : 53 %
Measured Distance: 3m Test By: WANG

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40 \log(\text{Specific distance} / \text{test distance})$ (dB);

Limit line = Specific limits (dBuV) + distance extrapolation factor.

Operation Mode: 802.11b TX CH 1 Test Date : May 30, 2014
Frequency Range: 30~1000MHz Temperature : 24℃
Test Result: PASS Humidity : 53 %
Measured Distance: 3m Test By: WANG

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)	Note
42.90	V	34.70	40.00	-5.30	QP
71.83	V	28.23	40.00	-11.77	QP
104.17	V	29.26	43.50	-14.24	QP
167.82	V	29.40	43.50	-14.10	QP
263.82	V	35.52	46.00	-10.48	QP
580.70	V	37.12	46.00	-8.88	QP
85.90	H	28.00	40.00	-12.00	QP
143.83	H	25.37	43.50	-18.13	QP
248.55	H	35.03	46.00	-10.97	QP
263.82	H	40.41	46.00	-5.59	QP
312.18	H	33.01	46.00	-12.99	QP
408.95	H	36.17	46.00	-9.83	QP

- Note:**
- (1) All Readings are Peak Value.
 - (2) Emission Level = Reading Level + Probe Factor + Cable Loss.
 - (3) The average measurement was not performed when the peak measured data under the limit of average detection.
 - (4) EUT stood on the table position is the worst case result in the report.

Operation Mode: 802.11b TX CH 6 Test Date : May 30, 2014
Frequency Range: 30~1000MHz Temperature : 24℃
Test Result: PASS Humidity : 53 %
Measured Distance: 3m Test By: WANG

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)	Note
44.02	V	35.02	40.00	-4.98	QP
72.95	V	28.55	40.00	-11.45	QP
105.29	V	29.38	43.50	-14.12	QP
168.94	V	29.72	43.50	-13.78	QP
264.94	V	35.84	46.00	-10.16	QP
581.82	V	37.24	46.00	-8.76	QP
87.02	H	28.32	40.00	-11.68	QP
144.95	H	25.69	43.50	-17.81	QP
249.67	H	35.35	46.00	-10.65	QP
264.94	H	40.73	46.00	-5.27	QP
313.30	H	33.33	46.00	-12.67	QP
410.07	H	36.49	46.00	-9.51	QP

- Note:**
- (1) All Readings are Peak Value.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 - (3) The average measurement was not performed when the peak measured data under the limit of average detection.
 - (4) EUT stood on the table position is the worst case result in the report.

Operation Mode: 802.11b TX CH 11 Test Date : May 30, 2014
 Frequency Range: 30~1000MHz Temperature : 24℃
 Test Result: PASS Humidity : 53 %
 Measured Distance: 3m Test By: WANG

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)	Note
45.14	V	35.34	40.00	-4.66	QP
74.07	V	28.87	40.00	-11.13	QP
106.41	V	29.50	43.50	-14.00	QP
170.06	V	30.04	43.50	-13.46	QP
266.06	V	36.16	46.00	-9.84	QP
582.94	V	37.36	46.00	-8.64	QP
88.14	H	28.64	40.00	-11.36	QP
146.07	H	26.01	43.50	-17.49	QP
250.79	H	35.67	46.00	-10.33	QP
266.06	H	41.05	46.00	-4.95	QP
314.42	H	33.65	46.00	-12.35	QP
411.19	H	36.81	46.00	-9.19	QP

- Note:**
- (1) All Readings are Peak Value.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 - (3) The average measurement was not performed when the peak measured data under the limit of average detection.
 - (4) EUT stood on the table position is the worst case result in the report.

Operation Mode: 802.11b TX Channel 1 Test Date : May 30, 2014
Frequency Range: Above 1GHz Temperature : 24℃
Test Result: PASS Humidity : 53 %
Measured Distance: 3m Test By: WANG

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4824.00	V	58.19	42.66	74.00	54.00	-15.81	-11.34
7236.00	V	54.73	37.82	74.00	54.00	-19.27	-16.18
9648.00	V	55.82	41.16	74.00	54.00	-18.18	-12.84
12060.00	V	62.09	47.57	74.00	54.00	-11.91	-6.43
14472.00	V	62.18	46.95	74.00	54.00	-11.82	-7.05
16884.00	V	66.82	49.88	74.00	54.00	-7.18	-4.12
4824.00	H	56.82	49.18	74.00	54.00	-17.18	-4.82
7236.00	H	57.69	49.68	74.00	54.00	-16.31	-4.32
9648.00	H	60.82	50.66	74.00	54.00	-13.18	-3.34
12060.00	H	61.60	50.19	74.00	54.00	-12.40	-3.81
14472.00	H	66.90	50.80	74.00	54.00	-7.10	-3.20
16884.00	H	66.02	50.10	74.00	54.00	-7.98	-3.90

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss.
(3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Operation Mode: 802.11b TX Channel 6 Test Date : May 30, 2014
Frequency Range: Above 1GHz Temperature : 24℃
Test Result: PASS Humidity : 53 %
Measured Distance: 3m Test By: WANG

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4874.00	V	59.35	43.39	74.00	54.00	-14.65	-10.61
7311.00	V	55.89	38.55	74.00	54.00	-18.11	-15.45
9748.00	V	56.98	41.89	74.00	54.00	-17.02	-12.11
12185.00	V	63.25	48.30	74.00	54.00	-10.75	-5.70
14622.00	V	63.34	47.47	74.00	54.00	-10.66	-6.53
17059.00	V	67.98	50.61	74.00	54.00	-6.02	-3.39
4874.00	H	57.98	49.91	74.00	54.00	-16.02	-4.09
7311.00	H	58.85	50.41	74.00	54.00	-15.15	-3.59
9748.00	H	61.98	50.89	74.00	54.00	-12.02	-3.11
12185.00	H	62.76	50.42	74.00	54.00	-11.24	-3.58
14622.00	H	68.06	50.83	74.00	54.00	-5.94	-3.17
17059.00	H	67.18	50.83	74.00	54.00	-6.82	-3.17

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss.
(3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Operation Mode: 802.11b TX Channel 11 Test Date : May 30, 2014
Frequency Range: Above 1GHz Temperature : 24℃
Test Result: PASS Humidity : 53 %
Measured Distance: 3m Test By: WANG

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4924.00	V	58.92	42.18	74.00	54.00	-15.08	-11.82
7386.00	V	55.46	37.34	74.00	54.00	-18.54	-16.66
9848.00	V	56.55	40.68	74.00	54.00	-17.45	-13.32
12310.00	V	62.82	47.09	74.00	54.00	-11.18	-6.91
14772.00	V	62.91	46.47	74.00	54.00	-11.09	-7.53
17234.00	V	67.55	49.40	74.00	54.00	-6.45	-4.60
4924.00	H	57.55	48.70	74.00	54.00	-16.45	-5.30
7386.00	H	58.42	49.20	74.00	54.00	-15.58	-4.80
9848.00	H	61.55	50.18	74.00	54.00	-12.45	-3.82
12310.00	H	62.33	49.71	74.00	54.00	-11.67	-4.29
14772.00	H	67.63	50.32	74.00	54.00	-6.37	-3.68
17234.00	H	66.75	49.62	74.00	54.00	-7.25	-4.38
4924.00	V	58.92	42.18	74.00	54.00	-15.08	-11.82

No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.247.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss.
(3) Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


7. 6dB Bandwidth Test

7.1 Measurement Procedure

The EUT was operating in IEEE 802.11b/g/n mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

1. Set resolution bandwidth (RBW) = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequency) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.2 Test SET-UP (Block Diagram of Configuration)



7.3 Measurement Equipment Used


EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2014	05/16/2015



7.4 Measurement Results

6 Bandwidth Test Data Chart:
Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	June 30, 2014
Test By:	Jack	Temperature :	24 °C
Test Result:	PASS	Humidity :	53 %
Operation Mode: 802.11b			


Channel number	Channel frequency (MHz)	Measurement level (MHz)	Required Limit (kHz)
1	2412	10.080	>500
6	2437	10.051	>500
11	2462	10.013	>500


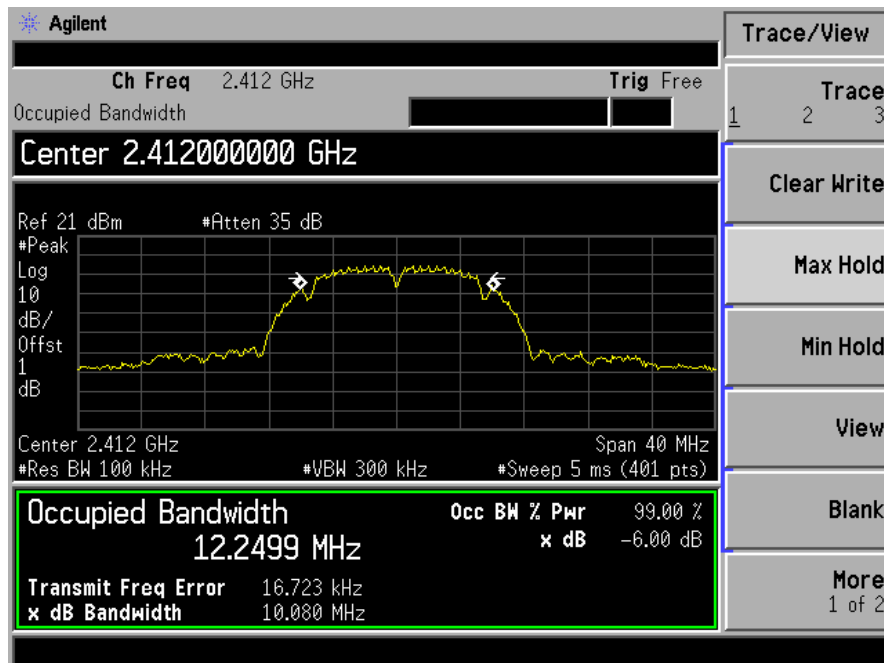


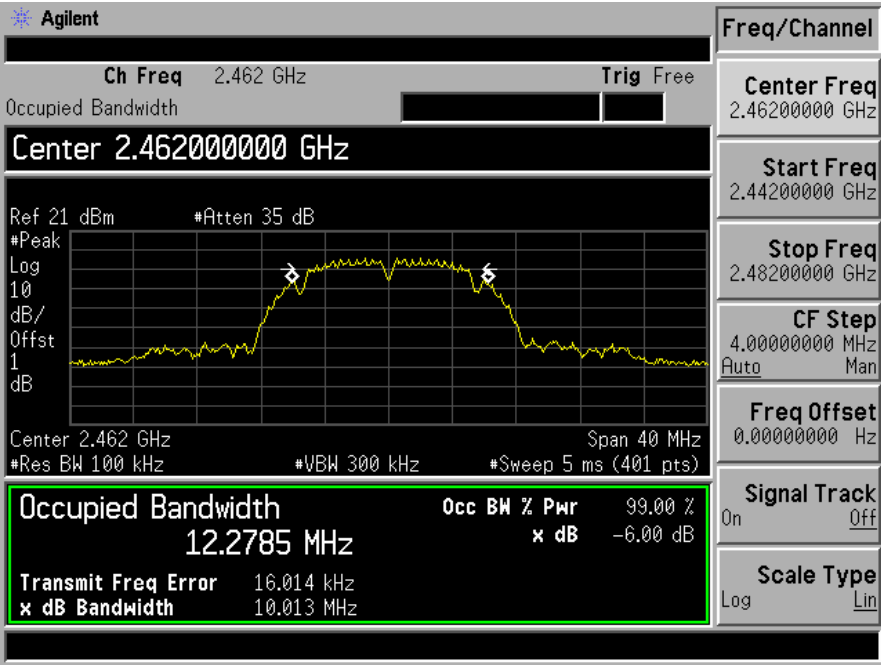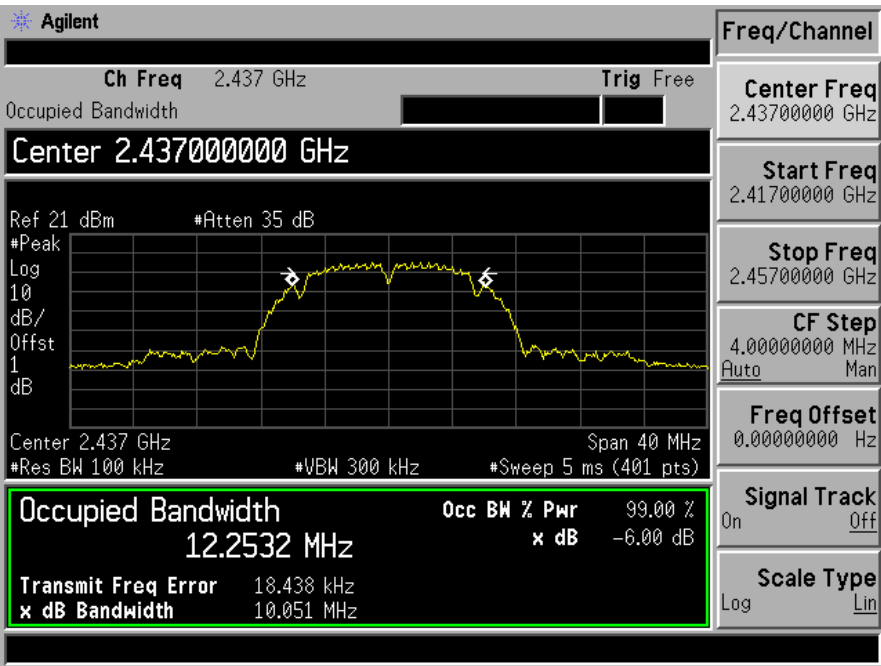

Spectrum Detector:	PK	Test Date :	June 30, 2014
Test By:	Jack	Temperature :	24 °C
Test Result:	PASS	Humidity :	53 %
Operation Mode: 802.11g			

Channel number	Channel frequency (MHz)	Measurement level (MHz)	Required Limit (kHz)
1	2412	16.506	>500
6	2437	16.524	>500
11	2462	16.530	>500

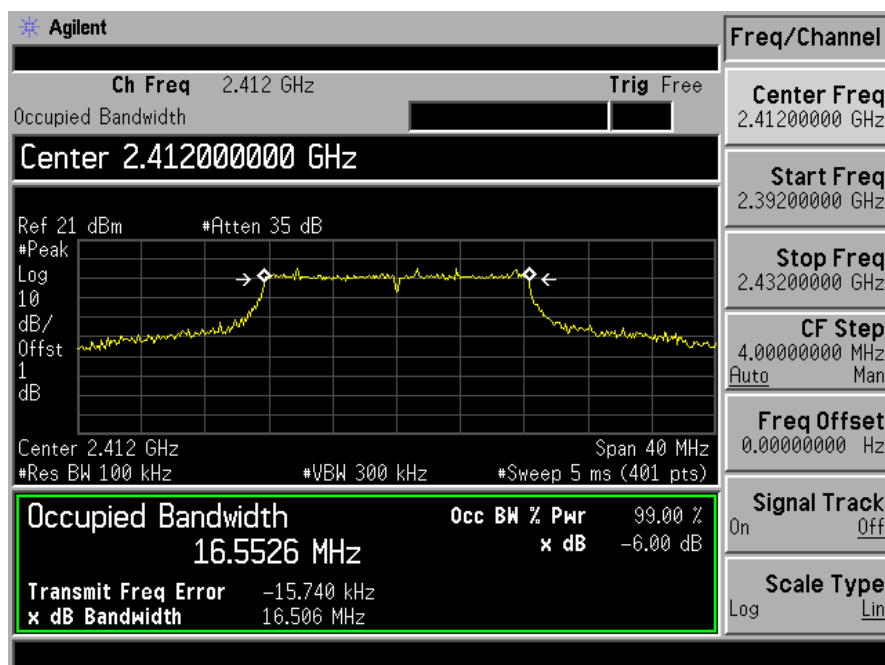


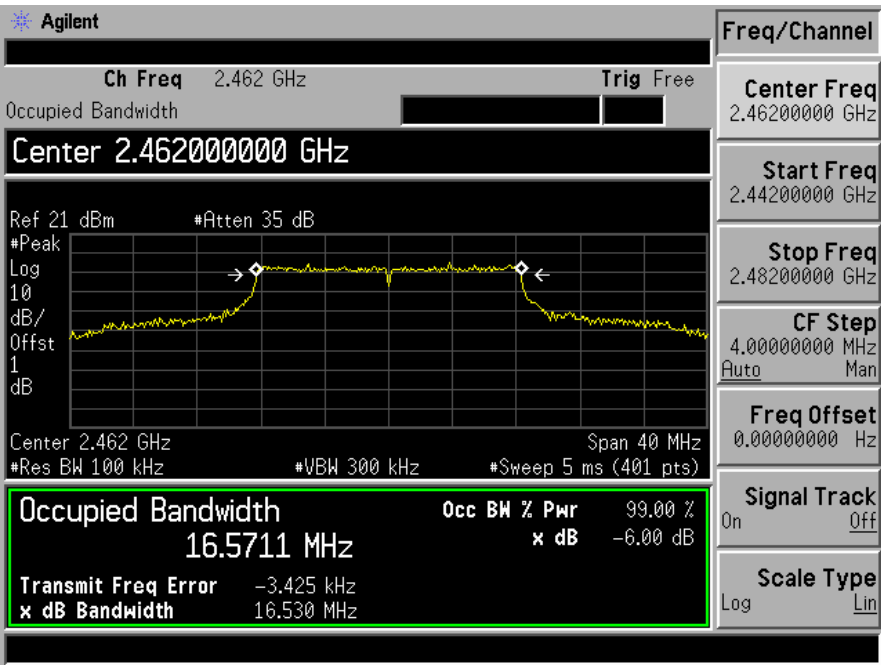
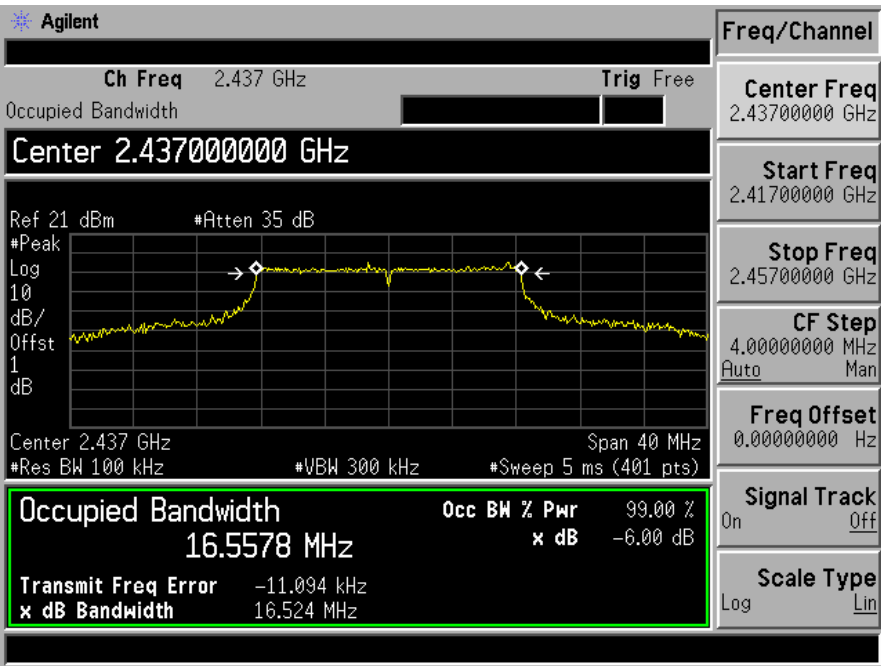


Spectrum Detector: PK
 Test By: Jack
 Test Result: PASS
 Operation Mode: 802.11n HT 20

Test Date : June 30, 2014
 Temperature : 24 °C
 Humidity : 53 %

Channel number	Channel frequency (MHz)	Measurement level (MHz)	Required Limit (kHz)
1	2412	17.311	>500
6	2437	17.277	>500
11	2462	17.652	>500

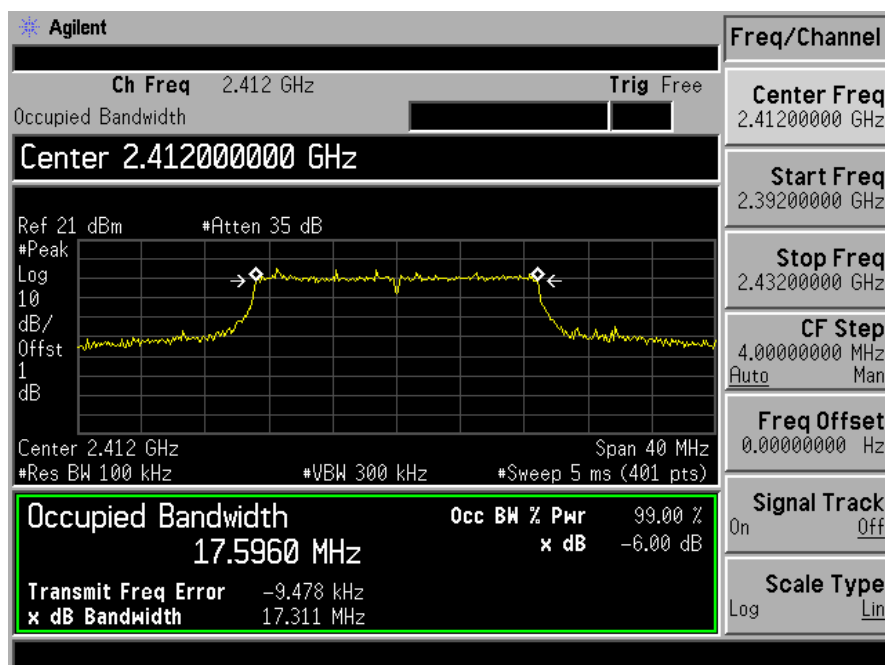


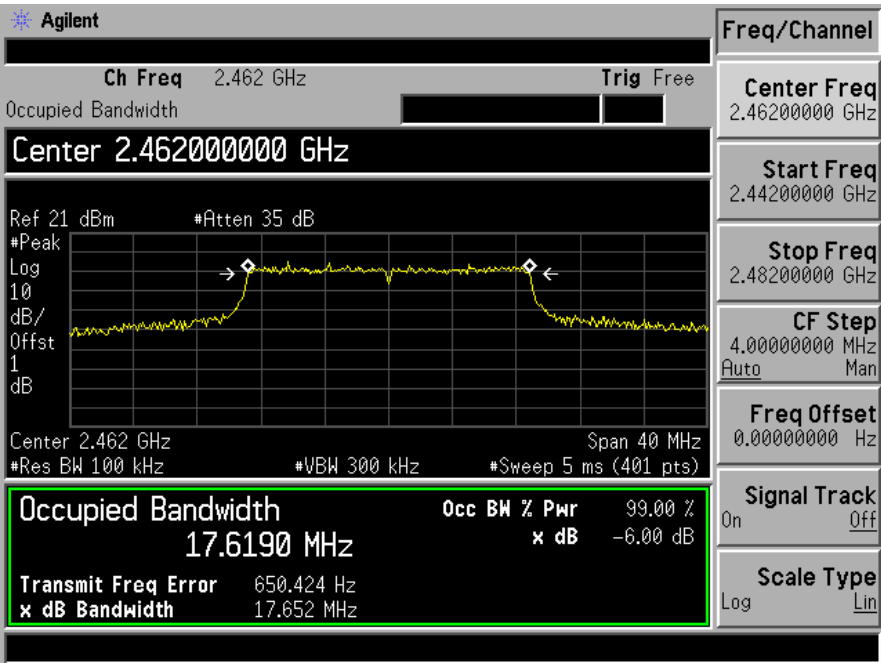
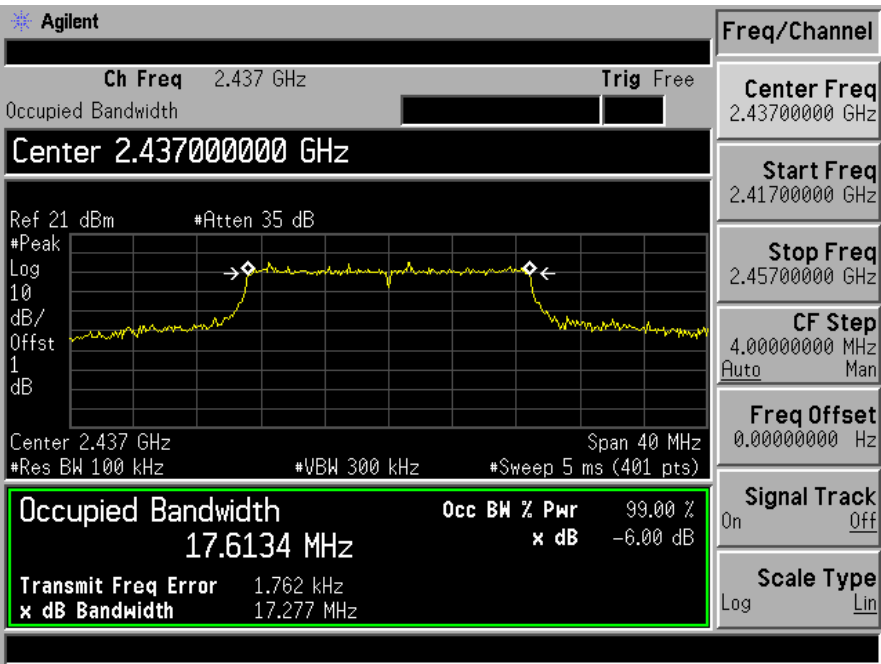


Spectrum Detector: PK
 Test By: Jack
 Test Result: PASS
 Operation Mode: 802.11n HT40

Test Date : June 30, 2014
 Temperature : 24 °C
 Humidity : 53 %

Channel number	Channel frequency (MHz)	Measurement level (MHz)	Required Limit (kHz)
3	2422	36.039	>500
6	2437	36.204	>500
9	2452	36.129	>500

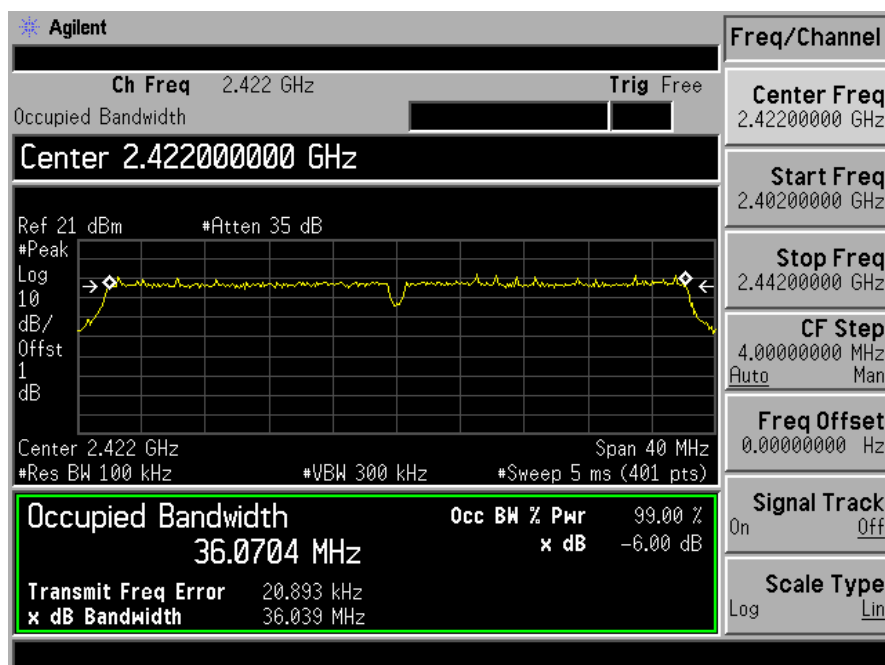

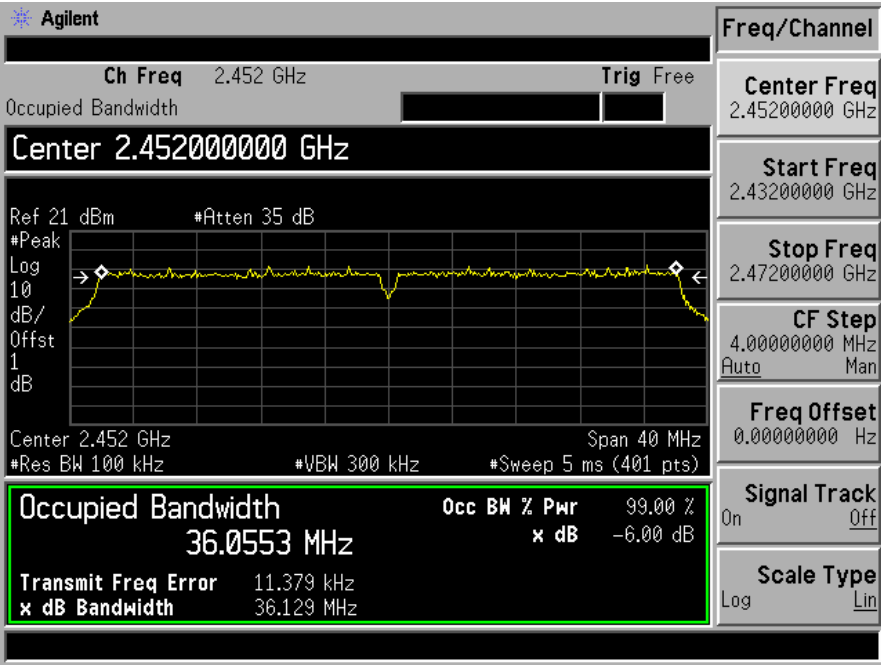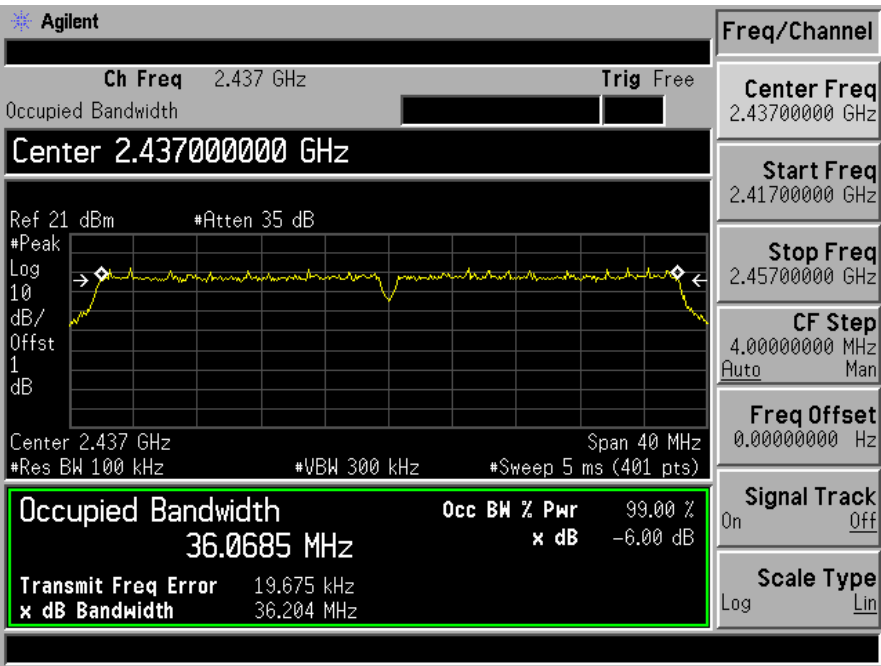

8. Maximum Peak Output Power Test

8.1 Measurement Procedure

- The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r02.
- The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- Set to the maximum power setting and enable the EUT transmit continuously.
- Measure the conducted output power and record the results in the test report.

8.2 Test SET-UP (Block Diagram of Configuration)



8.3 Measurement Equipment Used

EQUIPMENT TYPE	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Power meter	ML2495A	0824006	05/17/2014	05/16/2015
Power sensor	MA2411B	0738172	05/17/2014	05/16/2015

8.4 Peak Power output limit

The maximum peak power shall be less 1Watt.

8.5 Measurement Results

Spectrum Detector: PK Test Date : June 30, 2014
Test By: Jack Temperature : 24 °C
Test Result: PASS Humidity : 53 %
Operation Mode: 802.11b Chain A

Channel number	Channel Frequency(MHz)	Peak Power output(dBm)	Peak Power Limit(W)	Pass/Fail
1	2412.00	19.17	1W(30dBm)	PASS
6	2437.00	19.61	1W(30dBm)	PASS
11	2462.00	20.39	1W(30dBm)	PASS

Spectrum Detector: PK Test Date : June 30, 2014
Test By: Jack Temperature : 24 °C
Test Result: PASS Humidity : 53 %
Operation Mode: 802.11b Chain B

Channel number	Channel Frequency(MHz)	Peak Power output(dBm)	Peak Power Limit(W)	Pass/Fail
1	2412.00	16.94	1W(30dBm)	PASS
6	2437.00	16.52	1W(30dBm)	PASS
11	2462.00	17.13	1W(30dBm)	PASS

Spectrum Detector: PK Test Date : June 30, 2014
Test By: Jack Temperature : 24 °C
Test Result: PASS Humidity : 53 %
Operation Mode: 802.11g Chain A

Channel number	Channel Frequency(MHz)	Peak Power output(dBm)	Peak Power Limit(W)	Pass/Fail
1	2412.00	22.37	1W(30dBm)	PASS
6	2437.00	22.91	1W(30dBm)	PASS
11	2462.00	23.11	1W(30dBm)	PASS

Spectrum Detector: PK Test Date : June 30, 2014
Test By: Jack Temperature : 24 °C
Test Result: PASS Humidity : 53 %
Operation Mode: 802.11g Chain B

Channel number	Channel Frequency(MHz)	Peak Power output(dBm)	Peak Power Limit(W)	Pass/Fail
1	2412.00	19.55	1W(30dBm)	PASS
6	2437.00	20.07	1W(30dBm)	PASS
11	2462.00	20.12	1W(30dBm)	PASS

Spectrum Detector: PK Test Date : June 30, 2014
Test By: Jack Temperature : 24 °C
Test Result: PASS Humidity : 53 %
Operation Mode: 802.11n HT20 Chain A

Channel number	Channel Frequency(MHz)	Peak Power output(dBm)	Peak Power Limit(W)	Pass/Fail
1	2412.00	22.45	1W(30dBm)	PASS
6	2437.00	22.78	1W(30dBm)	PASS
11	2462.00	22.98	1W(30dBm)	PASS

Spectrum Detector: PK Test Date : June 30, 2014
Test By: Jack Temperature : 24 °C
Test Result: PASS Humidity : 53 %
Operation Mode: 802.11n HT20 Chain B

Channel number	Channel Frequency(MHz)	Peak Power output(dBm)	Peak Power Limit(W)	Pass/Fail
1	2412.00	19.45	1W(30dBm)	PASS
6	2437.00	20.10	1W(30dBm)	PASS
11	2462.00	20.55	1W(30dBm)	PASS

Spectrum Detector: PK Test Date : June 30, 2014
Test By: Jack Temperature : 24 °C
Test Result: PASS Humidity : 53 %
Operation Mode: 802.11n HT20 Chain A+ Chain B

Channel number	Channel Frequency(MHz)	Peak Power output(dBm)	Peak Power Limit(W)	Pass/Fail
1	2412.00	24.21	1W(30dBm)	PASS
6	2437.00	24.65	1W(30dBm)	PASS
11	2462.00	24.94	1W(30dBm)	PASS

Spectrum Detector: PK Test Date : June 30, 2014
Test By: Jack Temperature : 24℃
Test Result: PASS Humidity : 53 %
Operation Mode: 802.11n HT40 Chain A

Channel number	Channel Frequency(MHz)	Peak Power output(dBm)	Peak Power Limit(W)	Pass/Fail
3	2422.00	21.39	1W(30dBm)	PASS
6	2437.00	21.52	1W(30dBm)	PASS
9	2452.00	21.72	1W(30dBm)	PASS

Spectrum Detector: PK Test Date : June 30, 2014
Test By: Jack Temperature : 24℃
Test Result: PASS Humidity : 53 %
Operation Mode: 802.11n HT40 Chain B

Channel number	Channel Frequency(MHz)	Peak Power output(dBm)	Peak Power Limit(W)	Pass/Fail
3	2422.00	18.35	1W(30dBm)	PASS
6	2437.00	18.60	1W(30dBm)	PASS
9	2452.00	18.77	1W(30dBm)	PASS

Spectrum Detector: PK Test Date : June 30, 2014
Test By: Jack Temperature : 24℃
Test Result: PASS Humidity : 53 %
Operation Mode: 802.11n HT40 Chain A+ Chain B

Channel number	Channel Frequency(MHz)	Peak Power output(dBm)	Peak Power Limit(W)	Pass/Fail
3	2422.00	23.14	1W(30dBm)	PASS
6	2437.00	23.31	1W(30dBm)	PASS
9	2452.00	23.50	1W(30dBm)	PASS

9. Band Edge Test

9.1 Measurement Procedure

1. The EUT was setup according to ANSI C63.10, 2009 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
3. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2009. on radiated measurement.

9.2 Test SET-UP (Block Diagram of Configuration)

As 6.2 Test set up (B) and (C)

9.3 Measurement Equipment Used

Same as 6.3 Radiated Emission Measurement.

9.4 Measurement Results

Test mode: 802.11b

Spectrum Detector:	PK/AV	Test Date :	June 30, 2014
Test By:	Jack	Temperature :	24°C
Test channel:	01	Humidity :	53 %

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2390.00	H	70.63	48.62	74	54
2499.77	V	70.70	45.76	74	54

Spectrum Detector:	PK/AV	Test Date :	June 30, 2014
Test By:	Jack	Temperature :	24°C
Test channel:	11	Humidity :	53 %

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2483.50	H	70.15	50.94	74	54
2499.77	V	70.89	45.31	74	54

Test mode: 802.11g

Spectrum Detector: PK/AV Test Date : June 30, 2014
Test By: Jack Temperature : 24℃
Test channel: 01 Humidity : 53 %

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2390.00	H	65.48	45.35	74	54
2390.00	V	63.72	43.94	74	54

Spectrum Detector: PK/AV Test Date : June 30, 2014
Test By: Jack Temperature : 24℃
Test channel: 11 Humidity : 53 %

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2483.50	H	64.74	44.77	74	54
2483.50	V	64.15	43.69	74	54

Test mode: 802.11n HT20

Spectrum Detector: PK/AV Test Date : June 30, 2014
Test By: Jack Temperature : 24℃
Test channel: 01 Humidity : 53 %

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2390.00	H	66.76	46.43	74	54
2390.00	V	63.28	44.64	74	54

Spectrum Detector: PK/AV Test Date : June 30, 2014
Test By: Jack Temperature : 24℃
Test channel: 11 Humidity : 53 %

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2483.50	H	65.38	45.93	74	54
2483.50	V	63.99	44.89	74	54

Test mode: 802.11n HT40

Spectrum Detector: PK/AV Test Date : June 30, 2014
 Test By: Jack Temperature : 24℃
 Test channel: 03 Humidity : 53 %

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2390.00	H	62.48	44.28	74	54
2390.00	V	60.65	41.72	74	54

Spectrum Detector: PK/AV Test Date : June 30, 2014
 Test By: Jack Temperature : 24℃
 Test channel: 09 Humidity : 53 %

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2483.50	H	61.79	43.05	74	54
2483.50	V	60.11	40.59	74	54

10. Power Density

10.1 Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2014	05/16/2015

10.2 Measuring Instruments and Setting


The following table is the setting of spectrum analyzer.

Spectrum analyzer	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS bandwidth.
RB	$3\text{kHz} \leq \text{RBW} \leq 100\text{KHz}$
VB	$3 \times \text{RBW}$
Detector	Peak
Trace	Max hold
Sweep Time	Automatic

10.3 Test Procedures

- The transmitter output (antenna port) was connected to the spectrum analyzer.
- Set analyzer center frequency to DTS channel center frequency.
- Set the analyzer span to a minimum of 1.5 times the DTS bandwidth.
- Set the $\text{RBW} \geq 3 \text{ kHz}$. Set the $\text{VBW} \geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

10.4 Block Diagram of Test Setup




10.5 Limit



The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3 kHz bandwidth.

10.6 Test Result

Spectrum Detector: PK Test Date : June 30, 2014
 Test By: Jack Temperature : 24 °C
 Test Result: PASS Humidity : 53 %
 Operation Mode: 802.11b Chain A


Channel	Measurement Level (dBm)	Required Limit (dBm)	Result
1	1.946	<8dBm	PASS
6	4.032	<8dBm	PASS
11	5.196	<8dBm	PASS


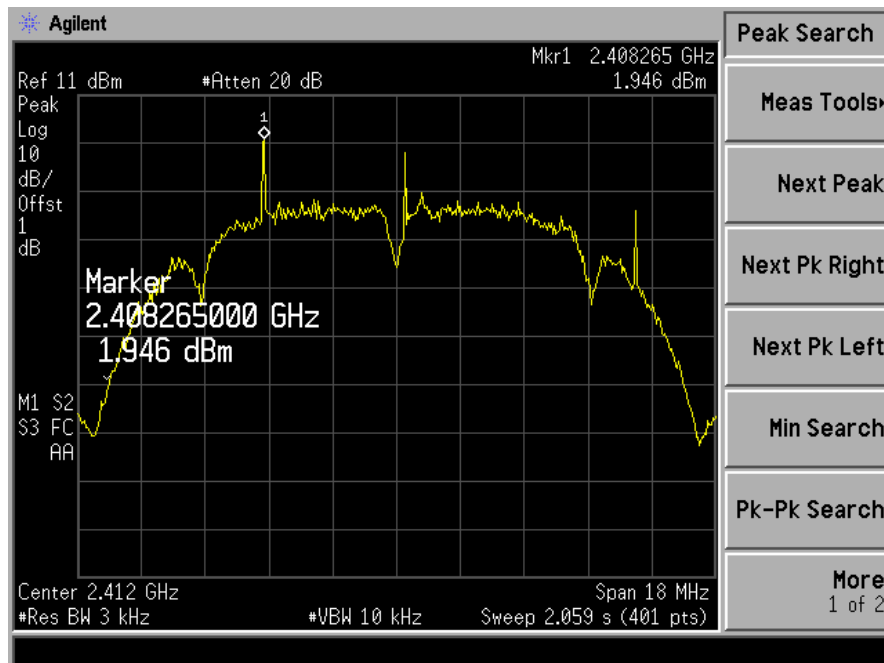


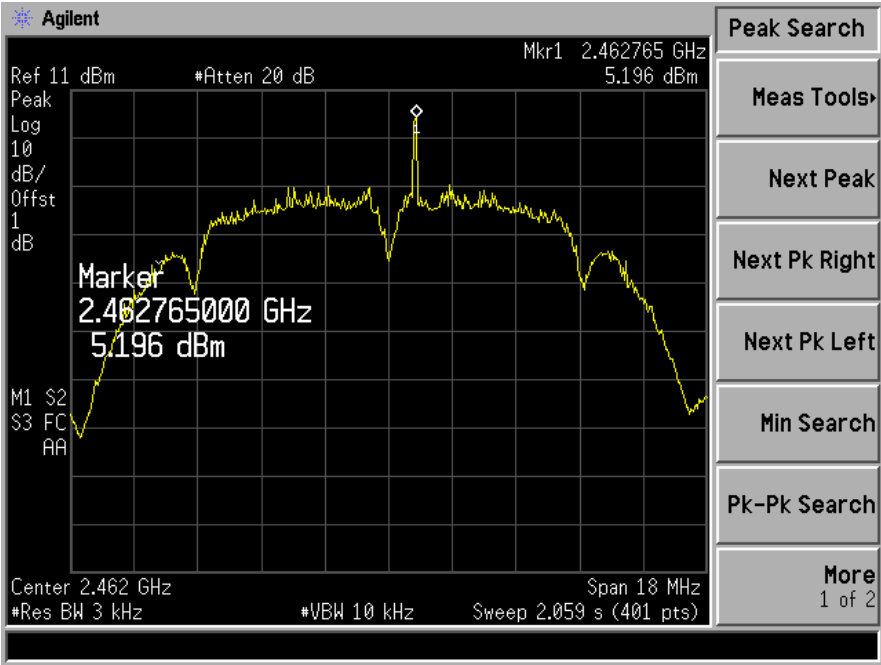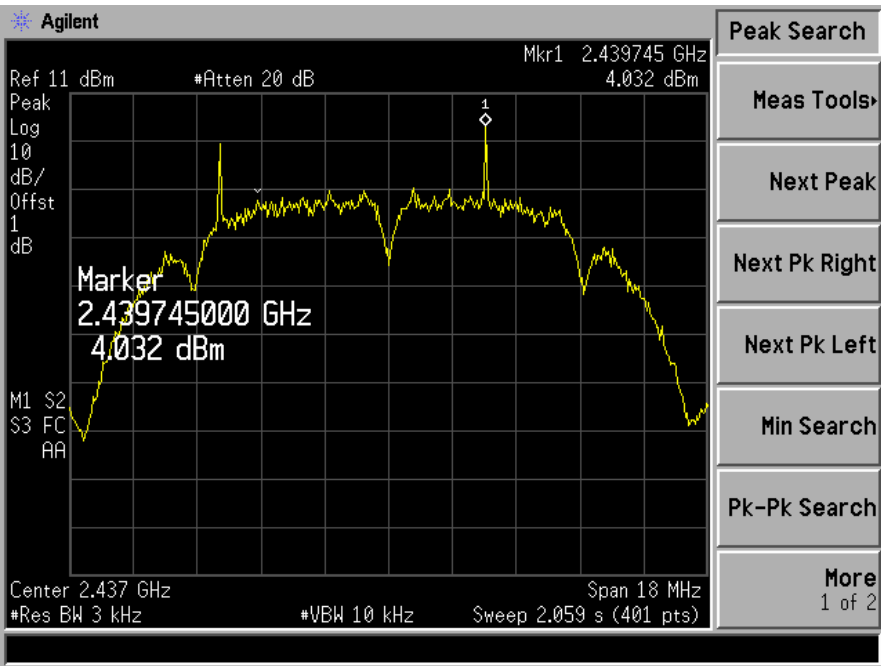

Spectrum Detector: PK Test Date : June 30, 2014
 Test By: Jack Temperature : 24 °C
 Test Result: PASS Humidity : 53 %
 Operation Mode: 802.11b Chain B


Channel	Measurement Level (dBm)	Required Limit (dBm)	Result
1	0.406	<8dBm	PASS
6	-0.856	<8dBm	PASS
11	0.553	<8dBm	PASS


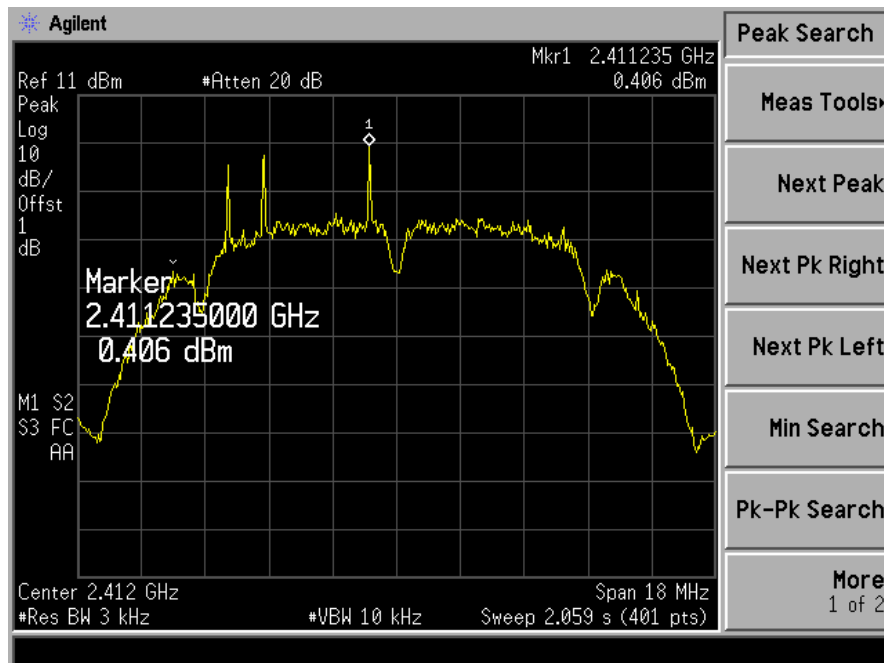


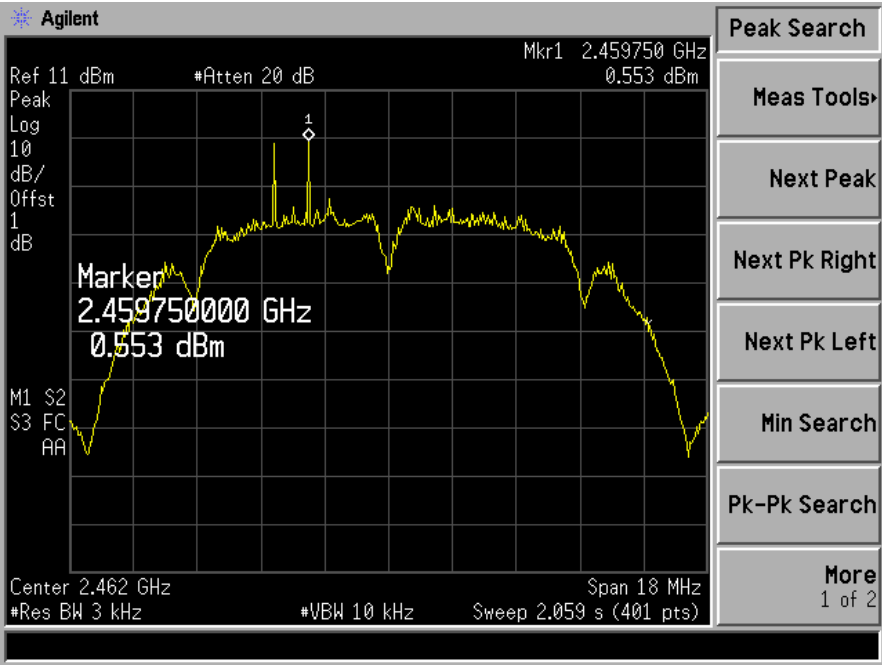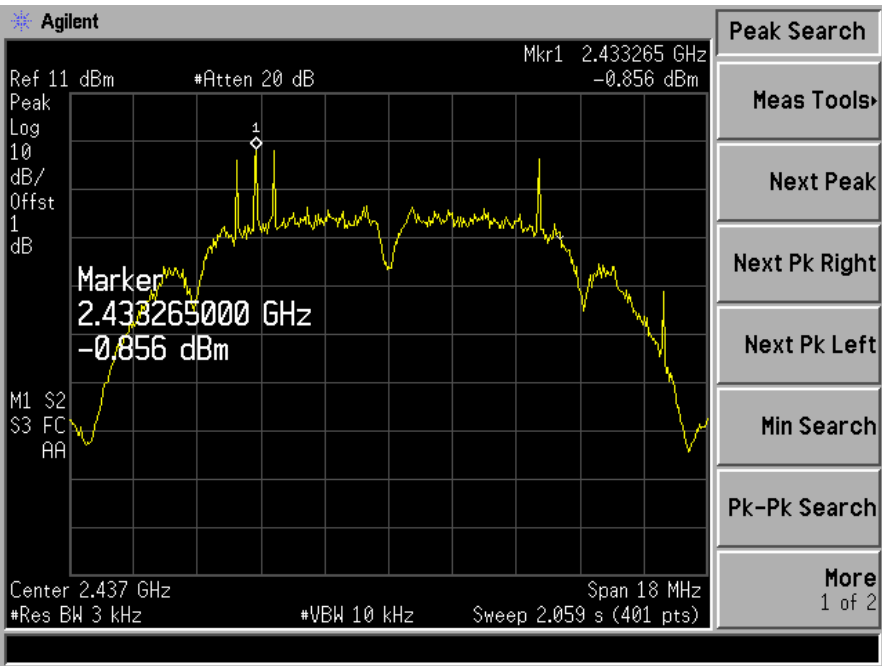

Spectrum Detector: PK Test Date : June 30, 2014
 Test By: Jack Temperature : 24 °C
 Test Result: PASS Humidity : 53 %
 Operation Mode: 802.11g Chain A


Channel	Measurement Level (dBm)	Required Limit (dBm)	Result
1	-10.10	<8dBm	PASS
6	-8.597	<8dBm	PASS
11	-8.743	<8dBm	PASS


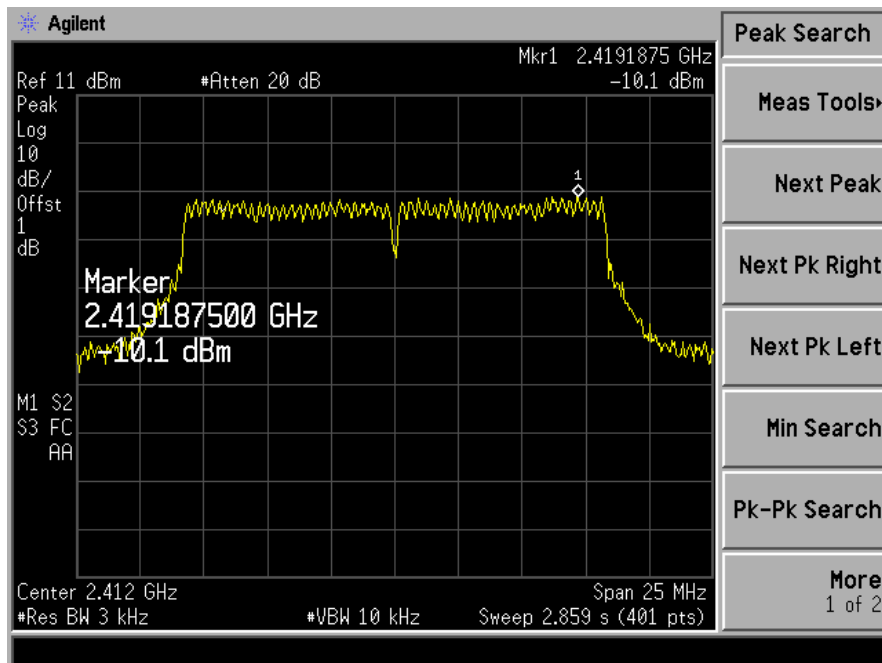


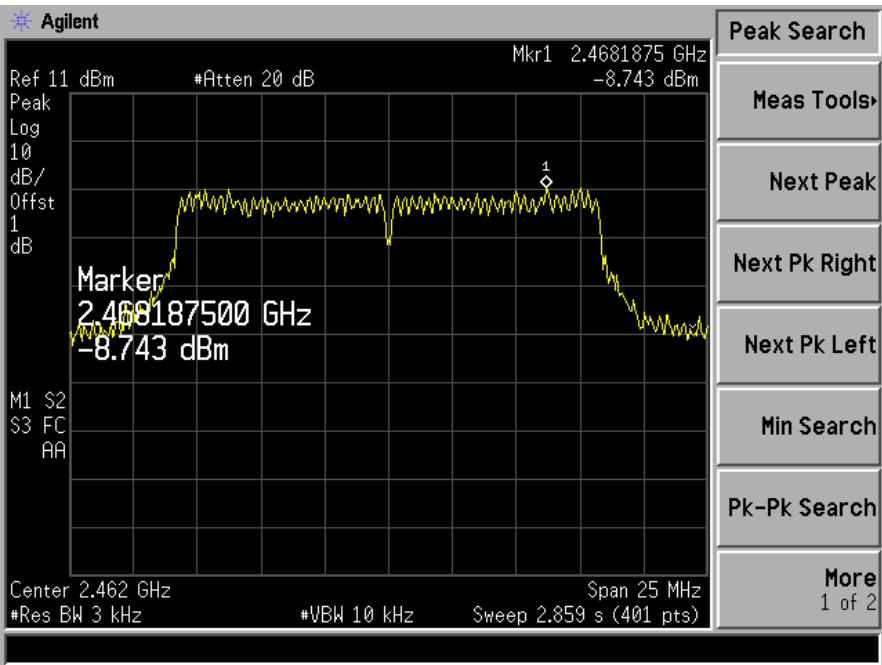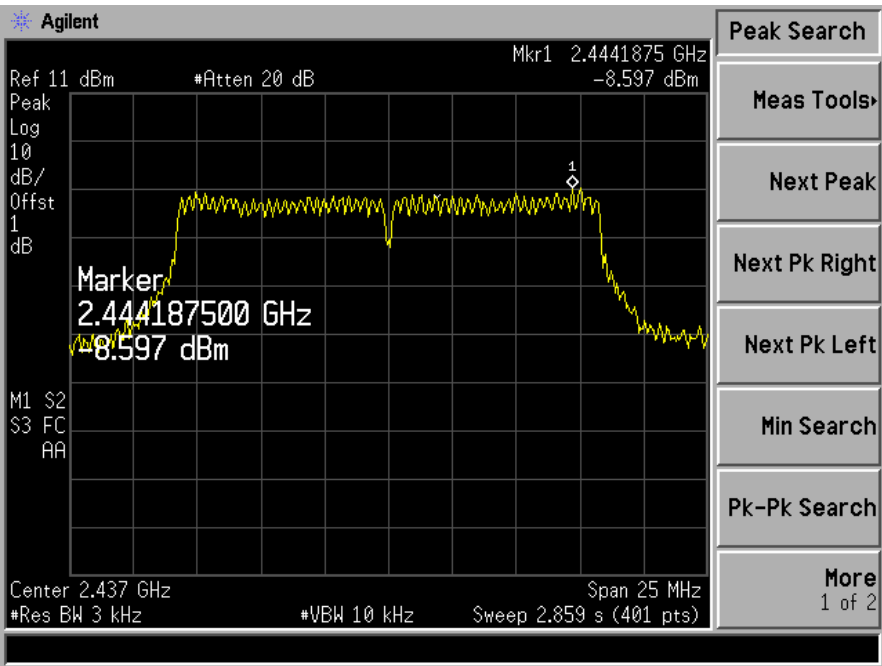

Spectrum Detector: PK Test Date : June 30, 2014
 Test By: Jack Temperature : 24 °C
 Test Result: PASS Humidity : 53 %
 Operation Mode: 802.11g Chain B

Channel	Measurement Level (dBm)	Required Limit (dBm)	Result
1	-12.75	<8dBm	PASS
6	-11.83	<8dBm	PASS
11	-12.18	<8dBm	PASS

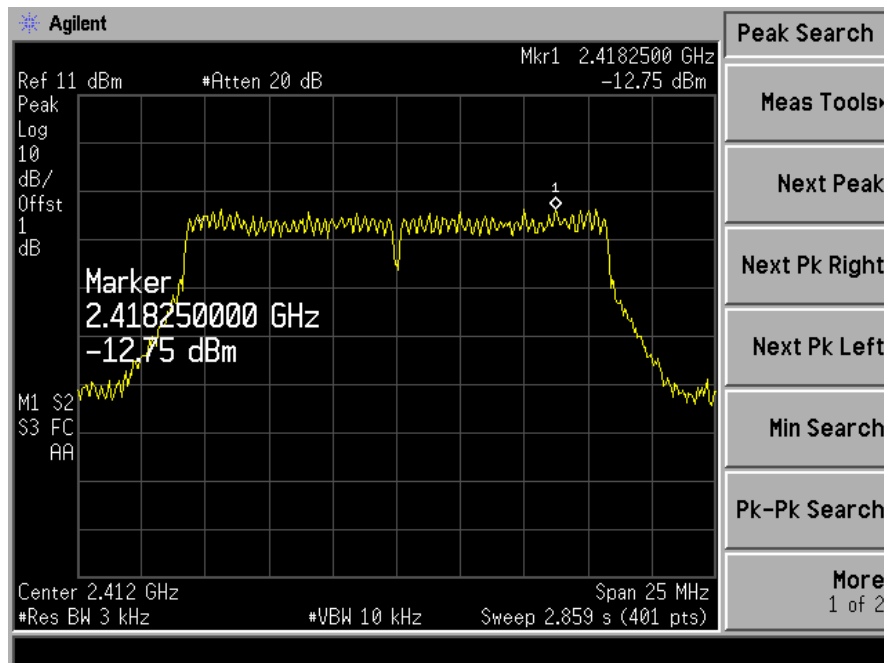

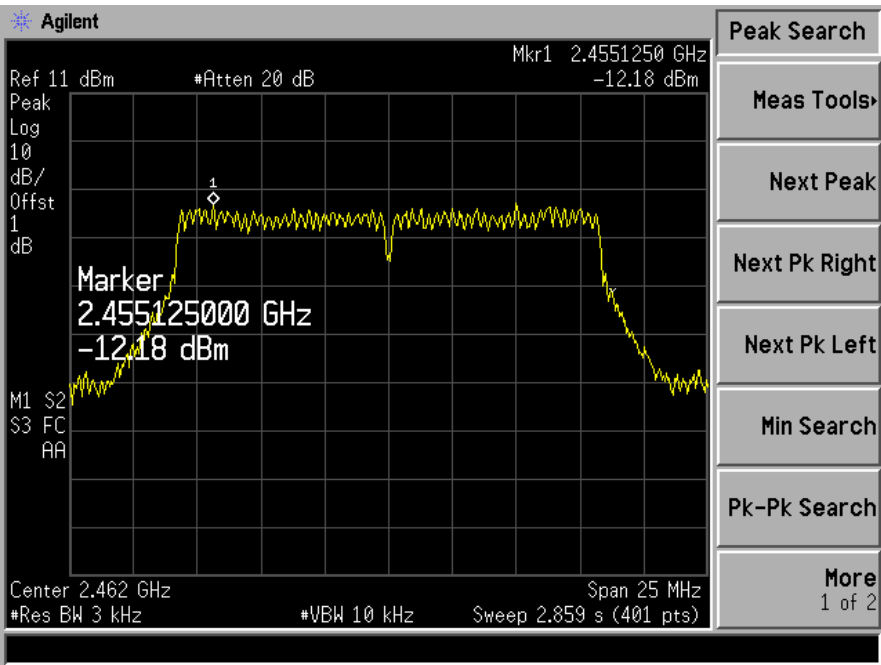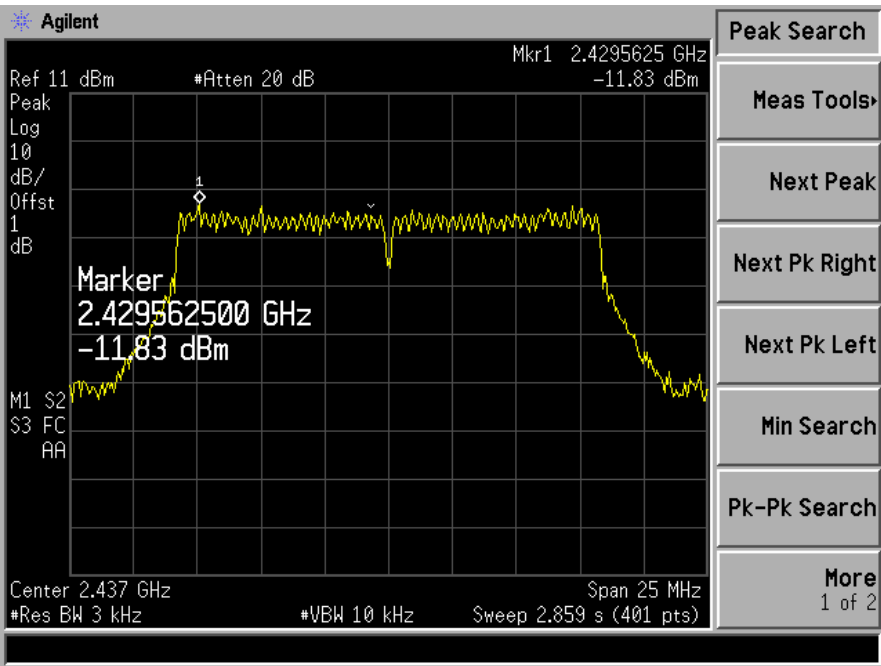




Spectrum Detector: PK Test Date : June 30, 2014
Test By: Jack Temperature : 24°C
Test Result: PASS Humidity : 53 %
Operation Mode: 802.11n HT20 Chain A+ Chain B

Channel	Measurement Level (dBm)	Required Limit (dBm)	Result
1	-7.41	<8dBm	PASS
6	-7.26	<8dBm	PASS
11	-7.05	<8dBm	PASS

Spectrum Detector: PK Test Date : June 30, 2014
Test By: Jack Temperature : 24°C
Test Result: PASS Humidity : 53 %
Operation Mode: 802.11n HT20 Chain A


Channel	Measurement Level (dBm)	Required Limit (dBm)	Result
1	-9.311	<8dBm	PASS
6	-8.585	<8dBm	PASS
11	-8.581	<8dBm	PASS


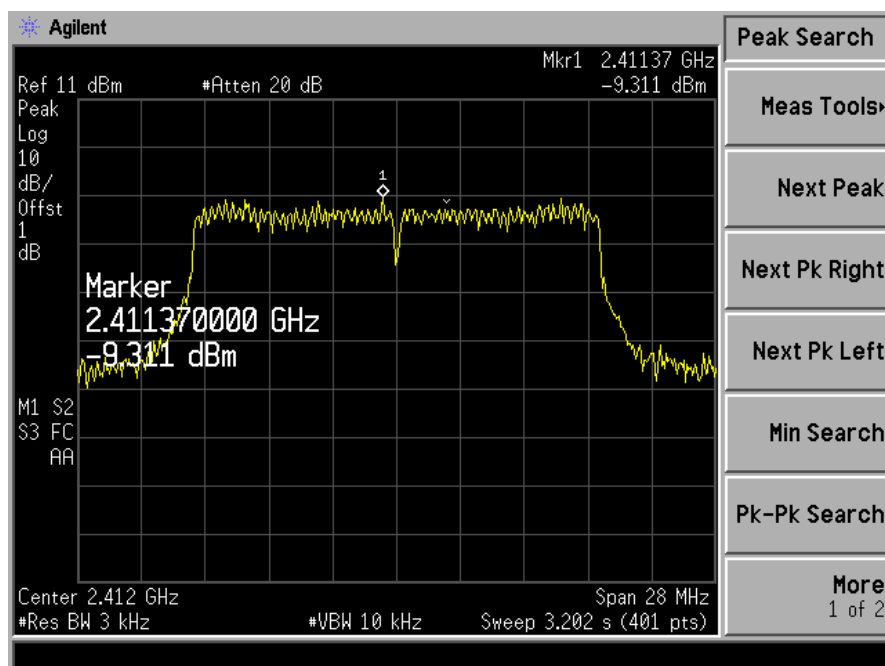


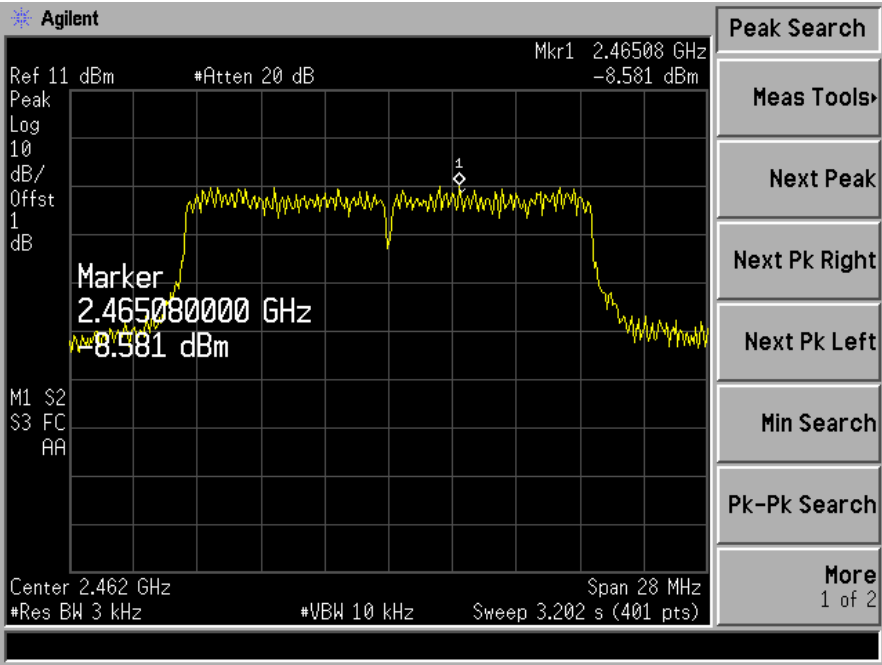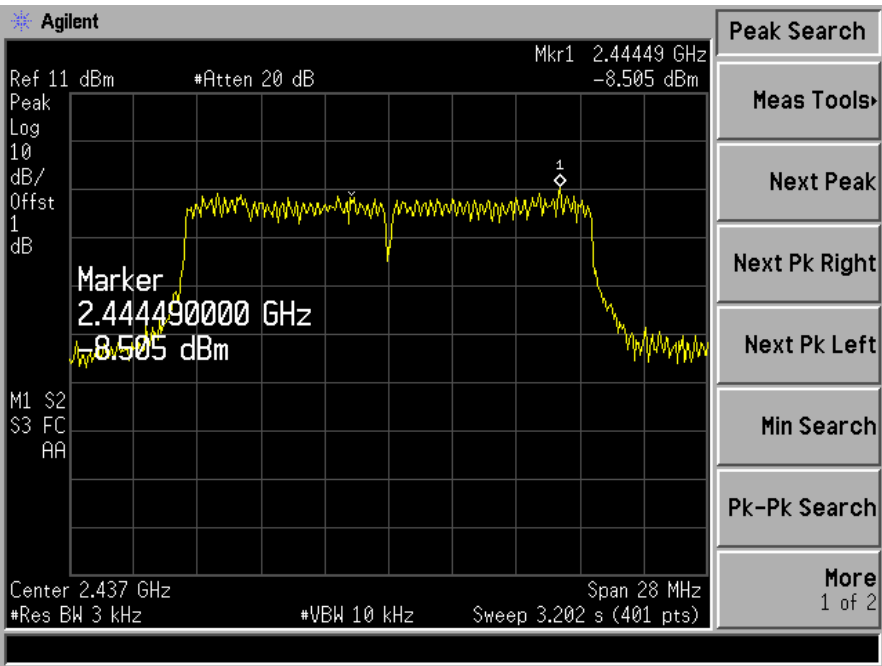

Spectrum Detector: PK Test Date : June 30, 2014
 Test By: Jack Temperature : 24 °C
 Test Result: PASS Humidity : 53 %
 Operation Mode: 802.11n HT20 Chain B

Channel	Measurement Level (dBm)	Required Limit (dBm)	Result
1	-11.91	<8dBm	PASS
6	-13.05	<8dBm	PASS
11	-12.33	<8dBm	PASS

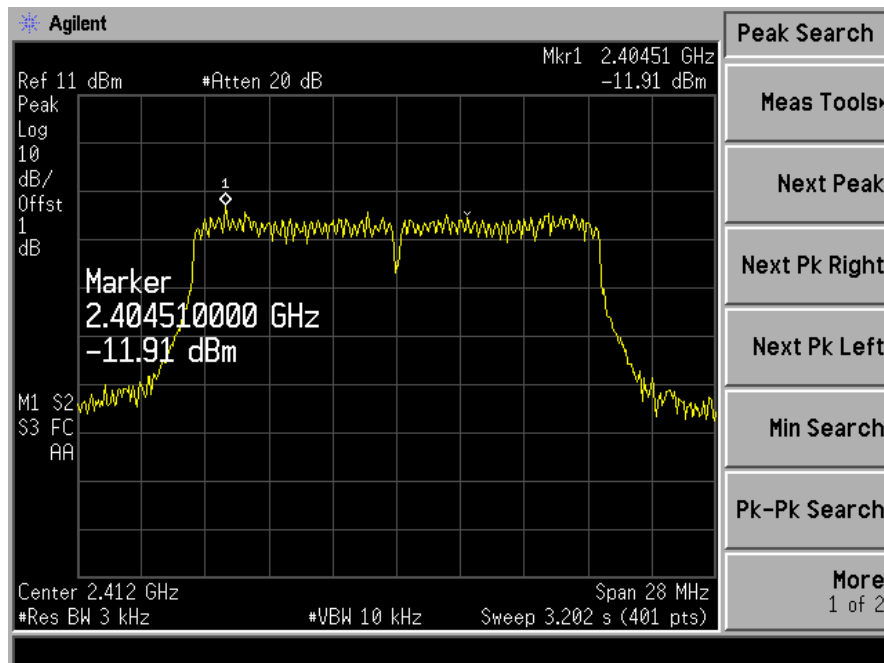

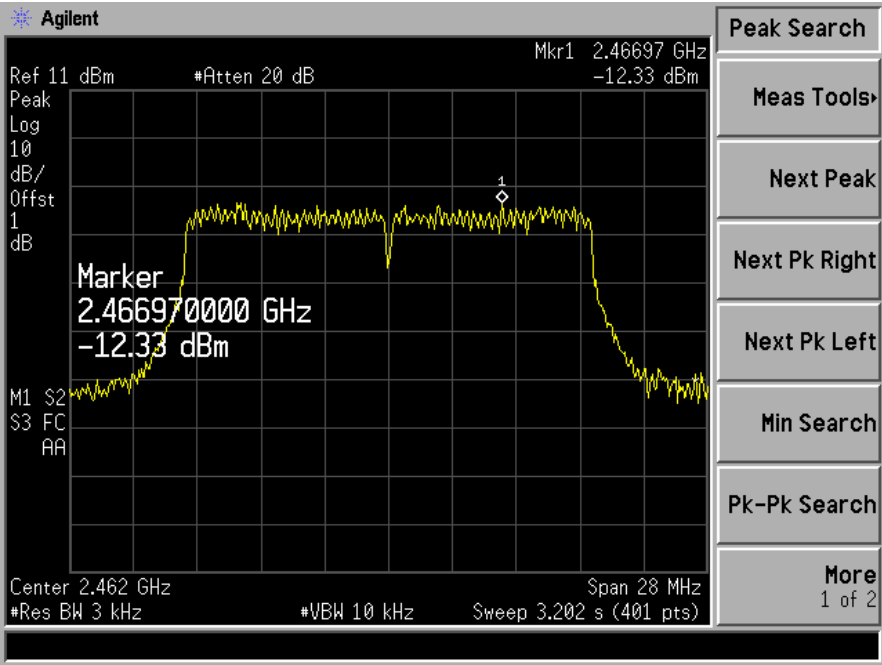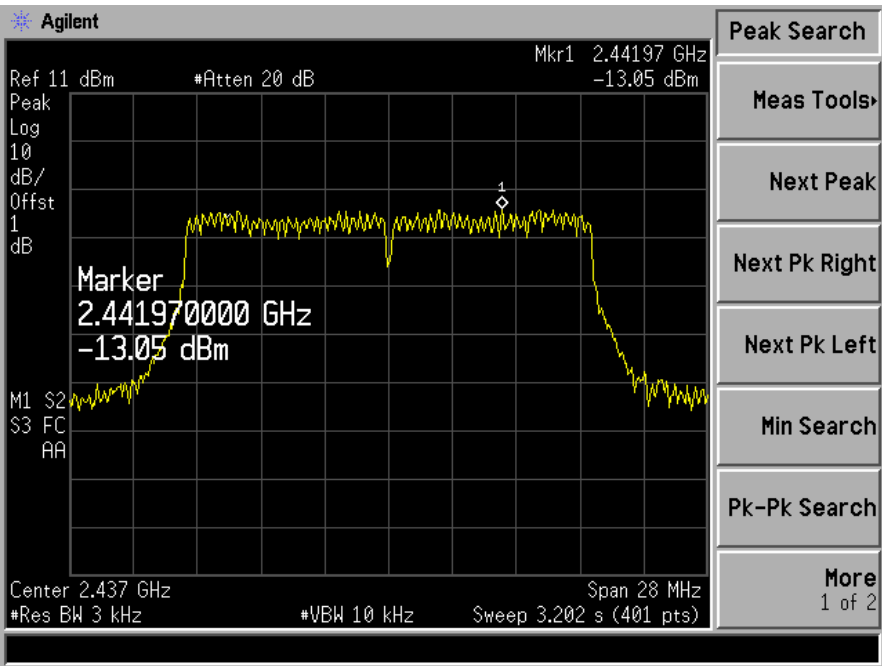




Spectrum Detector: PK Test Date : June 30, 2014
Test By: Jack Temperature : 24℃
Test Result: PASS Humidity : 53 %
Operation Mode: 802.11n HT40 Chain A+ Chain B

Channel	Measurement Level (dBm)	Required Limit (dBm)	Result
3	-9.21	<8dBm	PASS
6	-9.89	<8dBm	PASS
9	-9.83	<8dBm	PASS

Spectrum Detector: PK Test Date : June 30, 2014
Test By: Jack Temperature : 24℃
Test Result: PASS Humidity : 53 %
Operation Mode: 802.11n HT40 Chain A


Channel	Measurement Level (dBm)	Required Limit (dBm)	Result
3	-11.51	<8dBm	PASS
6	-12.25	<8dBm	PASS
9	-12.25	<8dBm	PASS


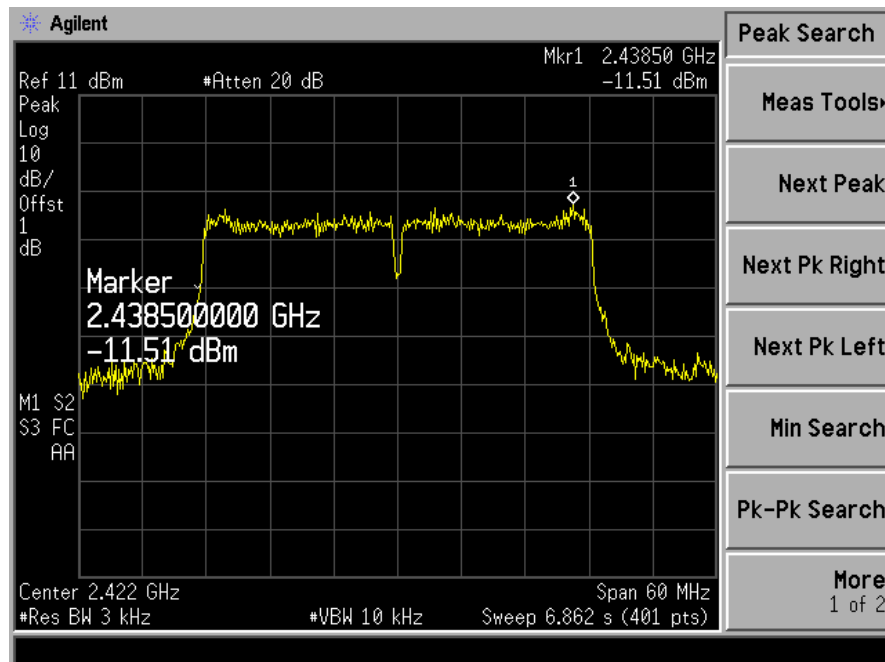


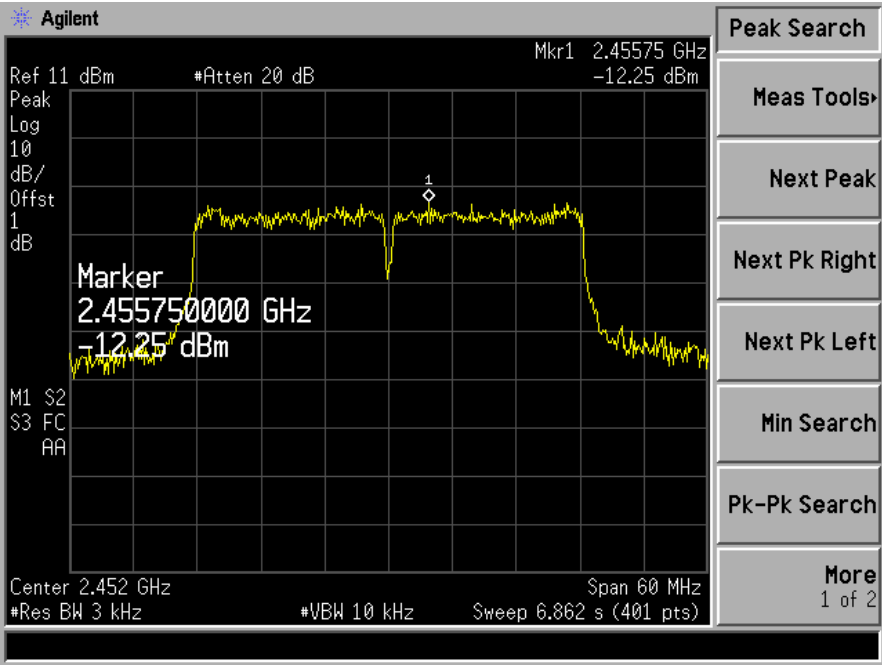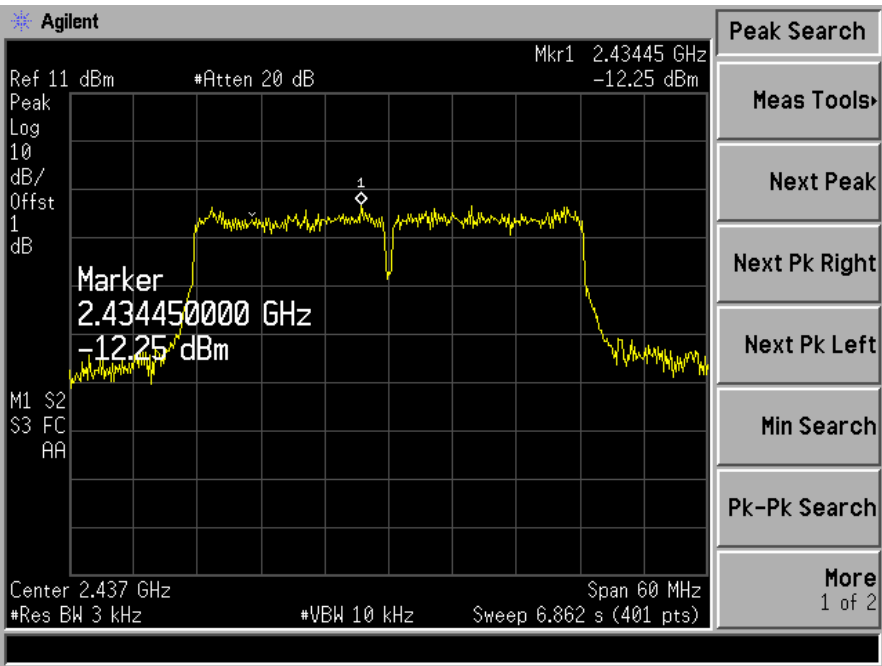

Spectrum Detector: PK Test Date : June 30, 2014
 Test By: Jack Temperature : 24 °C
 Test Result: PASS Humidity : 53 %
 Operation Mode: 802.11n HT40 Chain B

Channel	Measurement Level (dBm)	Required Limit (dBm)	Result
3	-13.06	<8dBm	PASS
6	-13.67	<8dBm	PASS
9	-13.52	<8dBm	PASS

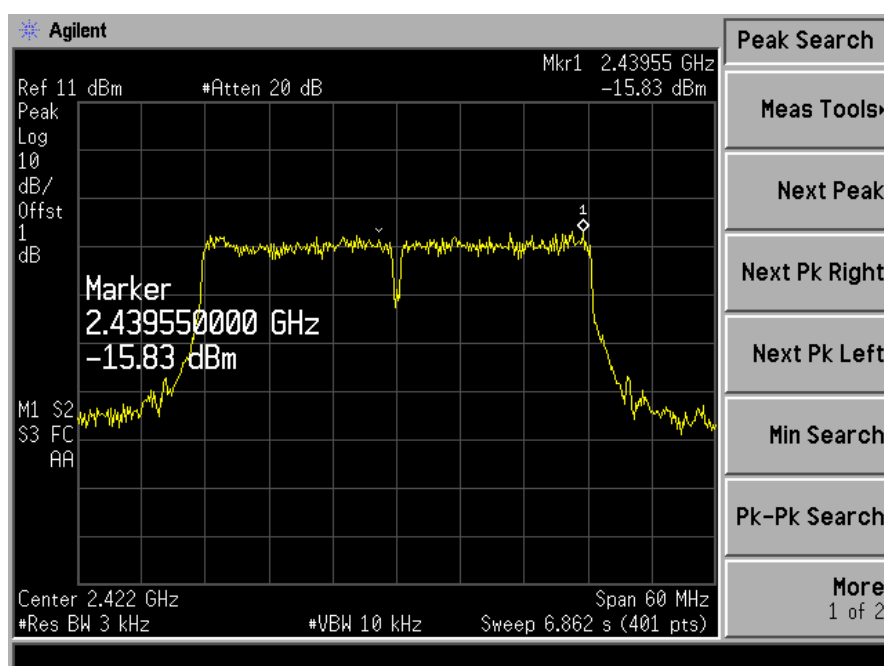

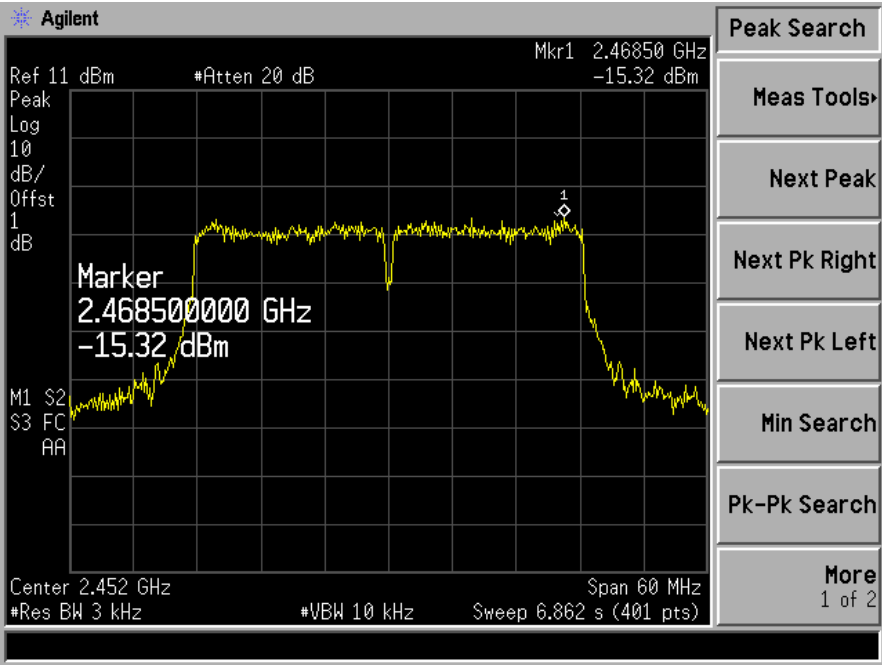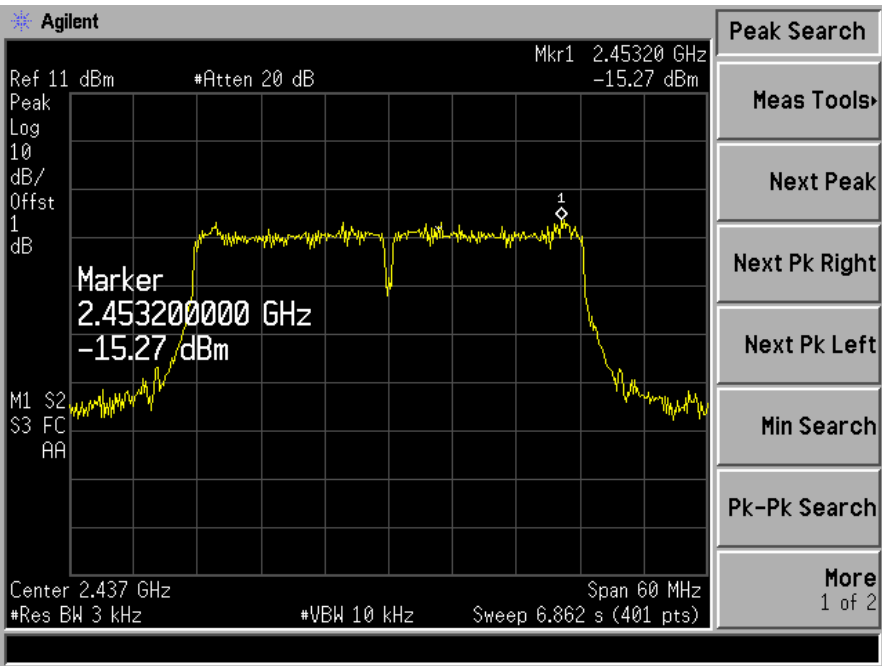

11. Antenna Port Emission

11.1 Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2014	05/16/2015

11.2 Measuring Instruments and Setting


The following table is the setting of spectrum analyzer.

Spectrum analyzer	Setting
Attenuation	Auto
RB	100kHz for below 1GHz, 1MHz for above 1GHz
VB	300kHz for below 1GHz, 3MHz for above 1GHz
Detector	Peak
Trace	Max hold

11.3 Test Procedures

The conducted spurious emissions were measured conducted using a spectrum analyzer at low, Middle, and high channels, the limit was determined by attenuation 20dB of the RF peak power output.

11.4 Block Diagram of Test setup





11.5 Test Result

PASS.



All the modulation modes were tested the data of the worst mode (802.11b) are recorded in the following pages.

Chain A:



802.11b Low Channel 1

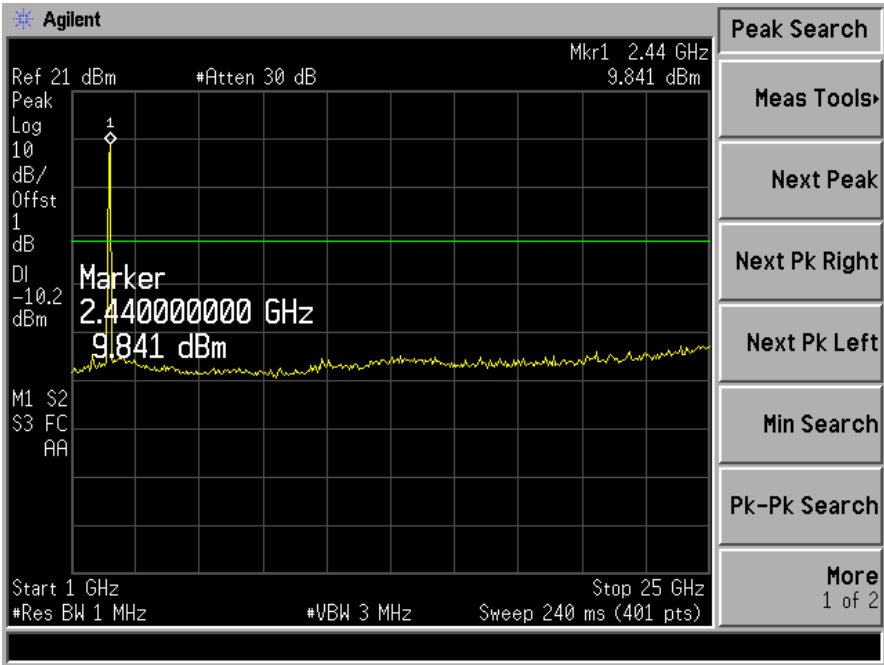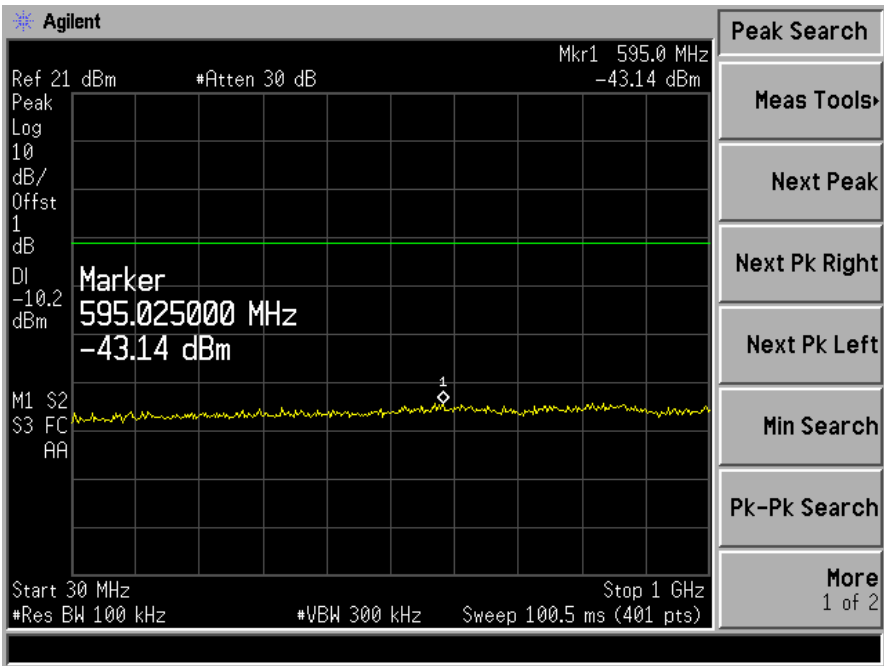

802.11b Mid Channel 6

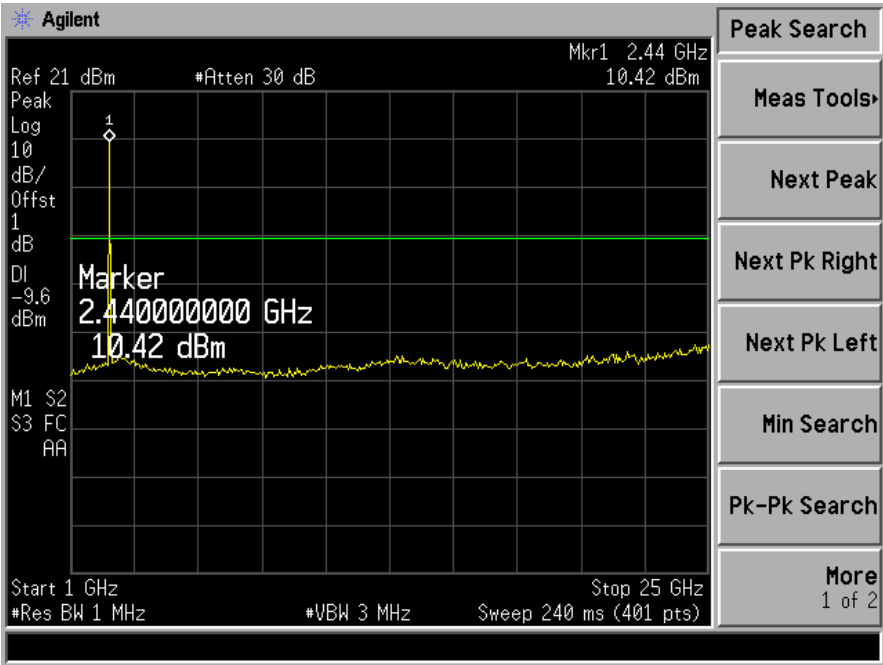
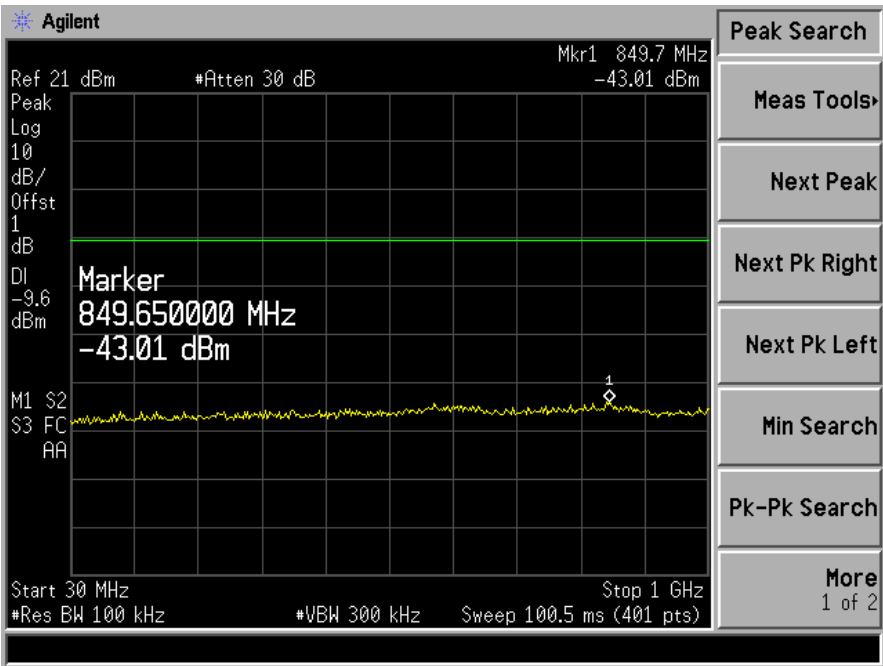


802.11b High Channel 11

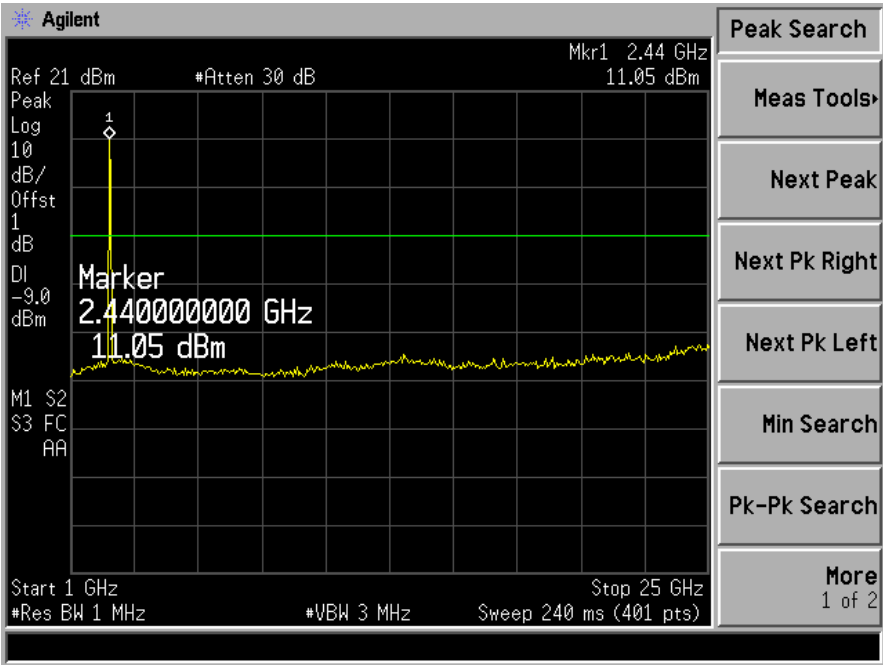
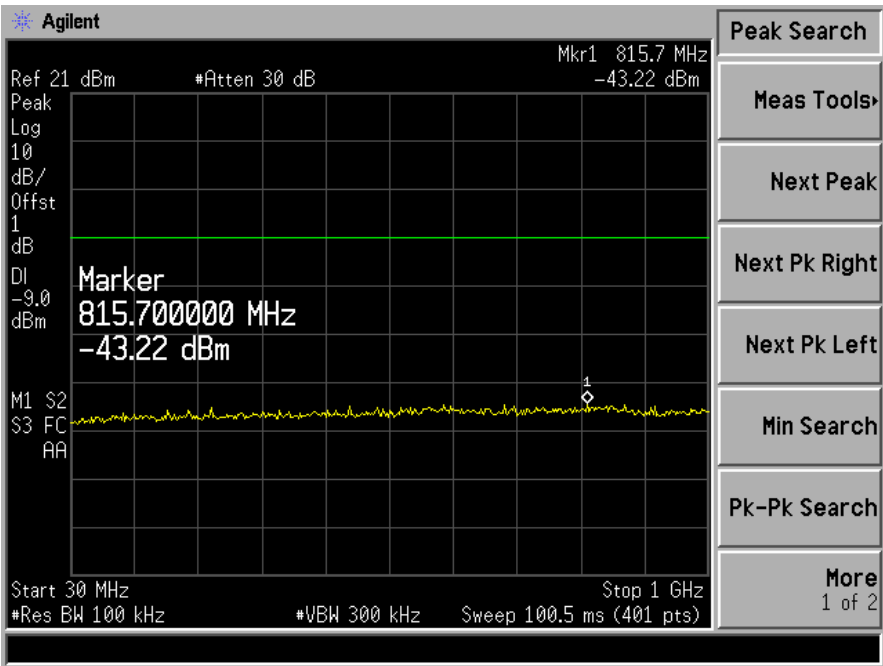


Chain B:



802.11b Low Channel 1

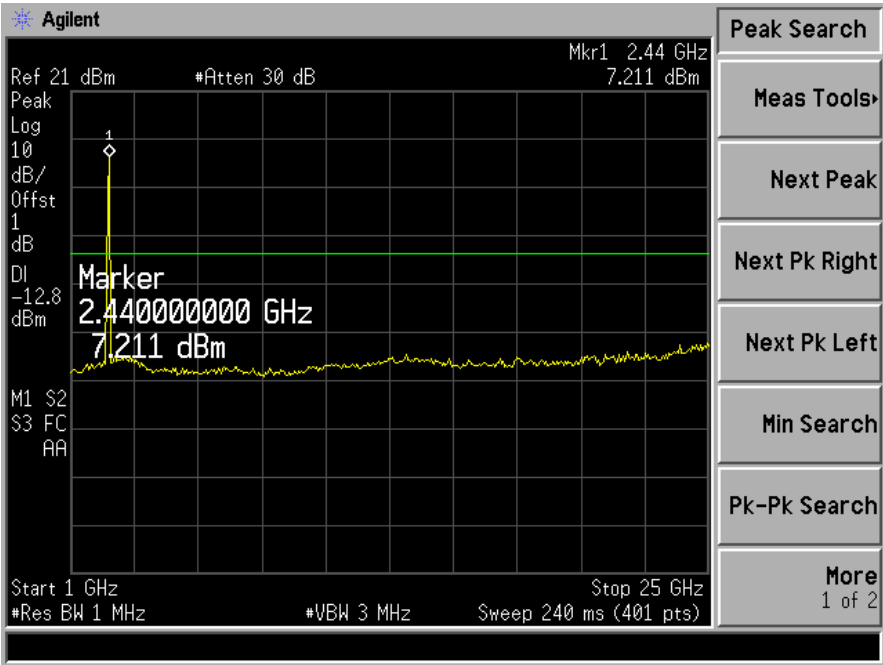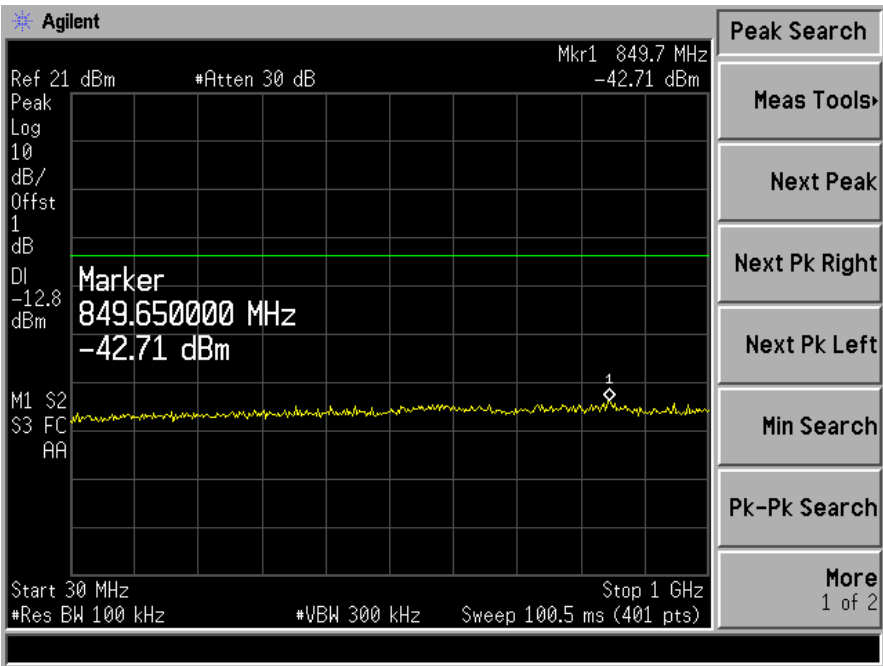

802.11b Mid Channel 6

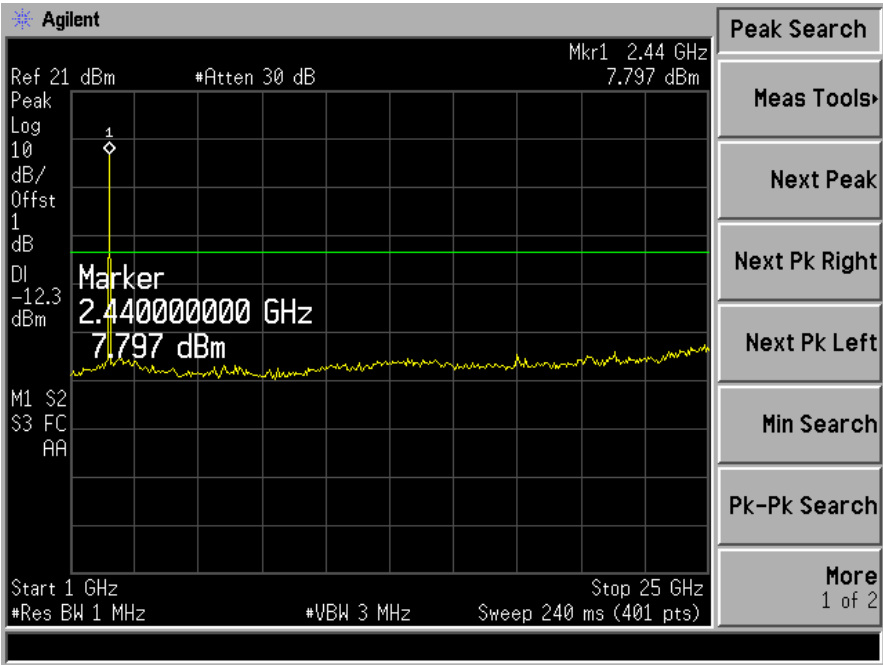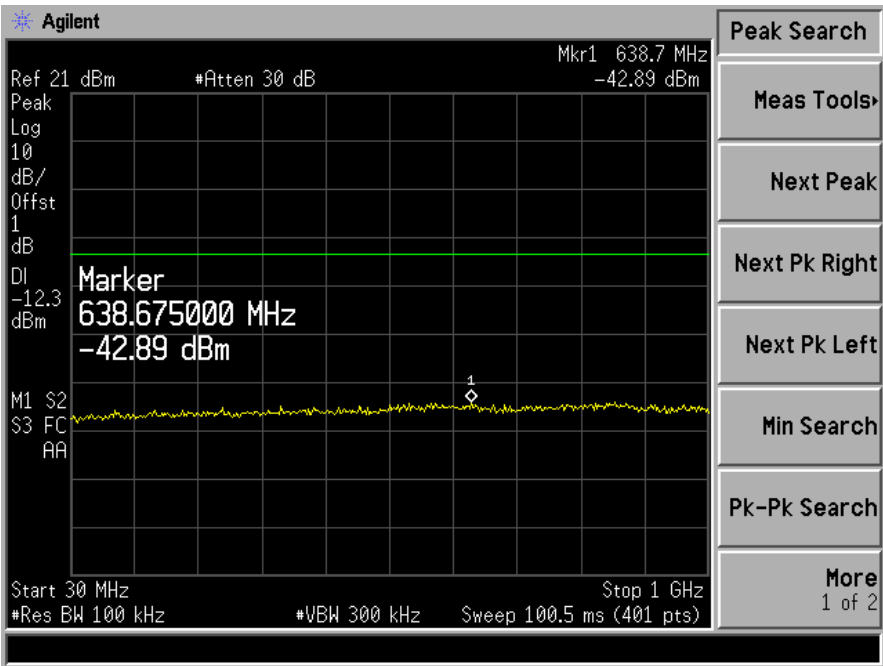

802.11b High Channel 11

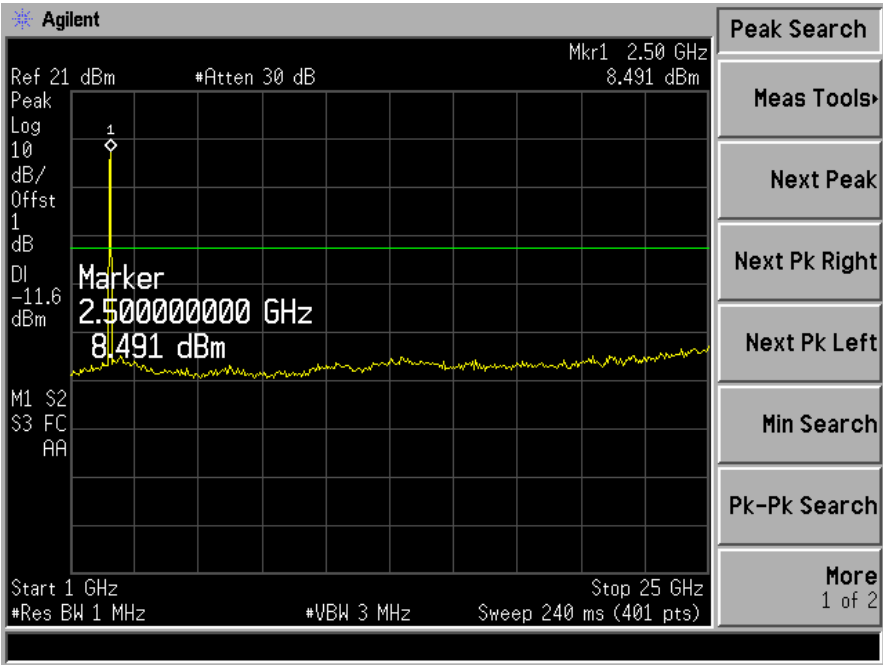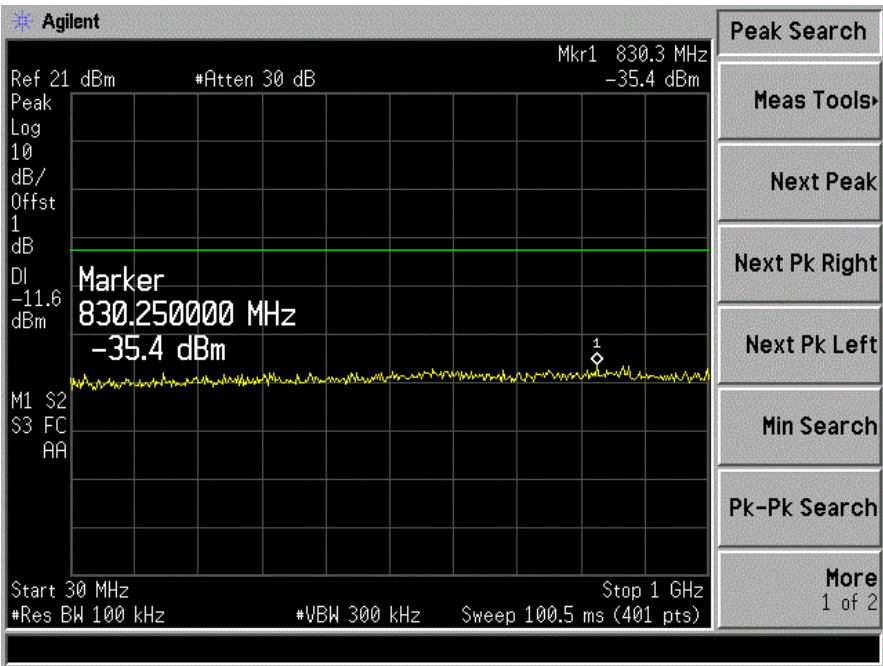

12. Antenna Application

12.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2 Result

The EUT'S antenna is Chip Antenna. The antenna's gain is 2.0dBi and meets the requirement.