



FCC/IC Test Report

FOR:

Manufacturer: The Morey Corporation

Model: OM400

Product Description: Offender/ Asset Tracker

FCC ID: AB3-OM400

IC ID: 10424A-OM400

47 CFR Part 2, 22, 24

RSS-132 Issue 3

RSS-133 Issue 6

TEST REPORT #: EMC_MOREY-020-12001_WWAN

DATE: 2013-05-22



**FCC:
Accredited**

**IC recognized #
3462B-1**

CETECOM Inc.

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: +1 (408) 586 6200 ♦ Fax: +1 (408) 586 6299 ♦ E-mail: info@cetecomusa.com ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571

Table of Contents

1	Assessment.....	3
2	Administrative Data	4
2.1	Identification of the Testing Laboratory Issuing the Test Report	4
2.2	Identification of the Client.....	4
2.3	Identification of the Manufacturer.....	4
3	Equipment under Test (EUT).....	5
3.1	Specification of the Equipment under Test	5
3.2	Identification of the Equipment Under Test (EUT).....	6
3.3	Identification of Accessory equipment	6
3.4	Environmental conditions during Test:.....	6
3.5	Dates of Testing:	6
4	Subject of Investigation.....	7
5	Summary of Measurement Results	8
6	Measurements	10
6.1	RF Power Output.....	10
6.1.1	References	10
6.1.2	Measurement requirements:.....	10
6.1.3	Limits:	10
6.1.4	Conducted Output Power Measurement Verification.....	11
6.1.5	Radiated Output Power Measurement.....	12
6.1.6	Test Results:.....	14
6.2	Spurious Emissions Radiated.....	18
6.2.1	References	18
6.2.2	Measurement requirements:.....	18
6.2.3	Limits:	18
6.2.4	Radiated out of band measurement procedure:.....	20
6.2.5	Sample Calculations for Radiated Measurements	21
6.2.6	Test Conditions:	21
6.2.7	Test Results.....	22
7	Test Equipment and Ancillaries used for tests	31
8	Test Setup Diagrams	32
9	Revision History.....	33

1 Assessment

The following device was tested against the applicable criteria specified in FCC rules Parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations and Industry Canada Standards RSS 132 and RSS 133

No deviations were ascertained during the course of the tests performed.

Company	Description	Model #
The Morey Corporation	Offender/ Asset Tracker	OM400

Responsible for Testing Laboratory:

2013-05-22	Compliance	Franz Engert (Acting Lab Manager)	
Date	Section	Name	Signature

Responsible for the Report:

2013-05-22	Compliance	Zack Gray (EMC Engineer)	
Date	Section	Name	Signature

The test results of this test report relate exclusively to the test item specified in Section 3.

CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the Test Report

Company Name:	CETECOM Inc.
Department:	Compliance
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Acting Lab Manager:	Franz Engert
Test Engineer:	Zack Gray

2.2 Identification of the Client

Applicant's Name:	The Morey Corporation
Street Address:	100 Morey Drive
City/Zip Code	Woodridge IL 60517
Country	USA
Contact Person:	Jon Cook
Phone No.	(603) 754-2283
e-mail:	jcook@moreycorp.com

2.3 Identification of the Manufacturer

Same as Client.

3 Equipment under Test (EUT)

3.1 Specification of the Equipment under Test

Model No:	OM400
Product Description:	Offender /Asset Tracker
Hardware Version :	A
Software Version :	1.0.27
FCC-ID:	AB3-OM400
IC-ID :	10424A-OM400
Integrated Module Info:	Telit CC864-Dual (FCC ID: R17CC864-DUAL; IC: 5131A-CC864DUAL)
Frequency Bands of Operation and range of test:	Cellular US CDMA: 824.70-848.31 MHz PCS CDMA: 1851.25- 1908.75 MHz
Type(s) of Modulation:	CDMA: QPSK, HPSK
Antenna Info:	PCB Trace Antenna Peak Gains from Antenna Datasheet: -1.5 dBi for 850 MHz band of operation 0.7 dBi for 1900 MHz band of operation
Other Radios included in the device:	2.4 GHz 802.15.4 MiWi Transmitter (FCC ID: OA3MRF24J40MA)
Rated Operating Voltage Range (V DC):	3.3V (Low) / 3.7V (Nominal) / 4.2V (Max)
Rated Operating Temperature Range:	-20°C ~ +70°C
Test Sample Status:	Production

3.2 Identification of the Equipment Under Test (EUT)

EUT #	Serial Number	HW Version	SW Version	Notes
1	A1000009D0CBE3	A	1.0.27	Radiated
2	A1000009D0D1AA	A	1.0.27	Radiated
3	A1000009D0C91F	A	1.0.27	Conducted

3.3 Identification of Accessory equipment

AE #	Type	Manufacturer	Model	Serial Number
1	Switching Power Supply	Omnalink	SP050180	1012

3.4 Environmental conditions during Test:

The following environmental conditions were maintained during the course of testing:

Ambient Temperature: 20-25°C

Relative humidity: 40-60%

3.5 Dates of Testing:

Jan 20, 2012-Jan 31, 2013.

4 Subject of Investigation

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in the following test standards:

- 47 CFR Part 2: Title 47 of the Code of Federal Regulations: Chapter I-Federal Communications Commission Frequency allocations and radio treaty matters; general rules and regulations.
- 47 CFR Part 22: Title 47 of the Code of Federal Regulations: Chapter I-Federal Communications Commission subchapter B- common carrier services; Part 22- Public mobile services
- 47 CFR Part 24: Title 47 of the Code of Federal Regulations: Chapter I-Federal Communications Commission subchapter B- common carrier services; Part 24- Personal communication services
- RSS 132- Issue 3: Spectrum management and telecommunication policy- Radio Standards Specifications Cellular telephones employing new technologies operating in the bands 824-849MHz and 869-894MHz
- RSS 133- Issue 6: Spectrum management and telecommunication policy- Radio Standards Specifications- 2GHz personal communication services

This test report is to support a request for new equipment authorization under the FCC ID: **AB3-OM400** and IC ID: **1042A-OM400**.

All testing was performed on the product referred to in Section 3 as EUT.

The EUT incorporates a pre-certified module CC864-DUAL from Telit.

Based on verification that the module's conducted output power is within documented production tolerances and following guidance from FCC KDB 996369, this test report covers the radiated test portion of the above listed FCC rule parts.

For conducted test results, reference is made to the results from the module's pre-certification and as documented in test report number #HCT-RF09-0716-1 issued by HCT Co., LTD. on 2009-07-16 and as published on the module's FCC filing.

5 Summary of Measurement Results

850 MHz Band:

Test Specification	Test Case	Temperature and Voltage Conditions	Mode	Pass	Fail	NA	NP	Result
§2.1046 §22.913 (a) RSS132 4.4	RF Output Power	Nominal	CDMA 850	■	□	□	□	Complies
§2.1055 §22.355 RSS132 4.3	Frequency Stability	Nominal	CDMA 850	□	□	□	■	Complies*
§2.1049 §22.917(b) RSS132 4.2	Occupied Bandwidth	Nominal	CDMA 850	□	□	□	■	Complies*
§2.1051 §22.917 RSS132 4.5	Band Edge Compliance	Nominal	CDMA 850	□	□	□	■	Complies*
§2.1051 §22.917 RSS132 4.5	Conducted Spurious Emissions	Nominal	CDMA 850	□	□	□	■	Complies*
§2.1053 §22.917 RSS132 4.5	Radiated Spurious Emissions	Nominal	CDMA 850	■	□	□	□	Complies

Note: NA= Not Applicable; NP= Not Performed.

*Conducted measurements leveraged from module certification data.

1900 MHz Band:

Test Specification	Test Case	Temperature and Voltage Conditions	Mode	Pass	Fail	NA	NP	Result
§2.1046 §24.232 (a) RSS133 6.4	RF Output Power	Nominal	CDMA 1900	■	□	□	□	Complies
§2.1055 §24.235 RSS133 6.3	Frequency Stability	Nominal	CDMA 1900	□	□	□	■	Complies*
§2.1049 §24.238(b) RSS133 6.2	Occupied Bandwidth	Nominal	CDMA 1900	□	□	□	■	Complies*
§2.1051 §24.238 RSS133 6.5	Band Edge Compliance	Nominal	CDMA 1900	□	□	□	■	Complies*
§2.1051 §24.238 RSS133 6.5	Conducted Spurious Emissions	Nominal	CDMA 1900	□	□	□	■	Complies*
§2.1053 §24.238 RSS133 6.5	Radiated Spurious Emissions	Nominal	CDMA 1900	■	□	□	□	Complies

Note: NA= Not Applicable; NP= Not Performed.

*Conducted measurements leveraged from module certification data.

6 Measurements

6.1 RF Power Output

6.1.1 References

FCC: CFR Part 2.1046, CFR Part 22.913, CFR Part 24.232

IC: RSS-Gen Section 4.8; RSS 132 Section 5.4; RSS 133 Section 6.4

6.1.2 Measurement requirements:

6.1.2.1 FCC 2.1046: RF power output.

Power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on circuit elements as specified. The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

6.1.2.2 RSS-Gen 4.8: RF power output.

Transmitter output power measurements shall be carried out before the unwanted emissions test. The transmitter output power value, obtained from this test, serves as the reference level used to determine the unwanted emissions.

6.1.3 Limits:

6.1.3.1 FCC 22.913 (a) Effective radiated power limits.

The effective radiated power (ERP) of mobile transmitters must not exceed 7 Watts.

6.1.3.2 FCC 24.232 (b)(c) Power limits.

(b) Mobile/portable stations are limited to 2 Watts effective isotropic radiated power (EIRP).

(c) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement over the full bandwidth of the channel.

6.1.3.3 RSS-132 Issue 3, Section 5.4

The transmitter output power shall be measured in terms of average power. The equivalent isotropically radiated power (e.i.r.p.) for mobile equipment shall not exceed 11.5 watts.

In addition, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

6.1.3.4 RSS-133 Issue 6, Section 6.4

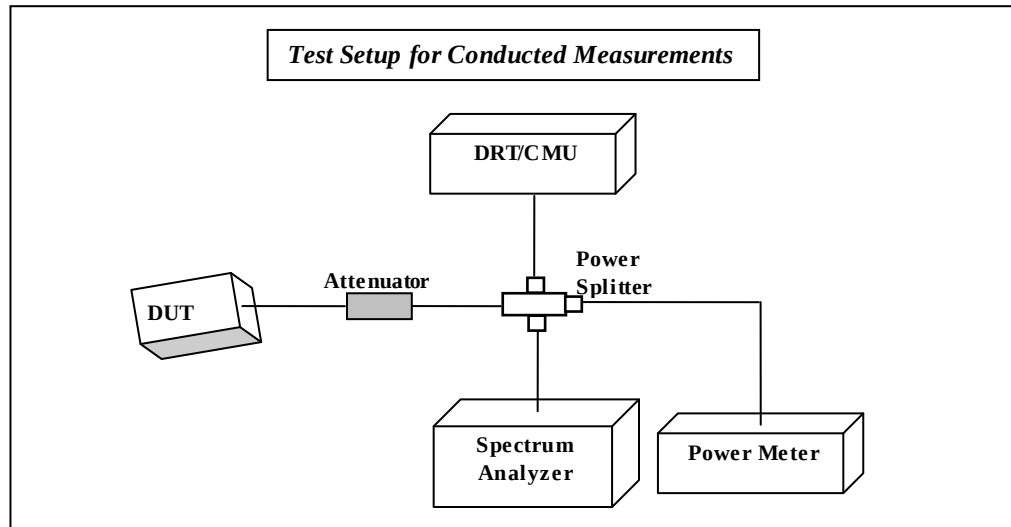
The average equivalent isotropically radiated power (e.i.r.p.) for transmitters shall not exceed the limits given in SRSP-510.

In addition, the transmitter's peak-to-average power ratio (PAPR) shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

6.1.4 Conducted Output Power Measurement Verification

6.1.4.1 Measurement Procedure:

Ref: TIA-603C 2004 2.2.1



1. Connect the equipment as shown in the above diagram. A Digital Radio Communication Tester (DRT- CMU200 here) is used to enable the EUT to transmit and to measure the output power.
2. Adjust the settings of the DRT to set the EUT to its maximum power at the required channel.
3. Record the output power level measured by the DRT.
4. Correct the measured level for all losses in the RF path.
5. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.
 - a. Worst case configuration is tested with RC3/SO55 with "All Up" Power Control Bits.

6.1.4.2 Test Conditions:

Tnom: 25°C; Vnom: 3.7 V

6.1.4.3 Measurement Uncertainty

+/- 0.5 dB

6.1.4.4 Measurement Results:

CDMA 850		
Frequency (MHz)	Conducted Output Power from module certification (Peak)	Measured Conducted Output Power from the EUT (Peak)
	(dBm)	(dBm)
824.70	24.41	25.12
836.52	24.64	24.86
848.31	24.43	24.95

CDMA 1900		
Frequency (MHz)	Conducted Output Power from module certification (Peak)	Measured Conducted Output Power from the EUT (Peak)
	(dBm)	(dBm)
1851.21	24.36	23.64
1880.0	24.20	24.58
1908.75	24.17	23.77

6.1.4.5 Verification Result

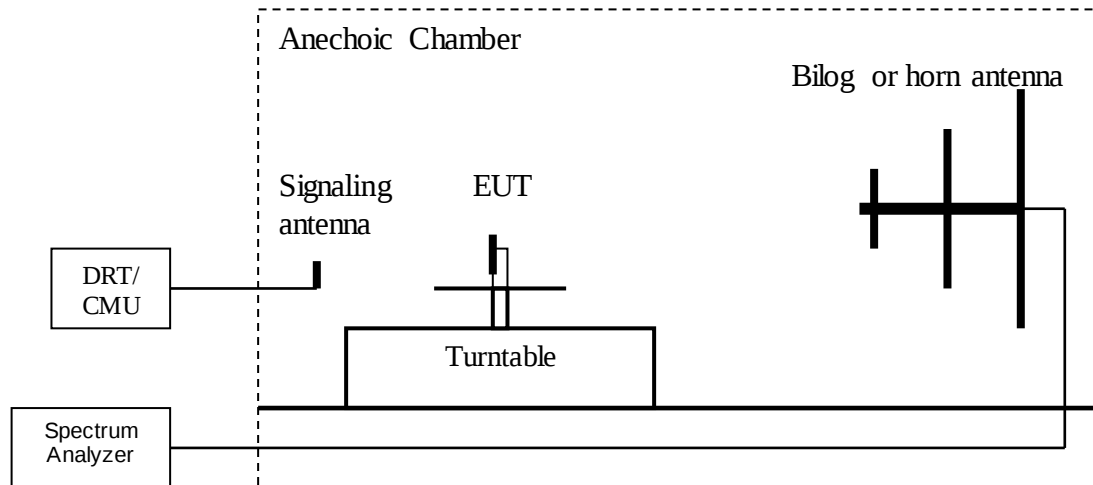
Peak output power from module certification test report has been compared to the measured peak conducted power from the EUT.

All measured results remain within the tolerance specified from the module manufacturer and measurement uncertainty.

6.1.5 Radiated Output Power Measurement

6.1.5.1 Radiated Output Power Measurement procedure

Ref: TIA-603C 2004 -2.2.17.2 Effective Radiated Power (ERP) or Effective Isotropic Radiated Power (EIRP)



1. Connect the equipment as shown in the above diagram with the EUT's antenna in center of the turn table.
2. Adjust the settings of the Digital Radio Communication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to the channel frequency. Set the analyzer to measure peak hold with the required settings.
4. Rotate the EUT 360°. Record the peak level in dBm (**LVL**).
5. Replace the EUT with a vertically polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
7. Determine the ERP using the following equation:

$$\text{ERP (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$$
8. Determine the EIRP using the following equation:

$$\text{EIRP (dBm)} = \text{ERP (dBm)} + 2.14 \text{ (dB)}$$
6. Worst case configuration is tested with RC3/SO55 with "All Up" Power Control Bits.

6.1.5.2 Measurement Uncertainty

+/- 3 dB

6.1.5.3 Test Conditions:

Tnom: 25°C; Vnom: 3.7 V

6.1.6 Test Results:**6.1.6.1 RF Power Output 850MHz band****Limits:**

FCC: Nominal Peak Output Power < 38.45 dBm (7W)

IC: Nominal Peak Output Power < 40.60 dBm (11.5W)

PAR may not exceed 13dB

CDMA 850				
Frequency (MHz)	Conducted Power			Radiated Power
	Peak Power (dBm)	Av Power (dBm)	Peak-to-Av Ratio (dB)	ERP (dBm)
824.70	29.77	25.12	4.65	23.4
836.52	29.56	24.86	4.70	24.9
848.31	29.64	24.95	4.69	24.5

6.1.6.2 Measurement Verdict:

Pass.

6.1.6.3 RF Power Output 1900MHz band**Limits:**



Nominal Peak Output Power < 33 dBm (2W)



PAR may not exceed 13dB



CDMA 1900				
Frequency (MHz)	Conducted Power			Radiated Power
	Peak Power (dBm)	Av Power (dBm)	Peak-to-Av Ratio (dB)	EIRP (dBm)
1851.21	27.86	23.64	4.46	29.0
1880.0	28.45	24.58	3.87	28.9
1908.75	29.90	23.77	6.13	27.6

6.1.6.4 Measurement Verdict:

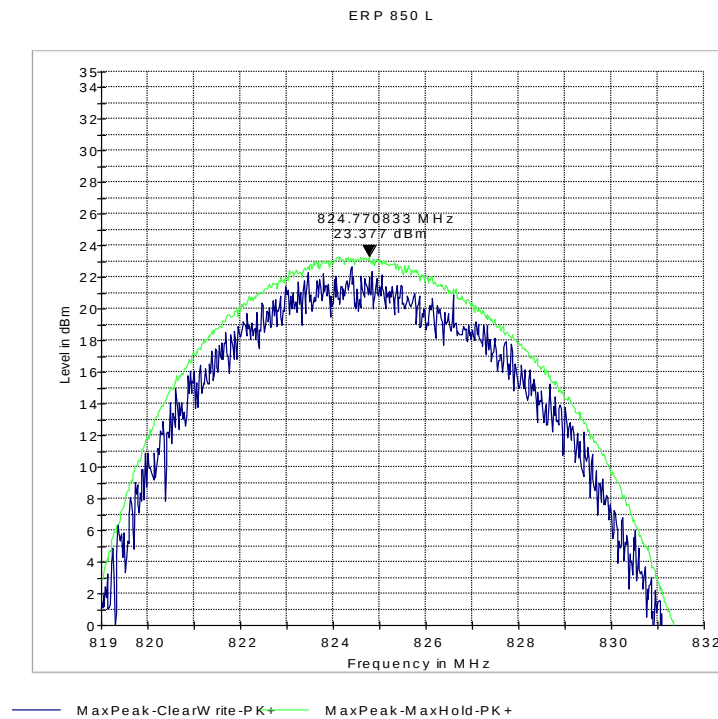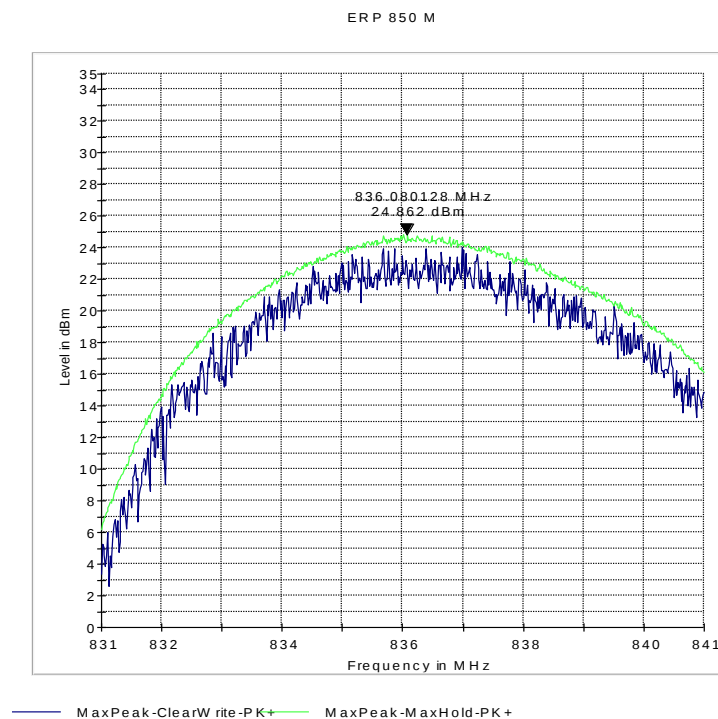Pass.

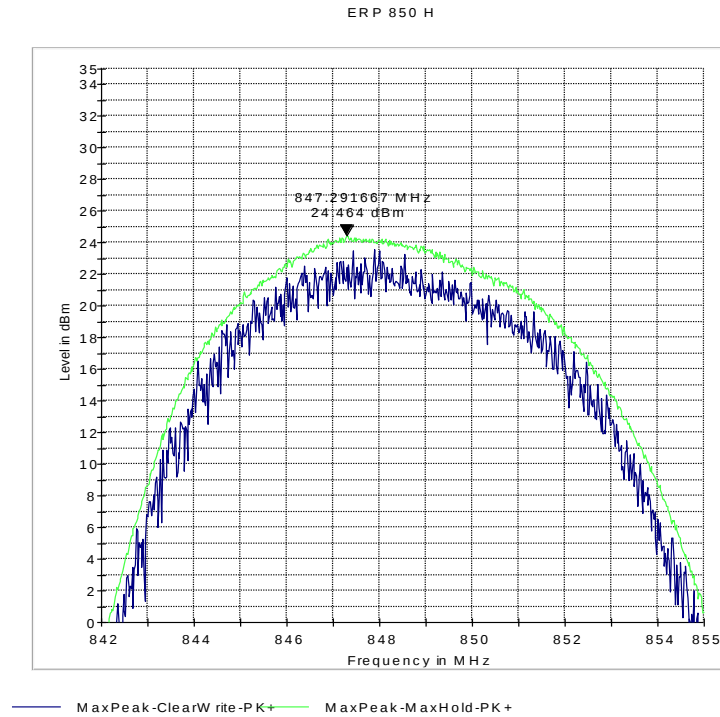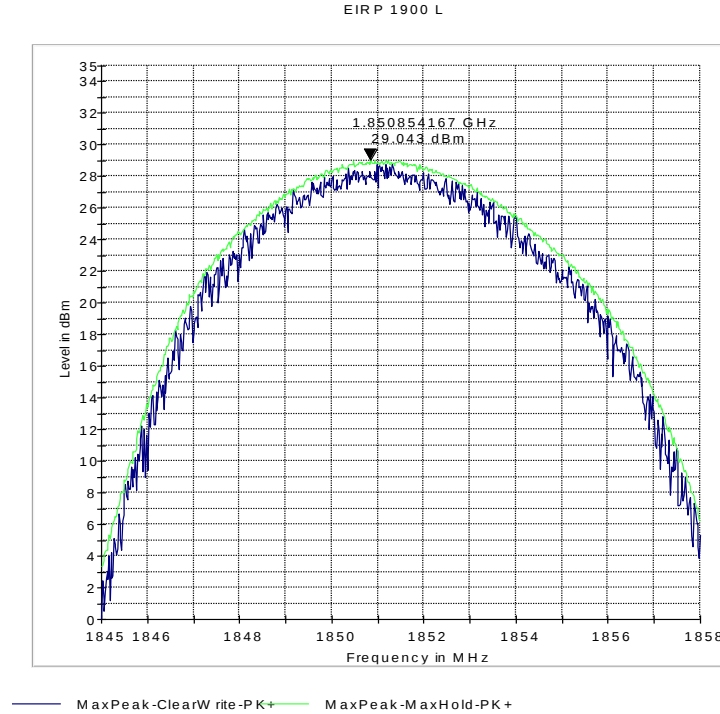6.1.6.5 Plots:**ERP (CDMA 850) CHANNEL 1013****ERP (CDMA 850) CHANNEL 384**

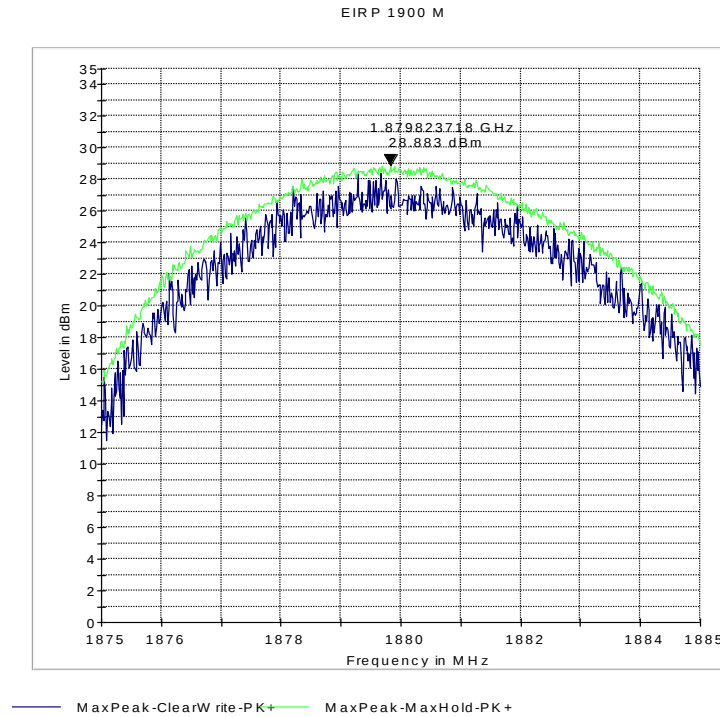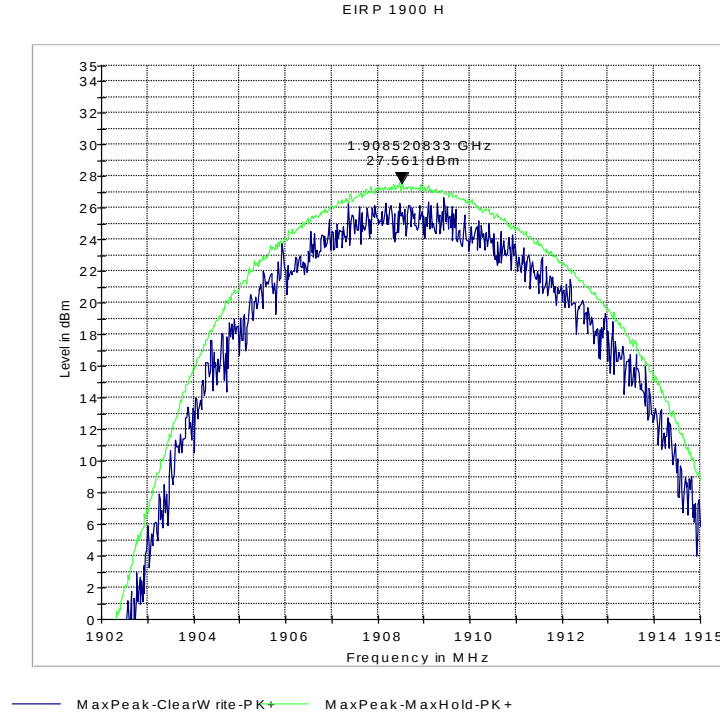ERP (CDMA 850) CHANNEL 777**EIRP (CDMA-1900) CHANNEL 25**

EIRP (CDMA-1900) CHANNEL 600**EIRP (CDMA-1900) CHANNEL 1175**

6.2 Spurious Emissions Radiated

6.2.1 References

FCC: CFR Part 2.1053, CFR Part 22.917, CFR Part 24.238

IC: RSS-Gen Section 4.9; RSS 132 Section 5.5; RSS 133 Section 6.5

6.2.2 Measurement requirements:

6.2.2.1 FCC 2.1053: Field strength of spurious radiation.

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission.

6.2.2.2 RSS-Gen 4.9: Transmitter unwanted spurious emissions

The same parameter, peak power or average power, used for the transmitter output power measurement shall be used for unwanted emission measurements.

The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate or carrier frequency), or from 30 MHz, whichever is the lower, to the 5th harmonic of the highest frequency generated without exceeding 40 GHz.

6.2.3 Limits:

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For all power levels +30dBm to 0dBm, this becomes a constant specification of -13dBm.

6.2.3.1 FCC 22.917 Emission limitations for cellular equipment.

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

6.2.3.2 FCC 24.238 Emission limitations for Broadband PCS equipment.

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution

bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

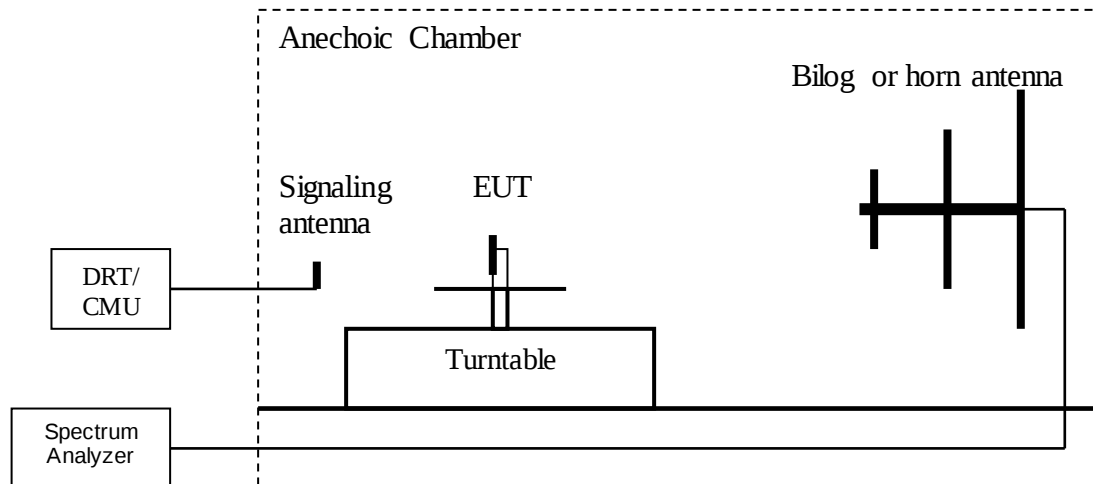
6.2.3.3 RSS-132 Section 4.5.1.1 and RSS-133 Section 6.5.1

In the first 1.0 MHz band immediately outside and adjacent to the licensee's frequency block, the power of emissions per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in watts) by at least $43 + 10 \log_{10}(P)$, dB. After the first 1.0 MHz, the power of emissions shall be attenuated below the transmitter output power by at least $43 + 10 \log_{10}(P)$, dB, in any 100 kHz bandwidth.

After the first 1.5 MHz, the power of emissions shall be attenuated below the transmitter output power by at least $43 + 10 \log_{10}(P)$, dB, in any MHz of bandwidth.

6.2.4 Radiated out of band measurement procedure:

Ref: TIA-603C 2004- 2.2.12 Unwanted emissions: Radiated Spurious



1. Connect the equipment as shown in the above diagram with the EUT's antenna in a horizontal orientation.
2. Adjust the settings of the Digital RadioCommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure peak hold with the required settings.
4. Place the measurement antenna in a horizontal orientation. Rotate the EUT 360°. Raise the measurement antenna up to 4 meters in 0.5 meters increments and rotate the EUT 360° at each height to maximize all emissions. Measure and record all spurious emissions (**LVL**) up to the tenth harmonic of the carrier frequency.
5. Replace the EUT with a horizontally polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
7. Determine the level of spurious emissions using the following equation:
Spurious (dBm) = **LVL** (dBm) + **LOSS** (dB):
8. Repeat steps 4, 5 and 6 with all antennas vertically polarized.
9. Determine the level of spurious emissions using the following equation:
Spurious (dBm) = **LVL** (dBm) + **LOSS** (dB):
10. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.
(**Note:** Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4 and 7 above are performed with test software.)

6.2.5 Sample Calculations for Radiated Measurements

6.2.5.1 Power Measurements using Substitution Procedure:

The measurement on the Spectrum Analyzer is used as a basis for the Substitution procedure. The EUT is replaced with a Signal Generator and an antenna. The setting on the Signal Generator is varied until the Spectrum Analyzer displays the original reading. EIRP is calculated as-

$$\text{EIRP (dBm)} = \text{Signal Generator setting (dBm)} - \text{Cable Loss (dB)} + \text{Antenna Gain (dBi)}$$

Eg:

Frequency (MHz)	Measured SA (dBμV)	Signal Generator setting (dBm)	Antenna Gain (dBi)	Dipole Gain (dBd)	Cable Loss (dB)	EIRP (dBm)
1000	95.5	24.5	6.5	0	3.5	27.5

Measurement Survey:

The site is constructed in accordance with ANSI C63.4 requirements and is recognized by the FCC to be in compliance for a 3m site. The spectrum is scanned from 30MHz to the 10th harmonic of the highest frequency generated by the EUT.

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the 850 & 1900 bands. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the 850 & 1900 band into any of the other blocks respectively. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

Radiated emission measurements were made in RC3/SO55 with "All Up" Power Control Bits.

For radiated measurements, all data in this report shows the worst case emissions data between H/V antenna polarizations and for all 3 orthogonal orientations of the EUT.

Unless mentioned otherwise, the emission signals above the limit line in the plots are from the carrier.

Measurement Uncertainty= +/- 3.0 dB.



6.2.6 Test Conditions:



Tnom: 23°C; Vnom: 3.7 V



6.2.7 Test Results

6.2.7.1 Test Results Transmitter Spurious Emission CDMA 850:

Harmonic	Tx ch-1013 Freq. (MHz)	Level (dBm)	Tx ch-384 Freq. (MHz)	Level (dBm)	Tx ch-777 Freq. (MHz)	Level (dBm)
1	824.7	-	836.52	-	848.31	-
2	1649.4	-18	1673.04	-18.5	1696.62	-21.8
3	2474.1	-17.5	2509.56	-17.5	2544.93	-23.8
4	3298.8	-31	3346.08	-32.5	3393.24	-34.5
5	4123.5	-36.5	4182.6	-37	4241.55	-42.5
6	4948.2	-34.5	5019.12	-33.5	5089.86	-38
7	5772.9	-37	5855.64	-37	5938.17	-42.5
8	6597.6	-42	6692.16	-42.5	6786.48	-43
9	7422.3	NF	7528.68	NF	7634.79	NF
10	8247	NF	8365.2	NF	8483.1	NF
NF = Noise Floor						

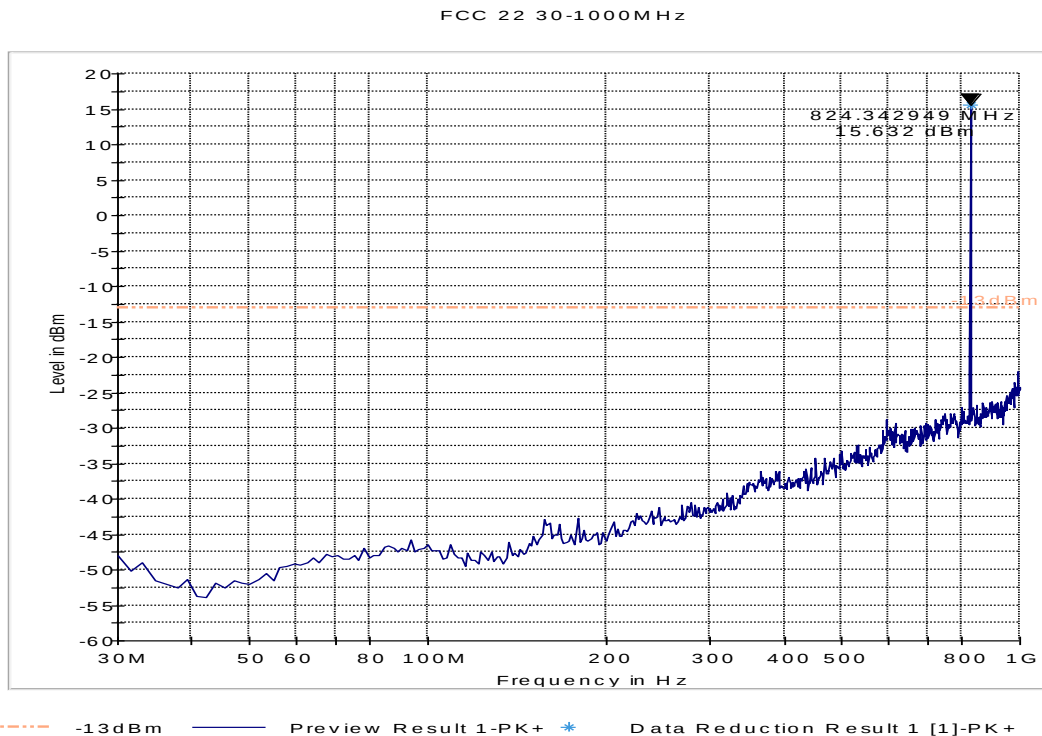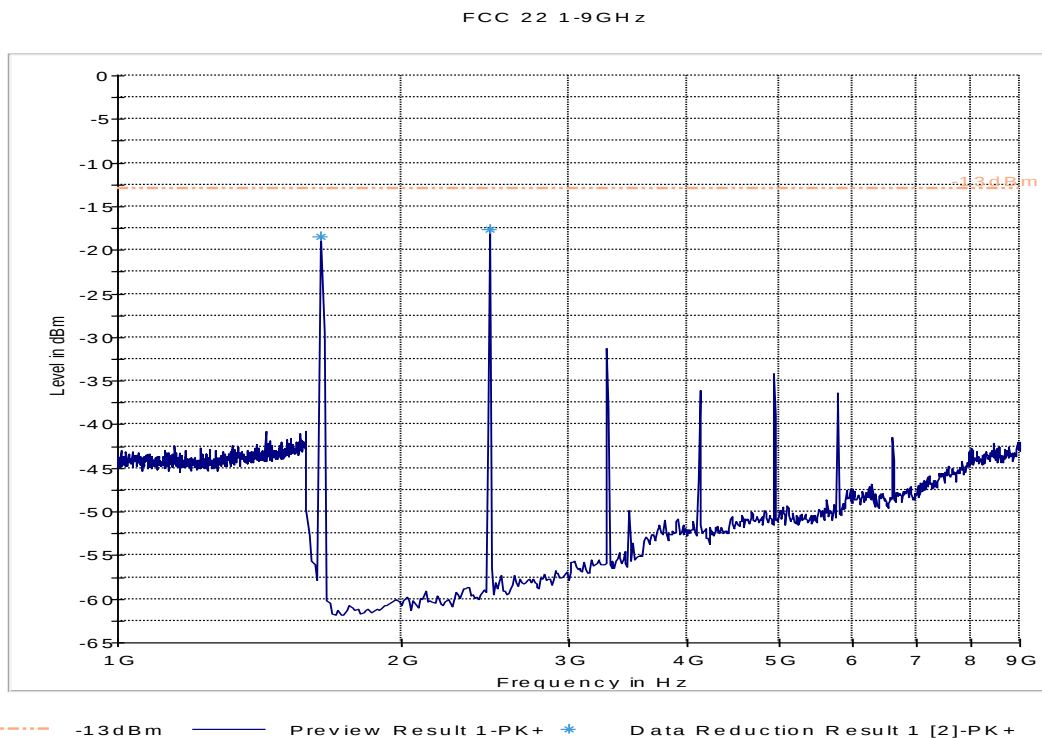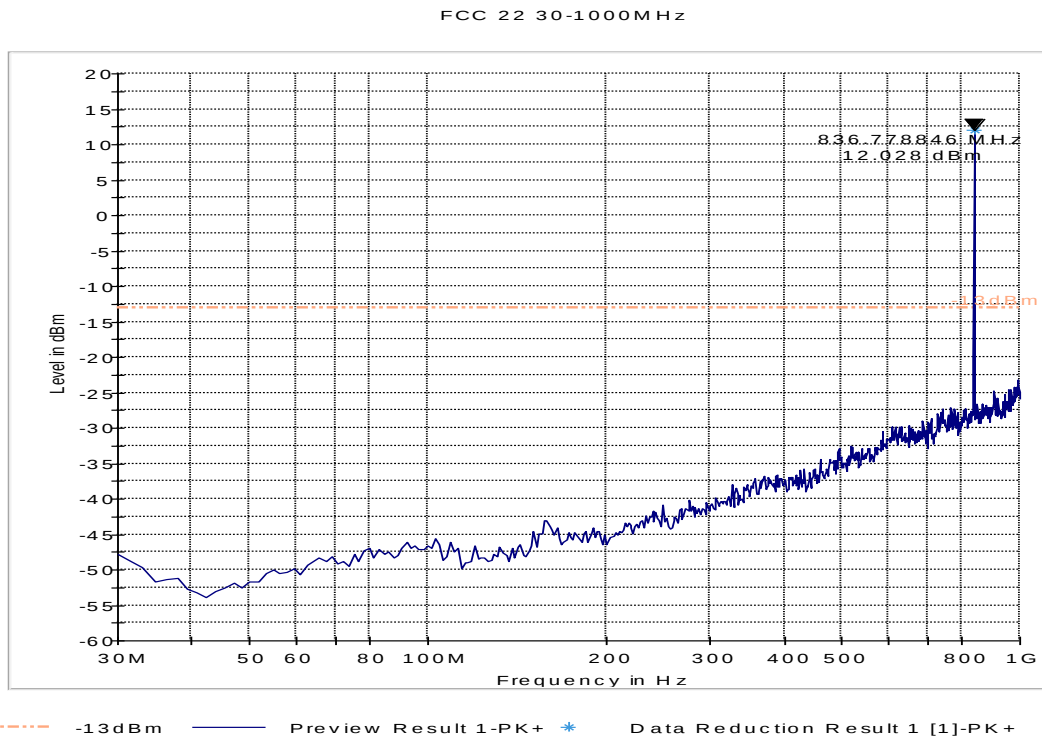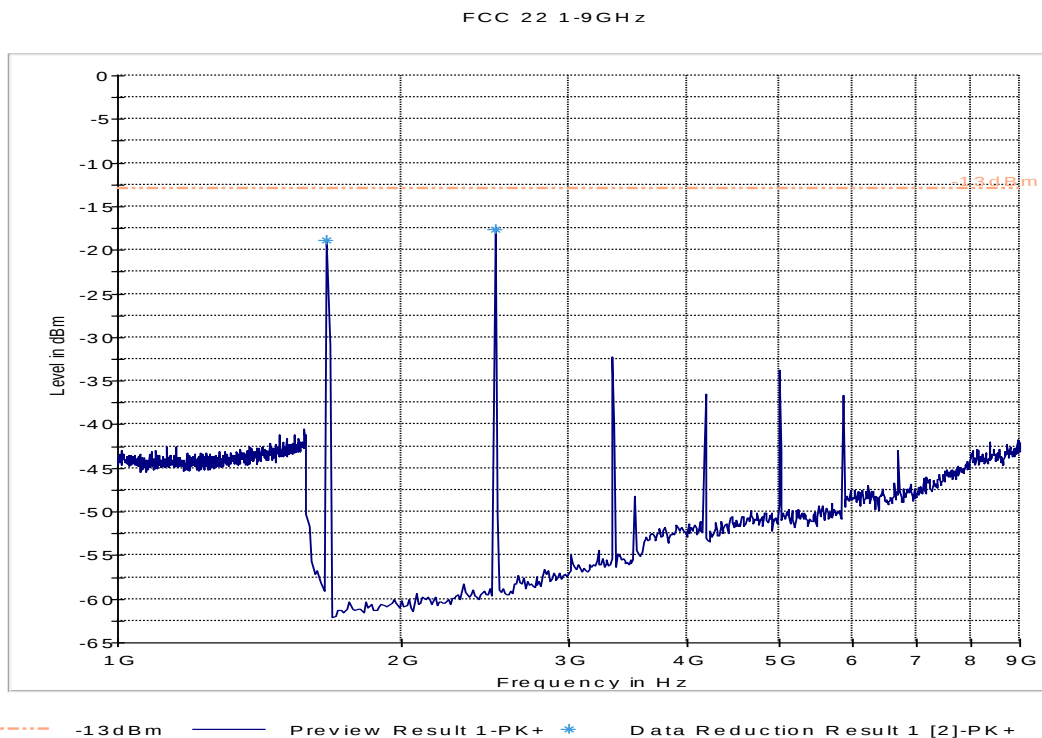Radiated Spurious Emissions (CDMA-850) Tx: Low Channel
30MHz-1GHz**1GHz-9GHz**

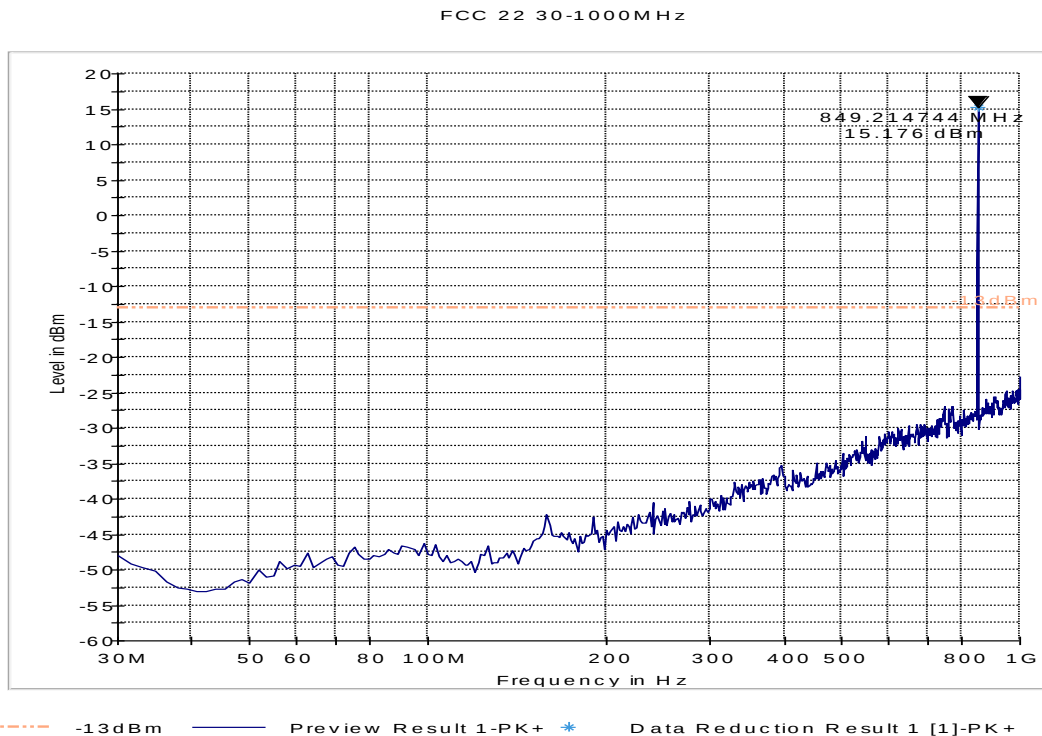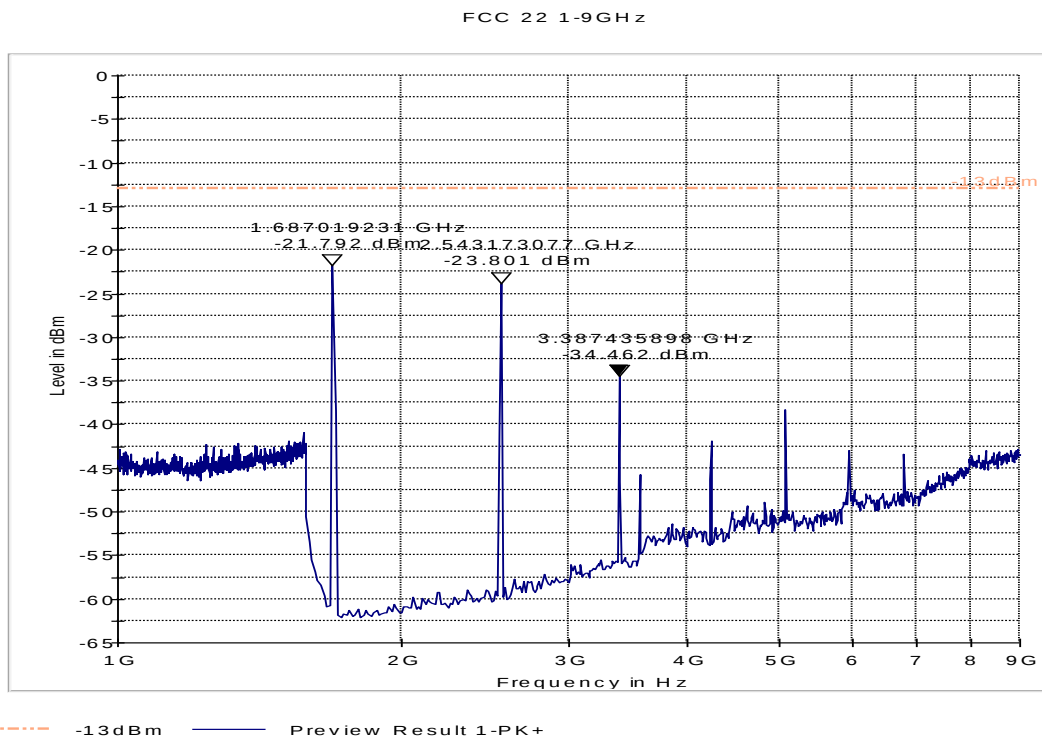Radiated Spurious Emissions (CDMA-850) Tx: Mid Channel
30MHz-1GHz**1GHz-9GHz**


Radiated Spurious Emissions (CDMA-850) Tx: High Channel
30MHz-1GHz**1GHz-9GHz**

6.2.7.2 Test Results Transmitter Spurious Emission CDMA-1900:

Harmonic	Tx ch-25 Freq.(MHz)	Level (dBm)	Tx ch-600 Freq. (MHz)	Level (dBm)	Tx ch-1175 Freq. (MHz)	Level (dBm)
1	1851.25	-	1880.0	-	1908.75	-
2	3702.5	-35	3760	-37.5	3817.5	-27.5
3	5553.75	-43.5	5640	-44.5	5726.25	NF
4	7405	NF	7520	NF	7635	NF
5	9256.25	NF	9400	NF	9543.75	NF
6	11107.5	NF	11280	NF	11452.5	NF
7	12958.75	NF	13160	NF	13361.25	NF
8	14810	NF	15040	NF	15270	NF
9	16661.25	NF	16920	NF	17178.75	NF
10	18512.5	NF	18800	NF	19087.5	NF
NF = Noise Floor						

Radiated Spurious Emissions (CDMA-1900) Tx: Low Channel 30MHz-1GHz

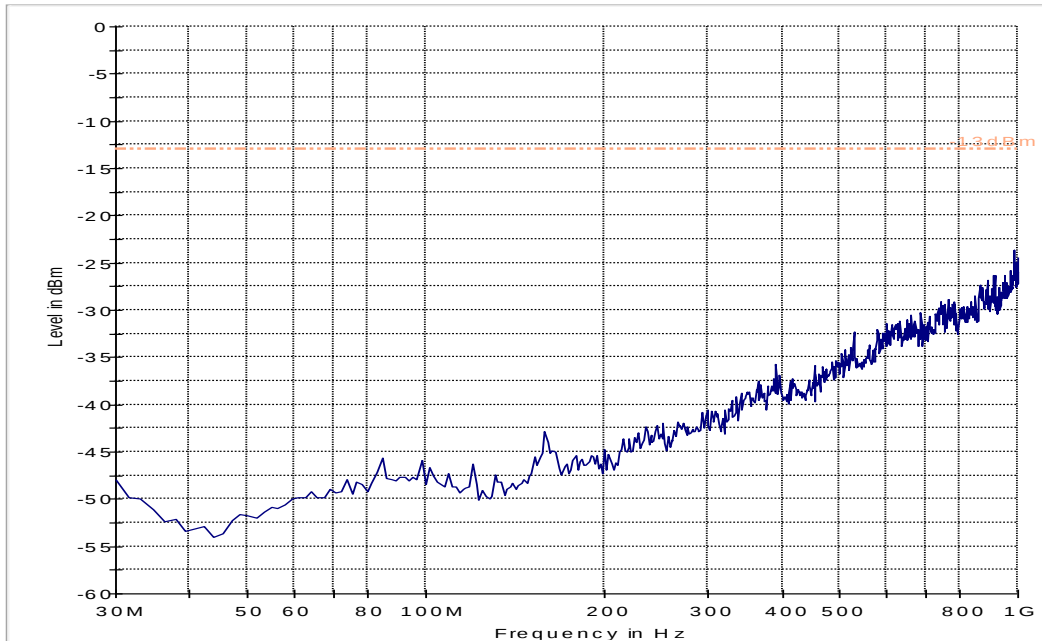
FCC 24 30-1000MHz



----- -13dBm Preview Result 1-PK+

1GHz-18GHz

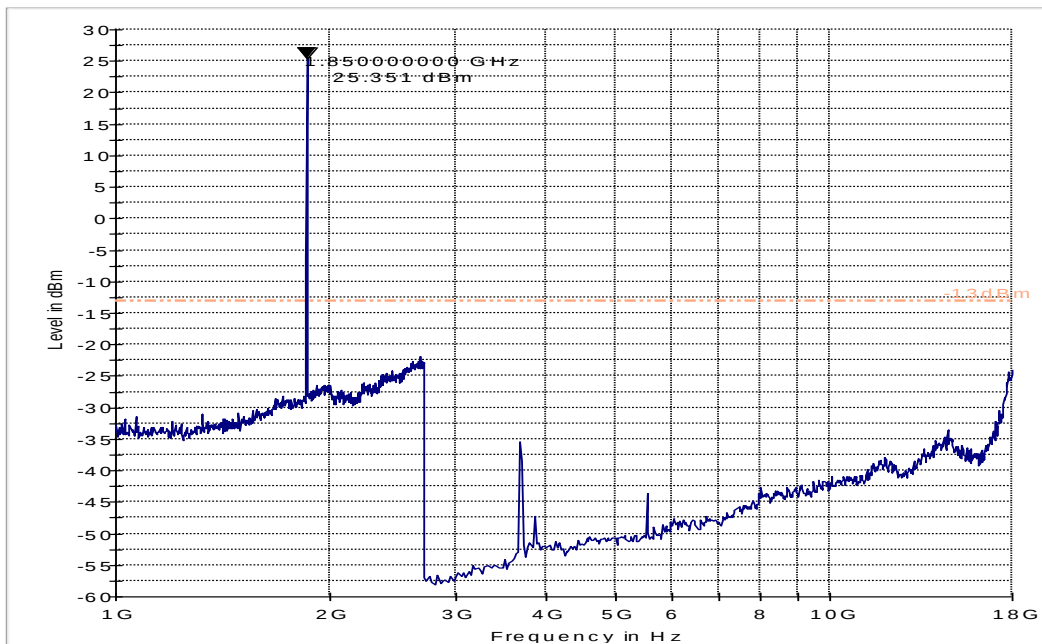
FCC 24 1-18GHz



----- -13dBm Preview Result 1-PK+

Radiated Spurious Emissions (CDMA-1900) Tx: Mid Channel 30MHz-1GHz

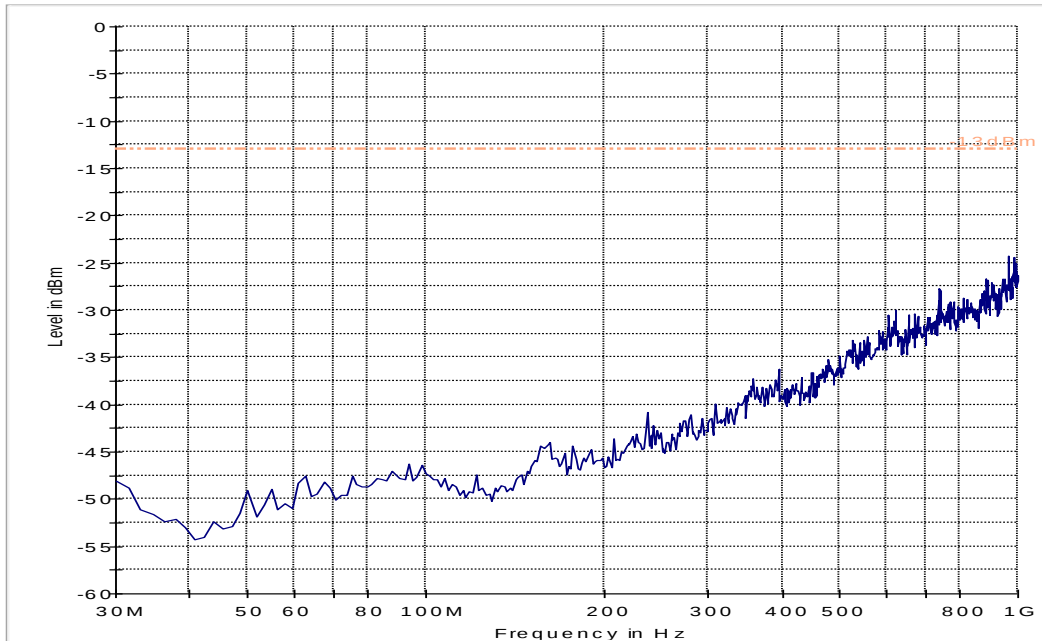
FCC 24 30-1000MHz



----- -13dBm — Preview Result 1-PK+

1GHz-18GHz

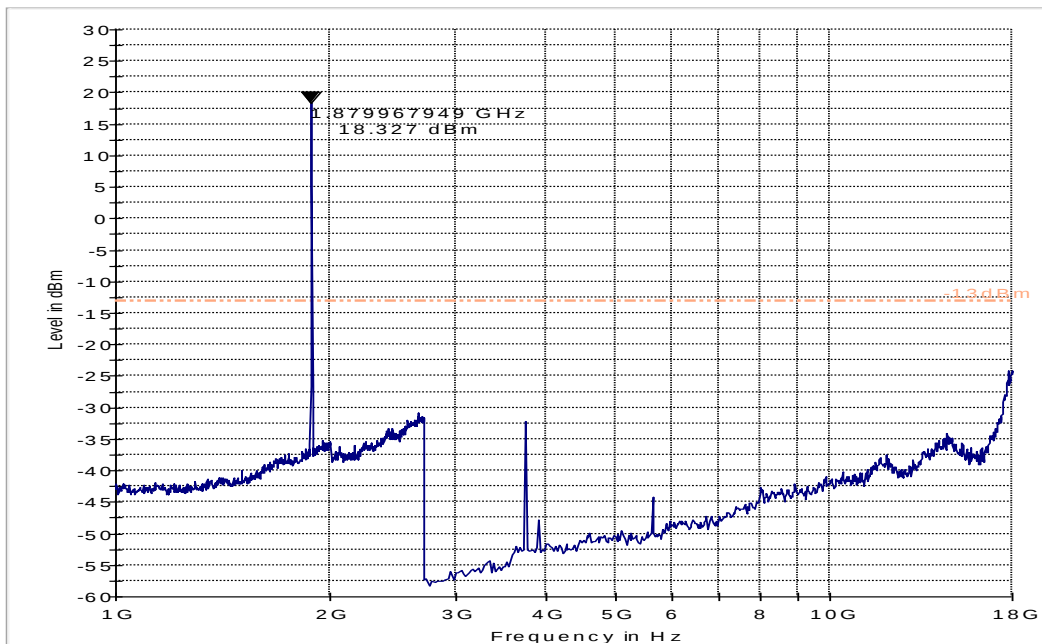
FCC 24 1-18GHz



----- -13dBm — Preview Result 1-PK+


Test results 18GHz-19.1GHz

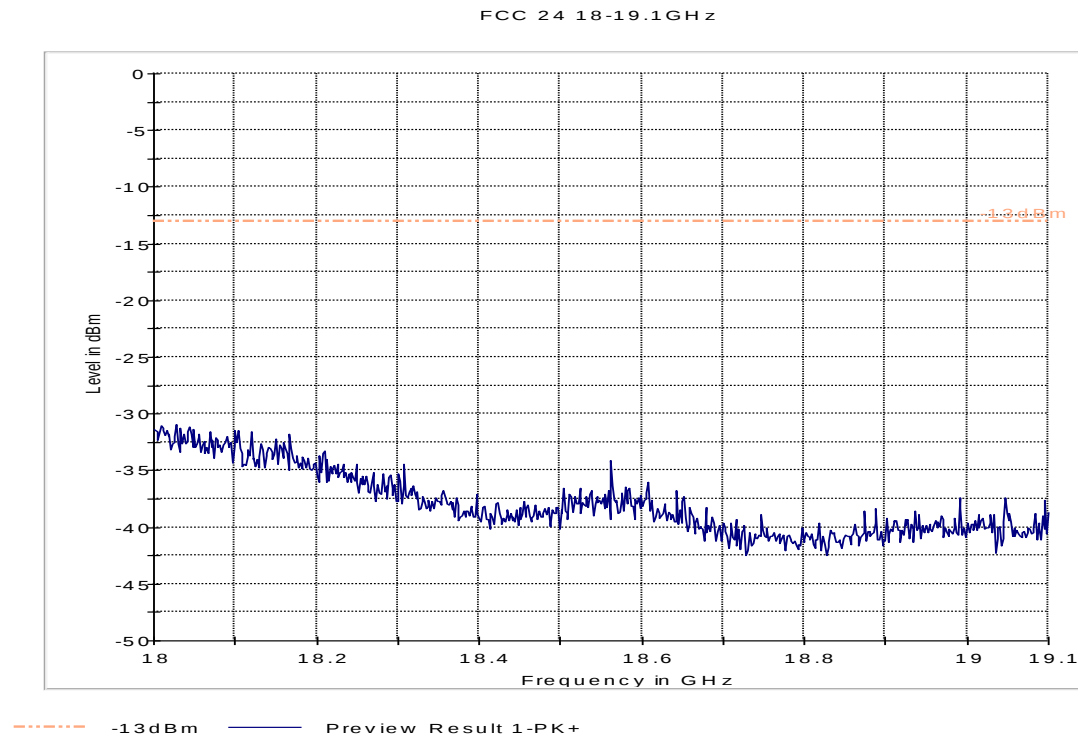Note: Worst case representation of all channels in this band of operation




Radiated Spurious Emissions (CDMA-1900) Tx: High Channel
30MHz-1GHz

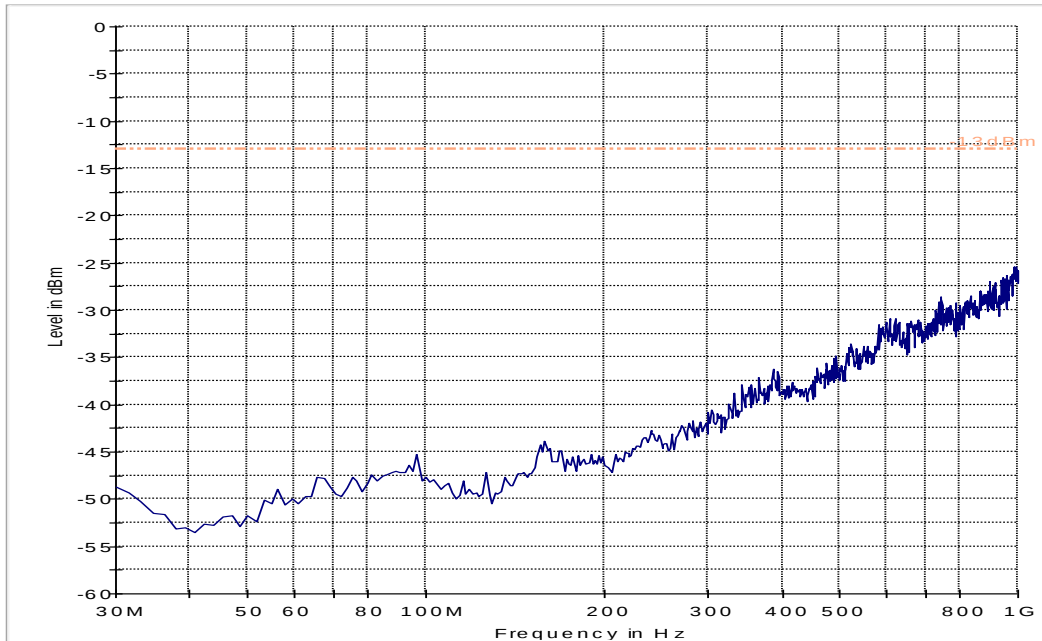FCC 24 30-1000MHz

**1GHz-18GHz**


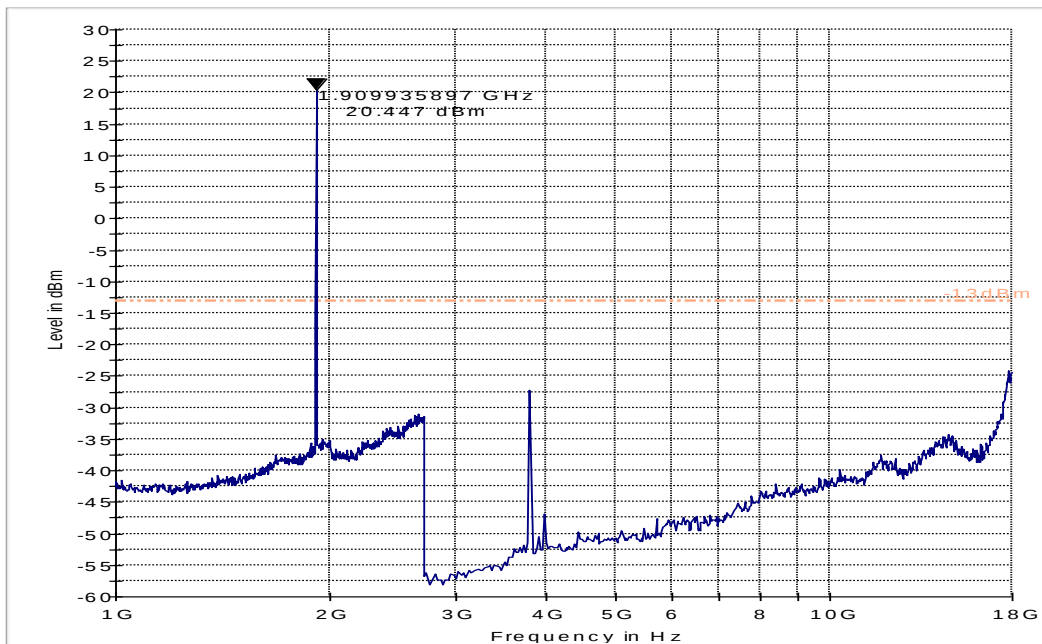
FCC 24 1-18GHz



7 Test Equipment and Ancillaries used for tests

Instrument/Ancillary	Model	Manufacturer	Serial No.	Cal Date	Cal Interval
Radio Communication Tester	CMU 200	Rohde & Schwarz	101821	May 2011	2 Years
EMI Receiver/Analyzer	ESU 40	Rohde & Schwarz	100251	Aug 2012	2 Years
Spectrum Analyzer	FSU	Rohde & Schwarz	200302	May 2011	2 Years
Loop Antenna	6512	EMCO	00049838	Aug 2011	3 years
Biconilog Antenna	3141	EMCO	0005-1186	Apr 2012	3 years
Horn Antenna (1-18GHz)	3115	ETS	00035111	Apr 2012	3 years
Horn Antenna (18-40GHz)	3116	ETS	00070497	Sep 2011	3 years
Communication Antenna	IBP5-900/1940	Kathrein	n/a	n/a	n/a
High Pass Filter	5HC2700	Trilithic Inc.	9926013	Part of system calibration	
High Pass Filter	4HC1600	Trilithic Inc.	9922307	Part of system calibration	
6GHz High Pass Filter	HPM50106	Microtronics	001	Part of system calibration	
Pre-Amplifier	JS4-00102600	Miteq	00616	Part of system calibration	
LISN	50-25-2-08	FCC	08014	July 2012	2 Years
Power Smart Sensor	R&S	NRP-Z81	100161	May 2011	2 Years
Multimeter	MM200	Klein	N/A	Apr 2011	2 Years
Temp Hum Logger	TM320	Dickson	03280063	Apr 2013	1 Year
Temp Hum Logger	TM325	Dickson	5285354	Apr 2013	1 Year

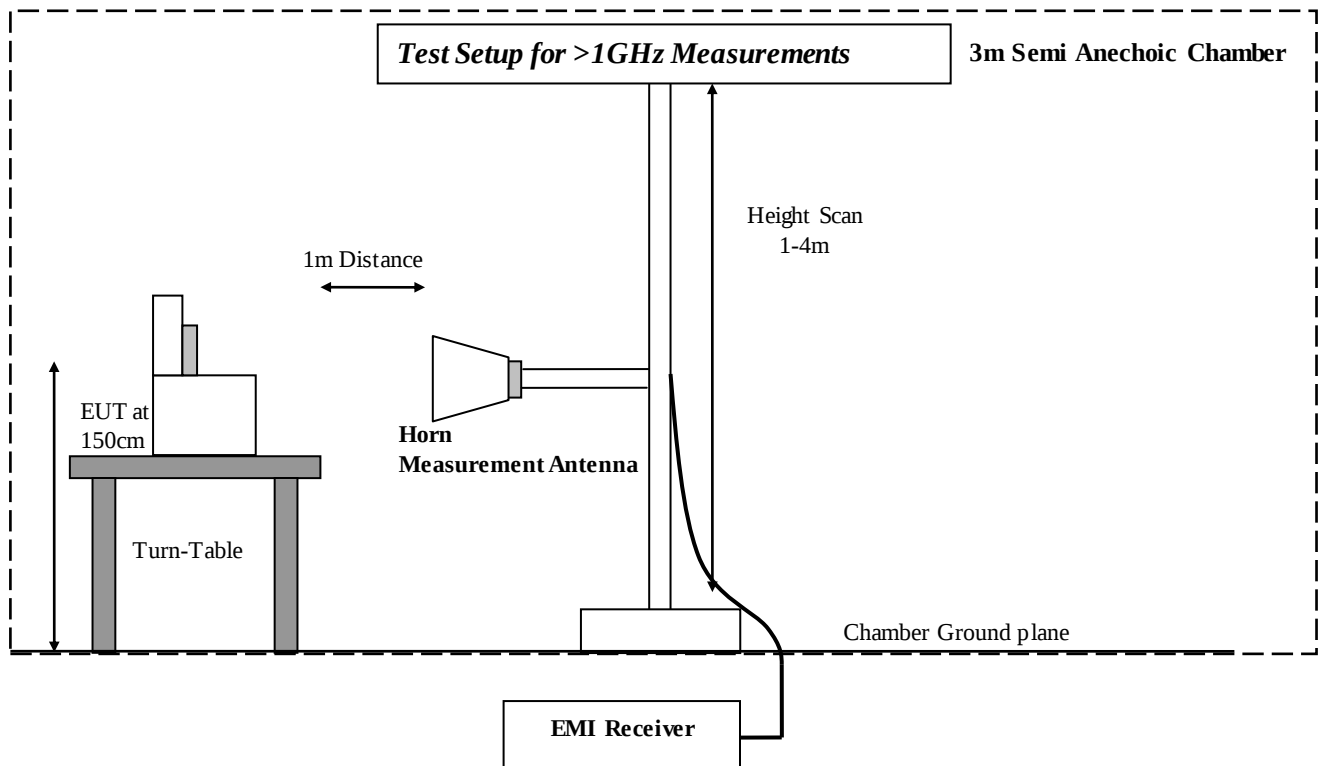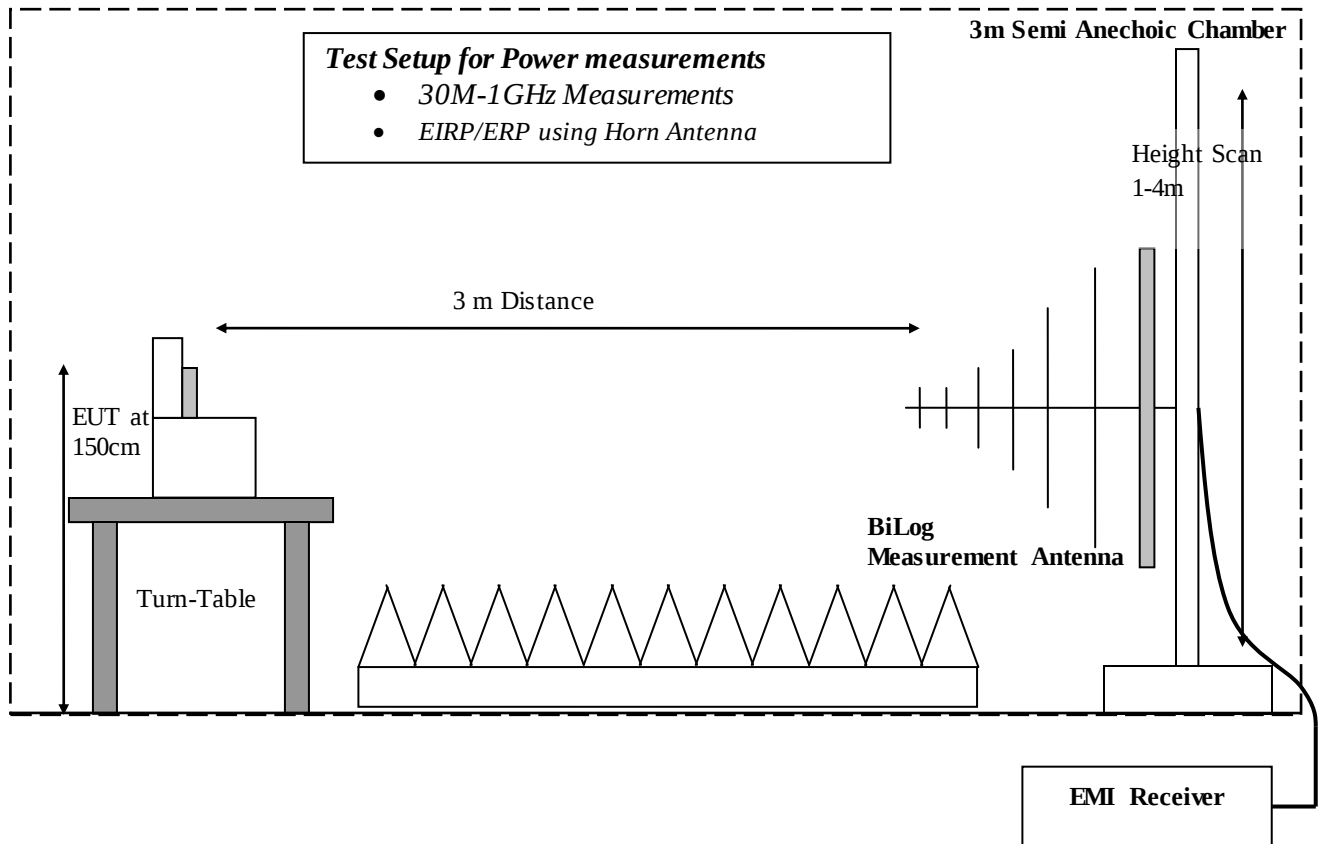8 Test Setup Diagrams



Test Report # EMC_ MOREY-020-12001_WWAN

FCC ID: AB3-OM400

Date of Report : 2013-05-22

IC ID: 1042A-OM400



9 Revision History

Date	Report Name	Changes to report	Report prepared by
2013-05-22	EMC_MOREY-020-12001_WWAN	First Version	Zack Gray