

Antenna Sample Datasheet

customer:	Dongguan Shiyute Electronics Co., Ltd
entry name:	SMBT-1704-L
Material category:	BT antenna
Antenna Type	PIFA
Antenna Material	FPC
edition:	A0
Date:	2024. 12. 20

Antenna manufacturer: Hongji Wireless Communication (Shenzhen) Co., LTD

<http://www.honant.com.cn>

Address: 12 / F, West Block B, Building 8, Huaqiang Creative Industry Park, Sightseeing Road,
Guangming District, Shenzhen

Contents

1: Electrical characteristics.....	1
2: Antenna test equipment.....	2-3
3: Passive test report.....	4-5
4: Matching circuit.....	6
5: Structural drawing.....	7

1: Electrical characteristics


NO.	Item	Specifications
1	Frequenc Range	2400-2500MHz
2	Band Width	100MHz typ
3	The Perk Gain	-3.06dBi
4	V. S. W. R	<2.5
5	Polarizstion	Linear
6	Azimuth Beam width	Omni-directional
7	Impedance	50 Ω

2: Antenna test equipment

List of meters: Agilent 5071B;




1.1The principle diagram of the ETS anechoic chamber

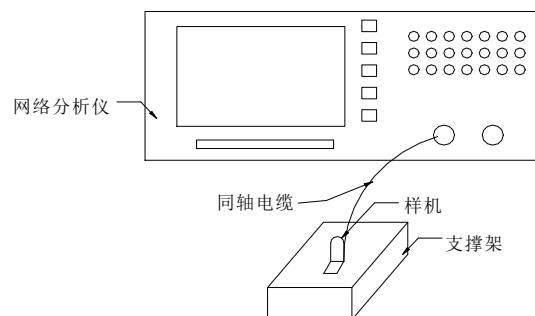

Picture1.Antenna static test connection method

1.2 Pictures of the ETS anechoic chamber

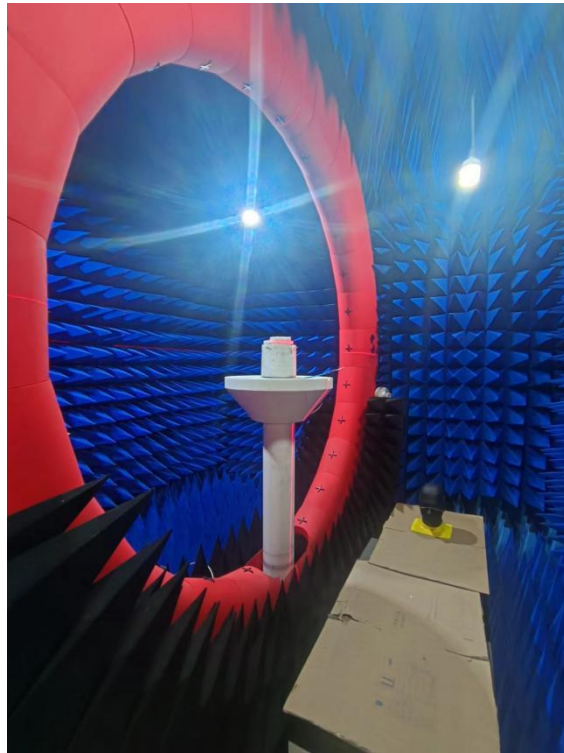


Inside the ETS anechoic chamber



Test Machine

3: Passive test report


3.1: BT antenna S11 parameters

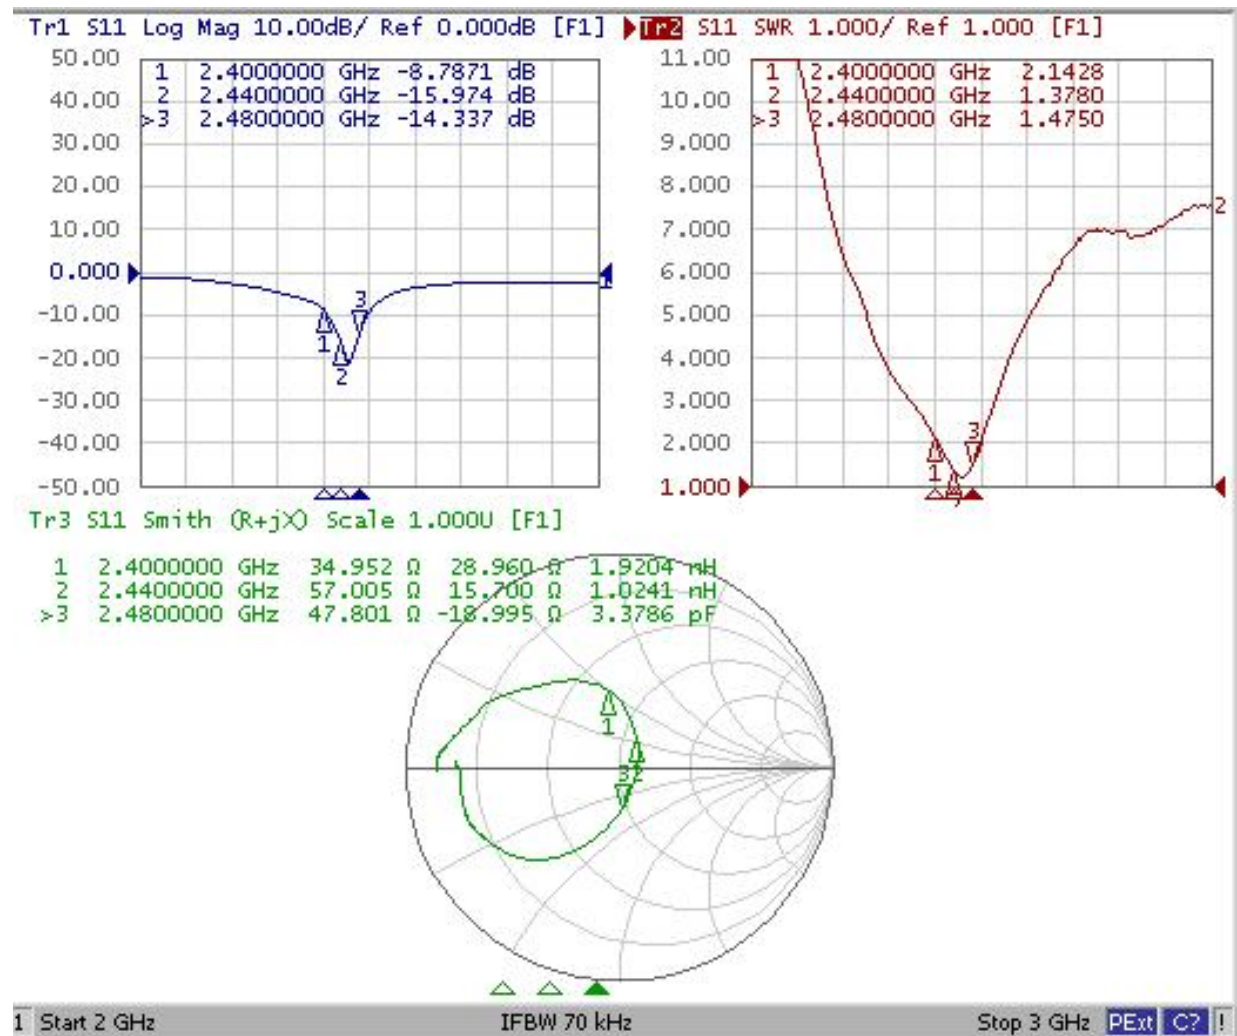


3.2: Passive efficiency of antenna

Freq(MHz)	Gain(dBi)	Efficiency(%)
2400	-3.88	15.08
2410	-3.78	15.99
2420	-3.69	16.5
2430	-3.22	16.07
2440	-3.17	15.77
2450	-3.15	15.23
2460	-3.06	15.17
2470	-3.39	15.29
2480	-3.46	14.78
2490	-3.71	14.15
2450	-3.96	13.88

2.3: Passive pattern of BT antenna

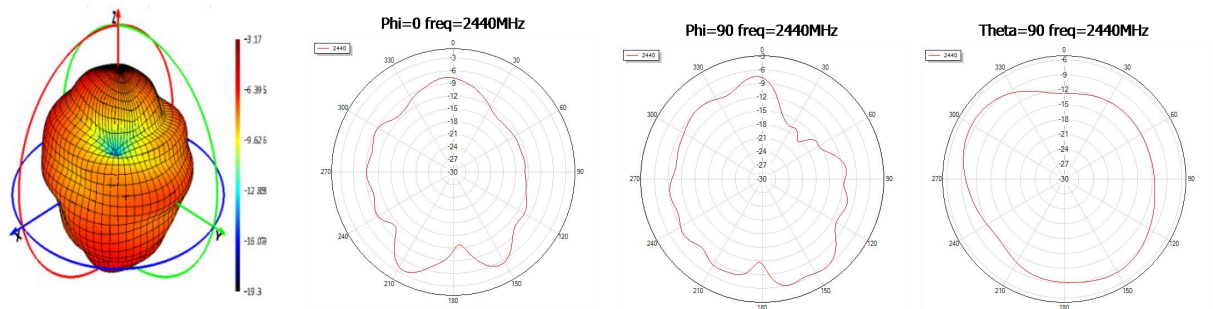

4: Matching circuit

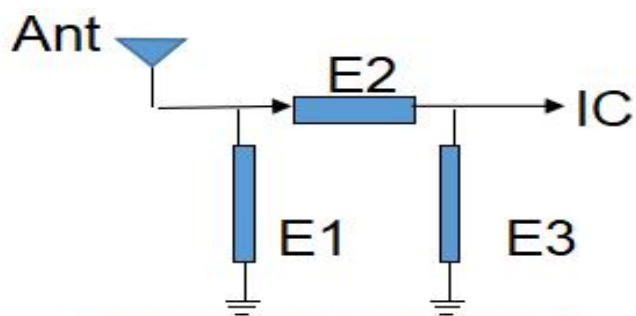

Element	Value
E1	N/C
E2	0Ω
E2	N/C

5: Structural drawing

