

Test Report

Product	BT Transceiver in UPCS Base Station		
Name and address of the applicant	Panasonic Corporation of North America Two Riverfront Plaza, 9 th Floor Newark, 07102-5490, NJ, USA		
Name and address of the manufacturer	Panasonic Entertainment & Communication Co., Ltd. 1-10-12 Yagumo-higashi-machi, Moriguchi City, Osaka 570-0021, Japan		
Model	KX-TGF880		
Rating	Mains (AC Adaptor)		
Trademark	Panasonic		
Additional information	DECT 6.0, Bluetooth Classic		
Tested according to	FCC Part 15.247 Frequency Hopping Transmitters / Digital Transmission Systems Industry Canada RSS-247, Issue 2 Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices		
Order number	PRJ0035011		
Tested in period	2020-10-09 to 2020-10-27 and 2023-06-06 to 2023-06-13		
Issue date	2023-06-21		
Name and address of the testing laboratory	 Nemko Scandinavia AS Instituttveien 6 2007 Kjeller, Norway www.nemko.com CAB Number: FCC: NO0001 ISED: NO0470 ISED No: 2040D-1   An accredited technical test executed under the Norwegian accreditation scheme		
 Prepared by [Frode Sveinsen]  Approved by [G.Suhanthakumar]			
This report was originally distributed electronically with digital signatures. For more information, please contact Nemko Scandinavia AS.			

Revision history

Revision	Date	Comment	Sign
A	2023-06-21	First edition	FS

GENERAL REMARKS

This report applies only to the sample(s) tested. It is the manufacturer's responsibility to ensure the additional production units of this product are manufactured with identical electrical and mechanical components. The manufacturer is solely responsible for any modifications to the product that could result in non-compliance with the relevant regulations.

This report shall not be reproduced, except in full, without the written approval of Nemko.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Group accepts no responsibility for damage suffered by any third party because of decisions made or actions based on this report.

Opinions expressed within this report regarding general assessments and qualifications for PASS or FAIL to the standards limits and requirements, are not part of the current accreditation. Neither are opinions expressed regarding model variants covered by the testing of this report.

CALIBRATION

All instruments used in the tests given in this test report are calibrated and traceable to national or international standards. Between calibrations all test set-ups are controlled and verified on a regular basis by periodic checks to ensure, with 95% confidence, that the instruments remain within the calibrated levels.

MEASUREMENT UNCERTAINTY

Measurement uncertainties are calculated or considered for all instruments and instrument set-ups used during these tests. Uncertainty figures are found in a separate clause in this report.

CONTENTS

1	INFORMATION	4
1.1	Test Item	4
1.2	Normal test condition	4
1.3	Test Engineer(s)	5
1.4	Antenna Requirement	5
1.5	EUT Operating Modes	5
1.6	Comments	5
2	TEST REPORT SUMMARY	6
2.1	General	6
2.2	Test Summary	6
3	TEST RESULTS	7
3.1	Power Line Conducted Emissions	7
3.2	20dB Bandwidth	8
3.3	Pseudorandom Hopping Algorithm	10
3.4	Hopping Bandwidth	11
3.5	Occupancy Time	13
3.6	Occupied Bandwidth (99% BW)	15
3.7	Peak Power Output	17
3.8	Conducted Emissions at Antenna Connector	19
3.9	Restricted Bands of operation	23
3.10	Radiated Emissions, Band Edge	24
3.11	Radiated Emission, 30 – 1000 MHz	26
3.12	Radiated Emissions, 1-26 GHz	29
4	Measurement Uncertainty	33
5	LIST OF TEST EQUIPMENT	34
6	BLOCK DIAGRAM	35
6.1	Power Line Conducted Emission	35
6.2	Test Site Radiated Emission	35

1 INFORMATION

1.1 Test Item

Name	Panasonic
Model/version	KX-TGF880 (US Model)
FCC ID	ACJ96NKX-TGF880B
ISED ID	/
Serial number	PRJ00350110001
Hardware identity and/or version	/
Software identity and/or version	/
Frequency Range	2402–2480 MHz
Number of Channels	79
Operating Modes	Bluetooth Basic Rate
Type of Modulation	GFSK
Conducted Output Power	6.8 mW (Peak)
Antenna Connector	None
Number of Antennas	1
Diversity or Smart Antennas	No
Power Supply	AC Adaptor PNLV226

Description of Test Item

The EUT is a DECT Base Station with Bluetooth Transceiver.

This Bluetooth part has been tested as a Frequency Hopping system and fulfils all requirements for FHSS systems.

Bluetooth part is identical to the already certified model with FCC ID: ACJ96NKX-TGF880.

1.2 Normal test condition

Temperature:	20 - 24 °C
Relative humidity:	20 - 50 %
Normal test voltage:	120 V AC

The values are the limit registered during the test period.

1.3 Test Engineer

Frode Sveinsen

1.4 Antenna Requirement

Does the EUT have detachable antenna(s)?	☐ YES	☒ NO
If detachable, is the antenna connector(s) non-standard?	☐ YES	☐ NO
The tested equipment has only integral antennas. Conducted tests were performed with a temporary antenna connector.		

Requirement: FCC 15.203, 15.204

1.5 EUT Operating Modes

Description of operating modes	Continuous TX and Hopping, Basic Rate.
Additional information	The following settings were used for all tests: Bit Pattern: PSRB Frame Type: DH5 Power level was pre-programmed and not selectable from the test software.

1.6 Comments

The EUT uses the Bluetooth protocol with Frequency Hopping.

The measurements were done with the EUT powered by 115 V AC. It was checked that power variations between 85% and 115% did not have any influence on the measurements.

Radiated Emissions and EIRP have been retested on this model, all 50 Ohm results are from the original KX-TGF880.

2 TEST REPORT SUMMARY

2.1 General

All measurements are traceable to national standards.

The tests were conducted for demonstrating compliance with FCC CFR 47 Part 15, paragraph 15.247 and Industry Canada RSS-247 Issue 2 and RSS-GEN Issue 5.

Tests were performed in accordance with ANSI C63.4-2014 and ANSI C63.10-2013.

Radiated tests were made in a semi-anechoic chamber at measuring distance of 3m.

A description of the test facility is on file with FCC and ISSED.

☒ New Submission	☒ Production Unit
☐ Class II Permissive Change	☐ Pre-production Unit
DSS Equipment Code	☐ Family Listing

2.2 Test Summary

Name of test	FCC Part 15 reference	RSS-247 Issue 2, RSS-GEN Issue 5 reference	ANSI C63.10-2013 Reference	Result
Supply Voltage Variations	15.31(e)	6.11 (RSS-GEN)	5.13	Complies
Antenna Requirement	15.203	6.8 (RSS-GEN)	5.8	Complies
Power Line Conducted Emission	15.107(a) 15.207(a)	7.2 / 8.8 (RSS-GEN)	6.2	Complies
Channel Separation and 20 dB BW	15.247(a)(1)	5.1 (4) (RSS-247)	7.8.2 (FHSS)	Complies
Number of Hopping Frequencies	15.31(m)	5.1 (6) (RSS-247)	7.8.3 (FHSS)	Complies
Pseudorandom Hopping Algorithm	15.247(a)(1)	5.1 (3) (RSS-247)	N/A (FHSS)	Complies
Time of Occupancy (dwell time)	15.247(a)(1)(iii)	5.1 (5) (RSS-247)	7.8.4 (FHSS)	Complies
Occupied Bandwidth	15.247(a)(1)	5.1 (7) (RSS-247)	6.9.2 FHSS)	Complies
Occupied Bandwidth (99% BW)	N/A	6.7 (RSS-GEN)	6.9.3	Complies
Peak Power Output	15.247(b)	5.4 (RSS-247)	11.9.1.1	Complies
Spurious Emissions (Antenna Conducted)	15.247(c)	5.5 (RSS-247)	6.7 7.8.6 (FHSS) 7.8.8 (FHSS)	Complies
Spurious Emissions (Radiated)	15.247(c) 15.109(a) 15.209(a)	5.5 (RSS-247) 7.3 (RSS-GEN) 8.9 (RSS-GEN)	6.3, 6.5, 6.6, 6.10 11.12	Complies

3 TEST RESULTS

3.1 Power Line Conducted Emissions

FCC Part 15.107 (a)

ISED RSS-GEN Issue 5, Clause 7.2/8.8

Measurement procedure: ANSI C63.4-2014 using 50 μ H/50 ohms LISN.


Test Results: Complies

Measurement Data: See attached plots.

Highest measured value (L1 and N):

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
---	---	---	---	---	---	---			---

Measured with 120V 60Hz.

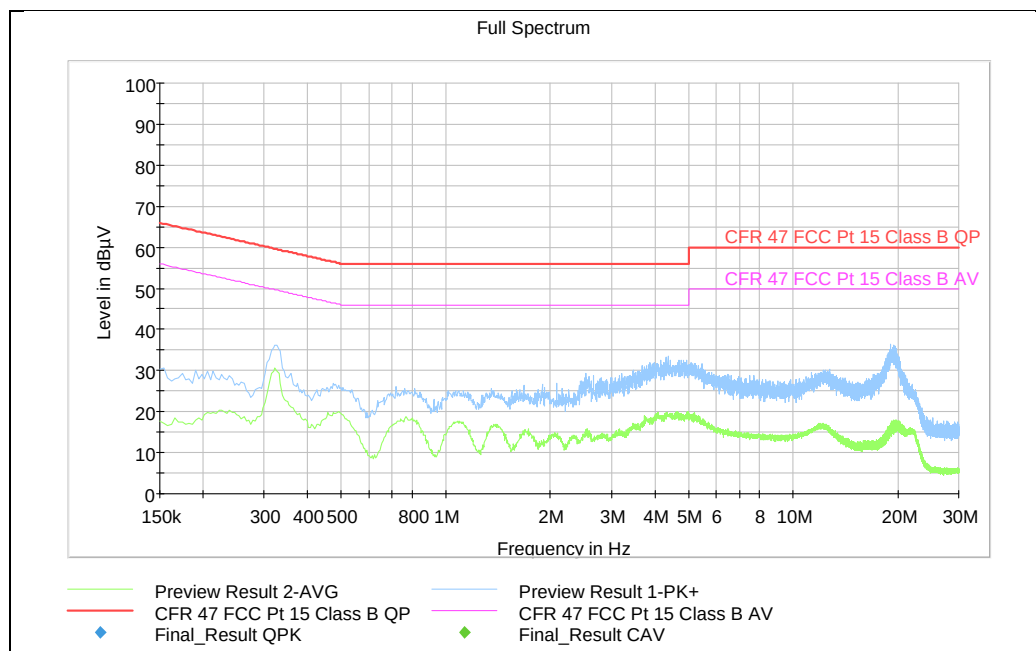

3.2 20dB Bandwidth

FCC Part 15.247(a)(1)

ISED RSS-247 Issue 2, Clause 5.1 (b)

Measurement procedure: ANSI C63.10-2013 Clause 7.8.2

Test Results: Complies


Measurement Data:

Modulation	20dB Bandwidth		
	2402 MHz	2441 MHz	2480 MHz
Basic Rate (GFSK)	958 kHz	955 kHz	955 kHz

RF channel has no influence on 20 dB bandwidth.

See attached plots.

Frequency Band	Requirement for Frequency Hopping
2400-2483.5 MHz	The maximum 20 dB bandwidth shall be less than channel separation, alternatively, less than 150% of channel separation if output power is less than 125 mW.

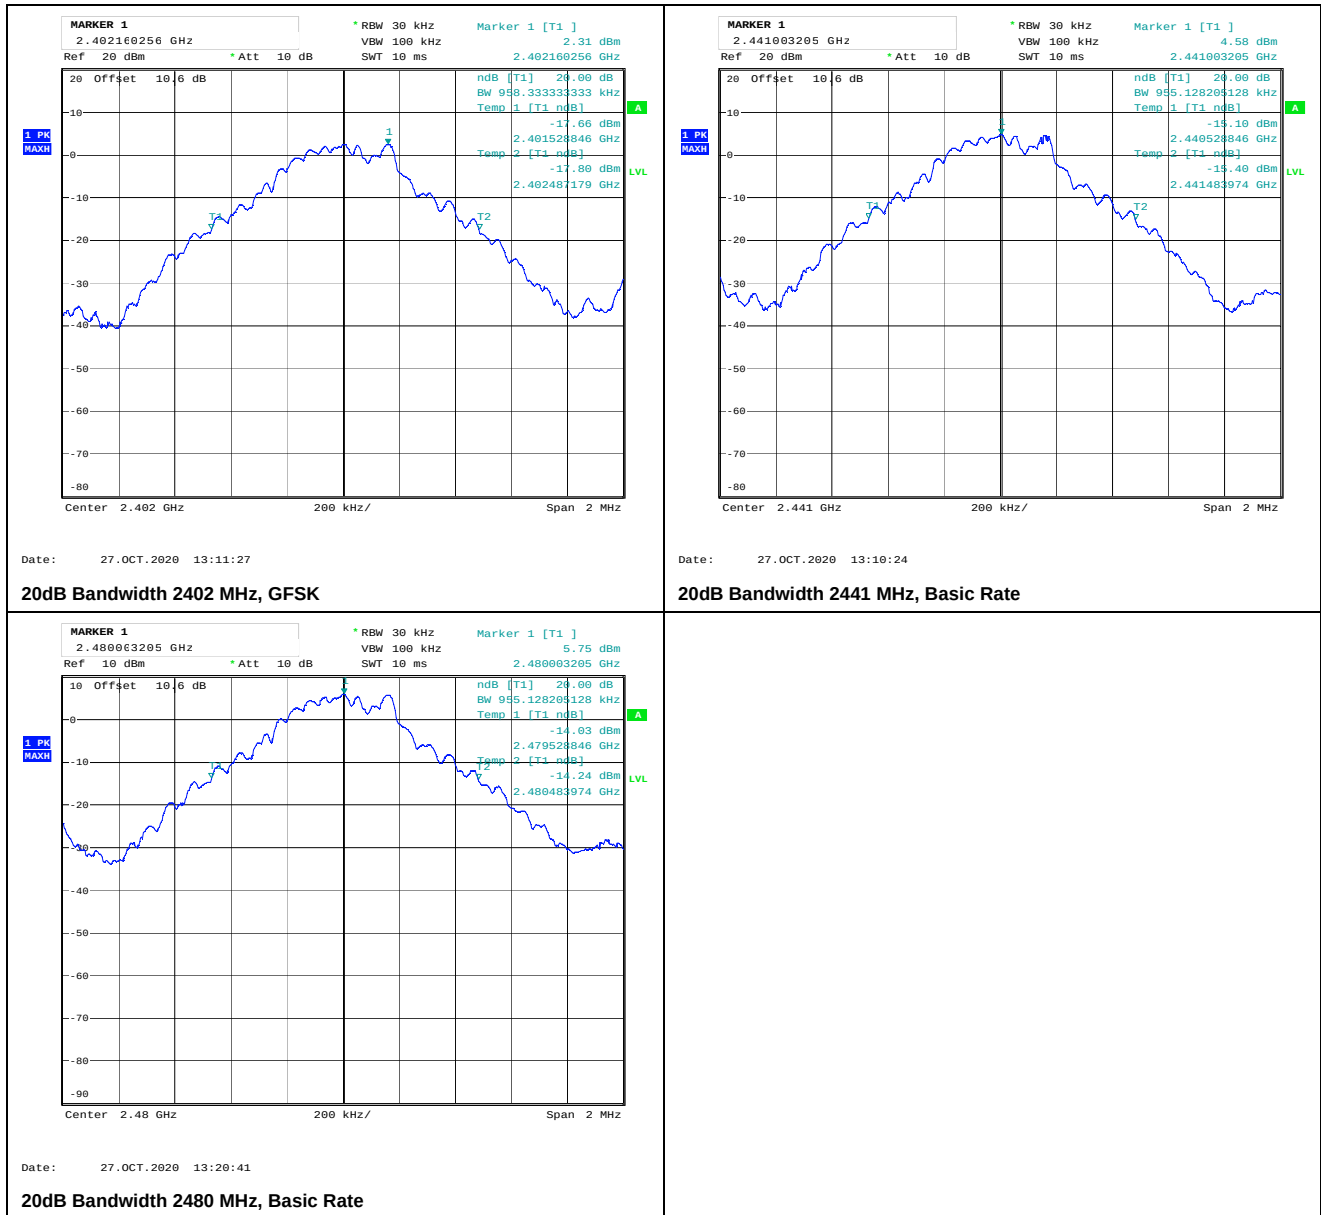

3.3 Pseudorandom Hopping Algorithm

FCC Part 15.247 (a)(1)

ISED Canada RSS-247 Issue 2, Clause 5.1

Test Results: Complies

Measurement Data: /

Requirements
The channel frequencies shall be selected from a pseudorandom ordered list of hopping frequencies. Each frequency must be used equally by the transmitter.

3.4 Hopping Bandwidth

FCC Part 15.247 (a)(1)(iii)

ISED Canada RSS-247 Issue 2, Clause 5.1

Measurement procedure: ANSI C63.10-2013 Clause 6.9.2 / 7.8.3


Test Results: Complies

Measurement Data:

Number of RF Channels in use	Minimum 20 and Maximum 79
Channel Centre Frequencies	2402 to 2480 MHz
Channel Separation	1 MHz


See attached plots.

Frequency Band	Requirement for Frequency Hopping
2400-2483.5 MHz	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

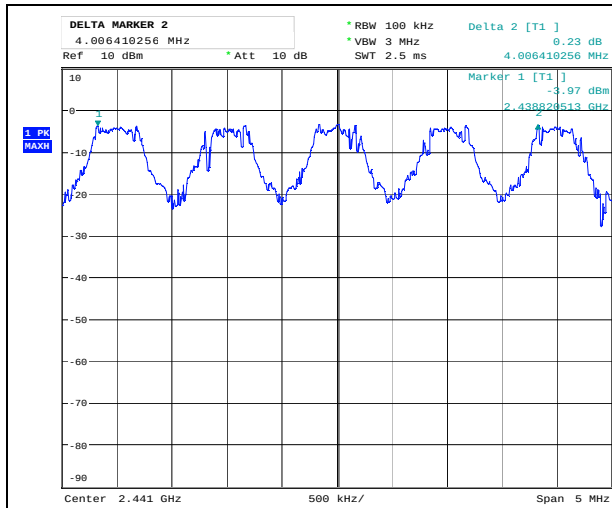


Date: 27.OCT.2020 12:55:58

Channel Separation

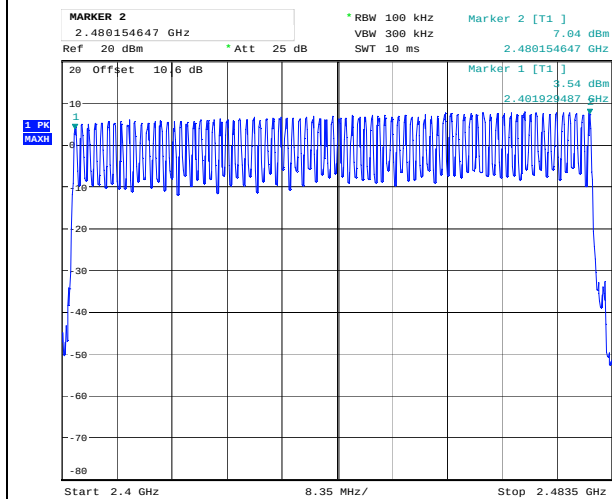


Date: 21.OCT.2020 10:09:44

RF Channels in Use, Basic Rate, 79 Channels

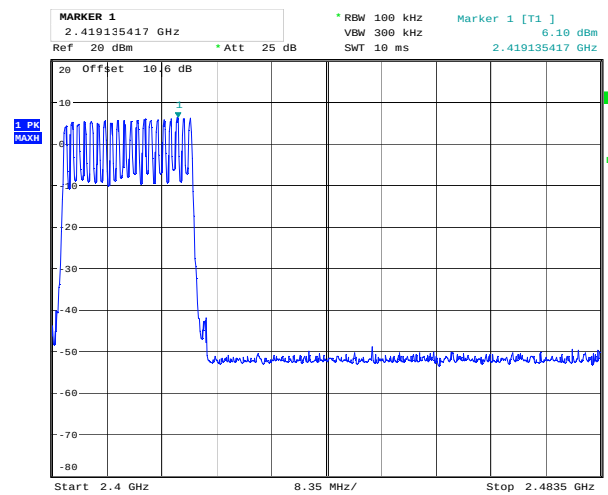


RF Channels in Use, Basic Rate, 20 Channels

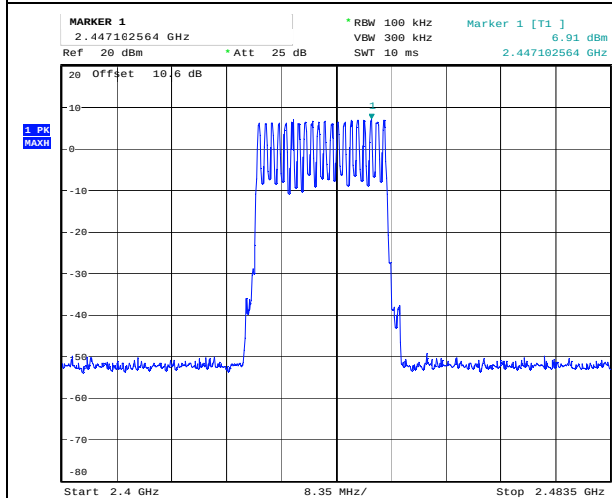

Date: 21.OCT.2020 10:20:57

RF Channels in Use, Basic Rate, 20 Channels

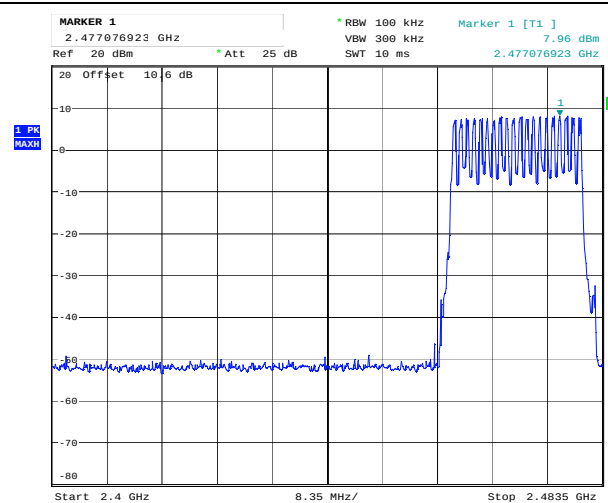

Date: 21.OCT.2020 10:20:19

RF Channels in Use, Basic Rate, 20 Channels

3.5 Occupancy Time

FCC Part 15.247 (a)(1)(iii)

ISED Canada RSS-247 Issue 2, Clause 5.1 (c)

Measurement procedure: ANSI C63.10-2013 Clause 7.8.4

Test Results: Complies

Measurement Data:

Frame Type and Data Rate	Burst Length (ms)	Frame Length (ms)	Time of Occupancy (ms)	Verdict
DH1	0.390	1.25	124.8	Complies
DH3	1.65	2.50	264.0	Complies
DH5	2.90	3.75	309.3	Complies

Burst length is the same for all data rates.


Time between RF burst on same channel = Frame Length * Number of Channels

Time of occupancy = (Burst Length * Number of Channels * 400 ms) / Time Between Burst on Same Channel
= (Burst Length * 400 ms) / Frame Length

Number of RF channels is minimum 20 and maximum 78.


See attached plots.

Frequency Band	Requirement for Frequency Hopping
2400-2483.5 MHz	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

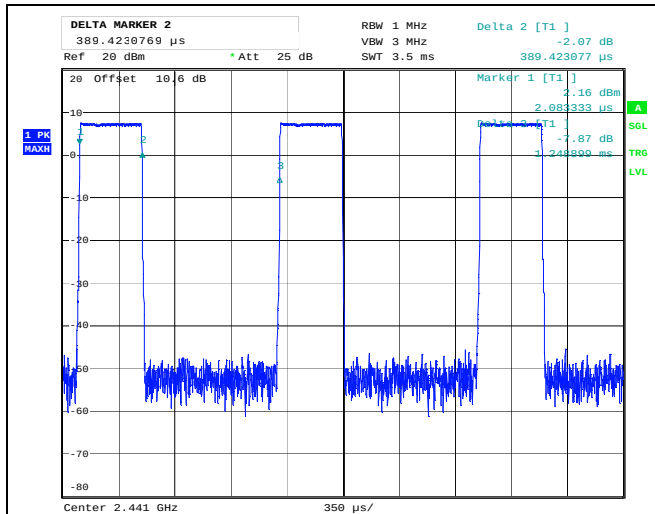


Date: 21.OCT.2020 10:00:21

RF Burst, DH1

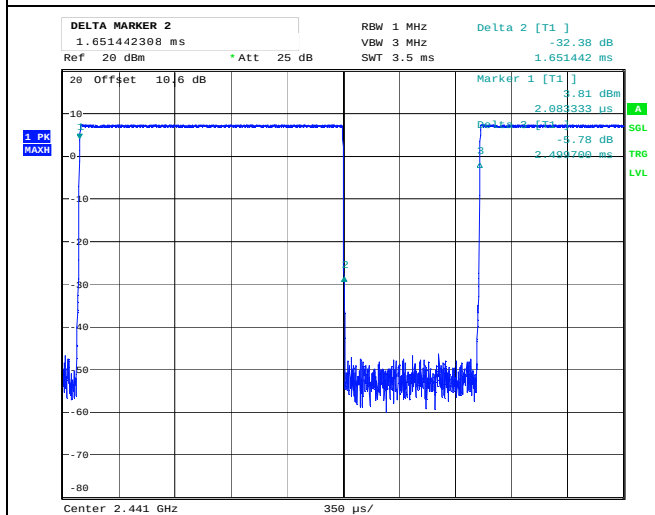

Date: 21.OCT.2020 10:01:17

RF Burst, DH3

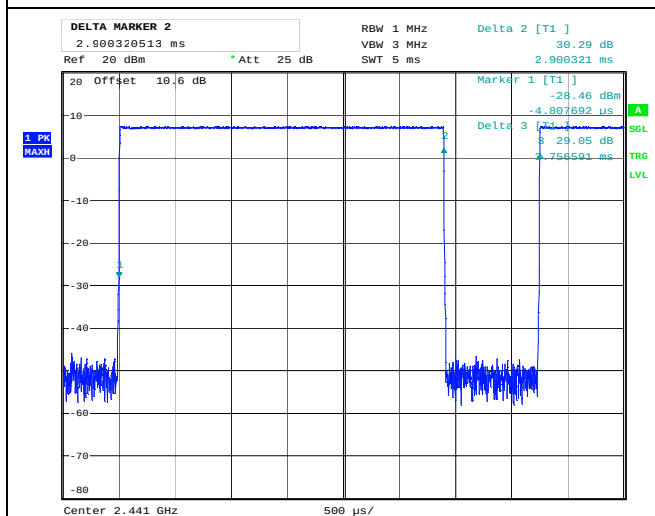

Date: 21.OCT.2020 10:03:08

RF Burst DH5

3.6 Occupied Bandwidth (99% BW)

FCC Part 15.247 (a)(1)(iii)

ISED Canada RSS-247 Issue 2, Clause 5.1

ISED Canada RSS-GEN Issue 5, Clause 6.7

Measurement procedure: ANSI C63.10-2013 Clause 6.9.3 / 7.8.3

Test Results: Complies

Measurement Data:


Carrier Frequency and Data Rate	Occupied Bandwidth (99% BW)
2402 MHz Basic Rate	869 kHz
2441 MHz Basic Rate	878 kHz
2480 MHz Basic Rate	894 kHz

Occupied Bandwidth is the same for all channels.

See attached plots.

Requirements:

No requirement for 99% BW, reported for information only.

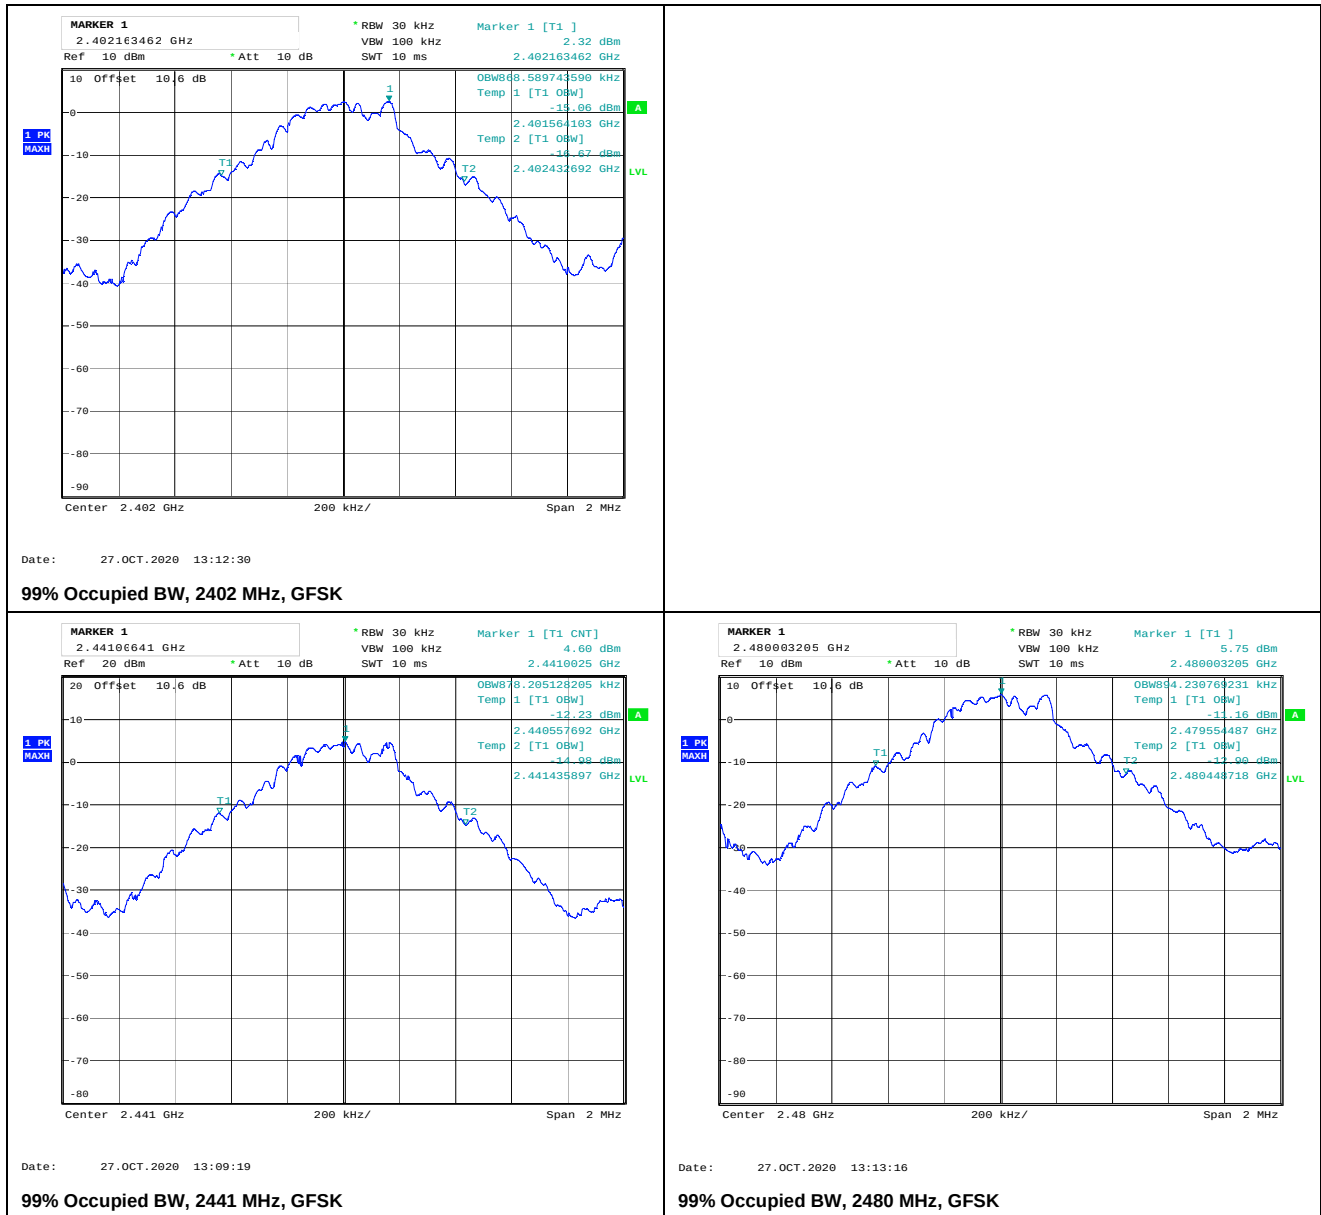

3.7 Peak Power Output

FCC Part 15.247 (b)

ISED Canada RSS-247 Issue 2, Clause 5.4

Measurement procedure: ANSI C63.10-2013 Clause 11.9.1.2

Test Results: Complies

Measurement Data:

Carrier Frequency (MHz)	Modulation Type	Conducted Power (dBm)	Conducted Power (mW)	Field Strength (dBμV/m)	EIRP (mW)	Max. Antenna gain (dBi)
2402	GFSK	5.1	3.2	97.31	1.61	-3.0
2441	GFSK	7.3	5.4	99.75	2.83	-2.8
2480	GFSK	8.3	6.8	102.11	4.88	-1.4


Output Power reported is Maximum Peak Power.

Radiated Power was calculated from measured Field Strength using the method described in FCC KDB 412172 D01.


Antenna Gain is less than 6 dBi.

See attached plots.


Frequency Band	Requirements for Frequency Hopping systems
2400-2483.5 MHz	For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts
Maximum allowed Antenna Gain	
If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced below the stated value above by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	

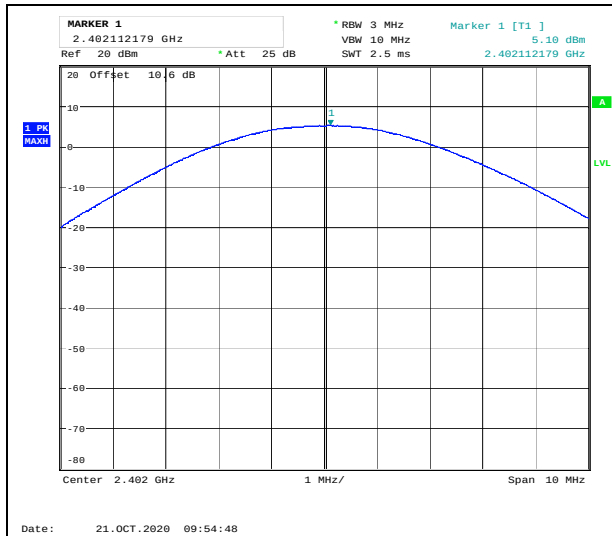


Peak Power, 2402 MHz, GFSK

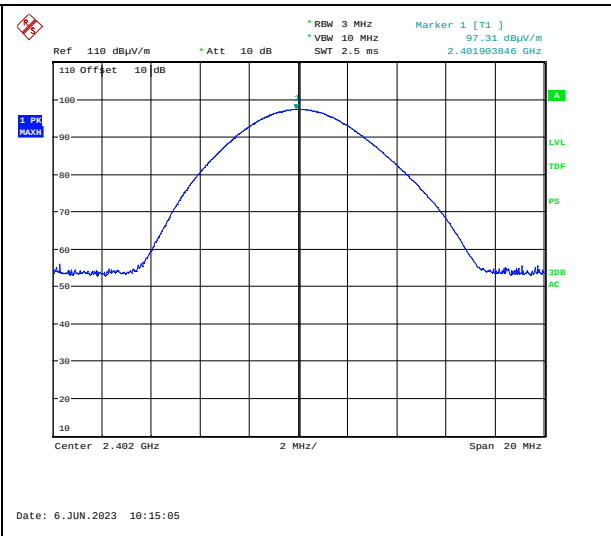


Maximum Field Strength, 2402 MHz, GFSK

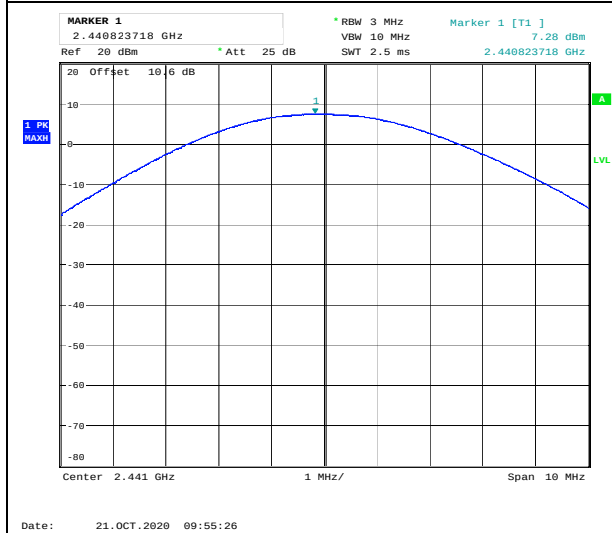


Peak Power, 2441 MHz, GFSK

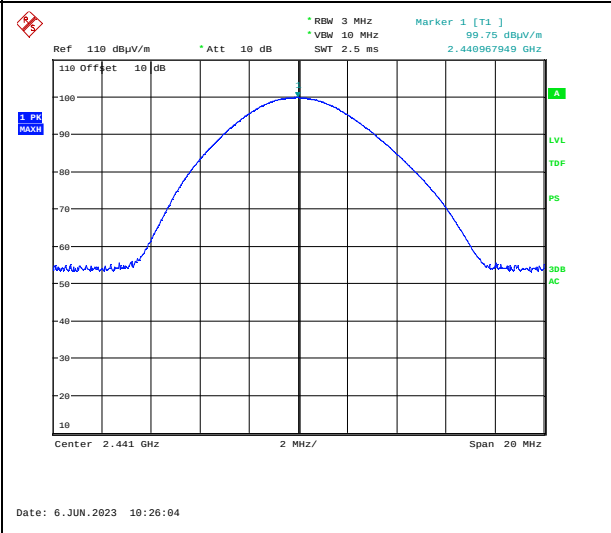

Maximum Field Strength, 2441 MHz, GFSK

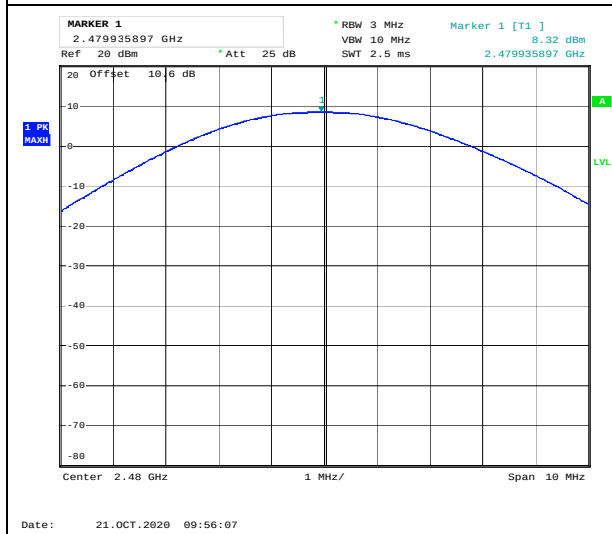

Peak Power, 2480 MHz, GFSK

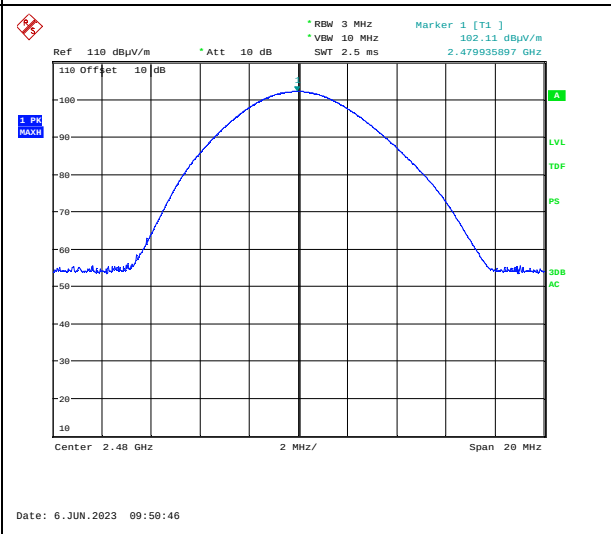

Maximum Field Strength, 2480 MHz, GFSK

3.8 Conducted Emissions at Antenna Connector

FCC Part 15.247 (d)

ISED Canada RSS-247 Issue 2, Clause 5.5

Measurement procedure: ANSI C63.10-2013 Clause 11.11

Test Results: Complies


Measurement Data:

Carrier Frequency	Highest Value (dBc)	Margin (dB)	Verdict
2402 MHz	> 50	> 30	Pass
2441 MHz	> 50	> 30	Pass
2480 MHz	> 50	> 30	Pass


Measured with Peak Detector

RF conducted power to 25 GHz: see attached plots.


Requirements for all systems	
Peak measurement	RMS averaging (alternative measurement)
20 dB or more below carrier measured in 100 kHz bandwidth	30 dB or more below carrier measured in 100 kHz bandwidth
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.	

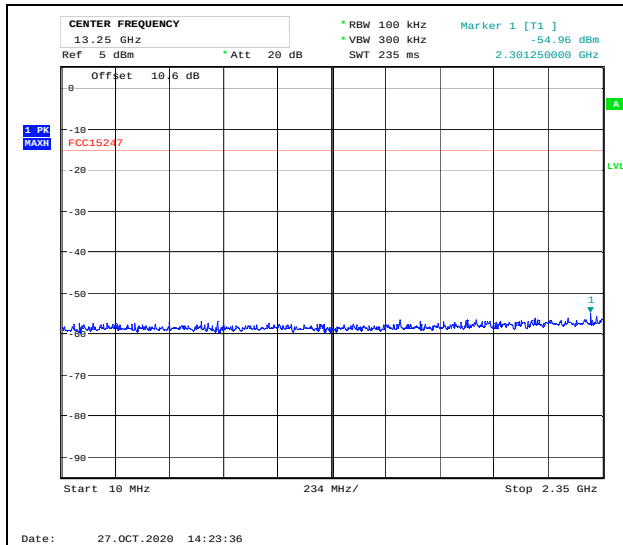


Conducted Emissions 10-2350 MHz, 2402 MHz, GFSK

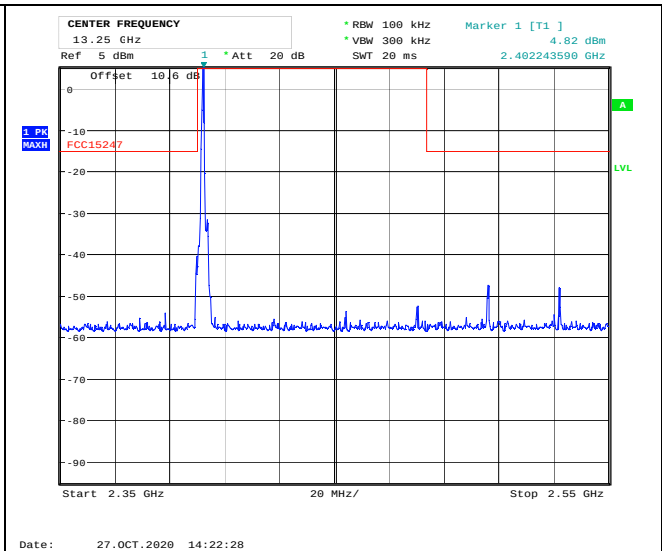


Conducted Emissions 2350-2550 MHz, 2402 MHz, GFSK

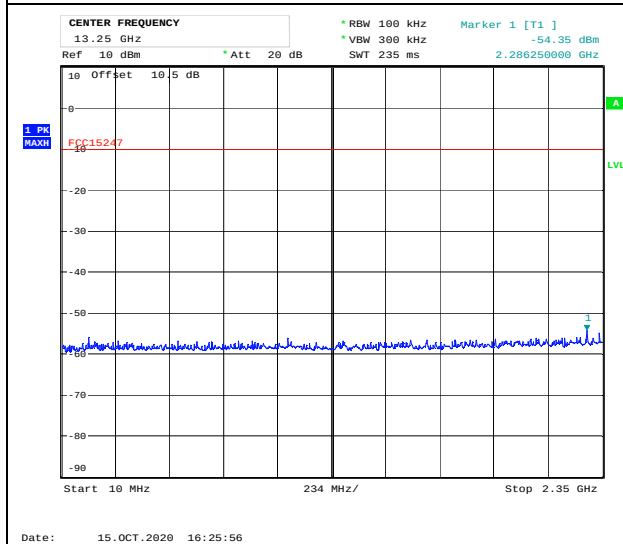


Conducted Emissions 10-2350 MHz, 2441 MHz, GFSK

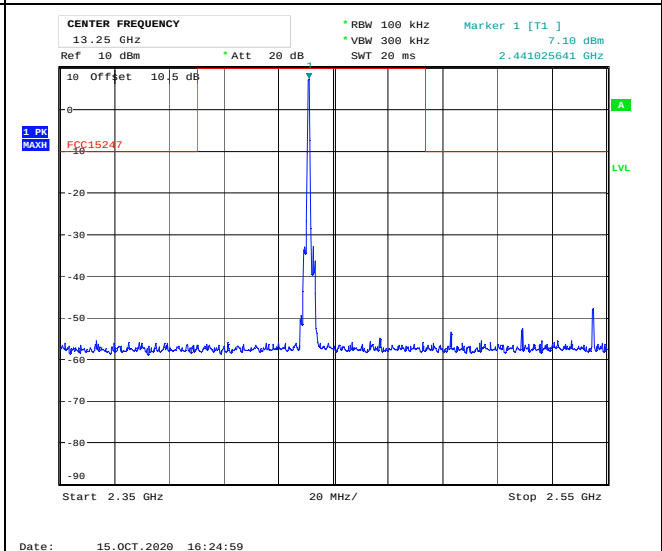


Conducted Emissions 2350-2550 MHz, 2441 MHz, GFSK

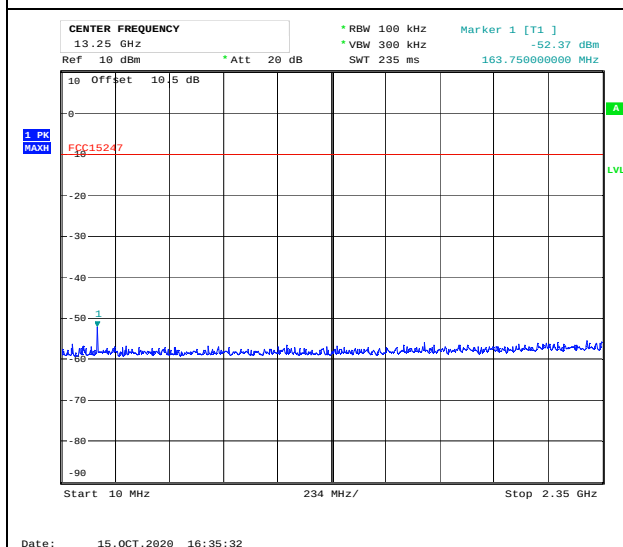

Conducted Emissions 10-2350 MHz, 2480 MHz, GFSK

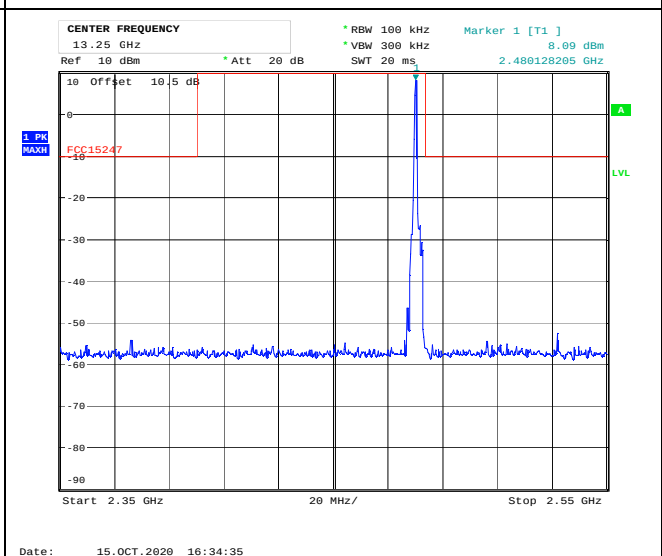


Conducted Emissions 2350-2550 MHz, 2480 MHz, GFSK

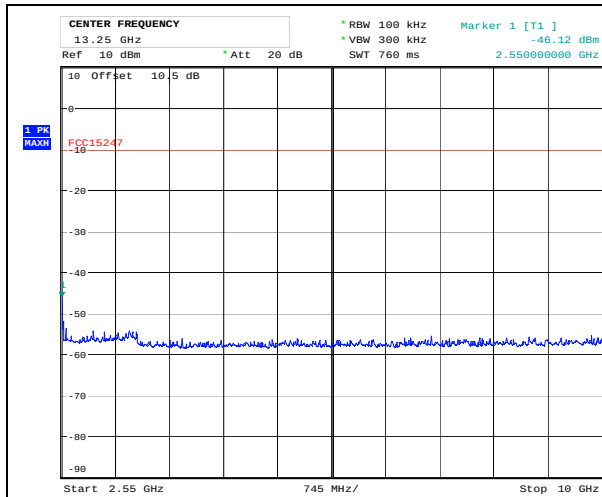


Date: 15.OCT.2020 16:32:00

Conducted Emissions 2550-10000 MHz, 2402 MHz, GFSK

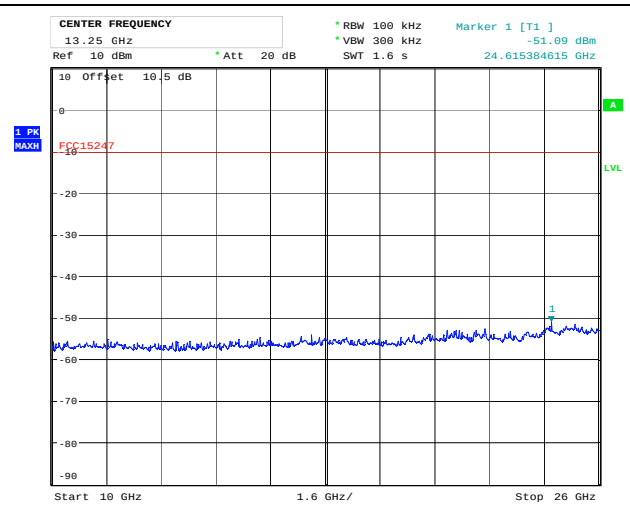


Date: 15.OCT.2020 16:32:57

Conducted Emissions 10000-26000 MHz, 2402 MHz, GFSK

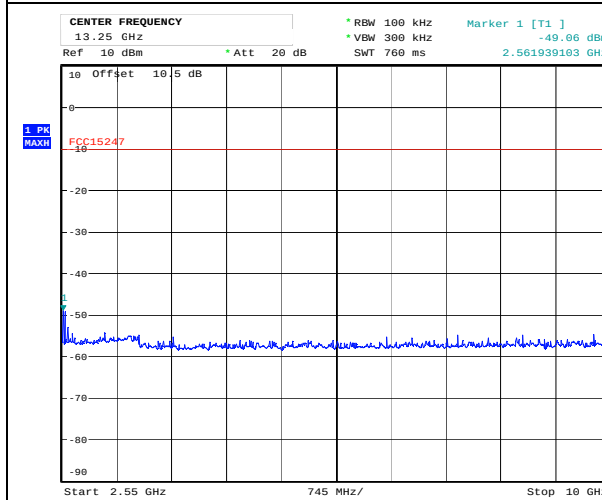


Date: 15.OCT.2020 16:27:13

Conducted Emissions 2550-10000 MHz, 2441 MHz, GFSK

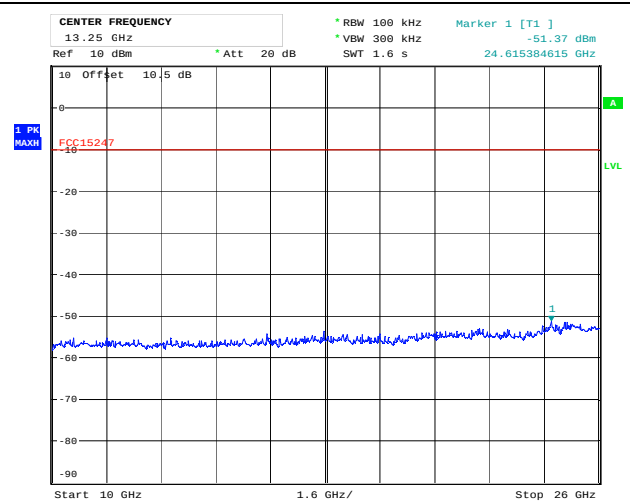


Date: 15.OCT.2020 16:28:10

Conducted Emissions 10000-26000 MHz, 2441 MHz, GFSK

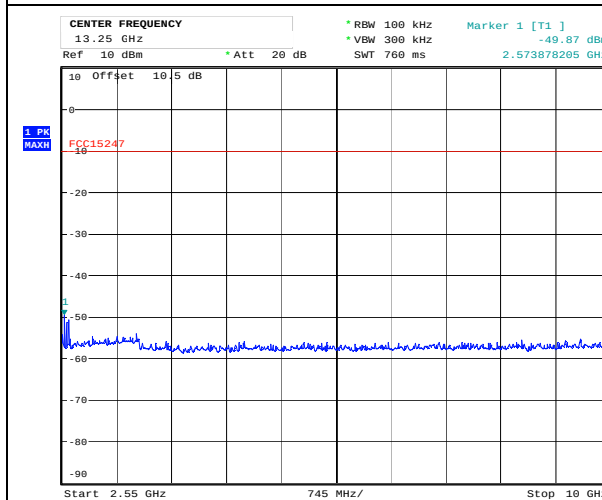


Date: 15.OCT.2020 16:36:48

Conducted Emissions 2550-10000 MHz, 2480 MHz, GFSK

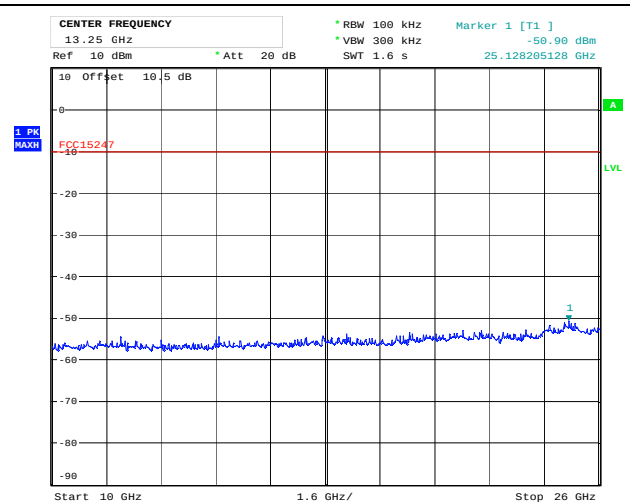

Date: 15.OCT.2020 16:37:45

Conducted Emissions 10000-26000 MHz, 2480 MHz, GFSK

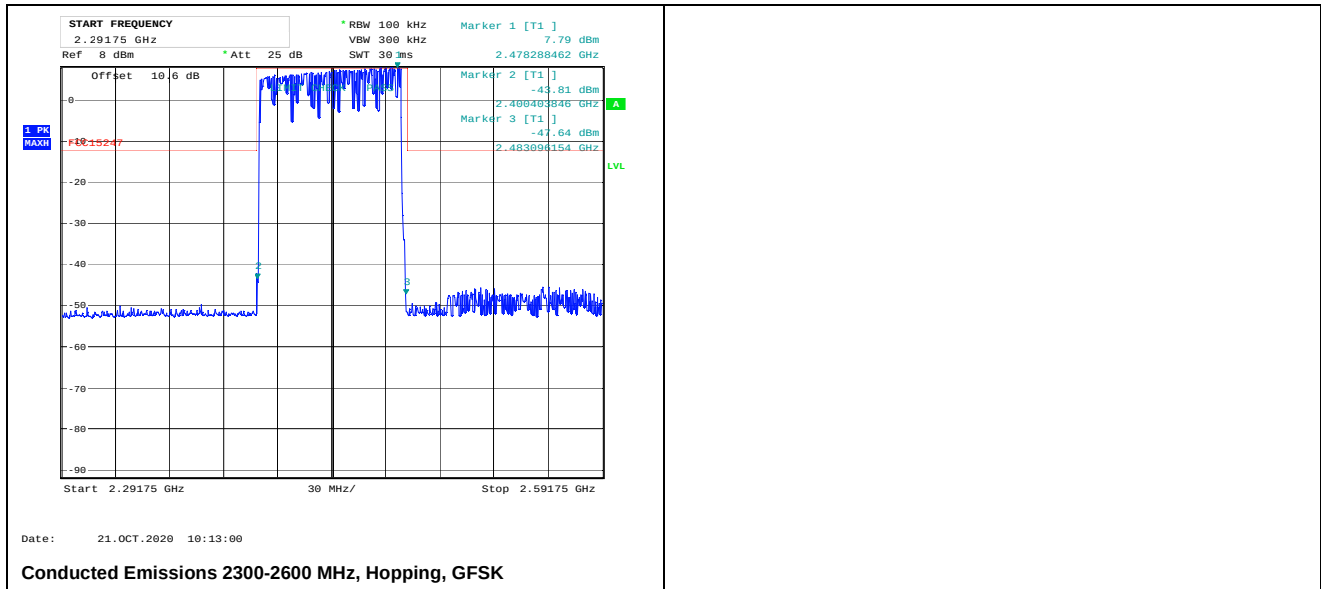

3.9 Restricted Bands of operation

Restricted Bands of operation for FCC and ISED are defined in FCC Part 15.205 and ISED RSS-GEN, Issue 5 clause 8.10.

Generally, no fundamentals are allowed in the restricted bands and all emissions must comply with the limits in FCC 15.209 or RSS-GEN, Issue 5, clause 8.9.

FCC (MHz)	ISED Canada (MHz)	FCC (GHz)	ISED Canada (GHz)
0.090-0.110		0.96-1.24 1.3-1.427	0.96-1.427
0.495-0.505		1.435-1.6265	
2.1735-2.1905		1.6455-1.6465	
	3.020-3.026	1.660-1.710	
4.125-4.128		1.7188-1.7222	
4.17725-4.17775		2.2-2.3	
4.20725-4.20775		2.31-2.39	
	5.677-5.683	2.4835-2.5	
6.215-6.218		2.69-2.9	2.655-2.9
6.26775-6.26825		3.26-3.267	
6.31175-6.31225		3.332-3.339	
8.291-8.294		3.3458-3.358	
8.362-8.366		3.6-4.4	3.5-4.4
8.37625-8.38675		4.5-5.15	
8.41425-8.41475		5.35-5.46	
12.29-12.293		7.25-7.75	
12.51975-12.52025		8.025-8.5	
12.57675-12.57725		9.0-9.2	
13.36-13.41		9.3-9.5	
16.42-16.423		10.6-12.7	
16.69475-16.69525		13.25-13.4	
16.80425-16.80475		14.47-14.5	
25.5-25.67		15.35-16.2	
37.5-38.25		17.7-21.4	
73-74.6		22.01-23.12	
74.8-75.2		23.6-24.0	
108-121.94 123-138	108-138	31.2-31.8	
149.9-150.05		36.43-36.5	
156.52475-156.52525		Above 38.6	
156.7-156.9			
162.0125-167.17			
167.72-173.2			
240-285			
322-335.4			
399.9-410			
608-614			

Frequencies in **Bold** text are specific for FCC or ISED, all other frequencies are common.

3.10 Radiated Emissions, Band Edge

FCC Part 15.209 (a)

ISED Canada RSS-GEN Issue 5, Clause 7.3 / 8.9

Measurement procedure: ANSI C63.10-2013 Clause 11.12

Test Results: Complies

Measurement Data:

Carrier Frequency and Data Rate	Band Edge Frequency	Measured Field Strength (dBμV/m)		Limit (dBμV/m)		Margin (dB)	
		Peak Detector	Average Detector	Peak Det	Average Det	Peak Det	Average Det
2402 MHz GFSK	2390 MHz	51.1	/	74	54	2.9	/
2480 MHz GFSK	2483.5 MHz	61.2	41.2			12.8	12.8

Average Detector values are measured with Peak Detector and corrected for Duty Cycle.



See attached plots.

Duty Cycle Correction Factor Calculation:

Duty Cycle = slot length / frame length

Duty Cycle Correction factor = $-20 \times \log(\text{Duty Cycle}) = 27.5 \text{ dB}$

Maximum Duty Cycle Correction Factor according to Para 15.35 (b): 20 dB

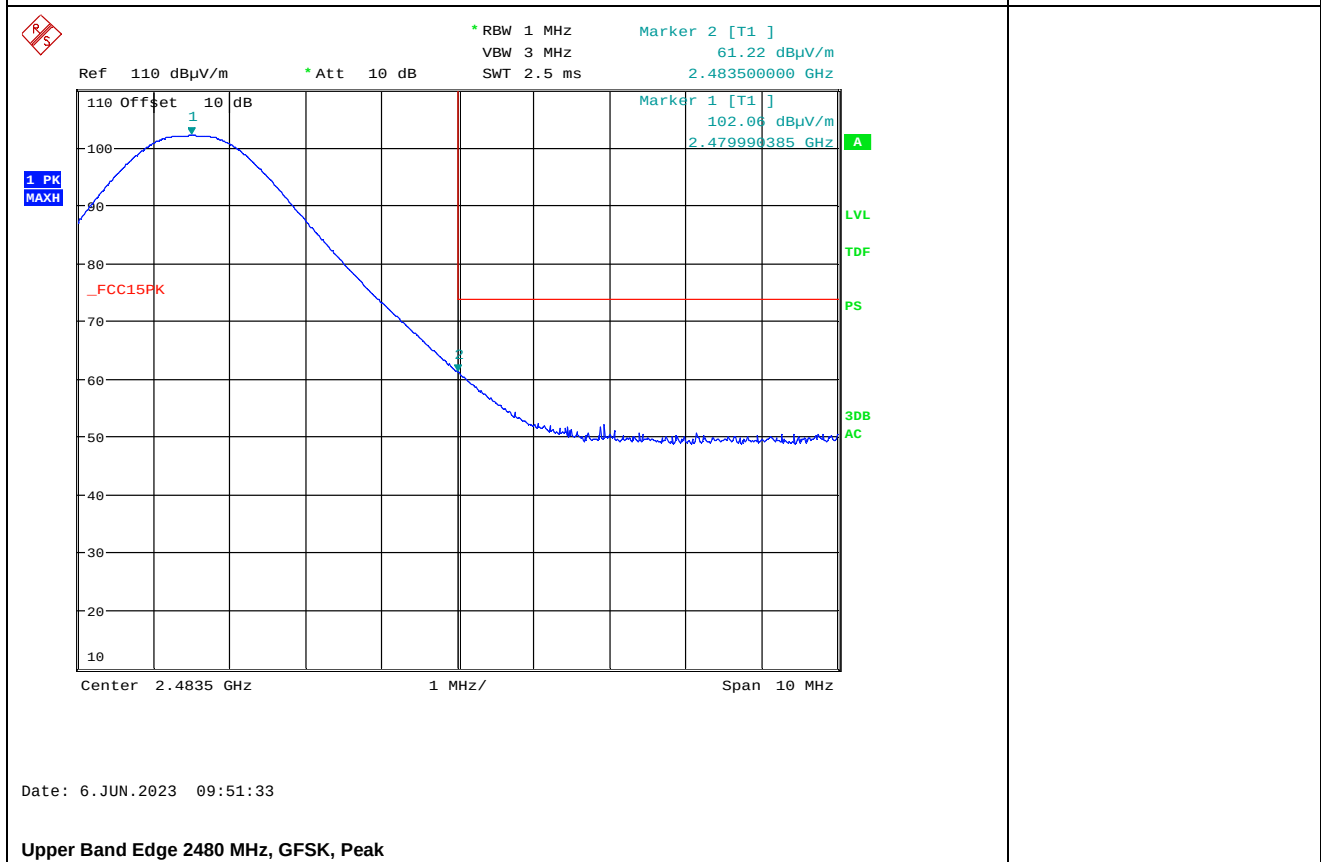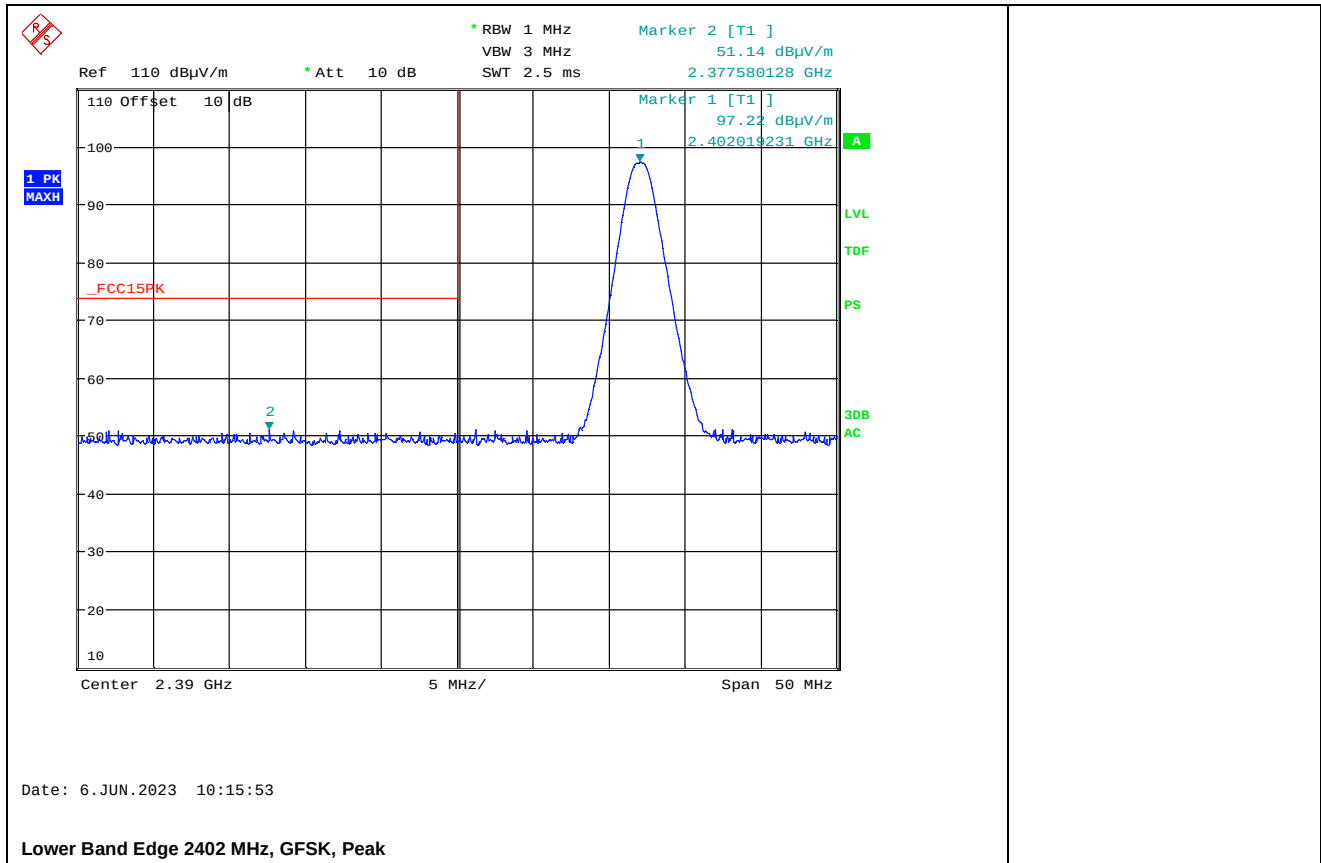

3.11 Radiated Emission, 30 – 1000 MHz

FCC Part 15.209 (a)

ISED Canada RSS-GEN Issue 5, Clause 7.3/8.9

Measurement procedure: ANSI C63.10-2013 Clause 11.12

Test Results: Complies

Measurement Data:

Detector: Peak (found frequencies were measured with Quasi-Peak Detector)

Measuring distance 3 m

Tested in test mode with BT transmitting


Measured Frequency (MHz)	Carrier Frequency (MHz)	Modulation	Measured Emission (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30 – 88	2402 / 2480	GFSK	< 30	40.0	> 10
88 – 216	2402 / 2480	GFSK	< 30	43.5	> 13.5
216 – 960	2402 / 2480	GFSK	< 30*	46.0	> 16
960 – 1000	2402 / 2480	GFSK	< 40	54.0	> 14
165.87	2480	GFSK	27.1	43.5	16.4
414.7	2402	GFSK	37.0	46.0	9.0
414.7	2480	GFSK	35.6	46.0	10.4
497.5	2402	GFSK	36.4	46.0	9.7
497.5	2480	GFSK	35.9	46.0	10.1

*Except measured frequencies

See attached plots.


Requirements/Limit

FCC	Part 15.209 @ frequencies defined in §15.205	
ISED	RSS-GEN Issue 5, Clause 8.9 @ frequencies defined in clause 8.10	
Frequency	Radiated emission limit @3 meters	
30 – 88 MHz	100 μV/m	40.0 dBμV/m
88 – 216 MHz	150 μV/m	43.5 dBμV/m
216 – 960 MHz	200 μV/m	46.0 dBμV/m
960 – 1000 MHz	500 μV/m	54.0 dBμV/m
	Limits above are with Quasi Peak Detector	

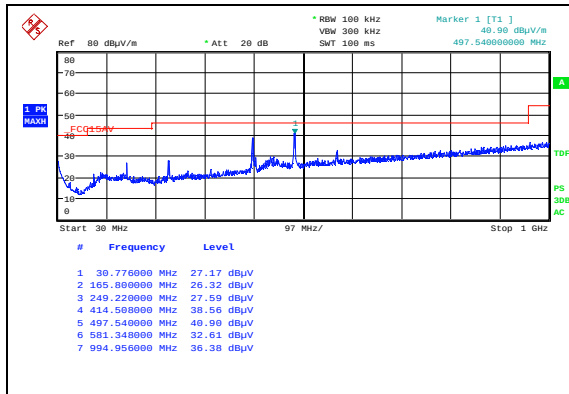


Date: 12. JUN. 2023 14:54:29

Radiated Emissions 30 - 1000 MHz, 2402 MHz, GFSK, HP

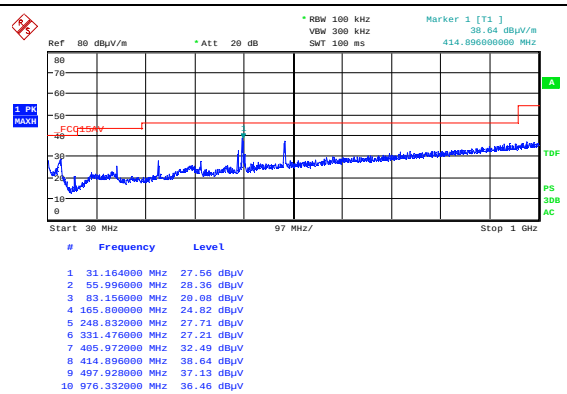


Date: 12. JUN. 2023 14:52:32

VP

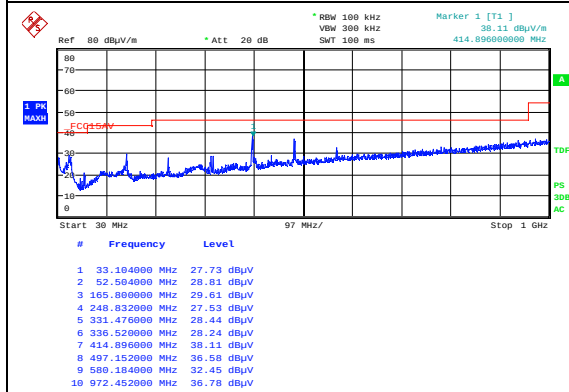


Date: 12. JUN. 2023 15:33:20

Radiated Emissions 30 - 1000 MHz, 2480 MHz, GFSK, HP

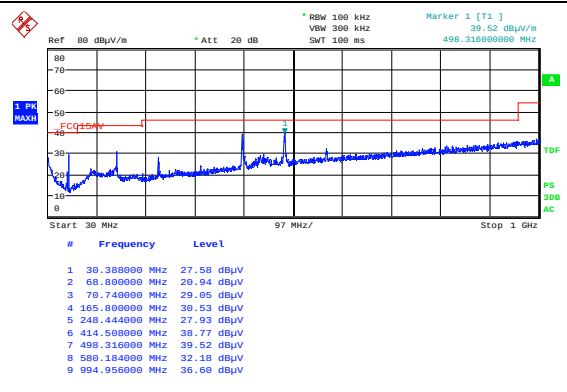


Date: 12. JUN. 2023 15:35:17

VP

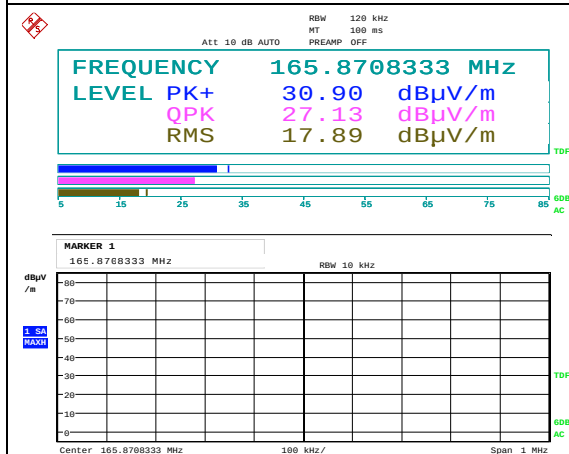


Date: 12. JUN. 2023 15:58:06


Emissions, 165.87 MHz, 2480 MHz, Max: HP

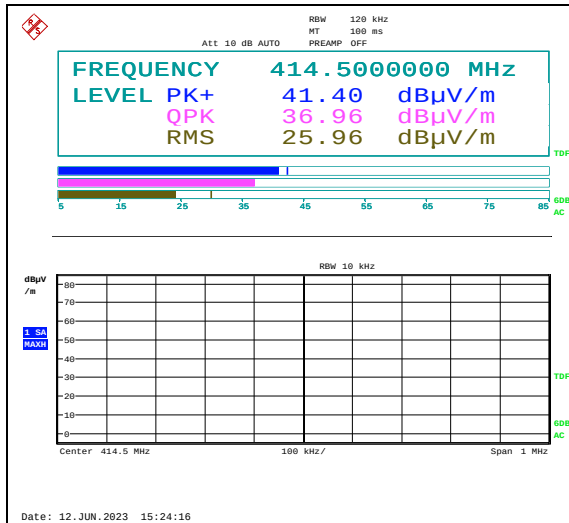


Emissions, 414.5 MHz, 2402 MHz, Max: HP

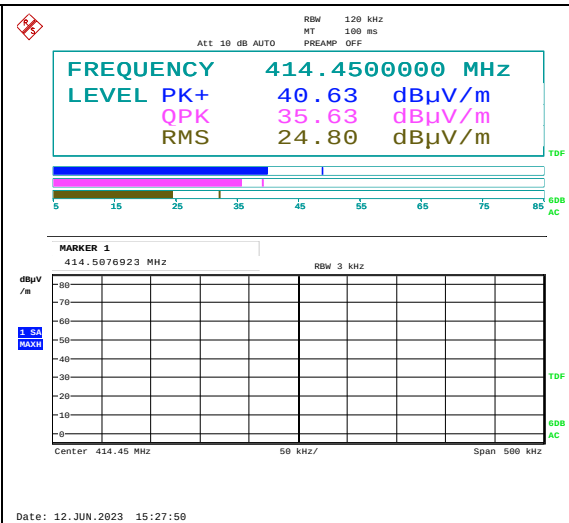

Emissions, 414.5 MHz, 2480 MHz, Max: HP

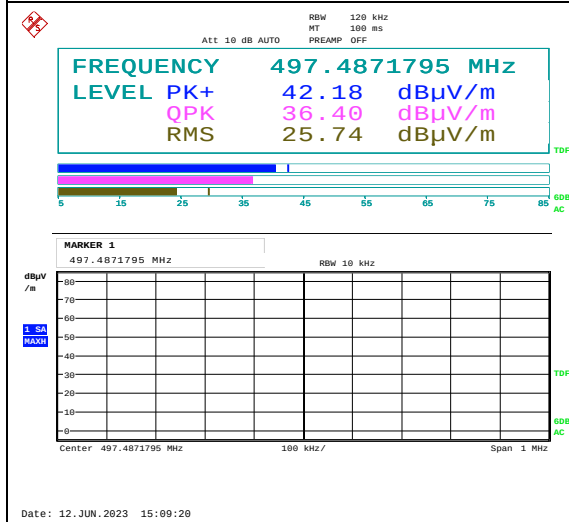

Emissions, 497.5 MHz, 2402 MHz, Max: HP

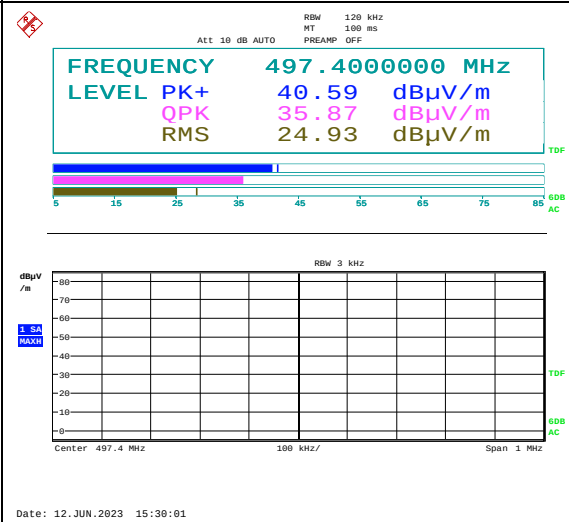

Emissions, 497.5 MHz, 2480 MHz, Max: HP

3.12 Radiated Emissions, 1-26 GHz

FCC Part 15.209 (a)

ISED Canada RSS-GEN Issue 5, Clause 7.3/8.9

Measurement procedure: ANSI C63.10-2013 Clause 11.12

Test Results: Complies

Measurement Data:

Measuring distance: 3m (1 – 18 GHz)

A pre-scan was performed above 18 GHz and no spurious emissions were detected.

No spurious emissions were detected.

Average Detector values are calculated from Peak values by Duty Cycle Correction Factor


A Band Reject Filter was used for measurements from 1 GHz to 18 GHz

Antenna factor, amplifier gain and cable loss are included in spectrum analyzer "Transducer factor"

See plots.


Requirements/Limit

FCC	Part 15.209 @ frequencies defined in §15.205	
ISED	RSS-GEN Issue 5, clause 8.9 @ frequencies defined in clause 8.10	
	Radiated emission limit @3 meters	
Frequency	Average Detector	Peak Detector
1 – 26 GHz	54.0 dBµV/m	74.0 dBµV/m

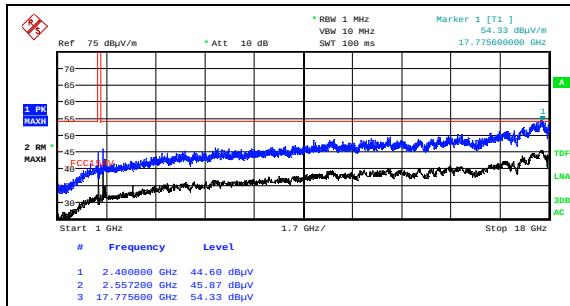


Date: 6.JUN.2023 12:46:19

Radiated Emissions 1 - 18 GHz, 2402 MHz, GFSK, HP

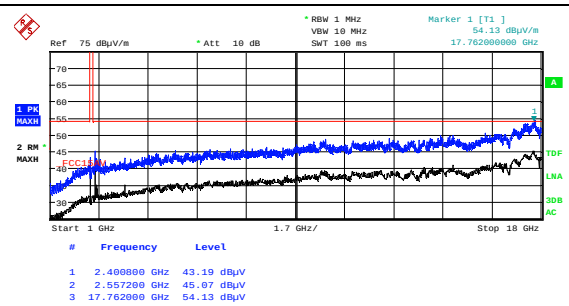


Date: 6.JUN.2023 12:44:22

Radiated Emissions 1 - 18 GHz, 2402 MHz, GFSK, VP

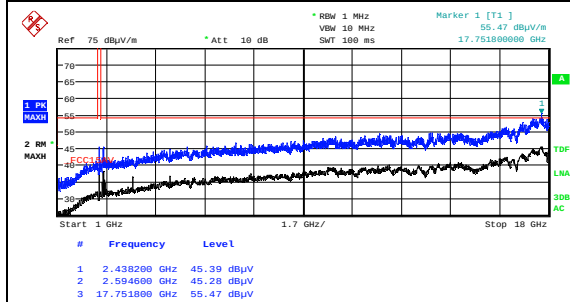


Date: 6.JUN.2023 12:29:00

Radiated Emissions 1 - 18 GHz, 2441 MHz, GFSK, HP

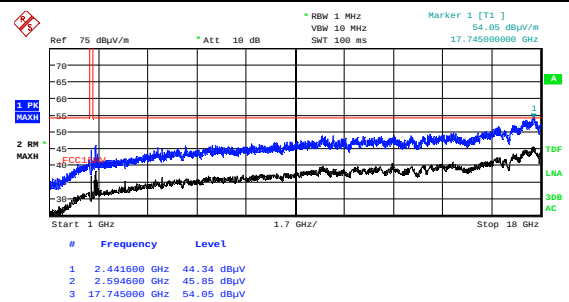


Date: 6.JUN.2023 12:27:04

Radiated Emissions 1 - 18 GHz, 2441 MHz, GFSK, VP

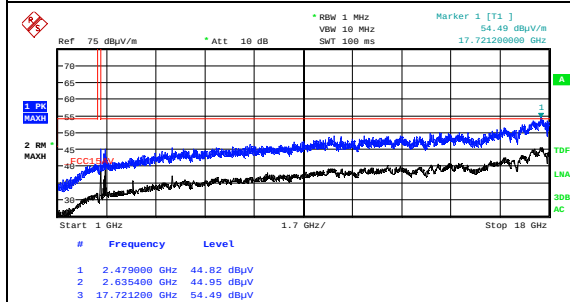


Date: 6.JUN.2023 12:54:23

Radiated Emissions 1 - 18 GHz, 2480 MHz, GFSK, HP

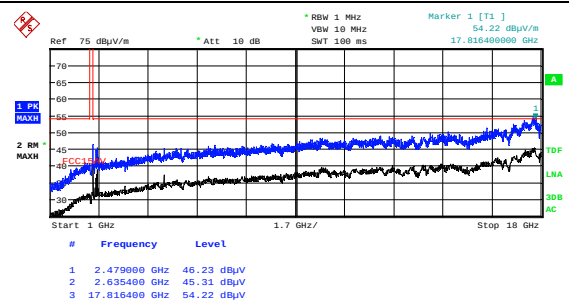


Date: 6.JUN.2023 12:52:26


Radiated Emissions 1 - 18 GHz, 2480 MHz, GFSK, VP

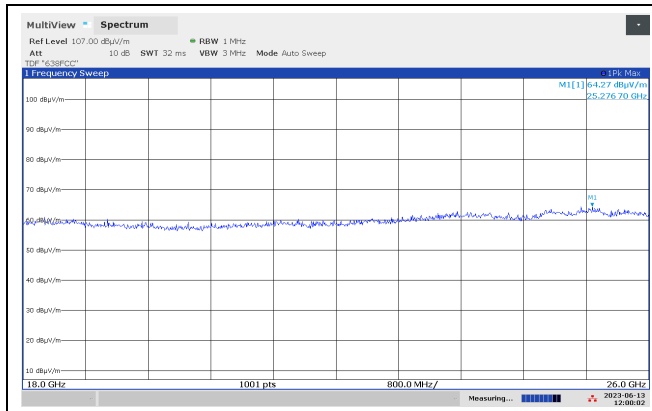


Pre-scan 18 - 26 GHz, 2402 MHz, GFSK, @10cm

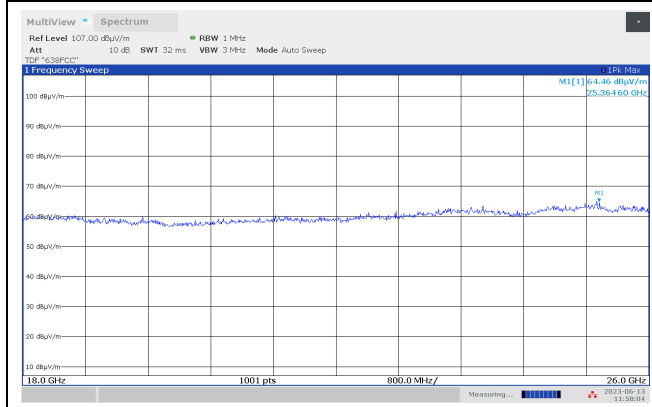


Pre-scan 18 - 26 GHz, 2441 MHz, GFSK, @10cm

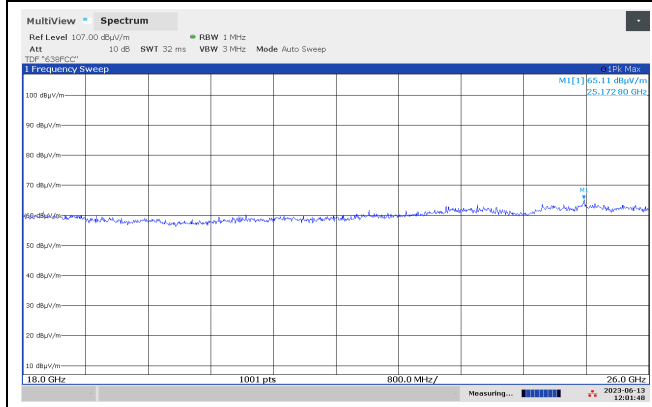


Pre-scan 18 - 26 GHz, 2480 MHz, GFSK, @10cm

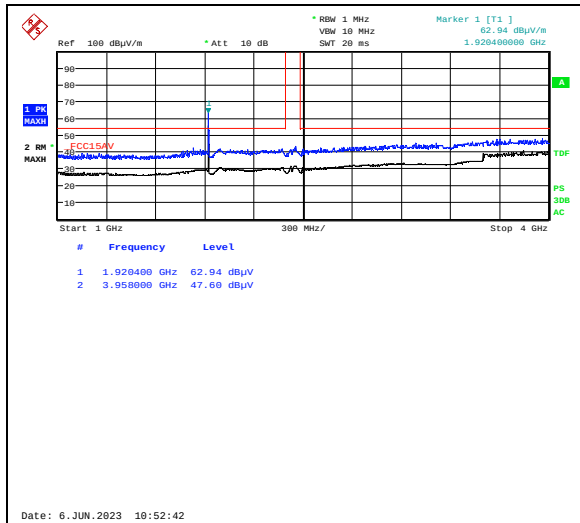


Radiated Emissions 1 - 4 GHz, DECT Ch02 Ant 1 + BT Ch39, HP

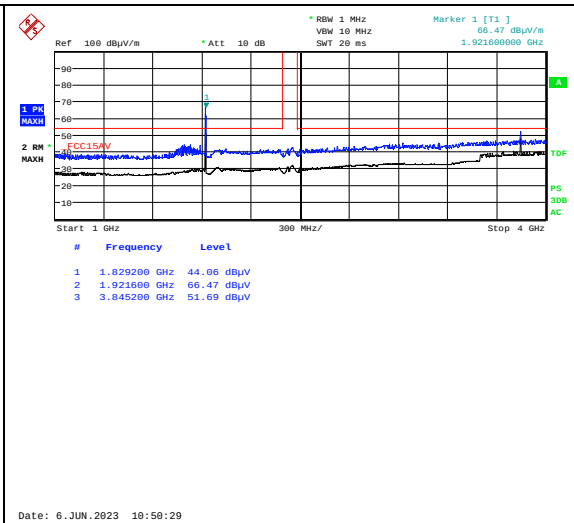

VP

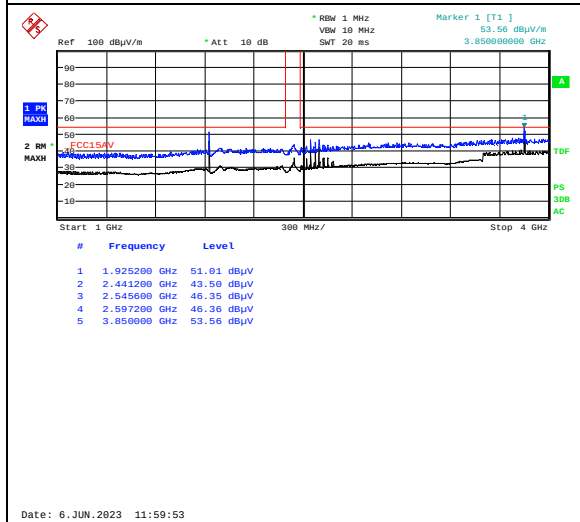

Radiated Emissions 1 - 4 GHz, DECT Ch02 Ant 2 + BT Ch39, HP

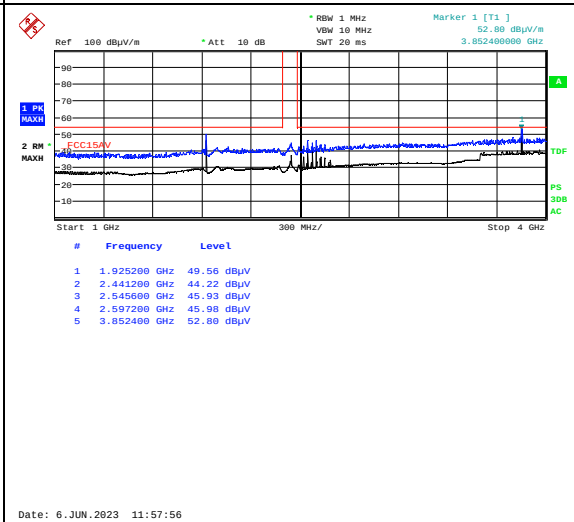

VP

4 Measurement Uncertainty

Measurement Uncertainty Values		
Test Item		Uncertainty
Output Power		±0.5 dB
Power Spectral Density		±0.5 dB
Out of Band Emissions, Conducted	< 3.6 GHz	±0.6 dB
	> 3.6 GHz	±0.9 dB
Spurious Emissions, Radiated	< 1 GHz	±2.5 dB
	> 1 GHz	±2.2 dB
Emission Bandwidth		±4 %
Power Line Conducted Emissions		+2.9 / -4.1 dB
Spectrum Mask Measurements	Frequency	±5 %
	Amplitude	±1.0 dB
Frequency Error		±0.6 ppm
Temperature Uncertainty		±1 °C

All uncertainty values are expanded standard uncertainty to give a confidence level of 95%, based on coverage factor k=2

5 LIST OF TEST EQUIPMENT

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment and ancillaries are identified (numbered) by the Test Laboratory.


No.	Model number	Description	Manufacturer	Ref. no.	Cal. date	Cal. Due
1	FSU26	Spectrum Analyzer	Rohde & Schwarz	LR 1504	2022-01	2024-01
2	6810.17B	Attenuator	Suhner	LR 1669	2019-07 2022-08	2020-07 2023-08
3	ESU40	Measuring Receiver	Rohde & Schwarz	LR 1639	2023-01	2024-01
4	8449A	Pre-amplifier	Hewlett Packard	LR 1322	2022-08	2023-08
5	3115	Horn Antenna	EMCO	LR 1226	2022-12	2027-12
6	3117-PA	Horn Antenna +PreAmp	EMCO	LR 1717	2022-08	2023-08
7	JB3	BiLog Antenna	Sunol	N-4525	2023-04	2026-04
8	310	Preamplifier	Sonoma Inst.	LR 1686	2022-08	2023-08
9	638	Antenna Horn	Narda	LR 1480	N/A	
10	NO324415	Band Reject Filter (2.4GHz)	Microwave Circuits	LR 1760	COU	
11	WLK5-1100-1485-7000-40SS	Low Pass Filter	Wainwright Inst.	LR 1761	COU	
12	ESCI3	Measuring Receiver	Rohde & Schwarz	N-4259	2021-10	2023-10
13	ENV216	Two Line V-Network	Rohde & Schwarz	LR 1665	2021-12	2023-12
14	6812B	AC Power Source	Agilent	LR 1515	2022-11	2024-11
15	ST18/SMA/N/36	RF Cable	Suhner	LR 1627	COU	

The software listed below has been used for one or more tests.


No.	Manufacturer	Name	Version	Comment
1	Rohde & Schwarz	EMC32	10.50.40	EMC test software
2	Nemko AS	RSPlot	1.0.8.0	Screen capture from R&S Spectrum Analyzers

6 BLOCK DIAGRAM

6.1 Power Line Conducted Emission

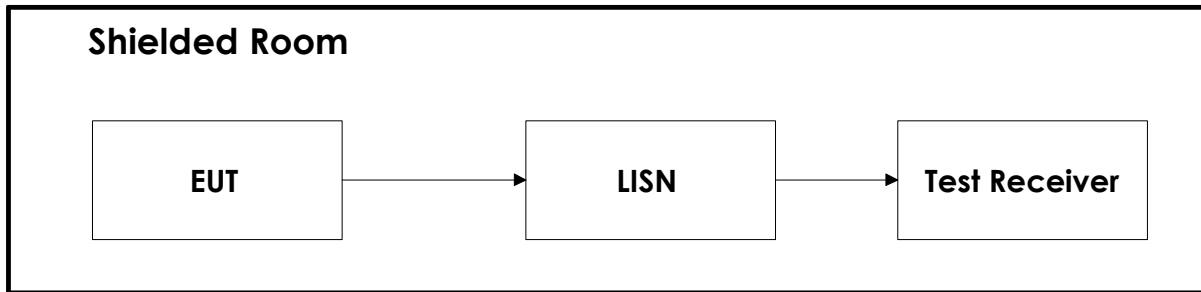

6.2 Test Site Radiated Emission

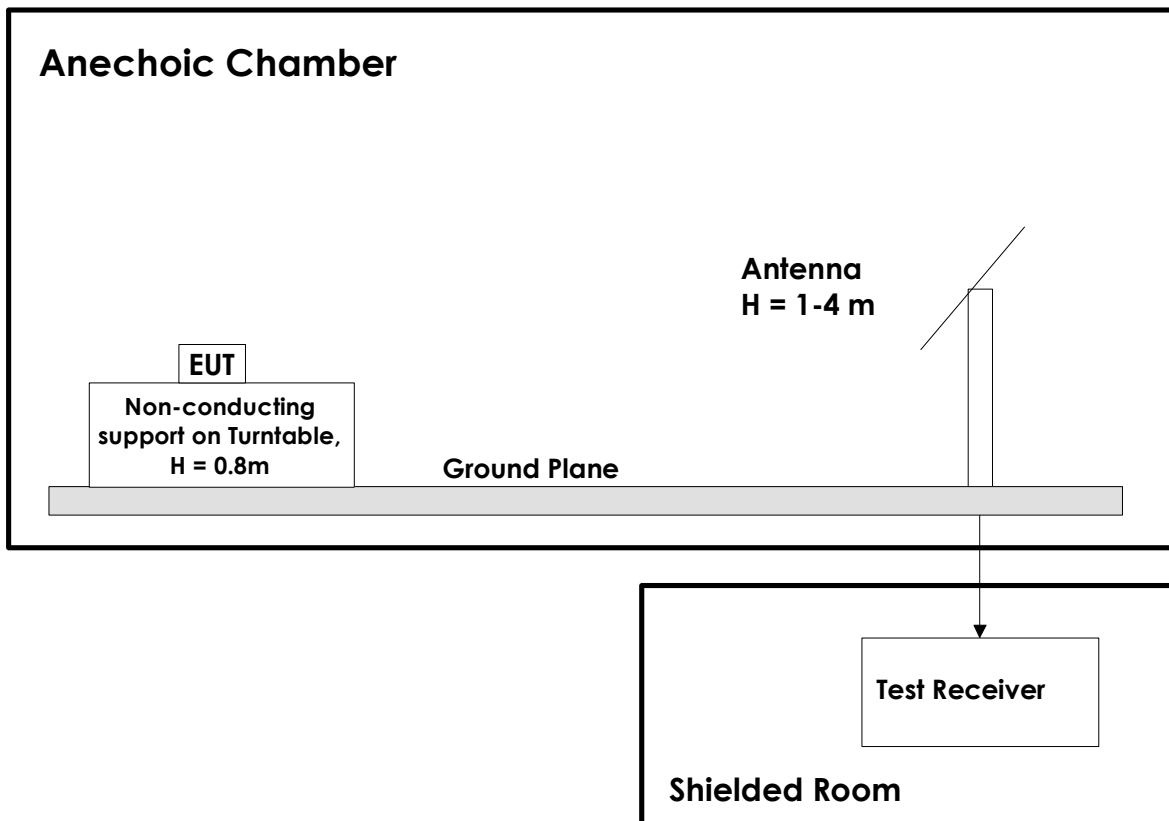

This test setup is used for all radiated emissions tests. For frequencies below 30 MHz the measuring distance is 10m, for all other frequencies it is 3m or 1m. Emissions above 1 GHz are measured with a Spectrum Analyzer and Horn Antenna. For measurements above 18 GHz the test receiver is moved inside the anechoic chamber and located next to the antenna to minimize the cable loss. All measurements at 1GHz and above were performed with turntable height 1.5m and with the ground plane covered by absorbers. A pre-amplifier is used for all measurements above 30 MHz, and High-Pass or Band-Pass filter is used for all harmonics.