



## SAR EVALUATION REPORT

**Report No. : 25IE0108-HO-3A**

**Applicant** : Panasonic Communications Co., Ltd  
**Type of Equipment** : Portable Unit  
**Model No.** : KX-THA11  
**FCC ID** : ACJ96NKX-TH102  
**Test standard** : FCC47CFR 2.1093  
FCC OET Bulletin 65, Supplement C  
**Test Result** : Complied  
**Max SAR Measured** : Head 0.429W/kg ( 2480MHz)  
Body 0.427W/kg ( 2480MHz)

1. This test report shall not be reproduced except full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with above regulation. We hereby certify that the data contain a true representation of the SAR profile.
4. The test results in this test report are traceable to the national or international standards.

**Date of test** : May 17 and 30, 2005

**Tested by** :

Miyo Ikuta  
Head Office EMC Lab.

**Approved by** :

Tetsuo Maeno  
Site Manager of Head Office EMC lab.

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

**CONTENTS**

	<b>PAGE</b>
<b>SECTION 1 : Client information .....</b>	<b>3</b>
<b>SECTION 2 : Equipment under test (E.U.T.).....</b>	<b>3</b>
<b>SECTION 3 : Requirements for compliance testing defined by the FCC .....</b>	<b>6</b>
<b>SECTION 4 : Dosimetry assessment setup.....</b>	<b>6</b>
<b>SECTION 5 : Test system specifications .....</b>	<b>10</b>
<b>SECTION 6 : Test setup of EUT .....</b>	<b>11</b>
<b>SECTION 7 : Measurement uncertainty.....</b>	<b>15</b>
<b>SECTION 8 : Simulated tissue liquid parameter .....</b>	<b>16</b>
<b>SECTION 9 : System validation data .....</b>	<b>17</b>
<b>SECTION 10 : Evaluation procedure.....</b>	<b>18</b>
<b>SECTION 11 : Exposure limit.....</b>	<b>19</b>
<b>SECTION 12 : Output power Measurement results .....</b>	<b>20</b>
<b>SECTION 13 : Measurement results .....</b>	<b>21</b>
<b>SECTION 14 : Equipment &amp; calibration information.....</b>	<b>23</b>
<b>SECTION 15 : References .....</b>	<b>24</b>
<b>APPENDIX 1 : Photographs of test setup .....</b>	<b>25</b>
<b>APPENDIX 2 : SAR Measurement data of Head .....</b>	<b>31</b>
<b>APPENDIX 3 : SAR Measurement data of Body .....</b>	<b>51</b>
<b>APPENDIX 4 : Validation Measurement data.....</b>	<b>61</b>
<b>APPENDIX 5 : System Validation Dipole (D2450V2,S/N: 713) .....</b>	<b>64</b>
<b>APPENDIX 6 : Dosimetric E-Field Probe Calibration (ET3DV6,S/N: 1684) .....</b>	<b>74</b>

**SECTION 1 : Client information**

Company Name : Panasonic Communications Co., Ltd.  
Brand Name : Panasonic  
Address : 1-62, 4-chome, Minoshima, Hakata-ku, Fukuoka, 812-8531 Japan  
Telephone Number : +81-92-477-1405  
Facsimile Number : +81-92-477-1487  
Contact Person : Kunihiko Nawata

---

## **SECTION 2 : Equipment under test (E.U.T.)**

Type of Equipment	: Portable Unit
Model No.	: KX-THA11
Serial No.	: 0080F08011CA
Country of Manufacture	: Japan
Receipt Date of Sample	: May 16, 2005
Condition of EUT	: Engineering prototype (Not for sale: This sample is equivalent to mass-produced items.)
Rating	: DC3.6V(Battery)
Size of EUT(L*W*H)	: 155*45*28
Battery option	: Only one type Ni-MH Battery DC3.6V / 830mA.h.
Accessories	: Belt-clip and Headset
Category Identified	: Portable device



### **Belt-clip**



### **Head set**



---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124



### **SECTION 3 : Requirements for compliance testing defined by the FCC**


The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1992. According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

- 1 Specific Absorption Rate (SAR) is a measure of the rate of energy absorption due to exposure to an RF transmitting source (wireless portable device).
- 2 IEEE/ANSI Std. C95.1-1992 limits are used to determine compliance with FCC ET Docket 93-62.

### **SECTION 4 : Dosimetry assessment setup**

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9 m), which positions the probes with a positional repeatability of better than +/- 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetry probe ET3DV6, SN: 1684 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in [2] with accuracy of better than +/-10%. The spherical isotropy was evaluated with the procedure described in [3] and found to be better than +/-0.25 dB. The phantom used was the SAM Twin Phantom as described in FCC supplement C, IEEE P1528 and CENELEC EN50361.

#### 4.1 Configuration and peripherals

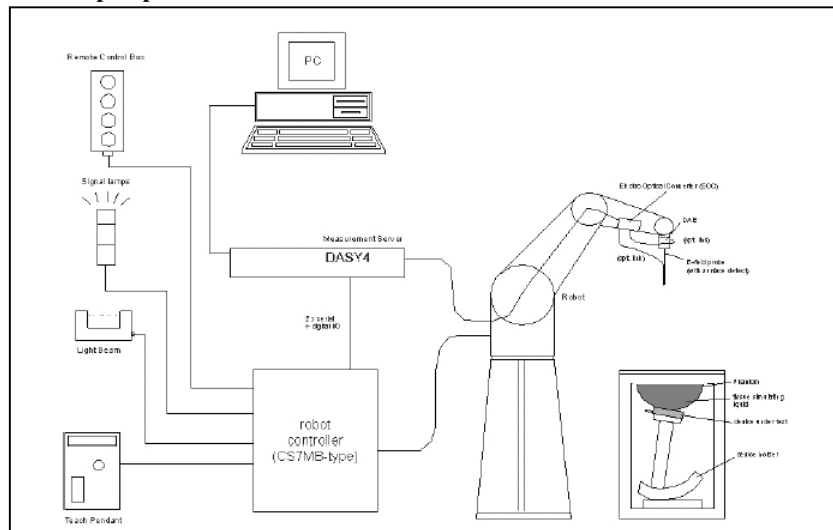

The DASYS4 system for performing compliance tests consist of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software.  
An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE), which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection.  
The EOC is connected to the measurement server.
5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
7. A computer operating Windows 2000.
8. DASYS4 software.
9. Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.
10. The SAM twin phantom enabling testing left-hand and right-hand usage.
11. The device holder for handheld mobile phones.
12. Tissue simulating liquid mixed according to the given recipes.
13. Validation dipole kits allowing to validate the proper functioning of the system.

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## 4.2 System components

### 4.2.1 ET3DV6 Probe Specification

#### Construction:

Symmetrical design with triangular core  
Built-in optical fiber for surface detection System  
Built-in shielding against static charges  
PEEK enclosure material (resistant to organic solvents, e.g., glycol ether)

#### Calibration:

Basic Broad Band calibration in air from 10 MHz to 2.5 GHz  
In brain and muscle simulating tissue at  
Frequencies of 450 MHz, 900 MHz, 1.8 GHz and 2.45GHz (accuracy +/-8%)

#### Frequency:

10 MHz to 3GHz; Linearity: +/-0.2 dB  
(30 MHz to 3 GHz)

#### Directivity:

+/-0.2 dB in brain tissue (rotation around probe axis)  
+/-0.4 dB in brain tissue (rotation normal probe axis)

#### Dynamic Range:

5 mW/g to > 100 mW/g; Linearity: +/-0.2 dB

#### Optical Surface Detection:


+/-0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces.

#### Dimensions:

Overall length: 330 mm (Tip: 16 mm)  
Tip length: 16 mm  
Body diameter: 12 mm (Body: 12 mm)  
Tip diameter: 6.8 mm  
Distance from probe tip to dipole centers: 2.7 mm

#### Application:

General dosimetric up to 3 GHz  
Compliance tests of mobile phones  
Fast automatic scanning in arbitrary phantoms

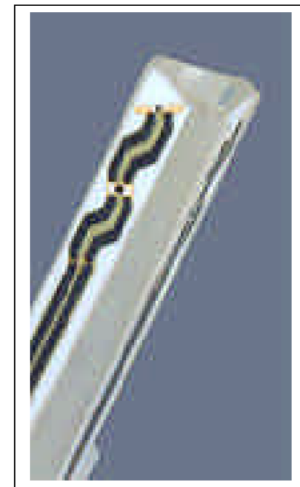

Inside view of  
ET3DV6 E-field Probe

#### 4.2.2 SAM Phantom

##### **Construction:**

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC EN50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

##### **Shell Thickness:**


2 +/-0.2 mm

##### **Filling Volume:**

Approx. 25 liters

##### **Dimensions:**

(H x L x W): 810 x 1000 x 500 mm

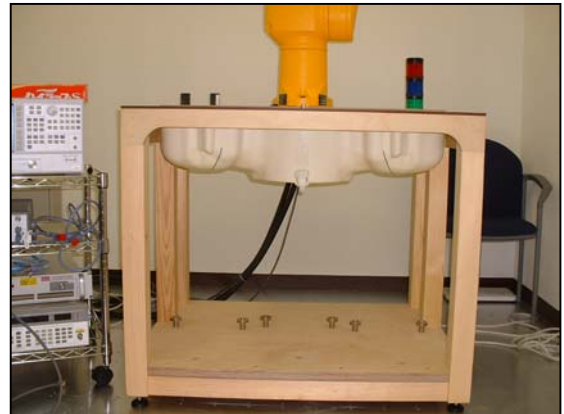

**SAM Phantom**

#### 4.2.3 Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0, the Mounting Device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

\* Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configurations. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.



**Device Holder**

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

## **SECTION 5 : Test system specifications**

### **Robot RX60L**

Number of Axes	:	6
Payload	:	1.6 kg
Reach	:	800mm
Repeatability	:	+/-0.025mm
Control Unit	:	CS7M
Programming Language	:	V+
Manufacture	:	Stäubli Unimation Corp. Robot Model: RX60

### **DASY4 Measurement sever**

Features	:	166MHz low power Pentium MMX 32MB chipdisk and 64MB RAM Serial link to DAE (with watchdog supervision) 16 Bit A/D converter for surface detection system Two serial links to robot (one for real-time communication which is supervised by watchdog) Ethernet link to PC (with watchdog supervision) Emergency stop relay for robot safety chainTwo expansion slots for future applications
Manufacture	:	Schimid & Partner Engineering AG

### **Data Acquisition Electronic (DAE)**

Features	:	Signal amplifier, multiplexer, A/D converter and control logic Serial optical link for communication with DASY4 embedded system (fully remote controlled) 2 step probe touch detector for mechanical surface detection and emergency robot stop (not in -R version)
Measurement Range	:	1 $\mu$ V to > 200 mV (16 bit resolution and two range settings: 4mV, 400mV)
Input Offset voltage	:	< 1 $\mu$ V (with auto zero)
Input Resistance	:	200 M $\Omega$
Battery Power	:	> 10 h of operation (with two 9 V battery)
Dimension	:	60 x 60 x 68 mm
Manufacture	:	Schimid & Partner Engineering AG

### **Software**

Item	:	Dosimetric Assesment System DASY4
Type No.	:	SD 000 401A, SD 000 402A
Software version No.	:	4.5
Manufacture / Origin	:	Schimid & Partner Engineering AG

### **E-Field Probe**

Model	:	ET3DV6
Serial No.	:	1684
Construction	:	Triangular core fiber optic detection system
Frequency	:	10 MHz to 6 GHz
Linearity	:	+/-0.2 dB (30 MHz to 3 GHz)
Manufacture	:	Schimid & Partner Engineering AG

### **Phantom**

Type	:	SAM Twin Phantom V4.0
Shell Material	:	Fiberglass
Thickness	:	2.0 +/-0.2 mm
Volume	:	Approx. 25 liters
Manufacture	:	Schimid & Partner Engineering AG

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## SECTION 6 : Test setup of EUT


### 6.1 Description of the head test setup

According to the OET 65 and IEEE1528, this EUT was tested on the “Cheek/Touch” and “Ear/Tilt” positions at the left head and right head section of the SAM phantom.

#### 6.1.1 Initial ear position

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom.

The device should be positioned parallel to the “N-F” line defined along the base of the ear spacer that contains the “ear reference point”. The “test device reference point” is aligned to the “ear reference point” on the head phantom and the “vertical centerline” is aligned to the “phantom reference plane”.

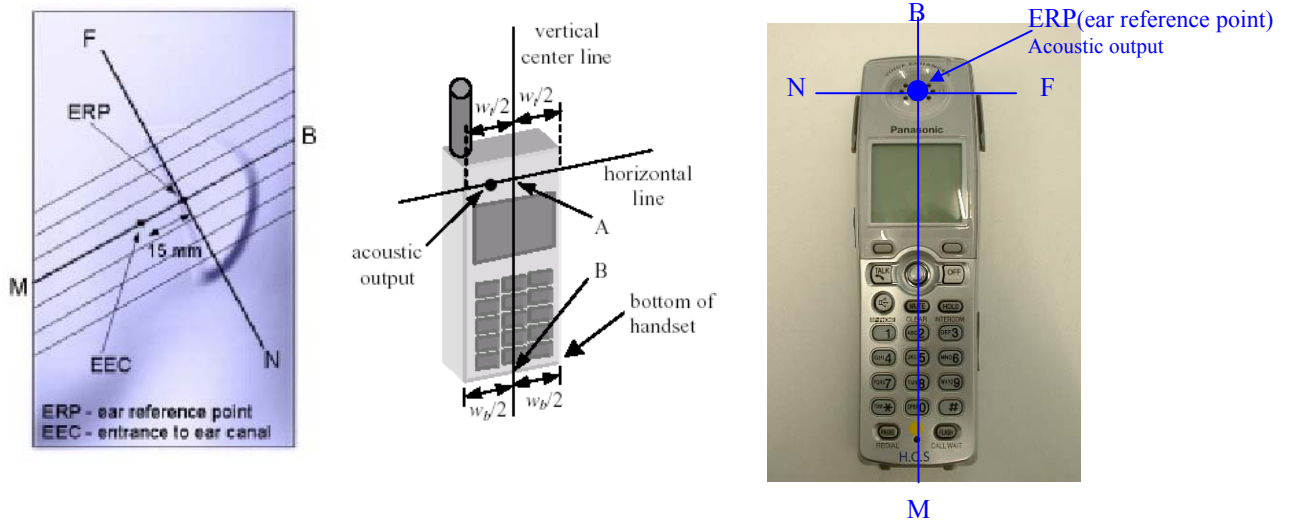


l

#### 6.1.2 Cheek position

The device is brought toward the mouth of the head phantom by pivoting against the “ear reference point” or along the “N-F” line.

This test position is established:

- i) When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.
- ii) (or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

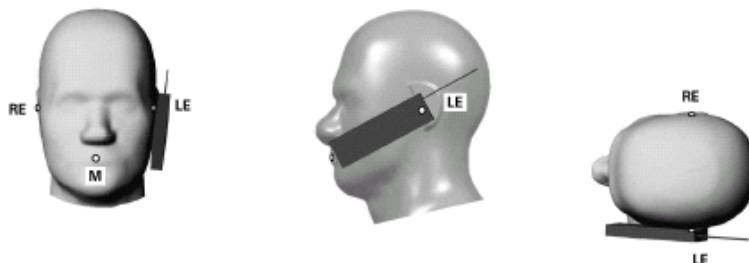

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

### 6.1.3 Tilt position

If the earpiece of the handset is not in full contact with the phantom's ear spacer and the peak SAR location for the "Cheek/Touch" position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the "initial ear position" by rotating it away from the mouth until the earpiece is in full contact with the ear spacer. Otherwise the handset should be moved away from the cheek perpendicular to the line passes through both "ear reference points" for approximate 2-3 cm. While it is in this position, the handset is tilted away from the mouth with respect to the "test device reference point" by 15°. After the tilt, it is then moved back toward the head perpendicular to the line passes through both "ear reference points" until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously.



### 6.1.4 Antenna position

The antenna of this EUT was built-in antenna.

### 6.1.5 Method of measurement (Head SAR)

Step1. The searching for the worst position

This test was performed at the worst position of Step1.

Step2. The changing to the Low and High channels

The test was performed at the worst conditions of Step1.

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## 6.2 Description of the Body-worn test setup

This EUT was tested on the “ Back” position at the flat section of SAM phantom.  
The tests were performed in the EUT with the belt-clip and headset on the following conditions.

### Back Position



### 6.3 EUT Tune-up procedure

This EUT has Mode1 and Mode2

The frequency range and the modulation in each mode were used are shown as the following.

#### Mode 1

Antenna : Whip antenna  
TX Frequency : 2402-2480MHz  
Channel : Low ch(2402MHz),Mid ch(2441MHz),Highch(2480MHz)  
Modulation : FHSS  
Packet size : DH5(Max.)  
Crest factor : 1.2

#### Mode 2

Antenna : Whip antenna(Main antenna) or Chip antenna(Sub antenna)  
TX Frequency : 2402-2480MHz  
Channel : Low ch(2402MHz),Mid ch(2440MHz),High ch(2480MHz)  
Modulation : FHSS  
Packet size : DH5(Max.)  
Crest factor : 1.2

## **SECTION 7 : Measurement uncertainty**

The uncertainty budget has been determined for the DASY4 measurement system according to the SPEAG documents [7] and is given in the following Table.

Error Description	Uncertainty value $\pm$ %	Probability distribution	divisor	(ci) 1g	Standard Uncertainty (1g)	vi or veff
<b>Measurement System</b>						
Probe calibration	$\pm 4.8$	Normal	1	1	$\pm 4.8$	$\infty$
Axial isotropy of the probe	$\pm 4.7$	Rectangular	$\sqrt{3}$	$(1-c_p)^{1/2}$	$\pm 1.9$	$\infty$
Spherical isotropy of the probe	$\pm 9.6$	Rectangular	$\sqrt{3}$	$(c_p)^{1/2}$	$\pm 3.9$	$\infty$
Boundary effects	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	$\pm 0.6$	$\infty$
Probe linearity	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.7$	$\infty$
Detection limit	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	$\pm 0.6$	$\infty$
Readout electronics	$\pm 1.0$	Normal	1	1	$\pm 1.0$	$\infty$
Response time	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.5$	$\infty$
Integration time	$\pm 2.6$	Rectangular	$\sqrt{3}$	1	$\pm 1.5$	$\infty$
RF ambient conditions	$\pm 3.0$	Rectangular	$\sqrt{3}$	1	$\pm 1.7$	$\infty$
Mech. constraints of robot	$\pm 0.4$	Rectangular	$\sqrt{3}$	1	$\pm 0.2$	$\infty$
Probe positioning	$\pm 2.9$	Rectangular	$\sqrt{3}$	1	$\pm 1.7$	$\infty$
Extrap. and integration	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	$\pm 0.6$	$\infty$
<b>Test Sample Related</b>						
Device positioning	$\pm 2.9$	Rectangular	$\sqrt{3}$	1	$\pm 2.9$	26
Device holder uncertainty	$\pm 3.6$	Rectangular	$\sqrt{3}$	1	$\pm 3.6$	4
Power drift	$\pm 10.0$	Rectangular	$\sqrt{3}$	1	$\pm 5.8$	$\infty$
<b>Phantom and Setup</b>						
Phantom uncertainty	$\pm 4.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.3$	$\infty$
Liquid conductivity (target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.64	$\pm 1.8$	$\infty$
Liquid conductivity (meas.)	$\pm 5.0$	Normal	1	0.64	$\pm 3.2$	$\infty$
Liquid permittivity (target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.6	$\pm 1.7$	$\infty$
Liquid permittivity (meas.)	$\pm 5.0$	Normal	1	0.6	$\pm 3.0$	$\infty$
<b>Combined Standard Uncertainty</b>					<b><math>\pm 12.075</math></b>	
<b>Expanded Uncertainty (k=2)</b>					<b><math>\pm 24.1</math></b>	

The result of some test showed that the power drift has exceeded 5%. Therefore, the uncertainty of power drift expanded to 10%. However, the extended uncertainty (k= 2) of a test is less than 30%.

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## **SECTION 8 : Simulated tissue liquid parameter**

### **8.1 Simulated Tissue Liquid Parameter confirmation**

The dielectric parameters were checked prior to assessment using the HP85070D dielectric probe kit.  
The dielectric parameters measurement are reported in each correspondent section.

#### **8.2 Head 2450MHz**

Type of liquid : **Head 2450 MHz**  
Ambient temperature (deg.c) : **25.0 (May 17),24.8(May 30)**  
Relative Humidity (%) : **53(May 17),58(May 30)**  
Liquid depth (cm) : **15.2**

Measured By : Miyo Ikuta

<b>DIELECTRIC PARAMETERS MEASUREMENT RESULTS</b>							
Date	Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
	Before	After					
17-May	24.3	24.3	Relative Permittivity $\epsilon_r$	39.2	37.8	-3.6	+/-5
			Conductivity $\sigma$ [mho/m]	1.80	1.86	3.3	+/-5
30-May	24.3	24.3	Relative Permittivity $\epsilon_r$	39.2	38.0	-3.1	+/-5
			Conductivity $\sigma$ [mho/m]	1.80	1.88	4.4	+/-5

#### **8.3 Muscle 2450MHz**

Type of liquid : **Muscle 2450 MHz**  
Ambient temperature (deg.c) : **25.0 (May 17),24.8(May 30)**  
Relative Humidity (%) : **53(May 17),58(May 30)**  
Liquid depth (cm) : **15.2**

Measured By : Miyo Ikuta

<b>DIELECTRIC PARAMETERS MEASUREMENT RESULTS</b>							
Date	Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
	Before	After					
30-May	24.0	24.0	Relative Permittivity $\epsilon_r$	52.7	50.5	-4.2	+/-5
			Conductivity $\sigma$ [mho/m]	1.95	2.00	2.6	+/-5

#### **8.4 Simulated Tissues**

Ingredient	MIXTURE(%)	
	Head 2450MHz	Muscle 2450MHz
Water	45.0	69.83
DGMBE	55.0	30.17

Note:DGMBE(Diethyleneglycol-monobuthyl ether)

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## SECTION 9 : System validation data


Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of +/-10%. The validation results are in the table below. Please refer to APPENDIX 5.

Type of liquid : **HEAD 2450MHz**  
Frequency : **2450MHz**  
Dipole : **D2450V2 SN:713**  
Liquid depth (cm) : **15.2**  
Ambient temperature (deg.c.) : **25.0 (May 17),24.8(May 30)**  
Relative Humidity (%) : **53(May 17),58(May 30)**  
Power : **250mW**

Measured By : Miyo Ikuta

SYSTEM PERFORMANCE CHECK										
Date	Liquid (HEAD 2450MHz)						System dipole validation target & measured			
	Liquid Temp [deg.c.]		Relative Permittivity $\epsilon_r$		Conductivity $\sigma$ [mho/m]		SAR 1g [W/kg]		Deviation [%]	Limit [%]
	Before	After	Target	Measured	Target	Measured	Target	Measured		
17-May	24.3	24.3	39.2	37.8	1.80	1.86	13.1	14.0	6.9	+/-10
30-May	24.3	24.3	39.2	38.0	1.80	1.88	13.1	14.2	8.4	+/-10

Note: Please refer to Attachment for the result representation in plot format

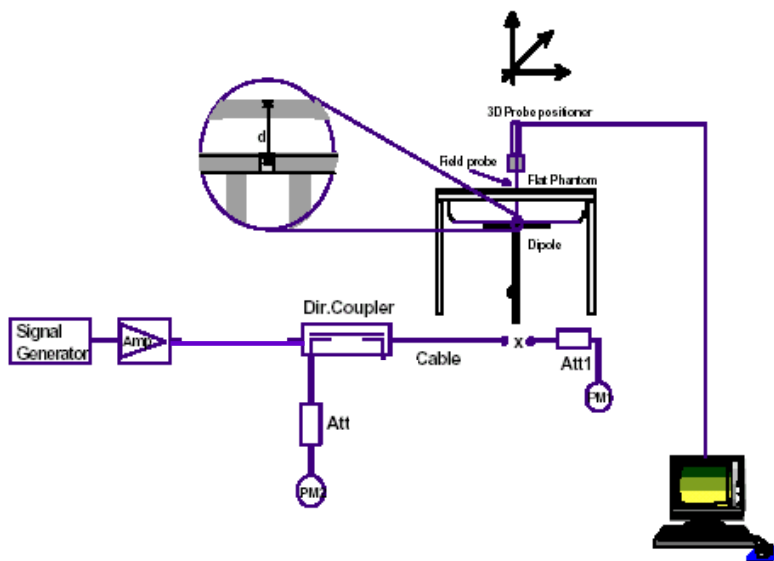

2450MHz System performance check setup

Test system for the system performance check setup diagram

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## **SECTION 10 : Evaluation procedure**

**The evaluation was performed with the following procedure:**

**Step 1:** Measurement of the E-field at a fixed location above the ear point or central position of flat phantom was used as a reference value for assessing the power drop of Step 4

**Step 2:** The SAR distribution at the exposed side of head or body position was measured at a distance of each device from the inner surface of the shell. The area covered the entire dimension of the EUT and the horizontal grid spacing was 20 mm x 20 mm. Based on these data, the area of the maximum absorption was determined by spline interpolation.

**Step 3:** Around this point found in the Step 2 (area scan) , a volume of 32 mm x 32 mm x 30 mm was assessed by measuring 5 x 5 x 7 points. And for any secondary peaks found in the Step2 which are within 2dB of maximum peak and not with this Step3 (Zoom scan) is repeated. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

1. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm [4]. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
2. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x, y and z-directions) [4], [5]. The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
3. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

**Step 4:** Re-measurement of the E-field at the same location as in Step 1.

---

## **SECTION 11 : Exposure limit**

### (A) Limits for Occupational/Controlled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.4	8.0	20.0

### (B) Limits for General population/Uncontrolled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.08	1.6	4.0

**Occupational/Controlled Environments:** are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

**General Population/Uncontrolled Environments:** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

<p style="text-align: center;"><b>NOTE:GENERAL POPULATION/UNCONTROLLED EXPOSURE SPATIAL PEAK(averaged over any 1g of tissue) LIMIT 1.6 W/kg</b></p>
---

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## **SECTION 12 : Output Power Measurement results**

### **Out power measurement method**

The Output power has been measured in a Semi Anechoic Chamber with a ground plane and at a distance of 3m. The height of the measuring varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the output power.

The measurements were performed for both vertical and horizontal antenna polarization with the Spectrum Analyzer.

### **Spectrum Analyzer setting**

Mode1: Resolution bandwidth set to 1MHz and Video bandwidth to 3MHz.

Mode2: Resolution bandwidth set to 3MHz and Video bandwidth to 10MHz.

### **Calculation of result**

E-field [dB $\mu$ V/m]= Reading (S/A) + Factor (Measurement equipment)

E-field [dB $\mu$ V/m] was converted into E[V/m]

EIRP[dBm] =  $10\log\left(\frac{(E \cdot d)^2}{30G}\right) \cdot 10^3$  ; d= 3[m], G=1

<b>[Model ]</b>			
Ch	Freq.	E-field	EIRP
	[MHz]	[dB $\mu$ V/m]	[dBm]
Low	2402	110.6	15.4
Mid	2441	111.7	16.5
High	2480	111.8	16.6

<b>[Mode2 ] Main antenna*</b>			
Ch	Freq.	E-field	EIRP
	[MHz]	[dB $\mu$ V/m]	[dBm]
Low	2402	114.6	19.4
Mid	2440	115.7	20.5
High	2480	116.6	21.4

\*The tested antenna was main antenna because its output power level is higher than that of sub antenna.

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## SECTION 13 : Measurement results

### 13.1 Head 2450MHz SAR

Liquid Depth (cm) : 15.2  
Parameters :  $\epsilon_r = 38.0, \sigma = 1.88$   
Ambient Temperature[deg.c.] : 24.8  
Relative Humidity (%) : 58

Model : KX-THA11  
Serial No. : 0080F08011CA  
Modulation : FHSS  
Crest factor : 1.2

Date : May 30,2005  
Measured By : Miyo Ikuta

HEAD SAR MEASUREMENT RESULTS										
Mode	Frequency		Packet	Phantom Section	EUT Set-up Conditions		Liquid Temp.[deg.c]		SAR(1g)	
	Channel	[MHz]			Antenna	Setup position	Before	After	[W/kg] Maximum value of multi-peak	
Mode 1	<b>Position seach</b>									
	Mid	2441	DH5	Left	-	Cheek	24.3	24.3	<b>0.104</b>	
	Mid	2441	DH5	Left	-	Tilt	24.3	24.3	<b>0.092</b>	
	Mid	2441	DH5	Right	-	Cheek	24.6	24.7	<b>0.118</b>	
	Mid	2441	DH5	Right	-	Tilt	24.6	24.6	<b>0.115</b>	
	<b>Frequency Change</b>									
	Low	2402	DH5	Right	-	Cheek	24.5	24.4	<b>0.122</b>	
	High	2480	DH5	Right	-	Cheek	24.5	24.5	<b>0.120</b>	
	Mode 2	<b>Position seach</b>								
		Mid	2440	DH5	Left	Main	Cheek	24.3	24.3	<b>0.295</b>
Mid		2440	DH5	Left	Main	Tilt	24.3	24.3	<b>0.338</b>	
Mid		2440	DH5	Right	Main	Cheek	24.5	24.5	<b>0.277</b>	
Mid		2440	DH5	Right	Main	Tilt	24.4	24.5	<b>0.297</b>	
<b>Frequency Change</b>										
Low		2402	DH5	Left	Main	Tilt	24.3	24.3	<b>0.217</b>	
High		2480	DH5	Left	Main	Tilt	24.3	24.3	<b>0.429</b>	
<b>Position seach</b>										
Mid		2440	DH5	Left	Sub	Cheek	24.4	24.4	<b>0.239</b>	
Mid		2440	DH5	Left	Sub	Tilt	24.4	24.5	<b>0.233</b>	
Mid		2440	DH5	Right	Sub	Cheek	24.5	24.6	<b>0.219</b>	
Mid		2440	DH5	Right	Sub	Tilt	24.6	24.6	<b>0.215</b>	
<b>Frequency Change</b>										
Low		2402	DH5	Left	Sub	Cheek	24.5	24.5	<b>0.152</b>	
High		2480	DH5	Left	Sub	Cheek	24.5	24.5	<b>0.218</b>	
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>							<b>Body SAR: 1.6 W/kg</b>			
<b>Spatial Peak Uncontrolled Exposure / General Population</b>							<b>(averaged over 1 gram)</b>			

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

### 13.2 Body 2450MHz SAR

Liquid Depth (cm) : 15.2  
Parameters :  $\epsilon_r = 50.5, \sigma = 2.00$   
Ambient Temperature[deg.c.] : 25.0  
Relative Humidity (%) : 53

Model : KX-THA11  
Serial No. : 0080F08011CA  
Modulation : FHSS  
Crest factor : 1.2

Date : May 17, 2005  
Measured By : Miyo Ikuta

BODY SAR MEASUREMENT RESULTS										
Mode	Frequency		Packet	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g)
	Channel	[MHz]			Antenna	Setup position	Separation [mm]	Before	After	Maximum value of multi-peak
<b>Mode 1</b>	Low	2402	DH5	Flat	-	Back	0	24.0	24.0	<b>0.114</b>
	Mid	2441	DH5	Flat	-	Back	0	24.2	24.2	<b>0.173</b>
	High	2480	DH5	Flat	-	Back	0	24.3	24.3	<b>0.130</b>
<b>Mode 2</b>	Low	2402	DH5	Flat	Main	Back	0	24.0	24.0	<b>0.224</b>
	Mid	2440	DH5	Flat	Main	Back	0	24.1	24.1	<b>0.256</b>
	High	2480	DH5	Flat	Main	Back	0	24.1	24.1	<b>0.427</b>
	Low	2402	DH5	Flat	Sub	Back	0	24.0	24.0	<b>0.087</b>
	Mid	2440	DH5	Flat	Sub	Back	0	24.3	24.3	<b>0.099</b>
	High	2480	DH5	Flat	Sub	Back	0	23.9	23.9	<b>0.080</b>
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>								<b>Body SAR: 1.6 W/kg</b>		
<b>Spatial Peak Uncontrolled Exposure / General Population</b>								<b>(averaged over 1 gram)</b>		

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## **SECTION 14 : Equipment & calibration information**

Name of Equipment	Manufacture	Model number	Serial number	Calibration	
				Last Cal	due date
Microwave Cable	Storm	421-011(90-1394-079)	01-12-001	2005/01/05	2006/01/04
Microwave Cable	Suhner	SUCOFLEX	233550/4	2005/02/03	2006/02/02
Pre Amplifier	Agilent	8449B	3008A01671	2005/02/05	2006/02/04
Horn Antenna	Schwarzbeck	BBHA9120D	258	2005/01/10	2006/01/09
Attenuator(10dB)	HIROSE ELECTRIC CO.,LTD.	AT-110	-	2005/01/11	2006/01/10
Spectrum Analyzer	Advantest	R3273	-	2005/02/21	2006/02/20
Power Meter	Agilent	E4417A	GB41290639	2004/11/09	2005/11/08
Power Sensor	Agilent	E9300B	US40010300	2004/11/15	2005/11/14
Power Sensor	Agilent	E9327A	US40440576	2004/11/23	2005/11/22
S-Parameter Network Analyzer	Agilent	8753ES	US39174808	2003/10/23	2006/10/22
Signal Generator	Rohde&Schwarz	SML40	100023	2005/01/05	2006/01/04
RF Amplifier	OPHIR	5056F	1005	2005/05/20	2006/05/19
Dosimetric E-Field Probe	Schmid&Partner Engineering AG	ET3DV6	1684	2004/09/02	2005/09/01
Data Acquisition Electronics	Schmid&Partner Engineering AG	DAE3	516	2005/03/10	2006/03/09
Robot,SAM Phantom	Schmid&Partner Engineering AG	DASY4	I021834	N/A	N/A
2450MHz System Validation Dipole	Schmid&Partner Engineering AG	D2450V2	713	2004/12/13	2006/12/12
Dual Directional Coupler	N/A	Narda	03702	N/A	N/A
Head 2450MHz	N/A	N/A	N/A	N/A	N/A
Body 2450MHz	N/A	N/A	N/A	N/A	N/A
Ambient Noise <0.012W/kg	SAR room	-	-	2005/5/17 and 30	-

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## **SECTION 15 : References**

- [1] ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [2] Katja Pokovic, Thomas Schmid, and Niels Kuster, "Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM '97, Dubrovnik, October 15-17, 1997, pp. 120-124.
- [3] Katja Pokovic, Thomas Schmid, and Niels Kuster, "E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp.172-175.
- [4] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [5] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992.
- [6] Barry N. Taylor and Christ E. Kuyatt, "Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994.
- [7] SPEAG document Uncertainty document for DASY 4 System from SPEAG(Shimid & Partner Engineering AG).

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116


Facsimile: +81 596 24 8124

## **APPENDIX 1 : Photographs of test setup**

Left head / Cheek

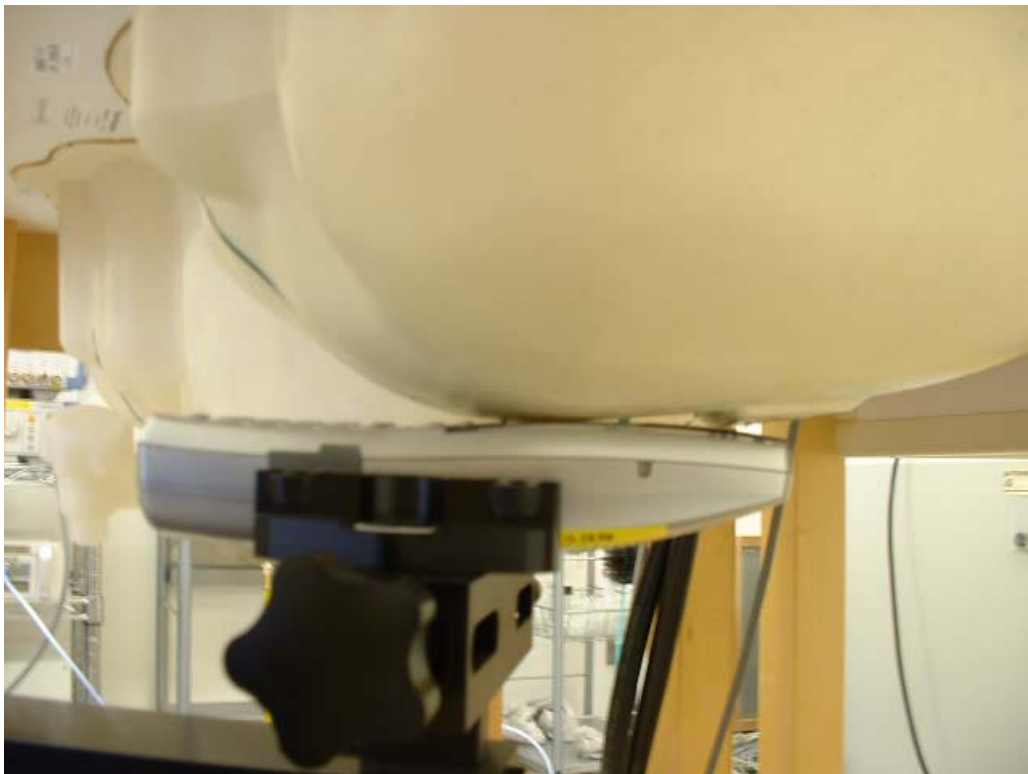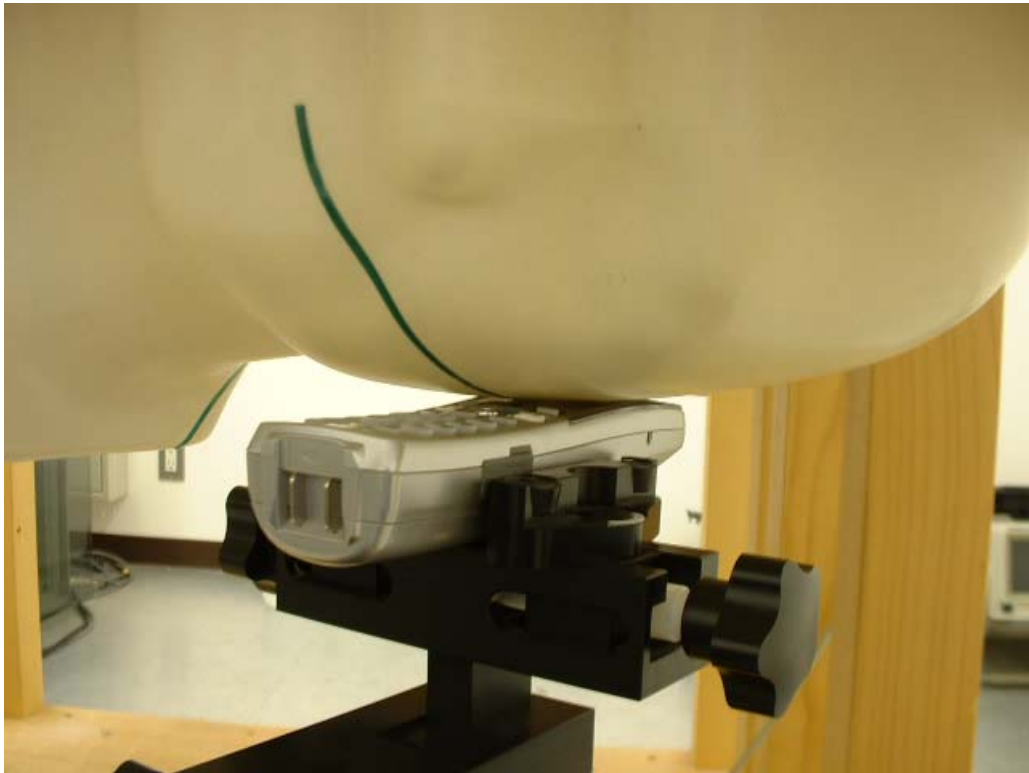


**Left head / Tilt**

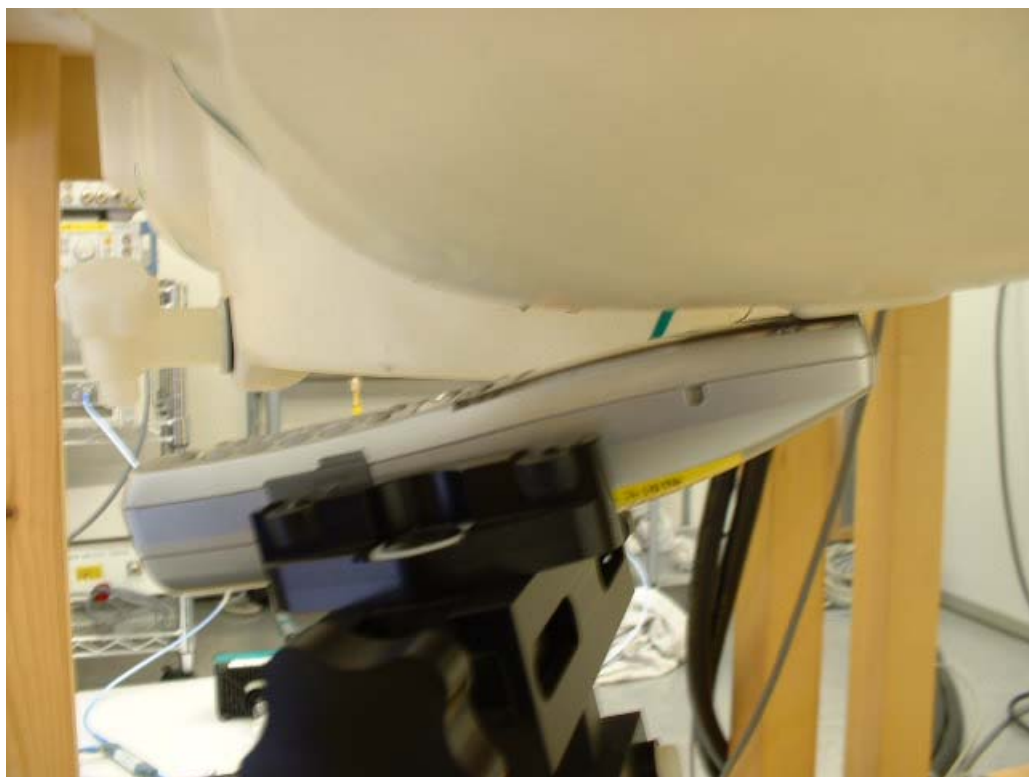

Right head / Cheek



**Right head / Tilt**

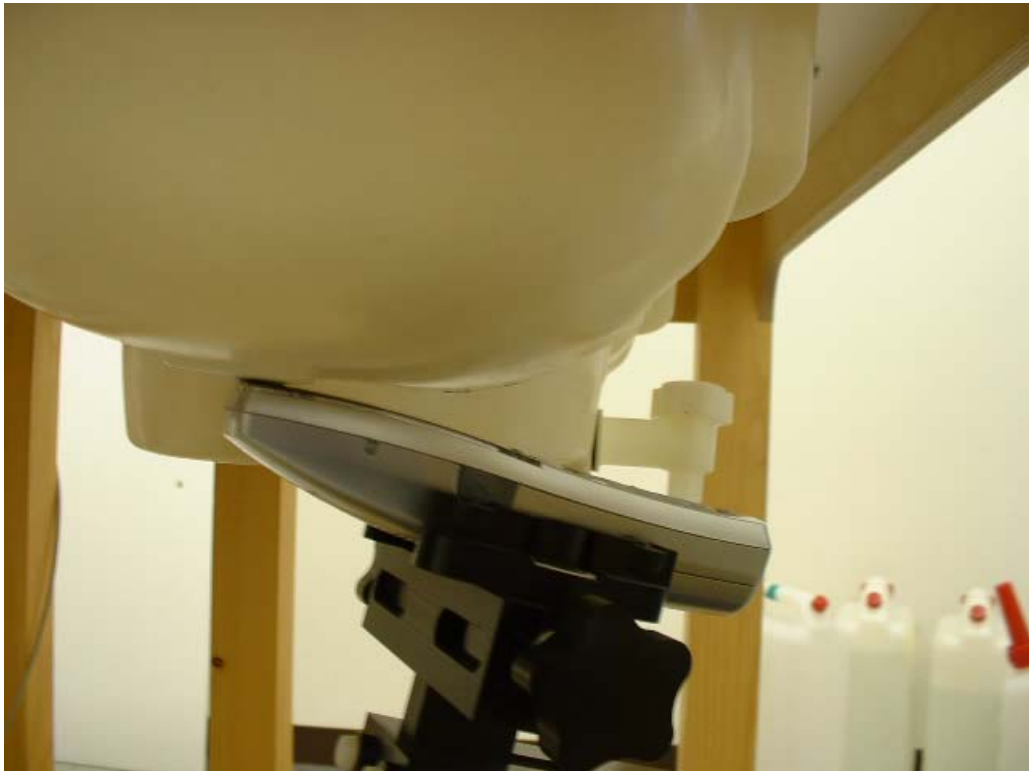

**Body / Back**



## **APPENDIX 2 : SAR Measurement data of Head**

## KX-THA11 (Mode 1) / Left Head / Cheek / 2441MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DAS4 (High Precision Assessment)

DAS4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.39, 4.39, 4.39); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (71x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.118 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.62 V/m; Power Drift = 0.169 dB

Peak SAR (extrapolated) = 0.207 W/kg


**SAR(1 g) = 0.104 mW/g; SAR(10 g) = 0.053 mW/g**

Maximum value of SAR (measured) = 0.114 mW/g

Test Date = 05/30/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.3 degree C. , After 24.3 degree C.

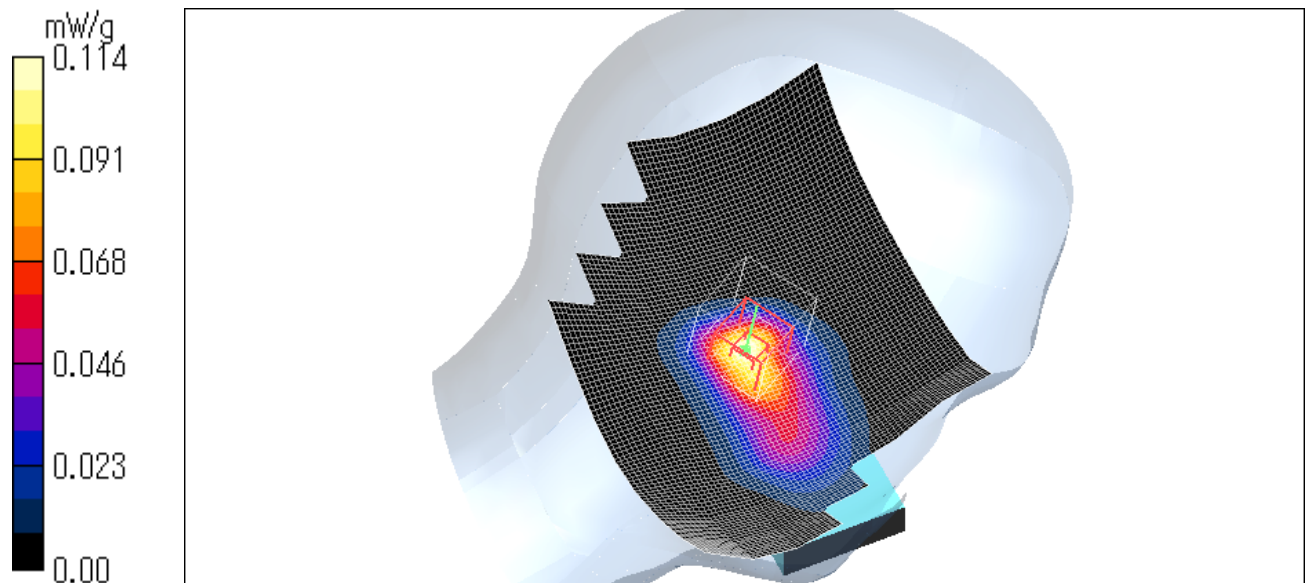

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## KX-THA11 (Mode 1) / Left Head / Tilt / 2441MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.39, 4.39, 4.39); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (71x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.107 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.77 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.184 W/kg


**SAR(1 g) = 0.092 mW/g; SAR(10 g) = 0.046 mW/g**

Maximum value of SAR (measured) = 0.100 mW/g

Test Date = 05/30/05

Ambient Temperature = 25.0 degree.C.

Liquid Temperature = Before 24.3 degree.C. , After 24.3 degree.C.

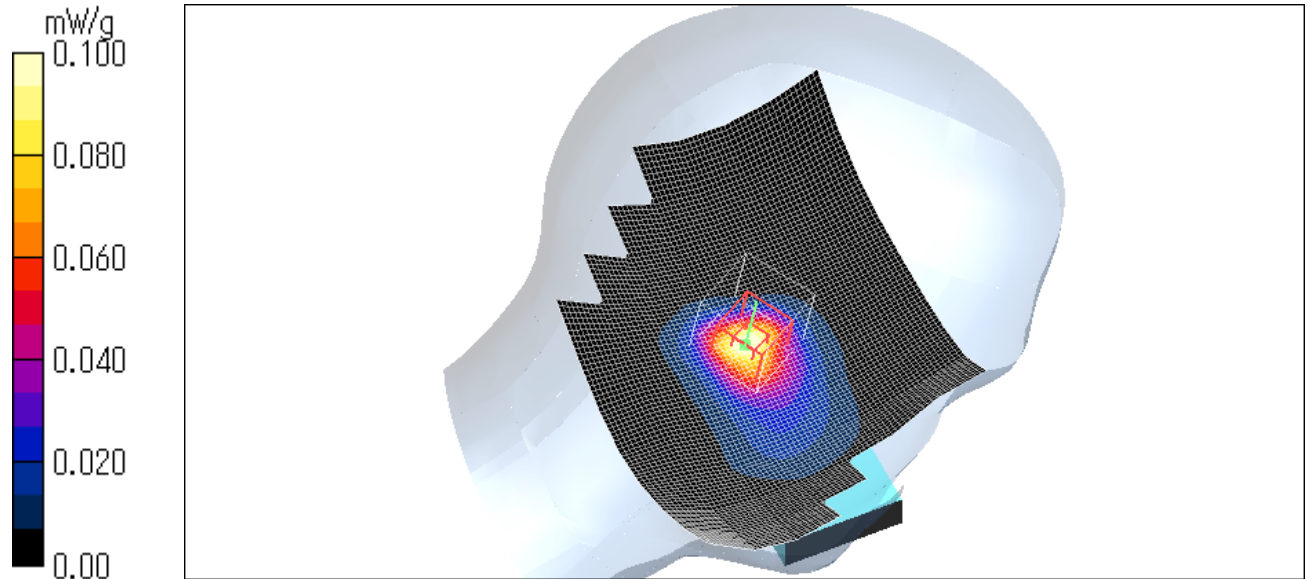

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## KX-THA11 (Model) / Right Head / Cheek / 2441MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.39, 4.39, 4.39); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (71x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.147 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.20 V/m; Power Drift = 0.078 dB

Peak SAR (extrapolated) = 0.205 W/kg


**SAR(1 g) = 0.118 mW/g; SAR(10 g) = 0.068 mW/g**

Maximum value of SAR (measured) = 0.125 mW/g

Test Date = 05/30/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.6 degree C. , After 24.7 degree C.

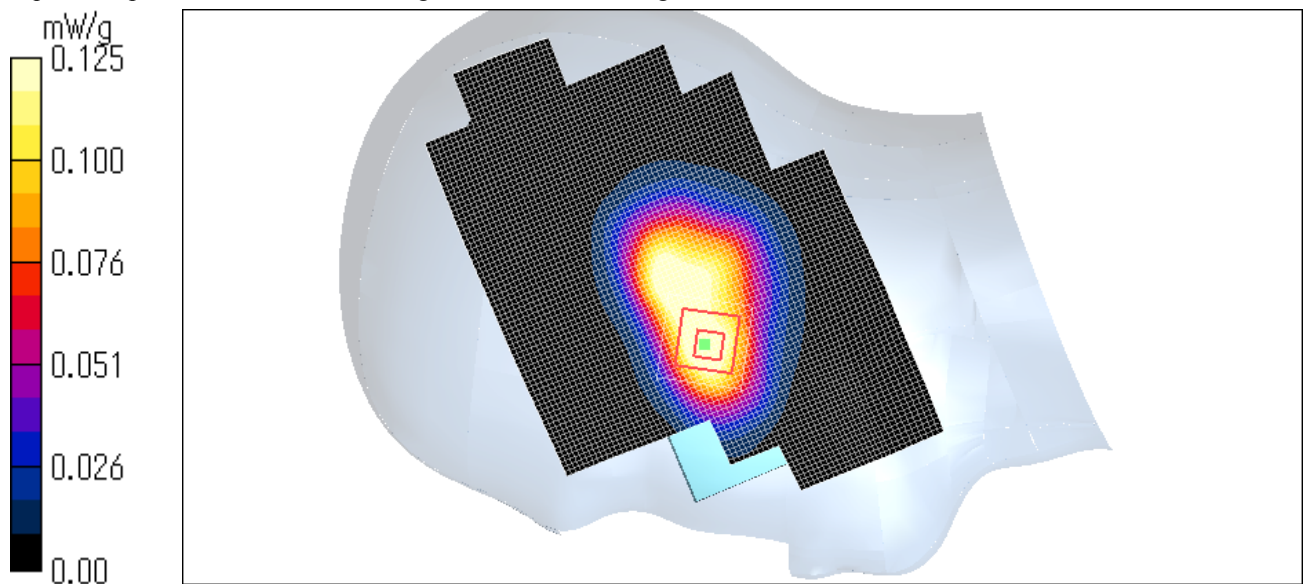

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## KX-THA11 (Model) / Right Head / Tilt / 2441MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.39, 4.39, 4.39); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (71x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.120 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.28 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.208 W/kg


**SAR(1 g) = 0.115 mW/g; SAR(10 g) = 0.064 mW/g**

Maximum value of SAR (measured) = 0.123 mW/g

Test Date = 05/30/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.6 degree C. , After 24.6 degree C.

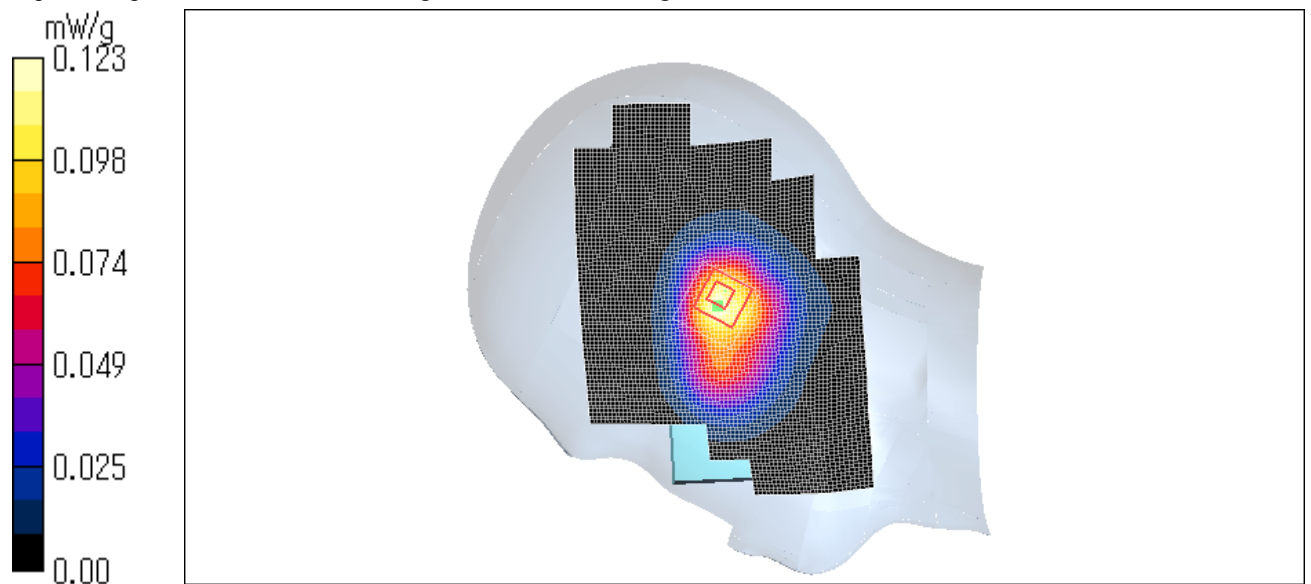

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## KX-THA11 (Model) / Left Head / Cheek / 2402MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.39, 4.39, 4.39); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (71x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.147 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.11 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 0.211 W/kg


**SAR(1 g) = 0.122 mW/g; SAR(10 g) = 0.068 mW/g**

Maximum value of SAR (measured) = 0.128 mW/g

Test Date = 05/30/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.5 degree C. , After 24.4 degree C.

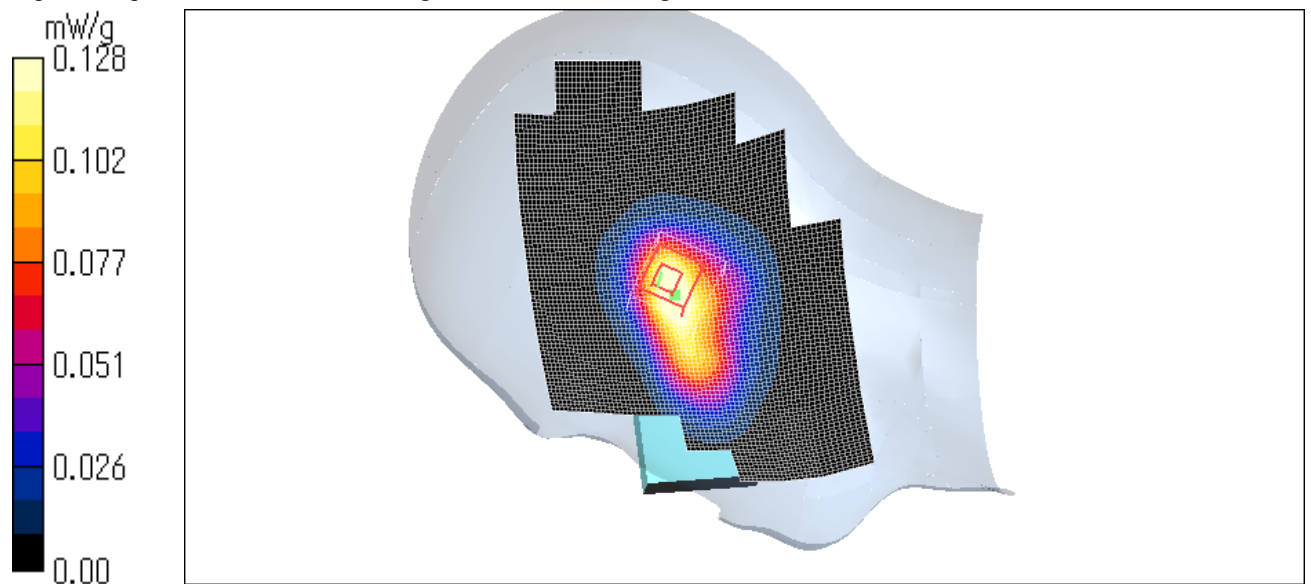

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## KX-THA11 (Mode1)/ Left Head / Cheek / 2480MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.39, 4.39, 4.39); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (71x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.145 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.52 V/m; Power Drift = -0.073 dB

Peak SAR (extrapolated) = 0.213 W/kg

**SAR(1 g) = 0.119 mW/g; SAR(10 g) = 0.067 mW/g**

Maximum value of SAR (measured) = 0.125 mW/g

**Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.52 V/m; Power Drift = -0.073 dB

Peak SAR (extrapolated) = 0.215 W/kg


**SAR(1 g) = 0.120 mW/g; SAR(10 g) = 0.070 mW/g**

Maximum value of SAR (measured) = 0.128 mW/g

Test Date = 05/30/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.5 degree C. , After 24.5 degree C.

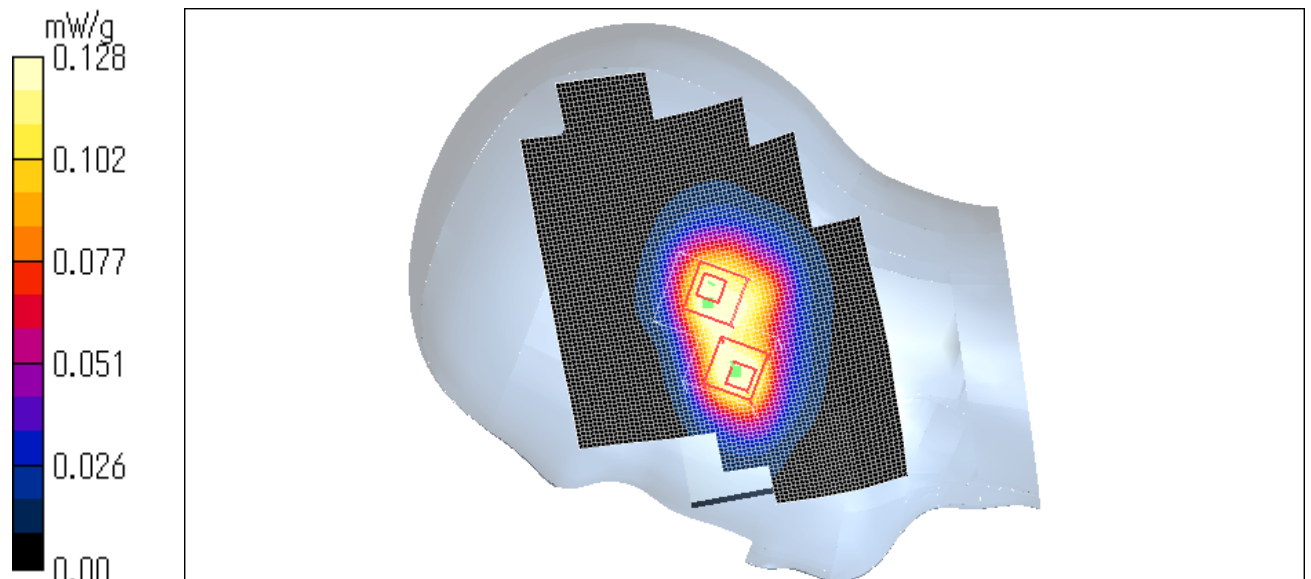

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

## KX-THA11 (Mode 2\_Main Antenna) / Left Head / Cheek / 2440MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.39, 4.39, 4.39); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (71x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.308 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.0 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 0.589 W/kg


**SAR(1 g) = 0.295 mW/g; SAR(10 g) = 0.160 mW/g**

Maximum value of SAR (measured) = 0.323 mW/g

Test Date = 05/30/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.3 degree C. , After 24.3 degree C.

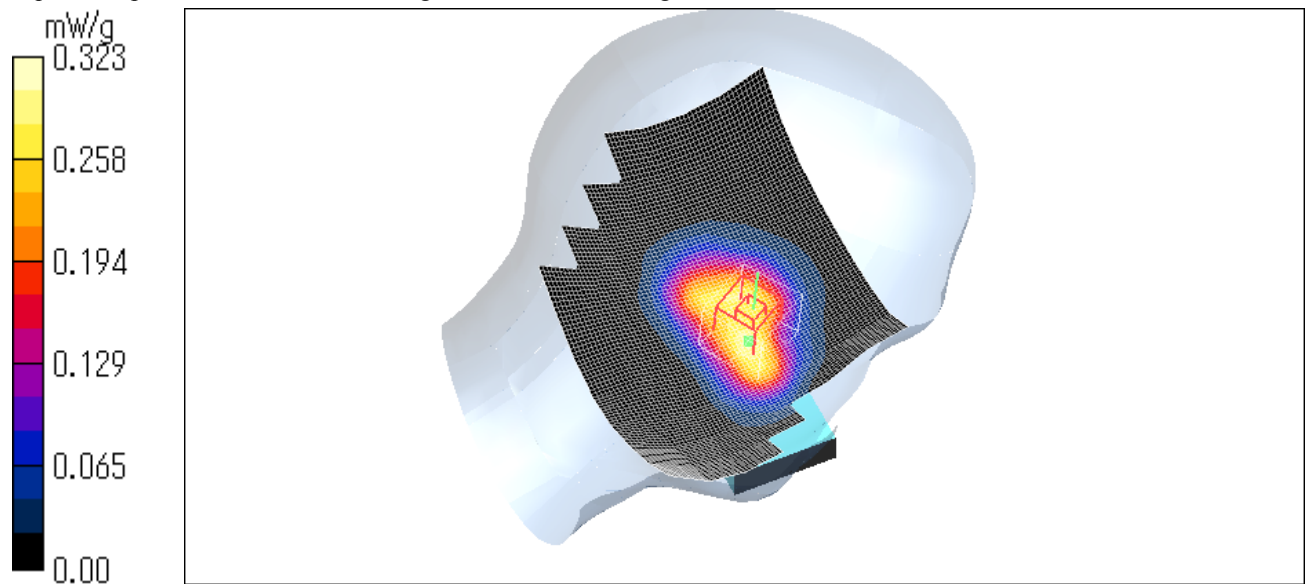

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

## KX-THA11 (Mode 2\_Main Antenna) / Left Head / Tilt / 2440MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.39, 4.39, 4.39); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (71x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.371 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.7 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 0.620 W/kg


**SAR(1 g) = 0.338 mW/g; SAR(10 g) = 0.182 mW/g**

Maximum value of SAR (measured) = 0.355 mW/g

Test Date = 05/30/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.3 degree C. , After 24.3 degree C.

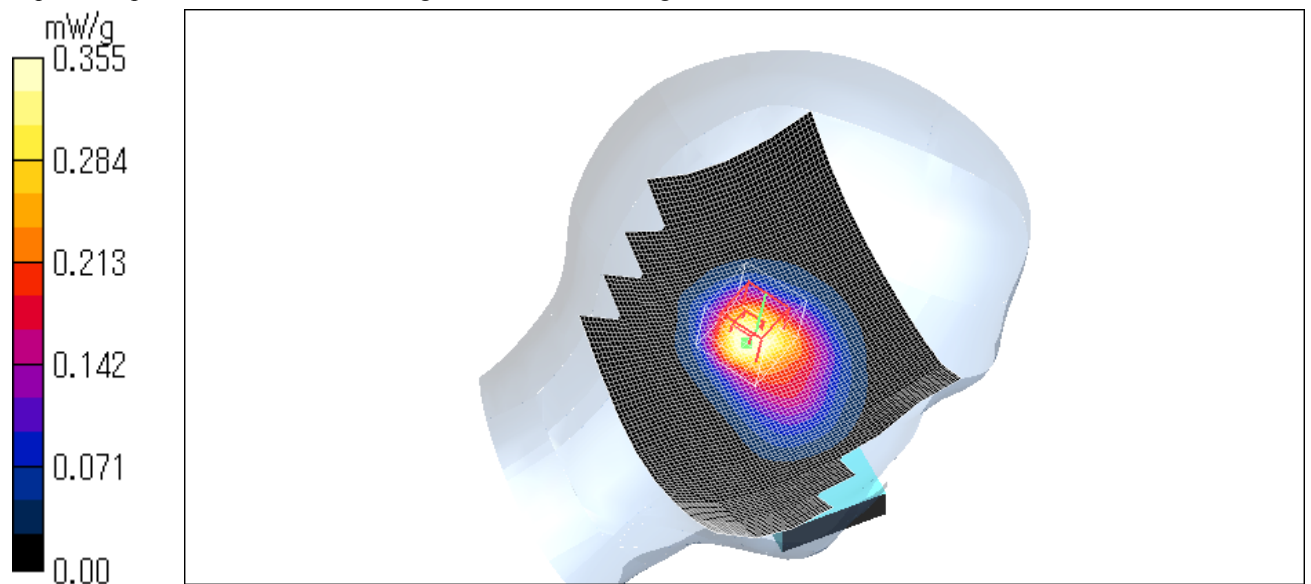

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## KX-THA11 (Mode 2\_Main Antenna) / Right Head / Cheek / 2440MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.39, 4.39, 4.39); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (71x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.323 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = 0.059 dB

Peak SAR (extrapolated) = 0.478 W/kg

**SAR(1 g) = 0.275 mW/g; SAR(10 g) = 0.153 mW/g**

Maximum value of SAR (measured) = 0.291 mW/g

**Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = 0.059 dB

Peak SAR (extrapolated) = 0.475 W/kg


**SAR(1 g) = 0.277 mW/g; SAR(10 g) = 0.157 mW/g**

Maximum value of SAR (measured) = 0.301 mW/g

Test Date = 05/30/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.5 degree C. , After 24.5 degree C.

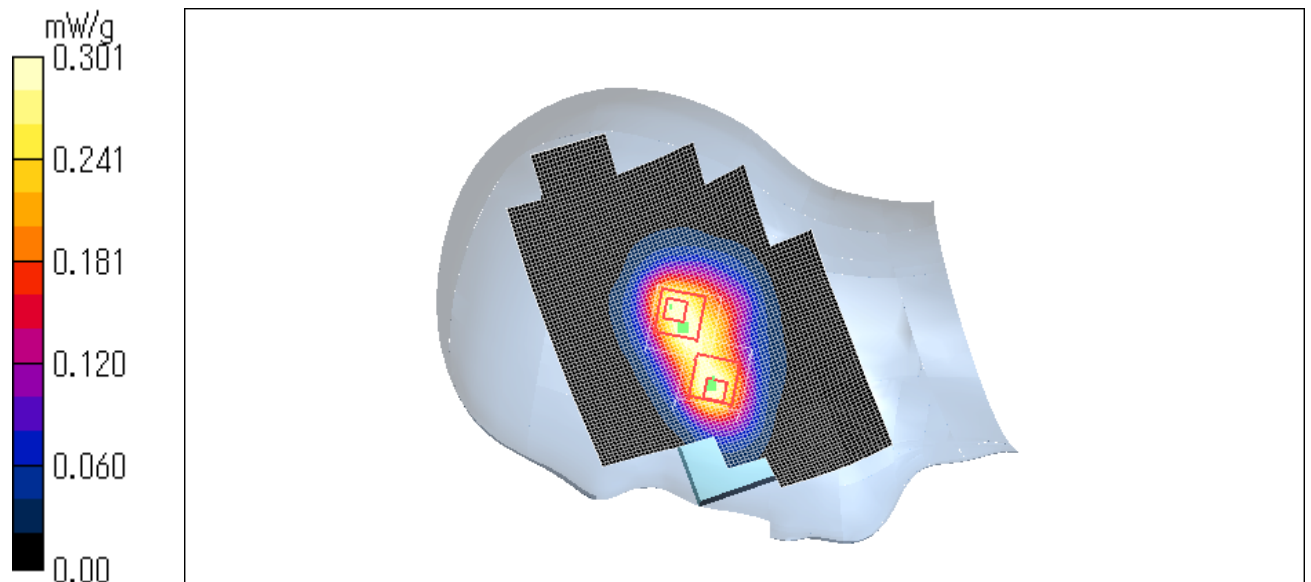

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

## KX-THA11 (Mode 2\_Main Antenna) / Right Head / Tilt / 2440MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.39, 4.39, 4.39); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (71x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.311 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.7 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.522 W/kg


**SAR(1 g) = 0.297 mW/g; SAR(10 g) = 0.164 mW/g**

Maximum value of SAR (measured) = 0.316 mW/g

Test Date = 05/30/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.4 degree C. , After 24.5 degree C.

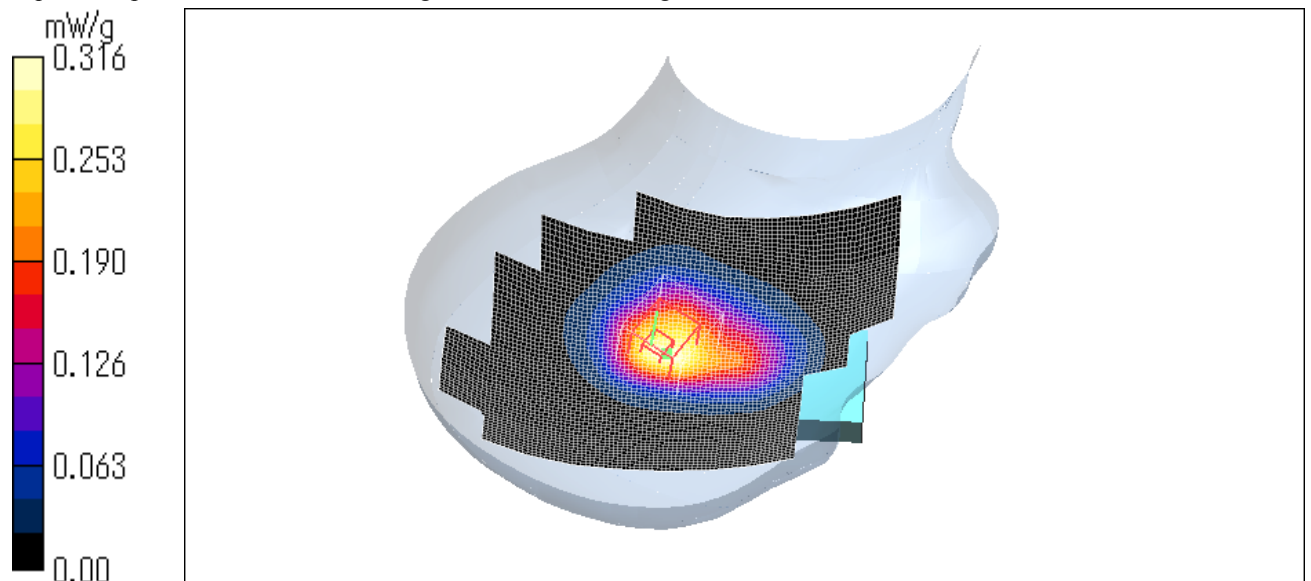

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

## KX-THA11 (Mode 2\_Main Antenna) / Left Head / Tilt / 2402MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.39, 4.39, 4.39); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (71x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.241 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 0.390 W/kg


**SAR(1 g) = 0.217 mW/g; SAR(10 g) = 0.123 mW/g**

Maximum value of SAR (measured) = 0.231 mW/g

Test Date = 05/30/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.3 degree C. , After 24.3 degree C.

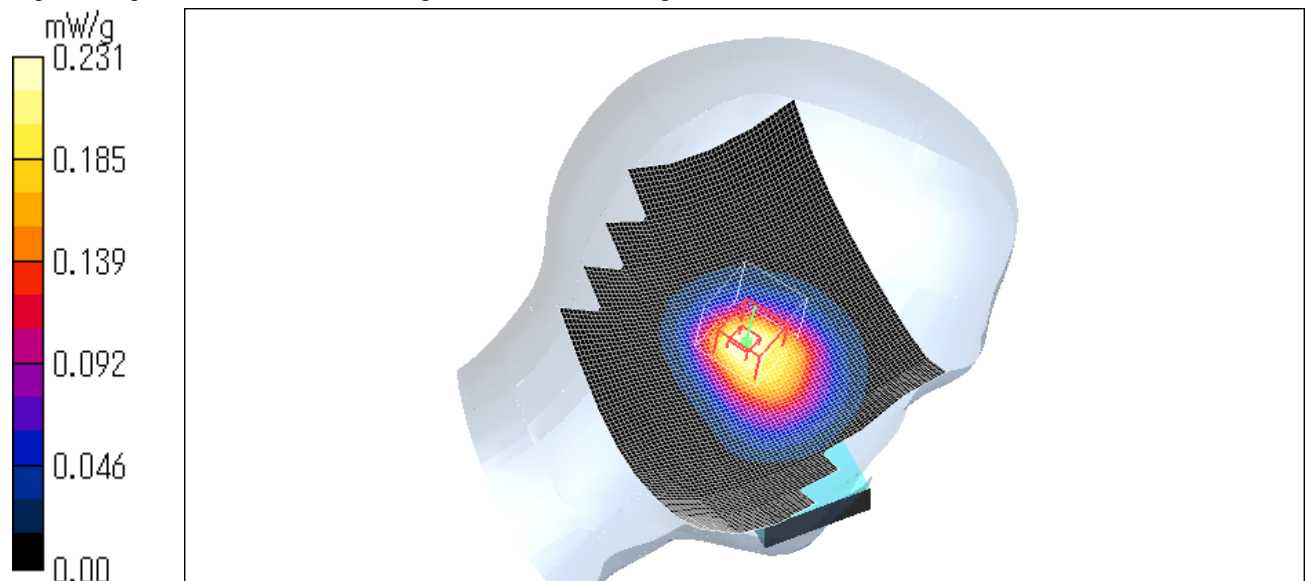

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

## KX-THA11 (Mode 2\_Main Antenna) / Left Head / Tilt / 2480MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.39, 4.39, 4.39); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (71x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.440 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.7 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 0.811 W/kg


**SAR(1 g) = 0.429 mW/g; SAR(10 g) = 0.231 mW/g**

Maximum value of SAR (measured) = 0.463 mW/g

Test Date = 05/30/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.3 degree C. , After 24.3 degree C.

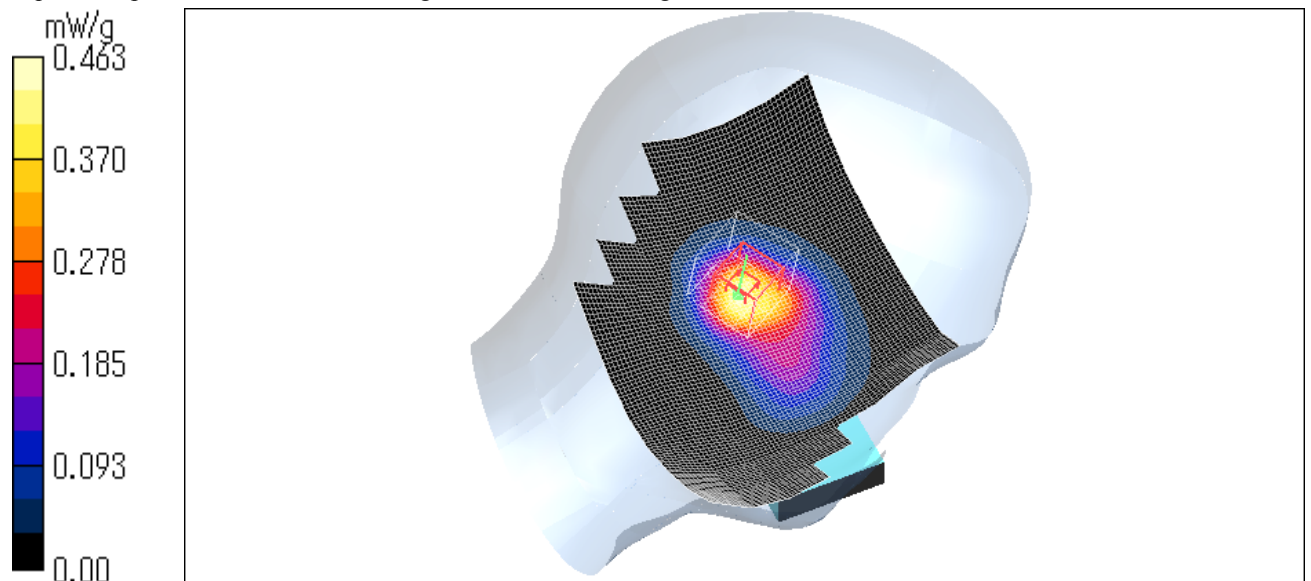

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## Z-axis at maximum SAR location

### KX-THA11 (Mode 2\_Main Antenna) / Left Head / Tilt / 2480MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:


Probe: ET3DV6 - SN1684; ConvF(4.39, 4.39, 4.39); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

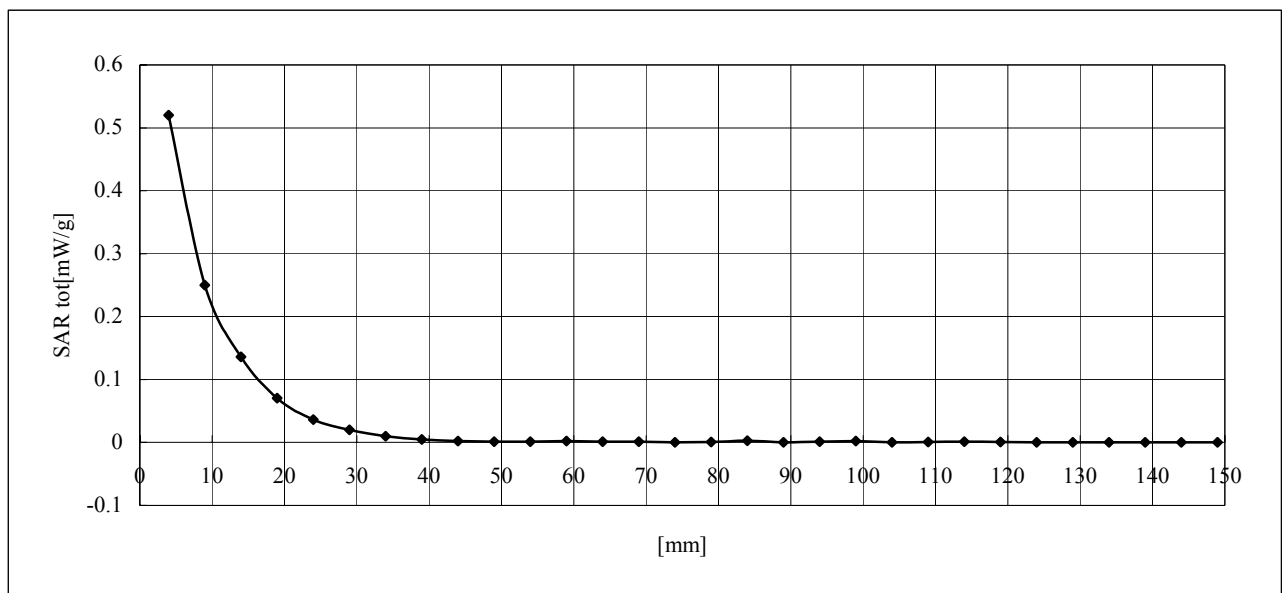

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

## KX-THA11 (Mode 2\_Sub Antenna) / Left Head / Cheek / 2440MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.39, 4.39, 4.39); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (71x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.281 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = -0.187 dB

Peak SAR (extrapolated) = 0.472 W/kg


**SAR(1 g) = 0.239 mW/g; SAR(10 g) = 0.122 mW/g**

Maximum value of SAR (measured) = 0.263 mW/g

Test Date = 05/30/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.4 degree C. , After 24.4 degree C.

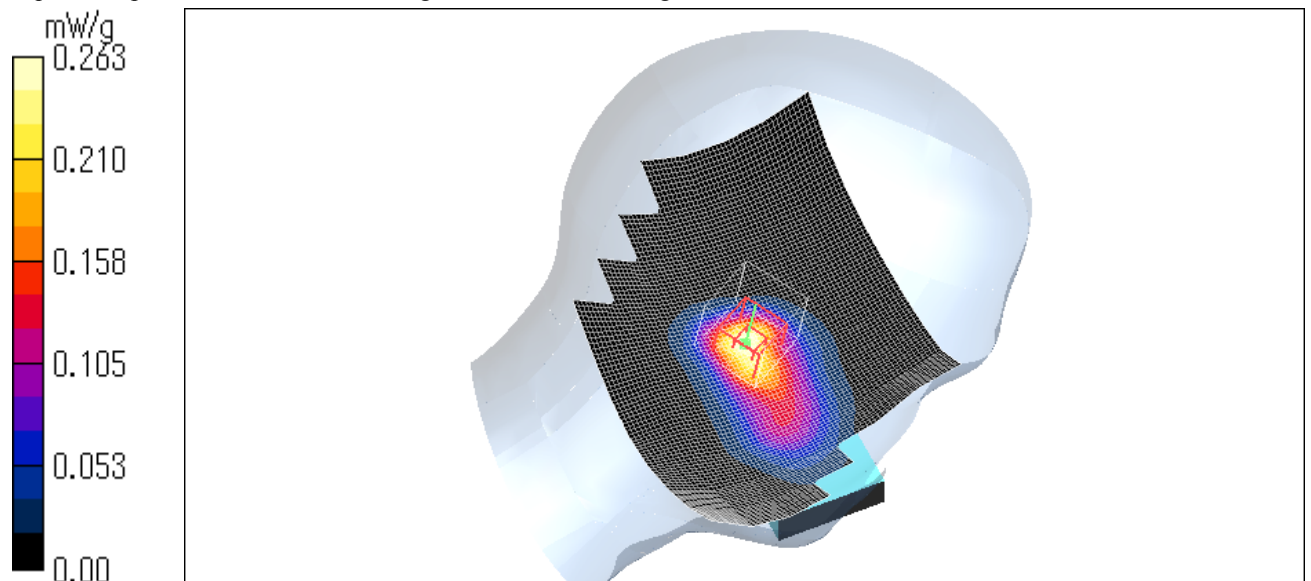

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

## KX-THA11 (Mode 2\_Sub Antenna) / Left Head / Tilt / 2440MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.39, 4.39, 4.39); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (71x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.283 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.453 W/kg


**SAR(1 g) = 0.233 mW/g; SAR(10 g) = 0.117 mW/g**

Maximum value of SAR (measured) = 0.260 mW/g

Test Date = 05/30/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.4 degree C. , After 24.5 degree C.

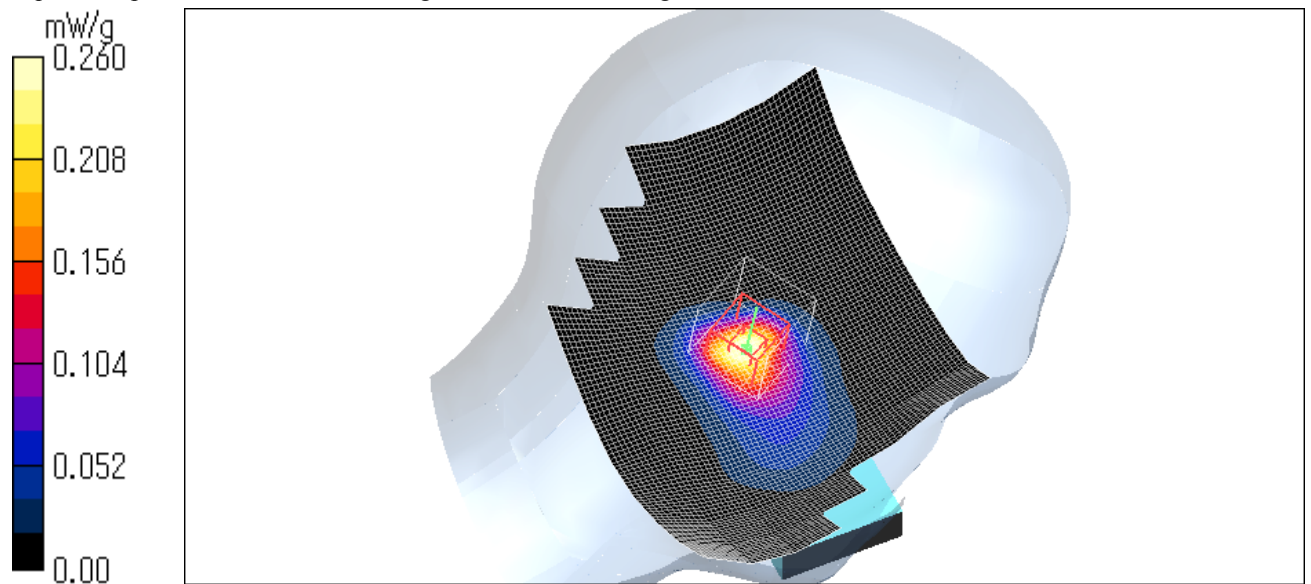

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

## KX-THA11 (Mode 2\_Sub Antenna) / Right Head / Cheek / 2440MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.39, 4.39, 4.39); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (71x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.261 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.79 V/m; Power Drift = -0.181 dB

Peak SAR (extrapolated) = 0.420 W/kg


**SAR(1 g) = 0.219 mW/g; SAR(10 g) = 0.112 mW/g**

Maximum value of SAR (measured) = 0.239 mW/g

Test Date = 05/30/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.5 degree C. , After 24.5 degree C.

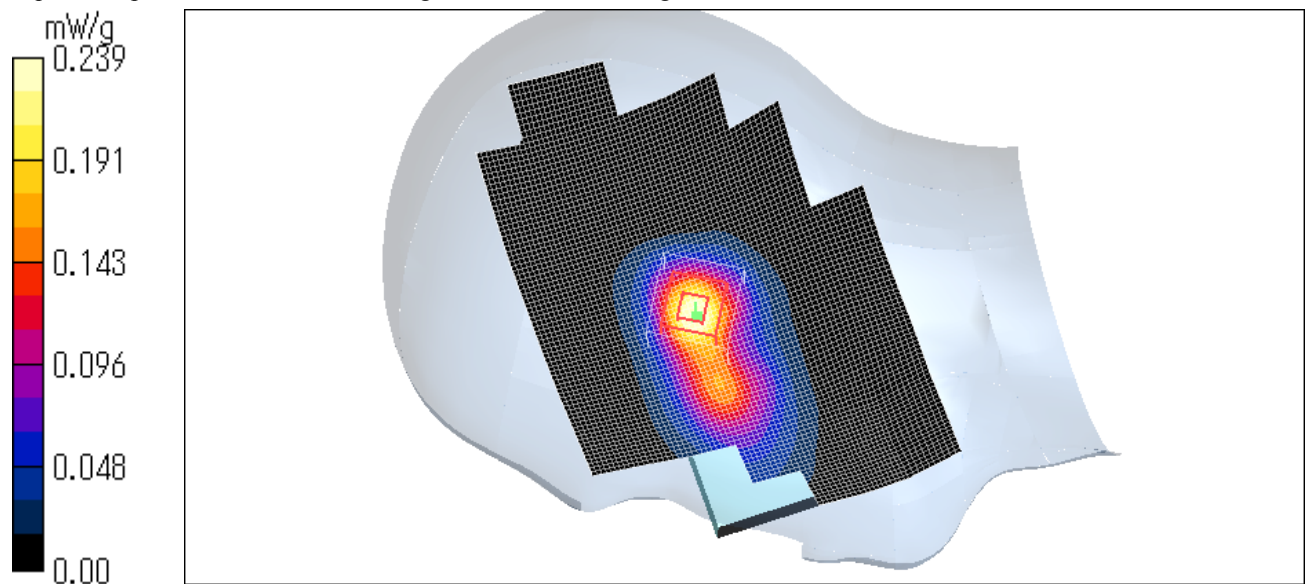

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

## KX-THA11 (Mode 2\_Sub Antenna) / Right Head / Tilt / 2440MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.39, 4.39, 4.39); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (71x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.246 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.92 V/m; Power Drift = -0.113 dB

Peak SAR (extrapolated) = 0.400 W/kg


**SAR(1 g) = 0.215 mW/g; SAR(10 g) = 0.108 mW/g**

Maximum value of SAR (measured) = 0.232 mW/g

Test Date = 05/30/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.6 degree C. , After 24.6 degree C.

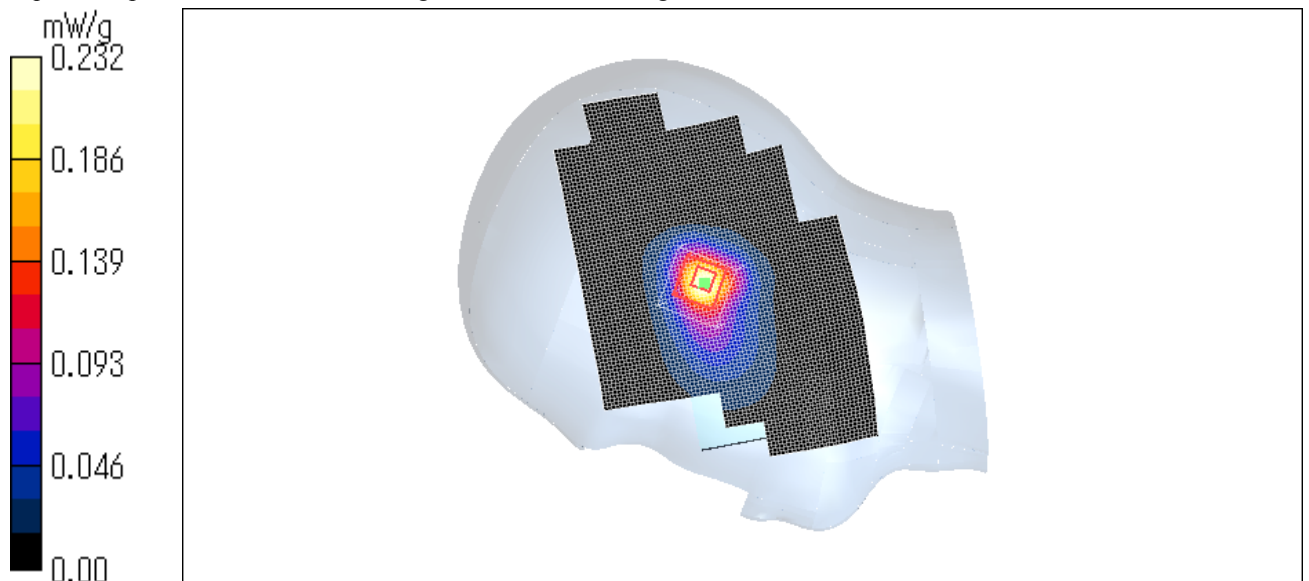

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

## KX-THA11 (Mode 2\_Sub Antenna) / Left Head / Cheek / 2402MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.39, 4.39, 4.39); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (71x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.171 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.57 V/m; Power Drift = 0.199 dB

Peak SAR (extrapolated) = 0.288 W/kg


**SAR(1 g) = 0.152 mW/g; SAR(10 g) = 0.081 mW/g**

Maximum value of SAR (measured) = 0.166 mW/g

Test Date = 05/30/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.5 degree C. , After 24.5 degree C.

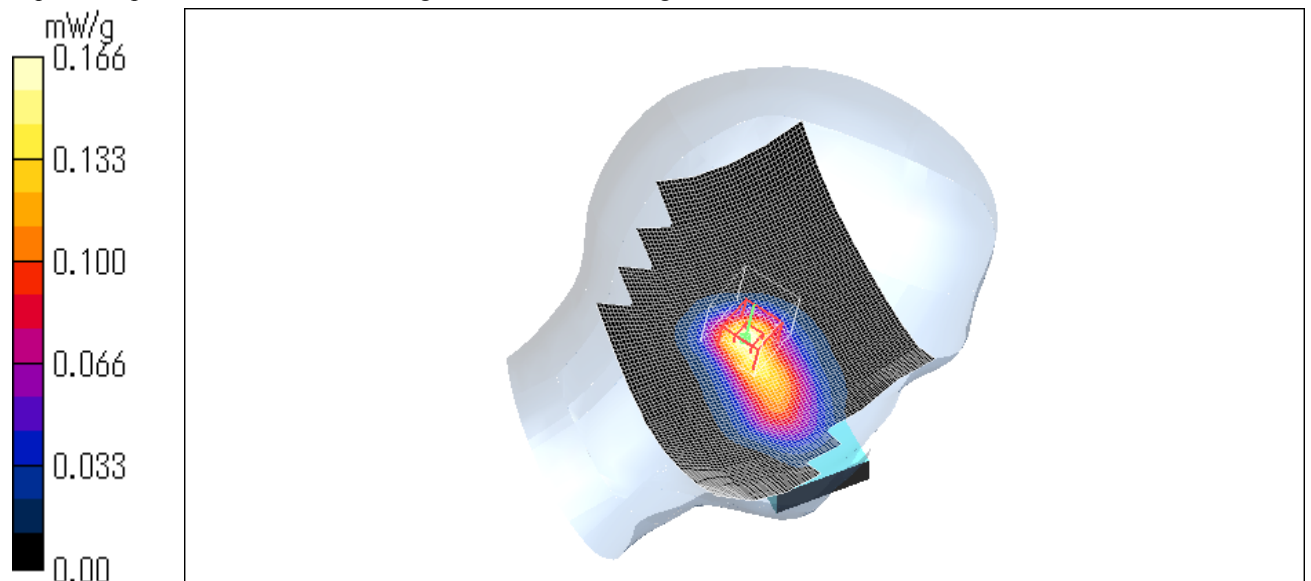

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

## KX-THA11 (Mode 2\_Sub Antenna) / Left Head / Cheek / 2480MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.39, 4.39, 4.39); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (71x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.261 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.423 W/kg


**SAR(1 g) = 0.218 mW/g; SAR(10 g) = 0.112 mW/g**

Maximum value of SAR (measured) = 0.239 mW/g

Test Date = 05/30/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.5 degree C. , After 24.5 degree C.

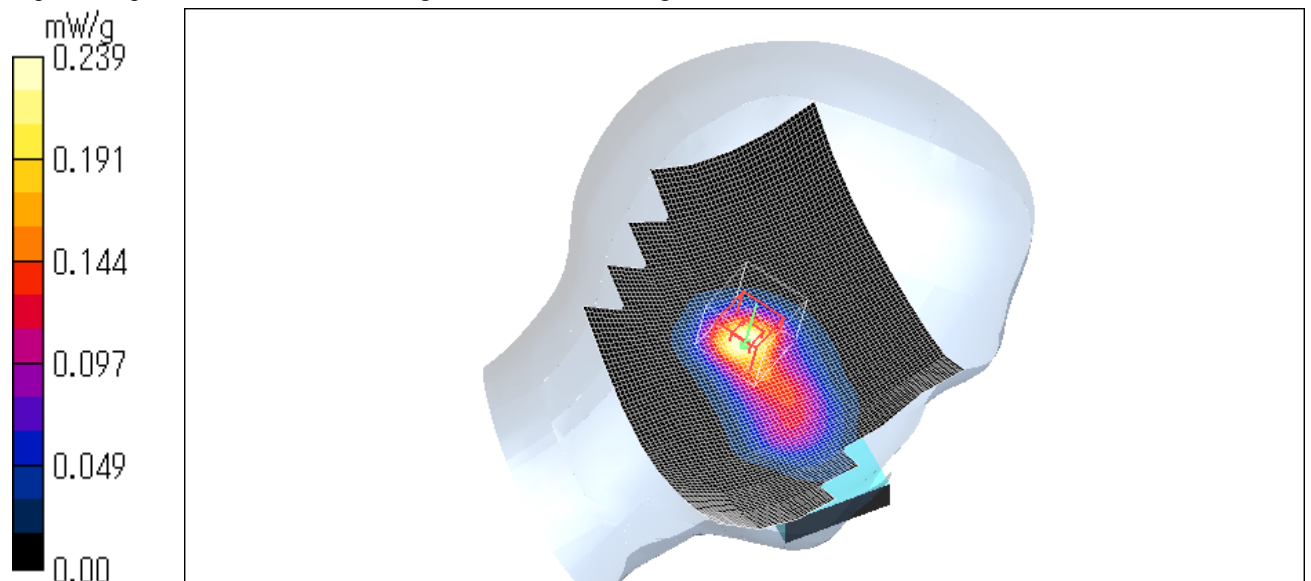

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

### **APPENDIX 3 : SAR Measurement data of Body**

## KX-THA11 (Mode 1) / Body / Back / 2402MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2$  mho/m;  $\epsilon_r = 50.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (61x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.133 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.97 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 0.205 W/kg


**SAR(1 g) = 0.114 mW/g; SAR(10 g) = 0.066 mW/g**

Maximum value of SAR (measured) = 0.121 mW/g

Test Date = 05/17/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.0 degree C. , After 24.0 degree C.

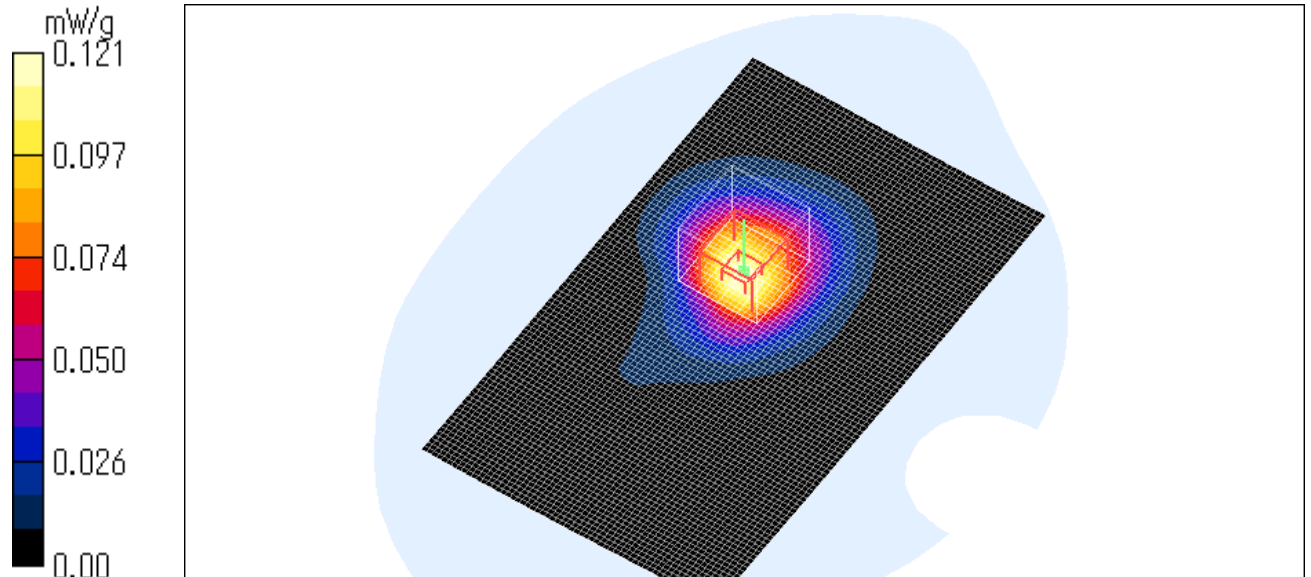

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

### KX-THA11(Mode 1) / Body / Back / 2441MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2$  mho/m;  $\epsilon_r = 50.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (61x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.212 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.14 V/m; Power Drift = -0.262 dB

Peak SAR (extrapolated) = 0.321 W/kg


**SAR(1 g) = 0.173 mW/g; SAR(10 g) = 0.097 mW/g**

Maximum value of SAR (measured) = 0.182 mW/g

Test Date = 05/17/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.2 degree C. , After 24.2 degree C.

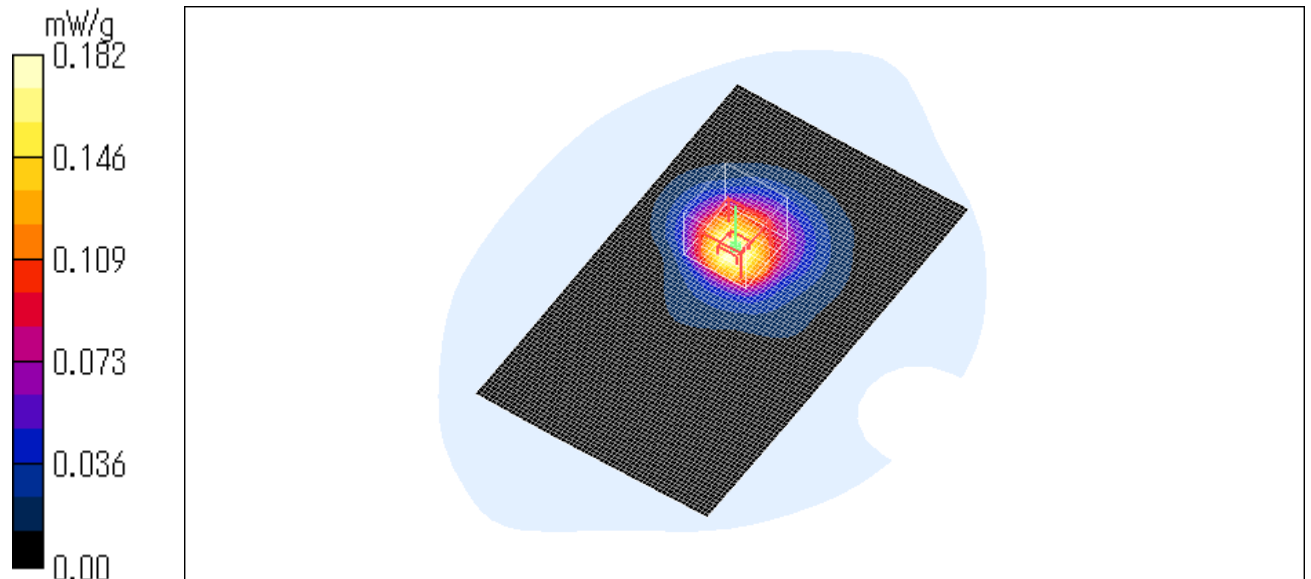

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

### KX-THA11(Mode 1) / Body / Back / 2480MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2$  mho/m;  $\epsilon_r = 50.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (61x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.147 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.96 V/m; Power Drift = -0.276 dB

Peak SAR (extrapolated) = 0.240 W/kg


**SAR(1 g) = 0.130 mW/g; SAR(10 g) = 0.073 mW/g**

Maximum value of SAR (measured) = 0.137 mW/g

Test Date = 05/17/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.3 degree C. , After 24.3 degree C.

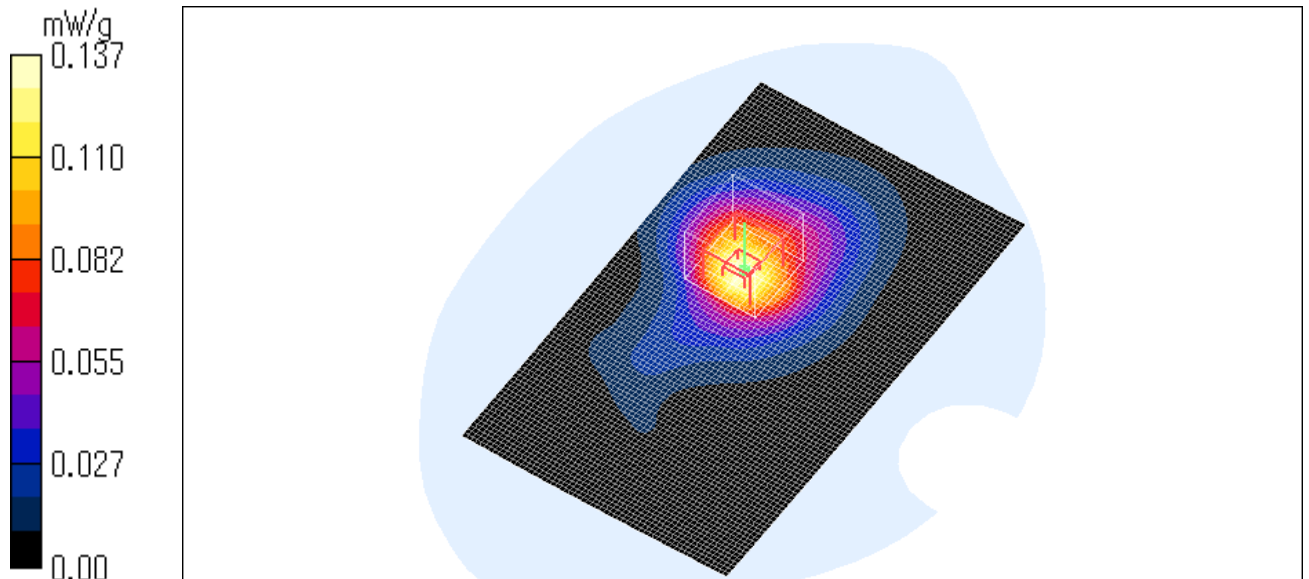

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## KX-THA11(Mode 2\_Main antenna) / Body / Back / 2402MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2$  mho/m;  $\epsilon_r = 50.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (61x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.236 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.25 V/m; Power Drift = -0.276 dB

Peak SAR (extrapolated) = 0.396 W/kg


**SAR(1 g) = 0.224 mW/g; SAR(10 g) = 0.131 mW/g**

Maximum value of SAR (measured) = 0.239 mW/g

Test Date = 05/17/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.0 degree C. , After 24.0 degree C.

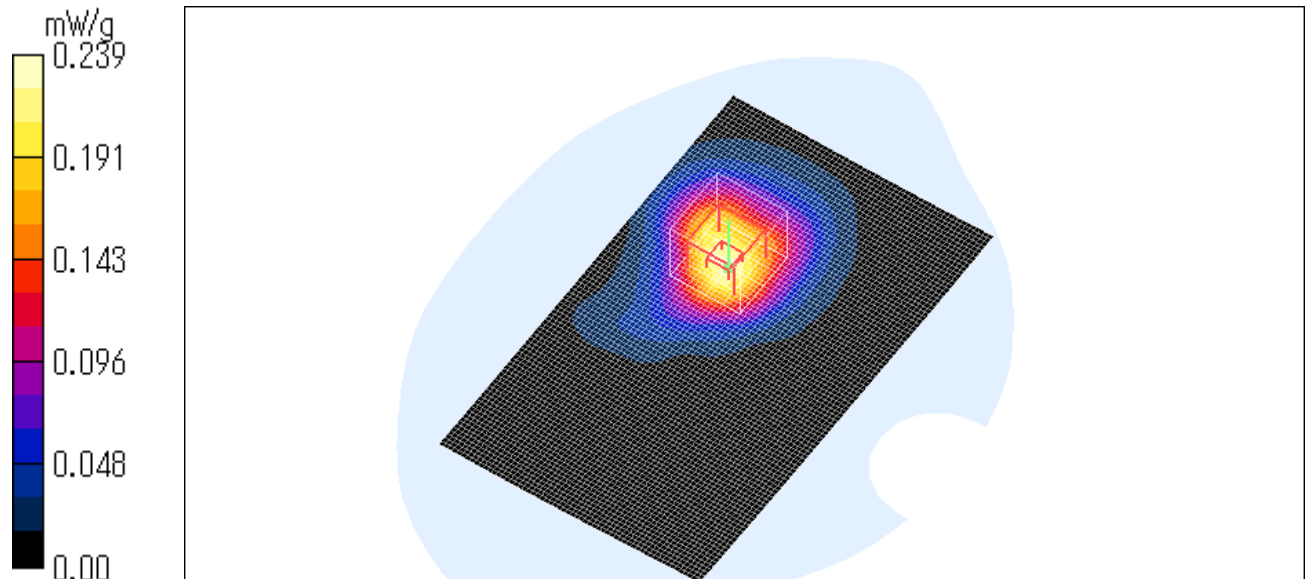

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## KX-THA11(Mode 2\_Main antenna) / Body / Back / 2440MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2$  mho/m;  $\epsilon_r = 50.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (61x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.275 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.87 V/m; Power Drift = -0.149 dB

Peak SAR (extrapolated) = 0.467 W/kg


**SAR(1 g) = 0.256 mW/g; SAR(10 g) = 0.146 mW/g**

Maximum value of SAR (measured) = 0.271 mW/g

Test Date = 05/17/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.1 degree C. , After 24.1 degree C.

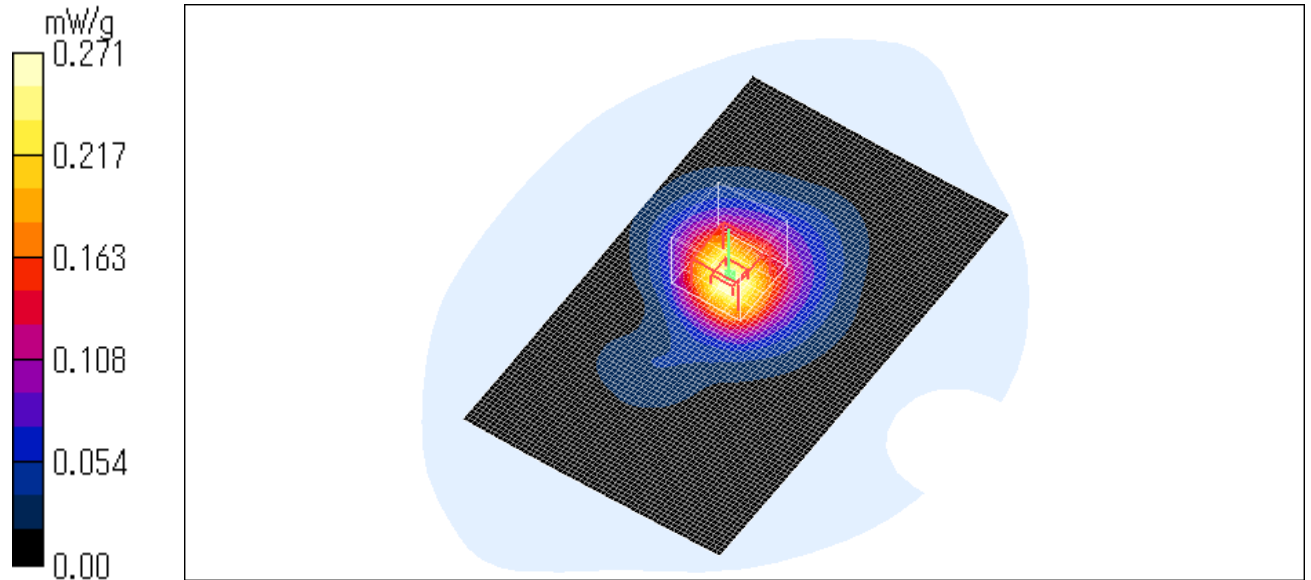

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## KX-THA11(Mode 2\_Main antenna) / Body / Back / 2480MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2$  mho/m;  $\epsilon_r = 50.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (61x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.467 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = -0.300 dB

Peak SAR (extrapolated) = 0.804 W/kg


**SAR(1 g) = 0.427 mW/g; SAR(10 g) = 0.236 mW/g**

Maximum value of SAR (measured) = 0.462 mW/g

Test Date = 05/17/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.1 degree C. , After 24.1 degree C.

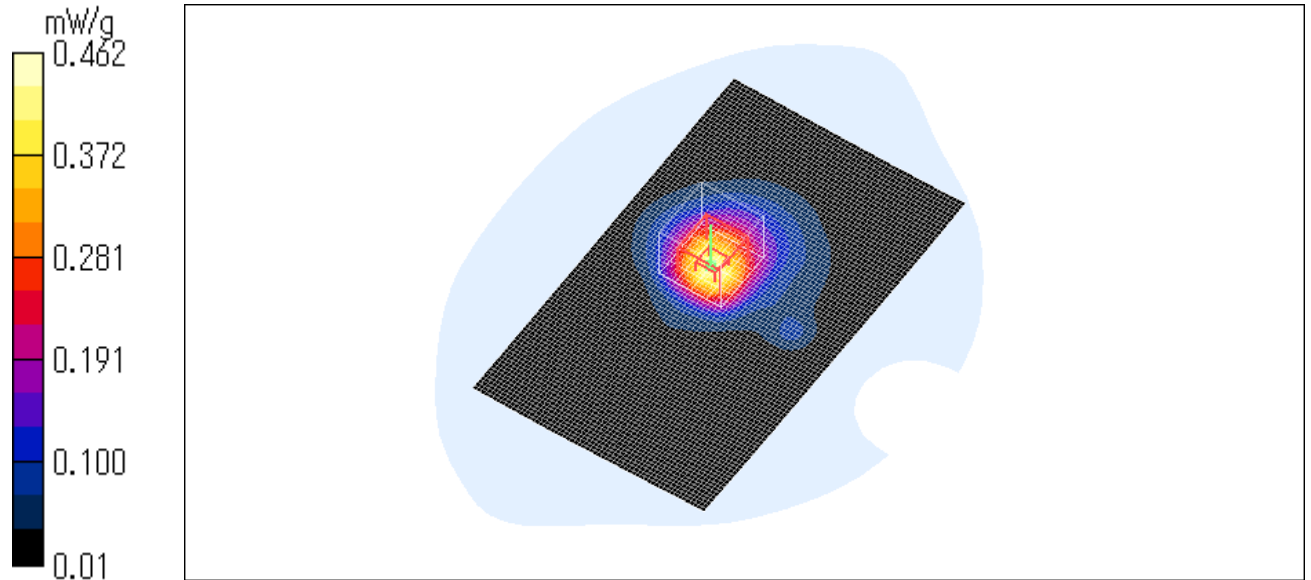

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## KX-THA11(Mode 2\_Sub antenna) / Body / Back / 2402MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2$  mho/m;  $\epsilon_r = 50.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (61x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.117 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.21 V/m; Power Drift = -0.154 dB

Peak SAR (extrapolated) = 0.165 W/kg


**SAR(1 g) = 0.087 mW/g; SAR(10 g) = 0.049 mW/g**

Maximum value of SAR (measured) = 0.093 mW/g

Test Date = 05/17/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.0 degree C. , After 24.0 degree C.

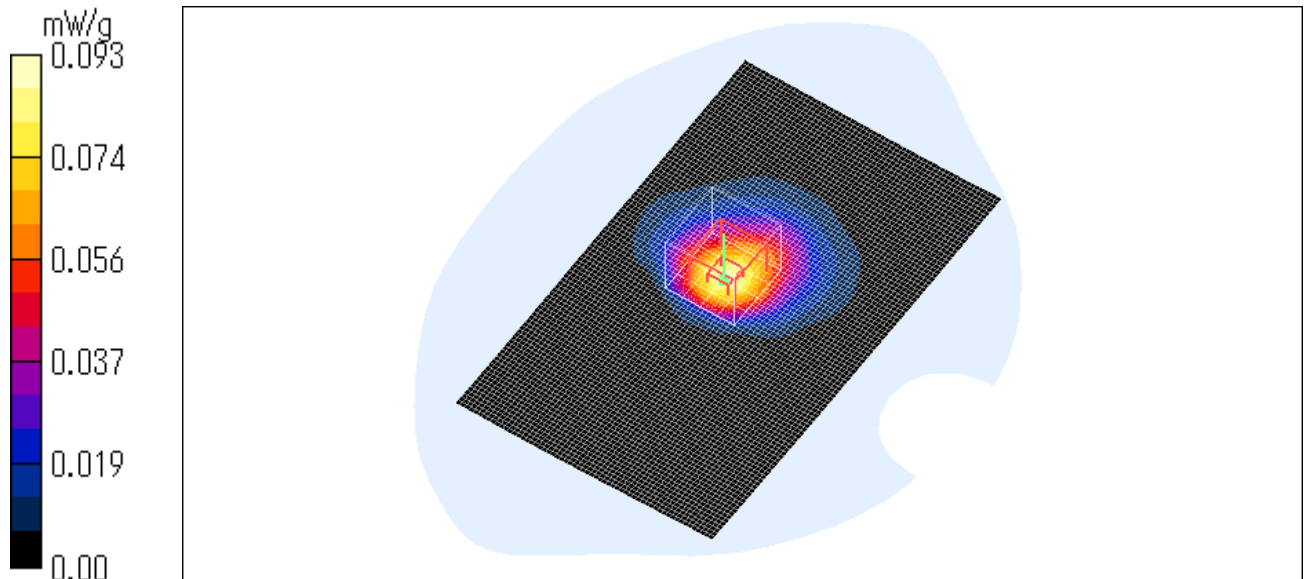

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## KX-THA11(Mode 2\_Sub antenna) / Body / Back / 2440MHz

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2$  mho/m;  $\epsilon_r = 50.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (61x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.107 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.26 V/m; Power Drift = -0.267 dB

Peak SAR (extrapolated) = 0.188 W/kg


**SAR(1 g) = 0.099 mW/g; SAR(10 g) = 0.054 mW/g**

Maximum value of SAR (measured) = 0.104 mW/g

Test Date = 05/17/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.3 degree C. , After 24.3 degree C.

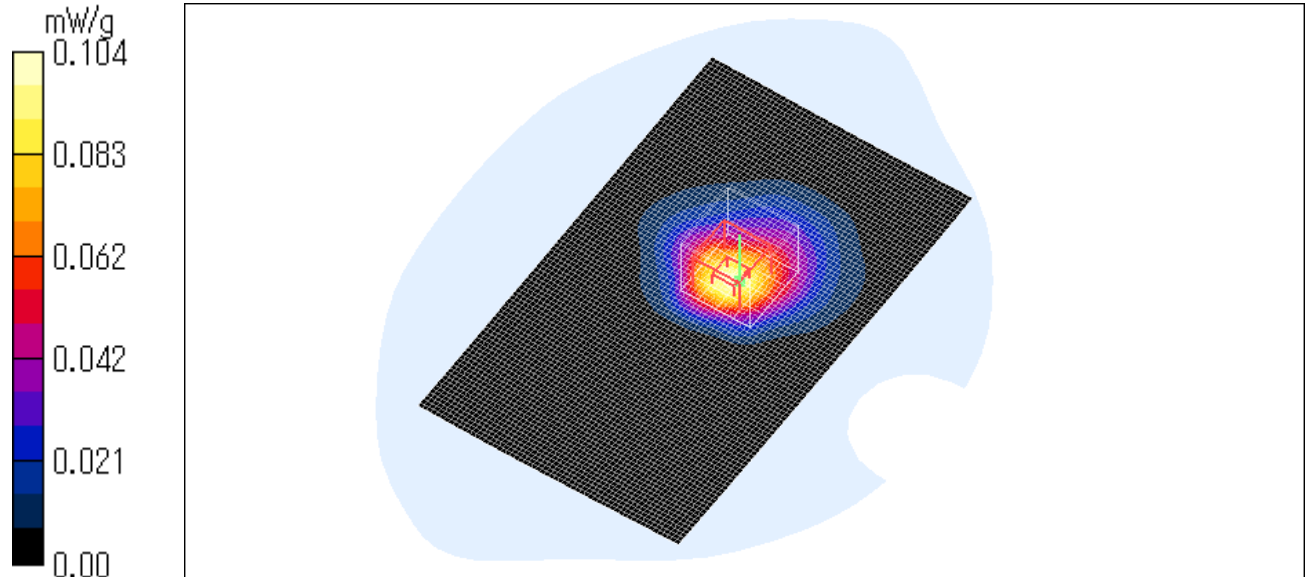

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

**KX-THA11(Mode 2\_Sub antenna) / Body / Back / 2480MHz**

Duty Cycle: 1:1.2

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2$  mho/m;  $\epsilon_r = 50.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (61x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.088 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.91 V/m; Power Drift = -0.135 dB

Peak SAR (extrapolated) = 0.160 W/kg


**SAR(1 g) = 0.080 mW/g; SAR(10 g) = 0.044 mW/g**

Maximum value of SAR (measured) = 0.085 mW/g

Test Date = 05/17/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 23.9 degree C. , After 23.9 degree C.

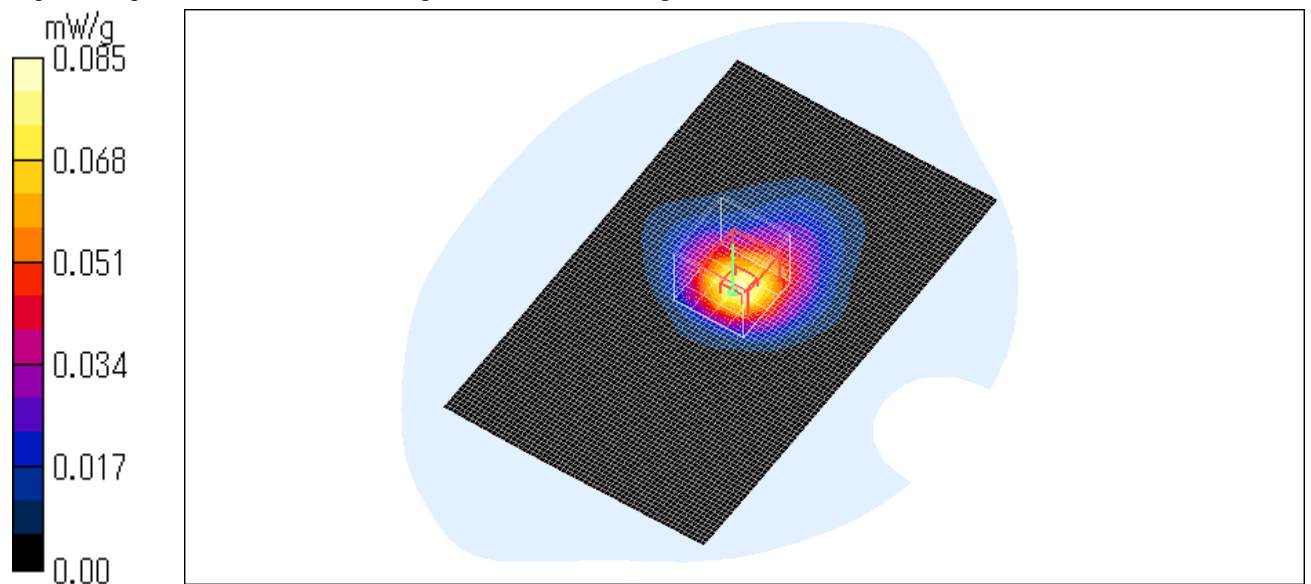

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## **APPENDIX 4 : Validation Measurement data**

**System Validation / Dipole 2450 MHz / Forward Conducted Power : 250mW**

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: SN:713**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.86$  mho/m;  $\epsilon_r = 37.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

**DASY4 Configuration:**

Probe: ET3DV6 - SN1684; ConvF(4.39, 4.39, 4.39); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (51x51x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 21.6 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 96.6 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 28.8 W/kg


**SAR(1 g) = 14 mW/g; SAR(10 g) = 6.51 mW/g**

Maximum value of SAR (measured) = 15.9 mW/g

Test Date = 05/17/05

Ambient Temperature = 25.0 degree.C.

Liquid Temperature = Before 24.3 degree.C. , After 24.3 degree.C.

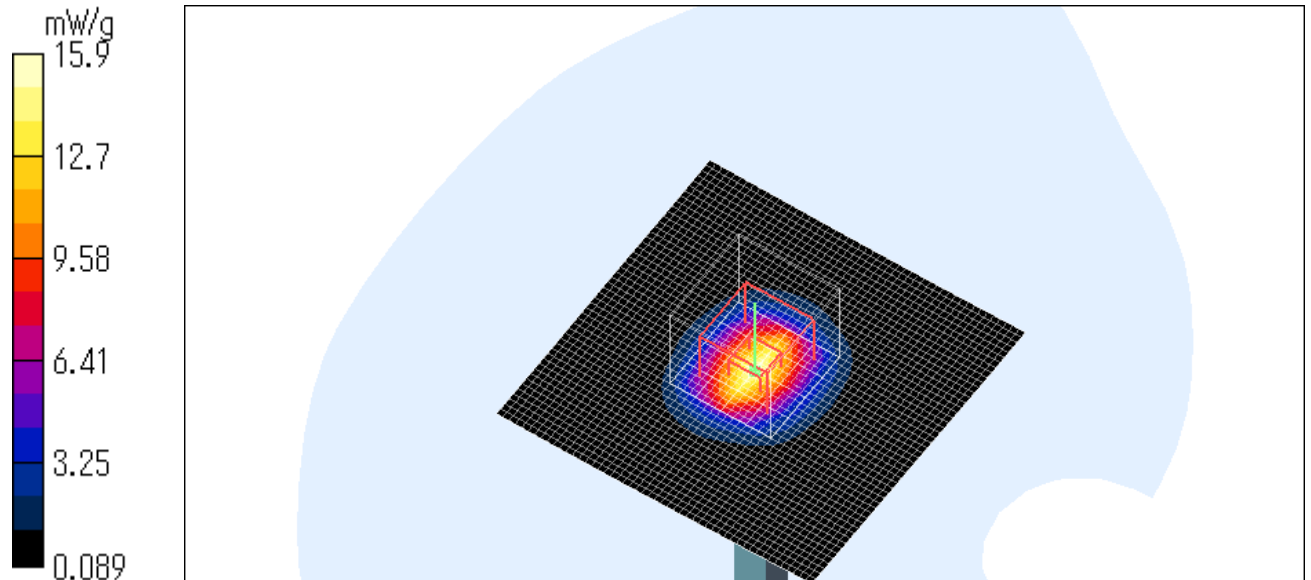

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**System Validation / Dipole 2450 MHz / Forward Conducted Power : 250mW**

**Dipole 2450 MHz; Type: D2450V2; Serial: SN:713**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 38.0$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

**DASY4 Configuration:**

Probe: ET3DV6 - SN1684; ConvF(4.39, 4.39, 4.39); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**Area Scan (51x51x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 21.8 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 97.5 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 29.3 W/kg


**SAR(1 g) = 14.2 mW/g; SAR(10 g) = 6.6 mW/g**

Maximum value of SAR (measured) = 16.1 mW/g

Test Date = 05/19/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.3 degree C. , After 24.3 degree C.

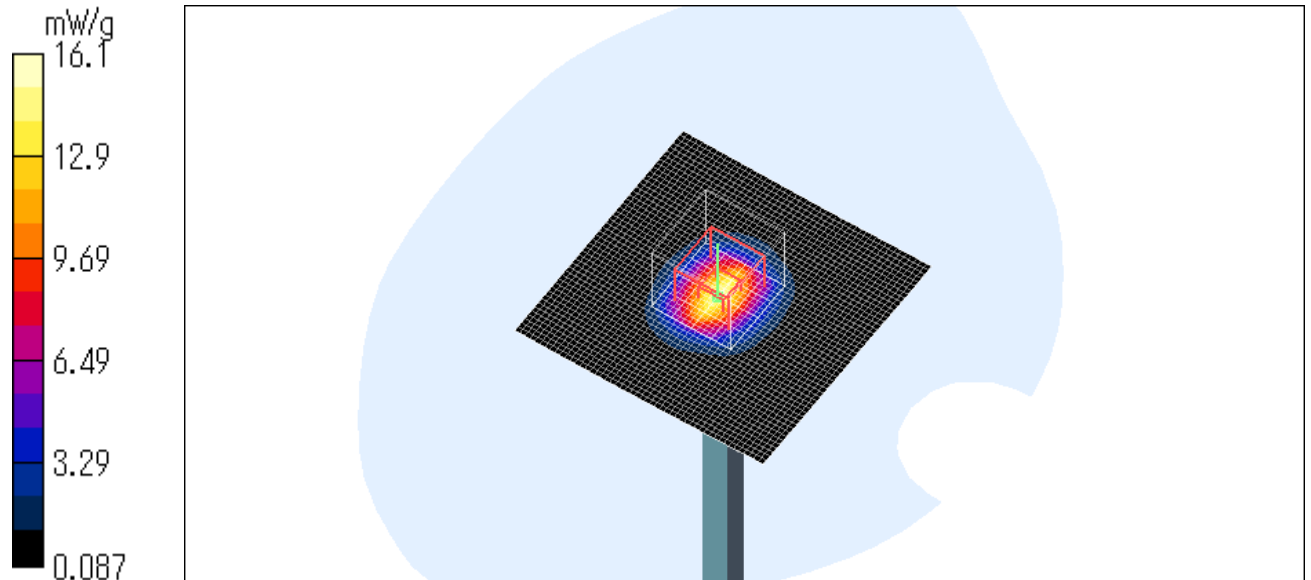

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124