



PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA
Tel. 410.290.6652 / Fax 410.290.6554
http://www.pctestlab.com



CERTIFICATE OF COMPLIANCE FCC PART 15.407 Class II Permissive Change

Applicant Name:
Panasonic Corporation of North America
One Panasonic Way, 4B-8
Secaucus, NJ 07094
United States

Date of Testing:
May 10 - 11, 2007
Test Site/Location:
PCTEST Lab, Columbia, MD, USA
Test Report Serial No.:
0705140457.ACJ

FCC ID:	ACJ9TGCF-301
APPLICANT:	Panasonic Corporation of North America

Model(s): CF-30
EUT Type: Toughbook Model: CF-30
Max. RF Output Power: 13.74 mW (11.38 dBm) Conducted (UNII-II)
Frequency Range: 5260MHz – 5320MHz (UNII High Band)
FCC Classification: Unlicensed National Information Infrastructure (UNII)
FCC Rule Part(s): Part 15.407
Test Device Serial No.: N/A
Class II Perm. Change: Add UNII high band data
Original Grant Date: 11/17/2006

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C-63.4-2003. If the EUT contains any additional embedded transmitters, then those transmitters were active during all tests. The JBC portion of this EUT is covered in the DOC report. Radiated data was taken with the highest gain antenna.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Grant Conditions: Listed output power is conducted.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.


Randy Ortanez
President







FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30	Page 1 of 27	

TABLE OF CONTENTS

FCC PART 15.407 MEASUREMENT REPORT.....		3
1.0 INTRODUCTION.....		4
1.1 EVALUATION PROCEDURE.....		4
1.2 SCOPE.....		4
1.3 PCTEST TEST LOCATION.....		4
2.0 PRODUCT INFORMATION		5
2.1 EQUIPMENT DESCRIPTION.....		5
2.2 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....		5
2.3 LABELING REQUIREMENTS.....		5
3.0 DESCRIPTION OF TEST		6
3.1 CONDUCTED EMISSIONS.....		6
3.2 RADIATED EMISSIONS		7
4.0 ANTENNA REQUIREMENTS.....		8
5.0 TEST EQUIPMENT CALIBRATION DATA.....		9
6.0 TEST RESULTS		10
6.1 SUMMARY		10
6.2 26DB BANDWIDTH MEASUREMENT		11
6.3 OUTPUT POWER MEASUREMENT – UNII-II BAND		13
6.4 PEAK POWER SPECTRAL DENSITY.....		14
6.5 PEAK EXCURSION RATIO		17
6.6 FREQUENCY STABILITY.....		19
6.7 RADIATED MEASUREMENTS.....		20
6.8 RADIATED RESTRICTED BAND MEASUREMENTS		24
6.9 LINE-CONDUCTED TEST DATA.....		25
7.0 CONCLUSION		27

FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30	Page 2 of 27	



MEASUREMENT REPORT

FCC Part 15.407



§ 2.1033 General Information

APPLICANT: Panasonic Corporation of North America

APPLICANT ADDRESS: One Panasonic Way, 4B-8
Secaucus, NJ 07094

TEST SITE: PCTEST ENGINEERING LABORATORY, INC.

TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA

FCC RULE PART(S): Part 15.407

MODEL NAME: CF-30

FCC ID: ACJ9TGCF-301

Test Device Serial No.: N/A Production Pre-Production Engineering


FCC CLASSIFICATION: Unlicensed National Information Infrastructure (UNII)

DATE(S) OF TEST: May 10 - 11, 2007



TEST REPORT S/N: 0705140457.ACJ

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC-2451).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025:2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30	Page 3 of 27	

1.0 INTRODUCTION

1.1 Evaluation Procedure

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2003) and FCC Public Notice DA 02-2138 dated August 30, 2002 entitled "Measurement Procedure Updated for Peak Transmit Power in the Unlicensed National Information Infrastructure (U-NII) Bands" were used in the measurement of **Panasonic Toughbook Model: CF-30 FCC ID: ACJ9TGCF-301**.

Deviation from measurement procedure.....None.

1.2 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.3 PCTEST Test Location

The map at the right shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity area, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 and Industry Canada on January 27, 2006.

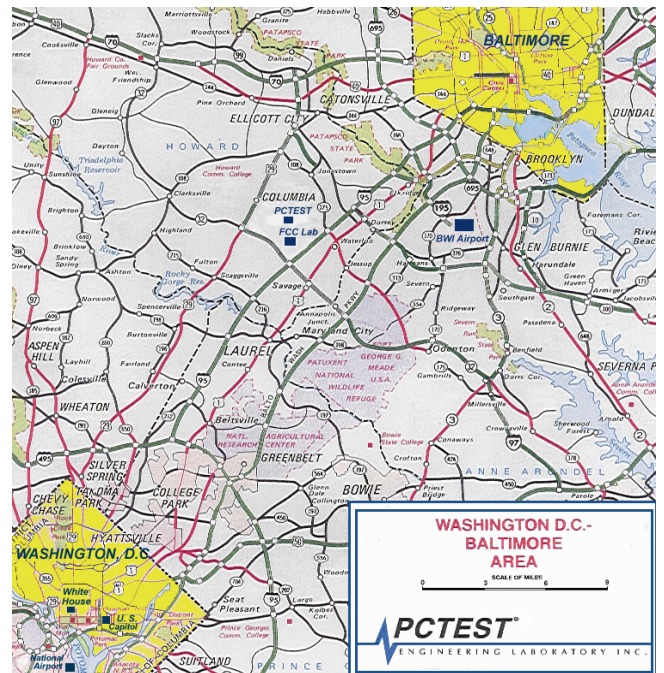


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30		Page 4 of 27

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Panasonic Toughbook Model: CF-30 FCC ID: ACJ9TGCF-301**. The EUT consisted of the following component(s):

Manufacturer / Model	FCC ID	Description
Panasonic / Model: CF-30	ACJ9TGCF-301	Toughbook Model: CF-30
Intel PRO / Model: WM3945ABG	PD9WM3945ABG	WLAN Module
Taiyo Yuden / Model: EYSF1CSMX	N/A	Bluetooth Module
Sierra Wireless / Model: EM5625D	N7N-EM5625D	EvDO Modem Module

Table 2-1. EUT Equipment Description

Note: This report contains data pertaining only to the second UNII band (5.25GHz – 5.35GHz)

2.2 EMI Suppression Device(s)/Modifications



No EMI suppression device(s) were added and/or no modifications were made during testing.

2.3 Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30	Page 5 of 27	

3.0 DESCRIPTION OF TEST

3.1 Conducted Emissions



Figure 3-1. Shielded Enclosure Line-Conducted Test Facility



Figure 3-2. Line Conducted Emission Test Set-Up



Figure 3-3. Wooden Table & Bonded LISNs

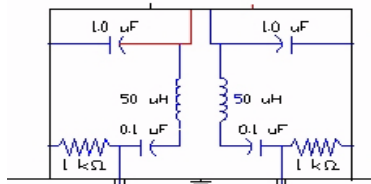


Figure 3-4. LISN Schematic Diagram

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure, manufactured by Ray Proof Series 81 (see *Figure 3-1*). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the sidewall of the shielded room (see *Figure 3-2*). Solar Electronics and EMCO Model 3725/2 (10kHz-30MHz) 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (see *Figure 3-3*). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filter (100dB 14Hz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with an inner diameter of ½". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the Solar LISN. The LISN schematic diagram is shown (see *Figure 3-4*). All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to CISPR quasi-peak and average mode. The bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in the test setup photographs. Each EME reported was calibrated using the Agilent E8257D (250kHz – 20GHz) PSG Signal Generator.

FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30		Page 6 of 27

3.2 Radiated Emissions



Figure 3-5. 3-Meter Test Site



Figure 3-6. Dimensions of Outdoor Test Site

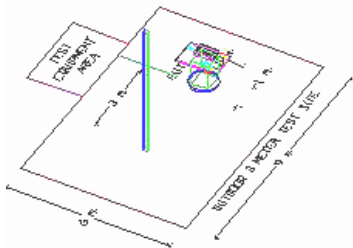


Figure 3-7. Turntable and System Setup

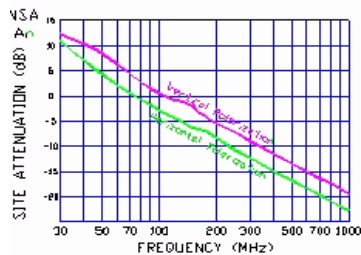


Figure 3-8. Normalized Site Attenuation Curves (H&V)

Preliminary measurements were made indoors at 1-meter using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, and turntable azimuth with respect to the antenna was noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using a bi-conical antenna and from 200 to 1000 MHz using a log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using Roberts™ Dipole antennas or horn antennas (see Figure 3-5). The test equipment was placed on a wooden and plastic bench situated on a 1.5m x 2m area adjacent to the measurement area (see Figure 3-6). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 100kHz for frequencies below 1GHz or 1MHz for frequencies above 1GHz. Above 1GHz the detector function was set to average mode (RBW = 1MHz, VBW = 10Hz).

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see Figure 3-7). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in the test setup photographs. Each EME reported was calibrated using the Agilent E8257D (250kHz – 20GHz) PSG Signal Generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 3-8.

FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30		Page 7 of 27

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Toughbook Model: CF-30 are **permanently attached**.



Conclusion:

The **Panasonic Toughbook Model: CF-30 FCC ID: ACJ9TGCF-301** unit complies with the requirement of §15.203.

High Band

Ch.	Frequency (MHz)
52	5260
:	:
56	5280
:	:
64	5320

Table 4.1 Frequency/ Channel Operations



FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30	Page 8 of 27	

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model / Equipment	Calibration Date	Cal Interval	Calibration Due	Serial No.
Agilent	E4407B ESA Spectrum Analyzer	04/29/07	Annual	04/28/08	US39210313
Agilent	N4010A Wireless Connectivity Test Set	06/11/06	Annual	06/11/07	GB46170464
EMCO	Model 3115 (1-18GHz) Horn Antenna	08/24/06	Biennial	08/23/08	9203-2178
EMCO	Model 3115 (1-18GHz) Horn Antenna	08/25/06	Biennial	08/24/08	9704-5182
Rohde & Schwarz	NRVS Power Meter	06/01/05	Biennial	06/01/07	835360/079
Rohde & Schwarz	NRV-Z53 Power Sensor	06/01/05	Biennial	06/01/07	846076/007
Agilent	HP 8566B (100Hz-22GHz)	12/21/06	Annual	12/21/07	3638A08713
Agilent	HP 8591A (9kHz-1.8GHz)	09/20/06	Annual	09/20/07	3144A02458
Agilent	E4448A (3Hz-50GHz)	09/22/06	Annual	09/22/07	US42510244
Gigatronics	80701A (0.05-18GHz) Power Sensor	08/04/06	Annual	08/04/07	1835299
Ailtech/Eaton	NM 37/57A (30MHz-1GHz)	06/07/06	Annual	06/07/07	0805-03334
Agilent	HP 85650A Quasi-Peak Adapter	12/21/06	Annual	12/21/07	2043A00301
Agilent	HP 8449B (1-26.5GHz) Pre-Amplifier	12/12/06	Annual	12/12/07	3008A00985
Agilent	HP 11713A Attenuation/Switch Driver	12/12/06	Annual	12/12/07	N/A
Agilent	HP 85685A (20Hz-2GHz) Preselector	12/12/06	Annual	12/12/07	N/A
Agilent	HP 8566B Opt. 462 Impulse Bandwidth	12/12/06	Annual	12/12/07	3701A22204
EMCO	3115 (1-18GHz) Horn Antenna	08/25/05	Biennial	08/25/07	9205-3874
Compliance Design	A100 Roberts Dipoles	08/31/05	Biennial	08/31/07	5118
EMCO	Dipole Pair	09/21/06	Biennial	09/20/08	23951
SOLAR	8012-50 LISN (2)	11/18/05	Biennial	11/18/07	0313233, 0310234
-	No.165 (30MHz - 1000MHz) RG58 Coax Cable	N/A		N/A	N/A
-	No.166 (1000-26500MHz) Microwave RF Cable	N/A		N/A	N/A
-	No.167 (100kHz - 100MHz) RG58 Coax Cable	N/A		N/A	N/A

Table 5-1. Annual Test Equipment Calibration Schedule

FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30	Page 9 of 27	



6.0 TEST RESULTS

6.1 Summary

Company Name: Panasonic Corporation of North America
 FCC ID: ACJ9TGCF-301
 Method/System: Unlicensed National Information Infrastructure (UNII)
 Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps

FCC Part Section(s)	RSS Section	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (Tx)						
N/A	RSS-210 [A8.2 (1)]	26 dB Bandwidth	> 500kHz	CONDUCTED	PASS	Section 6.2
15.407 (a)(1)	RSS-210 [A9.2 (1)]	Maximum Conducted Output Power	< 11 + 10log ₁₀ (B) dBm (5250-5350) (IC: < 11 + 10log ₁₀ (BW) dBm)		PASS	Section 6.3
15.407 (a)(1), (5)	RSS-210 [A9.2 (1)]	Peak Power Spectral Density	< 11dBm/MHz (5250-5350) (IC: < 11 dBm)		PASS	Section 6.4
15.407(a)(6)	N/A	Peak Excursion	< 13 dB/MHz maximum difference		PASS	Section 6.5
15.407(g)	RSS-210 [A9.5 (e)]	Frequency Stability	< ± 10ppm (IC)		PASS	Section 6.6
15.407(b)(1), (6)	RSS-210 [A9.3 (1)]	Undesirable Emissions	< -27 dBm/MHz EIRP (5150-5350)	RADIATED	PASS	Section 6.7
15.205, 15.407(b)(1), (5), (6)	RSS-210 [A8.5]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Radiated < 20dBc. Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-210 table 3 limits)		PASS	Section 6.8
15.207	RSS-Gen [7.2.2]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits or < RSS-Gen table 2 limits		LINE CONDUCTED	PASS
RECEIVER MODE (Rx) / DIGITAL DEVICE						
15.107	RSS-Gen [7.2.2]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.107 limits or < RSS-Gen table 2 limits	LINE CONDUCTED	PASS	Part 15B Test Report
15.109	RSS-Gen [7.2.3.2]	General Field Strength Limits (Restricted Bands and Radiated Emissions Limits)	< FCC 15.109 limits or < RSS-210 table 3 limits	RADIATED (30MHz-1GHz) (1-25 GHz)	PASS	Part 15B Test Report
RF EXPOSURE						
15.407(f), 2.1093/2.1091	RSS-102	MPE Test	1.0mW/cm ²	MPE	PASS	MPE Report

Table 6-1. Summary of Test Results

FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30	Page 10 of 27	

6.2 26dB Bandwidth Measurement

§15.407 (a)(1)

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Frequency	Channel No.	Measured 26dB Bandwidth [MHz]
5260	52	21.180
5280	56	20.226
5320	64	21.018

Table 6-2. Conducted Bandwidth Measurements


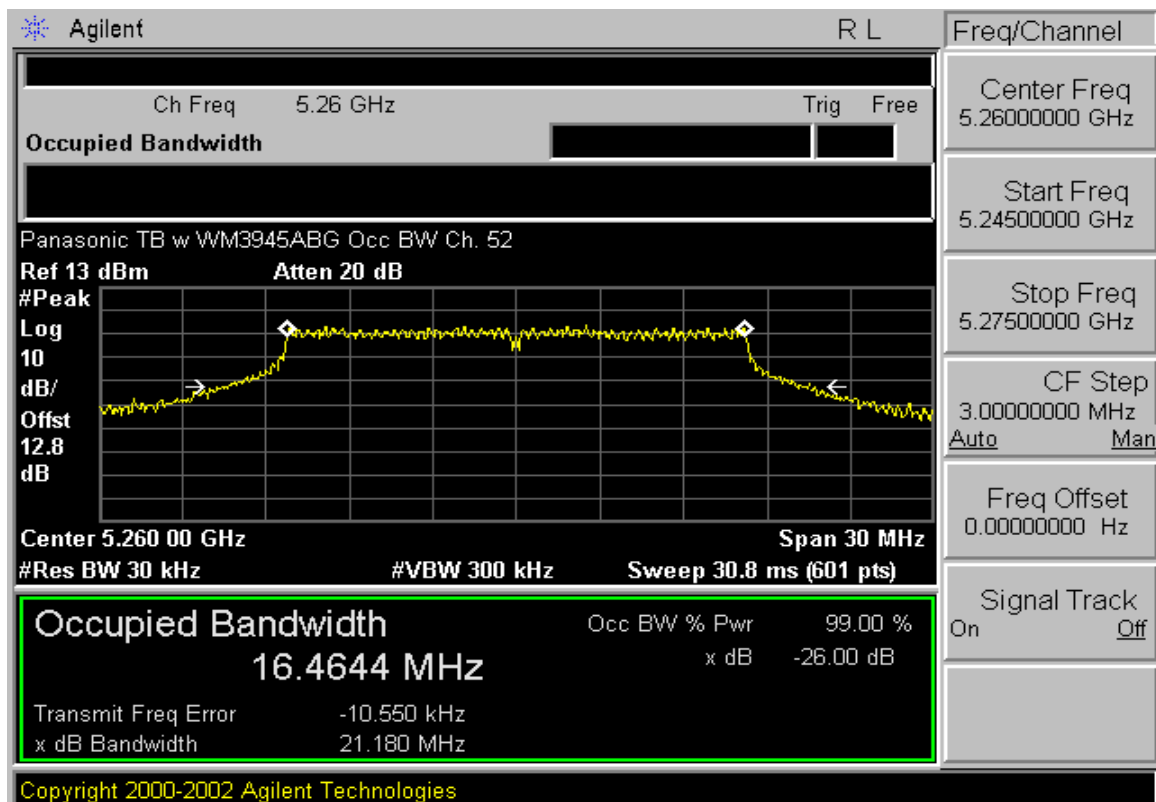
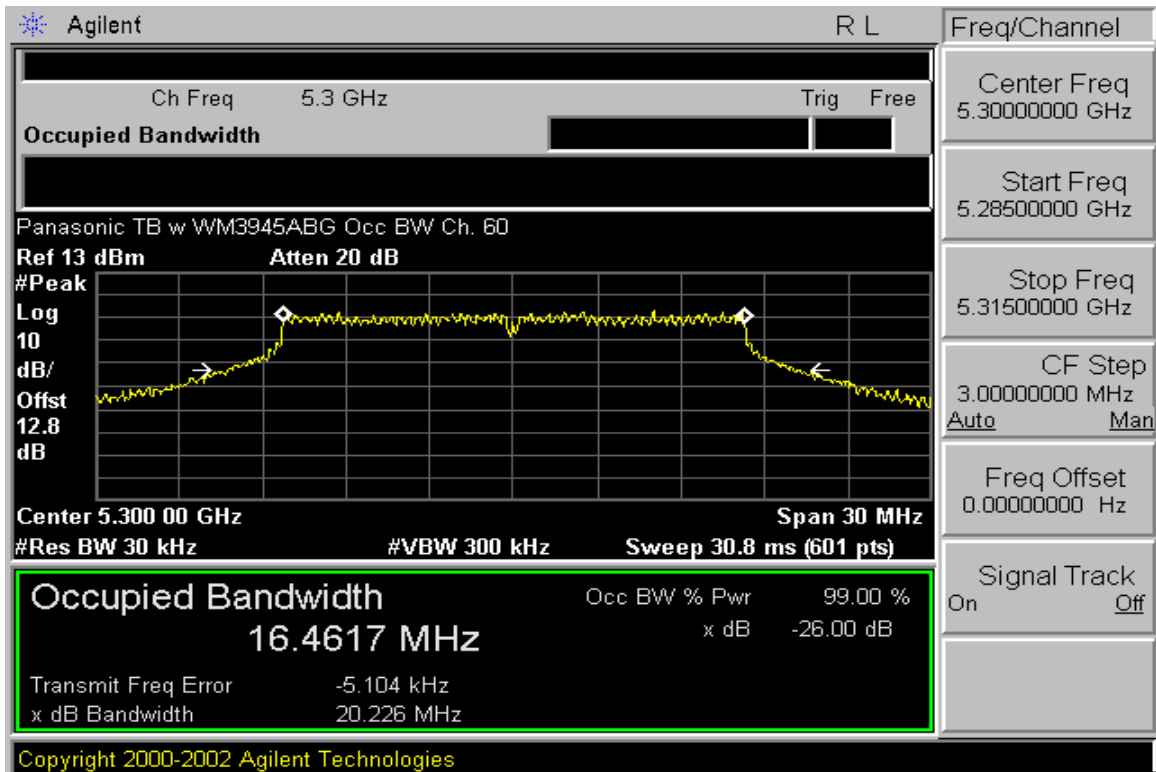


Figure 6-1. Test Instrument & Measurement Setup

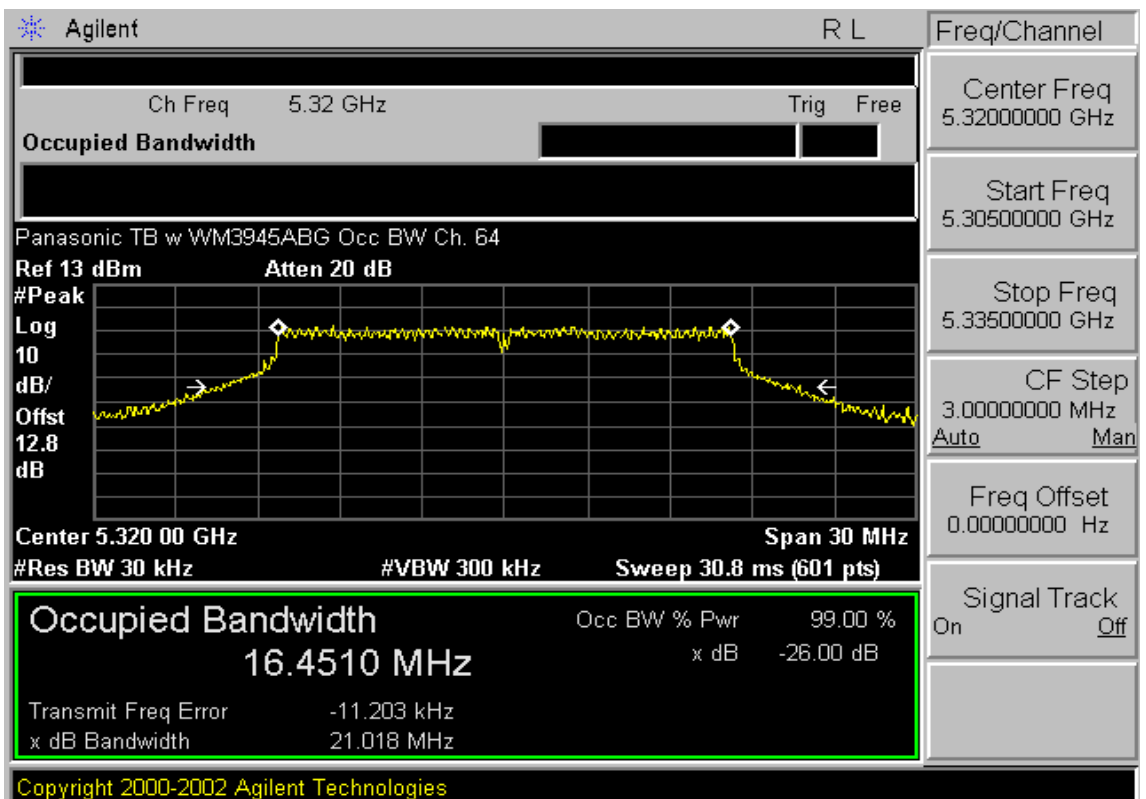


Plot 6-1. 26dB Bandwidth Plot (802.11a (UNII) – Ch. 52)

FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30		Page 11 of 27



Plot 6-2. 26dB Bandwidth Plot (802.11a (UNII) – Ch. 56)



Plot 6-3. 26dB Bandwidth Plot (802.11a (UNII) – Ch. 64)

FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30		Page 12 of 27

6.3 Output Power Measurement – UNII-II Band §15.407 (a)(1); RSS-210 [A9.2(1)]

A transmitter antenna terminal of EUT is connected to the input of a RF power sensor. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies. **The maximum permissible conducted output power for the 5.25GHz – 5.35GHz band is the lesser of 250mW or 11 dBm + 10log₁₀(26dB BW).**

Freq [MHz]	Channel	Data Rate [Mbps]	Main Ant. Measured Power [dBm]	Aux Ant. Measured Power [dBm]
5260	52	6	11.38	11.05
		9	11.05	10.98
		12	10.92	10.85
		18	10.61	10.63
		24	10.19	10.26
		36	9.69	9.72
5280	56	6	11.31	11.01
		9	10.97	10.91
		12	10.83	10.73
		18	10.47	10.48
		24	10.11	10.11
		36	9.71	9.64
		48	9.12	9.15
		54	6.56	6.73

Table 6-3. Conducted Output Power Measurements

Freq [MHz]	Channel	Data Rate [Mbps]	Main Ant. Measured Power [dBm]	Aux Ant. Measured Power [dBm]
5320	64	6	11.25	10.97
		9	10.61	10.54
		12	10.67	10.48
		18	10.46	10.41
		24	10.42	10.17
		36	9.50	9.43
		48	9.14	9.11
		54	7.10	6.98

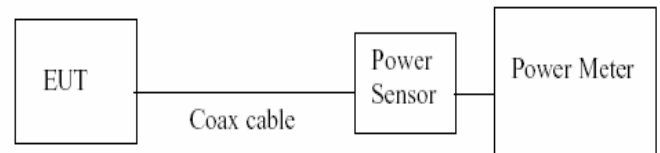


Figure 6-2. Test Instrument & Measurement Setup

6.4 Peak Power Spectral Density

§15.407 (a)(1),(5); RSS-210 [A9.2(1)]

The spectrum analyzer was connected to the antenna terminal while the EUT was operating in a continuous transmission mode at the appropriate center frequencies. **The maximum permissible peak power spectral density is 11 dBm/MHz in the 5.25GHz – 5.35GHz band (11 dBm/MHz for Industry Canada)**

Frequency [MHz]	Channel No.	Measured Power Density [dBm]	Maximum Permissible Power Density [dBm/MHz]	Margin [dB]
5260	52	1.455	11.0	-9.5
5280	56	-0.048	11.0	-11.0
5320	64	0.006	11.0	-11.0

Table 6-4. Conducted Power Spectral Density Measurements




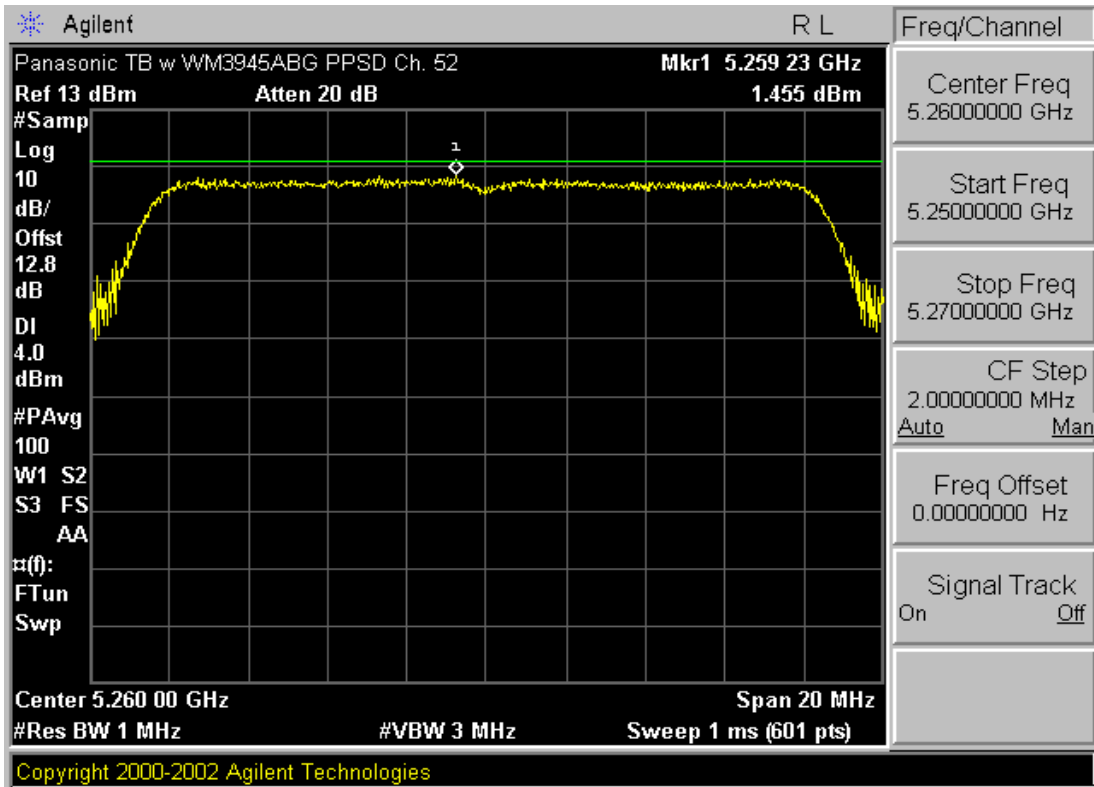
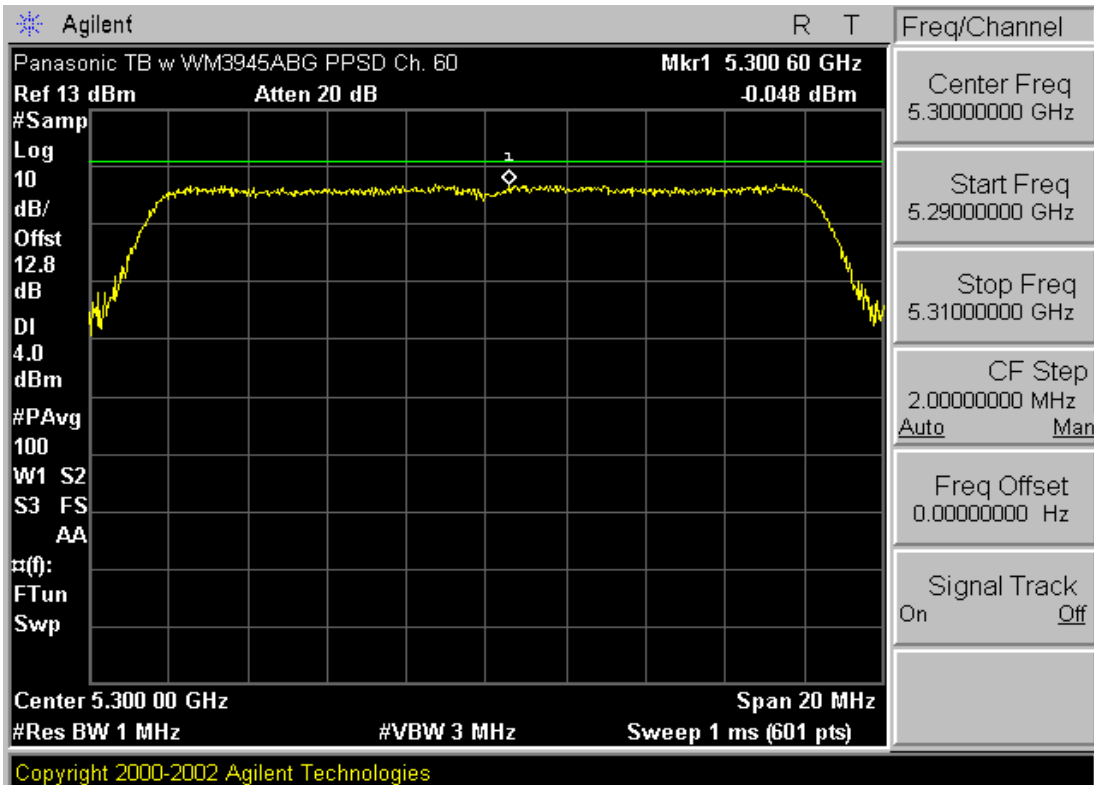


Figure 6-3. Test Instrument & Measurement Setup

FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30	Page 14 of 27	

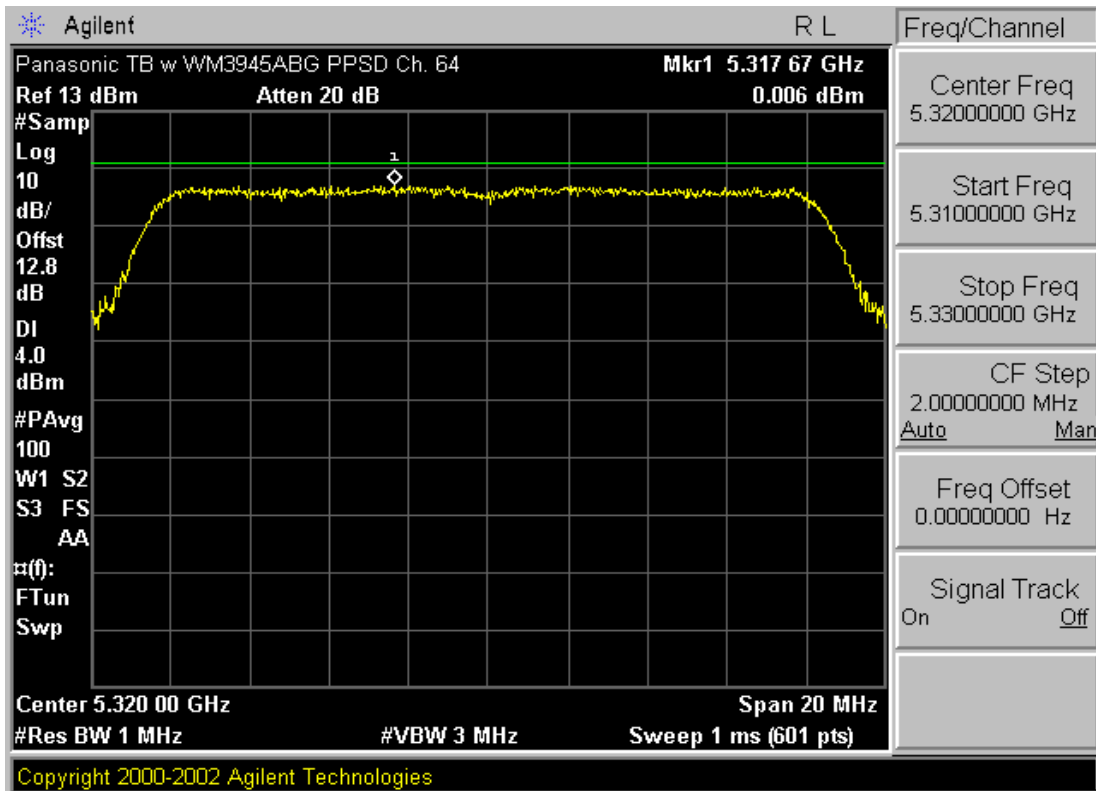


Plot 6-4. Peak Power Spectral Density Plot (802.11a (UNII) – Ch. 52)



Plot 6-5. Peak Power Spectral Density Plot (802.11a (UNII) – Ch. 56)

FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30		Page 15 of 27



Plot 6-6. Peak Power Spectral Density Plot (802.11a (UNII) – Ch. 64)

FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30		Page 16 of 27

6.5 Peak Excursion Ratio

§15.407(a)(6)

The spectrum analyzer was connected to the antenna terminal while the EUT was operating in the continuous transmission mode at the appropriate center frequencies. **The largest permissible difference between the modulation envelope to the peak transmit power shall not exceed 13 dBm/MHz.**

Frequency [MHz]	Channel No.	Measured Peak Excursion Ratio [dBm]	Maximum Permissible Peak Excursion Ratio [dBm/MHz]	Margin [dB]
5260	52	10.47	13.0	-2.5
5280	56	9.80	13.0	-3.2
5320	64	10.35	13.0	-2.7

Table 6-5. Conducted Peak Excursion Ratio Measurements


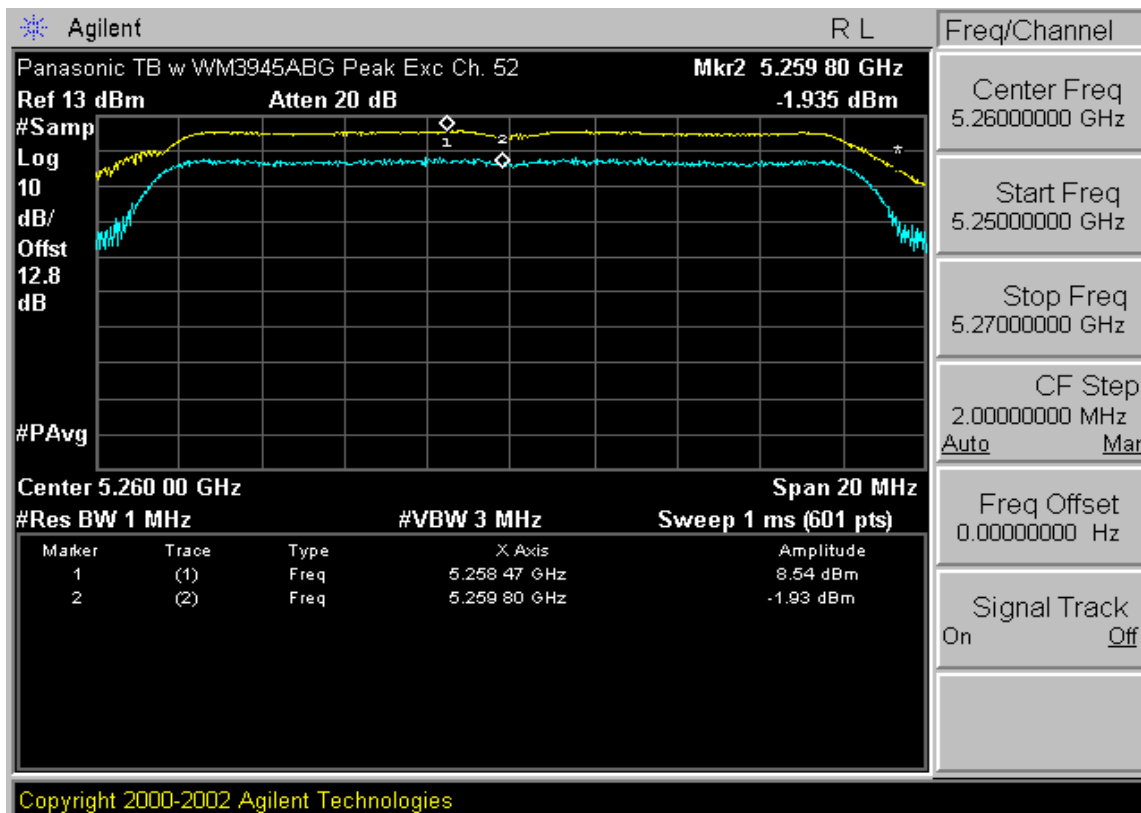
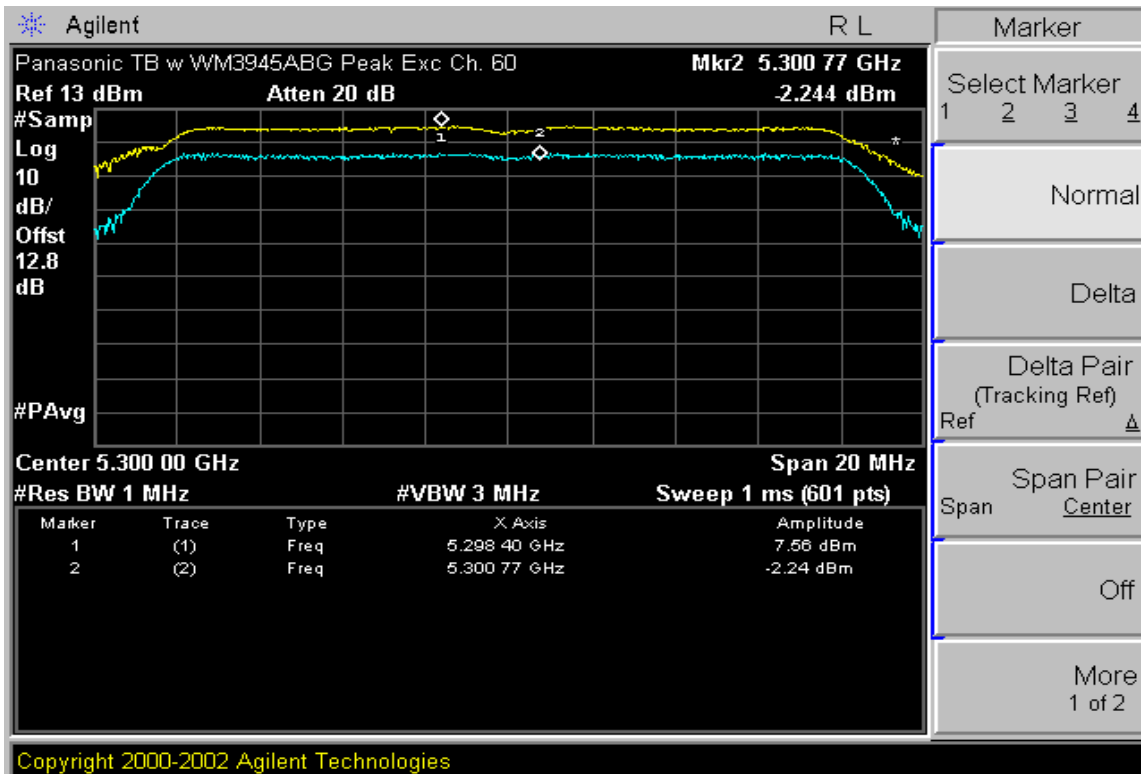


Figure 6-4. Test Instrument & Measurement Setup

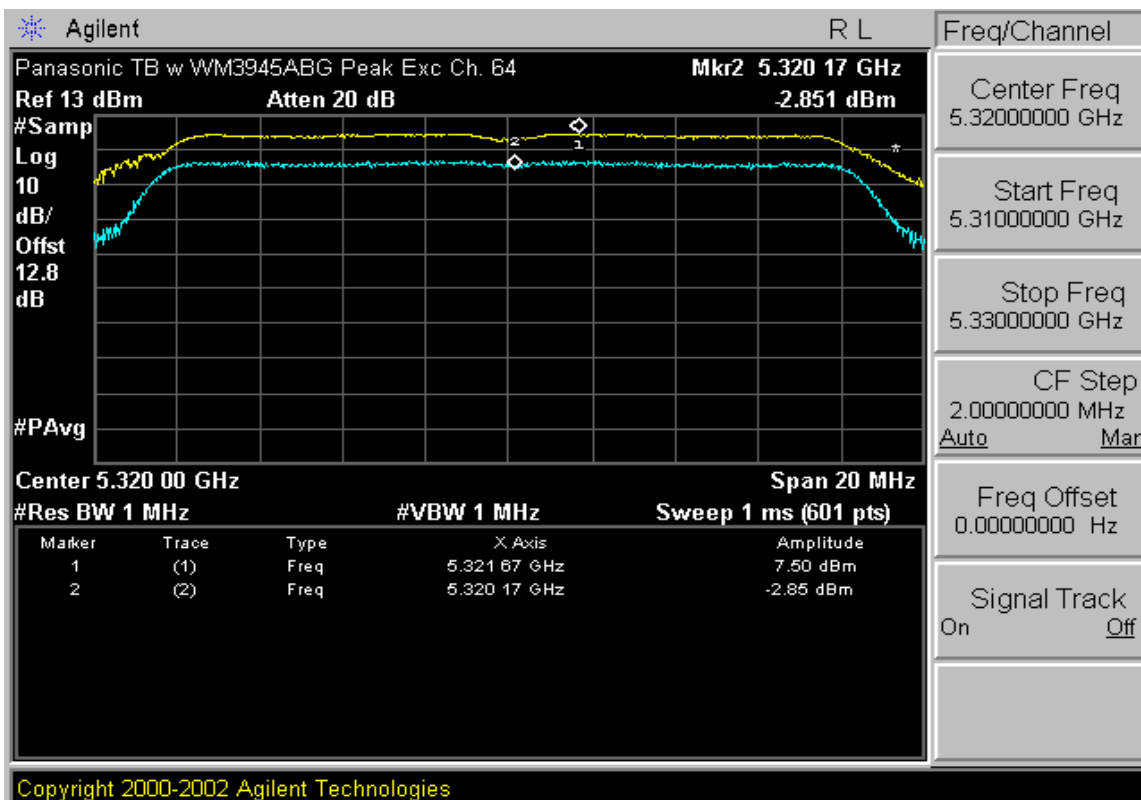


Plot 6-7. Peak Excursion Ratio Plot (802.11a (UNII) – Ch. 52)

FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30		Page 17 of 27



Plot 6-8. Peak Excursion Ratio Plot (802.11a (UNII) – Ch. 56)



Plot 6-9. Peak Excursion Ratio Plot (802.11a (UNII) – Ch. 64)

FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30		Page 18 of 27



6.6 Frequency Stability

§15.407(g) / RSS-210 [A9.5(e)]

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.

OPERATING FREQUENCY: 5,280,000,000 Hz
 CHANNEL: 56
 REFERENCE VOLTAGE: 10.65 VDC
 DEVIATION LIMIT: ± 0.00100 % or 10 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQ. (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	10.65	+ 20 (Ref)	5,280,000,766	766	0.000015
100 %		- 30	5,279,995,612	-4,388	-0.000083
100 %		- 20	5,279,998,598	-1,402	-0.000027
100 %		- 10	5,279,992,320	-7,680	-0.000145
100 %		0	5,279,991,983	-8,017	-0.000152
100 %		+ 10	5,279,994,385	-5,615	-0.000106
100 %		+ 20	5,279,996,047	-3,953	-0.000075
100 %		+ 30	5,280,004,690	4,690	0.000089
100 %		+ 40	5,280,009,751	9,751	0.000185
100 %		+ 50	5,280,006,447	6,447	0.000122
115 %		12.25	+ 20	5,279,999,349	-651
BATT. ENDPOINT	8.32	+ 20	5,279,995,515	-4,485	-0.000085

Table 6-6. Frequency Stability Measurements for UNII Band Ch. 56

FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30		Page 19 of 27



6.7 Radiated Measurements

§15.407(b)(1), (6), §15.209; RSS-210 [A8.5]

The EUT was tested from 9kHz to the tenth harmonic of the fundamental frequency of the transmitter. Below 1GHz a CISPR quasi peak detector was used. Above 1 GHz average measurements were taken, using RBW= 1MHz, VBW= 10Hz, and linearly polarized horn antennas. In addition, peak measurements (RBW= 1MHz, VBW= 1MHz) were taken to ensure that the peak levels are not more than 20dB above the average limit. No harmonics/spurs peak emissions are more than 20dB above the average limit. Special attention is taken for the EUT's harmonic and spurious radiated emissions in the restricted bands of operations, as defined in Section 15.205.

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 6-7. Radiated Limits

FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30	Page 20 of 27	



Radiated Measurements (Cont'd)
§15.407(b)(1) and (2), §15.209

Mode: 802.11a
 Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol. [H/V]	Field Strength [dB μV/m]	Field Strength [μV/m]	Margin [dB]
10520.00	-104.62	40.6	V	43.0	140.9	-25.22
* 15780.00	-110.28	45.8	V	42.5	133.7	-11.46
* 21040.00	-135.00	49.6	V	21.6	12.0	-32.38
26300.00	-135.00	52.1	V	24.1	16.0	-44.10

Table 6-8. Radiated Measurements @ 3 meters

NOTES:

- All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table 6-7. (Note: * = Restricted Band measured frequency)
- All harmonics/spurs not in a restricted band are below -27 dBm/MHz.
- Average Measurements > 1GHz using RBW = 1MHz VBW = 10Hz
- The peak emissions above 1GHz are not more than 20dB above the average limit.
- The antenna is manipulated through typical positions, polarity and length during the tests.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
- < - 135 dBm are below the analyzer floor level.
- Above 960 MHz, the radiated limit is 500 μV/m (54dBμ/m) at 3 meters in the restricted bands.

FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30		Page 21 of 27



Radiated Measurements (Cont'd)
§15.407(b)(1) and (2), §15.209

Mode: 802.11a
 Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol. [H/V]	Field Strength [dB μV/m]	Field Strength [μV/m]	Margin [dB]
10560.00	-103.44	40.50	V	44.06	159.6	-24.14
* 15840.00	-108.33	47.30	V	45.97	198.8	-8.01
* 21120.00	-135.00	50.05	V	22.05	12.7	-31.93
26400.00	-135.00	52.50	V	24.50	16.8	-43.70

Table 6-9. Radiated Measurements @ 3 meters

NOTES:

- All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table 6-7. (Note: * = Restricted Band measured frequency)
- All harmonics/spurs not in a restricted band are below -27 dBm/MHz.
- Average Measurements > 1GHz using RBW = 1MHz VBW = 10Hz
- The peak emissions above 1GHz are not more than 20dB above the average limit.
- The antenna is manipulated through typical positions, polarity and length during the tests.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
- < - 135 dBm are below the analyzer floor level.
- Above 960 MHz, the radiated limit is 500 μV/m (54dBμ/m) at 3 meters in the restricted bands.

FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30	Page 22 of 27	



Radiated Measurements (Cont'd)
§15.407(b)(1) and (2), §15.109

Mode: 802.11a
 Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

	Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol. [H/V]	Field Strength [dB μV/m]	Field Strength [μV/m]	Margin [dB]
*	10640.00	-103.85	40.60	V	43.75	154.0	-10.23
*	15960.00	-109.19	45.90	V	43.71	153.3	-10.27
*	21280.00	-135.00	49.39	V	21.39	11.7	-32.59
	26600.00	-135.00	53.35	V	25.35	18.5	-42.85

Table 6-10. Radiated Measurements @ 3 meters

NOTES:

- All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table 6-7. (Note: * = Restricted Band measured frequency)
- All harmonics/spurs not in a restricted band are below -27 dBm/MHz.
- Average Measurements > 1GHz using RBW = 1MHz VBW = 10Hz
- The peak emissions above 1GHz are not more than 20dB above the average limit.
- The antenna is manipulated through typical positions, polarity and length during the tests.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
- < - 135 dBm are below the analyzer floor level.
- Above 960 MHz, the radiated limit is 500 μV/m (54dBμ/m) at 3 meters in the restricted bands.

FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30		Page 23 of 27



6.8 Radiated Restricted Band Measurements §15.407(b)(1) and (2), §15.109

Note:

Special attention is paid to the EUT's harmonic and spurious radiated emissions in the restricted bands of operations.

Mode: 802.11a
 Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol. [H/V]	Field Strength [dBμV/m]	Field Strength [μV/m]	Margin [dB]
5350.42	-110.6	40.30	V	36.70	68.39	-17.28
5352.41	-111.7	40.31	V	35.61	60.29	-18.37
5353.18	-110.9	40.32	V	36.41	66.15	-17.57
5354.97	-111.1	40.57	V	36.46	66.49	-17.52
5356.53	-110.3	40.57	V	37.25	72.86	-16.73
5357.66	-109.9	40.58	V	37.66	76.34	-16.32

Table 6-11. Radiated Restricted Band Measurements at 3-meters

NOTES:

1. The antenna is manipulated through typical positions, polarity and length during the testing.
2. The EUT is supplied with the minimal AC voltage or/and a new/fully re-charged battery.
3. The spectrum is measured from 9 kHz up to the 10th harmonic and the worst-case emissions are reported.
4. Above 1 GHz the limit is 500μV/m.
5. < -135 dBm is below the analyzer measurement floor level.
6. The data in the table are Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
7. The peak emissions above 1 GHz are not more than 20 dB above the average limit.

FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30		Page 24 of 27

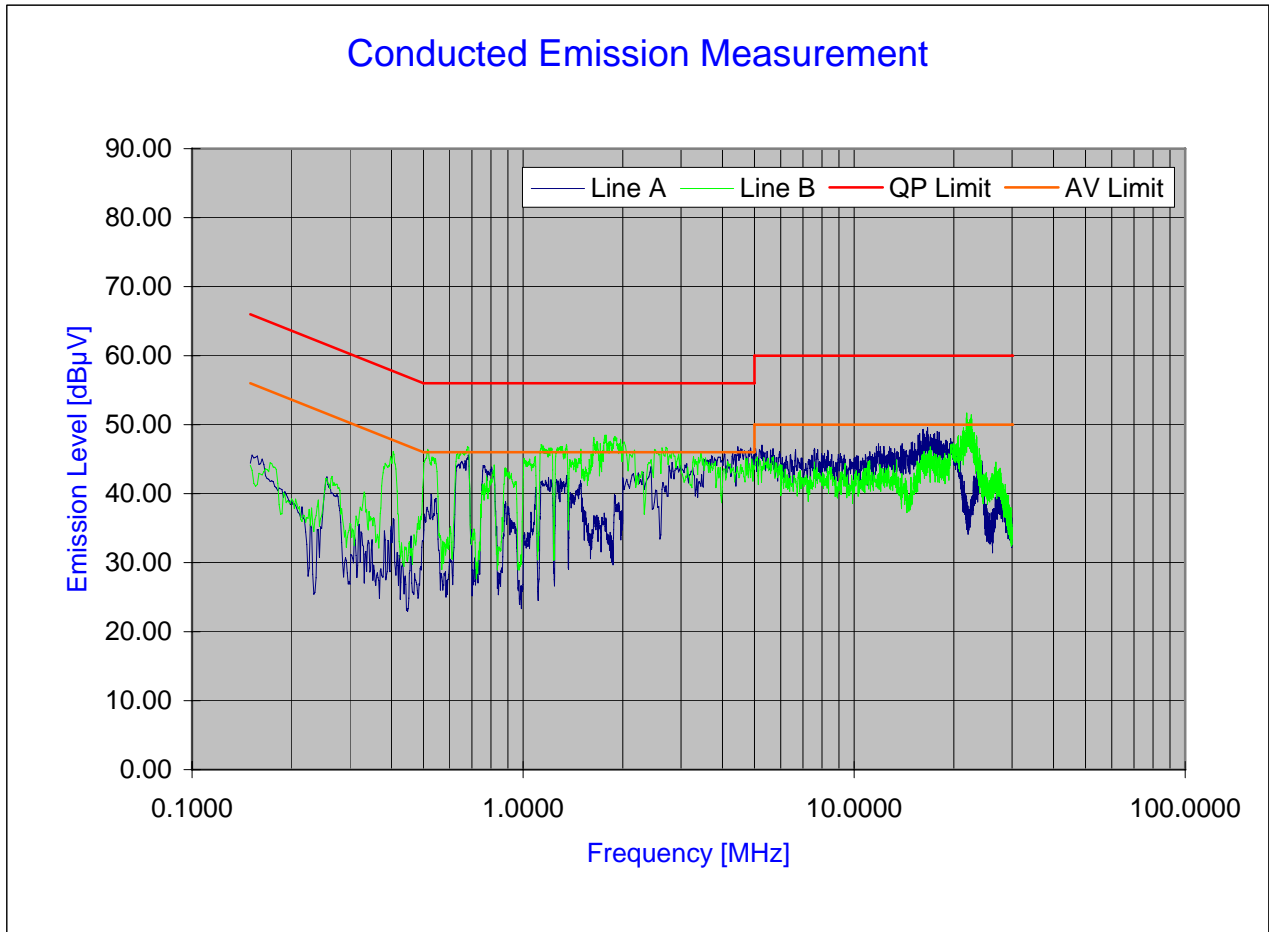


6.9 Line-Conducted Test Data
 §15.107; RSS-Gen(7.2.2)

PCTEST Engineering Laboratory Inc.

Company : Panasonic Corporation
 Model Number : CF-30
 FCC ID Code : ACJ9TGCF-301
 Standard : FCC Part 15B class B

Power Source : AC120V/60Hz
 Tested Date : 05/11/2007
 Note : Tested w/ WLAN a ON



Ver.1.1 ©PCTEST 2006.08

Plot 6-10. Line Conducted Plot with 802.11a (UNII Band)

Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot made using a peak detector.
5. Deviations to the Specifications: None.

FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30		Page 25 of 27

Line-Conducted Test Data (Cont'd)



§15.107; RSS-Gen(7.2.2)

Nb.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	0.681	7.38	43.81	56.00	-12.19	30.92	46.00	-15.08
2	A	4.073	7.48	42.89	56.00	-13.11	25.73	46.00	-20.27
3	A	4.400	7.49	42.90	56.00	-13.10	28.47	46.00	-17.53
4	A	4.887	7.51	43.74	56.00	-12.26	26.74	46.00	-19.26
5	A	15.687	7.91	44.01	60.00	-15.99	33.28	50.00	-16.72
6	A	16.151	7.93	44.08	60.00	-15.92	32.28	50.00	-17.72
7	A	16.154	7.93	44.69	60.00	-15.31	32.16	50.00	-17.84
8	A	16.467	7.94	43.77	60.00	-16.23	33.76	50.00	-16.24
9	A	16.639	7.95	44.16	60.00	-15.84	32.91	50.00	-17.09
10	A	17.783	8.00	43.90	60.00	-16.10	32.47	50.00	-17.53
11	B	1.135	7.32	45.16	56.00	-10.84	31.09	46.00	-14.91
12	B	1.355	7.34	45.48	56.00	-10.52	30.10	46.00	-15.90
13	B	1.633	7.36	45.43	56.00	-10.57	29.47	46.00	-16.53
14	B	1.764	7.37	46.88	56.00	-9.12	28.10	46.00	-17.90
15	B	1.886	7.38	46.71	56.00	-9.29	34.73	46.00	-11.27
16	B	1.887	7.38	46.67	56.00	-9.33	35.09	46.00	-10.91
17	B	1.903	7.38	45.34	56.00	-10.66	26.34	46.00	-19.66
18	B	21.797	8.19	45.89	60.00	-14.11	35.20	50.00	-14.80
19	B	21.907	8.20	45.62	60.00	-14.38	35.89	50.00	-14.11
20	B	22.536	8.24	45.50	60.00	-14.50	35.35	50.00	-14.65

Table 6-12. Line Conducted Data with 802.11a (UNII Band)



Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot made using a peak detector.
5. Deviations to the Specifications: None.

FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30	Page 26 of 27	

7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Panasonic Toughbook Model: CF-30** **FCC ID: ACJ9TGCF-301** is in compliance with Part 15E of the FCC Rules.

FCC ID: ACJ9TGCF-301		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0705140457.ACJ	Test Dates: May 10 - 11, 2007	EUT Type: Toughbook Model: CF-30	Page 27 of 27	