



PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA
Tel. 410.290.6652 / Fax 410.290.6554
http://www.pctestlab.com



CERTIFICATE OF COMPLIANCE FCC PART 15.407 Certification

Applicant Name:
Panasonic Corporation of North America
One Panasonic Way, 4B-8
Secaucus, NJ 07094
United States

Date of Testing:
August 13 - 14, 2007
Test Site/Location:
PCTEST Lab, Columbia, MD, USA
Test Report Serial No.:
0708020815.ACJ

FCC ID:	ACJ9TGCF-306
APPLICANT:	Panasonic Corporation of North America

Model(s): CF-30
EUT Type: Toughbook Model: CF-30
Max. RF Output Power: 20.42mW (13.10 dBm) Conducted (UNII Low Band)
 18.24mW (12.61 dBm) Conducted (UNII High Band)
Frequency Range: 5180MHz – 5240MHz (UNII Low Band)
 5260MHz – 5320MHz (UNII High Band)
FCC Classification: Unlicensed National Information Infrastructure (UNII)
FCC Rule Part(s): Part 15.407
Test Device Serial No.: 7FKSA00092

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C-63.4-2003. If the EUT contains any additional embedded transmitters, then those transmitters were active during all tests. The JBC portion of this EUT is covered in the DOC report. Radiated data was taken with the highest gain antenna.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Grant Conditions: Listed output power is conducted.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.


 Randy Ortanez
 President







FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30	Page 1 of 27	



TABLE OF CONTENTS

FCC PART 15.407 MEASUREMENT REPORT.....	3
1.0 INTRODUCTION.....	4
1.1 EVALUATION PROCEDURE.....	4
1.2 SCOPE.....	4
1.3 PCTEST TEST LOCATION.....	4
2.0 PRODUCT INFORMATION.....	5
2.1 EQUIPMENT DESCRIPTION.....	5
2.2 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....	5
2.3 LABELING REQUIREMENTS.....	5
3.0 DESCRIPTION OF TEST.....	6
3.1 CONDUCTED EMISSIONS.....	6
3.2 RADIATED EMISSIONS.....	7
4.0 ANTENNA REQUIREMENTS.....	8
5.0 TEST EQUIPMENT CALIBRATION DATA.....	9
6.0 TEST RESULTS.....	10
6.1 SUMMARY.....	10
6.2 26DB BANDWIDTH MEASUREMENT.....	11
6.3 OUTPUT POWER MEASUREMENT – UNII BAND (I,II).....	13
6.4 PEAK POWER SPECTRAL DENSITY.....	14
6.5 PEAK EXCURSION RATIO.....	17
6.6 RADIATED SPURIOUS EMISSION MEASUREMENTS.....	19
6.7 RADIATED RESTRICTED BAND EDGE MEASUREMENTS.....	23
6.8 LINE-CONDUCTED TEST DATA.....	25
7.0 CONCLUSION.....	27

FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30	Page 2 of 27	



MEASUREMENT REPORT

FCC Part 15.407



§ 2.1033 General Information

APPLICANT: Panasonic Corporation of North America

APPLICANT ADDRESS: One Panasonic Way, 4B-8
Secaucus, NJ 07094

TEST SITE: PCTEST ENGINEERING LABORATORY, INC.

TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA

FCC RULE PART(S): Part 15.407

MODEL NAME: CF-30

FCC ID: ACJ9TGCF-306

Test Device Serial No.: 7FKSA00092 Production Pre-Production Engineering

FCC CLASSIFICATION: Unlicensed National Information Infrastructure (UNII)

DATE(S) OF TEST: August 13 - 14, 2007

TEST REPORT S/N: 0708020815.ACJ

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC-2451).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30		Page 3 of 27

1.0 INTRODUCTION

1.1 Evaluation Procedure

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2003) and FCC Public Notice DA 02-2138 dated August 30, 2002 entitled "Measurement Procedure Updated for Peak Transmit Power in the Unlicensed National Information Infrastructure (U-NII) Bands were used in the measurement of **Panasonic Toughbook Model: CF-30 FCC ID: ACJ9TGCF-306**.

Deviation from measurement procedure.....None.

1.2 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.3 PCTEST Test Location

The map at the right shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity area, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 and Industry Canada on January 27, 2006.

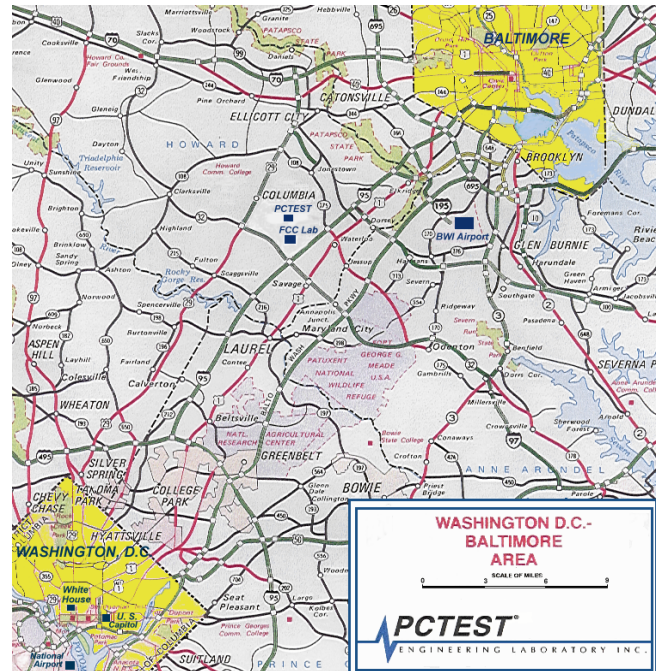


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30		Page 4 of 27

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Panasonic Toughbook Model: CF-30 FCC ID: ACJ9TGCF-306**. The EUT consisted of the following component(s):

Manufacturer / Model	FCC ID	Description
Panasonic / Model: CF-30	ACJ9TGCF-306	Toughbook Model: CF-30
Intel Corp. / Model: 4965AG	PD94965AG	Wireless LAN (802.11a/g) module
Alps Electric / Model: UGNZA	N/A	Bluetooth module with EDR
Novatel Wireless / Model: EU860D	NBZNRM-EU860D	GPRS/EDGE/HSDPA module

Table 2-1. EUT Equipment Description

2.2 EMI Suppression Device(s)/Modifications



No EMI suppression device(s) were added and/or no modifications were made during testing.

2.3 Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30	Page 5 of 27	

3.0 DESCRIPTION OF TEST

3.1 Conducted Emissions



Figure 3-1. Shielded Enclosure Line-Conducted Test Facility



Figure 3-2. Line Conducted Emission Test Set-Up



Figure 3-3. Wooden Table & Bonded LISNs

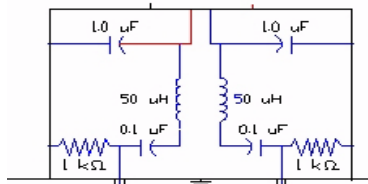


Figure 3-4. LISN Schematic Diagram

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure, manufactured by Ray Proof Series 81 (see *Figure 3-1*). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the sidewall of the shielded room (see *Figure 3-2*). Solar Electronics and EMCO Model 3725/2 (10kHz-30MHz) 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (see *Figure 3-3*). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filter (100dB 14Hz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with an inner diameter of ½". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the Solar LISN. The LISN schematic diagram is shown (see *Figure 3-4*). All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to CISPR quasi-peak and average mode. The bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in the test setup photographs. Each EME reported was calibrated using the Agilent E8257D (250kHz – 20GHz) PSG Signal Generator.

FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30		Page 6 of 27

3.2 Radiated Emissions



Figure 3-5. 3-Meter Test Site

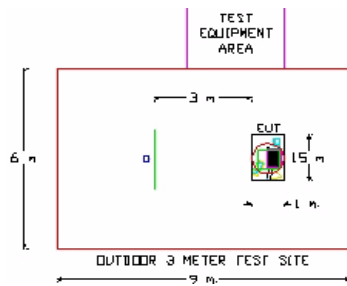


Figure 3-6. Dimensions of Outdoor Test Site

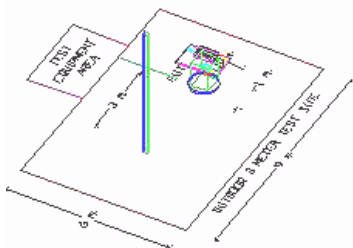


Figure 3-7. Turntable and System Setup

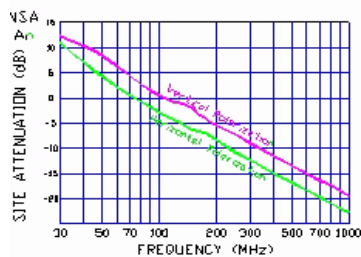


Figure 3-8. Normalized Site Attenuation Curves (H&V)

Preliminary measurements were made indoors at 1-meter using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, and turntable azimuth with respect to the antenna was noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using a bi-conical antenna and from 200 to 1000 MHz using a log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using Roberts™ Dipole antennas or horn antennas (see Figure 3-5). The test equipment was placed on a wooden and plastic bench situated on a 1.5m x 2m area adjacent to the measurement area (see Figure 3-6). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 100kHz for frequencies below 1GHz or 1MHz for frequencies above 1GHz. Above 1GHz the detector function was set to average mode (RBW = 1MHz, VBW = 10Hz).

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see Figure 3-7). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in the test setup photographs. Each EME reported was calibrated using the Agilent E8257D (250kHz – 20GHz) PSG Signal Generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 3-8.

FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30		Page 7 of 27

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Toughbook Model: CF-30 are **permanently attached**.
- There are no provisions for connection to an external antenna for operation in the UNII band. Please refer to Panasonic’s application cover letter for details.

Conclusion:

The **Panasonic Toughbook Model: CF-30 FCC ID: ACJ9TGCF-306** unit complies with the requirement of §15.203.



Low Band

Ch.	Frequency (MHz)
36	5180
:	:
42	5210
:	:
48	5240

High Band

Ch.	Frequency (MHz)
52	5260
:	:
56	5280
:	:
64	5320

Table 4-1. Frequency/ Channel Operations



FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30		Page 8 of 27

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model / Equipment	Calibration Date	Cal Interval	Calibration Due	Serial No.
Agilent	E4407B ESA Spectrum Analyzer	04/29/07	Annual	04/28/08	US39210313
Agilent	N4010A Wireless Connectivity Test Set	06/11/07	Annual	06/10/08	GB46170464
EMCO	Model 3115 (1-18GHz) Horn Antenna	08/24/06	Biennial	08/23/08	9203-2178
EMCO	Model 3115 (1-18GHz) Horn Antenna	08/25/06	Biennial	08/24/08	9704-5182
Rohde & Schwarz	NRVS Power Meter	07/03/07	Biennial	07/02/09	835360/079
Rohde & Schwarz	NRV-Z53 Power Sensor	07/03/07	Biennial	07/02/09	846076/007
Agilent	HP 8566B (100Hz-22GHz) Spectrum Analyzer	12/21/06	Annual	12/21/07	3638A08713
Agilent	HP 8591A (9kHz-1.8GHz) Spectrum Analyzer	09/20/06	Annual	09/20/07	3144A02458
Agilent	E4448A (3Hz-50GHz) Spectrum Analyzer	09/22/06	Annual	09/22/07	US42510244
Agilent	HP 8591A (9kHz-1.8GHz) Spectrum Analyzer	09/20/06	Annual	09/20/07	3108A02053, 3034A01395
Agilent	E8257D (250kHz-20GHz) Signal Generator	03/08/07	Annual	03/07/08	MY45470194
CCA-7	CISPR QP Adapter	12/21/06	Annual	12/21/07	0194-04082
Agilent	HP 85650A Quasi-Peak Adapter	12/21/06	Annual	12/21/07	2043A00301
CCA-7	CISPR QP Adapter	12/21/06	Annual	12/21/07	0194-04082
Agilent	HP 85650A Quasi-Peak Adapter	12/21/06	Annual	12/21/07	2043A00301
Agilent	HP 8449B (1-26.5GHz) Pre-Amplifier	12/12/06	Annual	12/12/07	3008A00985
Agilent	HP 11713A Attenuation/Switch Driver	12/12/06	Annual	12/12/07	N/A
Agilent	HP 85685A (20Hz-2GHz) Preselector	12/12/06	Annual	12/12/07	N/A
Agilent	HP 8566B Opt. 462 Impulse Bandwidth	12/12/06	Annual	12/12/07	3701A22204
EMCO	3115 (1-18GHz) Horn Antenna	08/25/05	Biennial	08/25/07	9205-3874
Compliance Design	A100 Roberts Dipoles	08/31/05	Biennial	08/31/07	5118
EMCO	Dipole Pair	09/21/06	Biennial	09/20/08	23951
SOLAR	8012-50 LISN (2)	11/18/05	Biennial	11/18/07	0313233, 0310234
-	No.165 (30MHz - 1000MHz) RG58 Coax Cable	N/A		N/A	N/A
-	No.166 (1000-26500MHz) Microwave RF Cable	N/A		N/A	N/A
-	No.167 (100kHz - 100MHz) RG58 Coax Cable	N/A		N/A	N/A

Table 5-1. Annual Test Equipment Calibration Schedule

FCC ID: ACJ9TGCF-306	 FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30	Page 9 of 27	



6.0 TEST RESULTS

6.1 Summary

Company Name: Panasonic Corporation of North America
 FCC ID: ACJ9TGCF-306
 Method/System: Unlicensed National Information Infrastructure (UNII)
 Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps

FCC Part Section(s)	RSS Section	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (Tx)						
N/A	RSS-210 [A8.2 (1)]	26 dB Bandwidth	> 500kHz	CONDUCTED	PASS	Section 6.2
15.407 (a)(1)	RSS-210 [A9.2 (1)]	Maximum Conducted Output Power	< 4 + 10log ₁₀ (BW) dBm (5150-5250) (IC: < 10 + 10log ₁₀ (BW) dBm) < 11 + 10log ₁₀ (B) dBm (5250-5350) (IC: < 11 + 10log ₁₀ (BW) dBm)		PASS	Section 6.3
15.407 (a)(1), (5)	RSS-210 [A9.2 (1)]	Peak Power Spectral Density	< 4 dBm/MHz (5150-5250) (IC: < 10 dBm) < 11dBm/MHz (5250-5350) (IC: < 11 dBm)		PASS	Section 6.4
15.407(a)(6)	N/A	Peak Excursion	< 13 dB/MHz maximum difference		PASS	Section 6.5
15.407(b)(1), (6)	RSS-210 [A9.3 (1)]	Undesirable Emissions	< -27 dBm/MHz EIRP (5150-5350)	RADIATED	PASS	Section 6.6
15.205, 15.407(b)(1), (5), (6)	RSS-210 [A8.5]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-210 table 3 limits)		PASS	Section 6.7
15.207	RSS-Gen [7.2.2]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits or < RSS-Gen table 2 limits	LINE CONDUCTED	PASS	Section 6.8
RECEIVER MODE (Rx) / DIGITAL DEVICE						
15.107	RSS-Gen [7.2.2]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.107 limits or < RSS-Gen table 2 limits	LINE CONDUCTED	PASS	Part 15B Test Report
15.109	RSS-Gen [7.2.3.2]	General Field Strength Limits (Restricted Bands and Radiated Emissions Limits)	< FCC 15.109 limits or < RSS-210 table 3 limits	RADIATED (30MHz-1GHz) (1-25 GHz)	PASS	Part 15B Test Report
RF EXPOSURE						
15.407(f), 2.1091/2.1093	RSS-102	MPE Test	1 mW/cm ² (MPE Limit) @ 20cm	MPE	PASS	MPE Report

Table 6-1. Summary of Test Results

FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30	Page 10 of 27	

6.2 26dB Bandwidth Measurement

RSS-210 [A8.2(1)]

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies. **The 26dB bandwidth is used to determine the conducted power limits.**

Frequency [MHz]	Channel No.	Measured 26dB Bandwidth [MHz]
5180	36	23.24
5260	52	22.37
5320	64	22.03

Table 6-2. Conducted Bandwidth Measurements






Figure 6-1. Test Instrument & Measurement Setup

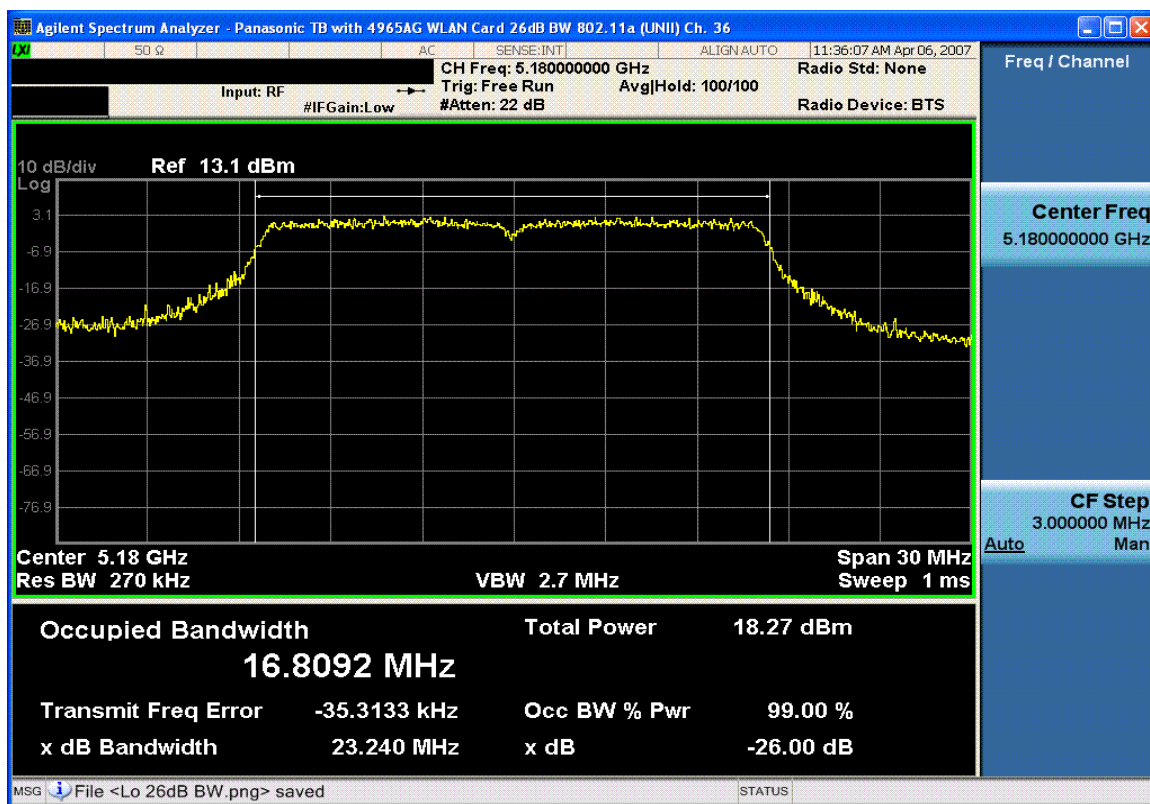


Plot 6-1. 26dB Bandwidth Plot (802.11a (UNII) – Ch. 36)

FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30		Page 11 of 27

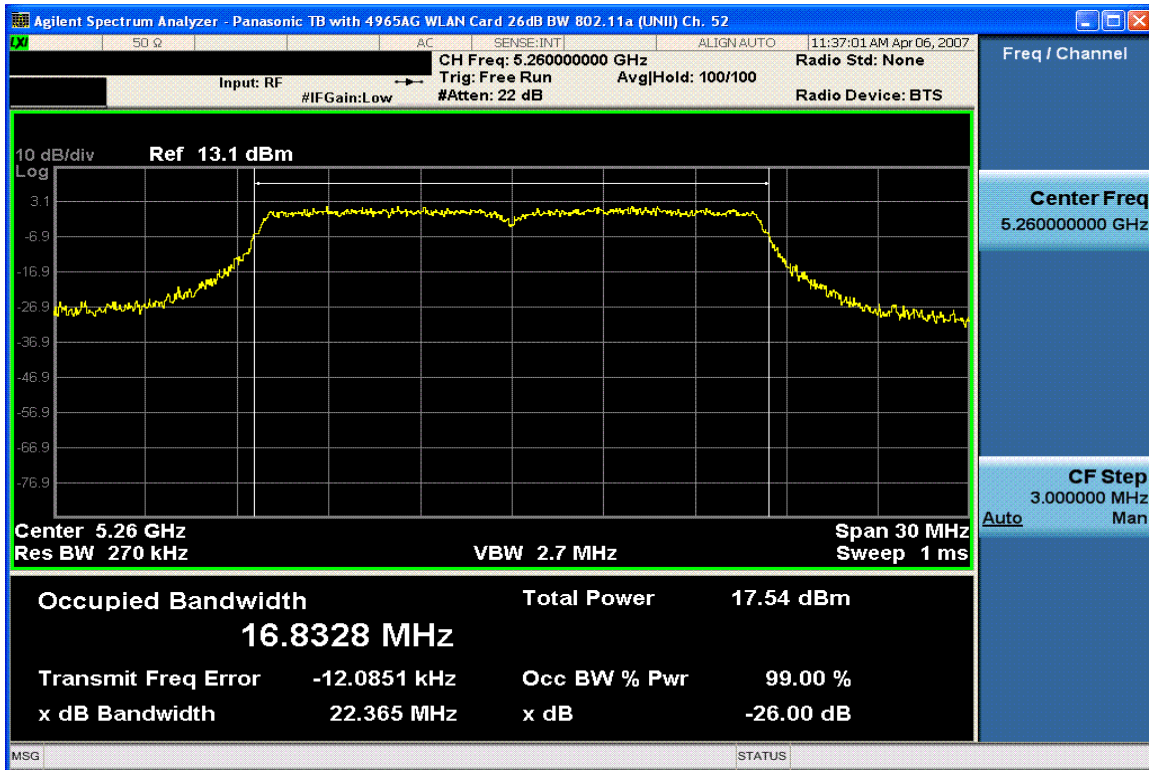

Plot 6-2. 26dB Bandwidth Plot (802.11a (UNII) – Ch. 52)

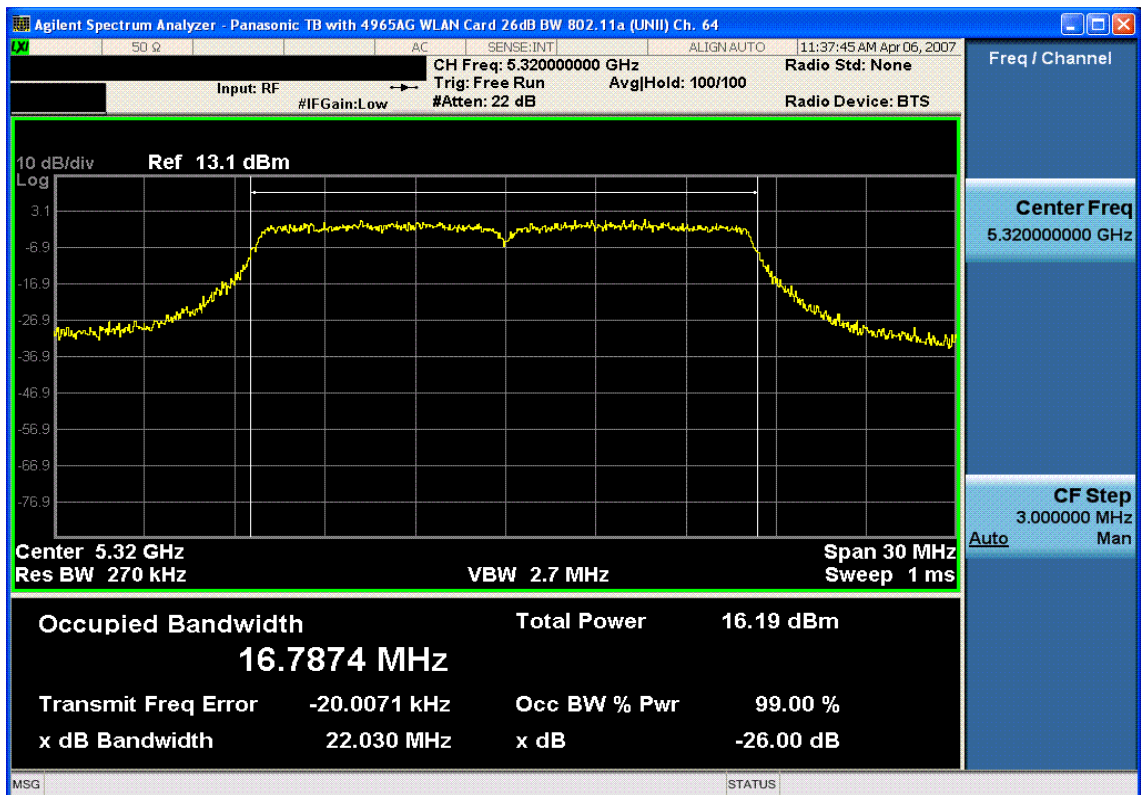

Plot 6-3. 26dB Bandwidth Plot (802.11a (UNII) – Ch. 64)

FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30		Page 12 of 27

6.3 Output Power Measurement – UNII Band (I,II) §15.407 (a)(1); RSS-210 [A9.2(1)]

A transmitter antenna terminal of EUT is connected to the input of a RF power sensor. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies. ***In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is the lesser of 50mW (16.99dBm) and 4 dBm + 10log₁₀(26dB BW) = 17.66 dBm. In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and 11 dBm + 10log₁₀(26dB BW) = 2 dBm.***

Freq [MHz]	Channel	Data Rate [Mbps]	Main Ant. Measured Power [dBm]	Aux Ant. Measured Power [dBm]
5180	36	6	13.10	13.03
		9	12.96	12.94
		12	12.76	12.81
		18	12.50	12.53
		24	12.17	12.18
		36	11.56	11.47
		48	9.75	9.68
		54	7.51	7.50
		5260	52	6
9	12.52			12.47
12	12.47			12.45
18	11.76			11.68
24	11.56			11.55
36	11.05			11.09
48	8.24			8.17
54	6.88			6.76

Table 6-3. Conducted Output Power Measurements

Freq [MHz]	Channel	Data Rate [Mbps]	Main Ant. Measured Power [dBm]	Aux Ant. Measured Power [dBm]
5320	64	6	12.41	12.39
		9	12.20	12.17
		12	12.13	12.07
		18	11.90	11.83
		24	11.67	11.54
		36	10.65	10.61
		48	9.08	9.05
		54	6.72	6.59

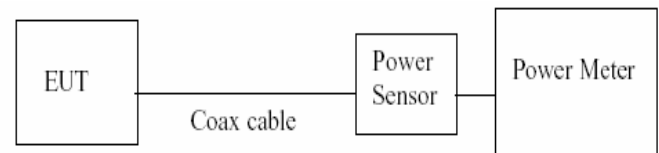


Figure 6-2. Test Instrument & Measurement Setup

FCC ID: ACJ9TGCF-306			FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30			Page 13 of 27

6.4 Peak Power Spectral Density

§15.407 (a)(1),(5); RSS-210 [A9.2(1)]

The spectrum analyzer was connected to the antenna terminal while the EUT was operating in a continuous transmission mode at the appropriate center frequencies. **The maximum permissible peak power spectral density is 4dBm/MHz in the 5.15GHz – 5.25GHz band (10dBm/MHz for Industry Canada) and 11dBm/MHz in the 5.25GHz – 5.35 GHz band (11dBm/MHz for Industry Canada).**

Frequency [MHz]	Channel No.	Measured Power Density [dBm]	Maximum Permissible Power Density [dBm/MHz]	Margin [dB]
5180	36	2.855	4.0	-1.1
5260	52	1.832	11.0	-9.2
5320	64	0.866	11.0	-10.1

Table 6-4. Conducted Power Spectral Density Measurements





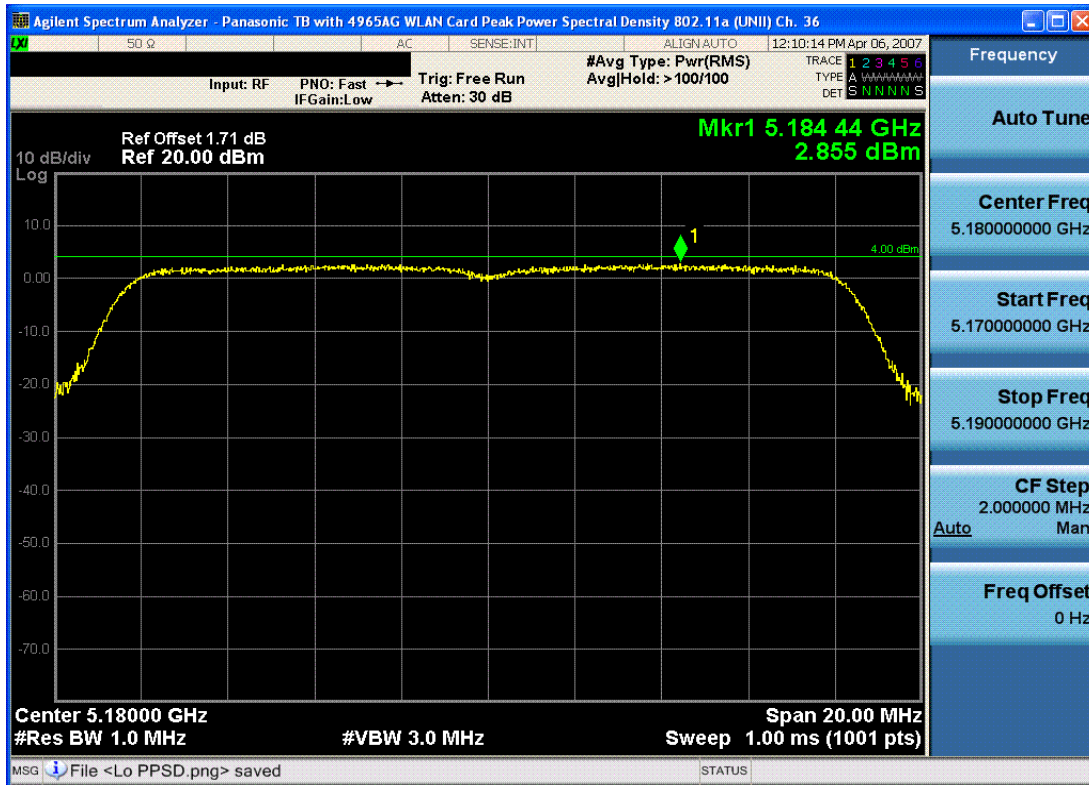


Figure 6-3. Test Instrument & Measurement Setup

FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30	Page 14 of 27	

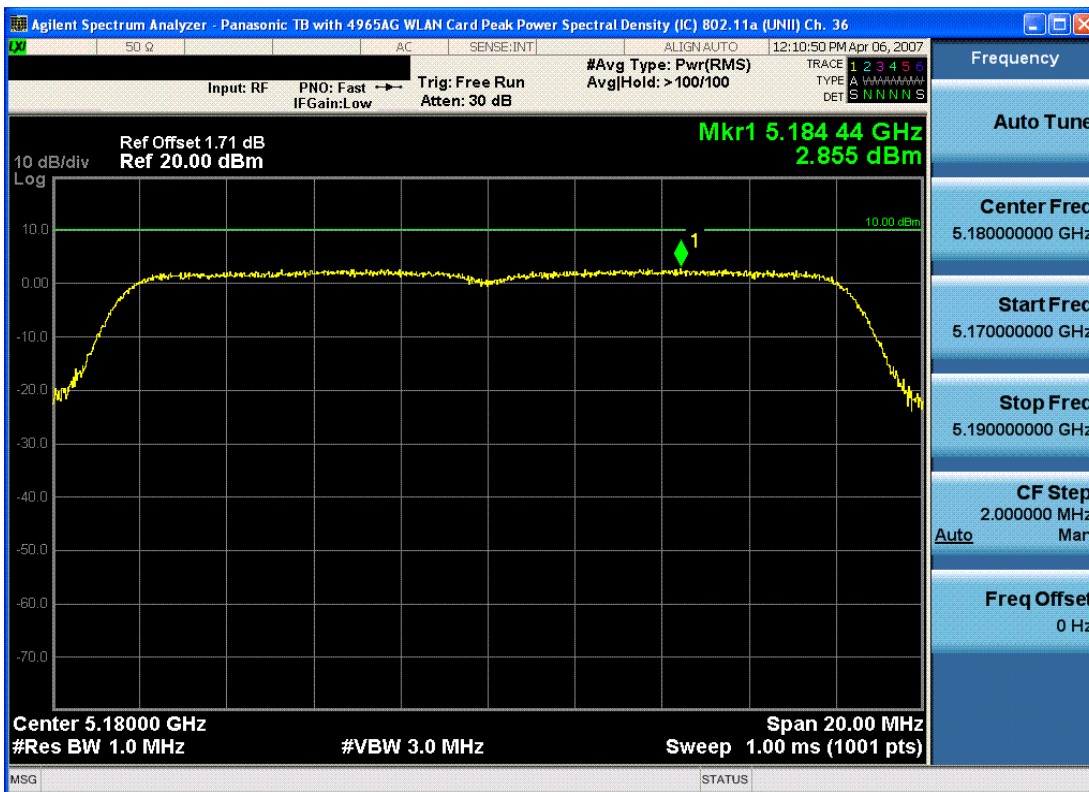


Plot 6-4. Peak Power Spectral Density Plot [FCC] (802.11a (UNII) – Ch. 36)



Plot 6-5. Peak Power Spectral Density Plot [Industry Canada] (802.11a (UNII) – Ch. 36)

FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30		Page 15 of 27

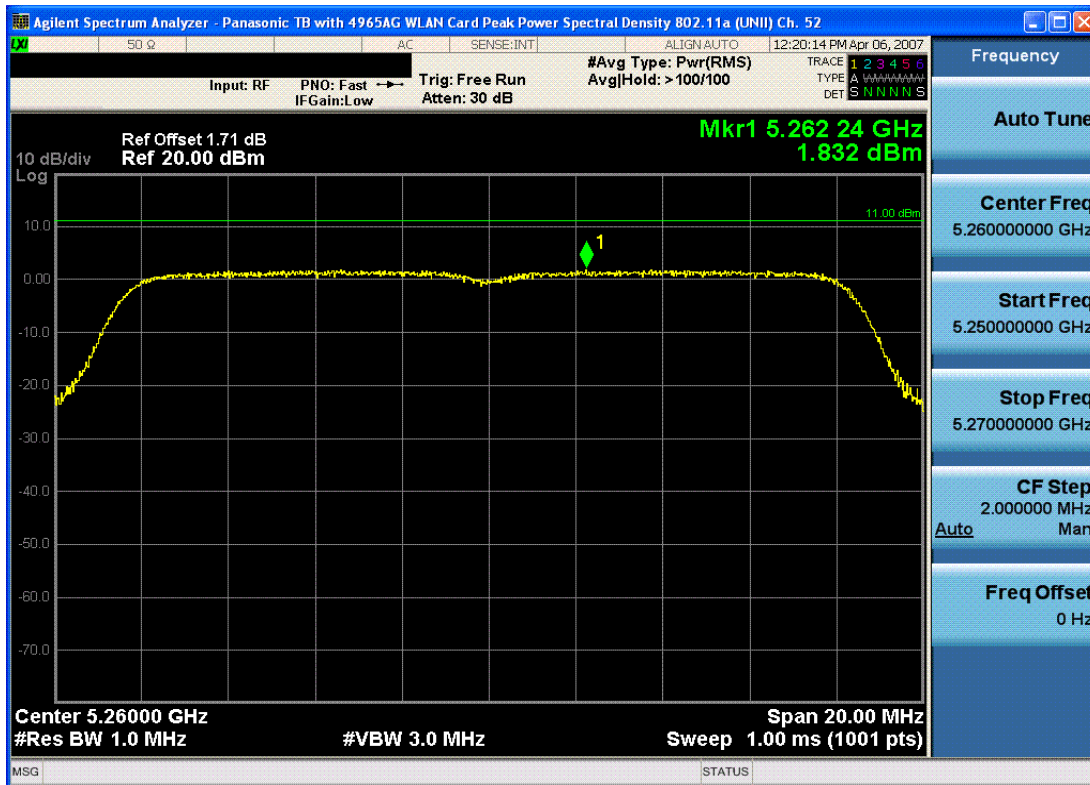

Plot 6-6. Peak Power Spectral Density Plot [FCC / IC] (802.11a (UNII) – Ch. 52)



Plot 6-7. Peak Power Spectral Density Plot [FCC / IC] (802.11a (UNII) – Ch. 64)

FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30		Page 16 of 27

6.5 Peak Excursion Ratio

§15.407(a)(6)

The spectrum analyzer was connected to the antenna terminal while the EUT was operating in the continuous transmission mode at the appropriate center frequencies. **The largest permissible difference between the modulation envelope (measured using a peak hold function) and the maximum conducted output power is 13 dBm/MHz.**

Frequency [MHz]	Channel No.	Measured Peak Excursion Ratio [dBm]	Maximum Permissible Peak Excursion Ratio [dBm/MHz]	Margin [dB]
5180	36	11.33	13.0	-1.7
5260	52	11.92	13.0	-1.1
5320	64	11.67	13.0	-1.3

Table 6-5. Conducted Peak Excursion Ratio Measurements






Figure 6-4. Test Instrument & Measurement Setup

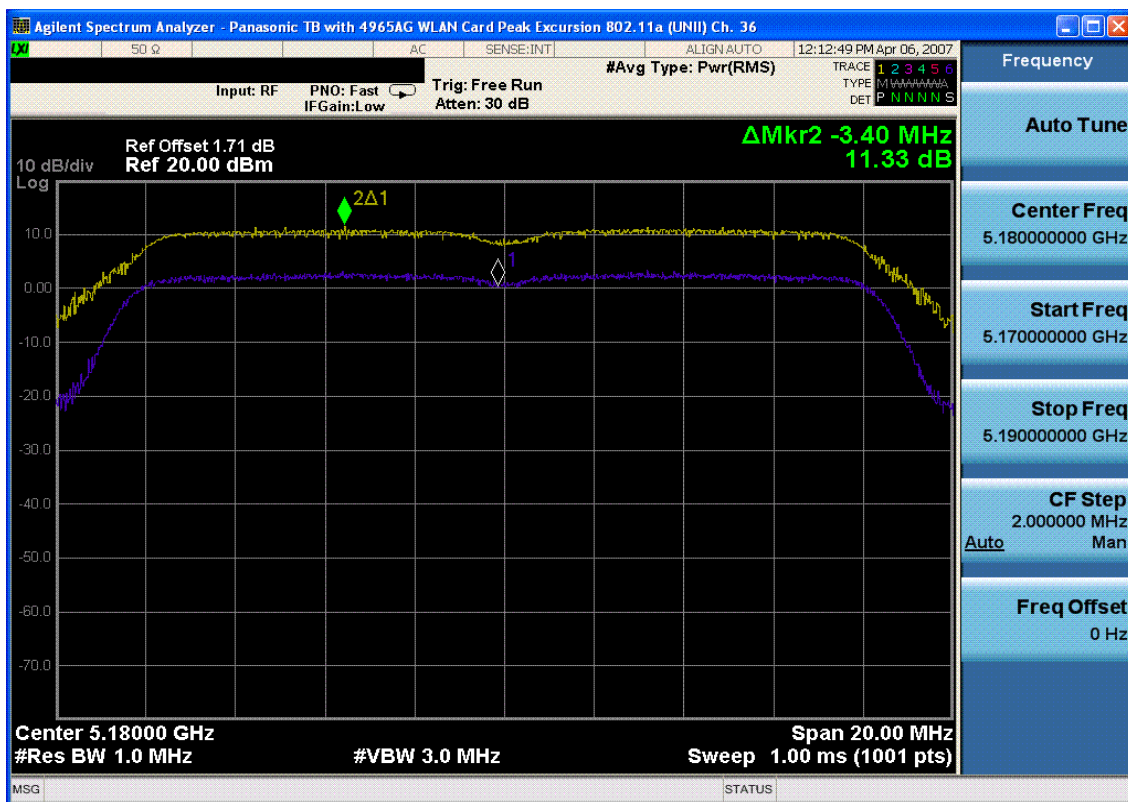


Plot 6-8. Peak Excursion Ratio Plot (802.11a (UNII) – Ch. 36)

FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30		Page 17 of 27

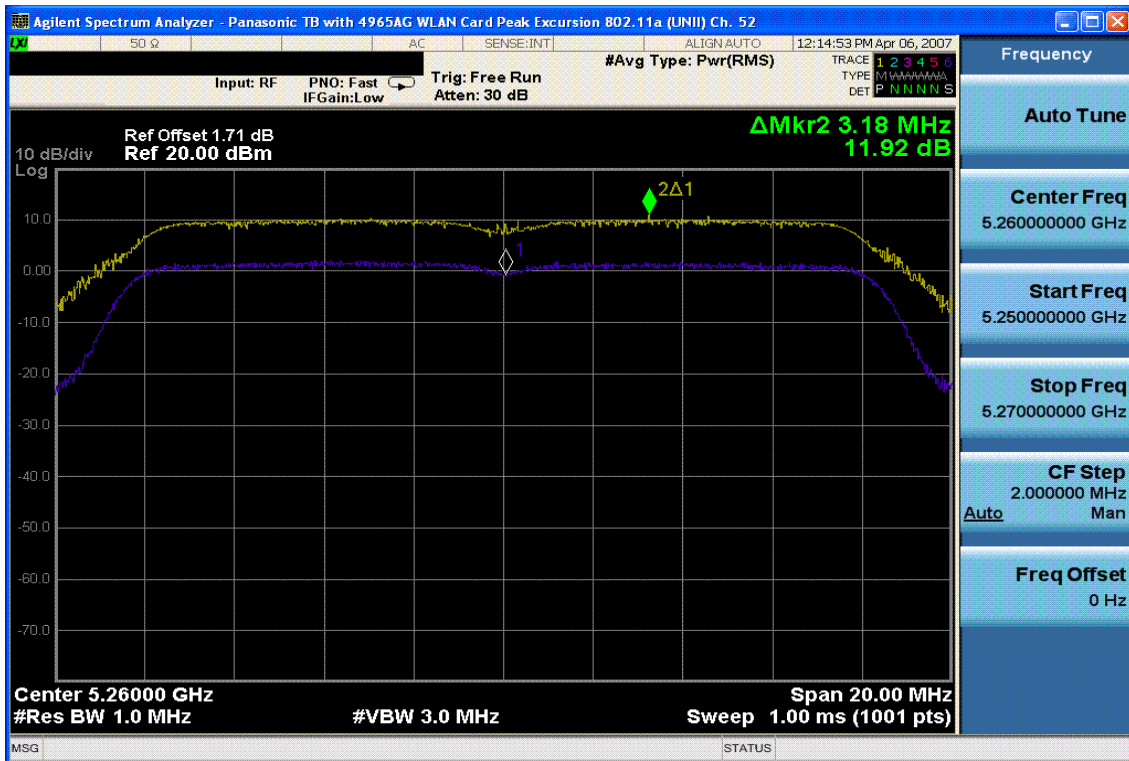

Plot 6-9. Peak Excursion Ratio Plot (802.11a (UNII) – Ch. 52)

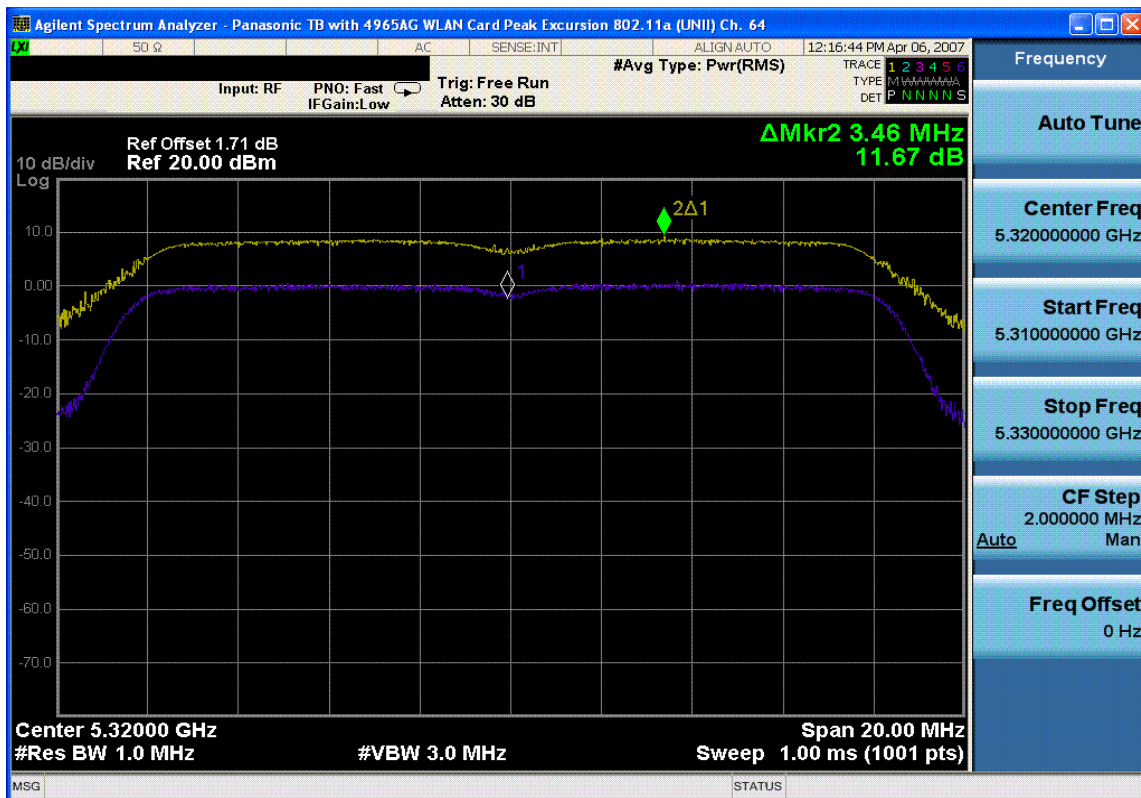

Plot 6-10. Peak Excursion Ratio Plot (802.11a (UNII) – Ch. 64)

FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30		Page 18 of 27

6.6 Radiated Spurious Emission Measurements

§15.407(b)(1), (6), §15.205, §15.209; RSS-210 [A8.5]

The EUT was tested from 9kHz and up to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHZ. Above 1 GHz, peak measurements were taken using RBW = VBW = 1MHz and linearly polarized horn antennas. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-6 per Section 15.209.

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3



Table 6-6. Radiated Limits

Sample Calculation

- Field Strength Level [$\text{dB}\mu\text{V/m}$] = Analyzer Level [dBm] + 107 + AFCL [dB]

Notes:

- AFCL = Antenna Factor [dB] + Cable Loss [dB]

FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30	Page 19 of 27	



Radiated Spurious Emission Measurements (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209

Mode: 802.11a
 Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	-92.37	Peak	V	46.2	60.78	68.20	-7.42
* 15540.00	-110.17	Average	V	52.0	48.83	53.98	-5.14
* 15540.00	-91.97	Peak	V	52.0	67.03	73.98	-6.94
* 20720.00	-135.00	Average	V	55.8	27.80	53.98	-26.18
* 20720.00	-135.00	Peak	V	55.8	27.80	73.98	-46.18
25900.00	-135.00	Peak	V	58.0	30.02	68.20	-38.18

Table 6-7. Radiated Measurements @ 3 meters

NOTES:

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz.
- All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and RSS-210 section 2.7, Table 1 are below the limit shown in Table 6-6.
- Peak Measurements > 1GHz using RBW = VBW = 1MHz.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated.

FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30		Page 20 of 27



Radiated Spurious Emission Measurements (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209

Mode: 802.11a
 Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	-93.24	Peak	V	46.4	60.13	68.20	-8.07
* 15780.00	-113.11	Average	V	53.0	46.88	53.98	-7.10
* 15780.00	-95.28	Peak	V	53.0	64.71	73.98	-9.27
* 21040.00	-135.00	Average	V	55.9	27.89	53.98	-26.09
* 21040.00	-135.00	Peak	V	55.9	27.89	73.98	-46.09
26300.00	-135.00	Peak	V	58.0	30.05	68.20	-38.15

Table 6-8. Radiated Measurements @ 3 meters

NOTES:

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz.
- All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and RSS-210 section 2.7, Table 1 are below the limit shown in Table 6-6.
- Peak Measurements > 1GHz using RBW = VBW = 1MHz.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated.

FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30		Page 21 of 27



Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209

Mode: 802.11a

Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5320MHz

Channel: 64

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	-108.80	Average	V	46.6	44.80	53.98	-9.18
* 10640.00	-85.65	Peak	V	46.6	67.95	73.98	-6.03
* 15960.00	-109.41	Average	V	54.0	51.57	53.98	-2.41
* 15960.00	-95.34	Peak	V	54.0	65.64	73.98	-8.34
* 21280.00	-135.00	Average	V	56.0	27.99	53.98	-25.99
* 21280.00	-135.00	Peak	V	56.0	27.99	73.98	-45.99
26600.00	-135.00	Peak	V	58.1	30.08	68.20	-38.12

Table 6-9. Radiated Measurements @ 3 meters

NOTES:

1. All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz.
2. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and RSS-210 section 2.7, Table 1 are below the limit shown in Table 6-6.
3. Peak Measurements > 1GHz using RBW = VBW = 1MHz.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
6. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
7. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
8. Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated.

FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30	Page 22 of 27	



6.7 Radiated Restricted Band Edge Measurements §15.407(b)(1) and (2), §15.205 & §15.209

Mode: 802.11a
 Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
5142.98	-95.95	Average	V	38.9	49.97	53.98	-4.01
5142.98	-84.82	Peak	V	38.9	61.10	73.98	-12.88
5147.32	-93.92	Average	V	38.9	52.00	53.98	-1.98
5147.32	-81.47	Peak	V	38.9	64.45	73.98	-9.53
5149.77	-95.49	Average	V	38.9	50.44	53.98	-3.54
5149.77	-79.75	Peak	V	38.9	66.18	73.98	-7.80

Table 6-10. Radiated Restricted Band Measurements at 3-meters

NOTES:

- All emissions shown lie in the restricted bands specified in §15.205 and RSS-210 section 2.7, Table 1 and are below the limit shown in Table 6-6.
- Average Measurements > 1GHz using RBW = 1MHz VBW = 10Hz.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.

FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30		Page 23 of 27



Radiated Restricted Band Edge Measurements (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209

Mode: 802.11a
 Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5350.00	-100.37	Average	V	39.6	46.23	53.98	-7.75
5350.00	-84.44	Peak	V	39.6	62.16	73.98	-11.82
5351.46	-98.72	Average	V	39.6	47.89	53.98	-6.09
5351.46	-79.19	Peak	V	39.6	67.42	73.98	-6.56
5353.79	-97.76	Average	V	39.6	48.85	53.98	-5.13
5353.79	-82.11	Peak	V	39.6	64.50	73.98	-9.48

Table 6-11. Radiated Restricted Band Measurements at 3-meters

NOTES:

1. All emissions shown lie in the restricted bands specified in §15.205 and RSS-210 section 2.7, Table 1 and are below the limit shown in Table 6-6.
2. Average Measurements > 1GHz using RBW = 1MHz VBW = 10Hz.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
6. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
7. Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated.


FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30		Page 24 of 27

6.8 Line-Conducted Test Data
§15.207; RSS-Gen(7.2.2)

PCTEST Engineering Laboratory Inc.

Company : Panasonic Corporation
 Model Number : CF-30
 FCC ID Code : ACJ9TGCF-306
 Standard : FCC Part 15B class B

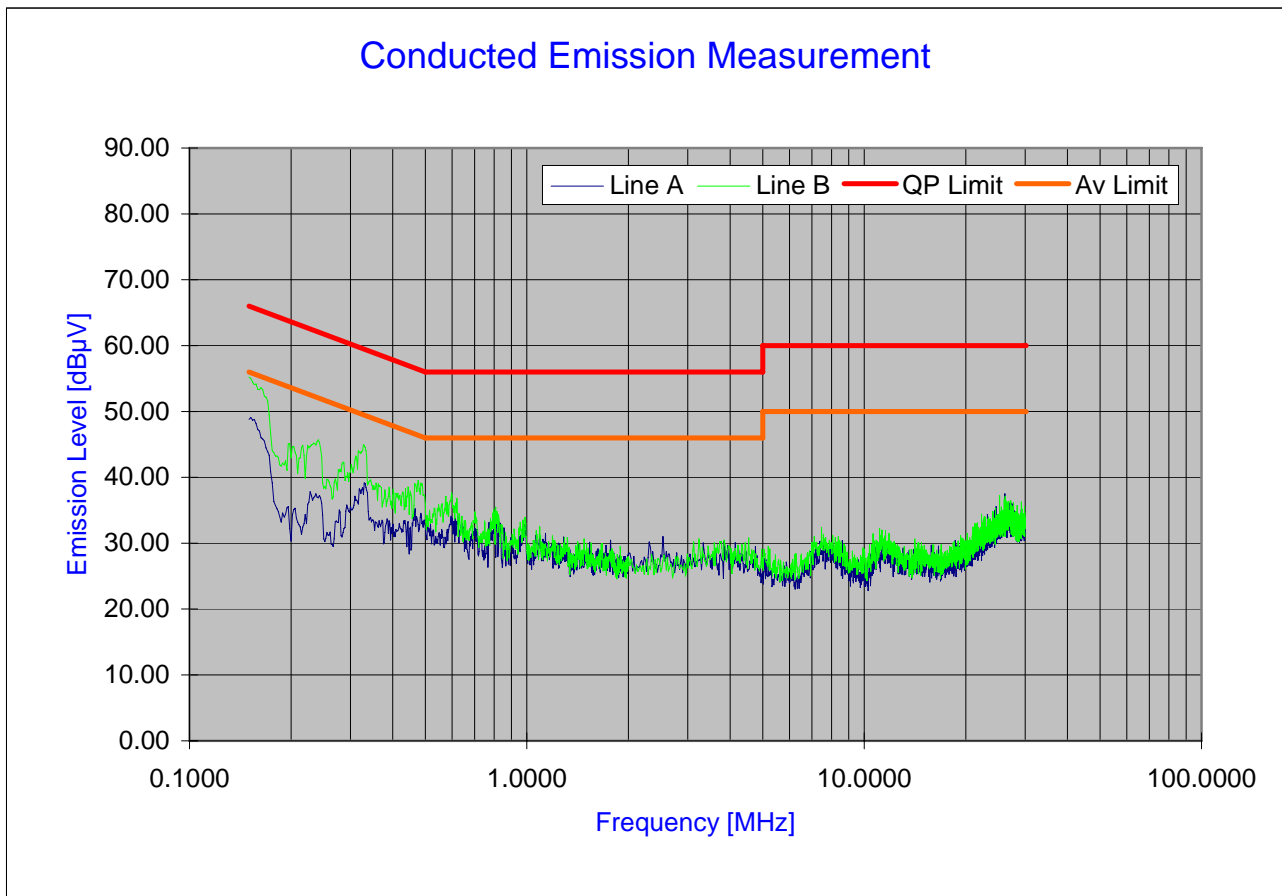Power Source : AC120V/60Hz
 Tested Date : 08/13/2007
 Note : Tested with WLAN a ON



Ver.1.1 ©PCTEST 2006.08

Plot 6-11. Line Conducted Plot with 802.11a (UNII Band)

Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot made using a peak detector.
5. Deviations to the Specifications: None.

FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30		Page 25 of 27

Line-Conducted Test Data (Cont'd)



§15.207; RSS-Gen(7.2.2)

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	0.150	8.20	50.58	66.00	-15.42	37.43	56.00	-18.57
2	A	0.330	7.55	36.05	59.44	-23.39	24.95	49.44	-24.49
3	A	0.477	7.44	31.96	56.39	-24.43	21.79	46.39	-24.60
4	A	0.478	7.44	31.99	56.39	-24.40	21.62	46.39	-24.77
5	A	0.605	7.40	27.95	56.00	-28.05	20.66	46.00	-25.34
6	A	0.781	7.36	26.47	56.00	-29.53	20.43	46.00	-25.57
7	A	0.820	7.35	29.43	56.00	-26.57	20.89	46.00	-25.11
8	A	0.824	7.35	29.39	56.00	-26.61	20.60	46.00	-25.40
9	A	0.986	7.33	28.71	56.00	-27.29	20.49	46.00	-25.51
10	A	26.066	8.42	30.28	60.00	-29.72	23.99	50.00	-26.01
11	B	0.150	8.20	54.77	66.00	-11.23	45.60	56.00	-10.40
12	B	0.181	8.02	45.35	64.44	-19.09	39.12	54.44	-15.32
13	B	0.240	7.79	43.82	62.11	-18.29	34.48	52.11	-17.63
14	B	0.330	7.55	42.46	59.45	-16.99	30.75	49.45	-18.70
15	B	0.373	7.51	34.11	58.43	-24.32	24.98	48.43	-23.45
16	B	0.411	7.48	32.68	57.63	-24.95	23.47	47.63	-24.16
17	B	0.436	7.47	32.62	57.14	-24.52	23.22	47.14	-23.92
18	B	0.480	7.44	35.96	56.34	-20.38	24.07	46.34	-22.27
19	B	0.600	7.40	33.91	56.00	-22.09	23.03	46.00	-22.97
20	B	0.605	7.40	30.88	56.00	-25.12	21.92	46.00	-24.08

Table 6-12. Line Conducted Data with 802.11a (UNII Band)



Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot made using a peak detector.
5. Deviations to the Specifications: None.

FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30	Page 26 of 27	

7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Panasonic Toughbook Model: CF-30**
FCC ID: ACJ9TGCF-306 is in compliance with Part 15E of the FCC Rules.

FCC ID: ACJ9TGCF-306		FCC Pt. 15.407 802.11a UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0708020815.ACJ	Test Dates: August 13 - 14, 2007	EUT Type: Toughbook Model: CF-30		Page 27 of 27