



PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA
Tel. 410.290.6652 / Fax 410.290.6554
<http://www.pctestlab.com>



CERTIFICATE OF COMPLIANCE FCC PART 15.247 Certification

Applicant Name:
Panasonic Corporation of North America
One Panasonic Way, 4B-8
Secaucus, NJ 07094
United States

Date of Testing:
June 19 - June 22, 2006
Test Site/Location:
PCTEST Lab, Columbia, MD, USA
Test Report Serial No.:
0606010439

FCC ID:	ACJ9TGCF-T52
APPLICANT:	Panasonic Corporation of North America

Model(s): CF-T5
EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA
 13.58 dBm Conducted (b)
Max. RF Output Power: 14.21 dBm Conducted (g)
 15.43 dBm Conducted (a)
Frequency Range: 2412 - 2462 MHz (DSSS/OFDM)
 5745 – 5825 MHz (OFDM)
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15.247
Test Device Serial No.: 6BKSA00034R

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C-63.4-2003.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Grant Conditions: Listed output power is conducted.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.


Randy Ortanez
President








PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 1 of 50

TABLE OF CONTENTS

1.0	INTRODUCTION	4
1.1	EVALUATION PROCEDURE	4
1.2	SCOPE	4
1.3	PCTEST TEST LOCATION	4
2.0	PRODUCT INFORMATION	5
2.1	EQUIPMENT DESCRIPTION	5
2.2	ENCLOSURE	5
2.3	EMI SUPPRESSION DEVICE(S)/MODIFICATIONS	5
3.0	DESCRIPTION OF TEST	6
3.1	CONDUCTED EMISSIONS	6
3.2	RADIATED EMISSIONS	7
4.0	ANTENNA REQUIREMENTS	8
5.0	TEST EQUIPMENT CALIBRATION DATA	9
6.0	CONCLUSION	10
EXHIBIT A - TEST RESULTS		
	SUMMARY	11
	6DB BANDWIDTH MEASUREMENT – 802.11B/G	12
	6DB BANDWIDTH MEASUREMENT – 802.11A (5.8GHZ)	16
	OUTPUT POWER MEASUREMENT – 802.11B	19
	OUTPUT POWER MEASUREMENT – 802.11G	20
	OUTPUT POWER MEASUREMENT – 802.11A (5.8GHZ)	21
	PEAK POWER SPECTRAL DENSITY (802.11A/B/G)	22
	OCCUPIED BANDEDGE /BANDEDGE AT 20DB BELOW & OUT OF BAND EMISSIONS	28
	RADIATED MEASUREMENTS	31
	RADIATED RESTRICTED BAND MEASUREMENTS	38
	LINE-CONDUCTED TEST DATA	39
	RECEIVER SPURIOUS MEASUREMENTS	42
EXHIBIT B – LABELING REQUIREMENTS		
	SAMPLE LABEL & LOCATION	43
EXHIBIT C – BLOCK DIAGRAM/SCHEMATICS		
EXHIBIT D – OPERATIONAL DESCRIPTION		
EXHIBIT E – TEST SETUP PHOTOGRAPHS		
EXHIBIT F – EUT EXTERNAL/INTERNAL PHOTOGRAPHS		
EXHIBIT G – USER’S MANUAL		
EXHIBIT H – SAR MEASUREMENT REPORT		

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 2 of 50



MEASUREMENT REPORT

FCC Part 15.247 Measurement Report Cover Page

A. General Information

APPLICANT: Panasonic Corporation of North America

APPLICANT ADDRESS: One Panasonic Way, 4B-8
Secaucus, NJ 07094

TEST SITE: PCTEST ENGINEERING LABORATORY, INC.

TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA

FCC RULE PART(S): Part 15.247

MODEL NAME: CF-T5

FCC ID: ACJ9TGCF-T52

Test Device Serial No.: 6BKSA00034R Production Pre-Production Engineering

FCC CLASSIFICATION: Digital Transmission System (DTS)

DATE(S) OF TEST: June 19 - June 22, 2006

TEST REPORT S/N: 0606010439

A.1 Test Facility / NVLAP Accreditation

Measurements were performed at PCTEST Engineering Lab in Columbia, MD 21045, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC 2451).
- PCTEST Lab is accredited by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) in EMC, Telecommunication, and FCC for satisfactory compliance with criteria established in Title 15, Part 285 Code of Federal Regulations. (NVLAP Lab code: 100431-0).
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules.
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 3 of 50

1.0 INTRODUCTION

1.1 Evaluation Procedure

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2003) and FCC Public Notice dated July 12, 1995 entitled "Guidance on Measurement for Direct Sequence Spread Spectrum System" were used in the measurement of **Panasonic Notebook PC w/ Intel WLAN and Novatel HSDPA FCC ID: ACJ9TGCF-T52**.

Deviation from measurement procedure.....NONE

1.2 Scope

Measurement & determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.3 PCTEST Test Location

The map at the right shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity area, the Baltimore-Washington Intern'l (BWI) airport, the city of Baltimore and the Washington, DC area. (see Figure 1.3-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39 11'15" N latitude and 76 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 2002.

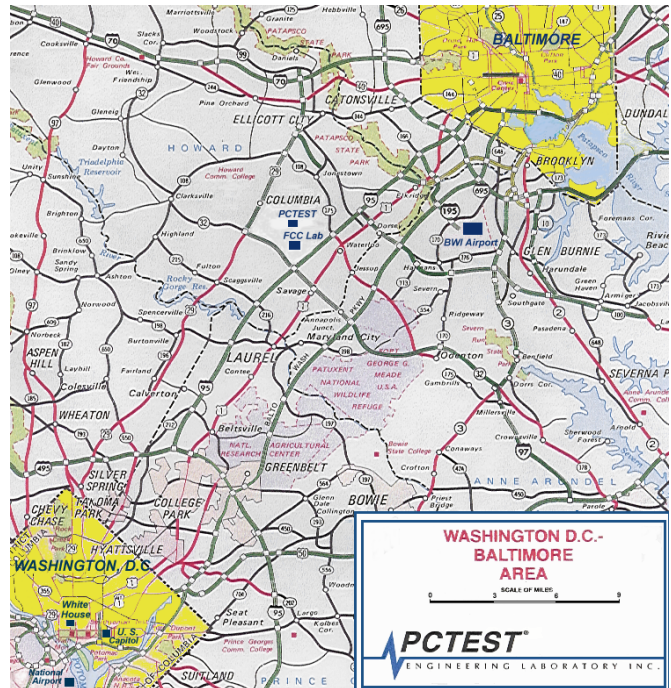



Figure 1.3-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 4 of 50

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Panasonic Notebook PC w/ Intel WLAN and Novatel HSDPA** FCC ID: **ACJ9TGCF-T52**. The EUT consisted of the following components(s):

Manufacturer / Model / Description	Serial Number
Panasonic Notebook PC Model: CF-T5mk1	6BKSA00034R
Intel PRO/Wireless Network Module Model: WM3945ABG	00C857355CVD26965004
Novatel HSDPA Module Model: EU730	010854-00-001069-2

Table 2-1. EUT Equipment Description

2.2 Enclosure

The EUT incorporates the following enclosure:

- None

2.3 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing.

- None

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 5 of 50

3.0 DESCRIPTION OF TEST

3.1 Conducted Emissions



Figure 3.1-1. Shielded Enclosure Line-Conducted Test Facility



Figure 3.1-2. Line Conducted Emission Test Set-Up



Figure 3.1-3. Wooden Table & Bonded LISNs

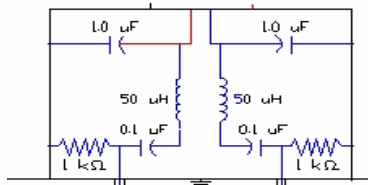


Figure 3.1-4. LISN Schematic Diagram

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure, manufactured by Ray Proof Series 81 (see Figure 3.1-1). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the sidewall of the shielded room (see Figure 3.1-2). Solar Electronics and EMCO Model 3725/2 (10kHz-30MHz) 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (See Figure 3.1-3). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filter (100dB 14Hz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with an inner diameter of ½". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the Solar LISN. The LISN schematic diagram is shown (See Figure 3.1-4). All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 150kHz to 30MHz with a 20msec. sweep time. The frequencies producing the maximum level were re-examined using an EMI/Field Intensity Meter and Quasi-Peak adapter. The detector function was set to CISPR quasi-peak and average mode. The bandwidth of the receiver was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H patten to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Exhibit M. Each EME reported was calibrated using the HP8640D signal generator.

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 6 of 50

3.2 Radiated Emissions

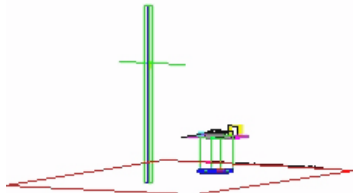


Figure 3.2-1. Meter Test Site




Figure 3.2-2. Dimensions of Outdoor Test Site



Figure 3.2-3. Turntable and System Setup

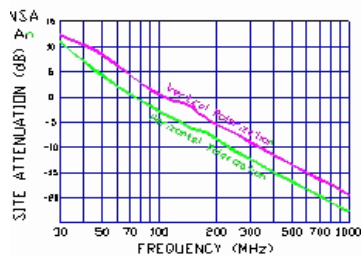


Figure 3.2-4. Normalized Site Attenuation Curves (H&V)

Preliminary measurements were made indoors at 1-meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, and turntable azimuth with respect to the antenna was noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using a bi-conical antenna and from 200 to 1000 MHz using a log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using Roberts™ Dipole antennas or horn antennas (see Figure 3.2-1). The test equipment was placed on a wooden and plastic bench situated on a 1.5m x 2m area adjacent to the measurement area (see Figure 3.2-2). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter and Quasi-Peak Adapter. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 100kHz or 1MHz depending on the frequency or type of signal. Above 1GHz the detector function was set to CISPR average mode (RBW = 1MHz, VBW = 10Hz).

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see Figure 3.2-3). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Exhibit E-G. Each EME reported was calibrated using the HP8640D signal generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 3.2-4.

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 7 of 50

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Notebook PC w/ Intel WLAN and Novatel HSDPA are **permanently attached antennae**.
- There are provisions for connection to an external antenna. Please refer to Panasonic's application cover letter for details.



Conclusion:

The **Panasonic Notebook PC w/ Intel WLAN and Novatel HSDPA FCC ID: ACJ9TGCF-T52** unit complies with the requirement of §15.203.

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
-	:	157	5785
-	:	-	:
-	:	-	:
-	:	-	:
-	:	-	:
149	5745	165	5825

Table 4.1 Frequency/ Channel Operations


PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 8 of 50

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

TYPE	MODEL	CAL. DUE DATE	CAL. INTERVAL	SERIAL No.
Microwave Spectrum Analyzer	Agilent E4448A (3Hz-50GHz)	09/19/06	Annual	US42510244
Spectrum Analyzer/Tracking Generator	HP 8591A (9kHz-1.8GHz)	06/02/07	Annual	3144A02458
Spectrum Analyzer	HP 8591A (9kHz-1.8GHz)	10/15/06	Annual	3108A02053
Spectrum Analyzer	HP 8594A (9kHz-2.9GHz)	11/02/06	Annual	3051A00187
Signal Generator	HP 8640D (500Hz-1GHz)	12/07/07	Annual	3613A00315
Signal Generator	Rohde & Schwarz (0.1-1GHz)	09/22/06	Annual	894215/012
Ailtech/Eaton Receiver	NM 37/57A-SL (30MHz-1GHz)	04/12/07	Annual	0792-03271
Ailtech/Eaton Receiver	NM 37/57A (30MHz-1GHz)	03/11/07	Annual	0805-03334
Ailtech/Eaton Receiver	NM 17/27A (0.1-32MHz)	09/17/06	Annual	0608-03241
Quasi-Peak Adapter	HP 85650A	08/09/06	Annual	2043A00301
Ailtech/Eaton Adapter	CCA-7 CISPR/ANSI QP Adapter	03/11/07	Annual	0194-04082
RG58 Coax Test Cable	No.167			n/a
Harmonic/Flicker Test System	HP 6841A (IEC 555-2/3)			3531A00115
Broadband Amplifier (2)	HP 8447D			1145A00470, 1937A03348
Broadband Amplifier	HP 8447F			2443A03784
Transient Limiter	HP 11947A (9kHz-200MHz)			2820A00300
Horn Antenna (2)	EMCO Model 3115 (1-18GHz)			9704-5182, 9205-3874
Horn Antenna	EMCO Model 3116 (18-40GHz)			9203-2178
Biconical Antenna (3)	Eaton 94455-1			1295, 1332, 1277
Log-Spiral Antenna (2)	Ailtech/Eaton 93490-1			0227, 1104
Log-Spiral Antenna	Singer 93490-1			147
Roberts Dipoles	Compliance Design (1 set) A100			5118
Ailtech Dipoles	DM-105A (1set)			33448-111
EMCO LISN (3)	3816/2, 3816/2, 3725/2			1077, 1079, 2099
50-ohm Terminator	n/a			n/a
Microwave Preamp 40dB Gain	HP 83017A (0.5-26.5GHz)			3123A00181
Microwave Cables	MicroCoax (1.0-26.5GHz)			n/a
Ailtech/Eaton Receiver	NM37/57A-SL			0792-03271
Spectrum Analyzer	HP 8591A			3034A01395
Modulation Analyzer	HP 8901A			2432A03467
NTSC Pattern Generator	Leader 408			0377433
Noise Figure Meter	HP 8970B, Ailtech 7510			3106A02189, TE31700
Noise Generator	Ailtech 7010			1473
Microwave Survey Meter	Holiday Model 1501 (2.45GHz)			80931
Digital Thermometer	Extech Instruments 421305			426966
Attenuator	HP 8495A (0-70dB) DC-4GHz			
Bi-Directional Coax Coupler	Narda 3020A (50-1000MHz)			
Shielded Screen Room	RF Lindgren Model 26-2/2-0			6710 (PCT270)
Shielded Semi-Anechoic Chamber	Ray Proof Model S81			R2437 (PCT278)
Environmental Chamber	Associated Systems 1025			PCT285
OATS	n/a	12/31/2006	Tri-annual	

Table 5-1. Annual Test Equipment Calibration Schedule

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 9 of 50

6.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Panasonic Notebook PC w/ Intel WLAN and Novatel HSDPA FCC ID: ACJ9TGCF-T52** is in compliance with Part 15C of the FCC Rules.


PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 10 of 50

EXHIBIT A - TEST RESULTS

Summary

The intentional radiator has been tested in a simulated typical installation to demonstrate compliance with the relevant FCC performance and procedural standards.

The radio was transmitting at full power on the specified channels and at a data rate(s) specified above. The channels tested are high, middle and low of the allocated bands.

Final system data was gathered in a mode that tended to maximize emissions by varying the orientation of the EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.



Method/System: Digital Transmission System (DTS)

Data Rate(s) Tested: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps (b)

6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps (a/g)

FCC Part Section(s)	RSS 210 Section	Test Description	Test Limit	Test Condition	Test Result
TRANSMITTER MODE (TX)					
15.247(a)(2)	5.9.1	6dB Bandwidth	> 500kHz	CONDUCTED	PASS
15.247(b)	6.22(o)(a3)	Transmitter Output Power	< 1 Watt		PASS
15.247(d)	6.2.2(o)(b)	Transmitter Power Spectral Density	< 8dBm / 3kHz Band		PASS
15.247(c)	5.9.1 6.2.2(o) (e1)	Occupied Band Width Out-of-Band Emissions (Band Width at 20dB below)	Radiated <20dBc. Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS
15.205 15.209	6.2.1 6.3	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	< FCC 15.209 limits or < RSS-210 table 3 limits Emissions in restricted bands must meet the radiated limits detailed in 15.209	RADIATED (30MHz-1GHz) (1-25 GHz)	PASS
15.207	6.6	AC Conducted Emissions 150kHz – 30MHz	EN55022	Line Conducted	PASS
RECEIVER MODE (RX)					
15.207	7.4	AC Conducted Emissions 150kHz – 30MHz	EN55022	Line Conducted	PASS
15.209	7.3	General Field Strength Limits (Restricted Bands and Radiated Emissions Limits)	< FCC 15.209 limits or < RSS-210 table 3 limits	Radiated (30MHz-1GHz) (1-25 GHz)	PASS
RF EXPOSURE (SAR or MPE)					
2.1093/2.1091	RSS-102	SAR Test or MPE	1.6 W/kg (SAR Limit) 1 mW/cm ² (MPE Limit)	3 Channels	PASS

Table A-1. Summary of Test Results

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT			Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 11 of 50	

6dB Bandwidth Measurement – 802.11b/g

§15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies. **The minimum permissible 6dB bandwidth is 500 kHz.**

The spectrum analyzer is set to:

RBW = 100 kHz (7dB/div – 802.11b; 10 dB/div – 802.11g)
 VBW = 100 kHz
 Span = 40 MHz (802.11b) / 20 MHz (802.11g)
 Ref. Level = 15 dBm (802.11b) / 15 dBm (802.11g)
 Sweep = 4.84 ms (802.11b) / 2.44 ms (802.11g)

Frequency [MHz]	Channel No.	Modulation	6dB Bandwidth Test Results	
			[MHz]	Pass/Fail
2412	1	802.11b	10.00	Pass
2437	6	802.11b	9.00	Pass
2462	11	802.11b	9.20	Pass
2412	1	802.11g	16.43	Pass
2437	6	802.11g	16.47	Pass
2462	11	802.11g	16.47	Pass

Table A-2. Conducted Bandwidth Measurements



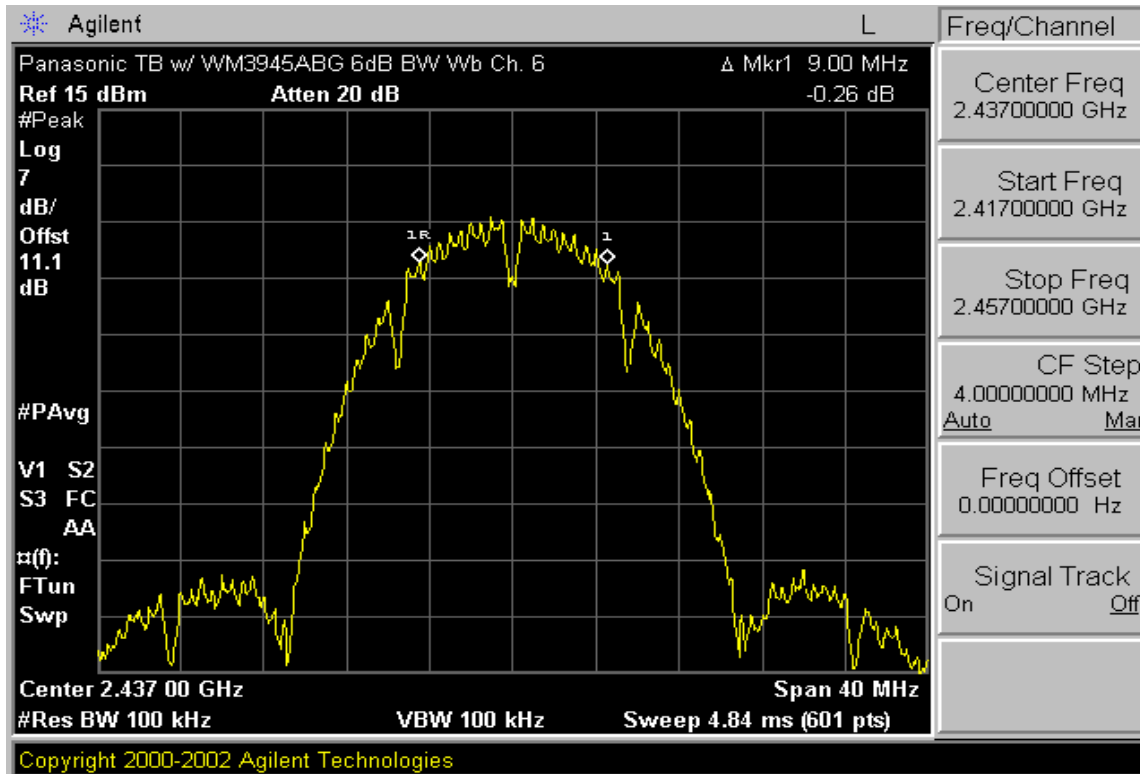
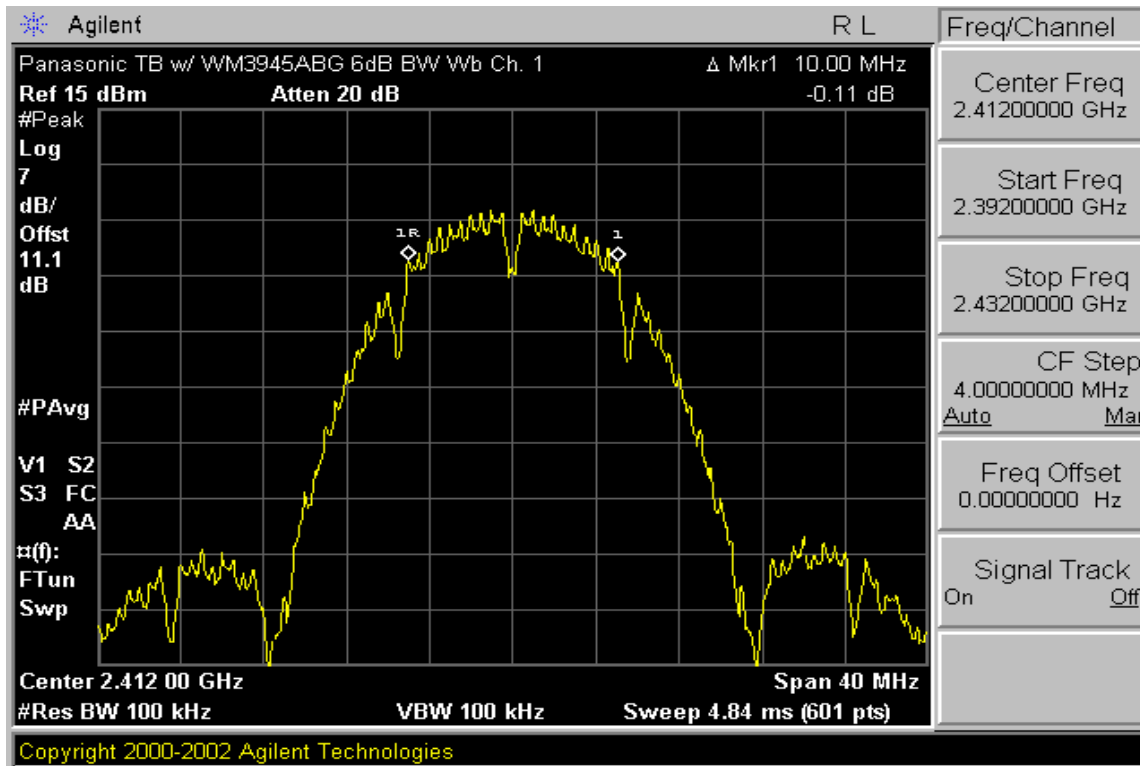
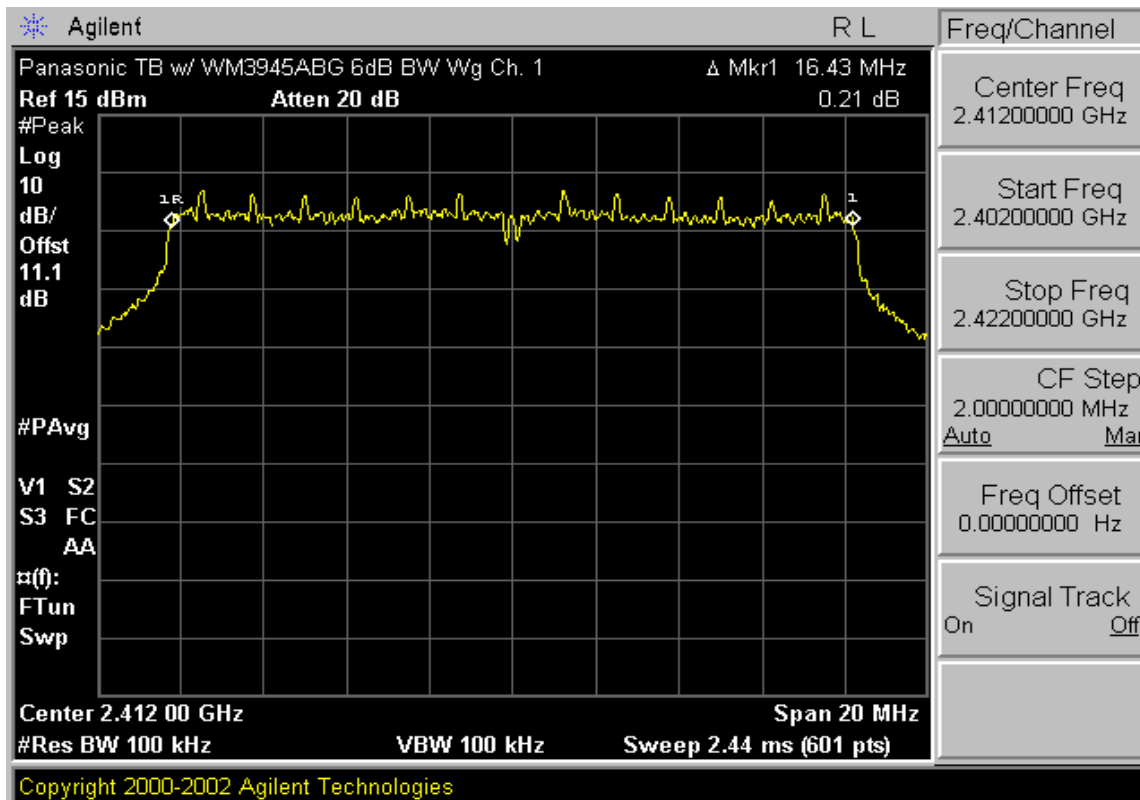
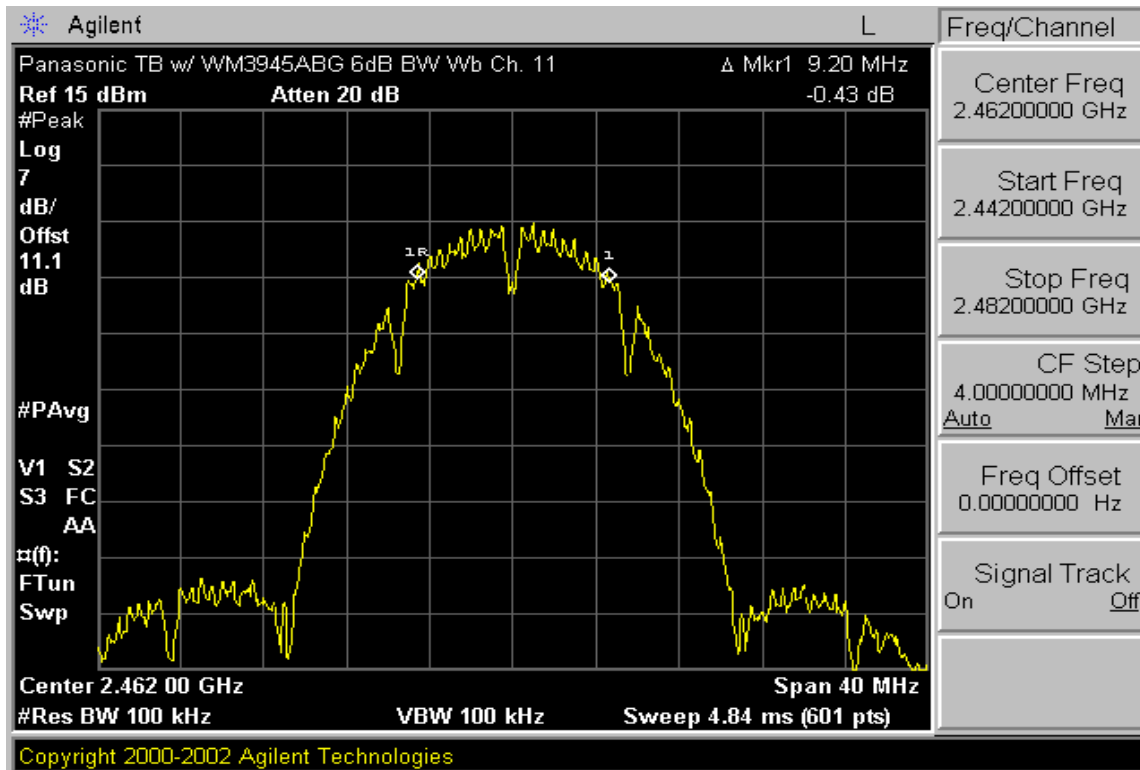


Figure A-1. Test Instrument & Measurement Setup



PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 12 of 50



PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 13 of 50



PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 14 of 50

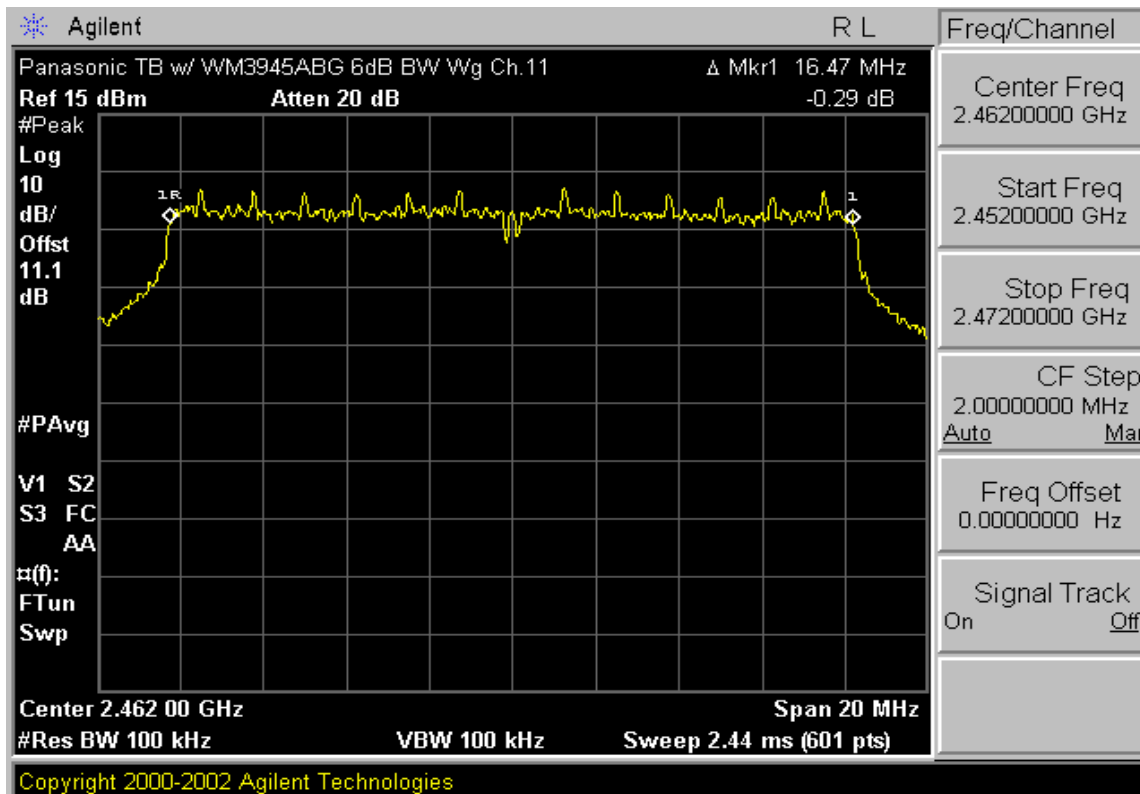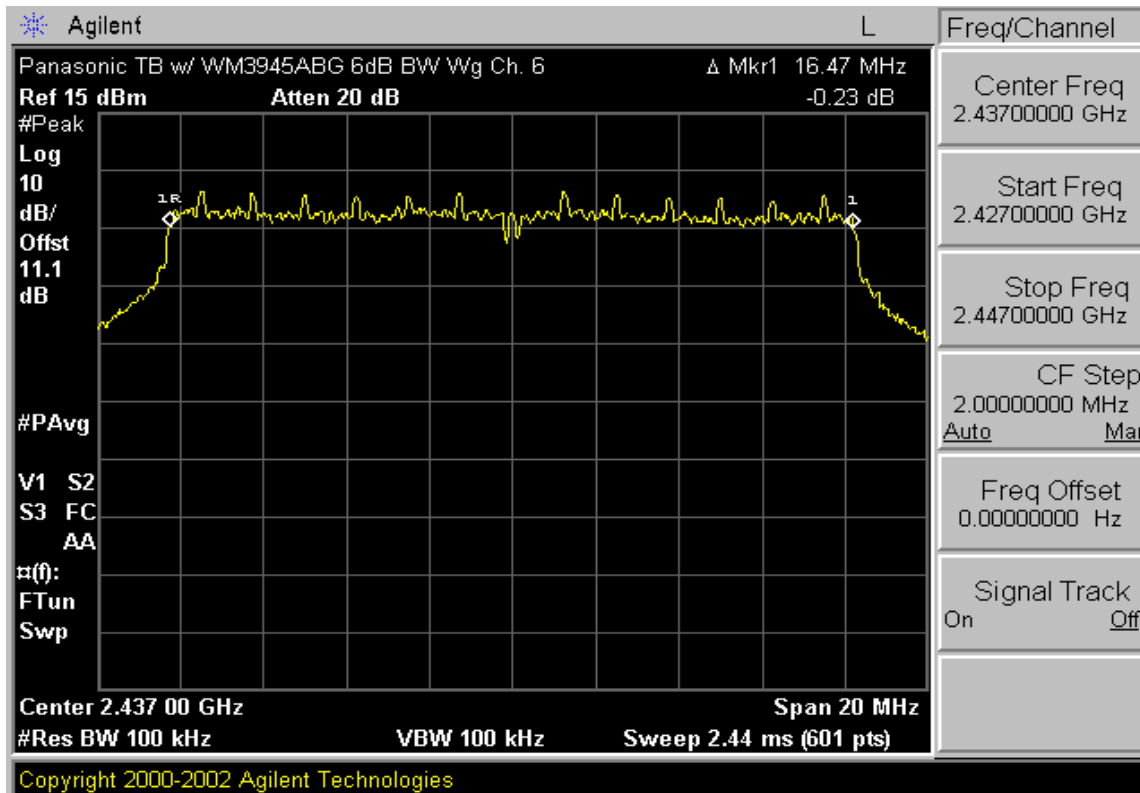

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 15 of 50

6dB Bandwidth Measurement – 802.11a (5.8GHz)
§15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies. **The minimum permissible 6dB bandwidth is 500 kHz.**

The spectrum analyzer is set to:

RBW = 100 kHz (10 dB/div)
 VBW = 100 kHz
 Span = 20 MHz
 Ref. Level = 16 dBm
 Sweep = 2.44 ms

Frequency [MHz]	Channel No.	Modulation	6dB Bandwidth Test Results	
			[MHz]	Pass/Fail
5745	149	802.11a	16.43	Pass
5785	157	802.11a	16.40	Pass
5825	165	802.11a	16.40	Pass

Table A-3. Conducted Bandwidth Measurements



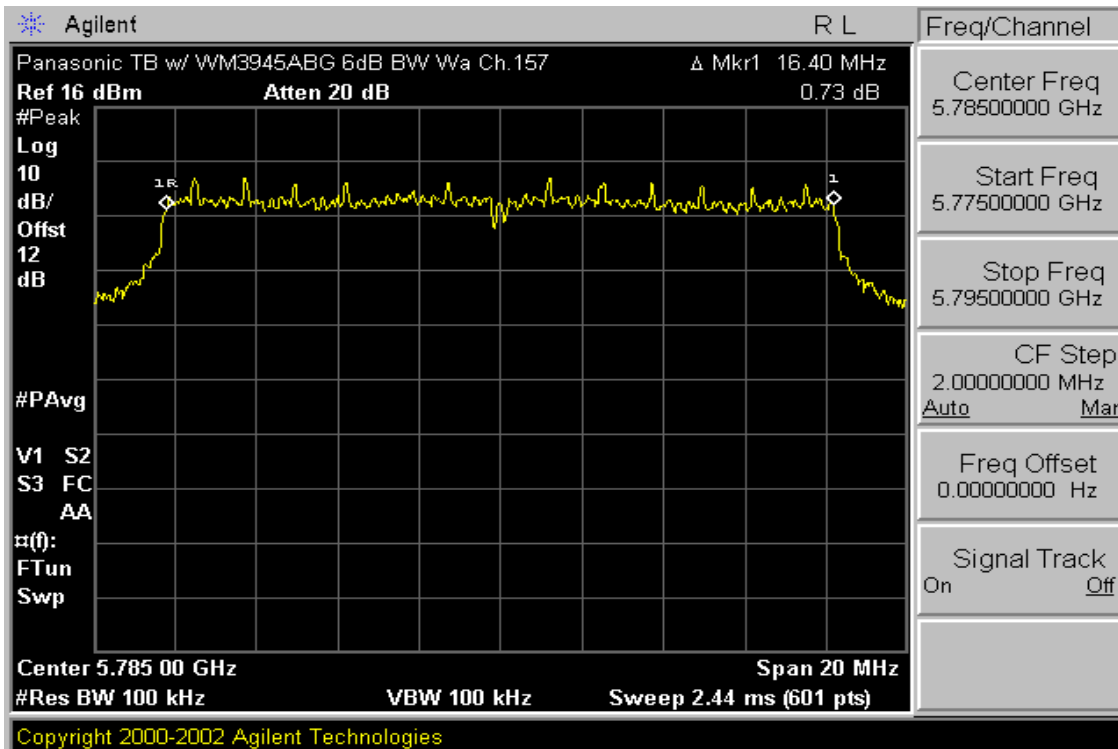
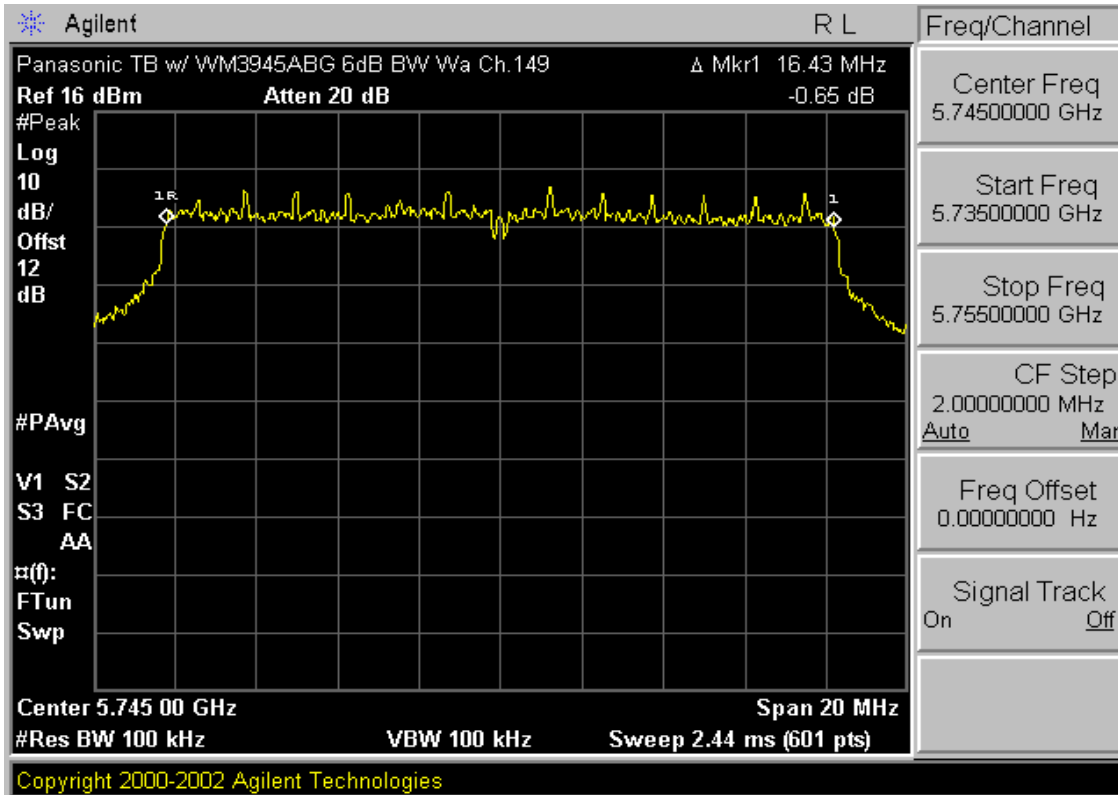
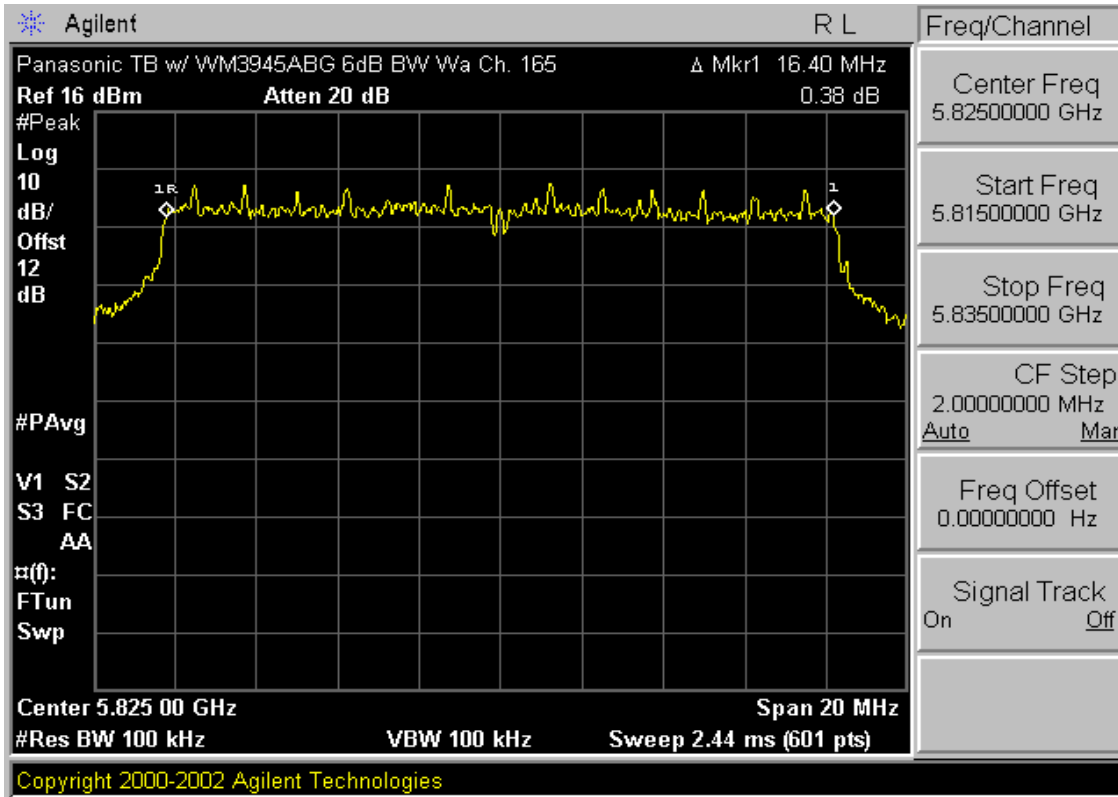


Figure A-2. Test Instrument & Measurement Setup

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 16 of 50



PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 17 of 50



PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 18 of 50

Output Power Measurement – 802.11b

§15.247(b)

A transmitter antenna terminal of EUT is connected to the input of a RF power sensor. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies. **The maximum permissible conducted output power is 1 Watt.**

Freq [MHz]	Channel	Data Rate [Mbps]	Main Ant. Measured Power [dBm]	Aux Ant. Measured Power [dBm]
2412	1	1	13.37	13.58
		2	13.15	13.41
		5.5	12.93	13.29
		11	12.68	13.04
2437	6	1	13.45	13.49
		2	12.88	13.34
		5.5	12.8	12.67
		11	12.53	12.39
2462	11	1	12.31	11.92
		2	12.13	12.19
		5.5	11.56	11.65
		11	11.28	11.39

Table A-4. Output Power Measurements

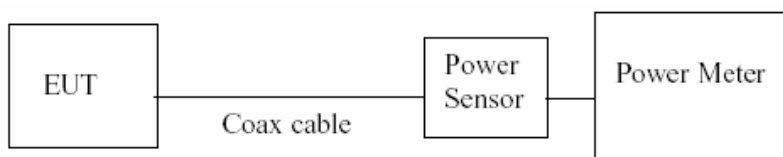


Figure A-3. Test Instrument & Measurement Setup

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 19 of 50

Output Power Measurement – 802.11g

§15.247(b)

A transmitter antenna terminal of EUT is connected to the input of a RF power sensor. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies. **The maximum permissible conducted output power is 1 Watt.**

Freq [MHz]	Channel	Data Rate [Mbps]	Main Ant. Measured Power [dBm]	Aux Ant. Measured Power [dBm]
2412	1	6	13.86	14.12
		9	13.64	13.98
		12	13.51	13.33
		18	13.28	13.09
		24	12.89	13.19
		36	12.40	12.15
		48	12.03	11.80
		54	10.76	10.51
2437	6	6	14.21	13.52
		9	13.51	13.78
		12	13.50	13.57
		18	13.32	13.34
		24	12.87	12.87
		36	12.35	12.33
		48	11.98	12.01
		54	10.74	10.77
2462	11	6	12.99	12.64
		9	12.87	12.83
		12	12.75	12.69
		18	11.97	11.96
		24	12.10	12.03
		36	11.58	11.04
		48	10.72	10.70
		54	10.51	10.87

Table A-5. Test Instrument & Measurement Setup

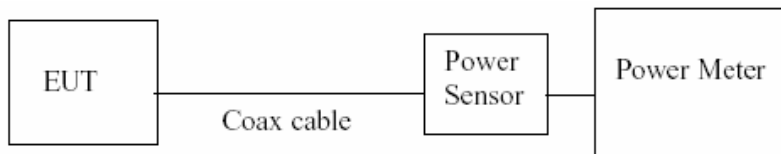




Figure A-4. Test Instrument & Measurement Setup

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 20 of 50

Output Power Measurement – 802.11a (5.8GHz)

§15.247(b)

A transmitter antenna terminal of EUT is connected to the input of a RF power sensor. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies. **The maximum permissible conducted output power is 1 Watt.**

Freq [MHz]	Channel	Data Rate [Mbps]	Main Ant. Measured Power [dBm]	Aux Ant. Measured Power [dBm]
5745	149	6	15.33	14.57
		9	14.62	14.50
		12	14.62	14.39
		18	13.66	14.17
		24	14.01	13.71
		36	13.48	13.30
		48	9.03	8.21
		54	6.20	6.20
5785	157	6	15.35	14.80
		9	14.79	14.45
		12	14.74	14.35
		18	14.01	14.11
		24	14.31	13.75
		36	13.21	13.32
		48	8.70	8.40
		54	6.73	6.02
5825	165	6	15.43	14.85
		9	15.19	14.17
		12	14.52	14.08
		18	14.29	13.89
		24	13.91	13.90
		36	13.36	12.84
		48	8.53	8.32
		54	6.55	5.99

Table A-6. Test Instrument & Measurement Setup

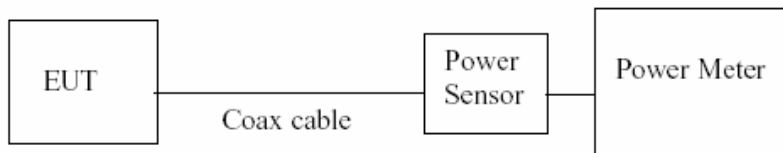



Figure A-5. Test Instrument & Measurement Setup

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 21 of 50

Peak Power Spectral Density (802.11a/b/g)

§15.247(d)

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies. **The maximum permissible peak power spectral density is 8 dBm in any 3 kHz band.**

The spectrum analyzer is set to:

RBW = 3 kHz (10 dB/div)
 VBW = 3 kHz
 Span = 300 kHz
 Ref. Level = 15 dBm (802.11b/g) / 16 dBm (802.11a)
 Sweep = 100 s

Frequency [MHz]	Channel No.	Modulation	Power Density Test Results	
			[dBm]	Pass/Fail
2412	1	802.11b	-14.32	Pass
2437	6	802.11b	-16.02	Pass
2462	11	802.11b	-15.51	Pass
2412	1	802.11g	-14.12	Pass
2437	6	802.11g	-14.78	Pass
2462	11	802.11g	-14.74	Pass
5745	149	802.11a	-13.02	Pass
5785	157	802.11a	-13.15	Pass
5825	165	802.11a	-12.44	Pass

Table A-7. Conducted Power Density Measurements

1 See next pages for actual measured spectrum plots

2 Peak Power Density + Attenuation = dBm






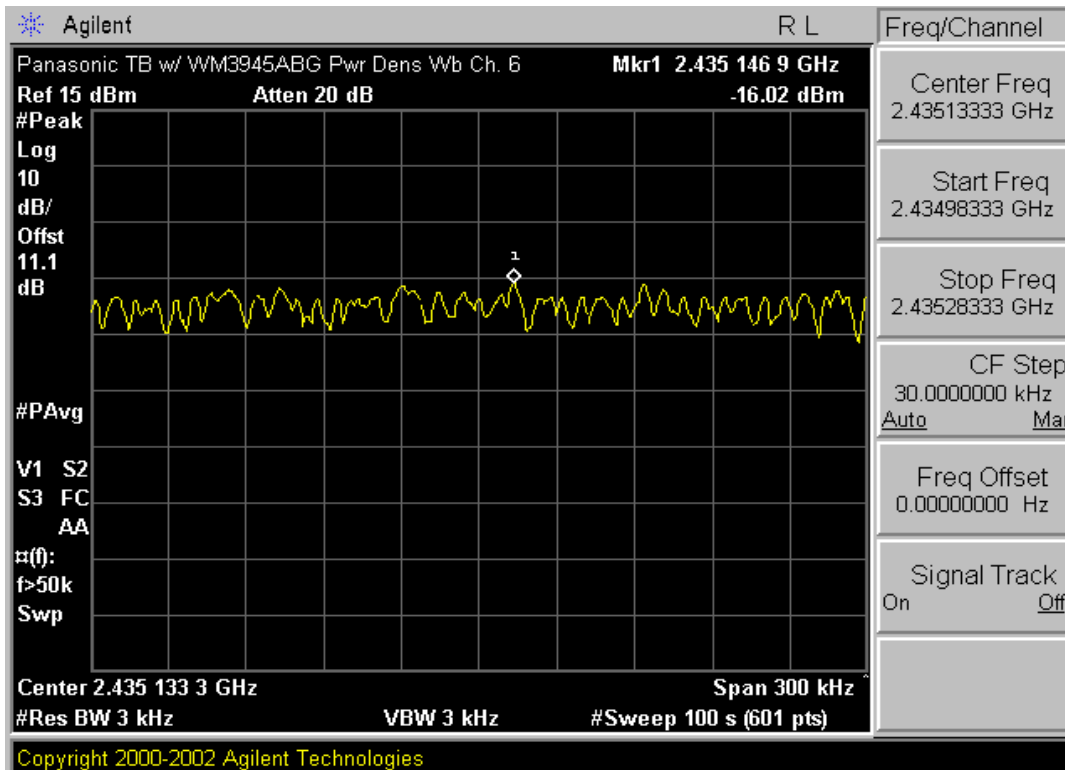
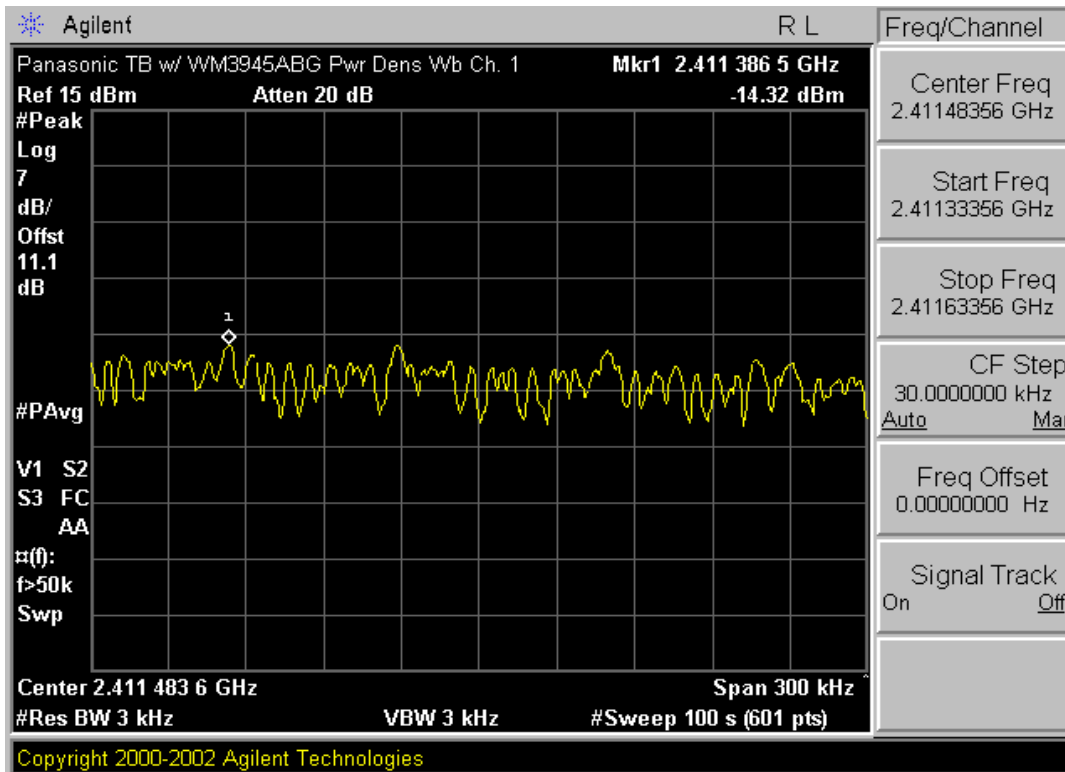


Figure A-6. Test Instrument & Measurement Setup



PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 22 of 50

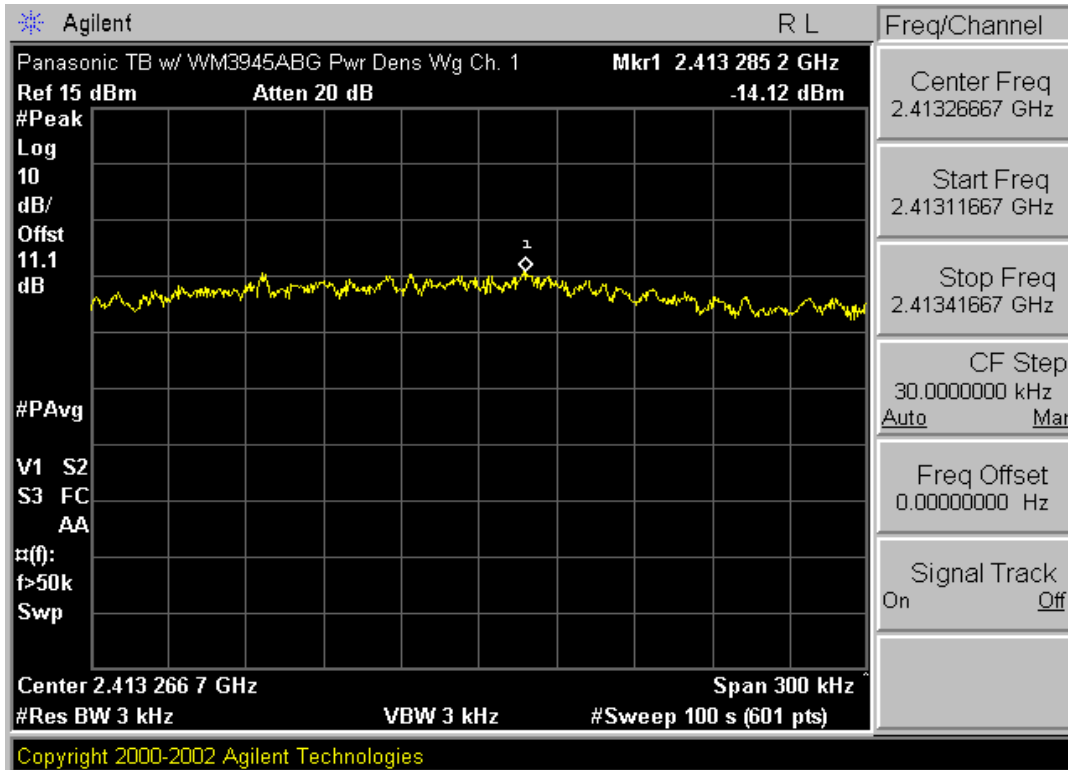



PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 23 of 50

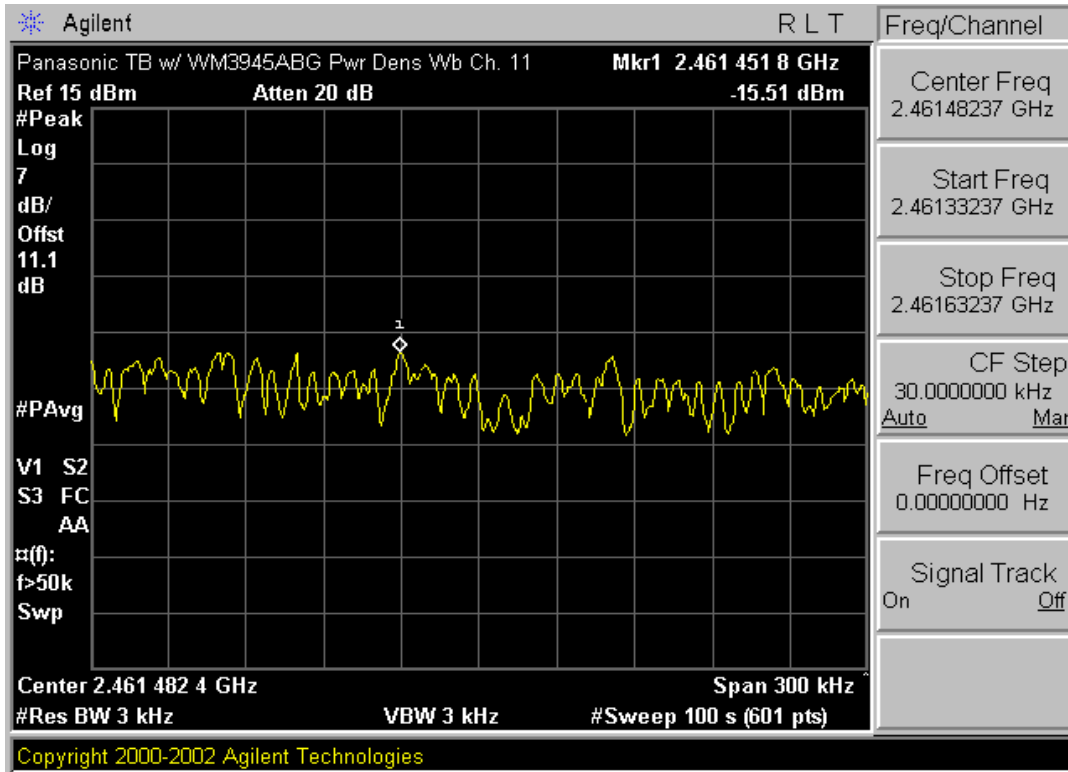


PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 24 of 50

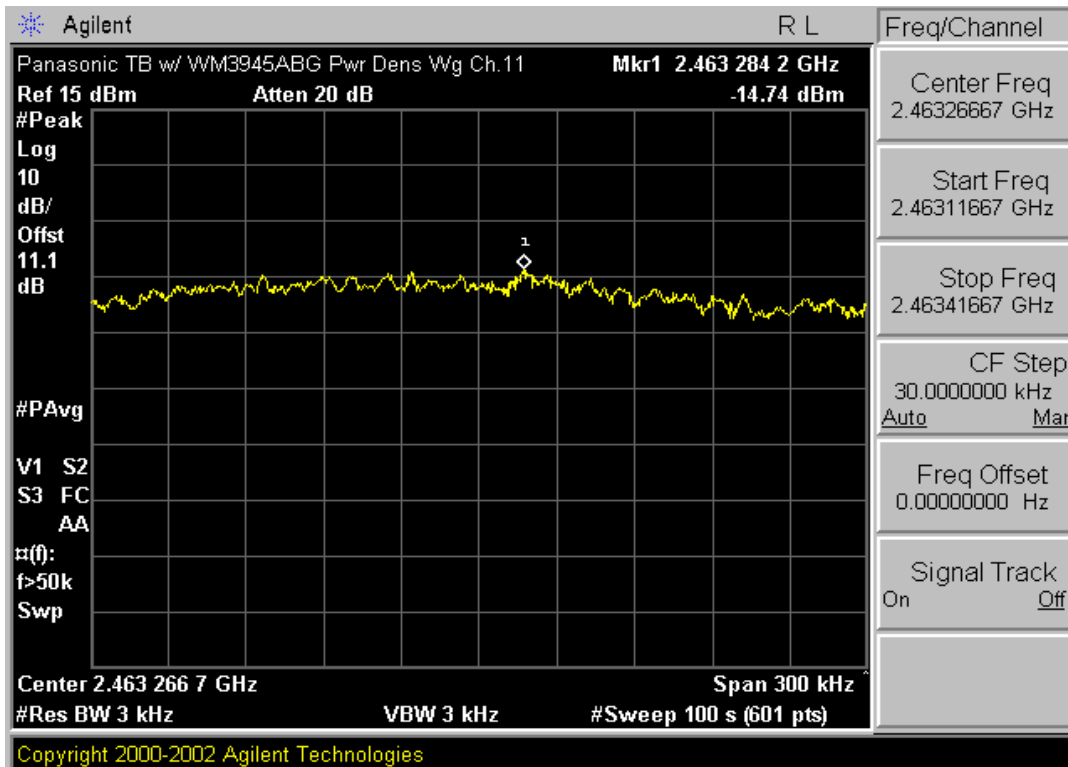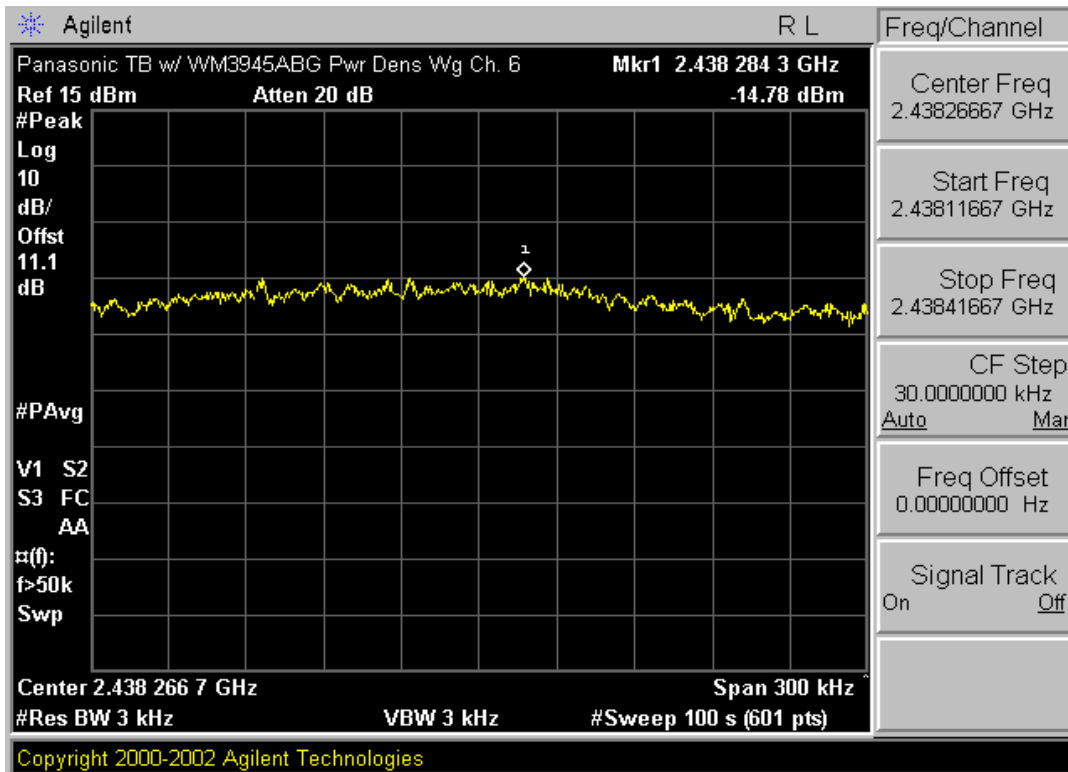

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 25 of 50

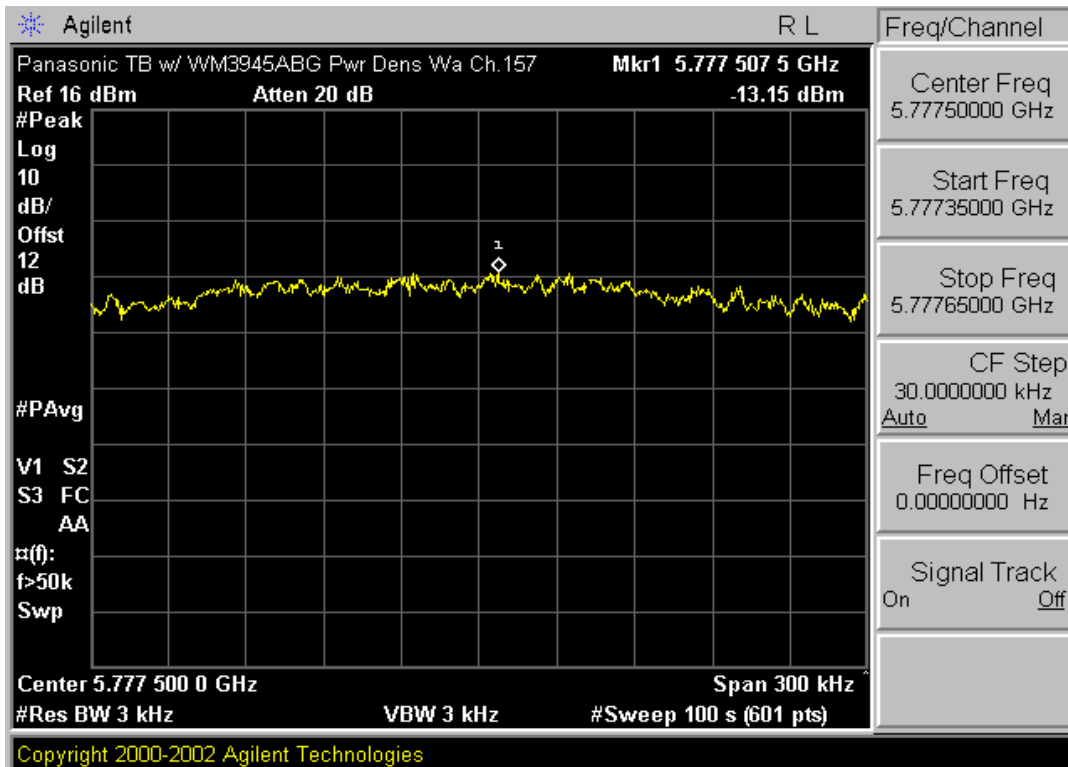
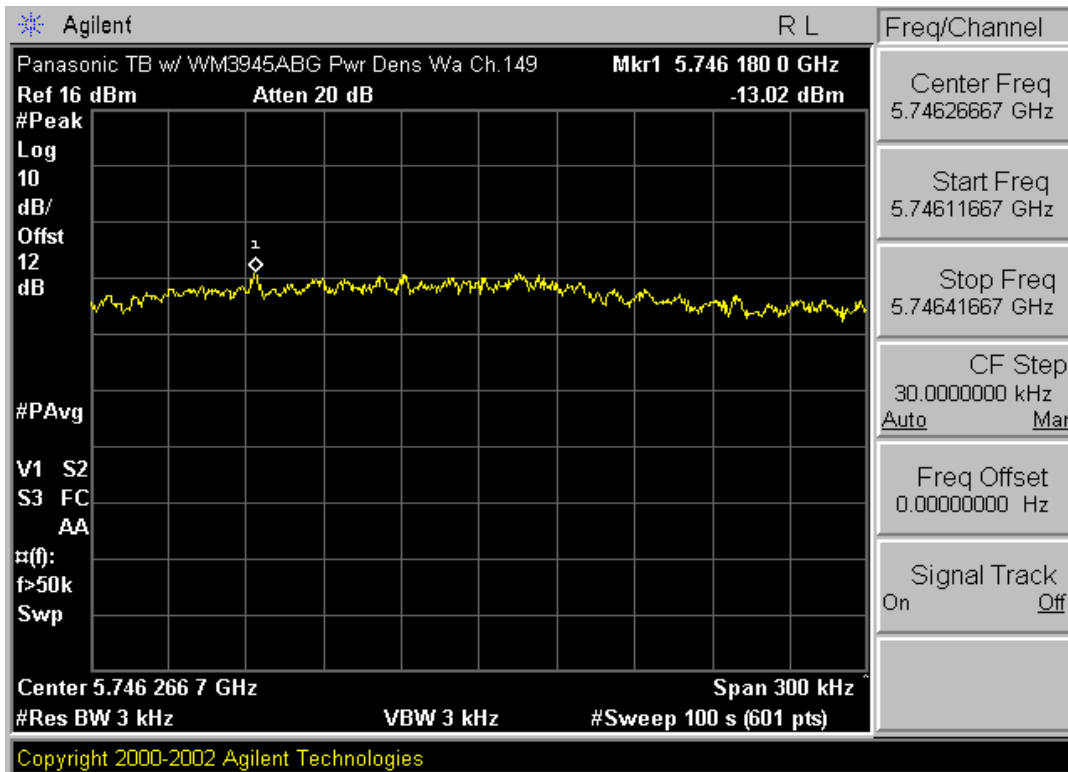


PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 26 of 50


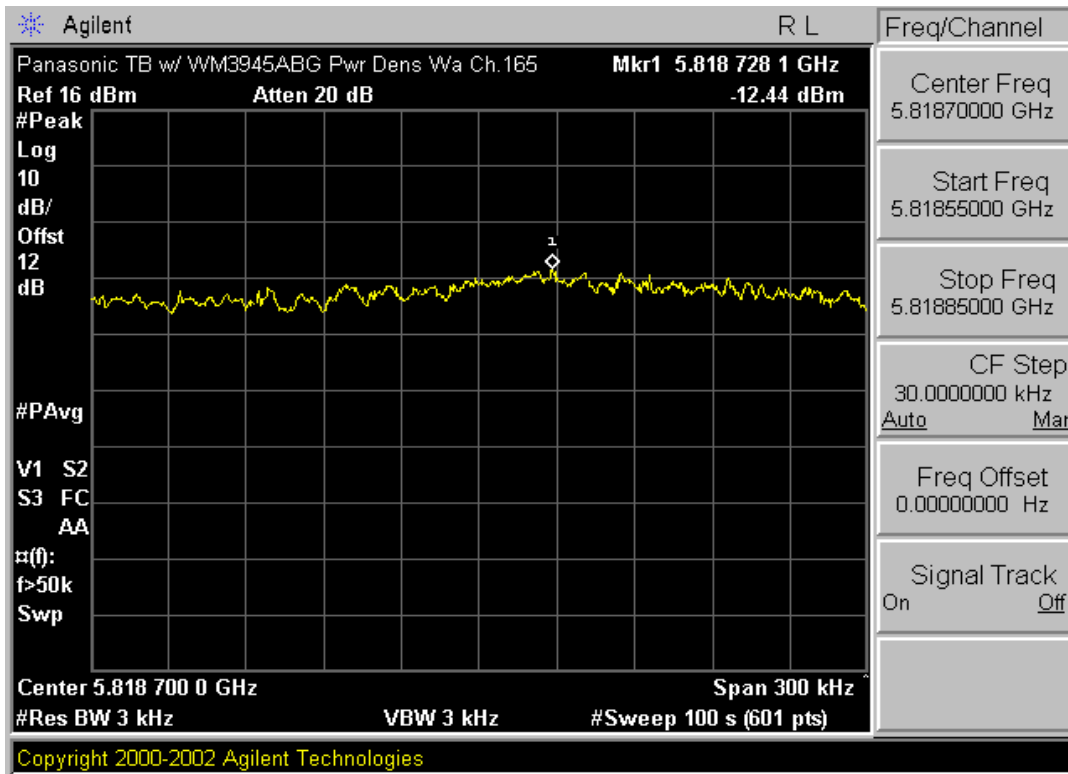


PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 27 of 50

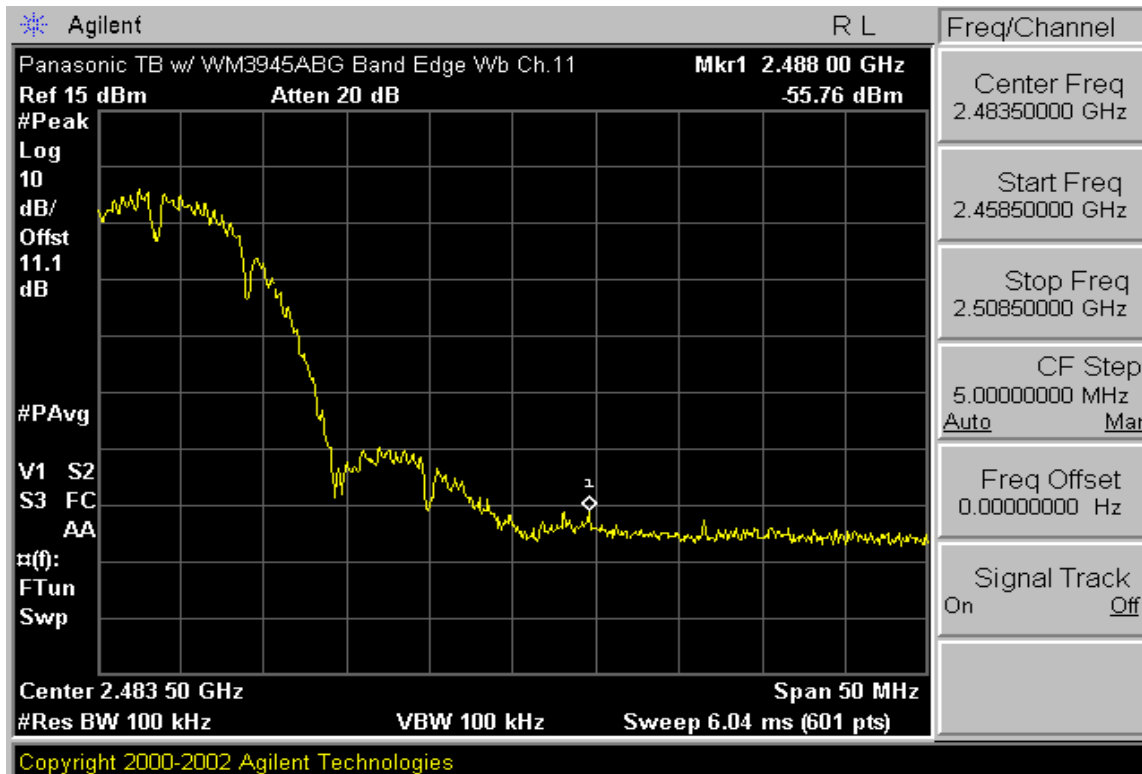
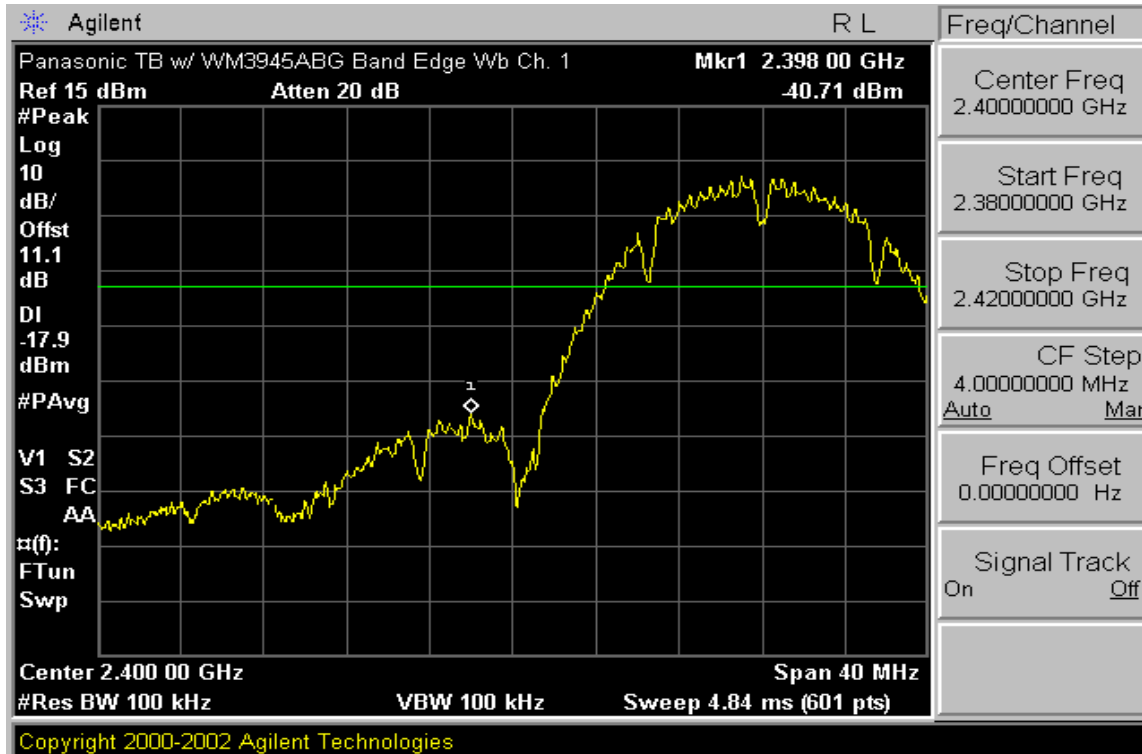
Occupied BandEdge /BandEdge at 20dB below & Out of Band Emissions



PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 28 of 50

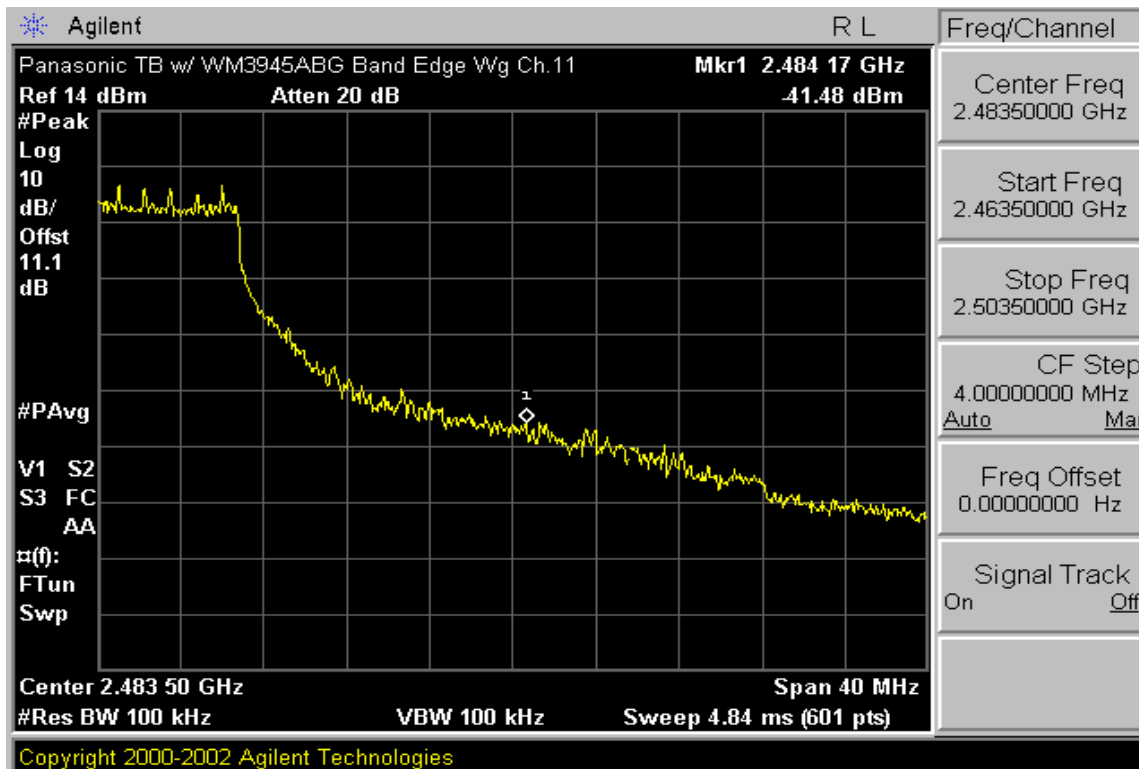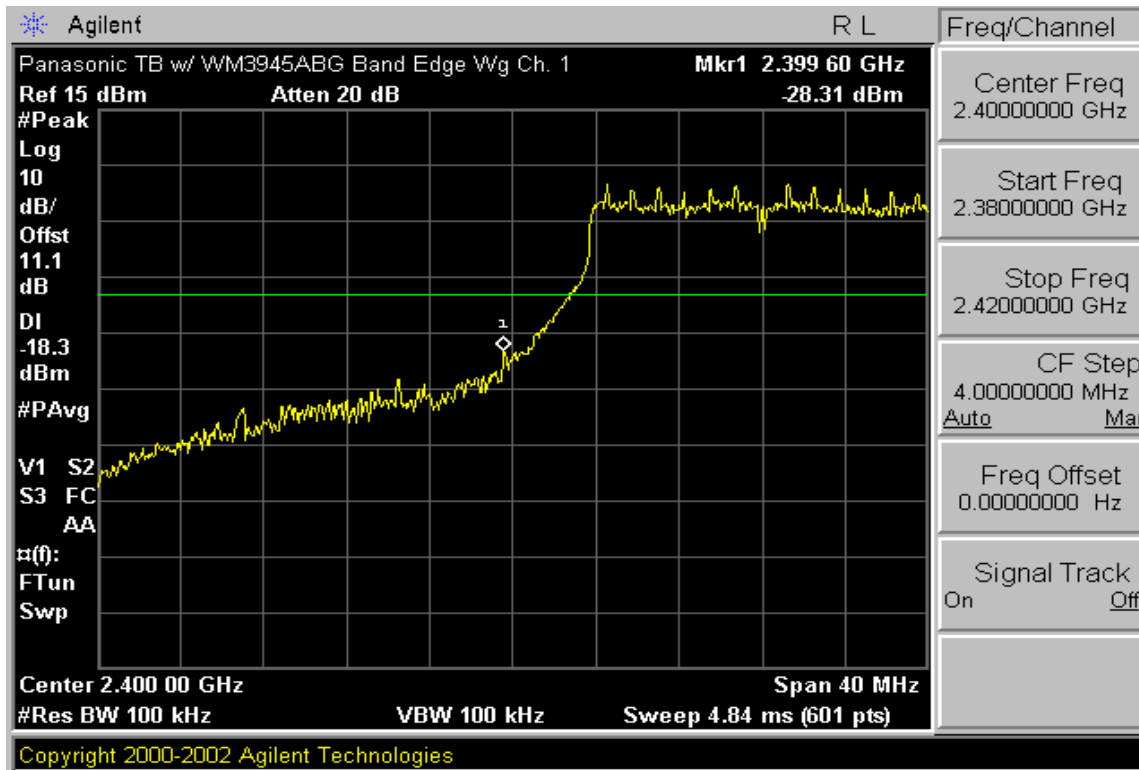

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 29 of 50

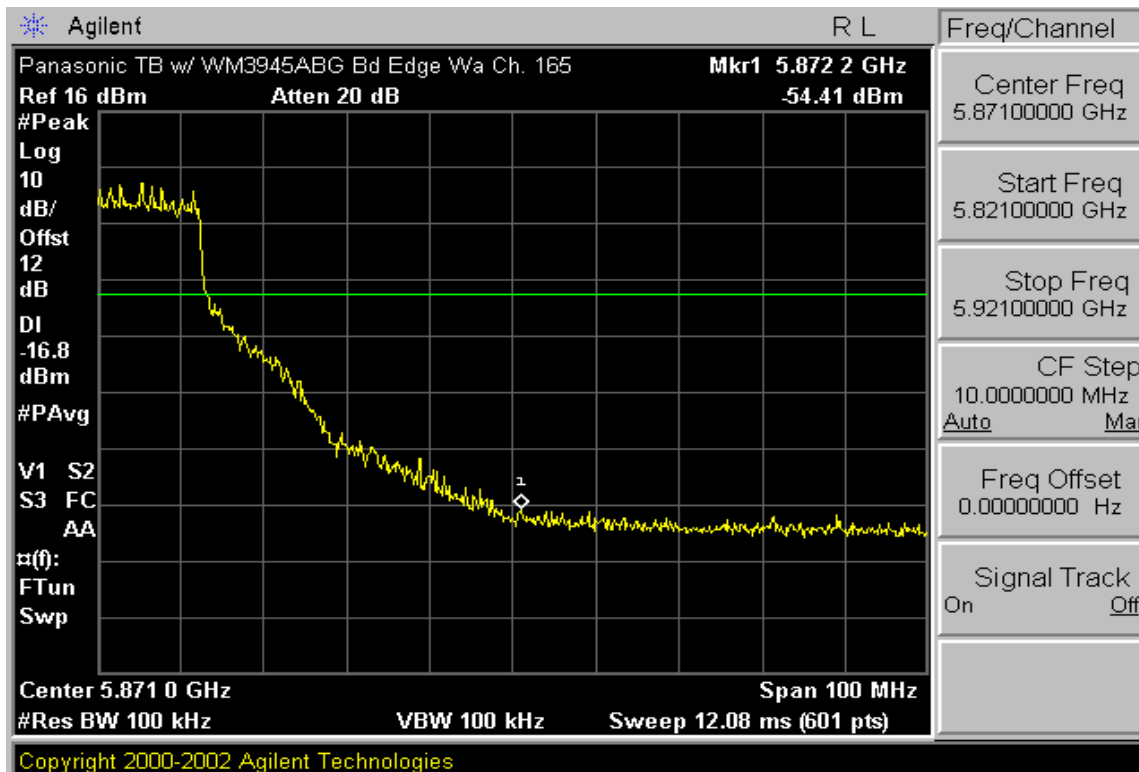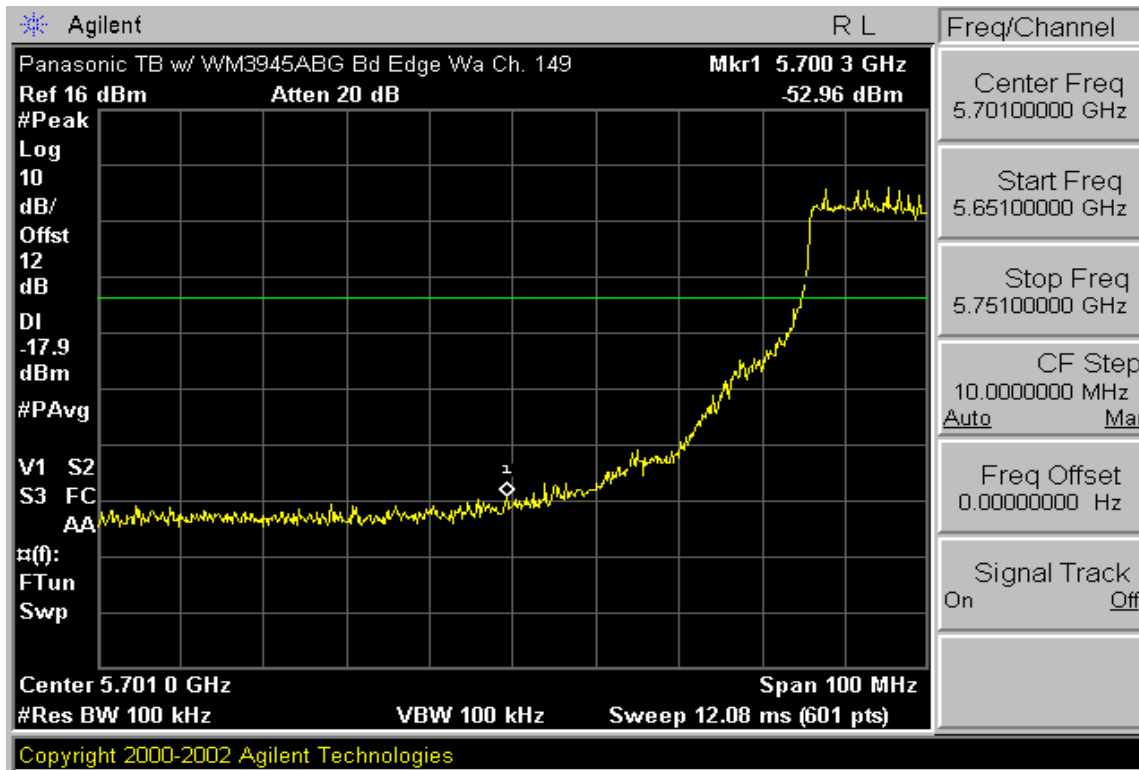

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 30 of 50

Radiated Measurements

§15.247(b) / §15.205 & §15.209

The EUT was tested from 9kHz to the tenth harmonic of the fundamental frequency of the transmitter. Below 1GHz a CISPR quasi peak detector was used. Above 1 GHz average measurements were taken, using RBW= 1MHz, VBW= 10Hz, and linearly polarized horn antennas. In addition, peak measurements (RBW= 1MHz, VBW= 1MHz) were taken to ensure that the peak levels are not more than 20dB above the average limit. No harmonics/spurs peak emissions are more than 20dB above the average limit. Special attention is taken for the EUT's harmonic and spurious radiated emissions in the restricted bands of operations, as defined in Section 15.205.

Frequency	F/S [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table A-8. Radiated Limits

TEST MEASUREMENT EQUIPMENT

Agilent E4448A	PSA Spectrum Analyzer 3Hz - 50GHz
HP 8566B	Spectrum Analyzer 100 Hz - 22GHz
HP 83017A	Microwave Analyzer 40dB Gain (0.5 - 26.5GHz)
HP 3784A	Digital Transmission Analyzer
EMCO 3115	Horn Antenna (1 - 18GHz)
HP 8495A	20dB Attenuator (DC - 40GHz) 0-70dB
HP 8493B	10dB Attenuator
MicroCoax Cables	Low Loss Microwave Cables (1 - 26.5GHz)
CDI Dipoles	Dipole Antennas (30 - 1000MHz)
EMCO 3116	Horn Antenna (18 - 40GHz)

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 31 of 50

Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 1 Mbps

Distance of Measurements: 3 Meters

Channel: 01

	Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol. [H/V]	Field Strength [dB μ V/m]	Field Strength [μ V/m]	Margin [dB]
*	4824.00	-109.18	40.6	H	38.42	83.37	-15.58
	7236.00	-106.24	45.8	H	46.56	212.81	-32.04
	9648.00	-135.00	49.6	H	21.60	12.02	-57.00
*	12060.00	-135.00	52.1	H	24.10	16.03	-29.90

Table A-9. Peak Radiated Measurements @ 3 meters

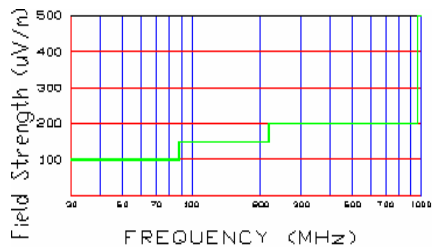


Figure A-7. Radiated limits at 3 meters.

NOTES:

- All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: * = Restricted Band measured frequency)
- All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
- Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
- The peak emissions above 1 GHz are not more than 20 dB above the average limit.
- The antenna is manipulated through typical positions, polarity and length during the tests.
- The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
- < - 135 dBm are below the analyzer floor level.
- Above 1 GHz, the limit is 500 μ V/m (54dB μ V/m) at 3 meters radiated.

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 32 of 50

Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Channel: 06

	Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol. [H/V]	Field Strength [dBμV/m]	Field Strength [μV/m]	Margin [dB]
*	4874.00	-108.70	40.50	H	38.80	87.10	-15.20
*	7311.00	-106.03	47.30	V	48.27	259.12	-5.73
	9748.00	-135.00	50.05	H	22.05	12.66	-58.75
*	12185.00	-135.00	52.50	H	24.50	16.79	-29.50

Table A-10. Peak Radiated Measurements @ 3 meters

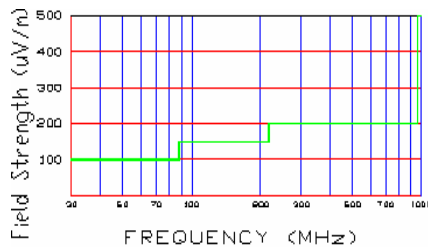


Figure A-8. Radiated limits at 3 meters.

NOTES:

- All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: * = Restricted Band measured frequency)
- All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
- Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
- The peak emissions above 1 GHz are not more than 20 dB above the average limit.
- The antenna is manipulated through typical positions, polarity and length during the tests.
- The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
- < - 135 dBm are below the analyzer floor level.
- Above 1 GHz, the limit is 500 μV/m (54dBμV/m) at 3 meters radiated.

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 33 of 50

Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 1 Mbps

Distance of Measurements: 3 Meters

Channel: 11

	Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol. [H/V]	Field Strength [dBμV/m]	Field Strength [μV/m]	Margin [dB]
*	4924.00	-109.59	40.95	V	38.36	82.79	-15.64
*	7386.00	-102.45	46.25	V	50.80	346.74	-3.20
	9848.00	-135.00	49.90	H	21.90	12.45	-57.31
*	12310.00	-135.00	52.10	H	24.10	16.03	-29.90

Table A-11. Peak Radiated Measurements @ 3 meters

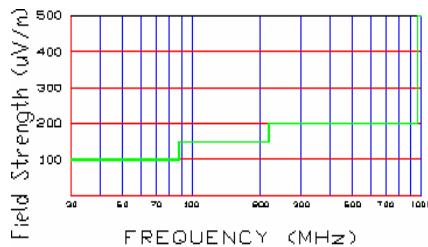




Figure A-9. Radiated limits at 3 meters.

NOTES:

- All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: * = Restricted Band measured frequency)
- All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
- Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
- The peak emissions above 1 GHz are not more than 20 dB above the average limit.
- The antenna is manipulated through typical positions, polarity and length during the tests.
- The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
- < - 135 dBm are below the analyzer floor level.
- Above 1 GHz, the limit is 500 μV/m (54dBμV/m) at 3 meters radiated.

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 34 of 50

Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 36 Mbps
 Distance of Measurements: 3 Meters
 Channel: 149

	Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol. [H/V]	Field Strength [dB μ V/m]	Field Strength [μ V/m]	Margin [dB]
*	11490.00	-104.20	40.6	H	49.2	288.4	-4.78
	17235.00	-112.30	45.8	H	54.0	499.5	-14.26
*	22980.00	-135.00	49.6	V	38.9	88.3	-15.06
	28725.00	-135.00	52.1	V	54.0	498.3	-14.28

Table A-12. Peak Radiated Measurements @ 3 meters

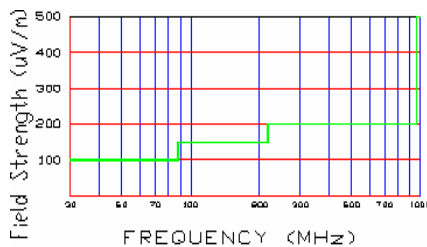


Figure A-10. Radiated limits at 3 meters.

NOTES:

- All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: * = Restricted Band measured frequency)
- All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
- Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
- The peak emissions above 1 GHz are not more than 20 dB above the average limit.
- The antenna is manipulated through typical positions, polarity and length during the tests.
- The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
- < - 135 dBm are below the analyzer floor level.
- Above 1 GHz, the limit is 500 μ V/m (54dB μ V/m) at 3 meters radiated.

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 35 of 50

Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 36 Mbps
 Distance of Measurements: 3 Meters
 Channel: 157

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol. [H/V]	Field Strength [dBμV/m]	Field Strength [μV/m]	Margin [dB]
* 11570.00	-103.60	40.5	H	49.8	309.7	-4.16
17355.00	-106.30	47.3	H	61.7	1221.8	-6.49
23140.00	-135.00	50.1	V	40.1	101.3	-28.12
28925.00	-135.00	52.5	V	55.3	580.8	-12.95

Table A-13. Peak Radiated Measurements @ 3 meters

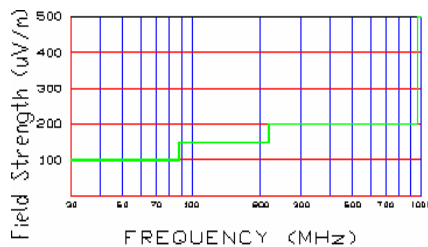


Figure A-11. Radiated limits at 3 meters.

NOTES:

- All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: * = Restricted Band measured frequency)
- All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
- Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
- The peak emissions above 1 GHz are not more than 20 dB above the average limit.
- The antenna is manipulated through typical positions, polarity and length during the tests.
- The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
- < - 135 dBm are below the analyzer floor level.
- Above 1 GHz, the limit is 500 μV/m (54dBμV/m) at 3 meters radiated.

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 36 of 50

Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 36 Mbps
 Distance of Measurements: 3 Meters
 Channel: 165

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol. [H/V]	Field Strength [dBμV/m]	Field Strength [μV/m]	Margin [dB]
* 11650.00	-104.60	40.6	V	49.2	286.7	-4.83
17475.00	-111.40	45.9	H	55.5	593.6	-12.76
23300.00	-135.00	49.4	V	40.5	106.0	-27.72
29125.00	-135.00	53.4	V	57.5	749.9	-10.73

Table A-14. Peak Radiated Measurements @ 3 meters

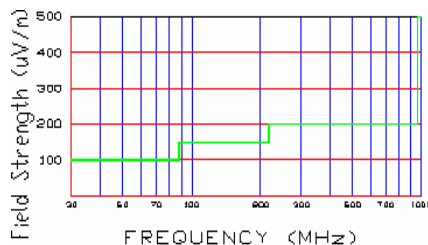



Figure A-12. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μV/m (54dBμV/m) at 3 meters radiated.

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 37 of 50

Radiated Restricted Band Measurements

§15.205 / §15.209

- Special attention is made for the EUT's harmonic and spurious radiated emission in the restricted bands of operations.

Operating Frequency: 2462 MHz

Distance of Measurements: 3 Meters

Data Rate: 6 Mbps

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol. [H/V]	Field Strength [dB μ V/m]	Field Strength [μ V/m]	Margin [dB]
2483.5	-97.2	31.80	H	41.57	119.81	-12.41
2486.1	-92.7	31.80	V	46.07	201.14	-7.91
2489.3	-91.3	31.80	V	47.52	237.68	-6.46
2493.0	-92.8	31.80	H	45.99	199.30	-7.99
2495.8	-97.0	31.80	H	41.80	123.03	-12.18
2496.3	-97.4	31.80	H	41.43	117.90	-12.55

Table A-15. Radiated Restricted Band Measurements at 3-meters


NOTES:

1. The antenna is manipulated through typical positions, polarity and length during the testing.
2. The EUT is supplied with the minimal AC voltage or/and a new/fully re-charged battery.
3. The spectrum is measured from 9 kHz up to the 10th harmonic and the worst-case emissions are reported.
4. The conducted limits are shown on Figure A-14. Above 1 GHz the limit is 500 V/m.
5. < -135 dBm is below the analyzer measurement floor level.
6. The data in the table are Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
7. The peak emissions above 1 GHz are not more than 20 dB above the average limit.


PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 38 of 50

Line-Conducted Test Data

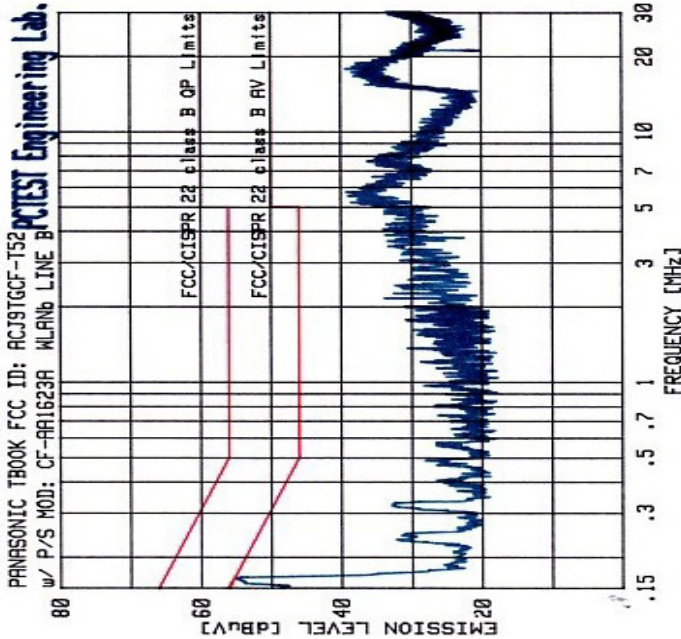§15.207



No.	Freq. [MHz]	Quasi-Pk [dBuV]	Limit [dBuV]	Margin [dB]	Average [dBuV]	Limit [dBuV]	Margin [dB]
1	.150	39.23	65.98	-26.75	23.32	55.83	-32.51
2	17.661	29.81	60.00	-30.19	21.23	50.00	-28.77
3	5.704	31.37	60.00	-28.63	20.98	50.00	-29.02
4	5.529	31.57	60.00	-28.43	21.31	50.00	-28.69
5	5.165	30.94	60.00	-29.06	19.63	50.00	-30.37
6	17.136	29.60	60.00	-30.40	21.14	50.00	-28.86
7	18.067	29.10	60.00	-30.90	21.18	50.00	-28.82
8	16.525	27.78	60.00	-32.22	20.74	50.00	-29.26
9	3.992	25.23	56.00	-30.77	18.42	46.00	-27.58
10	5.000	29.56	60.00	-30.44	20.23	46.00	-25.77

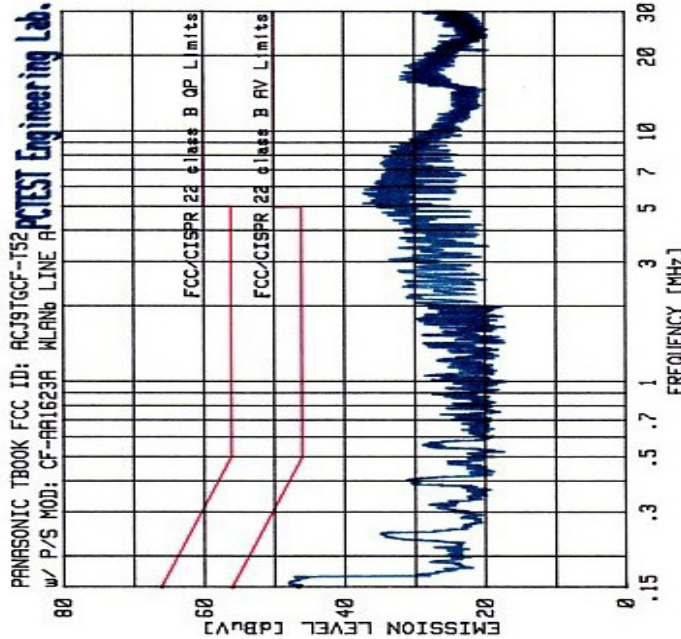

No.	Freq. [MHz]	Quasi-Pk [dBuV]	Limit [dBuV]	Margin [dB]	Average [dBuV]	Limit [dBuV]	Margin [dB]
1	.150	34.94	65.98	-31.04	24.93	55.65	-30.72
2	4.920	26.27	56.00	-29.73	21.76	50.00	-28.24
3	4.677	25.72	56.00	-30.28	19.23	46.00	-26.77
4	4.607	23.53	56.00	-32.47	17.14	46.00	-28.86
5	3.084	21.73	56.00	-34.27	17.35	46.00	-28.65
6	5.097	26.69	60.00	-33.31	19.75	50.00	-30.25
7	5.633	28.07	60.00	-31.93	18.39	50.00	-31.61
8	5.753	27.80	60.00	-32.20	19.89	50.00	-30.11
9	4.356	24.09	56.00	-31.91	18.30	46.00	-27.70
10	5.485	28.15	60.00	-31.85	19.75	50.00	-30.25


Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are Specified in EN55022.
3. Line A = Phase; Line B = Neutral
4. Deviations to the Specifications: None.


PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 39 of 50

Line-Conducted Test Data (Cont'd)

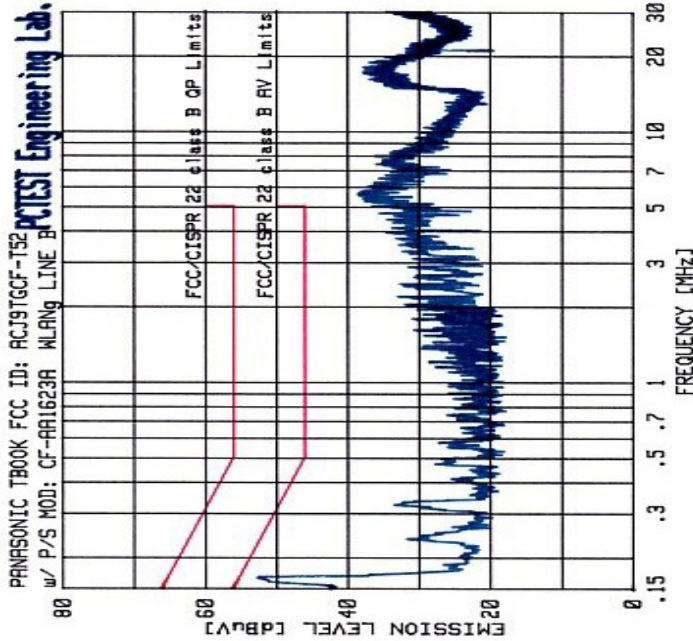§15.207



No.	Freq. [MHz]	Quasi-Pk [dBuV]	Limit [dBuV]	Margin [dB]	Average [dBuV]	Limit [dBuV]	Margin [dB]
1	.150	34.01	65.98	-31.97	23.92	55.74	-31.82
2	4.721	28.13	56.00	-27.87	18.37	46.00	-27.63
3	3.898	25.60	56.00	-30.40	17.41	46.00	-28.59
4	4.459	26.81	56.00	-29.19	18.19	46.00	-27.81
5	5.625	31.72	60.00	-28.28	20.68	50.00	-29.32
6	4.903	29.43	56.00	-26.57	18.47	50.00	-31.53
7	17.221	27.90	60.00	-32.10	20.08	50.00	-29.92
8	4.033	26.20	56.00	-29.80	18.09	46.00	-27.91
9	5.306	31.24	60.00	-28.76	20.65	50.00	-29.35
10	17.957	28.26	60.00	-31.74	19.62	50.00	-30.38

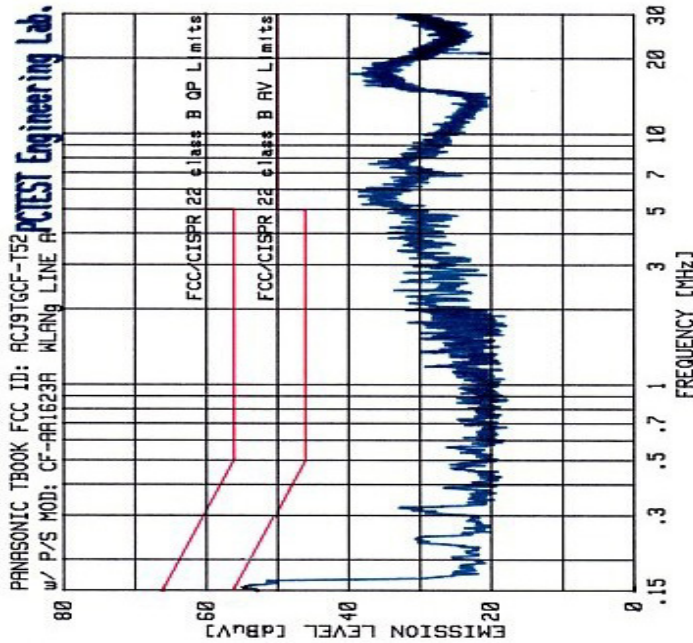

No.	Freq. [MHz]	Quasi-Pk [dBuV]	Limit [dBuV]	Margin [dB]	Average [dBuV]	Limit [dBuV]	Margin [dB]
1	.150	40.65	65.98	-25.33	24.82	55.62	-30.80
2	17.251	28.54	60.00	-31.46	21.01	50.00	-28.99
3	5.610	31.23	60.00	-28.77	21.23	50.00	-28.77
4	5.862	30.28	60.00	-29.72	22.01	50.00	-27.99
5	3.972	24.86	56.00	-31.14	17.82	46.00	-28.18
6	4.813	27.05	56.00	-28.95	19.55	46.00	-26.45
7	3.824	24.83	56.00	-31.17	18.04	46.00	-27.96
8	4.251	26.36	56.00	-29.64	18.60	46.00	-27.40
9	5.234	30.17	60.00	-29.83	22.58	50.00	-27.42
10	17.143	28.30	60.00	-31.70	20.59	50.00	-29.41


Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are Specified in EN55022.
3. Line A = Phase; Line B = Neutral
4. Deviations to the Specifications: None.


PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 40 of 50

Line-Conducted Test Data (Cont'd)

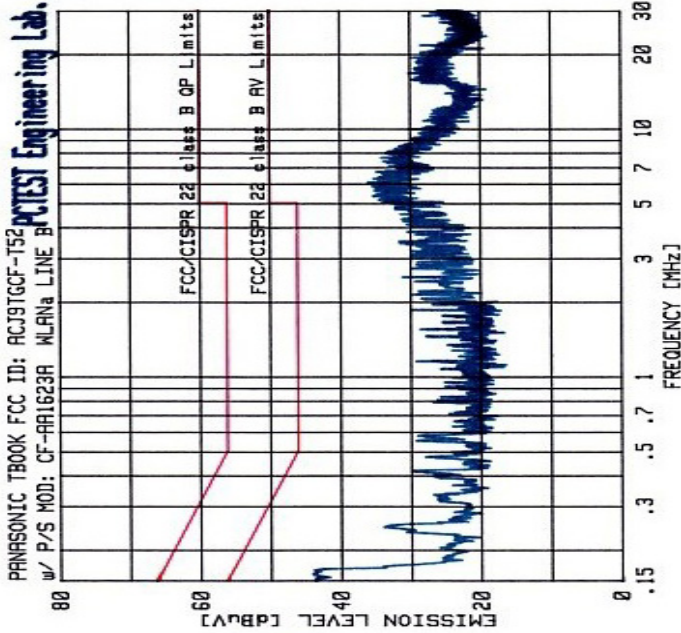§15.207



No.	Freq. [MHz]	Quasi-Pk [dBuV]	Limit [dBuV]	Margin [dB]	Average [dBuV]	Limit [dBuV]	Margin [dB]
1	.150	31.76	65.98	-34.22	23.66	55.74	-32.08
2	4.971	25.58	56.00	-30.42	19.85	46.00	-26.15
3	4.723	25.80	56.00	-30.20	18.69	46.00	-27.31
4	6.077	26.90	60.00	-33.10	20.66	50.00	-29.34
5	3.504	22.23	56.00	-33.77	16.87	46.00	-29.13
6	3.396	21.56	56.00	-34.44	17.46	46.00	-28.54
7	5.798	27.57	60.00	-32.43	19.72	50.00	-30.28
8	5.301	26.57	60.00	-33.43	20.38	50.00	-29.62
9	4.429	22.39	56.00	-33.61	16.97	46.00	-29.03
10	5.563	27.96	60.00	-32.04	18.08	50.00	-31.92

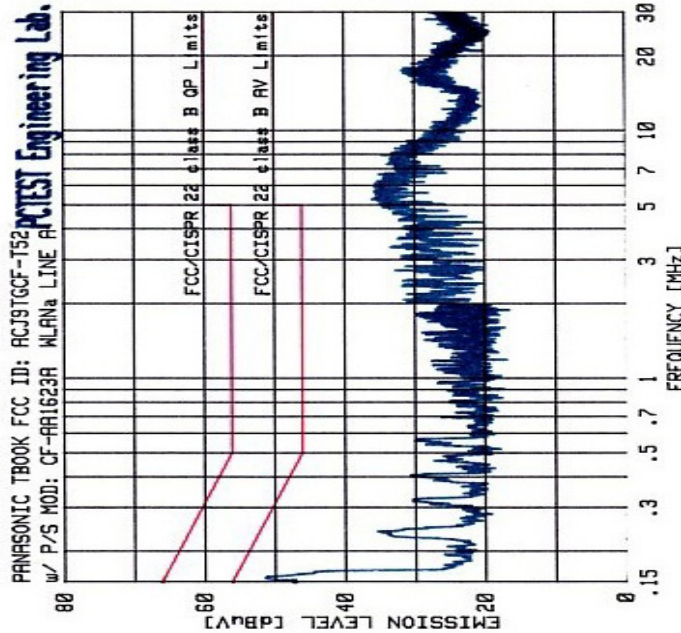

No.	Freq. [MHz]	Quasi-Pk [dBuV]	Limit [dBuV]	Margin [dB]	Average [dBuV]	Limit [dBuV]	Margin [dB]
1	.150	38.34	65.98	-27.64	24.93	55.70	-30.77
2	4.956	26.33	56.00	-29.67	18.51	46.00	-27.49
3	3.360	23.67	56.00	-32.33	17.73	46.00	-28.27
4	4.635	24.93	56.00	-31.07	18.92	46.00	-27.08
5	2.717	21.06	56.00	-34.94	16.64	46.00	-29.36
6	3.661	21.62	56.00	-34.38	16.34	46.00	-29.66
7	4.268	22.97	56.00	-33.03	18.15	46.00	-27.85
8	5.289	27.30	60.00	-32.70	19.76	50.00	-30.24
9	3.035	21.33	56.00	-34.67	16.47	46.00	-29.53
10	3.956	22.27	56.00	-33.73	16.74	46.00	-29.26

Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are Specified in EN55022.
3. Line A = Phase; Line B = Neutral
4. Deviations to the Specifications: None.

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 41 of 50

Receiver Spurious Measurements

§15.205 / §15.209

Operating Frequency: 2462 MHz
 Distance of Measurements: 3 Meters
 Data Rate: 6 Mbps

FREQ (MHz)	Level (dBm)	AFCL (dB/m)	POL (H/V)	Height (m)	Azimuth (° angle)	F/S (uV/M)	Margin (dB)
78.26	-82.79	7.29	H	1.5	135	37.63	-8.5
84.31	-85.27	7.97	H	1.1	225	30.60	-10.3
108.55	-84.35	10.46	H	1.2	60	45.24	-10.4
135.63	-88.25	12.65	V	2.3	45	37.20	-12.1
403.27	-94.07	23.78	H	2.1	45	68.44	-9.3
487.26	-102.39	25.79	V	2.6	270	33.16	-15.6

Table A-16. Radiated Measurements at 3-meters

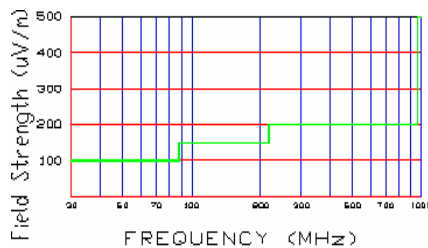


Figure A-13. Radiated limits at 3 meters.

NOTES:

1. All emissions were investigated and the worst-case emissions are reported.
2. For hand-held devices, the EUT is rotated through three orthogonal axes to determine which configuration produces the maximum emissions.
3. The EUT is supplied with the minimal AC voltage or/and a new/fully re-charged battery.
4. The EUT was tested up to the 10th harmonic (25GHz) and no significant emission was found.
5. Above 1 GHz the limit is 500uV/m at 3 meters radiated.



PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 42 of 50

EXHIBIT B – LABELING REQUIREMENTS

Sample Label & Location

New Labeling Requirements


Per 2.1074 & 15.19; Docket 95-19

The sample label shown below shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name, FCC ID, and the FCC logo must be displayed on the device per Section 15.19(b)(2).

FCC ID: ACJ9TGCF-T52


This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions.

(1) this device may not cause harmful interference, and
(2) this device must accept any interference received,
including interference that may cause undesired operation.

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 43 of 50

Sample Label & Location (Cont'd)

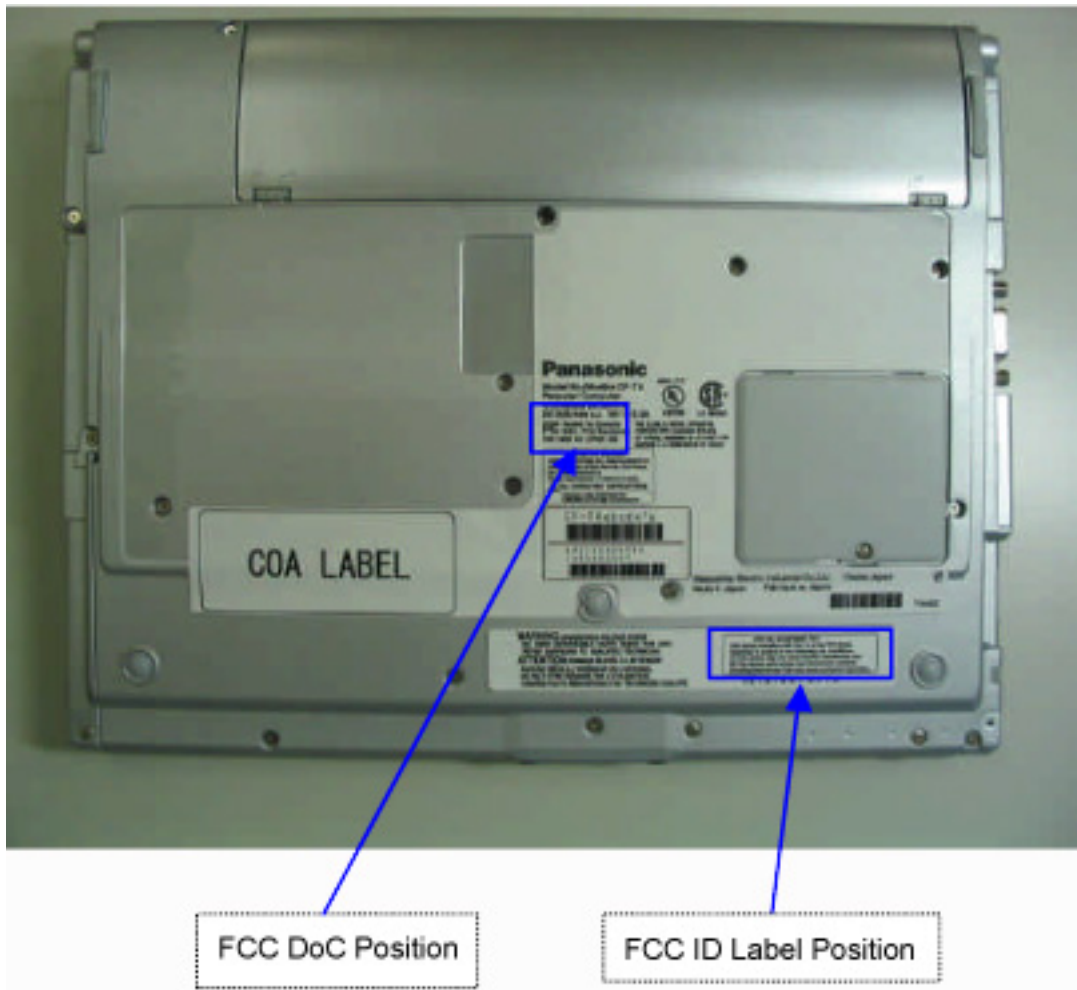FCC ID Label



PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 44 of 50

EXHIBIT C – BLOCK DIAGRAM/SCHEMATICS


PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 45 of 50

EXHIBIT D – OPERATIONAL DESCRIPTION

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 46 of 50



EXHIBIT E – TEST SETUP PHOTOGRAPHS

The Line-Conducted and Radiated Test Pictures show the worst-case configuration and cable placement with a minimum margin to the specifications.

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 47 of 50

EXHIBIT F – EUT EXTERNAL/INTERNAL PHOTOGRAPHS

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 48 of 50



EXHIBIT G – USER’S MANUAL

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 49 of 50



EXHIBIT H – SAR MEASUREMENT REPORT

PCTEST™ PT. 15.247 TEST REPORT		FCC CERTIFICATION REPORT	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0606010439	Test Dates: June 19 - June 22, 2006	EUT Type: Notebook PC w/ Intel WLAN and Novatel HSDPA	FCC ID: ACJ9TGCF-T52	Page 50 of 50