



**FCC CFR47 PART 15 SUBPART C  
INDUSTRY CANADA RSS-210 ISSUE 8**

**CLASS II PERMISSIVE CHANGE  
TEST REPORT**

**FOR**

**802.11abgn 2x2 , 2.4GHz, 5GHz, add Panasonic Tablet PC CF-D1**

**MODEL NUMBER: WL11A**

**FCC ID: ACJ9TGWL11A  
IC: 216A-CFWL11A**

**REPORT NUMBER: 11J13897-1**

**ISSUE DATE: JUNE 30, 2011**

*Prepared for*  
**PANASONIC CORPORATION OF NORTH AMERICA  
ONE PANASONIC WAY, 4B-8  
SECAUCUS, NEW JERSEY 07094, U.S.A.**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES (UL CCS)  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	06/30/11	Initial Issue	F. Ibrahim

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b> .....	<b>4</b>
<b>2. TEST METHODOLOGY</b> .....	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION</b> .....	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY</b> .....	<b>5</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	5
4.2. <i>SAMPLE CALCULATION</i> .....	5
4.3. <i>MEASUREMENT UNCERTAINTY</i> .....	5
<b>5. EQUIPMENT UNDER TEST</b> .....	<b>6</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	6
5.2. <i>DESCRIPTION OF CLASS II PERMISSIVE CHANGE</i> .....	6
5.3. <i>MAXIMUM OUTPUT POWER</i> .....	6
5.4. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	6
5.5. <i>SOFTWARE AND FIRMWARE</i> .....	6
5.6. <i>WORST-CASE CONFIGURATION AND MODE</i> .....	7
5.6 <i>DESCRIPTION OF TEST SETUP</i> .....	8
<b>6. TEST AND MEASUREMENT EQUIPMENT</b> .....	<b>10</b>
<b>7. RADIATED TEST RESULTS</b> .....	<b>11</b>
7.1. <i>LIMITS AND PROCEDURE</i> .....	11
7.2. <i>TRANSMITTER ABOVE 1 GHz</i> .....	12
7.2.1. <i>2.4 GHz BAND</i> .....	12
7.2.2. <i>5.8 GHz BAND</i> .....	17
7.3. <i>WORST-CASE BELOW 1 GHz</i> .....	18
<b>8. SETUP PHOTOS</b> .....	<b>21</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** PANASONIC CORPORATION OF NORTH AMERICA  
ONE PANASONIC WAY, 4B-8  
SECAUCUS, NEW JERSEY 07094, U.S.A.

**EUT DESCRIPTION:** 802.11abgn 2x2 , 2.4GHz, 5GHz, add Panasonic Tablet PC CF-D1

**MODEL:** WL11A

**SERIAL NUMBER:** 1CTSA00169

**DATE TESTED:** JUNE 30, 2011

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

Compliance Certification Services (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:

Tested By:



FRANK IBRAHIM  
EMC SUPERVISOR  
UL CCS

CHIN PANG  
EMC ENGINEER  
UL CCS

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is an 802.11a/b/g/n that operates in both the 2.4GHz and 5 GHz bands.

The radio module is manufactured by Intel.

### 5.2. DESCRIPTION OF CLASS II PERMISSIVE CHANGE

The major change filed under this application is adding Portable Panasonic Host (Representative model; CF-D1).

### 5.3. MAXIMUM OUTPUT POWER

The test measurement passed within  $\pm 0.5\text{dBm}$  of the original output power.

### 5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna, Main and Aux antenna with a maximum gain as:

**Intel Taylor Peak  
Original**

	2.4GHz	5150-5350	5470-5725	5725-5850
	3.24	3.73	4.77	4.97
<b>CF-D1</b>				
<b>Main</b>	2.69	2.41	2.07	2.07
<b>Aux</b>	1.82	4.39	4.48	2.47

### 5.5. SOFTWARE AND FIRMWARE

The test utility software used during testing was DRTU, version. 1.3.12.0263.

Driver software is V14.1.4.115.

## 5.6. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. Radiated Emissions below 1 GHz was performed with EUT set to transmit at the channel with highest output power.

Worst-case data rates used per input from the client are as follows:

- 11b: 1Mbps
- 11g: 6 Mbps
- 11n HT20: MCS0
- 11n HT40: MCS0

The EUT (tablet) was investigated in three orthogonal orientations X,Y,Z and it was determined that Y-axis orientation is the worst-case orientation; therefore, all testing in this report was conducted with EUT in worst case orientation.

Worst-case modes were selected for BE and Harmonics based on an investigation of the original reports, as shown in the summary table below:

Worst-case Modes to test					
2.4 GHz			5.8 GHz		
Low BE	High BE	Harmonics	Low BE	High BE	Harmonics
11n 20M Chain A Channel 2 Pwr AV=16.1 dBm Margin= -0.7 dB	11n 40M Chain A Channel 9 Pwr AV=9.6 dBm Margin= -1.1 dB	11b Chain A Channel 11 Pwr AV=15.8 dBm AV Margin= -6.1 dB Freq= 4924 MHz	No need to test	No need to test	11n 20M Chain A+B Channel 165 (5825MHz) Pwr AV=16.6, 16.8 dBm AV Margin= -6.9 dB Freq= 11649.9 MHz

## 5.6 DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	PANASONIC	CF-D1	1CTSA00169	DoC
AC Adapter	PANASONIC	CF-AA5713AM1	5713AM110Z12951A	DoC


### I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	AC	Un-Sheilded	180 cm	N/A
2	DC	1	DC	Un-Sheilded	180 cm	N/A

### TEST SETUP

The EUT is installed in a host laptop computer during the tests. Test software exercised the radio card. A laptop computer was used to configure the EUT to continuously transmit at a specified output power or continuously receive on the channel specified in the test data. For transmit modes the worst case was evaluated.

**SETUP DIAGRAM FOR TESTS**

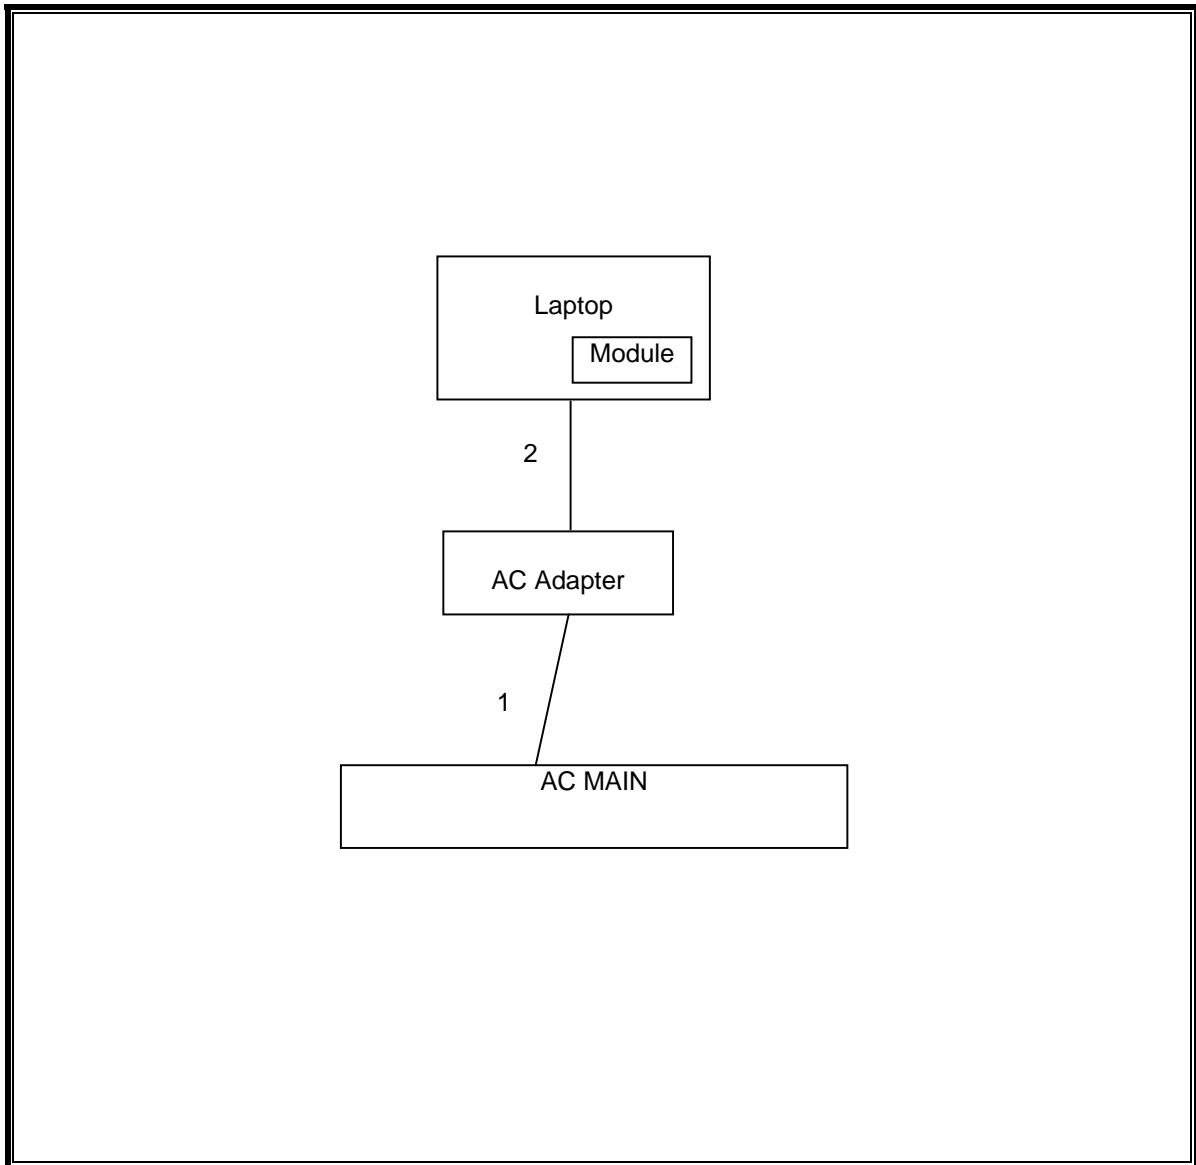

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	07-12-10	07-12-11
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01-27-11	01-27-12
Antenna, Horn, 18 GHz	EMCO	3115	C00783	06-29-10	06-30-12
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	04-07-11	04-07-12
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	01-07-10	04-11-12
Peak Power Meter	Agilent / HP	E4416A	C00963	12-04-09	04-11-12
Reject Filter, 5.47-5.725 GHz	Micro-Tronics	BRC13191	N02678	CNR	CNR
Reject Filter, 5.15-5.35 GHz	Micro-Tronics	BRC13190	N02679	CNR	CNR
Reject Filter, 2.4-2.5 GHz	Micro-Tronics	BRC13192	N02683	CNR	CNR
Preamplifier, 40 GHz	Miteq	NSP4000-SP2	C00990	07-15-10	07-15-11
Antenna, Horn, 40 GHz	ARA	MWH-2640/B	C00981	06-14-11	06-14-12

## 7. RADIATED TEST RESULTS

### 7.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.



The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



## 7.2. TRANSMITTER ABOVE 1 GHz

### 7.2.1. 2.4 GHz BAND



#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

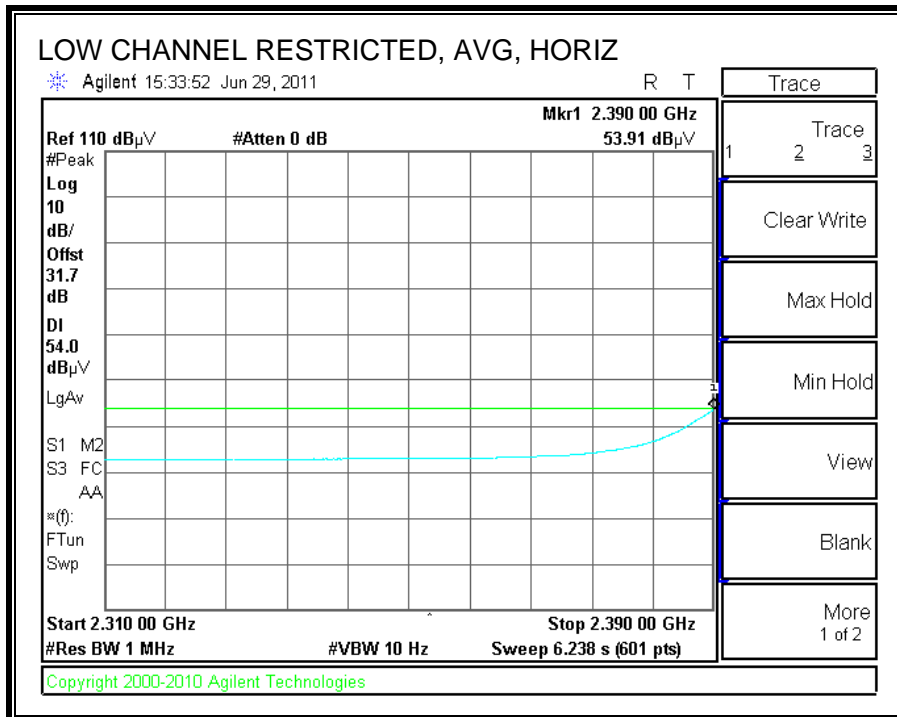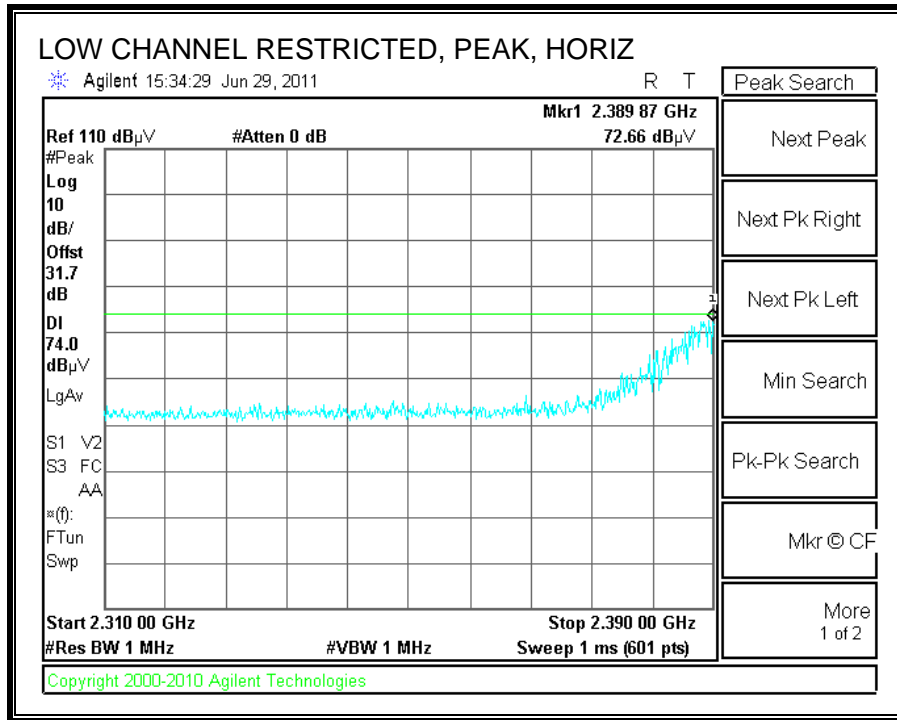



**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

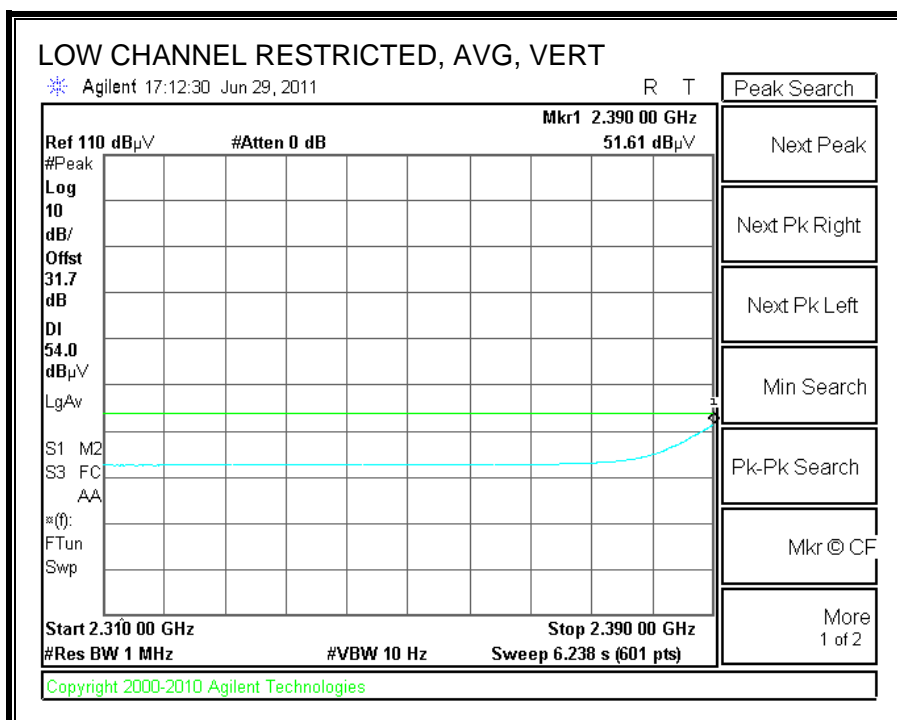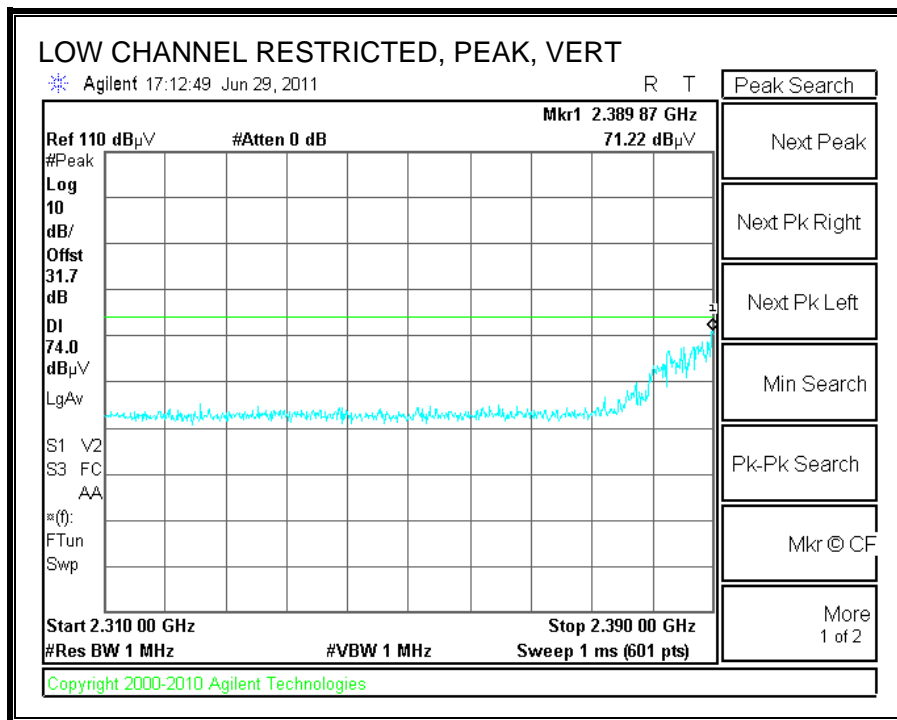

**RESTRICTED BANDEDGE (HT40, HIGH CHANNEL, HORIZONTAL)**

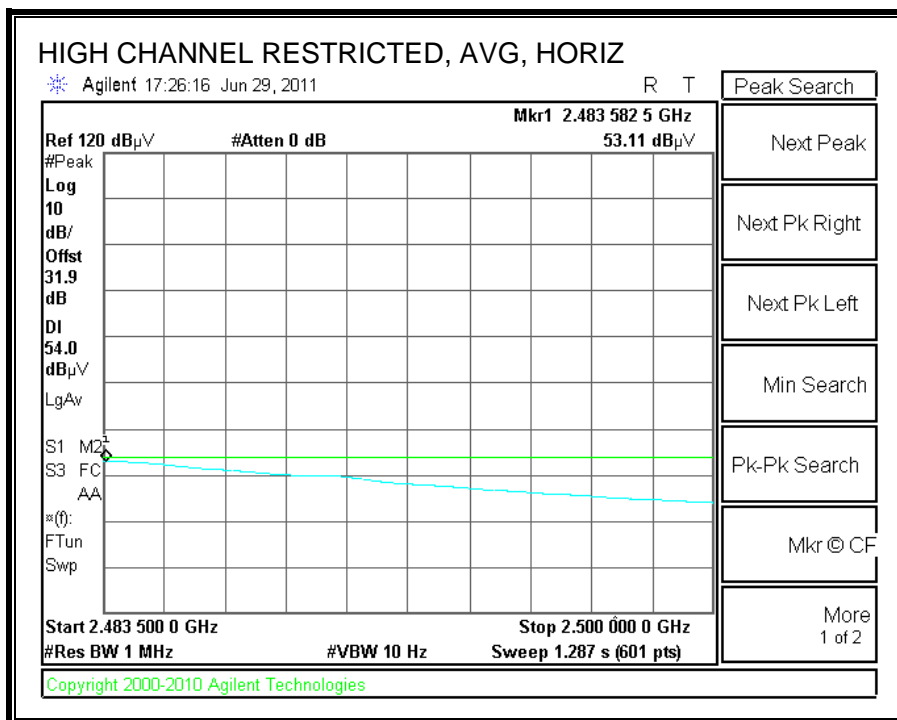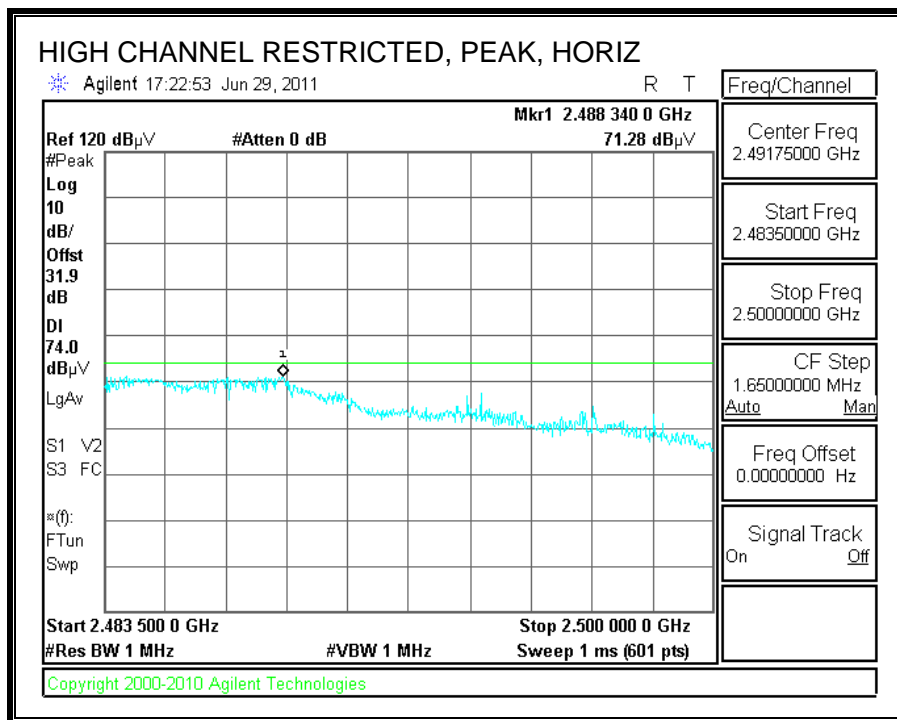

**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

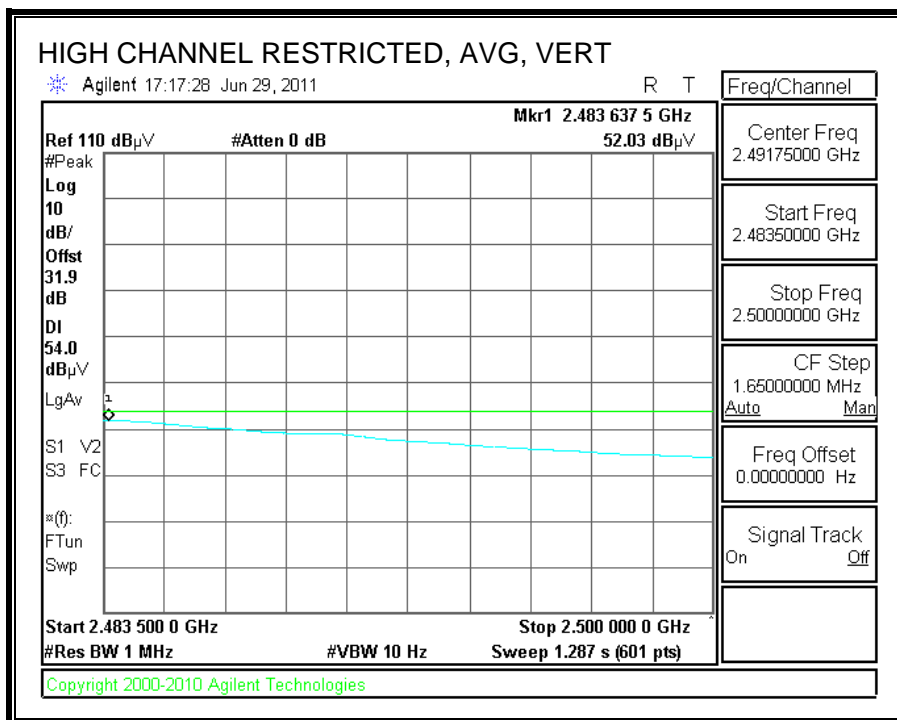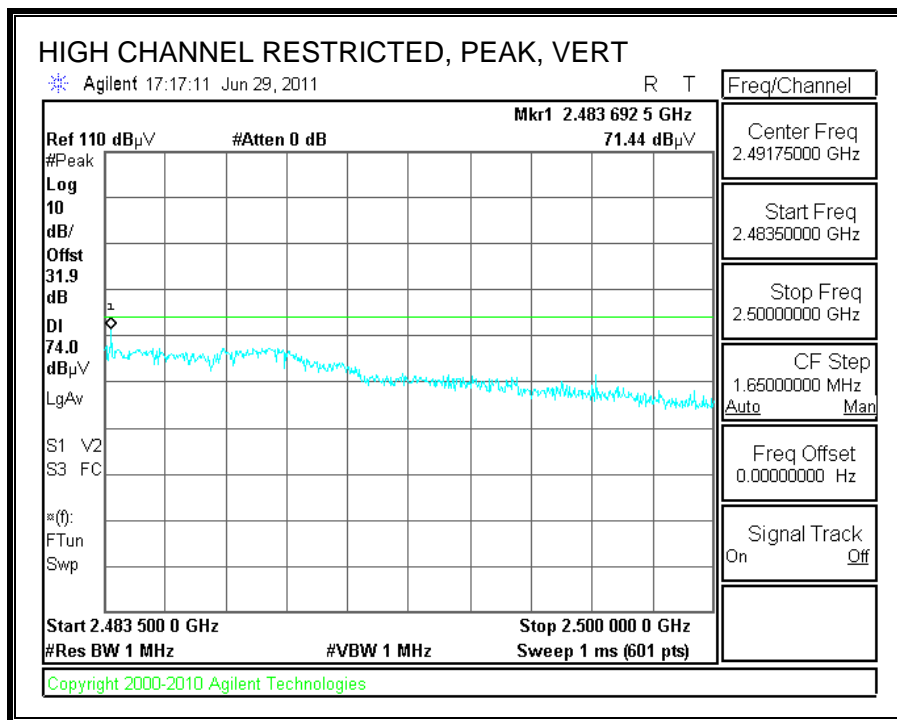

**HARMONICS AND SPURIOUS EMISSIONS**


High Frequency Measurement													
Compliance Certification Services, Fremont 5m Chamber													
Test Engr:		Chin Pang											
Date:		06-28-11											
Project #:		TBD											
Company:		Panasonic											
Test Target:		FCC 15.247											
Mode Oper:		2.4GHz and 5.8GHz band CF-D1											
f	Measurement Frequency	Amp	Preamp Gain	Average Field Strength Limit									
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Peak Field Strength Limit									
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Margin vs. Average Limit									
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Margin vs. Peak Limit									
CL	Cable Loss	HPF	High Pass Filter										
f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol V/H	Det P/A/QP	Notes
<b>Low Ch, 2412MHz</b>													
4.824	3.0	51.7	32.8	5.8	-34.8	0.0	0.0	55.4	74.0	-18.6	H	P	
4.824	3.0	49.6	32.8	5.8	-34.8	0.0	0.0	53.3	54.0	-0.7	H	A	
4.824	3.0	47.5	32.8	5.8	-34.8	0.0	0.0	51.2	74.0	-22.8	V	P	
4.824	3.0	45.1	32.8	5.8	-34.8	0.0	0.0	48.8	54.0	-5.2	V	A	
<b>Mid Ch, 2437MHz</b>													
4.874	3.0	50.8	32.8	5.8	-34.9	0.0	0.0	54.6	74.0	-19.4	H	P	
4.874	3.0	48.9	32.8	5.8	-34.9	0.0	0.0	52.7	54.0	-1.3	H	A	
7.311	3.0	37.6	35.2	7.3	-34.7	0.0	0.0	45.4	74.0	-28.6	H	P	
7.311	3.0	27.2	35.2	7.3	-34.7	0.0	0.0	35.0	54.0	-19.0	H	A	
4.874	3.0	47.6	32.8	5.8	-34.9	0.0	0.0	51.3	74.0	-22.7	V	P	
4.874	3.0	45.0	32.8	5.8	-34.9	0.0	0.0	48.8	54.0	-5.2	V	A	
7.311	3.0	37.4	35.2	7.3	-34.7	0.0	0.0	45.2	74.0	-28.8	V	P	
7.311	3.0	25.7	35.2	7.3	-34.7	0.0	0.0	33.5	54.0	-20.5	V	A	
<b>High Ch, 2462MHz</b>													
4.924	3.0	49.4	32.8	5.9	-34.9	0.0	0.0	53.3	74.0	-20.7	H	P	
4.924	3.0	47.5	32.8	5.9	-34.9	0.0	0.0	51.3	54.0	-2.7	H	A	
7.386	3.0	37.4	35.3	7.3	-34.6	0.0	0.0	45.4	74.0	-28.6	H	P	
7.386	3.0	25.2	35.3	7.3	-34.6	0.0	0.0	33.2	54.0	-20.8	H	A	
4.924	3.0	45.6	32.8	5.9	-34.9	0.0	0.0	49.5	74.0	-24.5	V	P	
4.924	3.0	42.8	32.8	5.9	-34.9	0.0	0.0	46.7	54.0	-7.3	V	A	
7.386	3.0	39.0	35.3	7.3	-34.6	0.0	0.0	46.9	74.0	-27.1	V	P	
7.386	3.0	26.3	35.3	7.3	-34.6	0.0	0.0	34.2	54.0	-19.8	V	A	
Rev. 4.1.2.7													
Note: No other emissions were detected above the system noise floor.													

### 7.2.2. 5.8 GHz BAND


High Frequency Measurement													
Compliance Certification Services, Fremont 5m Chamber													
Test Engr:		Chin Pang											
Date:		06-28-11											
Project #:		TBD											
Company:		Panasonic											
Test Target:		FCC 15.247											
Mode Oper:		5.8GHz Band, HT20 ( Worst Case) CF-D1											
f	Measurement Frequency	Amp	Preamp Gain	Average Field Strength Limit									
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Peak Field Strength Limit									
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Margin vs. Average Limit									
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Margin vs. Peak Limit									
CL	Cable Loss	HPF	High Pass Filter										
f	Dist	Read	AF	CL	Amp	D Corr	Filtr	Corr.	Limit	Margin	Ant. Pol.	Det.	Notes
GHz	(m)	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dB	V/H	P/A/QP	
<b>High Ch, 5825MHz</b>													
11.650	3.0	42.9	38.2	9.6	-32.9	0.0	0.0	57.8	74.0	-16.2	V	P	
11.650	3.0	30.3	38.2	9.6	-32.9	0.0	0.0	45.1	54.0	-8.9	V	A	
11.650	3.0	45.1	38.2	9.6	-32.9	0.0	0.0	60.0	74.0	-14.0	H	P	
11.650	3.0	31.6	38.2	9.6	-32.9	0.0	0.0	46.5	54.0	-7.5	H	A	
Rev. 4.1.2.7													
Note: No other emissions were detected above the system noise floor.													

### 7.3. WORST-CASE BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

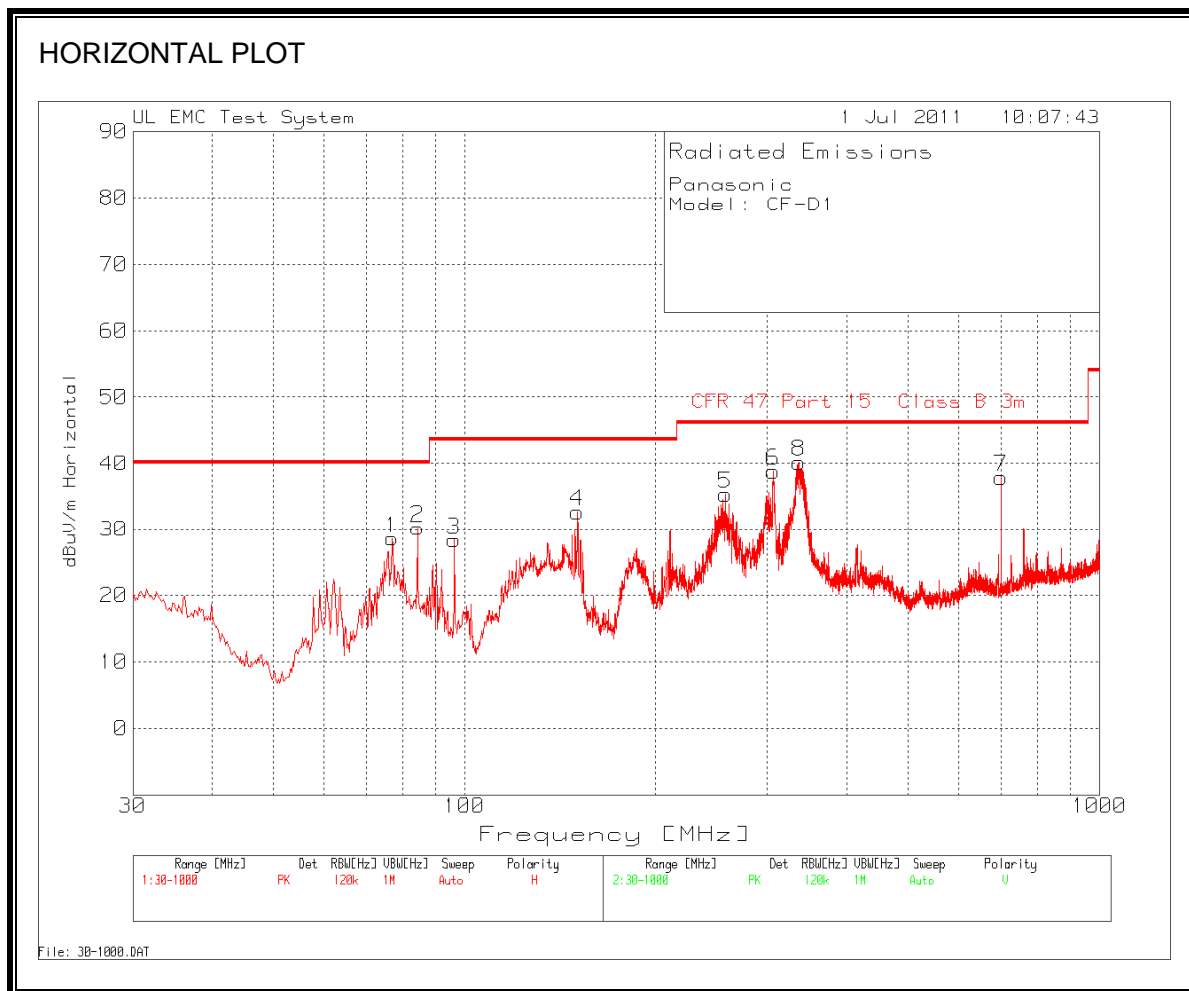

**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)**

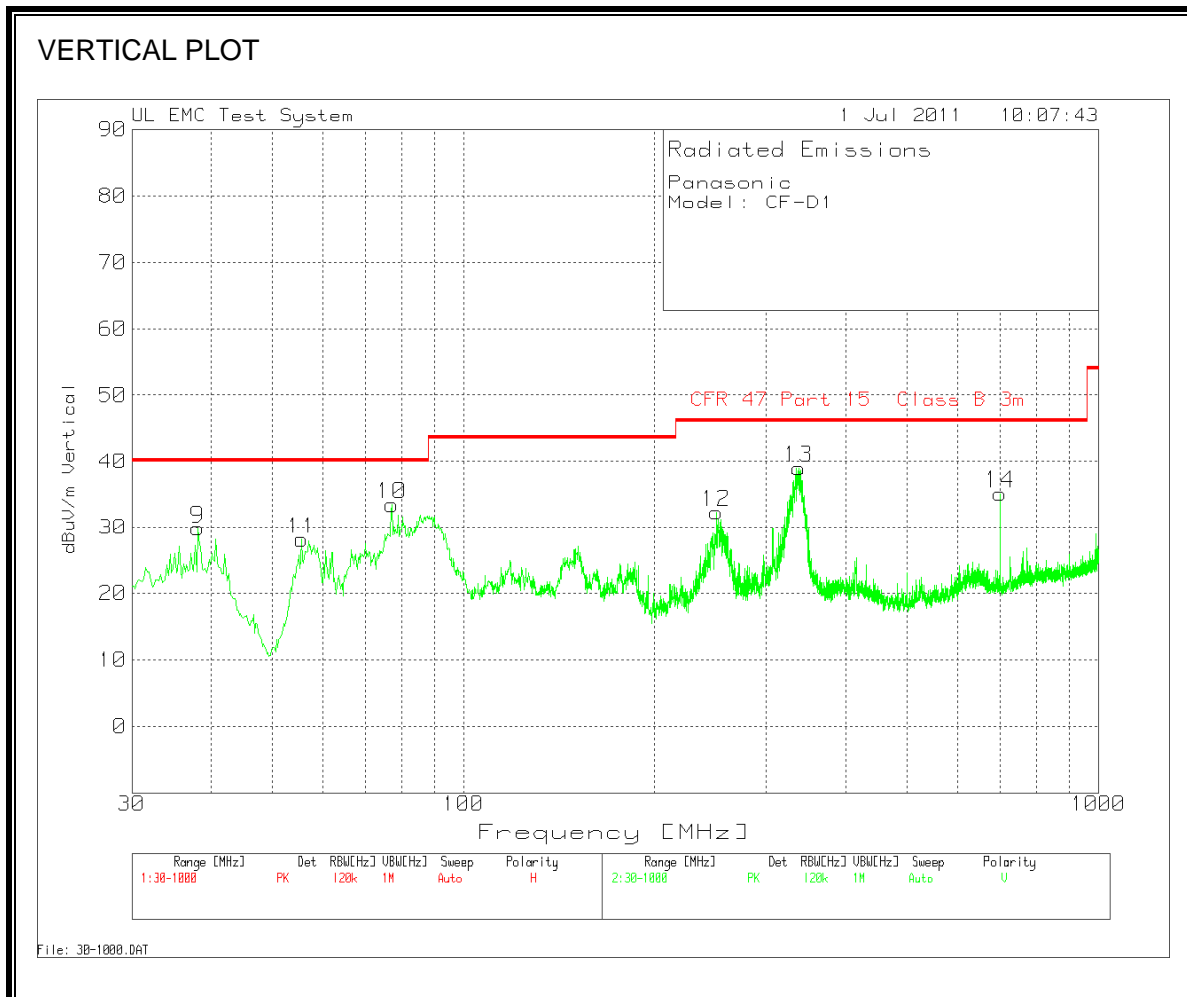

DATA

Panasonic											
Model: CF-D1											
Range 1 30 - 1000MHz											
Test Freq	Meter Read	Detector	Chamber	ET10	Below	T130	Bilcd	dBuV/m	CFR 47 P	Margin	Polarity
76.9105	49.01	PK	1.2	-29.4	7.8	28.61	40	-11.39	Horz		
84.2766	50.82	PK	1.3	-29.4	7.5	30.22	40	-9.78	Horz		
96.295	47.17	PK	1.4	-29.3	9.1	28.37	43.5	-15.13	Horz		
150.5715	47.63	PK	1.7	-29.1	12.5	32.73	43.5	-10.77	Horz		
257.3801	49.86	PK	2.2	-28.7	12	35.36	46	-10.64	Horz		
306.229	51.65	PK	2.4	-28.6	13.4	38.85	46	-7.15	Horz		
700.1219	44.32	PK	3.7	-29.3	19.2	37.92	46	-8.08	Horz		
336.0811	52.51	PK	2.5	-28.7	13.9	40.21	46	-5.79	Horz		
2 30 - 1000MHz											
st Freq	eter Read	Detector	low 1GHz	GHz PreAg	Factors	dBuV/m	art 15 C	Margin	Polarity		
38.1415	42.96	PK	0.9	-29.5	15.5	29.86	40	-10.14	Vert		
77.1043	53.9	PK	1.2	-29.4	7.8	33.5	40	-6.5	Vert		
55.5875	48.55	PK	1.1	-29.4	7.9	28.15	40	-11.85	Vert		
250.014	47.05	PK	2.2	-28.7	11.8	32.35	46	-13.65	Vert		
337.0504	51.22	PK	2.6	-28.7	13.9	39.02	46	-6.98	Vert		
700.1219	41.56	PK	3.7	-29.3	19.2	35.16	46	-10.84	Vert		