



# PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA

Tel. 410.290.6652 / Fax 410.290.6554

<http://www.pctestlab.com>



## CERTIFICATE OF COMPLIANCE FCC PART 15.247 Certification

**Applicant Name:**  
Sanyo Fisher Company  
21605 Plummer Street  
Chatsworth, CA 91311  
USA

**Date of Testing:**  
January 28, 2008  
**Test Site/Location:**  
PCTEST Lab. Columbia, MD, USA  
**Test Report Serial No.:**  
0801180066.AEZ

**FCC ID:** AEZSCP-PRO700

**APPLICANT:** Sanyo Fisher Company

**Model(s):** SCP-PRO700 (Ver.II)  
**EUT Type:** Cellular/PCS CDMA Phone with Bluetooth and EvDO  
**Frequency Range:** 2402 – 2480MHz (Bluetooth for US)  
**FCC Classification:** FCC Part 15 Spread Spectrum Transmitter (DSS)  
**FCC Rule Part(s):** Part 15 Subpart C (15.247)

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

*Grant Conditions: Power output listed is conducted.*

*PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.*

**Note:**

*Only radiated emissions testing was performed for SCP-PRO700 (Ver. II) reported herein. Complete test results for §15.247 are shown in the test report for model SCP-PRO700 (Ver. I). Test results listed in this report supports use of a chip from a second source vendor. This chip is in a non-Bluetooth associated circuit of the phone.*

Randy Ortanez  
President



FCC ID: AEZSCP-PRO700		FCC Pt. 15.247 BLUETOOTH TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0801180066.AEZ	Test Dates: January 28, 2008	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO		Page 1 of 1

## T A B L E   O F   C O N T E N T S

---

FCC PART 15.247 MEASUREMENT REPORT.....	3
1.0     INTRODUCTION.....	4
1.1    SCOPE.....	4
1.2    PCTEST TEST LOCATION.....	4
2.0     PRODUCT INFORMATION .....	5
2.1    EQUIPMENT DESCRIPTION.....	5
2.2    EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....	5
2.3    LABELING REQUIREMENTS.....	5
3.0     DESCRIPTION OF TEST .....	6
3.1    EVALUATION PROCEDURE.....	6
3.2    RADIATED EMISSIONS .....	6
4.0     ANTENNA REQUIREMENTS.....	7
5.0     TEST EQUIPMENT CALIBRATION DATA.....	8
6.0     TEST RESULTS .....	9
6.1    SUMMARY .....	9
6.2    RADIATED SPURIOUS EMISSION MEASUREMENTS.....	10
6.3    RADIATED RESTRICTED BAND EDGE MEASUREMENTS.....	14
7.0     CONCLUSION .....	15

<b>FCC ID:</b> AEZSCP-PRO700 		<b>FCC Pt. 15.247 BLUETOOTH TEST REPORT (CERTIFICATION)</b>	<b>Reviewed by:</b>  Quality Manager
<b>Test Report S/N:</b> 0801180066.AEZ	<b>Test Dates:</b> January 28, 2008	<b>EUT Type:</b> Cellular/PCS CDMA Phone with Bluetooth and EvDO	Page 2 of 2

# MEASUREMENT REPORT


## FCC Part 15.247

### § 2.1033 General Information

**APPLICANT:** Sanyo Fisher Company  
**APPLICANT ADDRESS:** 21605 Plummer Street  
**TEST SITE:** Chatsworth, CA 91311, USA  
**TEST SITE ADDRESS:** PCTEST ENGINEERING LABORATORY, INC.  
**FCC RULE PART(S):** 6660-B Dobbin Road, Columbia, MD 21045 USA  
**BASE MODEL:** Part 15 Subpart C (15.247)  
**FCC ID:** SCP-PRO700 (Ver.II)  
**Test Device Serial No.:** AEZSCP-PRO700  
**FCC CLASSIFICATION:** N/A  Production  Pre-Production  Engineering  
**Method/System:** FCC Part 15 Spread Spectrum Transmitter (DSS)  
**DATE(S) OF TEST:** Frequency Hopping Spread Spectrum (FHSS)  
**TEST REPORT S/N:** January 28, 2008  
**TEST REPORT S/N:** 0801180066.AEZ

### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC-2451).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: AEZSCP-PRO700	 PCTEST Engineering Laboratory, Inc.	FCC Pt. 15.247 BLUETOOTH TEST REPORT (CERTIFICATION)	 Reviewed by: Quality Manager
Test Report S/N: 0801180066.AEZ	Test Dates: January 28, 2008	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO	Page 3 of 3

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

### 1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity are, the Baltimore-Washington Intert'l (BWI) airport, the city of Baltimore and the Washington, DC area. (see *Figure 1-1*).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 27, 2006 and Industry Canada.

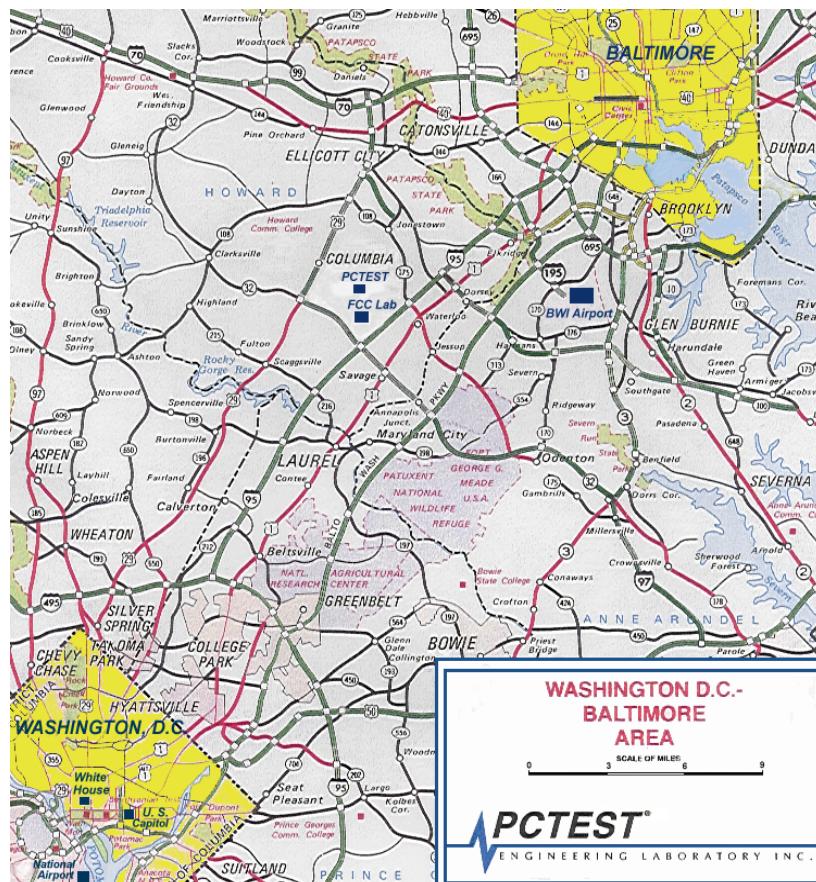


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: AEZSCP-PRO700			PCTEST Engineering Laboratory, Inc.	FCC Pt. 15.247 BLUETOOTH TEST REPORT (CERTIFICATION)	Reviewed by: SANYO Quality Manager
Test Report S/N: 0801180066.AEZ	Test Dates: January 28, 2008	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO			Page 4 of 4

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Cellular/PCS CDMA Phone with Bluetooth and EvDO** **FCC ID: AEZSCP-PRO700**. This unit supports Bluetooth version 1.x. The test data contained in this report pertains only to the emissions due to the EUT's Bluetooth transmitter.

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:
  - A) The hopping sequence is pseudorandom
  - B) All channels are used equally on average
  - C) The receiver input bandwidth equals the transmit bandwidth
  - D) The receiver hops in sequence with the transmit signal
- 15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.
- 15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channel selection/ hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.
- The EUT consisted of the following component(s):

Manufacturer / Base Model	FCC ID	Description
Samsung / Model: SCP-PRO700 (Ver.II)	AEZSCP-PRO700	Cellular/PCS CDMA Phone with Bluetooth and EvDO

Table 2-1. EUT Equipment Description

### 2.2 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

### 2.3 Labeling Requirements

Per 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

FCC ID: AEZSCP-PRO700	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 15.247 BLUETOOTH TEST REPORT (CERTIFICATION)	 <b>SANYO</b>	Reviewed by: Quality Manager
Test Report S/N: 0801180066.AEZ	Test Dates: January 28, 2008	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO		Page 5 of 5


## 3.0 DESCRIPTION OF TEST

### 3.1 Evaluation Procedure


The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2003) and FCC Public Notice DA 00-705 dated March 30, 2000 entitled "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems" were used in the measurement of the **Samsung Cellular/PCS CDMA Phone with Bluetooth and EvDO FCC ID: AEZSCP-PRO700**.

Deviation from measurement procedure.....**None**


### 3.2 Radiated Emissions

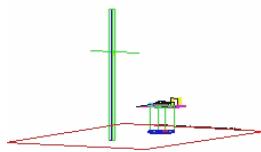


**Figure 3-1. 3-Meter Test Site**

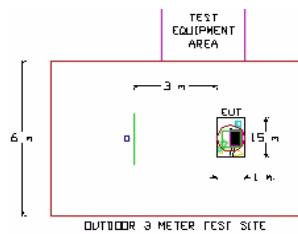

**Figure 3-2. Dimensions of Outdoor Test Site**

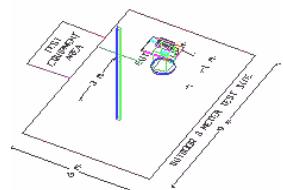

**Figure 3-3. Turntable and System Setup**

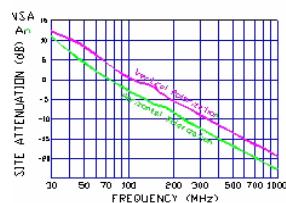

**Figure 3-4. Normalized Site Attenuation Curves (H&V)**

Preliminary measurements were made indoors at 1-meter using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, and turntable azimuth with respect to the antenna was noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using a bi-conical antenna and from 200 to 1000 MHz using a log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using Roberts™ Dipole antennas or horn antennas (see *Figure 3-1*). The test equipment was placed on a wooden and plastic bench situated on a 1.5m x 2m area adjacent to the measurement area (see *Figure 3-2*). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 100kHz for frequencies below 1GHz or 1MHz for frequencies above 1GHz. Above 1GHz the detector function was set to average mode (RBW = 1MHz, VBW = 10Hz).

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see *Figure 3-3*). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in the test setup photographs. Each EME reported was calibrated using the Agilent E8257D (250kHz – 20GHz) PSG Signal Generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in *Figure 3-4*.

FCC ID: AEZSCP-PRO700	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 15.247 BLUETOOTH TEST REPORT (CERTIFICATION)	Reviewed by: <b>SANYO</b> Quality Manager
Test Report S/N: 0801180066.AEZ	Test Dates: January 28, 2008	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO	Page 6 of 6

## 4.0 ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antennas of the Samsung Cellular/PCS CDMA Phone with Bluetooth and EvDO are **permanently attached**.
- There are no provisions for connection to an external antenna.

### Conclusion:

The **Samsung Cellular/PCS CDMA Phone with Bluetooth and EvDO** FCC ID: AEZSCP-PRO700 unit complies with the requirement of §15.203.

Ch.	Frequency (MHz)
00	2402
:	:
39	2441
:	:
78	2480

Table 4-1. Frequency/ Channel Operations

FCC ID: AEZSCP-PRO700	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 BLUETOOTH TEST REPORT (CERTIFICATION)	 Reviewed by: Quality Manager
Test Report S/N: 0801180066.AEZ	Test Dates: January 28, 2008	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO	Page 7 of 7

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model / Equipment	Calibration Date	Cal Interval	Calibration Due	Serial No.
Agilent	E4407B ESA Spectrum Analyzer	04/29/07	Annual	04/28/08	US39210313
Agilent	N4010A Wireless Connectivity Test Set	06/11/07	Annual	06/10/08	GB46170464
EMCO	Model 3115 (1-18GHz) Horn Antenna	10/04/07	Biennial	10/03/09	9205-3874
EMCO	Model 3115 (1-18GHz) Horn Antenna	09/24/07	Biennial	09/23/09	9704-5182
Rohde & Schwarz	NRVS Power Meter	07/03/07	Biennial	07/02/09	835360/079
Rohde & Schwarz	NRV-Z53 Power Sensor	07/03/07	Biennial	07/02/09	846076/007
Rohde & Schwarz	CMU200 Base Station Simulator	05/24/07	Annual	05/23/08	836371/079
Agilent	E4448A (3Hz-50GHz) Spectrum Analyzer	10/01/07	Annual	10/01/08	US42510244
Agilent	E8257D (250kHz-20GHz) Signal Generator	03/08/07	Biennial	03/07/09	MY45470194
Agilent	HP 8449B (1-26.5GHz) Pre-Amplifier	12/13/07	Annual	12/12/08	3008A00985
Agilent	HP 11713A Attenuation/Switch Driver	12/13/07	Annual	12/12/08	3439A02645
Agilent	HP 8566B Opt. 462 Impulse Bandwidth	12/13/07	Annual	12/12/08	3701A22204
EMCO	Dipole Pair	09/20/06	Biennial	09/19/08	23951
SOLAR	8012-50 LISN (2)	11/08/07	Biennial	11/07/09	0310233, 0310234
Agilent	HP 8495A (0-70dB) DC-4GHz Attenuator	N/A		N/A	N/A
-	263-10dB (DC-18GHz) 10 dB Attenuator	N/A		N/A	N/A
Pasternack	PE7000-6 6 dB Attenuator	N/A		N/A	N/A
Pasternack	PE2209-10 Bidirectional Coupler	N/A		N/A	N/A
-	No.165 (30MHz - 1000MHz) RG58 Coax Cable	N/A		N/A	N/A
-	No.166 (1000-26500MHz) Microwave RF Cable	N/A		N/A	N/A
-	No.167 (100kHz - 100MHz) RG58 Coax Cable	N/A		N/A	N/A

**Table 5-1. Annual Test Equipment Calibration Schedule**

FCC ID: AEZSCP-PRO700		FCC Pt. 15.247 BLUETOOTH TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0801180066.AEZ	Test Dates: January 28, 2008	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO		Page 8 of 8

## 6.0 TEST RESULTS

### 6.1 Summary

Company Name: Sanyo Fisher Company  
 FCC ID: AEZSCP-PRO700  
 Method/System: Frequency Hopping Spread Spectrum (FHSS)  
 Number of Channels: 79

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
<b>TRANSMITTER MODE (Tx)</b>					
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-210 table 3 limits)	RADIATED	PASS	Section 6.2 Section 6.3
<b>RECEIVER MODE (Rx) / DIGITAL DEVICE</b>					
15.109	General Field Strength Limits (Restricted Bands and Radiated Emissions Limits)	< FCC 15.209 limits or < RSS-Gen limits [Section 6; Table1]	RADIATED (30MHz-1GHz) (1-25 GHz)	PASS	Part 15B Test Report
<b>RF EXPOSURE</b>					
2.1093 / 2.1091	SAR Test	1.6 W/kg (SAR Limit)	SAR	PASS	SAR Report

**Table 6-1 Summary of Test Results**

**Note:**

Only radiated emissions testing was performed for SCP-PRO700 (Ver. II) reported herein. Complete test results for §15.247 are shown in the test report for model SCP-PRO700 (Ver. I). Test results listed in this report supports use of a chip from a second source vendor. This chip is in a non-Bluetooth associated circuit of the phone.

FCC ID: AEZSCP-PRO700	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 15.247 BLUETOOTH TEST REPORT (CERTIFICATION)	<b>SANYO</b>	Reviewed by: Quality Manager
Test Report S/N: 0801180066.AEZ	Test Dates: January 28, 2008	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO		Page 9 of 9

## 6.2 Radiated Spurious Emission Measurements

§15.247 (d) / §15.205 & §15.209

The EUT was tested from 9kHz and up to the 10<sup>th</sup> harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average measurement was used, using RBW = 1MHz, VBW = 10Hz and linearly polarized horn antennas. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-2 per Section 15.209.

Frequency	Field Strength [ $\mu$ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 6-2. Radiated Limits**

### Sample Calculation

- Field Strength Level [ $\text{dB}_{\mu\text{V/m}}$ ] = Analyzer Level [ $\text{dBm}$ ] + 107 + AFCL [ $\text{dB}$ ] + Duty Cycle Correction [ $\text{dB}$ ]

### Notes:

- AFCL = Antenna Factor [ $\text{dB}$ ] + Cable Loss [ $\text{dB}$ ]
- Duty Cycle Correction =  $20\log(\text{worst case dwell time} / 100\text{ms})$  [ $\text{dB}$ ]
  - a. This value is 0 dB if not applied
  - b. Maximum applied duty cycle correction is 20dB.

FCC ID: AEZSCP-PRO700	 PCTEST Engineering Laboratory, Inc.	FCC Pt. 15.247 BLUETOOTH TEST REPORT (CERTIFICATION)	 Reviewed by: Quality Manager
Test Report S/N: 0801180066.AEZ	Test Dates: January 28, 2008	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EVDO	Page 10 of 10



## Radiated Spurious Emission Measurements (Cont'd)

§15.247 (d) / §15.205 & §15.209

Mode: Bluetooth  
Measurement Distance: 3 Meters  
Operating Frequency: 2402MHz  
Channel: 0

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol [H/V]	AFCL [dB]	Duty Cycle Correction [dB]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4804.00	-104.81	Avg	H	40.27	0.00	42.46	53.98	-11.52
4804.00	-94.31	Peak	H	40.27	0.00	52.96	73.98	-21.02
12010.00	-135.00	Avg	H	51.41	0.00	23.41	53.98	-30.57
12010.00	-125.00	Peak	H	51.41	0.00	33.41	73.98	-40.57

**Table 6-3. Radiated Measurements**

**NOTES:**

1. All emissions shown lie in the restricted bands specified in §15.205 and are below the limit shown in Table 6-2.
2. Average Measurements > 1GHz using RBW = 1MHz VBW = 10Hz
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
6. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
7. Above 960MHz the limit is 500  $\mu$ V/m (54dB $\mu$ /m) at 3 meters radiated.

FCC ID: AEZSCP-PRO700	<b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 15.247 BLUETOOTH TEST REPORT (CERTIFICATION)		Reviewed by: SANYO Quality Manager
Test Report S/N: 0801180066.AEZ	Test Dates: January 28, 2008	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO		Page 11 of 11



## Radiated Spurious Emission Measurements (Cont'd)

§15.247 (d) / §15.205 & §15.209

Mode: Bluetooth

Measurement Distance: 3 Meters

Operating Frequency: 2441MHz

Channel: 39

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol [H/V]	AFCL [dB]	Duty Cycle Correction [dB]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4882.00	-103.58	Avg	H	40.52	0.00	43.94	53.98	-10.04
4882.00	-92.48	Peak	H	40.52	0.00	55.04	73.98	-18.94
7323.00	-135.00	Avg	H	45.97	0.00	17.97	53.98	-36.01
7323.00	-125.00	Peak	H	45.97	0.00	27.97	73.98	-46.01
12205.00	-135.00	Avg	H	51.34	0.00	23.34	53.98	-30.64
12205.00	-125.00	Peak	H	51.34	0.00	33.34	73.98	-40.64

**Table 6-4. Radiated Measurements**

**NOTES:**

1. All emissions shown lie in the restricted bands specified in §15.205 and are below the limit shown in Table 6-2.
2. Average Measurements > 1GHz using RBW = 1MHz VBW = 10Hz
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
6. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
7. Above 960MHz the limit is 500  $\mu$ V/m (54dB $\mu$ /m) at 3 meters radiated.

FCC ID: AEZSCP-PRO700		FCC Pt. 15.247 BLUETOOTH TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0801180066.AEZ	Test Dates: January 28, 2008	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO		Page 12 of 12



## Radiated Spurious Emission Measurements (Cont'd)

§15.247 (d) / §15.205 & §15.209

Mode: Bluetooth

Measurement Distance: 3 Meters

Operating Frequency: 2480MHz

Channel: 78

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol [H/V]	AFCL [dB]	Duty Cycle Correction [dB]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4960.00	-103.85	Avg	H	40.77	0.00	43.93	53.98	-10.05
4960.00	-93.15	Peak	H	40.77	0.00	54.63	73.98	-19.35
7440.00	-135.00	Avg	H	46.06	0.00	18.06	53.98	-35.92
7440.00	-125.00	Peak	H	46.06	0.00	28.06	73.98	-45.92
12400.00	-135.00	Avg	H	51.26	0.00	23.26	53.98	-30.72
12400.00	-125.00	Peak	H	51.26	0.00	33.26	73.98	-40.72

**Table 6-5. Radiated Measurements**

**NOTES:**

1. All emissions shown lie in the restricted bands specified in §15.205 and are below the limit shown in Table 6-2.
2. Average Measurements > 1GHz using RBW = 1MHz VBW = 10Hz
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
6. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
7. Above 960MHz the limit is 500  $\mu$ V/m (54dB $\mu$ /m) at 3 meters radiated.

FCC ID: AEZSCP-PRO700		FCC Pt. 15.247 BLUETOOTH TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0801180066.AEZ	Test Dates: January 28, 2008	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO		Page 13 of 13

### 6.3 Radiated Restricted Band Edge Measurements

§15.205 / §15.209

Mode: Bluetooth  
 Measurement Distance: 3 Meters  
 Operating Frequency: 2480MHz  
 Channel: 78

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol [H/V]	AFCL [dB]	Duty Cycle Correction [dB]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
2483.95	-97.70	Avg	H	34.21	0.00	43.51	53.98	-10.47
2483.95	-85.30	Peak	H	34.21	0.00	55.91	73.98	-18.07
2484.62	-100.80	Avg	H	34.21	0.00	40.41	53.98	-13.57
2484.62	-88.40	Peak	H	34.21	0.00	52.81	73.98	-21.17
2492.00	-106.40	Avg	H	34.21	0.00	34.81	53.98	-19.17
2492.00	-94.10	Peak	H	34.21	0.00	47.11	73.98	-26.87

**Table 6-6. Radiated Restricted Band Edge Measurements at 3-meters**

**NOTES:**

1. All emissions shown lie in the restricted bands specified in §15.205 and are below the limit shown in Table 6-2.
2. Average Measurements > 1GHz using RBW = 1MHz VBW = 10Hz
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
6. Levels at -135 dBm represent the analyzer noise floor and signify that no emission was detected.
7. Above 960MHz the limit is 500  $\mu$ V/m (54dB $\mu$ /m) at 3 meters radiated.

FCC ID: AEZSCP-PRO700	 PCTEST Engineering Laboratory, Inc.	FCC Pt. 15.247 BLUETOOTH TEST REPORT (CERTIFICATION)	 Reviewed by: Quality Manager
Test Report S/N: 0801180066.AEZ	Test Dates: January 28, 2008	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO	Page 14 of 14

## 7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Cellular/PCS CDMA Phone with Bluetooth and EvDO FCC ID: AEZSCP-PRO700** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules.

FCC ID: AEZSCP-PRO700	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 BLUETOOTH TEST REPORT (CERTIFICATION)	 <b>SANYO</b>	Reviewed by: Quality Manager
Test Report S/N: 0801180066.AEZ	Test Dates: January 28, 2008	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO		Page 15 of 15