



RADIO TEST REPORT

Test Report No.: 31CE0198-SH-01

Applicant : PIONEER CORPORATION
Type of Equipment : CD Receiver
Model No. : DEH-8318
FCC ID : AJDK038
Test regulation : FCC Part15 Subpart C: 2010
Test result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by any agency of the Federal Government.
6. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.

Date of test: November 17 to 19, 2010

Representative
test engineer:

Shinichi Takano
Engineer of EMC Service

Approved by :

Go Ishiwata
Assistant Manager of Shonan EMC Lab.

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
☒ There is no testing item of "Non-accreditation".



UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

MF058d (15.09.10)

Contents

	<u>Page</u>
SECTION 1: Customer information	3
SECTION 2: Equipment under test (E.U.T.)	3
SECTION 3: Test specification, procedures & results	5
SECTION 4: Operation of E.U.T. during testing.....	8
SECTION 5: Radiated emission	12
SECTION 6: Out of band emissions (Antenna port conducted)	14
SECTION 7: Carrier frequency separation	14
SECTION 8: 20dB bandwidth & Occupied bandwidth (99%).....	14
SECTION 9: Number of hopping frequency	14
SECTION 10: Dwell time	14
SECTION 11: Maximum peak output power.....	14
Contents of appendixes	15
APPENDIX 1: Photographs of test setup.....	16
APPENDIX 2: Test data	17
APPENDIX 3: Test instruments	51

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 1: Customer information

Company Name : PIONEER CORPORATION
Address : 25-1 Aza-Nishimachi, Yamada, Kawagoe-Shi, Saitama-ken,
350-8555 JAPAN
Telephone Number : +81 49 228 6415
Facsimile Number : +81 49 228 6493
Contact Person : Makoto Kaieda

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : CD Receiver
Model Number : DEH-8318
Serial Number : Refer to 4.2.
Rating : DC 10.5-16V
Country of Mass-production : China
Condition of EUT : Engineering prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Receipt Date of Sample : November 11, 2010
Modification of EUT : No modification by the test lab.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

2.2 Product description

Model: DEH-8318 (referred to as the EUT in this report) is a CD Receiver.

Clock frequency(ies) in the system : <Main Unit>
18.75MHz, 37.05MHz, 169.344MHz
<Bluetooth>
25.8048MHz, 26MHz
<CD DRIVE>
176.4kHz, 16.93MHz
<Panel>
219kHz, 4MHz

<Radio part>

Equipment type : Transceiver
Frequency of operation : 2402-2480MHz
Bandwidth / Channel spacing : 79MHz & 1MHz
Type of modulation : FHSS
Antenna type : Inverted F type
Antenna connector type : U.FL
Antenna gain : 0.52dBi
ITU code : F1D, G1D
Operation temperature range : -30 to +85 deg.C.

Similar models of the EUT: DEH-8418

Model	DEH-8318	DEH-8418
Sell	General	South & Central America
Frequency Range/1Step/Seek Step	FM: 87.5-108MHz/50k/100kHz AM: 531-1602kHz/9k/9kHz	FM: 87.9-108MHz/100k/100kHz AM: 530-1620kHz/5k/10kHz

FCC Part15.31 (e)

The equipment provides the Bluetooth transmitter with stable power supply (DC 3.3 V), therefore, the equipment complies power supply regulation.

FCC Part15.203 Antenna requirement

The equipment and its antenna comply with this requirement since this antenna is built in the equipment and it cannot be replaced by end users.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 3: Test specification, procedures & results

3.1 Test specification

Test specification : FCC Part 15 Subpart C: 2010, final revised on October 13, 2010
Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.209 Radiated emission limits, general requirements
Section 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz,
and 5725-5850MHz

3.2 Procedures & Results

Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin	Results
Conducted emission	ANSI C63.4:2003 7. AC powerline conducted emission measurements	FCC Section 15.207	-	N/A *1)	N/A	N/A
Carrier frequency separation	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (a)(1)	Conducted	N/A	*See data.	Complied
20dB bandwidth	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (a)(1)	Conducted	N/A		Complied
Number of hopping frequency	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (a)(1)(iii)	Conducted	N/A		Complied
Dwell time	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (a)(1)(iii)	Conducted	N/A		Complied
Maximum peak output power	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (b)(1)	Conducted	N/A		Complied
Band edge compliance & Spurious emission	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (d) Section15.209	Conducted/ Radiated	N/A	3.2dB Freq: 335.464MHz Detector: QP Polarization: Horizontal Mode: Tx 2402MHz DH5	Complied

Note: UL Japan's EMI Work Procedures No.QPM05 and QPM15.

*1) The test is not applied since the EUT has no AC mains.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

3.3 Addition to standard

Item	Test Procedure	Specification	Remarks	Worst Margin	Results
Occupied Bandwidth (99%)	ANSI C63.4:2003 13. Measurement of intentional radiators RSS-Gen 4.6.1	RSS-Gen 4.6.1	Conducted -		Complied
Note: UL Japan's EMI Work Procedures No.QPM05 and QPM15.					

* Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Item	Frequency range	No.1 SAC ^{*1} /SR ^{*2} (±)	No.2 SAC/SR (±)	No.3 SAC/SR (±)
Radiated emission (Measurement distance: 3m)	9kHz-30MHz	3.4 dB	2.7 dB	3.4 dB
	30MHz-300MHz	4.6 dB	4.5 dB	4.9 dB
	300MHz-1GHz	4.5 dB	4.6 dB	5.1 dB
	1GHz-13GHz	3.9 dB	3.9 dB	4.0 dB
Radiated emission (Measurement distance: 1m)	13GHz-18GHz	4.8 dB	4.8 dB	4.8 dB
	18GHz-40GHz	4.2 dB	4.2 dB	4.2 dB

*1: SAC=Semi-Anechoic Chamber

*2: SR= Shielded Room is applied besides radiated emission

Radiated emission test

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

Antenna port conducted test

Power Measurement uncertainty above 1GHz for this test was: (±) 0.8dB

Conducted emissions Measurement (below 1GHz) uncertainty for this test was: (±) 1.1dB

Conducted emissions Measurement (1G-3GHz) uncertainty for this test was: (±) 1.2dB

Conducted emissions Measurement (3G-18GHz) uncertainty for this test was: (±) 2.9dB

Conducted emissions Measurement (18G-26.5GHz) uncertainty for this test was: (±) 3.4dB

Bandwidth Measurement uncertainty for this test was: (±) 5.4%

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

3.5 Test location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN

Telephone number : +81 463 50 6400

Facsimile number : +81 463 50 6401

JAB Accreditation No. : RTL02610

	FCC Registration No.	IC Registration No.	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
☒ No.1 Semi-anechoic chamber	697847	2973D-1	20.6 x 11.3 x 7.65	20.6 x 11.3	10m
☐ No.2 Semi-anechoic chamber	697847	2973D-2	20.6 x 11.3 x 7.65	20.6 x 11.3	10m
☐ No.3 Semi-anechoic chamber	697847	2973D-3	12.7 x 7.7 x 5.35	12.7 x 7.7	5m
☐ No.4 Full-anechoic chamber	-	-	8.1 x 5.1 x 3.55	8.1 x 5.1	-
☐ No.1 shielded room	-	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
☐ No.2 shielded room	-	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
☐ No.3 shielded room	-	-	6.3 x 4.7 x 2.7	6.3 x 4.7	-
☐ No.4 shielded room	-	-	4.4 x 4.7 x 2.7	4.4 x 4.7	-
☒ No.5 shielded room	-	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
☐ No.6 shielded room	-	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-

3.6 Test setup, Test data & Test instruments

Refer to Appendix 1 to 3.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 4: Operation of E.U.T. during testing

4.1 Operating mode

The EUT exercise program used during testing was designed to exercise the various system components in a manner similar to typical use.

Operation: BT-TEST mode

Test item	Operating mode	Tested frequency
Carrier frequency separation	Transmitting Hopping ON (DH5/3DH5)/Inquiry, Payload: PRBS9	-
20dB bandwidth	Transmitting Hopping OFF (DH5/3DH5)/Inquiry, Payload: PRBS9	2402MHz, 2441MHz, 2480MHz
Number of hopping frequency	Transmitting Hopping ON (DH5/3DH5)/Inquiry, Payload: PRBS9	-
Dwell time	Transmitting (Hopping ON) -DH1, -DH3, -DH5 -3DH1, -3DH3, -3DH5 -Inquiry	-
Maximum peak output power	Transmitting Hopping OFF (DH5/3DH5)/Inquiry, Payload: PRBS9 -DH5 -2DH5 -3DH5	2402MHz, 2441MHz, 2480MHz
Band edge compliance & Spurious emission (Conducted)	Transmitting (DH5/3DH5), Payload: PRBS9 -Hopping ON/Inquiry -Hopping OFF	Band edge compliance: 2402MHz, 2480MHz
(Radiated)	Transmitting (DH5/3DH5), Payload: PRBS9	Spurious emission: 2402MHz, 2441MHz, 2480MHz
99% occupied bandwidth	Transmitting (DH5/3DH5), Payload: PRBS9 -Hopping ON -Hopping OFF	2402MHz, 2441MHz, 2480MHz

*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload (except Dwell time test)

*Remarks: Test was not performed at AFH mode, because the decrease of number of channel (min: 20ch) at AFH mode does not influence on the output power and bandwidth of the EUT.
However, the limit level 125mWof AFH mode was used for the test.

*Software for testing: HCITester (Version: 2.0.99)

Power settings: Fixed (The setting is not controlled by the software and it is equivalent to that of mass-produced items.)

Above setting of software is the worst case.

Any conditions under the normal use do not exceed the condition of setting.

Justification: The system was configured in typical fashion (as customer would normally use it) for testing.

UL Japan, Inc.


Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

4.2 Configuration and peripherals

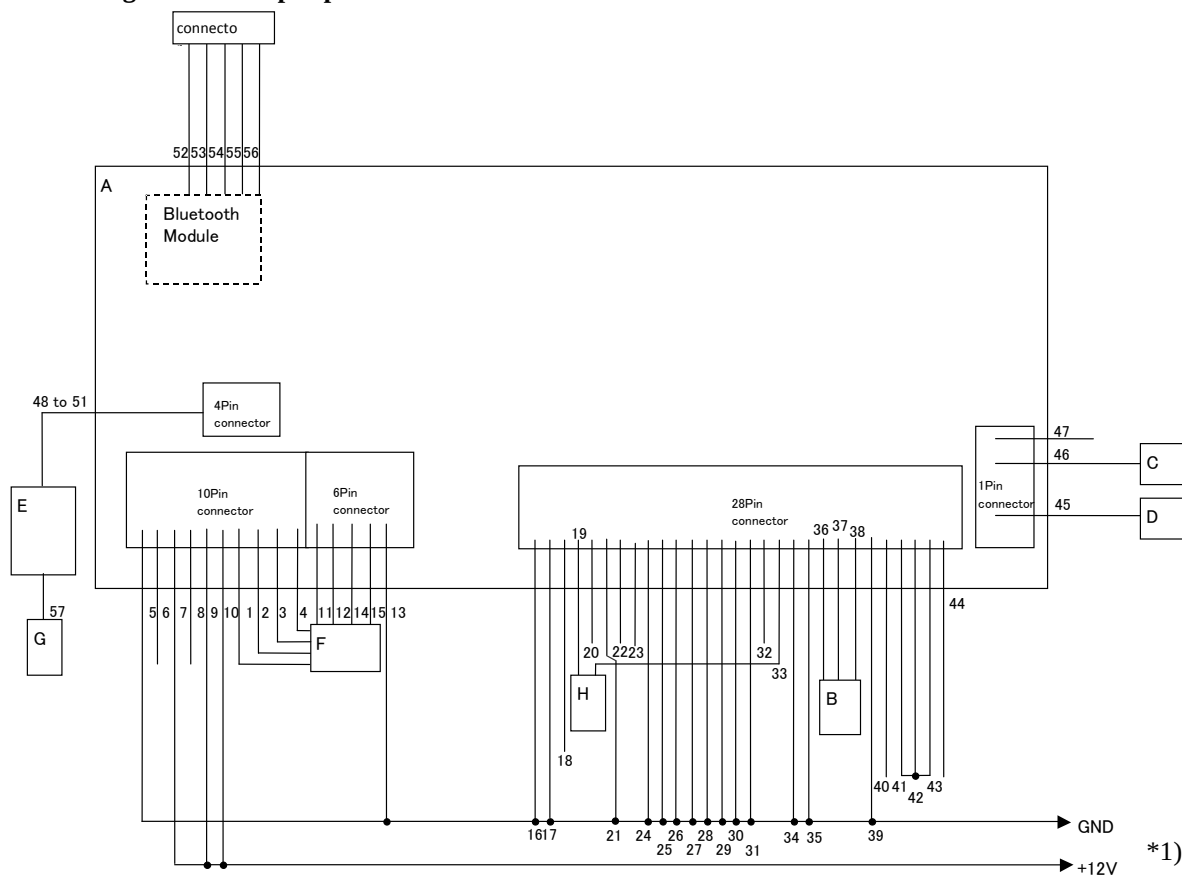

* Test data was taken under worse case conditions.

Description of EUT and support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	CD Receiver	DEH-8318	AABB999995ES *2) AABB999996ES *3)	PIONEER	EUT
B	Steering switch	-	-	PIONEER	-
C	75ohm termination	-	-	-	-
D	75ohm termination	-	-	PIONEER	-
E	USB Box	86190-48030	-	Panasonic	-
F	LOAD BOX	PI-10	V13698049	ABO	-
G	USB memory	MF-AU201GRS	E6122802761	ELECOM	-
H	270ohm termination	-	-	Pioneer	-

*1) DC power supply (Model No.: PAN35-10A) was used for DC 12V input.

*2) Used for Radiated emissions tests

*3) Used for Antenna Terminal conducted tests

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

List of cables used *4)

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	FR+	2.0	Unshielded	Unshielded	blue
2	FR-	2.0	Unshielded	Unshielded	black
3	FL+	2.0	Unshielded	Unshielded	green
4	FL-	2.0	Unshielded	Unshielded	black
5	GND1	2.0	Unshielded	Unshielded	black
6	TMU	2.0	Unshielded	Unshielded	blue
7	ACC1	2.0	Unshielded	Unshielded	red
8	AMP	2.0	Unshielded	Unshielded	light green
9	+B1	2.0	Unshielded	Unshielded	yellow
10	ILL+	2.0	Unshielded	Unshielded	orange
11	RR+	2.0	Unshielded	Unshielded	gray
12	RR-	2.0	Unshielded	Unshielded	yellow
13	ILL-	2.0	Unshielded	Unshielded	orange
14	RL+	2.0	Unshielded	Unshielded	purple
15	RL-	2.0	Unshielded	Unshielded	yellow
16	NC	2.0	Shielded	Unshielded	blue
17	NC	2.0	Unshielded	Unshielded	yellow/white
18	ADIM	2.0	Unshielded	Unshielded	pink/white
19	MACC	2.0	Shielded	Unshielded	red
20	MIN+	2.0	Shielded	Unshielded	white
21	SNS2	2.0	Unshielded	Unshielded	white
22	TX1+	2.0	Unshielded	Unshielded	green
23	TX1-	2.0	Unshielded	Unshielded	gray
24	NC	2.0	Unshielded	Unshielded	purple
25	NC	2.0	Unshielded	Unshielded	purple/black
26	AGND	2.0	Shielded	Unshielded	black
27	NC	2.0	Shielded	Unshielded	black
28	NC	2.0	Shielded	Unshielded	pink
29	NC	2.0	Unshielded	Unshielded	light green
30	NC	2.0	Shielded	Unshielded	red
31	NC	2.0	Shielded	Unshielded	white
32	SPD	2.0	Unshielded	Unshielded	pink
33	SGND	2.0	Shielded	Unshielded	black
34	MIN-	2.0	Shielded	Unshielded	blue
35	NC	2.0	Unshielded	Unshielded	purple
36	SW1	2.0	Unshielded	Unshielded	red
37	SW2	2.0	Unshielded	Unshielded	blue
38	SWG	2.0	Unshielded	Unshielded	black
39	NC	2.0	Unshielded	Unshielded	white
40	AUXI	2.0	Unshielded	Unshielded	pink/black
41	ARI	2.0	Shielded	Unshielded	red
42	ASGN	2.0	Shielded	Unshielded	blue
43	ALI	2.0	Shielded	Unshielded	white
44	IVI SLD	2.0	Shielded	Unshielded	black
45	SUB	0.18+1.0	Shielded	Unshielded	black
46	MAIN	0.18+1.0	Shielded	Unshielded	black
47	ANT+	0.18	Shielded	Unshielded	yellow

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

List of cables used (Continued) *4)

No.	Name	Length (m)	Shield		Remark
48	USV1	1.0	Shielded	Unshielded	gray
49	US1-	1.0	Shielded	Unshielded	gray
50	US1+	1.0	Shielded	Unshielded	gray
51	UGD1	1.0	Shielded	Unshielded	gray
52	TXD	0.6	Unshielded	Unshielded	blue
53	RXD	0.6	Unshielded	Unshielded	blue
54	CTS	0.6	Unshielded	Unshielded	blue
55	RTS	0.6	Unshielded	Unshielded	blue
56	RST	0.6	Unshielded	Unshielded	blue
57	USB	3.0	Shielded	Shielded	-

*4) All cables used for the measurement are exclusive use or marketed.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 5: Radiated emission

5.1 Operating environment

The test was carried out in No.1 Semi-Anechoic Chamber.

Temperature : See test data (APPENDIX 2)
Humidity : See test data (APPENDIX 2)

5.2 Test configuration

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane.

The table is made of Styrofoam and covered with polyvinyl chloride. That has very low permittivity.

The rear of EUT, including its peripherals was aligned and flushed with rear of tabletop. I/O cables that were connected to the peripherals were bundled in center. They were folded back and for the forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

Photographs of the set up are shown in Appendix 1.

5.3 Test conditions

Frequency range : 30MHz to 25GHz
Test distance : 3m (below 13GHz) / 1m(above13GHz)
EUT position : Table top
EUT operation mode : Refer to 4.1.

5.4 Test procedure

The Radiated Electric Field Strength intensity has been measured on a semi-anechoic chamber with a ground plane and at a distance of 3m(below 13GHz) / 1m(above 13GHz). Measurements were performed with quasi-peak, peak and average detector. The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization.

The radiated emission measurements were made with the following detection of the test receiver and Spectrum Analyzer.

Frequency	:	30-1000MHz	1000-25000MHz	
Detection Type	:	Quasi-Peak	Peak	* Average
IF Bandwidth	:	120kHz	RBW:1MHz/VBW:3MHz	RBW:1MHz/VBW: see data

* When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

The EUT was tested in the direction normally used.

UL Japan, Inc.


Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Figure 1. Antenna angle

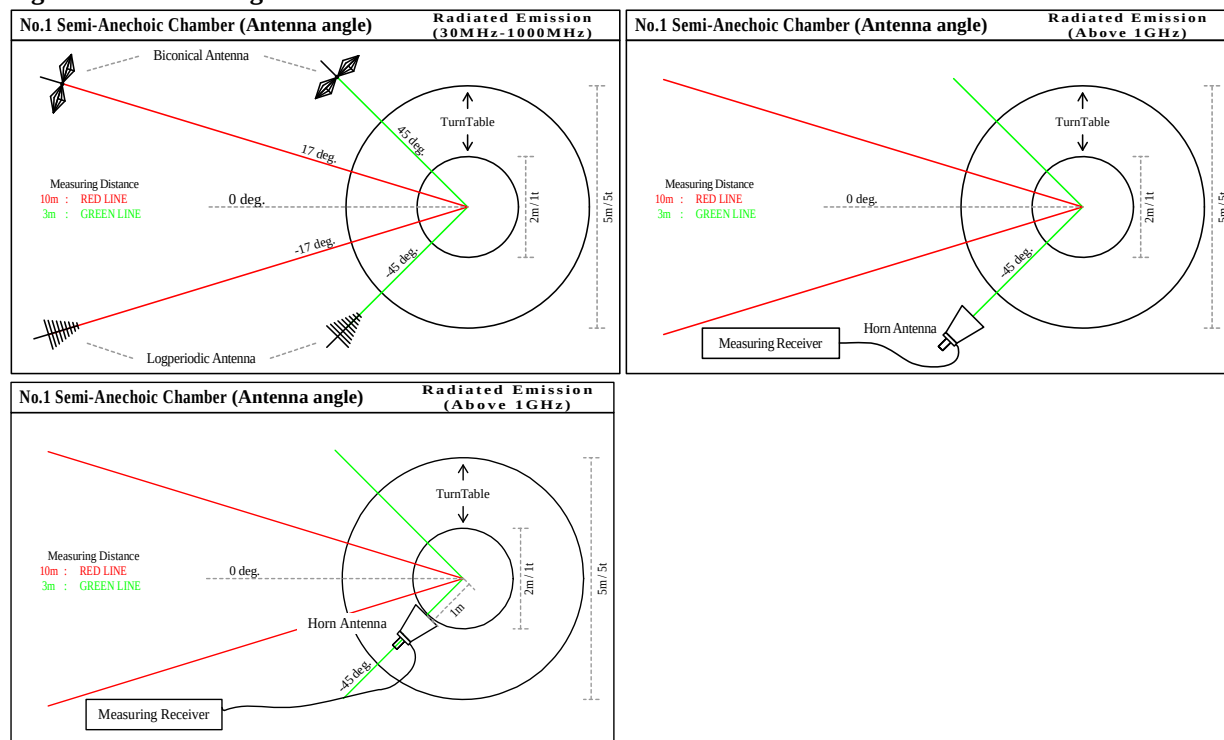

5.5 Band edge

Band edge level at 2390MHz, 2400MHz and 2483.5MHz is below the limits of FCC 15.209. Refer to the data of Radiated emission.

5.6 Results

Summary of the test results : Pass *No noise was detected above the 5th order harmonics.
Refer to APPENDIX 2

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 6: Out of band emissions (Antenna port conducted)

Test procedure

The Out of Band Emissions was measured with a spectrum analyzer connected to the antenna port. In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

Summary of the test results: Pass
Refer to APPENDIX 2

SECTION 7: Carrier frequency separation

Test procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass
Refer to APPENDIX 2

SECTION 8: 20dB bandwidth & Occupied bandwidth (99%)

Test procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port. The channel separation in Hopping mode and Inquiry mode was separated by 25kHz and 2/3 of the 20dB bandwidth.

Summary of the test results: Pass
Refer to APPENDIX 2

SECTION 9: Number of hopping frequency

Test procedure

The Number of Hopping Frequency was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass
Refer to APPENDIX 2

SECTION 10: Dwell time

Test procedure

The Dwell time was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass
Refer to APPENDIX 2

SECTION 11: Maximum peak output power

Test procedure

The Maximum Peak Output Power was measured with a power meter connected to the antenna port.

Summary of the test results: Pass
Refer to APPENDIX 2

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Contents of appendixes

APPENDIX 1: Photographs of test setup

Radiated emission

APPENDIX 2: Test data

20dB bandwidth and Carrier frequency separation
Number of hopping frequency
Dwell time
Peak output power
Radiated emission
Spurious emission (Antenna port conducted)
99% Occupied bandwidth

APPENDIX 3: Test instruments

Test instruments

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401