

EMC Test Report

Application for Grant of Equipment Authorization

*Industry Canada RSS-Gen Issue 3 / RSS 210 Issue 8
FCC Part 15 Subpart C*

Model: SW1721(MA1)

IC CERTIFICATION #: 10134A-1721MA1
FCC ID: AMX-1721MA1

APPLICANT: Satarii Inc.
1721 Notre Dame Ave.
Belmont, CA 94002

TEST SITE(S): Elliott Laboratories
41039 Boyce Road.
Fremont, CA. 94538-2435

IC SITE REGISTRATION #: 2845B-3; 2845B-4, 2845B-5, 2845B-7

REPORT DATE: February 13, 2012

FINAL TEST DATES: January 31 and February 1, 2012


TOTAL NUMBER OF PAGES: 41

PROGRAM MGR /
TECHNICAL REVIEWER:



Mark E Hill
Staff Engineer

QUALITY ASSURANCE DELEGATE /
FINAL REPORT PREPARER:

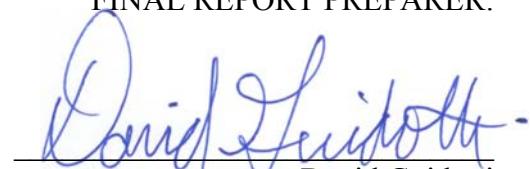

David Guidotti
Senior Technical Writer



Testing Cert #0214.26

Elliott Laboratories is accredited by the A2LA, certificate number 0214.26, to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full

REVISION HISTORY

Rev#	Date	Comments	Modified By
-	2-13-2012	First release	

TABLE OF CONTENTS

REVISION HISTORY	2
TABLE OF CONTENTS	3
SCOPE.....	4
OBJECTIVE.....	4
STATEMENT OF COMPLIANCE.....	5
DEVIATIONS FROM THE STANDARDS.....	5
TEST RESULTS SUMMARY	6
DIGITAL TRANSMISSION SYSTEMS (2400 – 2483.5MHZ).....	6
GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS.....	6
MEASUREMENT UNCERTAINTIES.....	7
EQUIPMENT UNDER TEST (EUT) DETAILS.....	8
GENERAL.....	8
OTHER EUT DETAILS.....	8
ANTENNA SYSTEM	8
ENCLOSURE.....	9
MODIFICATIONS.....	9
SUPPORT EQUIPMENT.....	9
EUT INTERFACE PORTS	9
EUT OPERATION	9
TEST SITE.....	10
GENERAL INFORMATION	10
RADIATED EMISSIONS CONSIDERATIONS	10
MEASUREMENT INSTRUMENTATION	11
RECEIVER SYSTEM	11
INSTRUMENT CONTROL COMPUTER	11
FILTERS/ATTENUATORS	12
ANTENNAS.....	12
ANTENNA MAST AND EQUIPMENT TURNTABLE	12
INSTRUMENT CALIBRATION.....	12
TEST PROCEDURES	13
EUT AND CABLE PLACEMENT	13
RADIATED EMISSIONS	14
CONDUCTED EMISSIONS FROM ANTENNA PORT	16
BANDWIDTH MEASUREMENTS	16
SPECIFICATION LIMITS AND SAMPLE CALCULATIONS	17
GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS	18
RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS	18
OUTPUT POWER LIMITS – DIGITAL TRANSMISSION SYSTEMS	19
TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS AND DTS SYSTEMS	19
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS	19
SAMPLE CALCULATIONS - RADIATED EMISSIONS	20
SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION.....	21
APPENDIX A TEST EQUIPMENT CALIBRATION DATA	22
APPENDIX B TEST DATA	23
END OF REPORT	41

SCOPE

An electromagnetic emissions test has been performed on the Satarii Inc. model SW1721(MA1), pursuant to the following rules:

Industry Canada RSS-Gen Issue 3
RSS 210 Issue 8 "Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment"
FCC Part 15 Subpart C

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards and as outlined in Elliott Laboratories test procedures:

ANSI C63.4:2003
FCC DTS Measurement Procedure KDB558074, March 2005

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant Industry Canada performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

OBJECTIVE

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Prior to marketing in the USA, all unlicensed transmitters and transceivers require certification. Receive-only devices operating between 30 MHz and 960 MHz are subject to either certification or a manufacturer's declaration of conformity, with all other receive-only devices exempt from the technical requirements.

Prior to marketing in Canada, Class I transmitters, receivers and transceivers require certification. Class II devices are required to meet the appropriate technical requirements but are exempt from certification requirements.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body's review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

STATEMENT OF COMPLIANCE

The tested sample of Satarii Inc. model SW1721(MA1) complied with the requirements of the following regulations:

Industry Canada RSS-Gen Issue 3
RSS 210 Issue 8 “Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment”
FCC Part 15 Subpart C

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

The test results recorded herein are based on a single type test of Satarii Inc. model SW1721(MA1) and therefore apply only to the tested sample. The sample was selected and prepared by Vladimir Tetelbaum of Satarii Inc..

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

TEST RESULTS SUMMARY**DIGITAL TRANSMISSION SYSTEMS (2400 – 2483.5MHz)**

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result
15.247(a)	RSS 210 A8.2	Digital Modulation	Systems uses DS/SS techniques	System must utilize a digital transmission technology	Complies
15.247 (a) (2)	RSS 210 A8.2 (1)	6dB Bandwidth	2.12 MHz	>500kHz	Complies
15.247 (b) (3)	RSS 210 A8.2 (4)	Output Power (multipoint systems)	5.0 dBm (3 mW) EIRP = 6.8 mW ^{Note 1}	1Watt, EIRP limited to 4 Watts.	Complies
15.247(d)	RSS 210 A8.2 (2)	Power Spectral Density	-12.0 dBm / 3kHz	8dBm/3kHz	Complies
15.247(c)	RSS 210 A8.5	Antenna Port Spurious Emissions 30MHz – 25 GHz	N/A - test performed radiated	< -30dBc ^{Note 2}	Complies
15.247(c) / 15.209	RSS 210 A8.5	Radiated Spurious Emissions 30MHz – 25 GHz	62.9dB μ V/m @ 2399.6MHz (-5.7dB)	15.207 in restricted bands, all others <-30dBc ^{Note 2}	Complies

Note 1: EIRP was measured radiated. Output power calculated from measured EIRP and antenna gain of 3.3dBi.
 Note 2: Limit of -30dBc used because the power was measured using the UNII test procedure (maximum power averaged over a transmission burst).

GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS

FCC Rule Part	RSS Rule part	Description	Measured Value / Comments	Limit / Requirement	Result (margin)
15.203	-	RF Connector	F trace on the pcb.	Unique or integral antenna required	Complies
15.207	RSS GEN Table 2	AC Conducted Emissions	N/A – EUT is battery powered.		
15.109	RSS GEN 7.2.3 Table 1	Receiver spurious emissions	30.0dB μ V/m @ 4873.6MHz (-24.0dB)	Refer to page 18	Complies
15.247 (b) (5) 15.407 (f)	RSS 102	RF Exposure Requirements	Refer to MPE calculations in Exhibit 11, RSS 102 declaration and User Manual statements.	Refer to OET 65, FCC Part 1 and RSS 102	Complies
-	RSP 100 RSS GEN 7.1.5	User Manual	-	Statement required regarding non-interference	Complies
-	RSP 100 RSS GEN 4.4.1	99% Bandwidth	3.86 MHz	Information only	N/A

MEASUREMENT UNCERTAINTIES

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with UKAS document LAB 34.

Measurement Type	Measurement Unit	Frequency Range	Expanded Uncertainty
RF power, conducted (power meter)	dBm	25 to 7000 MHz	± 0.52 dB
RF power, conducted (Spectrum analyzer)	dBm	25 to 7000 MHz	± 0.7 dB
Conducted emission of transmitter	dBm	25 to 26500 MHz	± 0.7 dB
Conducted emission of receiver	dBm	25 to 26500 MHz	± 0.7 dB
Radiated emission (substitution method)	dBm	25 to 26500 MHz	± 2.5 dB
Radiated emission (field strength)	dB μ V/m	25 to 1000 MHz	± 3.6 dB
		1000 to 40000 MHz	± 6.0 dB
Conducted Emissions (AC Power)	dB μ V	0.15 to 30 MHz	± 2.4 dB

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Satarii Inc. model SW1721(MA1) is a device that converts an iPhone into a robotically controlled camera. It consists of a base station which holds & moves the iPhone, & a remote controller. The remote links to the base station wirelessly (2.4GHz). Since the EUT would be placed on a table top during operation, the EUT was treated as table-top equipment during testing to simulate the end-user environment. The electrical rating of the EUT is 100-240 Volts, 50-60 Hz, .25 Amps.

The sample was received on January 31, 2012 and tested on January 31 and February 1, 2012. The EUT consisted of the following component(s):

Company	Model	Description	Serial Number	FCC ID
Satarii	SW1721(MA1)	Remote control (TX low)	SW17MA1153 W13	AMX-1721MA1
Satarii	SW1721(MA1)	Remote control (TX mid)	SW17MA1153 W19	AMX-1721MA1
Satarii	SW1721(MA1)	Remote control (TX high)	SW17MA1153 W41	AMX-1721MA1
Satarii	SW1721(MA1)	Remote control (RX)	SW17MA1153 W31	AMX-1721MA1

OTHER EUT DETAILS

Due to software limitation for testing, multiple EUTs were provided. Each was configured to transmit at a fixed frequency (lowest, middle, and highest channels). In normal use, the EUT would select any available channel. An additional sample was provided that was configured for receive mode.

The remote uses non-rechargeable batteries (2xAAA).

ANTENNA SYSTEM

The antenna is integral to the device. The antenna is an F trace on the pcb. Gain of 3.3dBi.

ENCLOSURE

The EUT enclosures are primarily constructed of plastic.

The remote measures approximately 5.2 cm wide by 2.0 cm deep by 6.5 cm high.

MODIFICATIONS

No modifications were made to the EUT during the time the product was at Elliott.

SUPPORT EQUIPMENT

No support equipment was used during testing.

EUT INTERFACE PORTS

The I/O cabling configuration during testing was as follows:

Port	Connected To	Description	Cable(s) Shielded or Unshielded	Length(m)
None	-	-	-	-

EUT OPERATION

During testing, the EUT was configured to continuously transmit at the maximum output power.

TEST SITE**GENERAL INFORMATION**

Final test measurements were taken at the test sites listed below. Pursuant to section 2.948 of the FCC's Rules and section 3.3 of RSP-100, construction, calibration, and equipment data has been filed with the Commission and with industry Canada.

Site	Registration Numbers		Location
	FCC	Canada	
Chamber 7	A2LA accreditation	2845B-7	41039 Boyce Road Fremont, CA 94538-2435

ANSI C63.4:2003 recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement. The test site(s) contain separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements of ANSI C63.4:2003.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment or in a semi-anechoic chamber. The test sites are maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4:2003 guidelines and meet the Normalized Site Attenuation (NSA) requirements of ANSI C63.4:2003.

MEASUREMENT INSTRUMENTATION**RECEIVER SYSTEM**

An EMI receiver as specified in CISPR 16-1-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements. If the repetition frequency of the signal being measured is below 20Hz, peak measurements are made in lieu of Quasi-Peak measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz, unless the signal is pulsed in which case the average (or video) bandwidth of the measuring instrument is reduced to onset of pulse desensitization and then increased.

INSTRUMENT CONTROL COMPUTER

The receivers utilize either a Rohde & Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs which control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A loop antenna is used below 30 MHz. For the measurement range 30 MHz to 1000 MHz either a combination of a biconical antenna and a log periodic or a bi-log antenna is used. Above 1000 MHz, horn antennas are used. The antenna calibration factors to convert the received voltage to an electric field strength are included with appropriate cable loss and amplifier gain factors to determine an overall site factor, which is then programmed into the test receivers or incorporated into the test software.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height. Measurements below 30 MHz are made with the loop antenna at a fixed height of 1m above the ground plane.

ANSI C63.4:2003 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

TEST PROCEDURES

EUT AND CABLE PLACEMENT

The regulations require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4:2003, and the worst-case orientation is used for final measurements.


RADIATED EMISSIONS

A preliminary scan of the radiated emissions is performed in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed, one scan for each antenna polarization (horizontal and vertical; loop parallel and perpendicular to the EUT). During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied (for measurements above 30 MHz) and cable positions are varied to determine the highest emission relative to the limit. Preliminary scans may be performed in a fully anechoic chamber for the purposes of identifying the frequencies of the highest emissions from the EUT.


A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth, which results in the highest emission is then maintained while varying the antenna height from one to four meters (for measurements above 30 MHz, measurements below 30 MHz are made with the loop antenna at a fixed height of 1m). The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain.

When testing above 18 GHz, the receive antenna is located at 1meter from the EUT and the antenna height is restricted to a maximum of 2.5 meters.

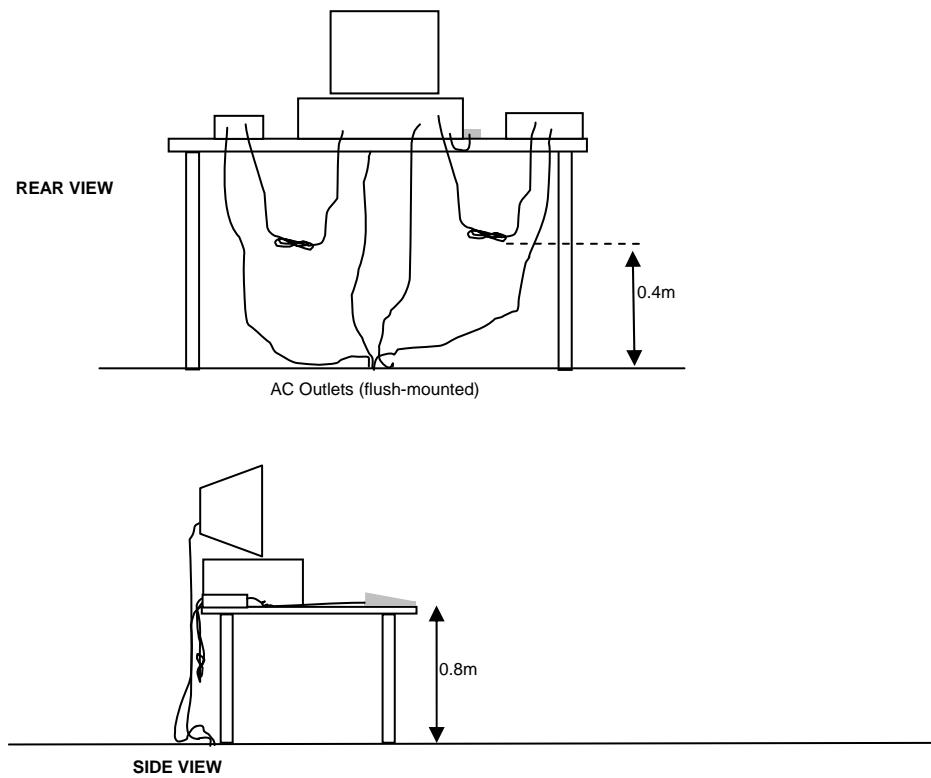


Typical Test Configuration for Radiated Field Strength Measurements

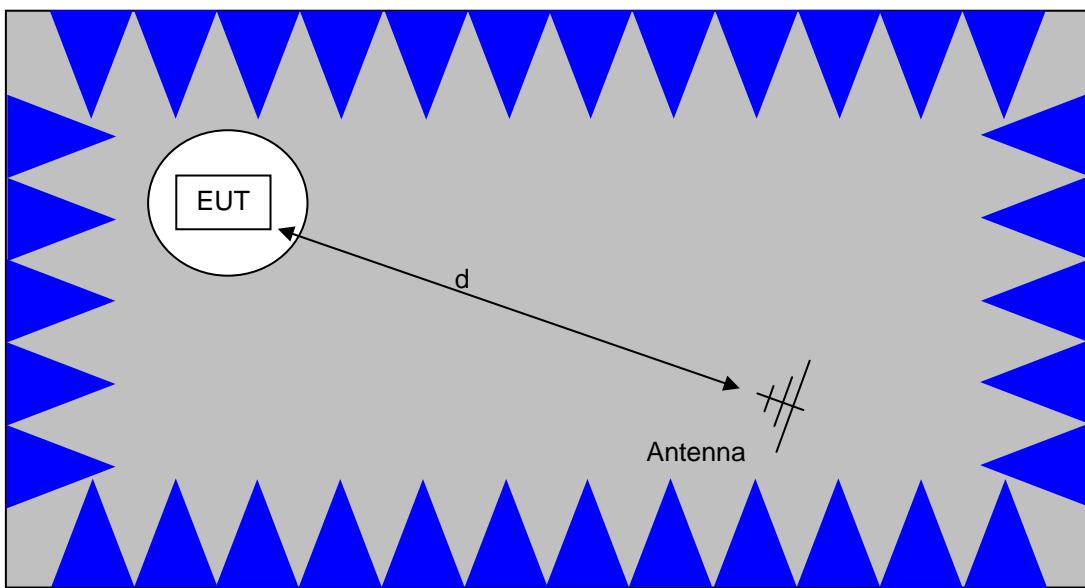

The anechoic materials on the walls and ceiling ensure compliance with the normalized site attenuation requirements of CISPR 16 / CISPR 22 / ANSI C63.4 for an alternate test site at the measurement distances used.


Floor-standing equipment is placed on the floor with insulating supports between the unit and the ground plane.

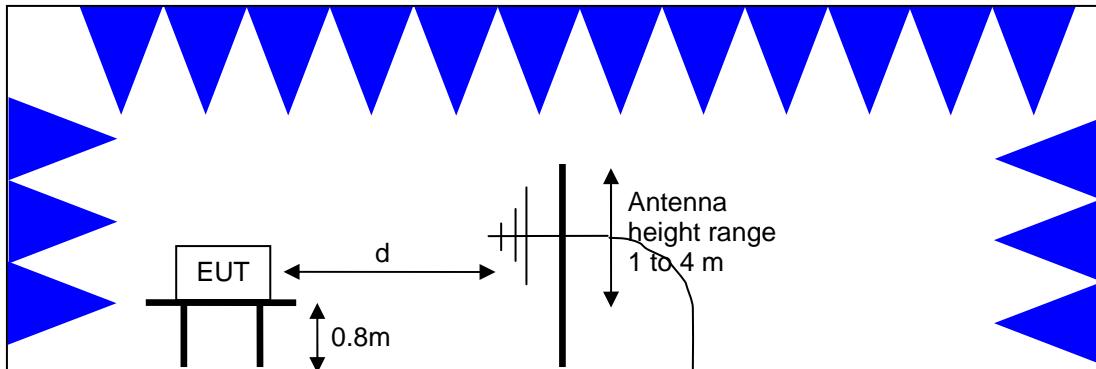

Test Configuration for Radiated Field Strength Measurements
Semi-Anechoic Chamber, Plan and Side Views

CONDUCTED EMISSIONS FROM ANTENNA PORT

Direct measurements of power, bandwidth and power spectral density are performed, where possible, with the antenna port of the EUT connected to either the power meter or spectrum analyzer via a suitable attenuator and/or filter. These are used to ensure that the front end of the measurement instrument is not overloaded by the fundamental transmission.

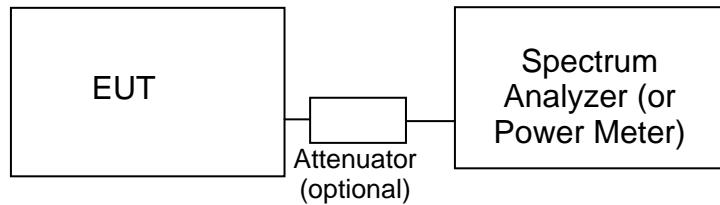**Test Configuration for Antenna Port Measurements**

Measurement bandwidths (video and resolution) are set in accordance with the relevant standards and Elliott's test procedures for the type of radio being tested. When power measurements are made using a resolution bandwidth less than the signal bandwidth the power is calculated by summing the power across the signal bandwidth using either the analyzer channel power function or by capturing the trace data and calculating the power using software. In both cases the summed power is corrected to account for the equivalent noise bandwidth (ENBW) of the resolution bandwidth used.

If power averaging is used (typically for certain digital modulation techniques), the EUT is configured to transmit continuously. Power averaging is performed using either the built-in function of the analyzer or, if the analyzer does not feature power averaging, using external software. In both cases the average power is calculated over a number of sweeps (typically 100). When the EUT cannot be configured to continuously transmit then either the analyzer is configured to perform a gated sweep to ensure that the power is averaged over periods that the device is transmitting or power averaging is disabled and a max-hold feature is used.

If a power meter is used to make output power measurements the sensor head type (peak or average) is stated in the test data table.

BANDWIDTH MEASUREMENTS

The 6dB, 20dB and/or 26dB signal bandwidth is measured in using the bandwidths recommended by ANSI C63.4. When required, the 99% bandwidth is measured using the methods detailed in RSS GEN.

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dB_{uV}). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dB_{uV/m}). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from transmitters that fall in restricted bands¹ (with the exception of transmitters operating under FCC Part 15 Subpart D and RSS 210 Annex 9), the limits for all emissions from a low power device operating under the general rules of RSS 310 (tables 3 and 4), RSS 210 (table 2) and FCC Part 15 Subpart C section 15.209.

Frequency Range (MHz)	Limit (uV/m)	Limit (dBuV/m @ 3m)
0.009-0.490	2400/F _{KHz} @ 300m	67.6-20*log ₁₀ (F _{KHz}) @ 300m
0.490-1.705	24000/F _{KHz} @ 30m	87.6-20*log ₁₀ (F _{KHz}) @ 30m
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100 @ 3m	40 @ 3m
88 to 216	150 @ 3m	43.5 @ 3m
216 to 960	200 @ 3m	46.0 @ 3m
Above 960	500 @ 3m	54.0 @ 3m

RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from receivers as detailed in FCC Part 15.109, RSS 210 Table 2, RSS GEN Table 1 and RSS 310 Table 3. Note that receivers operating outside of the frequency range 30 MHz – 960 MHz are exempt from the requirements of 15.109.

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

¹ The restricted bands are detailed in FCC 15.203, RSS 210 Table 1 and RSS 310 Table 2

OUTPUT POWER LIMITS – DIGITAL TRANSMISSION SYSTEMS

The table below shows the limits for output power and output power density. Where the signal bandwidth is less than 20 MHz the maximum output power is reduced to the power spectral density limit plus 10 times the log of the bandwidth (in MHz).

Operating Frequency (MHz)	Output Power	Power Spectral Density
902 – 928	1 Watt (30 dBm)	8 dBm/3kHz
2400 – 2483.5	1 Watt (30 dBm)	8 dBm/3kHz
5725 – 5850	1 Watt (30 dBm)	8 dBm/3kHz

The maximum permitted output power is reduced by 1dB for every dB the antenna gain exceeds 6dBi. Fixed point-to-point applications using the 5725 – 5850 MHz band are not subject to this restriction.

TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS and DTS SYSTEMS

The limits for unwanted (spurious) emissions from the transmitter falling in the restricted bands are those specified in the general limits sections of FCC Part 15 and RSS 210. All other unwanted (spurious) emissions shall be at least 20dB below the level of the highest in-band signal level (30dB if the power is measured using the sample detector/power averaging method).

SAMPLE CALCULATIONS - CONDUCTED EMISSIONS

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_f - S = M$$

where:

R_f = Receiver Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

A distance factor, when used for electric field measurements above 30MHz, is calculated by using the following formula:

$$F_d = 20 \cdot \text{LOG10} (D_m/D_s)$$

where:

F_d = Distance Factor in dB

D_m = Measurement Distance in meters

D_s = Specification Distance in meters

For electric field measurements below 30MHz the extrapolation factor is either determined by making measurements at multiple distances or a theoretical value is calculated using the formula:

$$F_d = 40 \cdot \text{LOG10} (D_m/D_s)$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

R_r = Receiver Reading in dBuV/m

F_d = Distance Factor in dB

R_c = Corrected Reading in dBuV/m

L_s = Specification Limit in dBuV/m

M = Margin in dB Relative to Spec

SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION

Where the radiated electric field strength is expressed in terms of the equivalent isotropic radiated power (eirp), or where a field strength measurement of output power is made in lieu of a direct measurement, the following formula is used to convert between eirp and field strength at a distance of d (meters) from the equipment under test:

$$E = \frac{1000000 \sqrt{30} P}{d} \text{ microvolts per meter}$$

d

where P is the eirp (Watts)

For a measurement at 3m the conversion from a logarithmic value for field strength (dBuV/m) to an eirp power (dBm) is -95.3dB.

*Appendix A Test Equipment Calibration Data***Radiated Emissions, 30 - 1,000 MHz, 31-Jan-12**

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	1549	5/25/2013
Com-Power Corp.	Preamplifier, 30-1000 MHz	PA-103	1632	4/29/2012
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1756	4/6/2012

Fundamental, Bandedge Radiated, Power, PSD, and BW, 01-Feb-12

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	Antenna, Horn, 1-18 GHz (SA40-Red)	3115	1142	8/2/2012
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1756	4/6/2012

Radiated Emissions, 1000 - 26,000 MHz, 02-Feb-12

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	Microwave Preamplifier, 1- 26.5GHz	8449B	785	5/18/2012
EMCO	Antenna, Horn, 1-18 GHz (SA40-Red)	3115	1142	8/2/2012
Hewlett Packard	SpecAn 9 kHz - 40 GHz, FT (SA40) Blue	8564E (84125C)	1393	8/9/2012
Hewlett Packard	Head (Inc W1-W4, 1742 , 1743) Blue	84125C	1620	5/9/2012
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	2238	10/4/2012

Appendix B Test Data

T86212 Pages 24 - 40



EMC Test Data

Client:	Satarii Inc	Job Number:	J86132
Model:	Swivl - SW1721(BA1) Basestation, SW1721(MA1)	T-Log Number:	T86212
	Remote	Account Manager:	Deepa Shetty
Contact:	Vladimir Telbaum		-
Emissions Standard(s):	FCC 15B, FCC 15.247	Class:	B
Immunity Standard(s):	-	Environment:	-

EMC Test Data

For The

Satarii Inc

Model

Swivl - SW1721(BA1) Basestation, SW1721(MA1) Remote

Date of Last Test: 2/10/2012



EMC Test Data

Client:	Satarii Inc	Job Number:	J86132
Model:	Swivl - SW1721(BA1) Basestation, SW1721(MA1) Remote	T-Log Number:	T86212
		Account Manager:	Deepa Shetty
Contact:	Vladimir Tetelbaum		
Standard:	FCC 15B, FCC 15.247	Class:	N/A

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. All remote support equipment was located approximately 30 meters from the EUT with all I/O connections running on top of the groundplane or routed in overhead in the GR-1089 test configuration.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 19 °C
Rel. Humidity: 35 %

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

Run #	Mode	Channel	Power Setting	Measured Power	Test Performed	Limit	Result / Margin
1a	TX	2406	-	-	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	44.7dB μ V/m @ 2386.5MHz (-9.3dB)
			-	-	Band Edge (2400 MHz)	15.247(c)	62.9dB μ V/m @ 2399.6MHz (-5.7dB)
			-	-	Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	32.8dB μ V/m @ 4812.5MHz (-21.2dB)
1b	TX	2438	-	-	Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	40.5dB μ V/m @ 7314.4MHz (-13.5dB)
1c	TX	2474	-	-	Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247(c)	46.7dB μ V/m @ 2483.5MHz (-7.3dB)
			-	-	Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	46.1dB μ V/m @ 7421.5MHz (-7.9dB)
2	RX	2438	-	-	Radiated Emissions, 1 - 8 GHz	RSS-GEN	30.0dB μ V/m @ 4873.6MHz (-24.0dB)

Note: No radio related emissions were observed below 1GHz.



EMC Test Data

Client:	Satarii Inc	Job Number:	J86132
Model:	Swivl - SW1721(BA1) Basestation, SW1721(MA1) Remote	T-Log Number:	T86212
Contact:	Vladimir Telibaum	Account Manager:	Deepa Shetty
Standard:	FCC 15B, FCC 15.247	Class:	N/A

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Run #1: Fundamental, Bandedge and Transmit radiated spurious emissions measurements

Date of Test: 2/1/2012

Test Engineer: Mark Hill

Test Location: FT#7

Run #1a: Low Channel @ 2406 MHz

Fundamental Signal Field Strength: Peak and average values measured in 1 MHz, and peak value measured in 100kHz

Orientation: Edge

Frequency	Level	Pol	15.209 / 15.247	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
2406.730	98.6	V	-	-	PK	181	1.0
2406.130	97.7	V	-	-	AVG	181	1.0
2406.350	103.9	V	-	-	PK	181	1.0
2406.570	97.4	H	-	-	PK	186	1.1
2406.110	95.5	H	-	-	AVG	186	1.1
2406.330	101.8	H	-	-	PK	186	1.1

Fundamental emission level @ 3m in 100kHz RBW: 98.6 dB μ V/m

Limit for emissions outside of restricted bands: 78.6 dB μ V/m

Limit for emissions outside of restricted bands: 68.6 dB μ V/m

Limit is -20dBc (Peak power measurement)

Limit is -30dBc (UNII power measurement)


Band Edge Signal Field Strength - Direct measurement of field strength @ 2390 MHz

Orientation: Edge


Frequency	Level	Pol	15.209 / 15.247	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
2386.470	44.7	H	54.0	-9.3	AVG	186	1.1
2389.680	44.1	V	54.0	-9.9	AVG	181	1.0
2387.760	57.4	H	74.0	-16.6	PK	186	1.1
2386.470	56.5	V	74.0	-17.5	PK	181	1.0

Client:	Satarii Inc	Job Number:	J86132
Model:	Swivl - SW1721(BA1) Basestation, SW1721(MA1) Remote	T-Log Number:	T86212
Contact:	Vladimir Tetelbaum	Account Manager:	Deepa Shetty
Standard:	FCC 15B, FCC 15.247	Class:	N/A

RB 1 MHz; VB 10 Hz Vertical

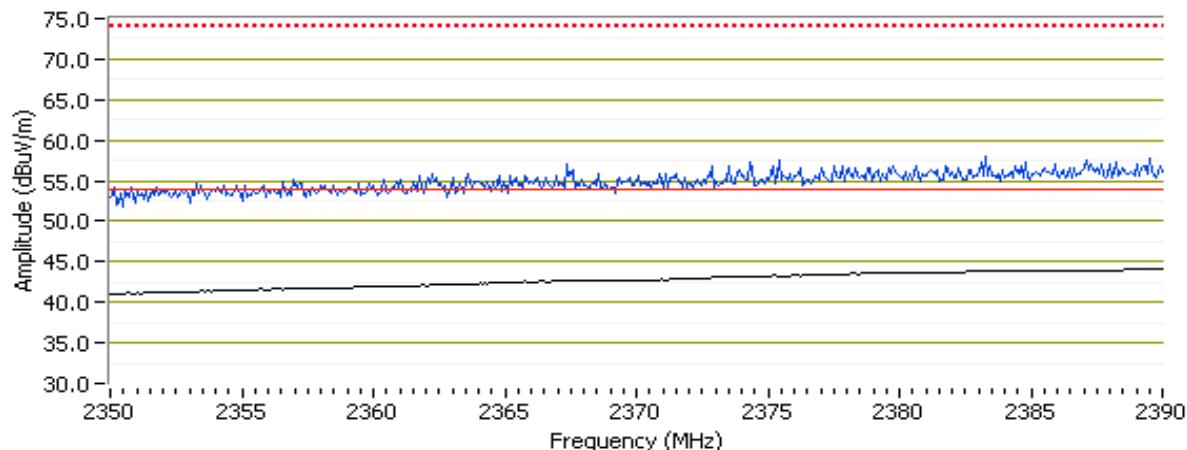


RB 1 MHz; VB 10 Hz Horizontal

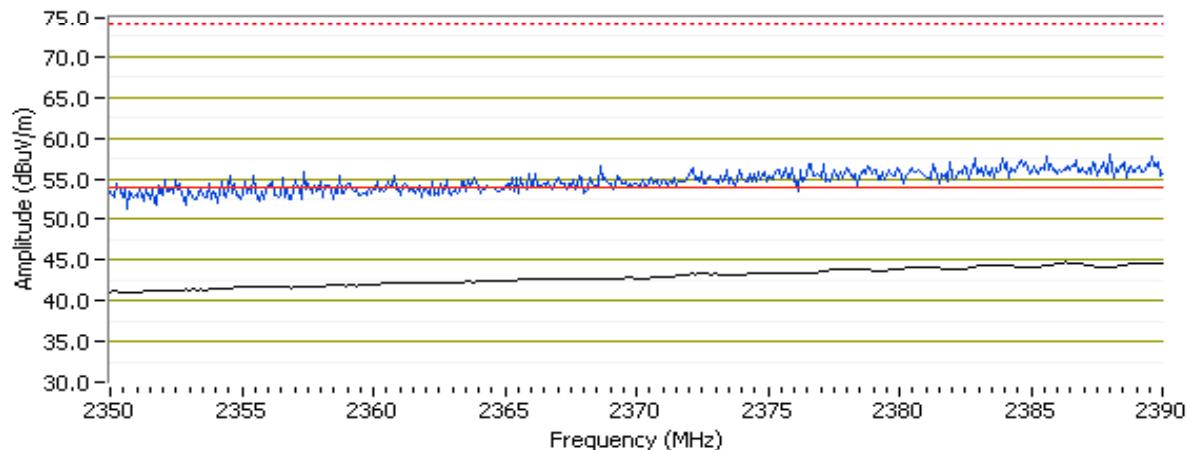

Client:	Satarii Inc	Job Number:	J86132
Model:	Swivl - SW1721(BA1) Basestation, SW1721(MA1) Remote	T-Log Number:	T86212
Contact:	Vladimir Tetelbaum	Account Manager:	Deepa Shetty
Standard:	FCC 15B, FCC 15.247	Class:	N/A

Band Edge Signal Field Strength - Direct measurement of field strength @ 2400 MHz
Orientation: Edge

Frequency	Level	Pol	15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2399.580	62.9	V	68.6	-5.7	Pk	181	1.0	POS; RB 100 kHz; VB: 100 kHz
2398.260	56.3	H	69.6	-13.3	Pk	186	1.1	POS; RB 100 kHz; VB: 100 kHz

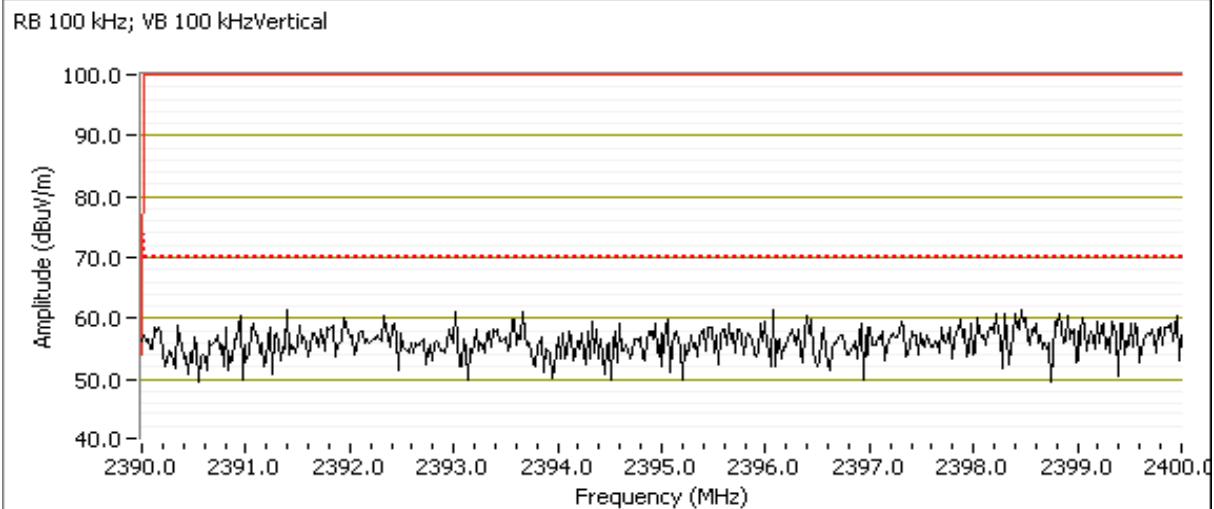

Client:	Satarii Inc	Job Number:	J86132
Model:	Swivl - SW1721(BA1) Basestation, SW1721(MA1) Remote	T-Log Number:	T86212
Contact:	Vladimir Tetelbaum	Account Manager:	Deepa Shetty
Standard:	FCC 15B, FCC 15.247	Class:	N/A

Date of Test: 2/1/2012

Test Engineer: Joseph Cadigal

Test Location: FT#7


Other Spurious Emissions - all three remote scan at the same time

Frequency	Level	Pol	15.209 / 15.247	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
4812.530	32.8	V	54.0	-21.2	AVG	160	1.0 RB 1 MHz;VB 10 Hz;Pk up right
4812.550	44.7	V	74.0	-29.3	PK	160	1.0 RB 1 MHz;VB 3 MHz;Pk up right
7218.900	33.1	V	68.6	-35.5	AVG	216	1.3 RB 1 MHz;VB 10 Hz;Pk up right
7218.980	44.7	V	70.0	-25.3	PK	216	1.3 RB 1 MHz;VB 3 MHz;Pk up right
4811.980	32.6	V	54.0	-21.4	AVG	160	1.0 RB 1 MHz;VB 10 Hz;Pk edge
4812.900	43.5	V	74.0	-30.5	PK	160	1.0 RB 1 MHz;VB 3 MHz;Pk edge
7218.920	38.1	V	68.6	-30.5	AVG	216	1.3 RB 1 MHz;VB 10 Hz;Pk edge
7219.300	49.4	V	70.0	-20.6	PK	216	1.3 RB 1 MHz;VB 3 MHz;Pk edge
4812.000	31.5	V	54.0	-22.5	AVG	160	1.0 RB 1 MHz;VB 10 Hz;Pk flat
4811.420	43.1	V	74.0	-30.9	PK	160	1.0 RB 1 MHz;VB 3 MHz;Pk flat
7218.970	38.7	V	68.6	-61.3	AVG	216	1.3 RB 1 MHz;VB 10 Hz;Pk flat
7219.340	49.5	V	70.0	-20.5	PK	216	1.3 RB 1 MHz;VB 3 MHz;Pk flat

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band but the more stringent restricted band limit was used.

All three remotes low,mid and high

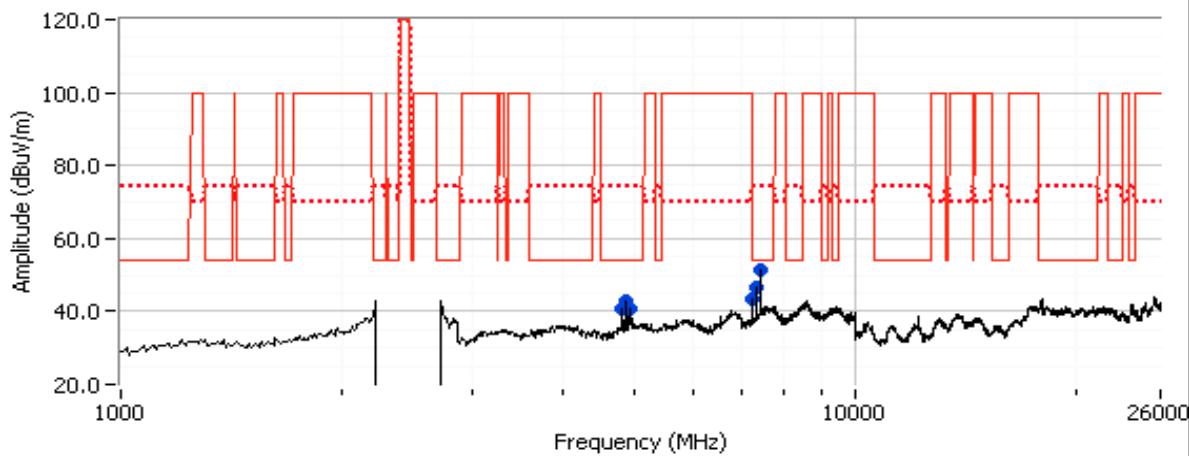



EMC Test Data

Client:	Satarii Inc	Job Number:	J86132
Model:	Swivl - SW1721(BA1) Basestation, SW1721(MA1) Remote	T-Log Number:	T86212
		Account Manager:	Deepa Shetty
Contact:	Vladimir Tetelbaum		
Standard:	FCC 15B, FCC 15.247	Class:	N/A

Run #1b: Center Channel @ 2438 MHz

Fundamental Signal Field Strength: Peak and average values measured in 1 MHz, and peak value measured in 100kHz

Performed over three orientations to determine worse case

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247 Limit	Margin	Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
EUT Flat								
2438.060	87.2	V	-	-	PK	229	1.0	POS; RB 100 kHz; VB: 100 kHz
2438.100	87.5	V	-	-	AVG	229	1.0	POS; RB 1 MHz; VB: 10 Hz
2437.820	93.6	V	-	-	PK	229	1.0	POS; RB 1 MHz; VB: 10 MHz
2438.810	94.4	H	-	-	PK	148	1.0	POS; RB 100 kHz; VB: 100 kHz
2438.130	94.3	H	-	-	AVG	148	1.0	POS; RB 1 MHz; VB: 10 Hz
2438.490	100.6	H	-	-	PK	148	1.0	POS; RB 1 MHz; VB: 10 MHz
EUT Upright								
2438.830	92.6	V	-	-	PK	156	1.2	POS; RB 100 kHz; VB: 100 kHz
2438.110	93.1	V	-	-	AVG	156	1.2	POS; RB 1 MHz; VB: 10 Hz
2438.870	99.3	V	-	-	PK	156	1.2	POS; RB 1 MHz; VB: 10 MHz
2438.650	98.8	H	-	-	PK	360	1.1	POS; RB 100 kHz; VB: 100 kHz
2438.110	98.3	H	-	-	AVG	360	1.1	POS; RB 1 MHz; VB: 10 Hz
2438.270	104.6	H	-	-	PK	360	1.1	POS; RB 1 MHz; VB: 10 MHz
EUT Edge								
2438.610	99.6	V	-	-	PK	350	1.0	POS; RB 100 kHz; VB: 100 kHz
2438.090	99.3	V	-	-	AVG	350	1.0	POS; RB 1 MHz; VB: 10 Hz
2438.450	105.4	V	-	-	PK	350	1.0	POS; RB 1 MHz; VB: 10 MHz
2437.410	94.7	H	-	-	PK	149	1.0	POS; RB 100 kHz; VB: 100 kHz
2438.090	95.0	H	-	-	AVG	149	1.0	POS; RB 1 MHz; VB: 10 Hz
2437.850	101.1	H	-	-	PK	149	1.0	POS; RB 1 MHz; VB: 10 MHz

Fundamental emission level @ 3m in 100kHz RBW: 99.6 dB μ V/m

Limit for emissions outside of restricted bands: 79.6 dB μ V/m Limit is -20dBc (Peak power measurement)

Limit for emissions outside of restricted bands: 69.6 dB μ V/m Limit is -30dBc (UNII power measurement)

Client:	Satarii Inc	Job Number:	J86132
Model:	Swivl - SW1721(BA1) Basestation, SW1721(MA1) Remote	T-Log Number:	T86212
Contact:	Vladimir Tetelbaum	Account Manager:	Deepa Shetty
Standard:	FCC 15B, FCC 15.247	Class:	N/A

Date of Test: 2/1/2012

Test Engineer: Joseph Cadigal

Test Location: FT#7


Other Spurious Emissions - all three remote scan at the same time

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247 Limit	Margin	Detector	Azimuth degrees	Height meters	Comments
7314.360	35.7	H	54.0	-18.3	AVG	7	1.0	RB 1 MHz;VB 10 Hz;Pk edge
7316.390	46.7	H	74.0	-27.3	PK	7	1.0	RB 1 MHz;VB 3 MHz;Pk edge
4875.940	33.2	V	54.0	-20.8	AVG	203	1.0	RB 1 MHz;VB 10 Hz;Pk edge
4876.020	43.7	V	74.0	-30.3	PK	203	1.0	RB 1 MHz;VB 3 MHz;Pk edge
7314.360	35.4	H	54.0	-18.6	AVG	7	1.0	RB 1 MHz;VB 10 Hz;Pk up right
7315.300	47.2	H	74.0	-26.8	PK	7	1.0	RB 1 MHz;VB 3 MHz;Pk up right
4875.950	30.4	V	54.0	-23.6	AVG	203	1.0	RB 1 MHz;VB 10 Hz;Pk up right
4876.050	41.9	V	74.0	-32.1	PK	203	1.0	RB 1 MHz;VB 3 MHz;Pk up right
7314.420	40.5	H	54.0	-13.5	AVG	7	1.0	RB 1 MHz;VB 10 Hz;Pk flat
7315.370	51.2	H	74.0	-22.8	PK	7	1.0	RB 1 MHz;VB 3 MHz;Pk flat
4875.960	30.2	V	54.0	-23.8	AVG	203	1.0	RB 1 MHz;VB 10 Hz;Pk flat
4876.640	41.7	V	74.0	-32.3	PK	203	1.0	RB 1 MHz;VB 3 MHz;Pk flat

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band but the more stringent restricted band limit was used.

All three remotes low,mid and high

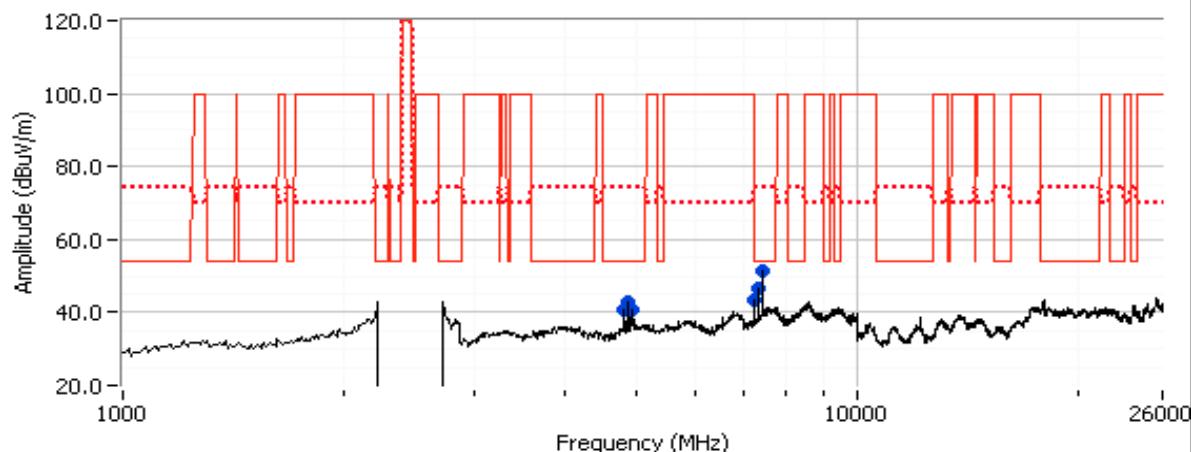

Client:	Satarii Inc	Job Number:	J86132
Model:	Swivl - SW1721(BA1) Basestation, SW1721(MA1) Remote	T-Log Number:	T86212
Contact:	Vladimir Telibaum	Account Manager:	Deepa Shetty
Standard:	FCC 15B, FCC 15.247	Class:	N/A

Run #1c: High Channel @ 2474 MHz
Fundamental Signal Field Strength: Peak and average values measured in 1 MHz, and peak value measured in 100kHz

Orientation: Edge

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2474.270	98.5	V	-	-	Pk	180	1.0	POS; RB 100 kHz; VB: 100 kHz
2474.090	97.4	V	-	-	AVG	180	1.0	POS; RB 1 MHz; VB: 10 Hz
2473.230	103.5	V	-	-	PK	180	1.0	POS; RB 1 MHz; VB: 10 MHz
2473.650	92.8	H	-	-	Pk	152	1.0	POS; RB 100 kHz; VB: 100 kHz
2474.090	91.3	H	-	-	AVG	152	1.0	POS; RB 1 MHz; VB: 10 Hz
2473.550	97.4	H	-	-	PK	152	1.0	POS; RB 1 MHz; VB: 10 MHz

Fundamental emission level @ 3m in 100kHz RBW: 98.5 dB μ V/m

Limit for emissions outside of restricted bands: 78.5 dB μ V/m


Limit for emissions outside of restricted bands: 68.5 dB μ V/m

Limit is -20dBc (Peak power measurement)


Limit is -30dBc (UNII power measurement)

Band Edge Signal Field Strength - Direct measurement of field strength
Orientation:

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2483.500	46.7	V	54.0	-7.3	AVG	180	1.0	POS; RB 1 MHz; VB: 10 Hz
2483.500	44.2	H	54.0	-9.8	AVG	152	1.0	POS; RB 1 MHz; VB: 10 Hz
2483.570	59.2	V	74.0	-14.8	PK	180	1.0	POS; RB 1 MHz; VB: 10 MHz
2484.130	57.4	H	74.0	-16.6	PK	152	1.0	POS; RB 1 MHz; VB: 10 MHz

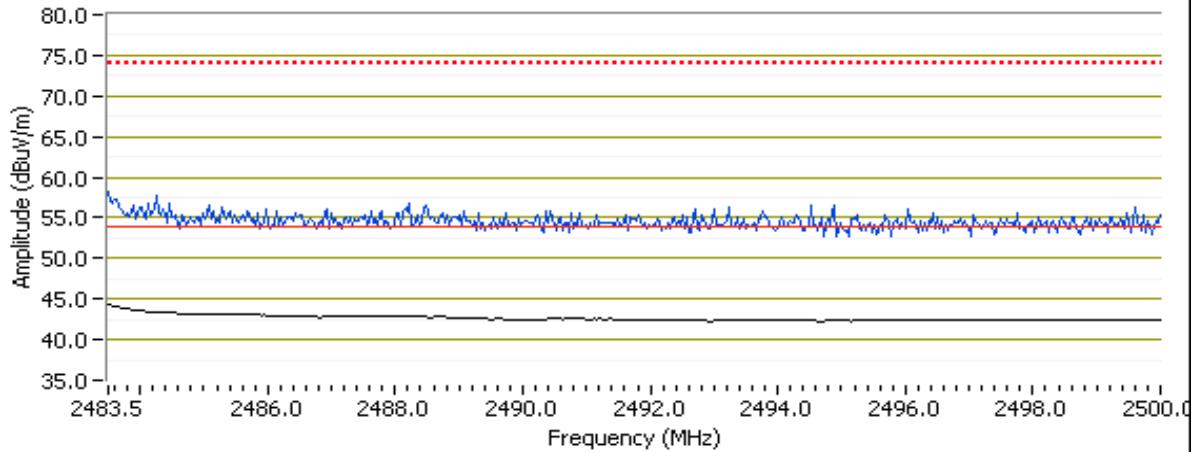RB 1 MHz; VB 10 Hz Horizontal


Client:	Satarii Inc	Job Number:	J86132
Model:	Swivl - SW1721(BA1) Basestation, SW1721(MA1) Remote	T-Log Number:	T86212
Contact:	Vladimir Tetelbaum	Account Manager:	Deepa Shetty
Standard:	FCC 15B, FCC 15.247	Class:	N/A

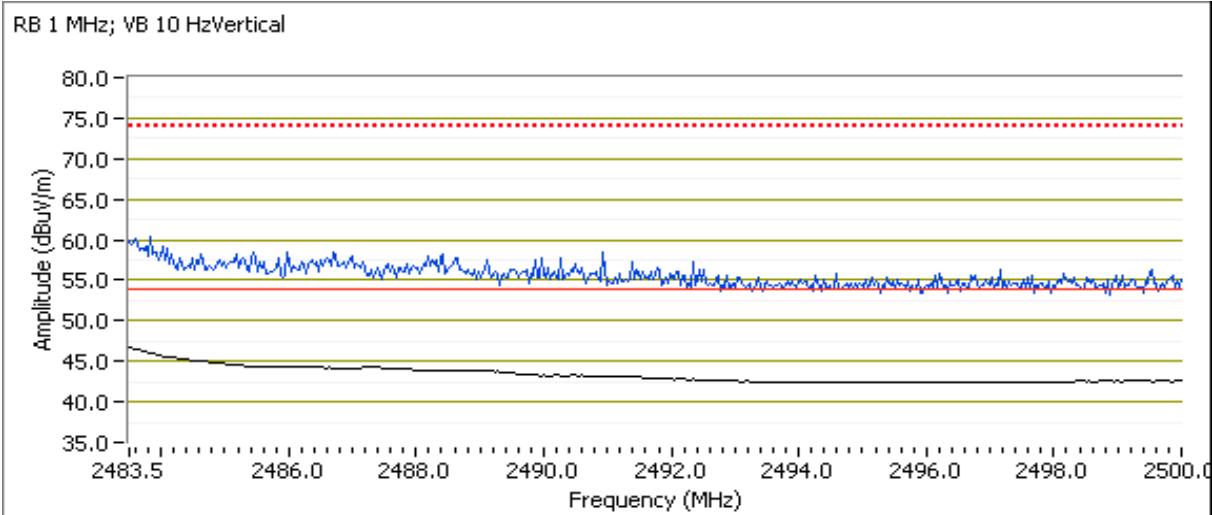

Client:	Satarii Inc	Job Number:	J86132
Model:	Swivl - SW1721(BA1) Basestation, SW1721(MA1) Remote	T-Log Number:	T86212
Contact:	Vladimir Tetelbaum	Account Manager:	Deepa Shetty
Standard:	FCC 15B, FCC 15.247	Class:	N/A

Date of Test: 2/1/2012

Test Engineer: Joseph Cadigal

Test Location: FT#7


Other Spurious Emissions - all three remote scan at the same time

Frequency	Level	Pol	15.209 / 15.247	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
4942.080	31.2	V	54.0	-22.8	AVG	34	1.0
4941.270	41.6	V	74.0	-32.4	PK	34	1.0
7419.430	35.1	V	54.0	-18.9	AVG	118	1.3
7419.960	47.9	V	74.0	-26.1	PK	118	1.3
4941.980	30.7	V	54.0	-23.3	AVG	34	1.0
4943.220	41.6	V	74.0	-32.4	PK	34	1.0
7421.640	44.2	V	54.0	-9.8	AVG	118	1.3
7421.790	55.1	V	74.0	-18.9	PK	118	1.3
4942.110	39.4	V	54.0	-14.6	AVG	34	1.0
4941.910	45.4	V	74.0	-28.6	PK	34	1.0
7421.480	46.1	V	54.0	-7.9	AVG	118	1.3
7419.770	56.9	V	74.0	-17.1	PK	118	1.3

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band but the more stringent restricted band limit was used.

All three remotes low,mid and high

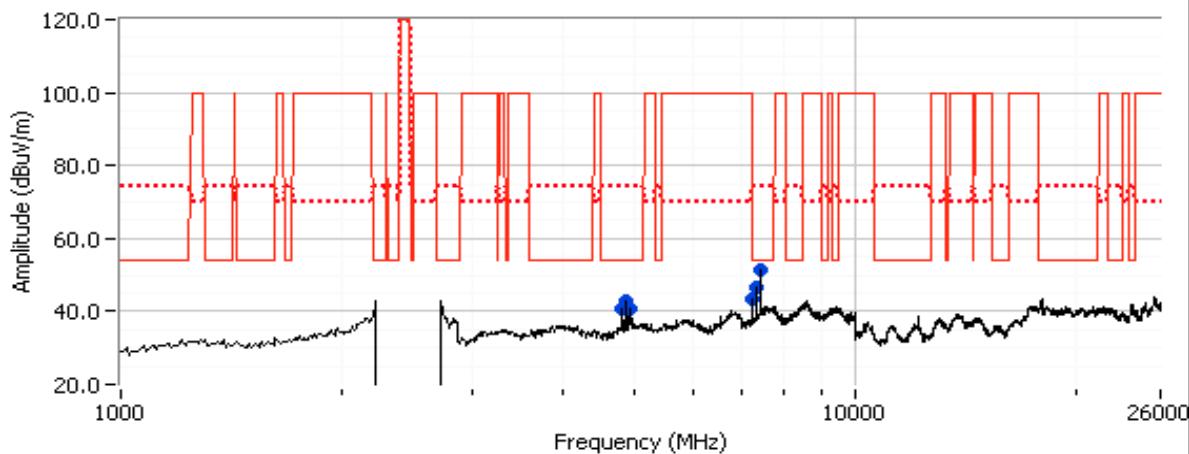

Client:	Satarii Inc	Job Number:	J86132
Model:	Swivl - SW1721(BA1) Basestation, SW1721(MA1) Remote	T-Log Number:	T86212
Contact:	Vladimir Tetelbaum	Account Manager:	Deepa Shetty
Standard:	FCC 15B, FCC 15.247	Class:	N/A


Run #2: Radiated Spurious Emissions, 1000 - 8000 MHz, Receive Mode

Date of Test: 2/1/2012

Test Engineer: Joseph Cadigal

Test Location: FT#7

Frequency	Level	Pol	RSS-GEN		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4873.590	30.0	V	54.0	-24.0	AVG	41	1.0	RB 1 MHz;VB 10 Hz;Pk
4874.210	42.7	V	74.0	-31.3	PK	41	1.0	RB 1 MHz;VB 3 MHz;Pk

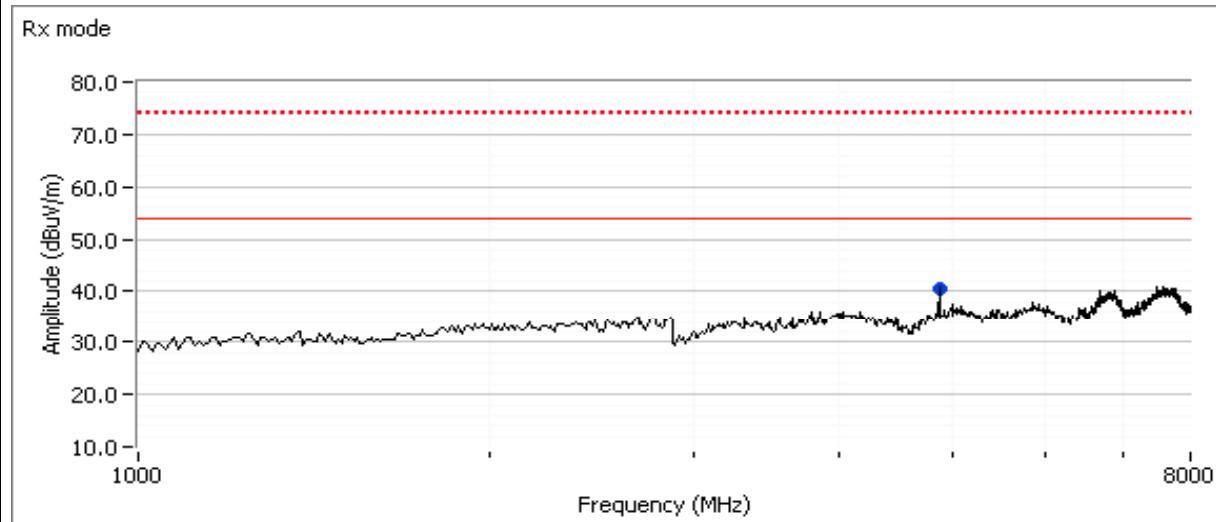



EMC Test Data

Client:	Satarii Inc	Job Number:	J86132
Model:	Swivl - SW1721(BA1) Basestation, SW1721(MA1) Remote	T-Log Number:	T86212
Contact:	Vladimir Telibaum	Account Manager:	Deepa Shetty
Standard:	FCC 15B, FCC 15.247	Class:	N/A

RSS 210 and FCC 15.247 (DTS) Antenna Port Measurements Power, PSD, Bandwidth and Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 2/1/2012

Config. Used: 2

Test Engineer: Mark Hill

Config Change: None

Test Location: FT#7

EUT Voltage: Battery Powered

General Test Configuration

The EUT was connected to the spectrum analyzer or power meter via a suitable attenuator. All measurements were made on a single chain.

All measurements have been corrected to allow for the external attenuators used.

Ambient Conditions:

Temperature: 19 °C
Rel. Humidity: 35 %

Summary of Results

Run #	Pwr setting	Avg Pwr	Test Performed	Limit	Pass / Fail	Result / Margin
1	-	-	Output Power	15.247(b)	Pass	5.0 dBm
2	-	-	Power spectral Density (PSD)	15.247(d)	Pass	-12.0 dBm/3kHz
3	-	-	Minimum 6dB Bandwidth	15.247(a)	Pass	2.12 MHz
3	-	-	99% Bandwidth	RSS GEN	-	3.86 MHz
4	-	-	Spurious emissions	15.247(b)	N/A	- test performed radiated

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard


No deviations were made from the requirements of the standard.

Client:	Satarii Inc	Job Number:	J86132
Model:	Swivl - SW1721(BA1) Basestation, SW1721(MA1) Remote	T-Log Number:	T86212
Contact:	Vladimir Telibaum	Account Manager:	Deepa Shetty
Standard:	FCC 15B, FCC 15.247	Class:	N/A

Run #1: Output Power

Power Setting ²	Frequency (MHz)	Power - EIRP		Antenna Gain (dBi)	Power - Conducted		Result
		(dBm) ¹	mW		dBm	W	
-	2406	8.3	6.8	3.3	5.0	0.003	Pass
-	2438	6.5	4.5	3.3	3.2	0.002	Pass
-	2474	7.7	5.9	3.3	4.4	0.003	Pass

Note 1:	Test performed radiated. Correction factor = site factor + 11.7 dB (conversion from dBm to dBuV + dBuV/m to dBm eirp)
Note 1:	Output power measured using a spectrum analyzer (see plots below) with RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was continuous) and power integration over 20 MHz (option #2, method 1 in KDB 558074, equivalent to method 1 of DA-02-2138A1 for U-NII devices). Spurious limit becomes -30dBc.
Note 2:	Power setting - the software power setting used during testing, included for reference only.

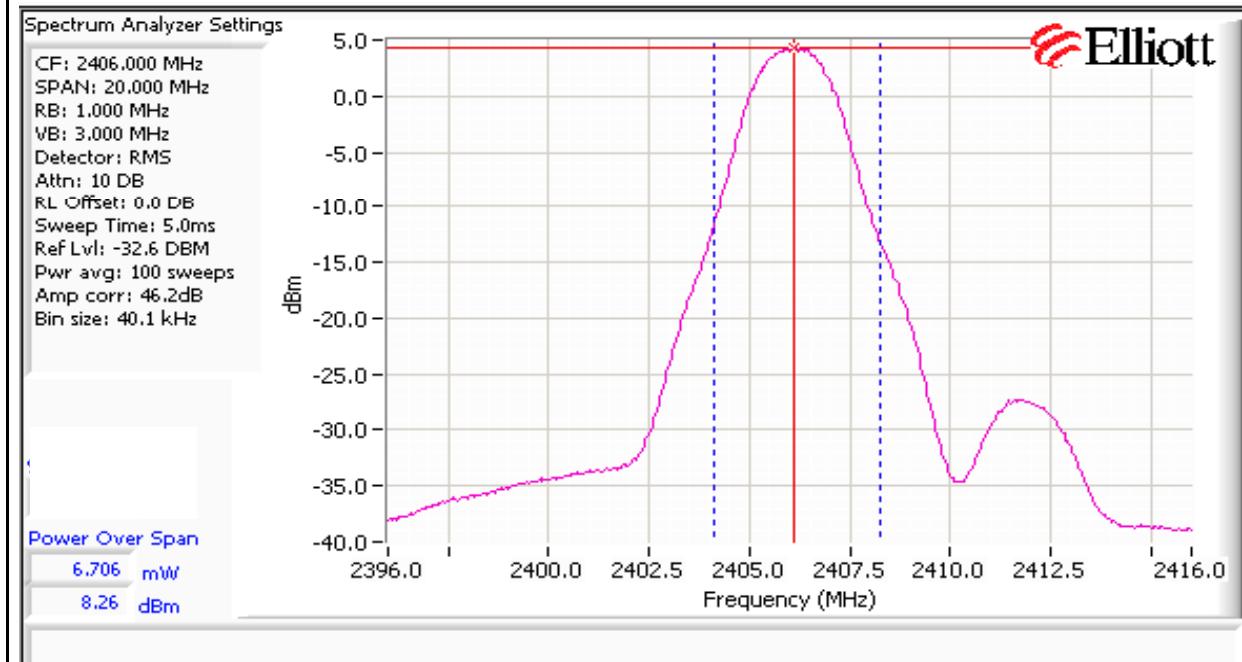


Client:	Satarii Inc	Job Number:	J86132
Model:	Swivl - SW1721(BA1) Basestation, SW1721(MA1) Remote	T-Log Number:	T86212
Contact:	Vladimir Telibaum	Account Manager:	Deepa Shetty
Standard:	FCC 15B, FCC 15.247	Class:	N/A

Run #2: Power spectral Density

Power Setting	Frequency (MHz)	PSD	Limit	Result
		(dBm/3kHz) ^{Note 1}		
-	2406	-12.0	8.0	Pass
-	2438	-14.0	8.0	Pass
-	2474	-14.9	8.0	Pass

Note 1: Test performed radiated. Correction factor = site factor + 11.7 dB (conversion from dBm to dBuV + dBuV/m to dBm eirp) - 3.3dBi (antenna gain)

Note 1: Power spectral density measured using RB=3 kHz, VB=10kHz, analyzer with peak detector and with a sweep time set to ensure a dwell time of at least 1 second per 3kHz. The measurement is made at the frequency of PPSD determined from preliminary scans using RB=3kHz using multiple sweeps at a faster rate over the 6dB bandwidth of the signal.

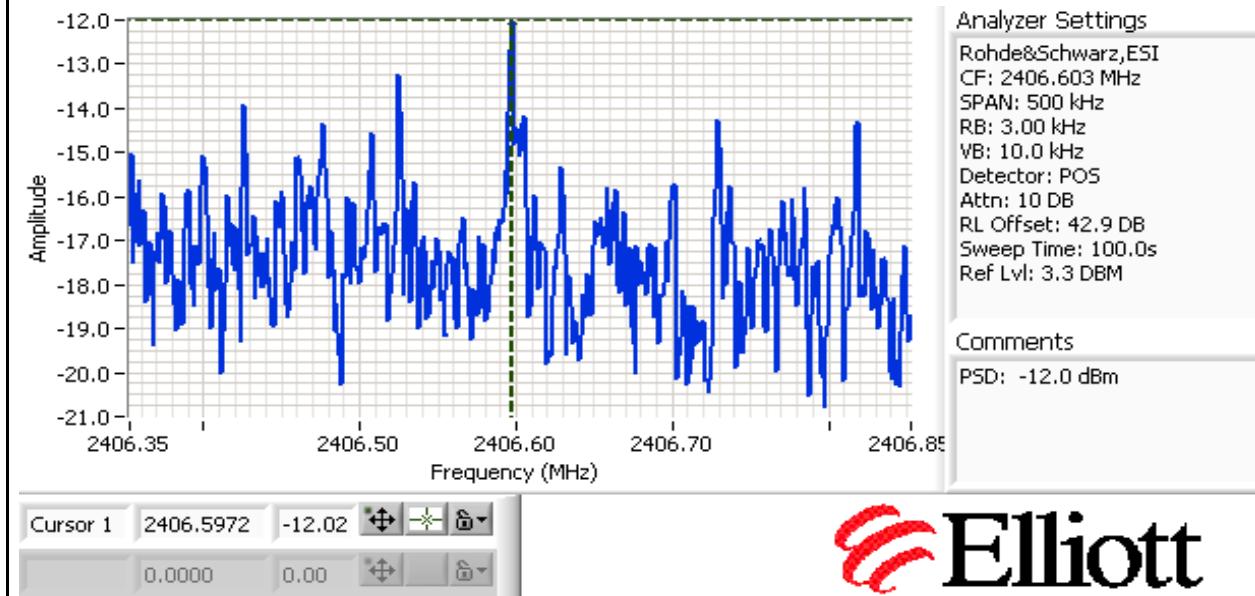


Client:	Satarii Inc	Job Number:	J86132
Model:	Swivl - SW1721(BA1) Basestation, SW1721(MA1) Remote	T-Log Number:	T86212
Contact:	Vladimir Telibaum	Account Manager:	Deepa Shetty
Standard:	FCC 15B, FCC 15.247	Class:	N/A


Run #3: Signal Bandwidth

Power Setting	Frequency (MHz)	Resolution Bandwidth	Bandwidth (MHz)	
			6dB	99%
-	2406	50kHz	2.16	3.86
-	2438	50kHz	2.12	3.86
-	2474	50kHz	2.24	3.82

Note 1: 99% bandwidth measured in accordance with RSS GEN, with RB > 1% of the span and VB > 3xRB

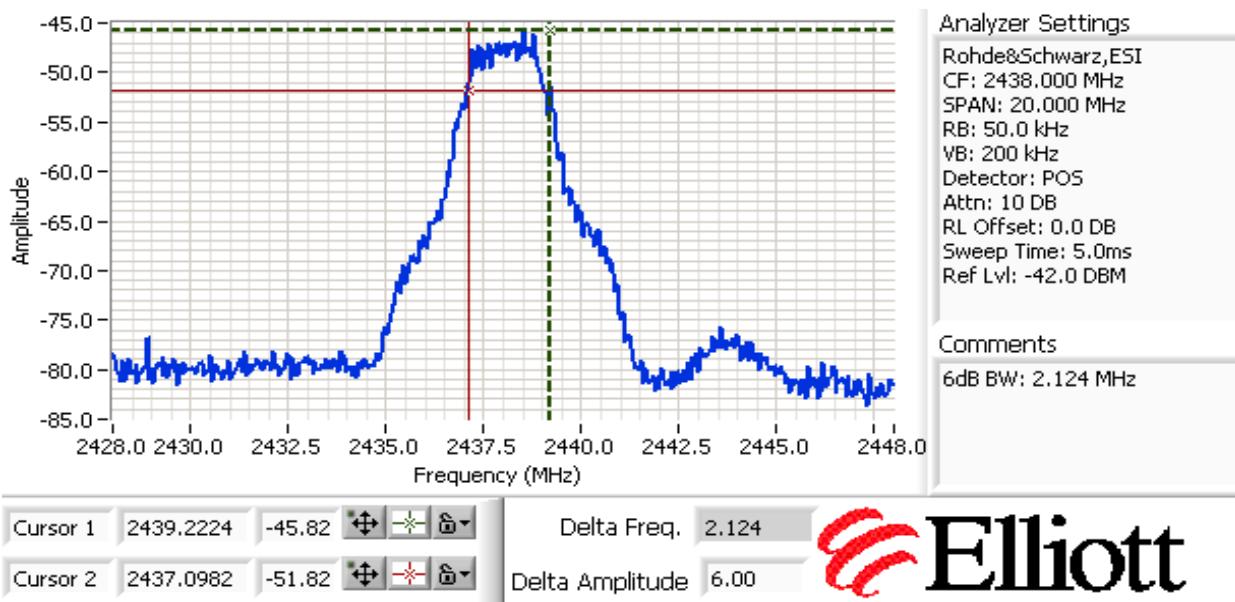

Client:	Satarii Inc	Job Number:	J86132
Model:	Swivl - SW1721(BA1) Basestation, SW1721(MA1) Remote	T-Log Number:	T86212
Contact:	Vladimir Tetelbaum	Account Manager:	Deepa Shetty
Standard:	FCC 15B, FCC 15.247	Class:	N/A

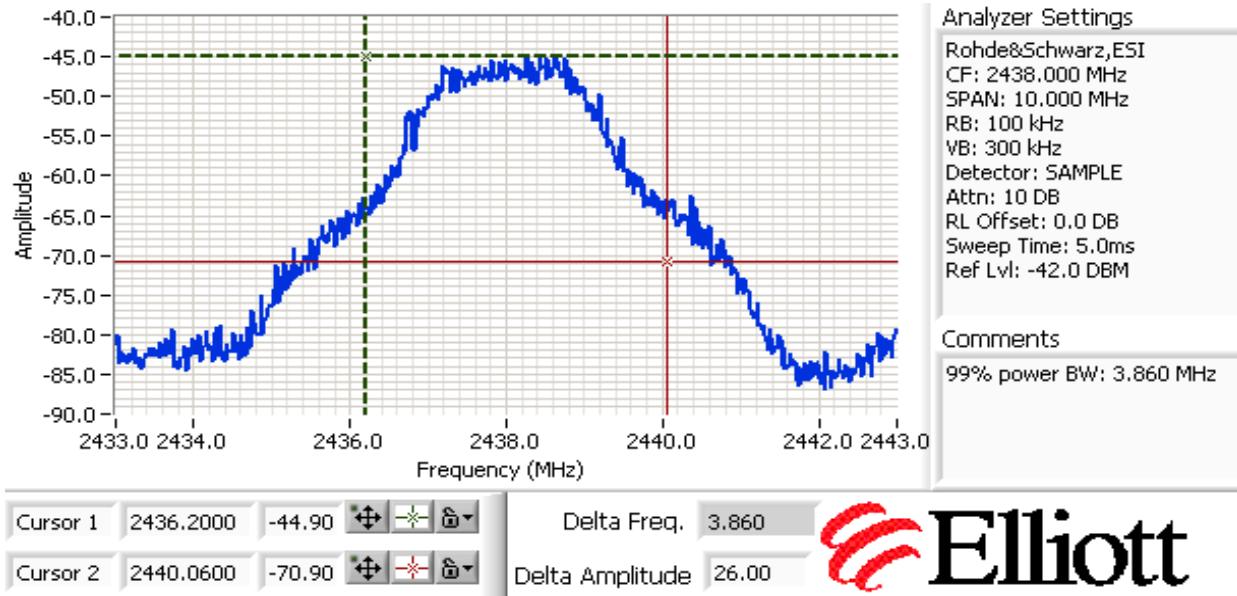

End of Report

This page is intentionally blank and
marks the last page of this test report.