



InterLab®

Final Report on

GAMETEL

Report Reference: MDE_SVEP_1102_FCCb
acc. Title 47 CFR chapter I part 15 subpart B
Date: January 04, 2012

Test Laboratory:

7Layers AG
Borsigstr. 11
40880 Ratingen
Germany

Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7Layers AG
Borsigstrasse 11
40880 Ratingen, Germany
Phone: +49 (0) 2102 749 0
Fax: +49 (0) 2102 749 350
www.7Layers.com

Aufsichtsratsvorsitzender •
Chairman of the Supervisory Board:
Markus Becker
Vorstand • Board:
Dr. H.-J. Meckelburg



Registergericht • registered in:
Düsseldorf, HRB 44096
UST-IdNr • VAT No.:
DE 203159652
TAX No. 147/5869/0385

1 Administrative Data

1.1 Project Data

Project Responsible: Carsten Steinröder
Date Of Test Report: 2012/01/19
Date of first test: 2011/12/13
Date of last test: 2011/12/14

1.2 Applicant Data

Company Name: Svep Design Center AB

Street: St. Lars väg 42A
City: 222 70 Lund
Country: Sweden

Contact Person: Mr. Bo Nyman

Phone: +46 46 192 705
E-Mail: bo.nyman@svep.se

1.3 Test Laboratory Data

The following list shows all places and laboratories involved for test result generation:

7 layers DE

<i>Company Name :</i>	7 layers AG
<i>Street :</i>	Borsigstrasse 11
<i>City :</i>	40880 Ratingen
<i>Country :</i>	Germany
<i>Contact Person :</i>	Mr. Michael Albert
<i>Phone :</i>	+49 2102 749 201
<i>Fax :</i>	+49 2102 749 444
<i>E Mail :</i>	michael.albert@7Layers.de

Laboratory Details

Lab ID	Identification	Responsible	Accreditation Info
Lab 1	Conducted Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAkkS-Registration no. D-PL-12140-01-01
Lab 2	Radiated Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAkkS-Registration no. D-PL-12140-01-01

1.4 Signature of the Testing Responsible



Carsten Steinröder

responsible for tests performed in: Lab 1, Lab 2



7 layers AG, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0

1.5 Signature of the Accreditation Responsible



Accreditation scope responsible person
responsible for Lab 1, Lab 2



7 layers AG, Borsigstr. 11
13089 Berlin, Germany
Phone: +49 (0)30 749 6

2 Test Object Data

2.1 General OUT Description

The following section lists all OUTs (Object's Under Test) involved during testing.

OUT: GAMETEL

Manufacturer:

Company Name: please see applicant data

Contact Person: -

Parameter List:

Parameter name	Value
Parameter for Scope FCC_v2:	
Antenna Gain	5.15 (dBi)
DC Power Supply	12 (V)
highest channel	2480 (MHz)
lowest channel	2402 (MHz)
mid channel	2441 (MHz)



2.2 Detailed Description of OUT Samples

Sample : e03

<i>OUT Identifier</i>	GAMETEL		
<i>Sample Description</i>	radiated sample		
<i>HW Status</i>	RB1		
<i>SW Status</i>	V0.16 (Power Set.: 4dBm)		
<i>Low Voltage</i>	3.35 V	<i>Low Temp.</i>	0 °C
<i>High Voltage</i>	4.2 V	<i>High Temp.</i>	+70 °C
<i>Nominal Voltage</i>	3.7 V	<i>Normal Temp.</i>	+20 °C

Parameter List:

<i>Parameter Description</i>	<i>Value</i>
------------------------------	--------------

Parameter for Scope FCC_v2

Antenna Gain	5.15	(dBi)
Frequency_high	2480	(MHz)
Frequency_low	2402	(MHz)
Frequency_mid	2441	(MHz)

2.3 OUT Features

Features for OUT: GAMETEL

<i>Designation</i>	<i>Description</i>	<i>Allowed Values</i>	<i>Supported Value(s)</i>
Features for scope: FCC_v2			
AC	The OUT is powered by or connected to AC Mains		
BT	EUT supports Bluetooth data rate of 1 Mbps with GFSK modulation in the band 2400 MHz - 2483.5 MHz		
DC	The OUT is powered by or connected to DC Mains		
EDR2	EUT supports Bluetooth using data rate of 2 Mbps with PI/4 DQPSK modulation in the band 2400 MHz - 2483.5 MHz		
EDR3	EUT supports Bluetooth using data rate of 3 Mbps with 8DPSK modulation in the band 2400 MHz - 2483.5 MHz		
Iant	Integral Antenna: permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment		

2.4 Auxiliary Equipment

AE No.	Type Designation	Serial No.	HW Status	SW Status	Description
AE 5	Cherry RS 6000	G 0000273 2P28			Keyboard
AE 1	Flatron L1740BQ	509WANF1W607			TFT Monitor
AE 4	Logitech M-BB48	LZC90505478			Optical Mouse
AE 3	PA3378E-3AC3	G71C0006R310			Laptop AC Adapter
AE 2	Toshiba TECRA M9	87060248H		Windows XP	Laptop

2.5 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup.

Setup No.	List of OUT samples		List of auxiliary equipment	
	Sample No.	Sample Description	AE No.	AE Description
E03_FCC15b (FCC 15b Computer Peripheral Setup)				
	Sample: e03	radiated sample	AE 5	Keyboard
			AE 1	TFT Monitor
			AE 4	Optical Mouse
			AE 3	Laptop AC Adapter
			AE 2	Laptop

3 Results

3.1 General

Documentation of tested devices:	Available at the test laboratory.
Interpretation of the test results:	The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is conform to the applied standard.
	In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.
	In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment implementation.
Note:	USB Data Transfer was performed by using the "FUNDROID Test Tool" provided by the applicant. This tool permanently sends a PING between the Laptop and the OUT during the tests.

3.2 List of the Applicable Body

(Body for Scope: FCC_v2)

Designation	Description
FCC47CFRChIPART15bRADIO FREQUENCY DEVICES	Part 15, Subpart B - Unintentional Radiators



Reference: MDE_SVEP_1102_FCCb

acc. Title 47 CFR chapter I part 15 subpart B

3.3 List of Test Specification

Test Specification: **FCC part 2 and 15**

Version 10-1-10 Edition

Title: PART 2 - GENERAL RULES AND REGULATIONS
PART 15 - RADIO FREQUENCY DEVICES

<i>Applicable Errata</i>	<i>Activate Date</i>	<i>Comment</i>
ANSI C63.4-2003	04/1/30	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and electronic Equipment in the Range of 9 kHz to 40 GHz
DA 00-705 considered	00/3/1	Public Notice: Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems



Reference: MDE_SVEP_1102_FCCb

acc. Title 47 CFR chapter I part 15 subpart B

3.4 Summary

<i>Test Case Identifier / Name</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab Ref.</i>	<i>Setup</i>
15b.1 Conducted Emissions (AC Power Line) §15.107				
15b.1; Mode = USB traffic	Passed	2011/12/13	Lab 1	E03_FCC15b
15b.2 Spurious Radiated Emissions §15.109				
15b.2; Mode = USB traffic	Passed	2011/12/14	Lab 2	E03_FCC15b



Reference: MDE_SVEP_1102_FCCb

acc. Title 47 CFR chapter I part 15 subpart B

3.5 Detailed Results

3.5.1 15b.1 Conducted Emissions (AC Power Line) §15.107

Test: 15b.1; Mode = transmit

Result: Passed

Setup No.: E03_FCC15b

Date of Test: 2011/12/13 14:31

Body: FCC47CFRChIPART15bRADIO FREQUENCY DEVICES


Test Specification: FCC part 2 and 15

Detailed Results:
AC MAINS CONDUCTED

EUT: (3D060e03) / 13.12.2011
 Manufacturer: SVEP
 Operating Condition: USB traffic
 Test Site: 7 layers Ratingen
 Operator: Doe
 Test Specification: ANSI C63.4; FCC 15.107 / 15.207
 Comment:
 Start of Test: 13.12.2011 / 16:17:24

SCAN TABLE: "FCC Voltage"

Short Description:			FCC Voltage			
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	20.0 ms	9 kHz	ESH3-Z5
			Average			

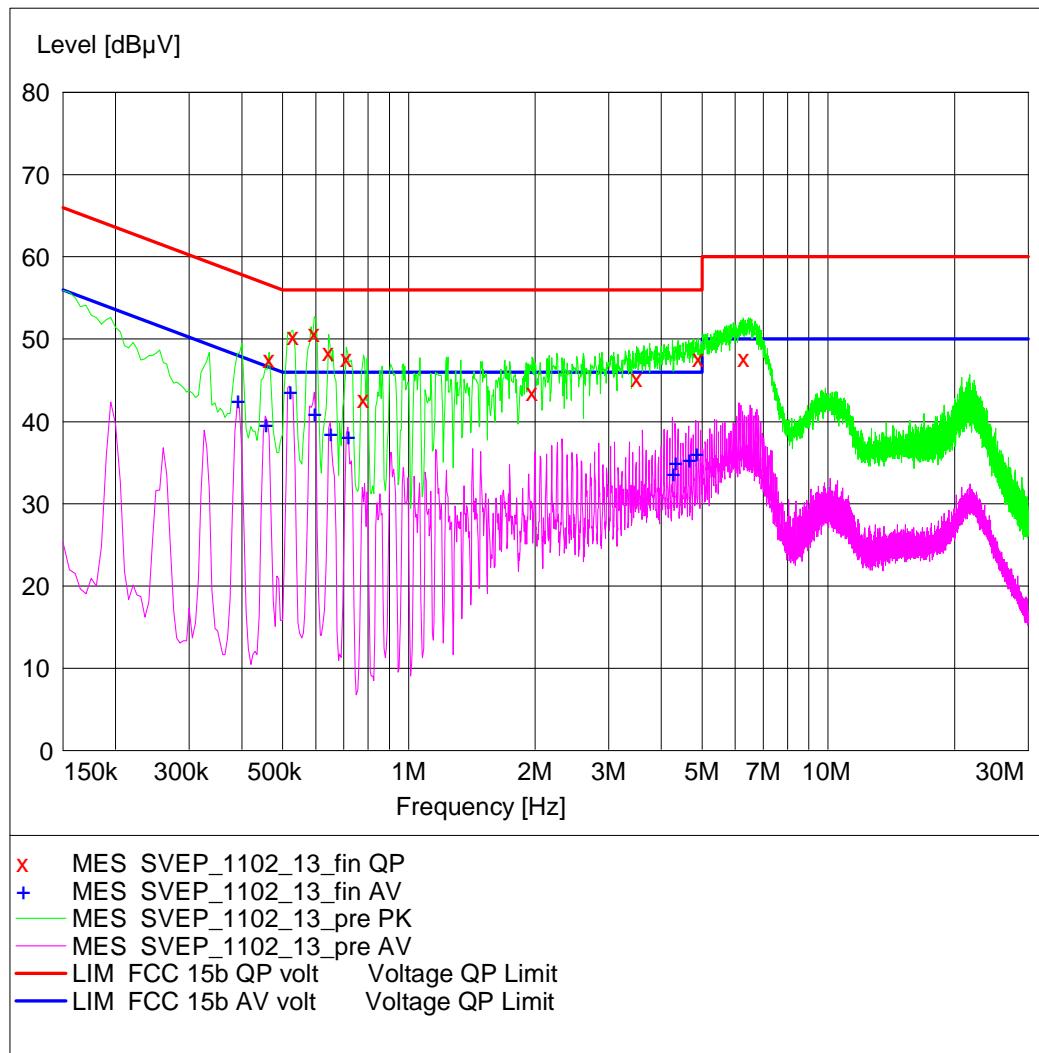



Reference: MDE_SVEP_1102_FCCb

acc. Title 47 CFR chapter I part 15 subpart B

MEASUREMENT RESULT: "SVEP_1102_13_fin_QP"

13.12.2011 16:29

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.465000	47.60	10.0	57	9.0	L1	GND
0.530000	50.40	10.0	56	5.6	N	FLO
0.595000	50.70	10.0	56	5.3	L1	GND
0.645000	48.40	10.0	56	7.6	N	FLO
0.710000	47.80	10.0	56	8.2	L1	FLO
0.780000	42.70	10.0	56	13.3	N	GND
1.965000	43.60	10.0	56	12.4	L1	GND
3.500000	45.30	10.1	56	10.7	N	GND
4.900000	47.80	10.2	56	8.2	N	GND
6.285000	47.80	10.3	60	12.2	L1	GND

MEASUREMENT RESULT: "SVEP_1102_13_fin_AV"

13.12.2011 16:29

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.390000	42.60	10.0	48	5.5	N	FLO
0.455000	39.70	10.0	47	7.1	N	FLO
0.520000	43.70	10.0	46	2.3	L1	GND
0.595000	41.10	10.0	46	4.9	L1	GND
0.650000	38.60	10.0	46	7.4	L1	FLO
0.715000	38.20	10.0	46	7.8	L1	FLO
4.255000	33.80	10.2	46	12.2	L1	FLO
4.320000	35.10	10.2	46	10.9	N	GND
4.645000	35.50	10.2	46	10.5	N	FLO
4.835000	36.20	10.2	46	9.8	N	GND



Reference: MDE_SVEP_1102_FCCb

acc. Title 47 CFR chapter I part 15 subpart B

3.5.2 15b.2 Spurious Radiated Emissions §15.109

Test: 15b.2; Mode = transmit

Result: Passed

Setup No.: E03_FCC15b

Date of Test: 2011/12/14 14:30

Body: FCC47CFRChIPART15bRADIO FREQUENCY DEVICES


Test Specification: FCC part 2 and 15

Detailed Results:
EMI RADIATED TEST

EUT: (3D060e03) / 14.12.2011
 Manufacturer: SVEP
 Operating Condition: USB traffic
 Test Site: 7 layers, Ratingen
 Operator: Doe
 Test Specification: FCC part 15 b
 Comment: Horizontal EUT position
 Start of Test: 14.12.2011 / 15:17:10

SCAN TABLE: "FCC part 15 b"

Short Description:		FCC part 15 b				
Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	60.0 kHz	MaxPeak	1.0 ms	120 kHz	HL562

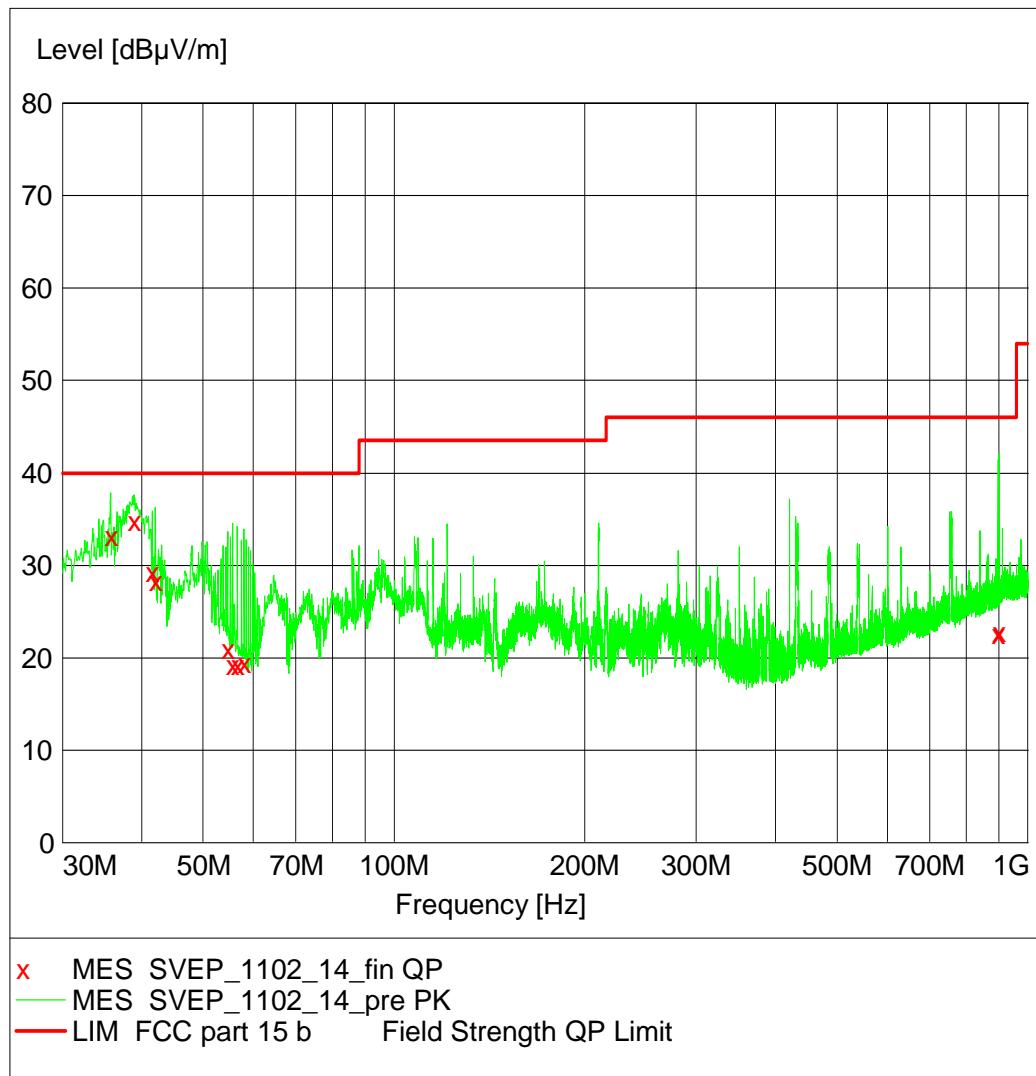



Reference: MDE_SVEP_1102_FCCb

acc. Title 47 CFR chapter I part 15 subpart B

MEASUREMENT RESULT: "SVEP_1102_14_fin_QP"

14.12.2011 16:17

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Height cm	Azimuth deg	Polarisation
35.760000	33.10	17.3	40.0	6.9	100.0	170.00	VERTICAL
38.880000	34.80	15.6	40.0	5.2	100.0	202.00	VERTICAL
41.520000	29.30	14.1	40.0	10.7	100.0	247.00	VERTICAL
42.000000	28.20	13.8	40.0	11.8	101.0	202.00	VERTICAL
54.660000	21.00	5.8	40.0	19.0	100.0	292.00	VERTICAL
55.620000	19.20	5.2	40.0	20.8	120.0	247.00	VERTICAL
56.580000	19.20	4.9	40.0	20.8	165.0	330.00	VERTICAL
58.020000	19.40	4.6	40.0	20.6	174.0	248.00	VERTICAL
897.480000	22.60	24.0	46.0	23.4	265.0	157.00	HORIZONTAL
899.760000	22.80	24.0	46.0	23.2	127.0	202.00	VERTICAL

4 Test Equipment Details

4.1 List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

Test Equipment Anechoic Chamber

Lab ID:	Lab 2
Manufacturer:	Frankonia
Description:	Anechoic Chamber for radiated testing
Type:	10.58x6.38x6 m ³

Single Devices for Anechoic Chamber

Single Device Name	Type	Serial Number	Manufacturer
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m ³ <i>Calibration Details</i>	none	Frankonia <i>Last Execution</i> <i>Next Exec.</i>
	FCC listing 96716 3m Part15/18	2011/01/11	2014/01/10
	IC listing 3699A-1 3m	2011/02/07	2014/02/06
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

Test Equipment Auxiliary Equipment for Conducted emissions

Lab ID:	Lab 1
Manufacturer:	Rohde & Schwarz GmbH & Co.KG
Description:	EMI Conducted Auxiliary Equipment

Single Devices for Auxiliary Equipment for Conducted emissions

Single Device Name	Type	Serial Number	Manufacturer
Cable "LISN to ESI"	RG214 <i>Calibration Details</i>	W18.03+W48.03	Huber&Suhner <i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2011/11/11 2012/11/10
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG
Two-Line V-Network	ESH 3-Z5 <i>Calibration Details</i>	829996/002	Rohde & Schwarz GmbH & Co. KG <i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration		2011/01/20 2013/01/19

Test Equipment Auxiliary Equipment for Radiated emissions
Lab ID:

Description:

Serial Number:

Lab 2

Equipment for emission measurements

see single devices

Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer
Antenna mast	AS 620 P	620/37	HD GmbH
Biconical dipole	VUBA 9117 <i>Calibration Details</i>	9117-108	Schwarzbeck <i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2008/12/27 2013/12/26
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01-2	Kabel Kusch
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02-2+W38.02-2	Rosenberger Micro-Coax
Double-ridged horn	HF 906 <i>Calibration Details</i>	357357/001	Rohde & Schwarz GmbH & Co. KG <i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/04/16 2012/04/15
Double-ridged horn	HF 906 <i>Calibration Details</i>	357357/002	Rohde & Schwarz GmbH & Co. KG <i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/04/28 2012/04/27
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright
Log.-per. Antenna	HL 562 Ultralog <i>Calibration Details</i>	830547/003	Rohde & Schwarz GmbH & Co. KG <i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/05/27 2012/05/26
Loop Antenna	HFH2-Z2 <i>Calibration Details</i>	829324/006	Rohde & Schwarz GmbH & Co. KG <i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/10/27 2014/10/26
Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH
Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5-10kg/024/379070	Maturo GmbH

Test Equipment Auxiliary Test Equipment

Lab ID:	Lab 2
<i>Manufacturer:</i>	see single devices
<i>Description:</i>	Single Devices for various Test Equipment
<i>Type:</i>	various
<i>Serial Number:</i>	none

Single Devices for Auxiliary Test Equipment

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2011/10/19 2013/10/18
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG



Reference: MDE_SVEP_1102_FCCb

acc. Title 47 CFR chapter I part 15 subpart B

Test Equipment Digital Signalling Devices

Lab ID:

Lab 1, Lab 2

Description:

Signalling equipment for various wireless technologies.

Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer
Bluetooth Signalling Unit CBT	CBT	100589	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/11/24 2014/11/23
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/05/26 2013/05/25
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04		2007/07/16
	Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22		
	Firmware: μP1 8v50 02.05.06		

Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/12/07 2014/12/06
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02		2007/01/02
	SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10,		
	Firmware: μP1 8v40 01.12.05		

	SW: K62, K69		2008/11/03

Test Equipment Emission measurement devices

Lab ID: **Lab 1, Lab 2**
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Emission measurement devices

Single Device Name	Type	Serial Number	Manufacturer
Personal Computer	Dell	30304832059	Dell
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	standard calibration		2011/05/12 2014/05/11
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2011/12/05 2013/12/04
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Firmware-Update 4.34.4 from 3.45 during calibration		2009/12/03

Test Equipment Shielded Room 02

Lab ID: **Lab 1**
Manufacturer: Frankonia
Description: Shielded Room for conducted testing
Type: 12 qm
Serial Number: none

4.2 Laboratory Environmental Conditions

Laboratory	Date	Temperature	Humidity	Air Pressure
Lab 1	2011/12/13	23 °C	40 %	1003 hPa
Lab 2	2011/12/14	24 °C	38 %	1005 hPa



Reference: MDE_SVEP_1102_FCCb

acc. Title 47 CFR chapter I part 15 subpart B

5 Annex

5.1 Additional Information for Report

**Test Description**

Conducted emissions (AC power line)

Standard FCC Part 15 Subpart B

The test was performed according to: ANSI C 63.4, 2009

Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2009. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 μ H || 50 Ohm Line Impedance Stabilization Network (LISN) which meets the requirements of ANSI C63.4-2009, Annex B, in the frequency range of the measurements. The LISN's unused connections were terminated with 50 Ohm loads.

The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S.

Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 20 ms
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF - Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

Test Requirements / Limits

If not stated within the measurement plot and/or test result, class B limits are applied.

FCC Part 15, Subpart B, §15.107, Class B Limit

Frequency Range (MHz)	QP Limit (dB μ V)	AV Limit (dB μ V)
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

FCC Part 15, Subpart B, §15.107, Class A Limit

Frequency Range (MHz)	QP Limit (dB μ V)	AV Limit (dB μ V)
0.15 - 0.5	79	66
0.5 - 30	73	60

Used conversion factor: Limit (dB μ V) = 20 log (Limit (μ V)/1 μ V).

NOTES:

A missing result table in the corresponding test report section means, that no final measurement was performed because no relevant frequencies (peaks) were found in the preliminary scan.

The chosen operating mode is selected as representative mode to generate "worst-case" conditions, i.e. high power consumption.

Spurious radiated emissions

Standard FCC Part 15, Subpart B

The test was performed according to: ANSI C 63.4, 2009

Test Description

Measurement below 1 GHz:

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2009.

The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The test was performed at the distance of 3 m between the EUT and the receiving antenna. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. The radiated emissions measurements were made in a typical installation configuration. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is performed at 2 axes. A pre-check is also performed while the EUT is powered from both AC and DC (battery) power in order to find the worst-case operating condition.

Step 1: Preliminary scan (test to identify the highest amplitudes relative to the limit)

Intention of this step is, to determine the radiated EMI-profile of the EUT.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 μ s
- Turntable angle range: -180° to $+180^\circ$
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2:

A further measurement will be performed on the frequencies determined in step 1. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

Settings for step 2:

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180° to $+180^\circ$
- Turntable step size: 45°
- Height variation range: 1 – 4 m

- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by +/- 22.5° around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by +/- 25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100ms
- Turntable angle range: -22.5° to +22.5° around the determined value
- Height variation range: -0.25 m to +0.25 m around the determined value

Step 4: Final measurement (with QP detector)

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak(< 1GHz)
- Measured frequencies: in step 3 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

Measurement above 1 GHz:

The following modifications apply to the measurement procedure for the frequency range above 1 GHz: The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse-linear-distance-squared for the power density measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18–25 GHz) are used, the steps 2-4 as described before, are omitted. Step 1 was performed at one height of the receiving antenna only.

Detector: Peak, Average (simultaneously)

RBW = VBW = 1 MHz; above 7 GHz 100 kHz

Test Requirements / Limits

If not stated within the measurement plot and/or test result, class B limits are applied.

FCC Part 15, Subpart B, §15.109, Radiated Emission Limits

Frequency Range (MHz): Class B Limit (dB μ V/m)

Frequency Range (MHz)	Class B Limit (dB μ V/m)
30 – 88	40.0
88 – 216	43.5
216 – 960	46.0
above 960	54.0

Frequency Range (MHz) Class A Limit (dB μ V/m) / @ 3m !

30 - 88	49.5
88 - 216	54.0
216 - 960	56.9
above 960	60.0


§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dB μ V/m) = 20 log (Limit (μ V/m)/1 μ V/m)


NOTE: A missing result table in the corresponding test report section means, that no final measurement was performed because no relevant frequencies (peaks) were found in the preliminary scan.

Setup Drawings

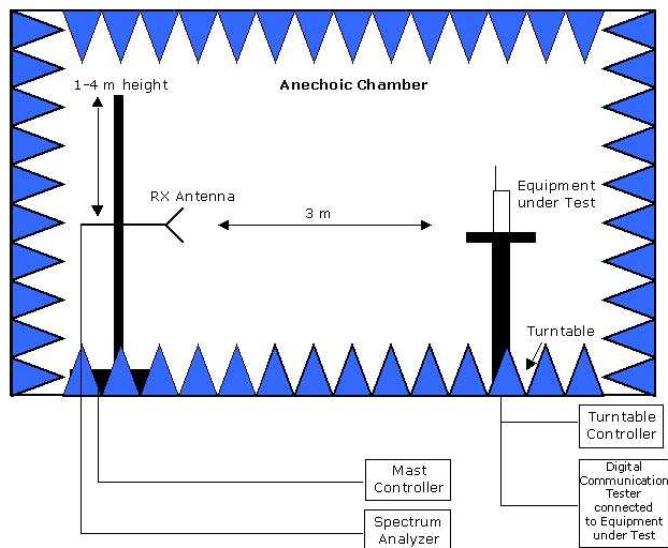

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting ground plane.

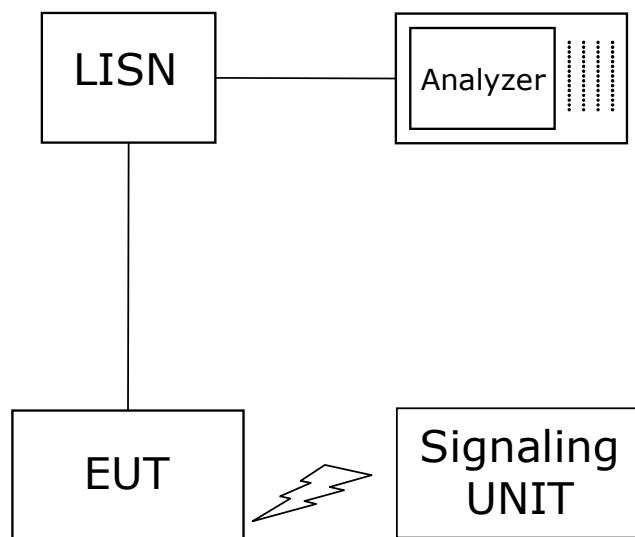

Setup in the shielded room for conducted measurements at AC mains port



6 Index

1	Administrative Data	2
1.1	Project Data	2
1.2	Applicant Data	2
1.3	Test Laboratory Data	2
1.4	Signature of the Testing Responsible	2
1.5	Signature of the Accreditation Responsible	3
2	Test Object Data	3
2.1	General OUT Description	3
2.2	Detailed Description of OUT Samples	4
2.3	OUT Features	4
2.4	Auxiliary Equipment	5
2.5	Setups used for Testing	5
3	Results	5
3.1	General	5
3.2	List of the Applicable Body	5
3.3	List of Test Specification	6
3.4	Summary	7
3.5	Detailed Results	8
3.5.1	15b.1 Conducted Emissions (AC Power Line) §15.107	8
3.5.2	15b.2 Spurious Radiated Emissions §15.109	11
4	Test Equipment Details	14
4.1	List of Used Test Equipment	14
4.2	Laboratory Environmental Conditions	18
5	Annex	19
5.1	Additional Information for Report	19
6	Index	24