


TEST REPORT

Application No.: SZCR2408003197AT
Applicant: Harman International Industries, Inc.
Address of Applicant: 8500 Balboa Boulevard, Northridge, California, 91329, United States
Manufacturer: Harman International Industries, Inc.
Address of Manufacturer: 8500 Balboa Boulevard, Northridge, California, 91329, United States
Equipment Under Test (EUT):
EUT Name: Wireless Multi-Channel Soundbar
Model No.: ENCHANT 1100
Trade Mark: JBL
FCC ID: APIENCHANT1100
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2024-08-16
Date of Test: 2024-09-02 to 2024-10-10
Date of Issue: 2024-10-11

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

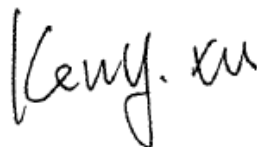

Keny Xu
EMC Laboratory Manager



Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2024-10-11		Original

Authorized for issue by:			
		Benson Wang/Project Engineer	
		Eric Fu/Reviewer	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass
Transmission in the Absence of Data		N/A	47 CFR Part 15, Subpart E 15.407 (c)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)	Pass
Maximum Conducted output power		KDB 789033 D02 II E	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Radiated Emissions (Below 1GHz)		KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions (Above 1GHz)		KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions which fall in the restricted bands		KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Channel Move Time		KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	Pass
Duty Cycle		KDB 789033 II B 1	KDB 789033 D02 II B 1	Pass
99% Bandwidth		KDB 789033 II D	N/A	Pass
26dB Emission bandwidth		KDB 789033 D02 II C 1	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Minimum 6 dB bandwidth (5.725-5.85 GHz band)		KDB 789033 D02 II C 2	47 CFR Part 15, Subpart E 15.407 (e)	Pass
Peak Power spectrum density		KDB 789033 D02 II F	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Frequency Stability		ANSI C63.10 (2013) Section 6.8	47 CFR Part 15, Subpart E 15.407 (g)	Pass
Channel Closing Transmission Time		KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units	6
4.3 Measurement Uncertainty	7
4.4 Test Location	8
4.5 Test Facility.....	8
4.6 Deviation from Standards	8
4.7 Abnormalities from Standard Conditions	8
5 Equipment List	9
6 Radio Spectrum Technical Requirement	11
6.1 Antenna Requirement	11
6.1.1 Test Requirement:	11
6.1.2 Conclusion.....	11
7 Radio Spectrum Matter Test Results	12
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	12
7.1.1 E.U.T. Operation	12
7.1.2 Test Mode Description	12
7.1.3 Test Setup Diagram	13
7.1.4 Measurement Procedure and Data.....	13
7.2 Maximum Conducted output power	16
7.2.1 E.U.T. Operation	16
7.2.2 Test Mode Description	17
7.2.3 Test Setup Diagram	17
7.2.4 Measurement Procedure and Data.....	17
7.3 Radiated Emissions (Below 1GHz).....	19
7.3.1 E.U.T. Operation	19
7.3.2 Test Mode Description	19
7.3.3 Test Setup Diagram	20
7.3.4 Measurement Procedure and Data.....	21
7.4 Radiated Emissions (Above 1GHz).....	24
7.4.1 E.U.T. Operation	24
7.4.2 Test Mode Description	24
7.4.3 Test Setup Diagram	25
7.4.4 Measurement Procedure and Data.....	26
7.5 Radiated Emissions which fall in the restricted bands	145
7.5.1 E.U.T. Operation	145



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.5.2	Test Mode Description	146
7.5.3	Test Setup Diagram	146
7.5.4	Measurement Procedure and Data.....	147
7.6	Channel Move Time	294
7.6.1	E.U.T. Operation	295
7.6.2	Test Setup Diagram	295
7.6.3	Measurement Procedure and Data.....	296
7.7	Duty Cycle	297
7.7.1	E.U.T. Operation	297
7.7.2	Test Mode Description	297
7.7.3	Test Setup Diagram	298
7.7.4	Measurement Procedure and Data.....	298
7.8	99% Bandwidth	299
7.8.1	E.U.T. Operation	299
7.8.2	Test Mode Description	299
7.8.3	Test Setup Diagram	300
7.8.4	Measurement Procedure and Data.....	300
7.9	26dB Emission bandwidth	301
7.9.1	E.U.T. Operation	301
7.9.2	Test Mode Description	301
7.9.3	Test Setup Diagram	302
7.9.4	Measurement Procedure and Data.....	302
7.10	Minimum 6 dB bandwidth (5.725-5.85 GHz band)	303
7.10.1	E.U.T. Operation.....	303
7.10.2	Test Mode Description	303
7.10.3	Test Setup Diagram	303
7.10.4	Measurement Procedure and Data.....	303
7.11	Peak Power spectrum density	304
7.11.1	E.U.T. Operation.....	304
7.11.2	Test Mode Description	304
7.11.3	Test Setup Diagram	305
7.11.4	Measurement Procedure and Data.....	305
7.12	Frequency Stability.....	306
7.12.1	E.U.T. Operation.....	306
7.12.2	Test Mode Description	306
7.12.3	Test Setup Diagram	307
7.12.4	Measurement Procedure and Data.....	307
7.13	Channel Closing Transmission Time	308
7.13.1	E.U.T. Operation.....	309
7.13.2	Test Setup Diagram	309
7.13.3	Measurement Procedure and Data.....	310
8	Test Setup Photo	311
9	EUT Constructional Details (EUT Photos).....	311
10	Appendix.....	312



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply:	AC 100-240V, 50/60Hz
Cable(s):	HDMI cable:118cm shielded (Two magnetic rings) AC cable:142cm
Operation Frequency/Number of channels (20MHz):	U-NII-1: 5180-5240MHz (4 Channels); U-NII-2A: 5260-5320MHz (4 Channels); U-NII-2C: 5500-5700MHz (11 Channels); U-NII-3: 5745-5825MHz (5 Channels)
Operation Frequency/Number of channels/(40MHz):	U-NII-1: 5190-5230MHz (2 Channels); U-NII-2A: 5270-5310MHz (2 Channels); U-NII-2C: 5510-5670MHz (5 Channels); U-NII-3: 5755-5795MHz (2 Channels)
Operation Frequency/Number of channels (80MHz):	U-NII-1: 5210MHz (1 Channel); U-NII-2A: 5290MHz (1 Channels); U-NII-2C: 5530-5610MHz (2 Channels); U-NII-3: 5775MHz (1 Channel)
Modulation Type:	802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK); 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM); 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM); 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
Channel Spacing:	802.11a/n(HT20)/ac(VHT20)/ax(HEW20): 20MHz; 802.11n(HT40)/ac(VHT40)/ax(HEW40): 40MHz; 802.11ac(VHT80)/ax(HEW80): 80MHz;
DFS Function:	Slave without Radar detection
TPC Function:	Support TPC function
Antenna Type:	FPC Antenna
Antenna Gain:	Antenna 1:2.76dBi Antenna 2:2.81dBi Two antennas can transmit simultaneously
Cable loss of RF cable:	0.5dB

Remark:The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
--	--	--	--
The EUT has been tested as an independent unit.			



4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	± 3.1dB
Maximum Conducted output power	± 0.75dB
Radiated Emissions (Below 1GHz)	± 6.0dB for 3m; ± 5.0dB for 10m
Radiated Emissions (Above 1GHz)	± 4.6dB (1-18GHz); ± 4.8dB (18-40GHz)
Radiated Emissions which fall in the restricted bands	± 6.0dB (below 1GHz); ± 4.6dB (above 1GHz);
Duty Cycle	± 0.37%
99% Bandwidth	± 3%
26dB Emission bandwidth	± 3%
Minimum 6 dB bandwidth (5.725-5.85 GHz band)	± 3%
Peak Power spectrum density	± 2.84dB
Frequency Stability	± 7.25 x 10-8

Remark:

The U_{lab} (lab Uncertainty) is less than U_{CISPR/ETSI} (CISPR/ETSI Uncertainty), so the test results
 – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
 – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI (Member No. 1937)

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC –Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

• Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2022-05-14	2025-05-13
EMI Test Receiver	Rohde&Schwarz	ESCI	SEM004-02	2024-03-14	2025-03-13
Matching Pad	N/A	N/A	SEM021-23	2024-03-20	2025-03-19
Matching Pad	N/A	N/A	SEM021-24	2024-03-20	2025-03-19
Measurement Software	AUDIX	e3 V8.2014-6-27a	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2024-07-06	2025-07-05
LISN	Rohde&Schwarz	ENV216	SEM007-01	2024-08-15	2025-08-14
LISN	ETS-LINDGREN	3816/2	SEM007-02	2024-03-14	2025-03-13

Radiated Emissions (Below 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2024-03-26	2025-03-25
MXE EMI receiver	KEYSIGHT	N9038A	SEM004-16	2024-08-14	2025-08-13
Trilog-Broadband Antenna	Schwarzbeck	VULB9168	SEM003-18	2023-09-23	2025-09-22
Pre-amplifier	Sonoma Instrument Co	310N	SEM005-04	2024-03-27	2025-03-26
Loop Antenna	ETS-Lindgren	6502	SEM003-08	2023-11-20	2025-11-19
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM029-01	2024-07-06	2025-07-05

Radiated Emissions (Above 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
3m Fully-Anechoic Chamber	AUDIX	N/A	SEM001-02	2024-05-11	2027-05-10
Signal Analyzer	Rohde & Schwarz	FSV40	SEM008-04	2024-03-15	2025-03-14
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2023-07-23	2025-07-22
Microwave system amplifier	Agilent	83017A	SEM005-25	2024-09-14	2025-09-13
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2024-07-06	2025-07-05
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	SEM003-15	2024-08-10	2025-08-09



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR240800319705

Page: 10 of 649

Pre-Amplifier	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2024-03-15	2025-03-14
---------------	------------------------------------	-------------	-----------	------------	------------

RF Conducted Test & DFS

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2024-08-14	2025-08-13
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2024-03-14	2025-03-13
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2023-09-19 2024-09-18	2024-09-18 2025-09-17
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2024-07-06	2025-07-05
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2024-03-27	2025-03-26
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2024-03-19	2025-03-18
Manual Step Attenuator	KEYSIGHT	8494B	SEM021-05	2024-03-27	2025-03-26
Manual Step Attenuator	KEYSIGHT	8496B	SEM021-06	2024-03-27	2025-03-26
Measurement Software	KEYSIGHT	Signal Studio for DFS Radar Profiles V2.2.0.0	N/A	N/A	N/A
Measurement Software	Agilent	ISMonitor10	N/A	N/A	N/A
MXG Vector Signal Generator	Agilent	N5182A	SEM006-21	2024-03-27	2025-03-26
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-22	2024-03-14	2025-03-13

General used equipment

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	deli	8838	SEM002-32	2024-07-24	2025-07-23
Humidity/ Temperature Indicator	deli	8838	SEM002-33	2024-07-24	2025-07-23
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2024-03-18	2025-03-17



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna are: Antenna 1:2.76dBi Antenna 2:2.81dBi

Antenna location: Refer to internal photo.



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

7.1.1 E.U.T. Operation

Operating Environment:


Temperature: 23.5 °C Humidity: 45.5 % RH Atmospheric Pressure: 1020 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Pre-scan	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Pre-scan	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Pre-scan	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.



7.1.3 Test Setup Diagram

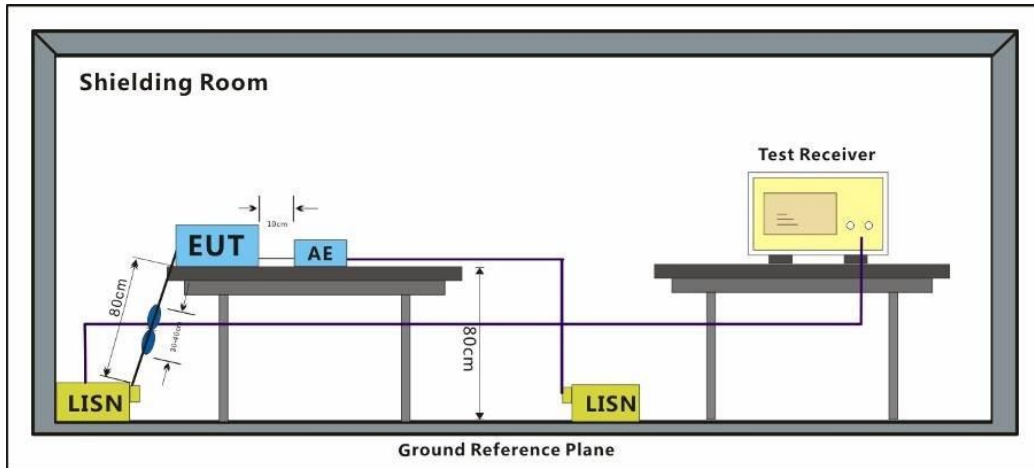


7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor



Test Mode: 05; Line: Live line

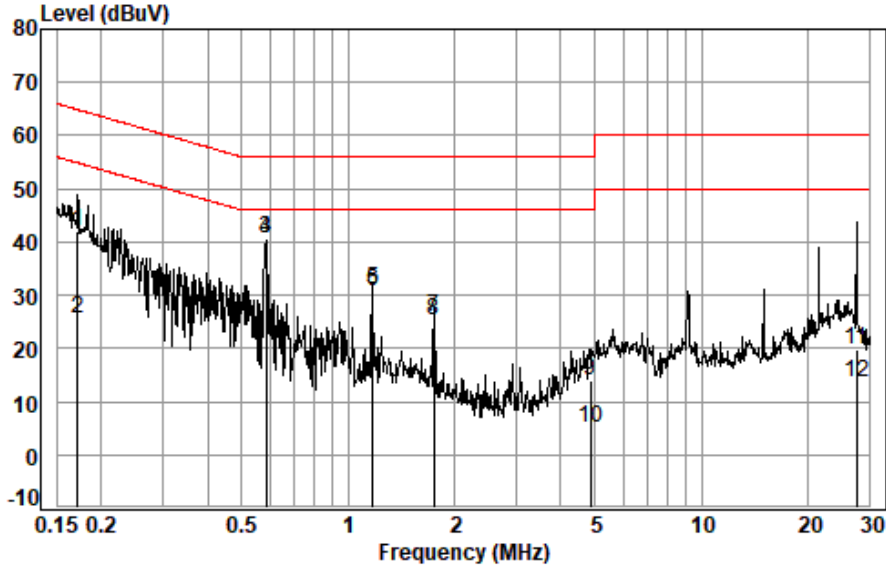


Site : Shielding Room
 Condition: Line
 Job No. : 03197AT
 Test mode: 05

	Freq	Cable Loss	LISN Factor	Read Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dB	
1	0.1712	0.06	9.90	32.21	42.17	64.90	-22.73 QP
2	0.1712	0.06	9.90	15.65	25.61	54.90	-29.29 Average
3 *	0.5854	0.08	9.98	30.48	40.54	56.00	-15.46 QP
4 *	0.5854	0.08	9.98	30.43	40.49	46.00	-5.51 Average
5	1.1719	0.09	10.02	21.09	31.20	56.00	-24.80 QP
6	1.1719	0.09	10.02	20.77	30.88	46.00	-15.12 Average
7	1.7529	0.10	10.01	15.74	25.85	46.00	-30.15 QP
8	1.7529	0.10	10.01	15.20	25.31	46.00	-20.69 Average
9	4.8480	0.12	10.04	3.73	13.89	56.00	-42.11 QP
10	4.8480	0.12	10.04	-5.09	5.07	46.00	-40.93 Average
11	27.5616	0.36	10.33	8.96	19.65	60.00	-40.35 QP
12	27.5616	0.36	10.33	2.97	13.66	50.00	-36.34 Average



Test Mode: 05; Line: Neutral Line

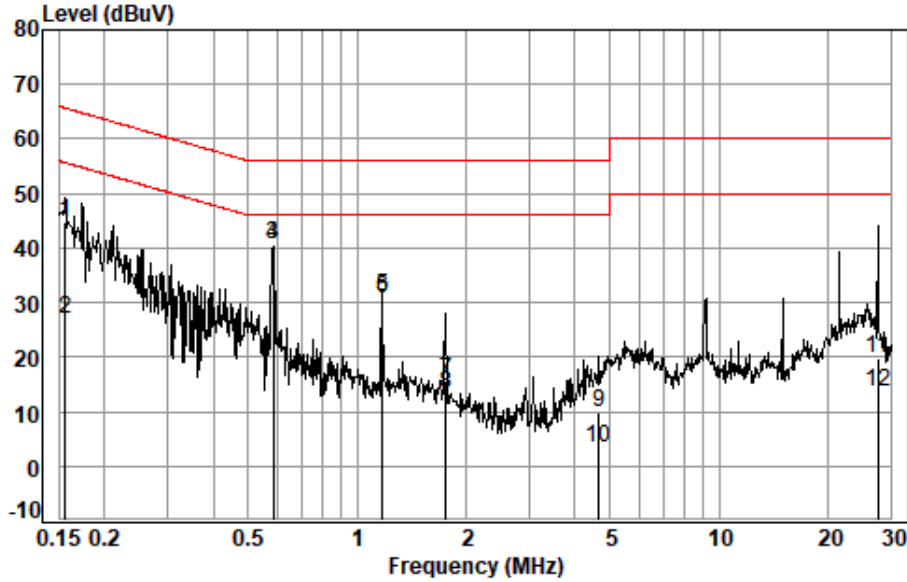

Site : Shielding Room
 Condition: Neutral
 Job No. : 03197AT
 Test mode: 05

	Freq	Cable Loss	LISN Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1565	0.06	9.89	34.76	44.71	65.65	-20.94	QP
2	0.1565	0.06	9.89	17.15	27.10	55.65	-28.55	Average
3 *	0.5854	0.08	9.97	30.47	40.52	56.00	-15.48	QP
4 *	0.5854	0.08	9.97	30.43	40.48	46.00	-5.52	Average
5	1.1719	0.09	9.99	21.01	31.09	56.00	-24.91	QP
6	1.1719	0.09	9.99	20.76	30.84	46.00	-15.16	Average
7	1.7623	0.10	9.96	5.52	15.58	56.00	-40.42	QP
8	1.7623	0.10	9.96	3.24	13.30	46.00	-32.70	Average
9	4.6715	0.12	10.00	-0.14	9.98	56.00	-46.02	QP
10	4.6715	0.12	10.00	-6.80	3.32	46.00	-42.68	Average
11	27.5616	0.36	10.42	9.05	19.83	60.00	-40.17	QP
12	27.5616	0.36	10.42	2.90	13.68	50.00	-36.32	Average



7.2 Maximum Conducted output power

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: KDB 789033 D02 II E

Limit:

Frequency band(MHz)	Limit
5150-5250	≤1W(30dBm) for master device
	≤250mW(24dBm) for client device
5250-5350	≤250mW(24dBm) or 11dBm+10logB*
5470-5725	≤250mW(24dBm) or 11dBm+10logB*
5725-5850	≤1W(30dBm)
Remark:	* Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 24.6 °C Humidity: 42.6 % RH Atmospheric Pressure: 1020 mbar




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

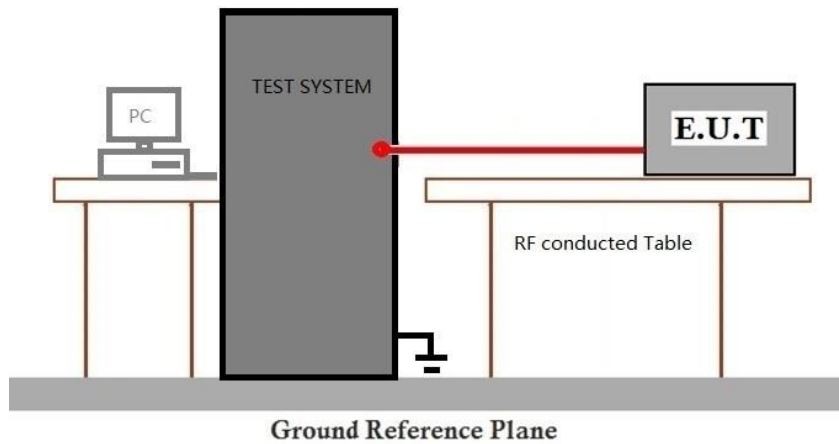

7.2.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR240800319705

Page: 18 of 649

Please Refer to Appendix for Details



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.3 Radiated Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: KDB 789033 D02 II G

Measurement Distance: 10m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23.6 °C Humidity: 50.9 % RH Atmospheric Pressure: 1020 mbar

7.3.2 Test Mode Description


Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Pre-scan	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Pre-scan	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Pre-scan	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

		is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
--	--	--

7.3.3 Test Setup Diagram

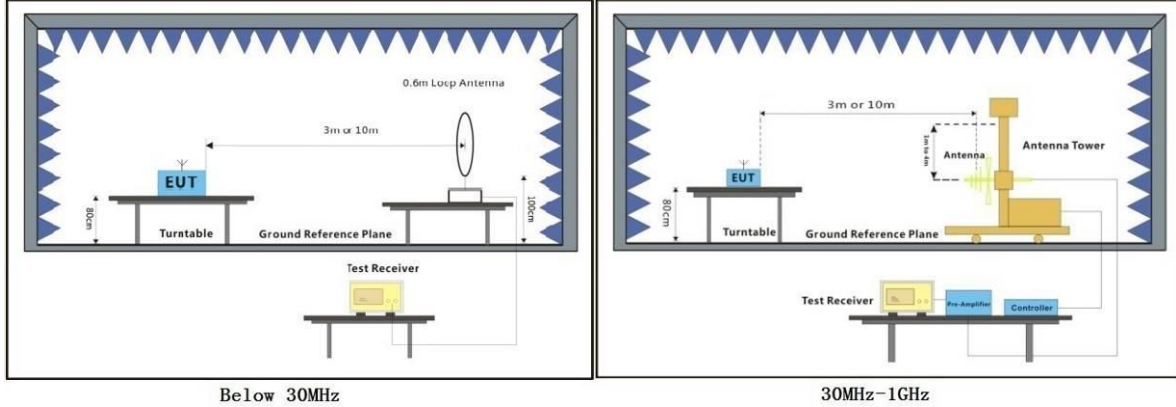

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.3.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:


- 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
- 2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11a. Only the worst case is recorded in the report.
- 3. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 4. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 05; Polarity: Horizontal

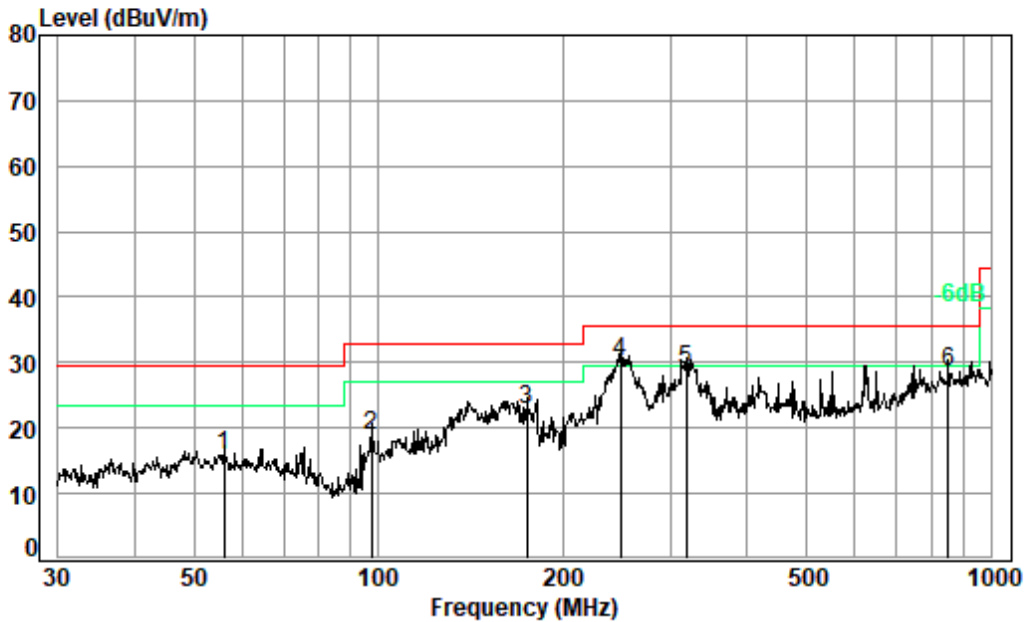


Condition: 10m HORIZONTAL
 Job No. : 03196AT/03197AT
 Test Mode: 05

	Read Freq	Ant Level	Ant Factor	Cable Loss	Preamp Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	56.001	29.94	17.80	0.50	32.48	15.76	29.50	-13.74	QP
2	97.456	37.75	12.78	0.75	32.40	18.88	33.00	-14.12	QP
3	175.037	37.86	16.56	0.91	32.40	22.93	33.00	-10.07	QP
4 pp	248.552	45.51	15.89	1.10	32.35	30.15	35.60	-5.45	QP
5	317.701	41.90	18.03	1.30	32.30	28.93	35.60	-6.67	QP
6	851.035	31.32	26.88	2.09	31.68	28.61	35.60	-6.99	QP



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 05; Polarity: Vertical

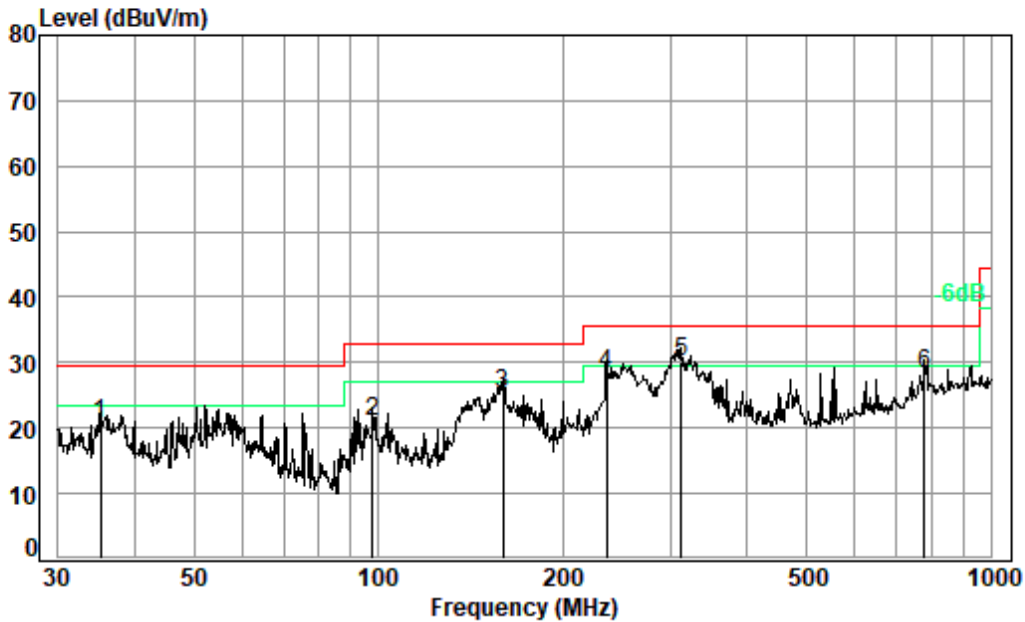

Condition: 10m VERTICAL
 Job No. : 03196AT/03197AT
 Test Mode: 05

	Read Freq	Ant Level	Ant Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	35.251	36.10	16.57	0.40	32.50	20.57	29.50	-8.93	QP
2	97.798	39.73	12.84	0.77	32.40	20.94	33.00	-12.06	QP
3	159.784	38.95	17.79	0.95	32.40	25.29	33.00	-7.71	QP
4	235.816	44.31	15.32	1.10	32.36	28.37	35.60	-7.23	QP
5 pp	312.179	43.38	17.83	1.30	32.30	30.21	35.60	-5.39	QP
6	779.607	31.81	26.46	2.05	32.06	28.26	35.60	-7.34	QP



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.4 Radiated Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: KDB 789033 D02 II G

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1GHz	500	3
<p>*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</p> <p>(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</p> <p>(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</p> <p>(4) For transmitters operating in the 5.725-5.85 GHz band:</p> <p>(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.</p> <p>Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.</p>		

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 22.9 °C Humidity: 67.4 % RH Atmospheric Pressure: 1020 mbar

7.4.2 Test Mode Description


Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

		found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

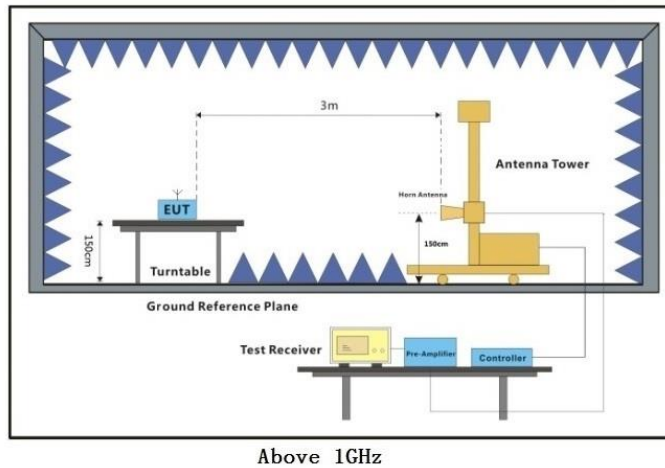

7.4.4 Measurement Procedure and Data


- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
5. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.



Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

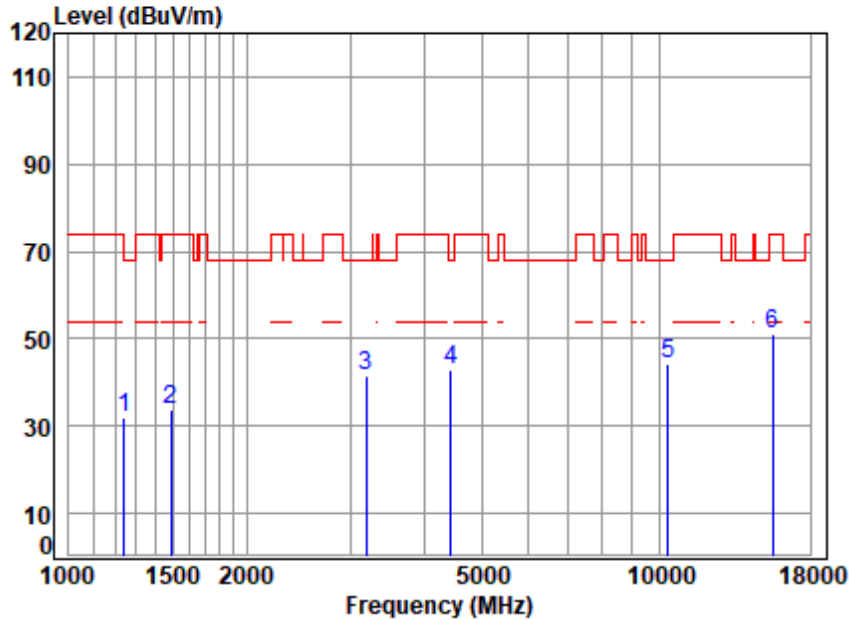


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5180 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.74	24.99	61.57	64.96	32.12	68.20	-36.08	peak
2	1490.142	4.03	26.52	61.65	64.99	33.89	74.00	-40.11	peak
3	3186.869	6.25	32.79	61.37	63.86	41.53	68.20	-26.67	peak
4	4443.453	7.19	34.28	61.58	62.82	42.71	68.20	-25.49	peak
5	10360.000	11.14	37.10	62.35	58.38	44.27	68.20	-23.93	peak
6	p15540.000	13.79	41.10	62.88	59.08	51.09	74.00	-22.91	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

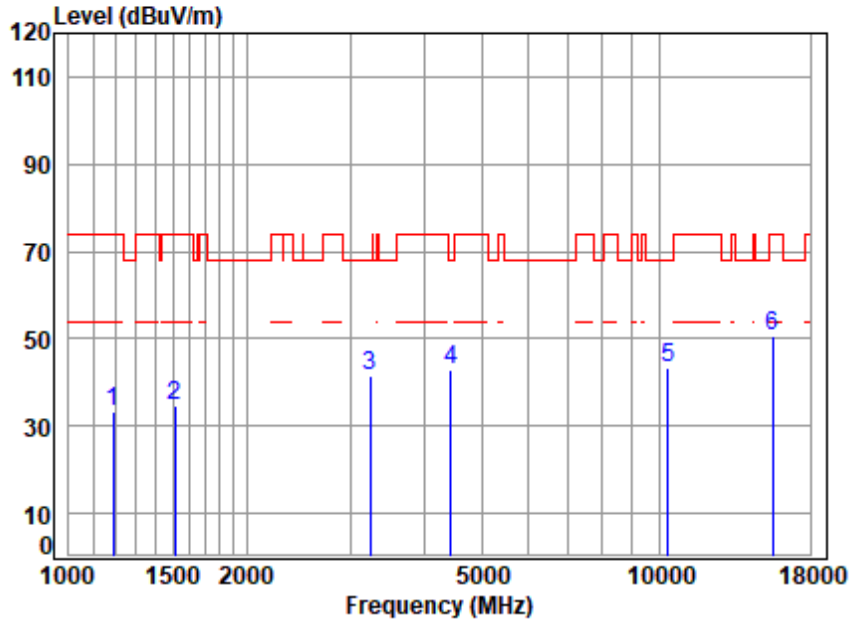


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5180 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1189.368	3.67	24.29	61.55	66.90	33.31	74.00	-40.69	peak
2	1511.833	4.06	26.85	61.66	65.48	34.73	74.00	-39.27	peak
3	3233.260	6.29	32.37	61.35	64.22	41.53	68.20	-26.67	peak
4	4430.628	7.17	34.43	61.57	62.64	42.67	68.20	-25.53	peak
5	10360.000	11.14	37.10	62.35	57.66	43.55	68.20	-24.65	peak
6	p15540.000	13.79	41.10	62.88	58.70	50.71	74.00	-23.29	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

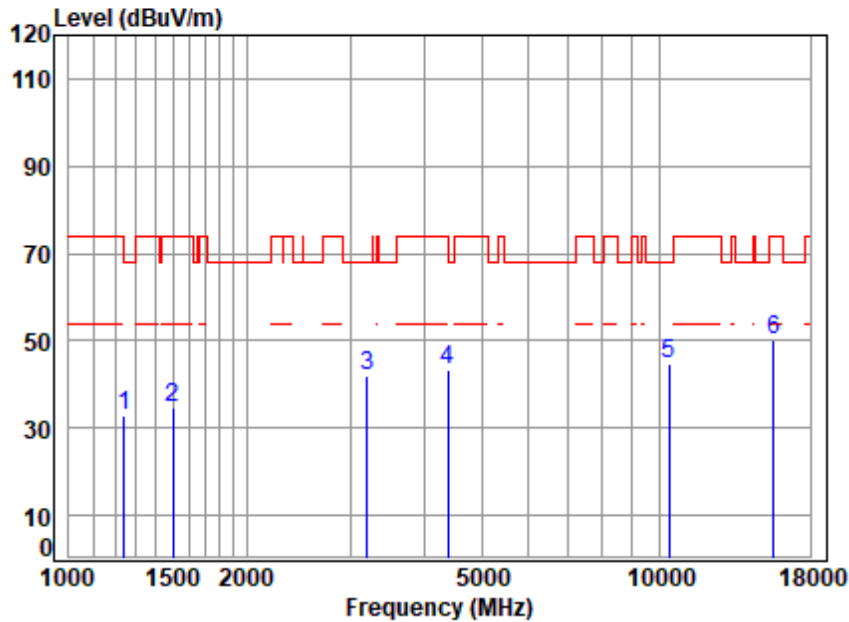


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5200 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.74	24.99	61.57	65.63	32.79	68.20	-35.41	peak
2	1498.781	4.04	26.77	61.66	65.43	34.58	74.00	-39.42	peak
3	3205.345	6.26	32.81	61.36	64.05	41.76	68.20	-26.44	peak
4	4379.699	7.11	34.64	61.52	62.97	43.20	74.00	-30.80	peak
5	10400.000	11.20	37.10	62.36	58.73	44.67	68.20	-23.53	peak
6	15600.000	13.86	41.10	62.89	58.28	50.35	74.00	-23.65	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

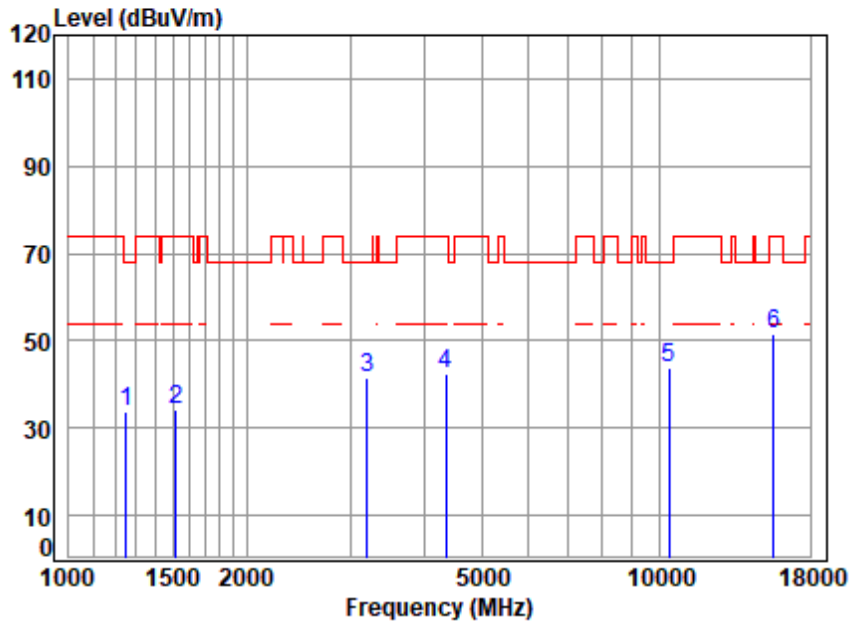

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5200 TX RSE
 Note : 5G WIFI 11A


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	3.75	25.08	61.57	66.47	33.73	68.20	-34.47	peak
2	1516.210	4.06	26.86	61.66	64.90	34.16	74.00	-39.84	peak
3	3205.345	6.26	32.81	61.36	63.83	41.54	68.20	-26.66	peak
4	4354.454	7.08	34.44	61.50	62.50	42.52	74.00	-31.48	peak
5	10400.000	11.20	37.10	62.36	57.73	43.67	68.20	-24.53	peak
6	p15600.000	13.86	41.10	62.89	59.31	51.38	74.00	-22.62	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

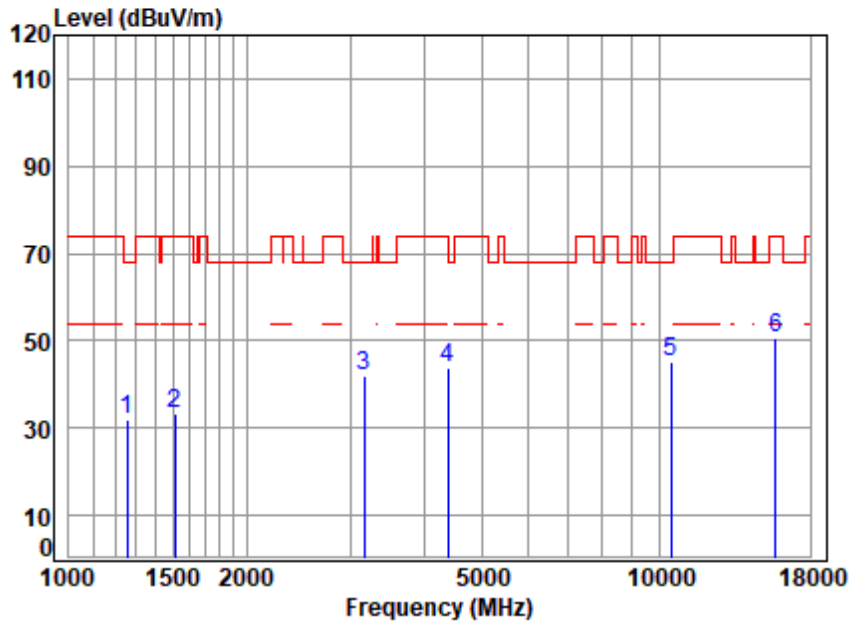


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5240 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	3.76	25.06	61.58	64.71	31.95	68.20	-36.25	peak
2	1511.833	4.06	26.85	61.66	64.23	33.48	74.00	-40.52	peak
3	3159.355	6.22	32.57	61.38	64.50	41.91	68.20	-26.29	peak
4	4392.376	7.13	34.74	61.53	63.41	43.75	74.00	-30.25	peak
5	10480.000	11.33	37.26	62.38	58.81	45.02	68.20	-23.18	peak
6	15720.000	14.01	41.22	62.91	58.11	50.43	74.00	-23.57	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

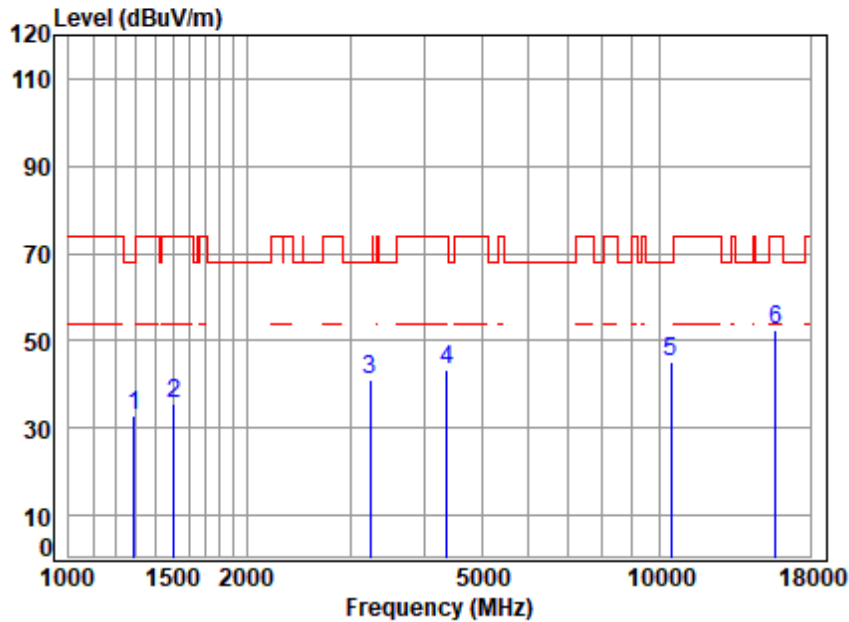


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5240 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.80	24.86	61.59	65.98	33.05	68.20	-35.15	peak
2	1507.470	4.05	26.83	61.66	66.44	35.66	74.00	-38.34	peak
3	3233.260	6.29	32.37	61.35	63.87	41.18	68.20	-27.02	peak
4	4367.058	7.10	34.54	61.51	63.09	43.22	74.00	-30.78	peak
5	10480.000	11.33	37.26	62.38	58.84	45.05	68.20	-23.15	peak
6	p15720.000	14.01	41.22	62.91	59.96	52.28	74.00	-21.72	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

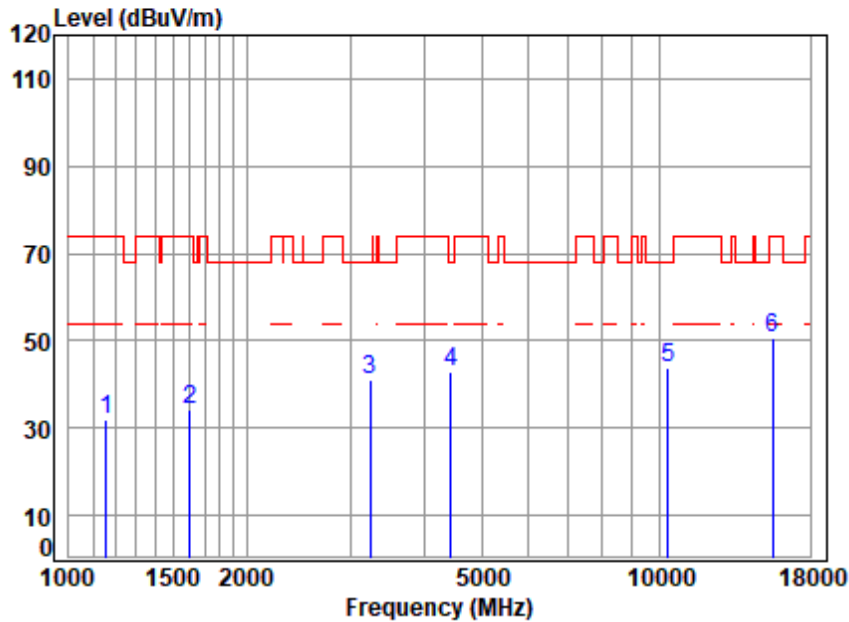

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5180 TX RSE
 Note : 5G WIFI 11N20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1155.483	3.62	23.95	61.54	65.70	31.73	74.00	-42.27	peak
2	1601.804	4.19	26.78	61.69	65.03	34.31	74.00	-39.69	peak
3	3233.260	6.29	32.37	61.35	63.72	41.03	68.20	-27.17	peak
4	4430.628	7.17	34.43	61.57	63.09	43.12	68.20	-25.08	peak
5	10360.000	11.14	37.10	62.35	57.78	43.67	68.20	-24.53	peak
6	p15540.000	13.79	41.10	62.88	58.82	50.83	74.00	-23.17	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

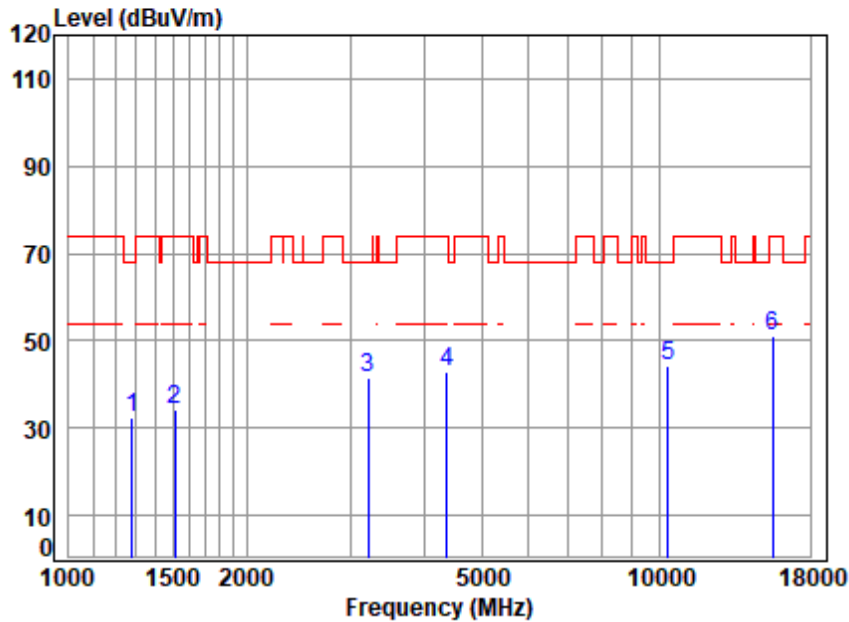


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5180 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.79	24.91	61.58	65.17	32.29	68.20	-35.91	peak
2	1511.833	4.06	26.85	61.66	65.06	34.31	74.00	-39.69	peak
3	3214.623	6.27	32.67	61.36	64.02	41.60	68.20	-26.60	peak
4	4367.058	7.10	34.54	61.51	62.88	43.01	74.00	-30.99	peak
5	10360.000	11.14	37.10	62.35	58.48	44.37	68.20	-23.83	peak
6	p15540.000	13.79	41.10	62.88	58.90	50.91	74.00	-23.09	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

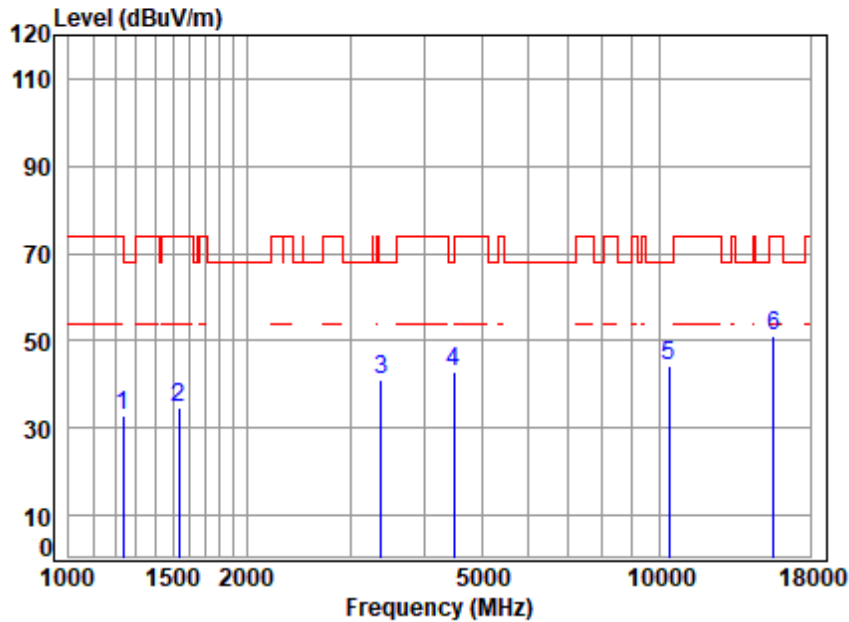


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5200 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.73	24.94	61.57	65.95	33.05	74.00	-40.95	peak
2	1538.281	4.10	26.95	61.67	65.20	34.58	74.00	-39.42	peak
3	3376.523	6.42	32.26	61.32	63.71	41.07	68.20	-27.13	peak
4	4482.150	7.23	33.81	61.61	63.61	43.04	68.20	-25.16	peak
5	10400.000	11.20	37.10	62.36	58.34	44.28	68.20	-23.92	peak
6	p15600.000	13.86	41.10	62.89	59.25	51.32	74.00	-22.68	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

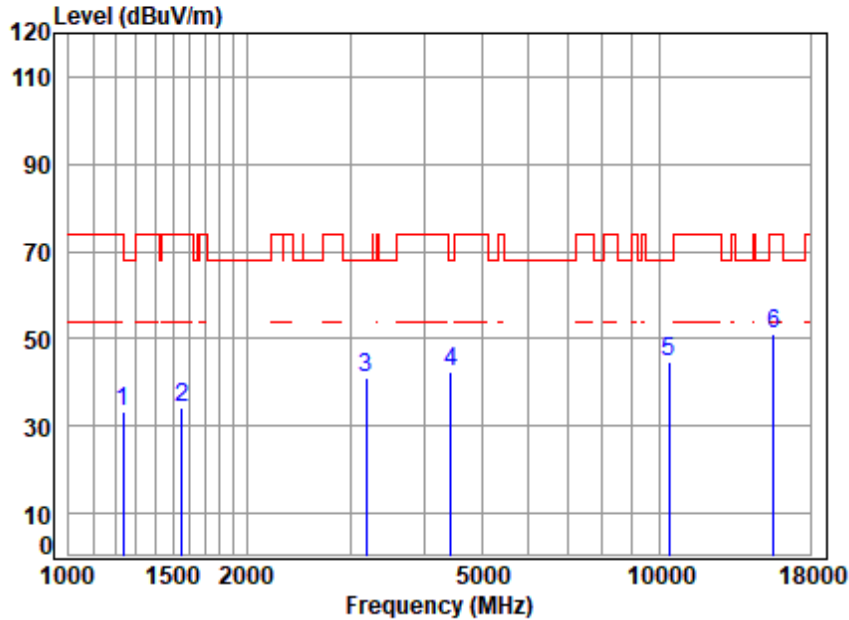


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5200 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1234.909	3.73	24.89	61.57	66.35	33.40	74.00	-40.60	peak
2	1556.169	4.12	26.98	61.67	64.62	34.05	74.00	-39.95	peak
3	3186.869	6.25	32.79	61.37	63.62	41.29	68.20	-26.91	peak
4	4443.453	7.19	34.28	61.58	62.60	42.49	68.20	-25.71	peak
5	10400.000	11.20	37.10	62.36	58.55	44.49	68.20	-23.71	peak
6	p15600.000	13.86	41.10	62.89	58.84	50.91	74.00	-23.09	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

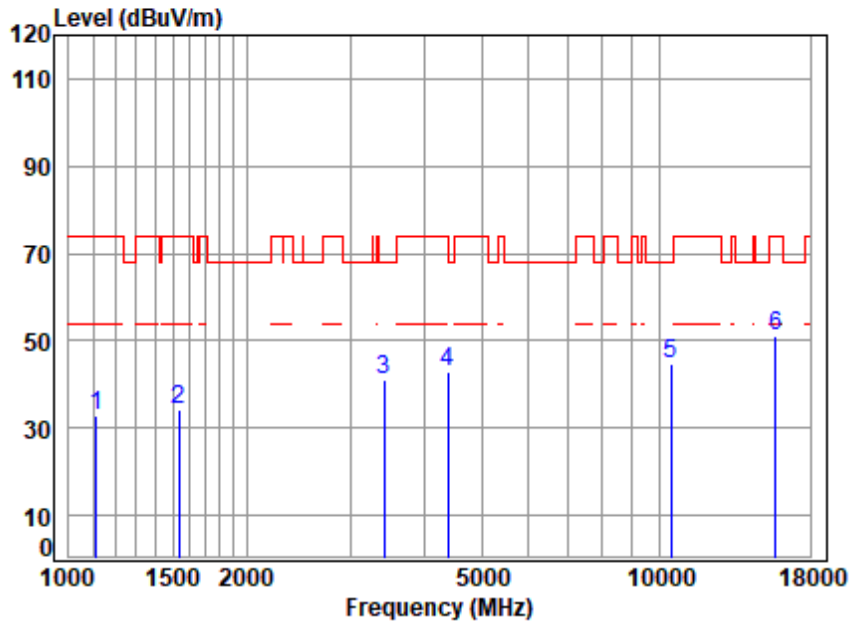


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5240 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1112.872	3.56	23.75	61.52	67.18	32.97	74.00	-41.03	peak
2	1533.841	4.09	26.94	61.67	64.76	34.12	74.00	-39.88	peak
3	3425.675	6.46	32.09	61.30	64.03	41.28	68.20	-26.92	peak
4	4379.699	7.11	34.64	61.52	62.48	42.71	74.00	-31.29	peak
5	10480.000	11.33	37.26	62.38	58.62	44.83	68.20	-23.37	peak
6	p15720.000	14.01	41.22	62.91	58.79	51.11	74.00	-22.89	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

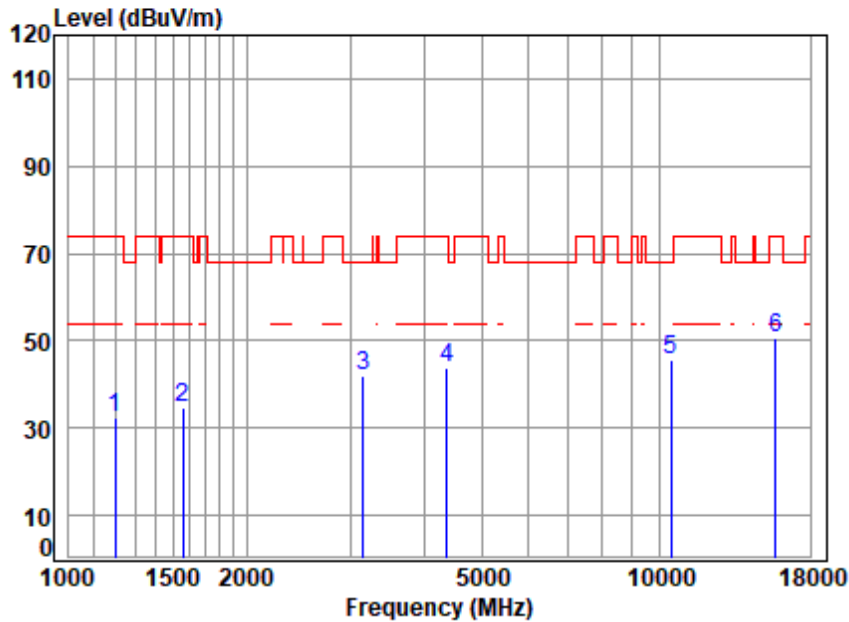


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5240 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	3.68	24.36	61.55	65.77	32.26	74.00	-41.74	peak
2	1560.673	4.13	26.96	61.68	65.09	34.50	74.00	-39.50	peak
3	3150.237	6.21	32.50	61.38	64.74	42.07	68.20	-26.13	peak
4	4367.058	7.10	34.54	61.51	63.87	44.00	74.00	-30.00	peak
5	10480.000	11.33	37.26	62.38	59.40	45.61	68.20	-22.59	peak
6	15720.000	14.01	41.22	62.91	58.53	50.85	74.00	-23.15	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

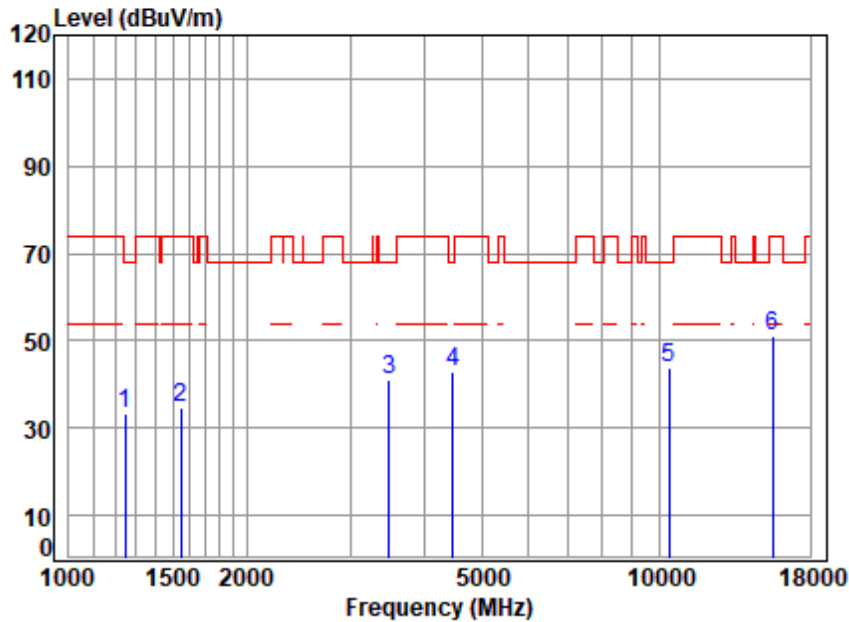


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5190 TX RSE
 Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.74	25.04	61.57	66.20	33.41	68.20	-34.79	peak
2	1547.199	4.11	26.99	61.67	65.17	34.60	74.00	-39.40	peak
3	3485.601	6.51	31.66	61.29	64.22	41.10	68.20	-27.10	peak
4	4469.214	7.22	33.97	61.60	63.29	42.88	68.20	-25.32	peak
5	10380.000	11.17	37.10	62.36	57.98	43.89	68.20	-24.31	peak
6	p15570.000	13.83	41.10	62.89	59.08	51.12	74.00	-22.88	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

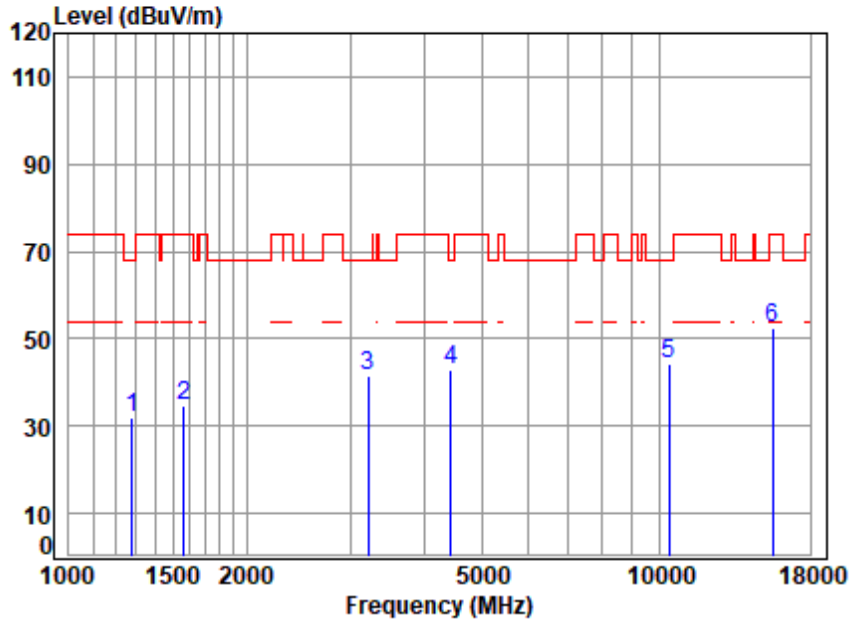


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5190 TX RSE
 Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1278.492	3.78	24.93	61.58	64.99	32.12	68.20	-36.08	peak
2	1565.191	4.14	26.94	61.68	65.11	34.51	74.00	-39.49	peak
3	3214.623	6.27	32.67	61.36	64.14	41.72	68.20	-26.48	peak
4	4443.453	7.19	34.28	61.58	63.15	43.04	68.20	-25.16	peak
5	10380.000	11.17	37.10	62.36	58.43	44.34	68.20	-23.86	peak
6	p15570.000	13.83	41.10	62.89	60.22	52.26	74.00	-21.74	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

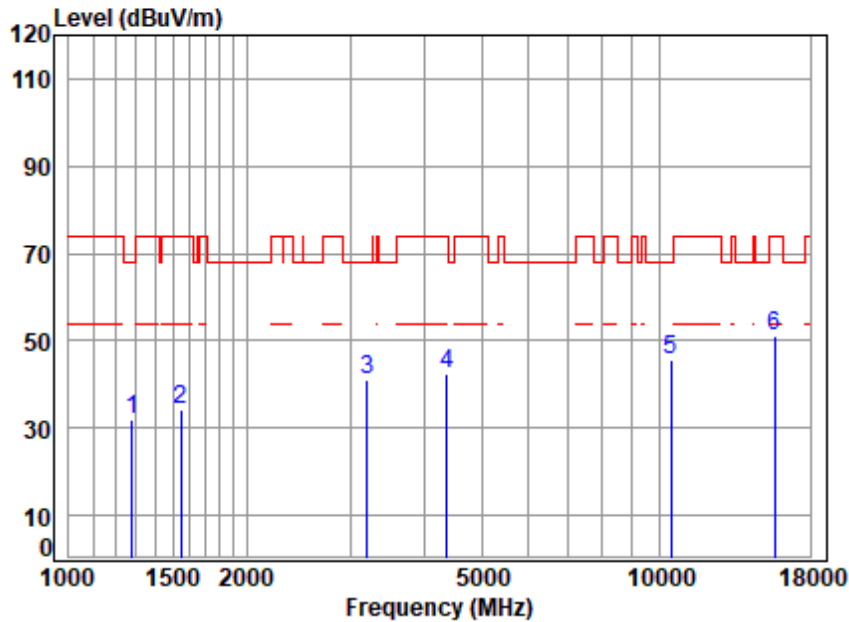

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5230 TX RSE
 Note : 5G WIFI 11N40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.79	24.91	61.58	64.91	32.03	68.20	-36.17	peak
2	1547.199	4.11	26.99	61.67	64.84	34.27	74.00	-39.73	peak
3	3205.345	6.26	32.81	61.36	63.31	41.02	68.20	-27.18	peak
4	4367.058	7.10	34.54	61.51	62.47	42.60	74.00	-31.40	peak
5	10460.000	11.30	37.22	62.38	59.48	45.62	68.20	-22.58	peak
6	15690.000	13.97	41.19	62.91	59.02	51.27	74.00	-22.73	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

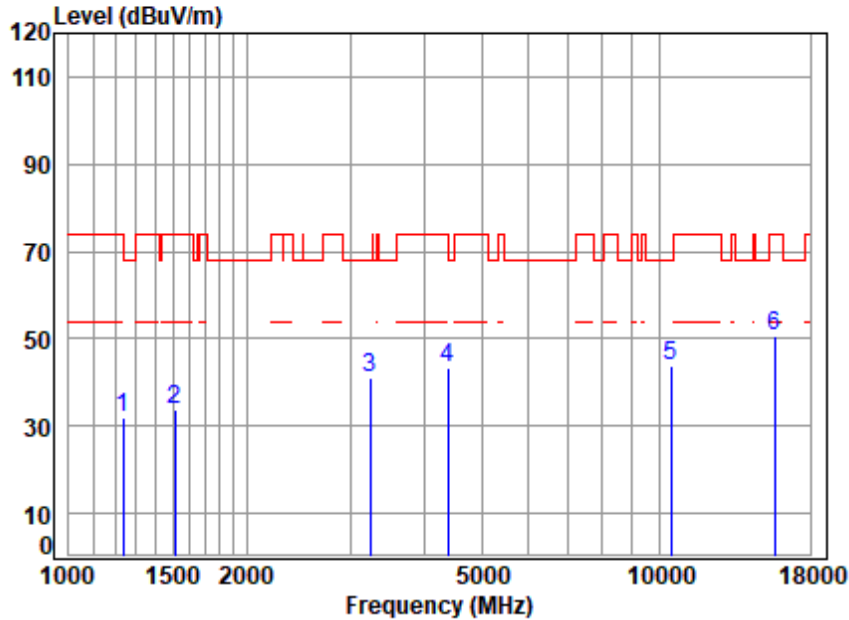

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5230 TX RSE
 Note : 5G WIFI 11N40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.73	24.94	61.57	64.75	31.85	74.00	-42.15	peak
2	1511.833	4.06	26.85	61.66	64.53	33.78	74.00	-40.22	peak
3	3242.619	6.30	32.22	61.35	63.78	40.95	68.20	-27.25	peak
4	4379.699	7.11	34.64	61.52	63.09	43.32	74.00	-30.68	peak
5	10460.000	11.30	37.22	62.38	57.75	43.89	68.20	-24.31	peak
6	p15690.000	13.97	41.19	62.91	58.53	50.78	74.00	-23.22	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

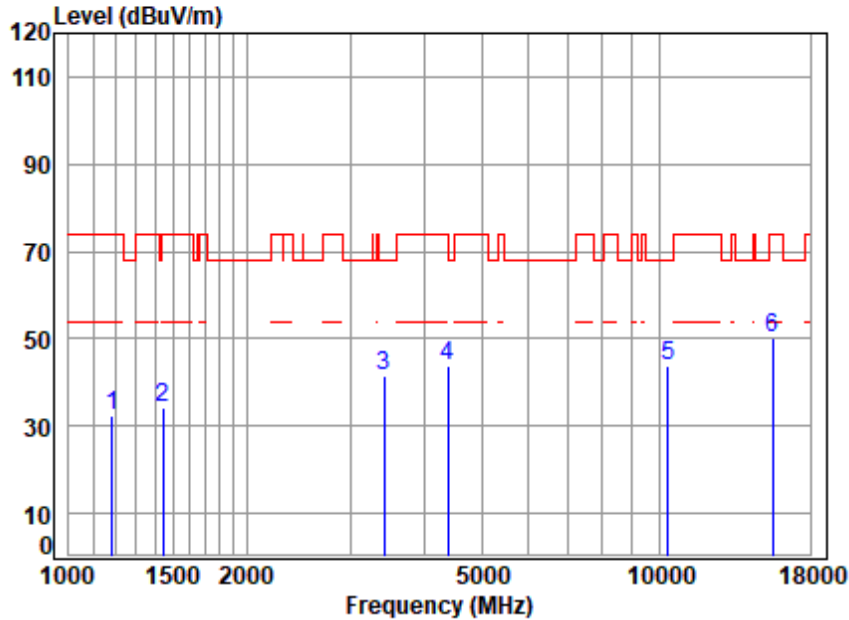


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5180 TX RSE
 Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1185.936	3.66	24.26	61.55	66.10	32.47	74.00	-41.53	peak
2	1443.509	3.98	25.30	61.64	66.42	34.06	74.00	-39.94	peak
3	3425.675	6.46	32.09	61.30	64.07	41.32	68.20	-26.88	peak
4	4392.376	7.13	34.74	61.53	63.66	44.00	74.00	-30.00	peak
5	10360.000	11.14	37.10	62.35	58.05	43.94	68.20	-24.26	peak
6	p15540.000	13.79	41.10	62.88	58.02	50.03	74.00	-23.97	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

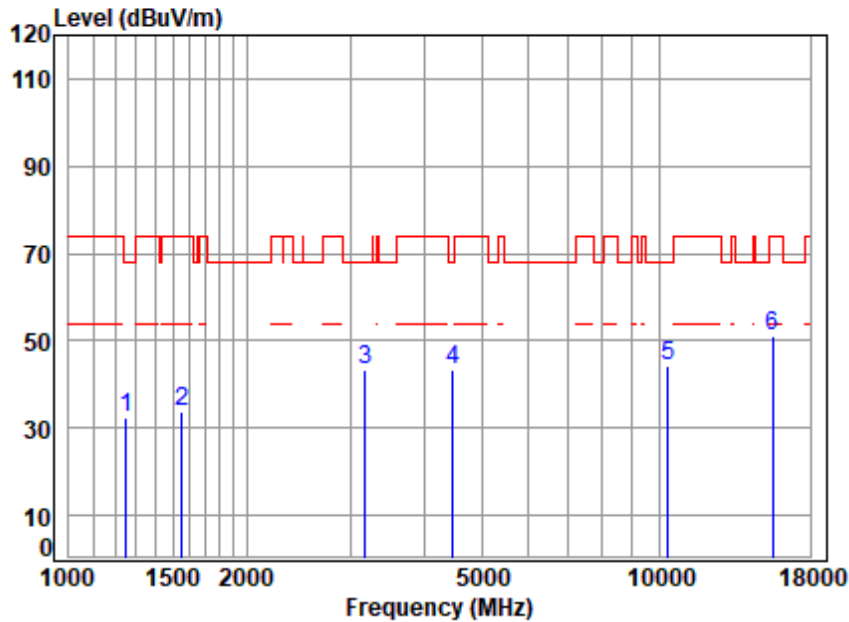


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5180 TX RSE
 Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.75	25.09	61.57	65.29	32.56	68.20	-35.64	peak
2	1556.169	4.12	26.98	61.67	64.17	33.60	74.00	-40.40	peak
3	3177.672	6.24	32.72	61.37	65.73	43.32	68.20	-24.88	peak
4	4469.214	7.22	33.97	61.60	63.74	43.33	68.20	-24.87	peak
5	10360.000	11.14	37.10	62.35	58.25	44.14	68.20	-24.06	peak
6	p15540.000	13.79	41.10	62.88	59.21	51.22	74.00	-22.78	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

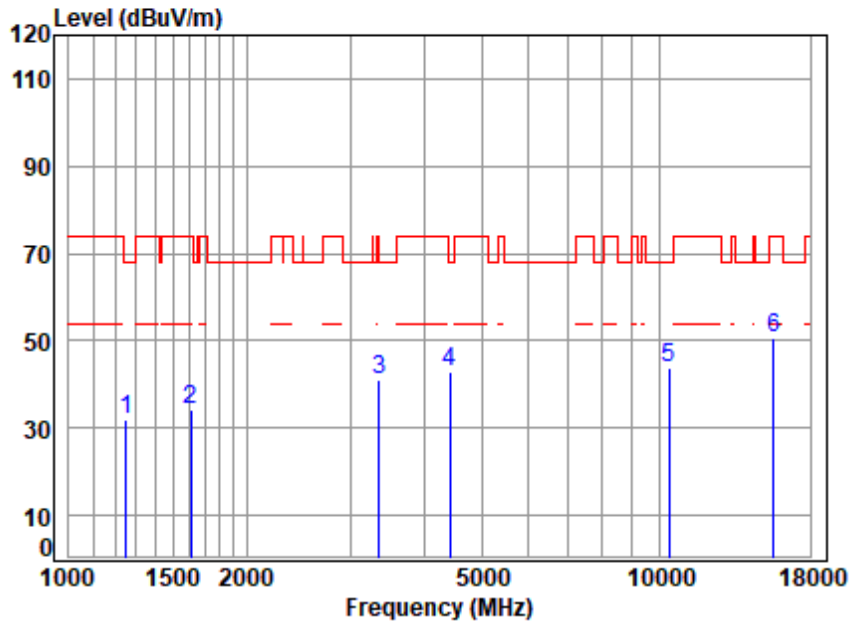


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5200 TX RSE
 Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	3.75	25.08	61.57	64.83	32.09	68.20	-36.11	peak
2	1611.091	4.20	26.69	61.69	65.24	34.44	74.00	-39.56	peak
3	3357.061	6.40	32.14	61.32	63.76	40.98	74.00	-33.02	peak
4	4417.841	7.16	34.59	61.56	62.52	42.71	68.20	-25.49	peak
5	10400.000	11.20	37.10	62.36	58.05	43.99	68.20	-24.21	peak
6	p15600.000	13.86	41.10	62.89	58.47	50.54	74.00	-23.46	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

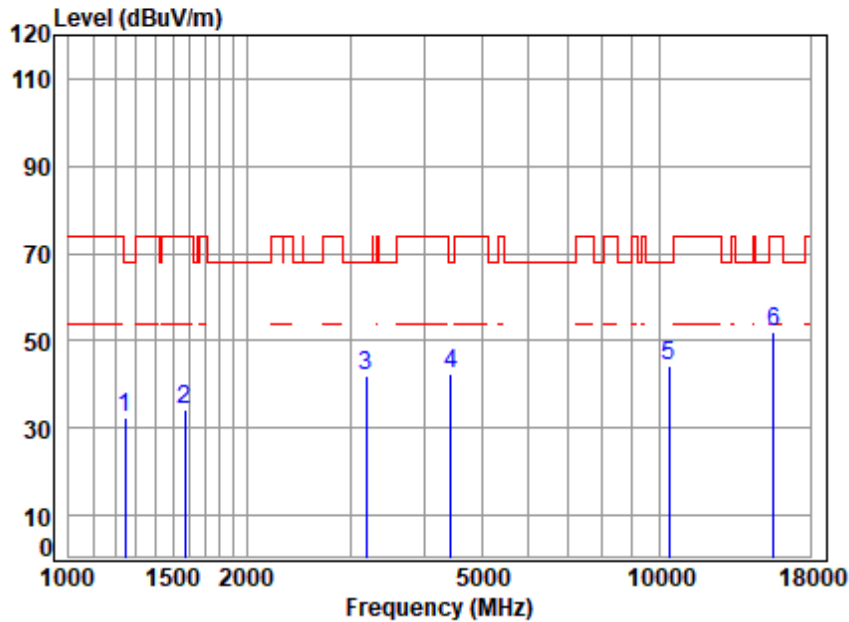

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5200 TX RSE
 Note : 5G WIFI 11AX20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1245.663	3.74	25.04	61.57	64.98	32.19	68.20	-36.01 peak
2	1574.265	4.15	26.90	61.68	64.70	34.07	74.00	-39.93 peak
3	3186.869	6.25	32.79	61.37	64.08	41.75	68.20	-26.45 peak
4	4430.628	7.17	34.43	61.57	62.60	42.63	68.20	-25.57 peak
5	10400.000	11.20	37.10	62.36	58.38	44.32	68.20	-23.88 peak
6	p15600.000	13.86	41.10	62.89	60.01	52.08	74.00	-21.92 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

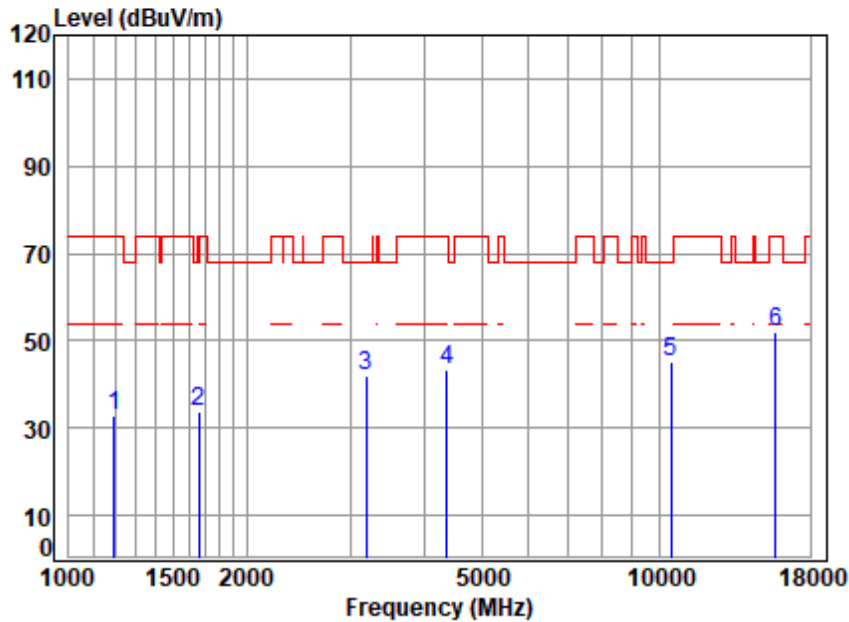

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5240 TX RSE
 Note : 5G WIFI 11AX20


	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1192.811	3.67	24.33	61.55	66.41	32.86	74.00	-41.14 peak
2	1663.137	4.27	26.27	61.70	64.86	33.70	74.00	-40.30 peak
3	3186.869	6.25	32.79	61.37	64.38	42.05	68.20	-26.15 peak
4	4367.058	7.10	34.54	61.51	63.06	43.19	74.00	-30.81 peak
5	10480.000	11.33	37.26	62.38	59.00	45.21	68.20	-22.99 peak
6	p15720.000	14.01	41.22	62.91	59.55	51.87	74.00	-22.13 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

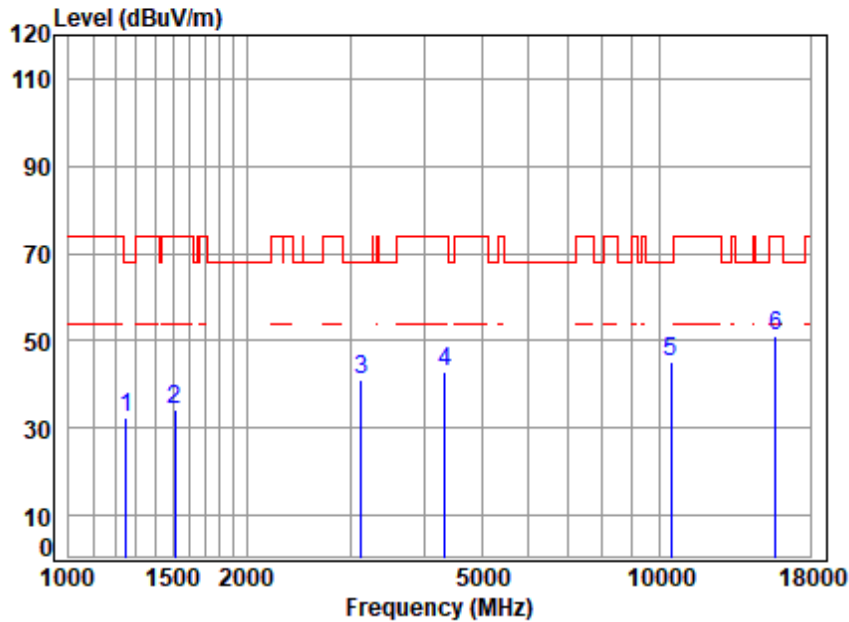


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5240 TX RSE
 Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.75	25.09	61.57	65.24	32.51	68.20	-35.69	peak
2	1511.833	4.06	26.85	61.66	64.95	34.20	74.00	-39.80	peak
3	3132.079	6.20	32.18	61.38	64.08	41.08	68.20	-27.12	peak
4	4329.354	7.05	34.23	61.48	62.97	42.77	74.00	-31.23	peak
5	10480.000	11.33	37.26	62.38	58.80	45.01	68.20	-23.19	peak
6	p15720.000	14.01	41.22	62.91	58.72	51.04	74.00	-22.96	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

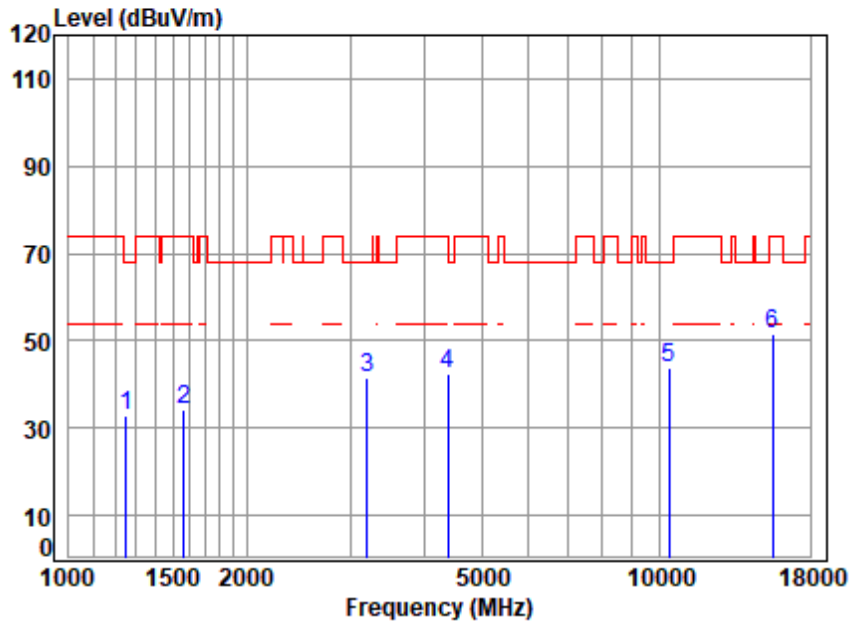


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5190 TX RSE
 Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.75	25.09	61.57	65.62	32.89	68.20	-35.31	peak
2	1565.191	4.14	26.94	61.68	64.79	34.19	74.00	-39.81	peak
3	3196.094	6.25	32.87	61.36	63.64	41.40	68.20	-26.80	peak
4	4392.376	7.13	34.74	61.53	61.90	42.24	74.00	-31.76	peak
5	10380.000	11.17	37.10	62.36	57.83	43.74	68.20	-24.46	peak
6	p15570.000	13.83	41.10	62.89	59.42	51.46	74.00	-22.54	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

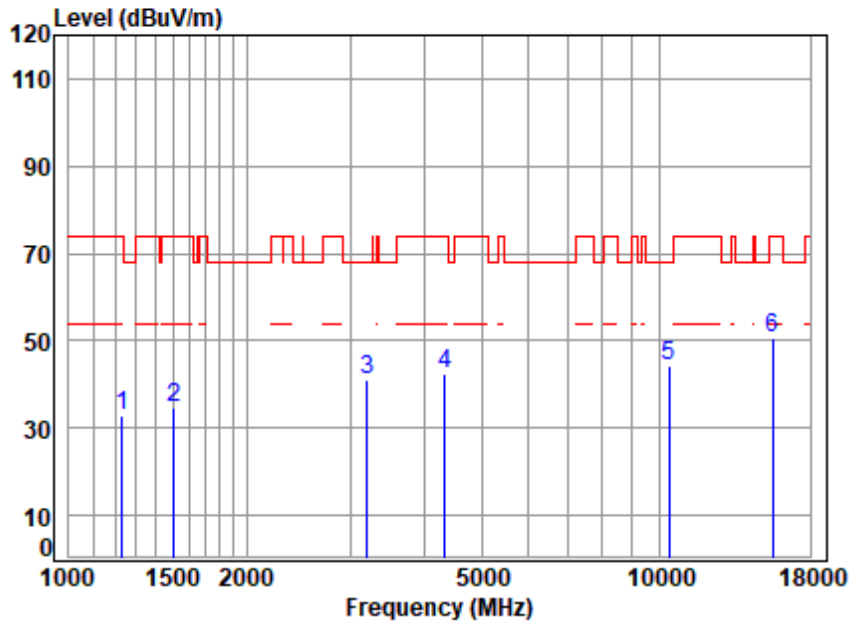


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5190 TX RSE
 Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1231.345	3.72	24.84	61.57	66.05	33.04	74.00	-40.96	peak
2	1507.470	4.05	26.83	61.66	65.65	34.87	74.00	-39.13	peak
3	3196.094	6.25	32.87	61.36	63.29	41.05	68.20	-27.15	peak
4	4341.886	7.07	34.34	61.49	62.55	42.47	74.00	-31.53	peak
5	10380.000	11.17	37.10	62.36	58.14	44.05	68.20	-24.15	peak
6	p15570.000	13.83	41.10	62.89	58.72	50.76	74.00	-23.24	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

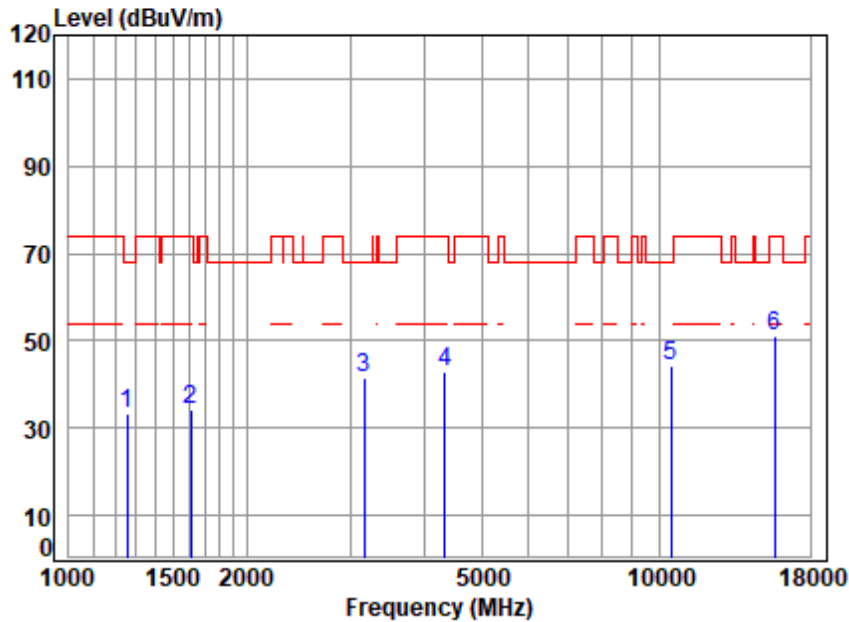

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5230 TX RSE
 Note : 5G WIFI 11AX40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	3.76	25.06	61.58	66.01	33.25	68.20	-34.95	peak
2	1611.091	4.20	26.69	61.69	65.00	34.20	74.00	-39.80	peak
3	3168.500	6.23	32.65	61.37	64.08	41.59	68.20	-26.61	peak
4	4341.886	7.07	34.34	61.49	62.96	42.88	74.00	-31.12	peak
5	10460.000	11.30	37.22	62.38	57.89	44.03	68.20	-24.17	peak
6	p15690.000	13.97	41.19	62.91	58.75	51.00	74.00	-23.00	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

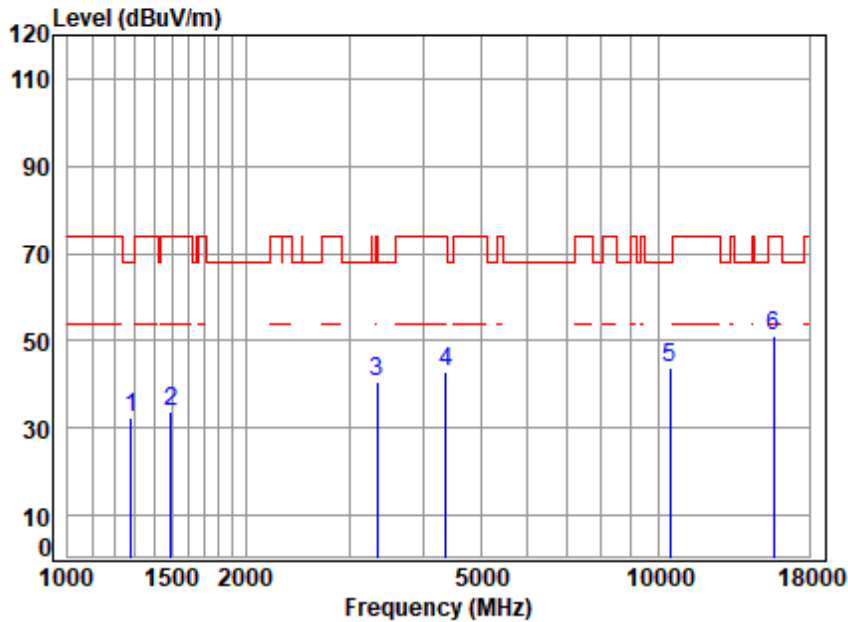


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5230 TX RSE
 Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1278.492	3.78	24.93	61.58	65.32	32.45	68.20	-35.75	peak
2	1494.455	4.03	26.64	61.66	64.83	33.84	74.00	-40.16	peak
3	3347.371	6.39	32.05	61.32	63.71	40.83	74.00	-33.17	peak
4	4367.058	7.10	34.54	61.51	62.62	42.75	74.00	-31.25	peak
5	10460.000	11.30	37.22	62.38	57.71	43.85	68.20	-24.35	peak
6	p15690.000	13.97	41.19	62.91	59.01	51.26	74.00	-22.74	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

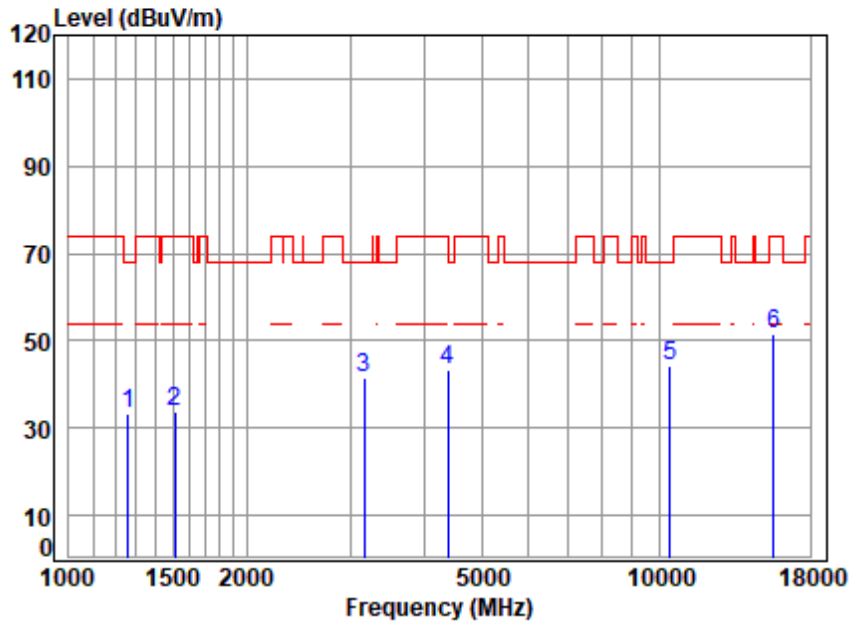


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5210 TX RSE
 Note : 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	3.76	25.04	61.58	65.95	33.17	68.20	-35.03	peak
2	1511.833	4.06	26.85	61.66	64.60	33.85	74.00	-40.15	peak
3	3159.355	6.22	32.57	61.38	64.05	41.46	68.20	-26.74	peak
4	4379.699	7.11	34.64	61.52	63.14	43.37	74.00	-30.63	peak
5	10420.000	11.23	37.14	62.37	58.45	44.45	68.20	-23.75	peak
6	p15630.000	13.90	41.13	62.90	59.31	51.44	74.00	-22.56	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

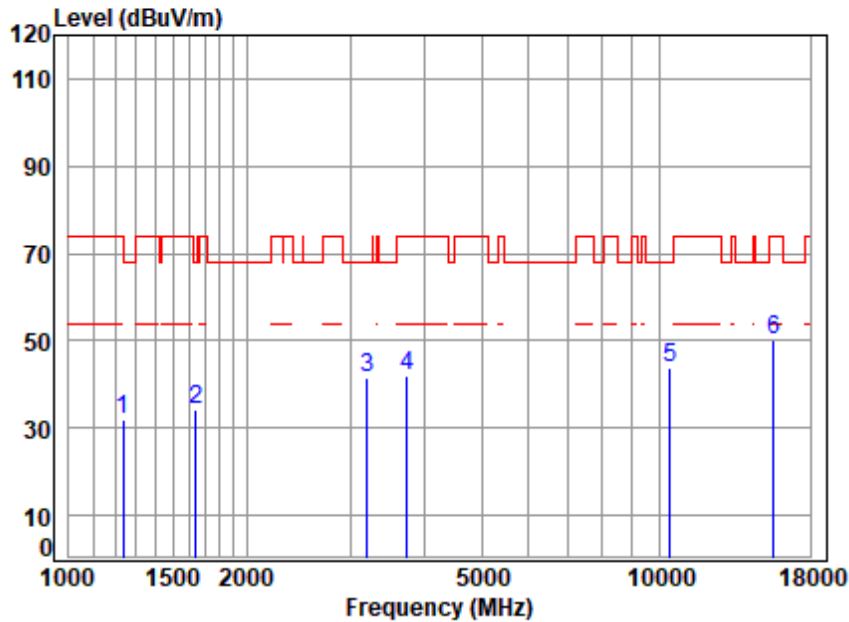


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5210 TX RSE
 Note : 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1234.909	3.73	24.89	61.57	65.07	32.12	74.00	-41.88	peak
2	1639.274	4.24	26.41	61.70	65.43	34.38	68.20	-33.82	peak
3	3196.094	6.25	32.87	61.36	63.55	41.31	68.20	-26.89	peak
4	3735.978	6.58	32.93	61.23	63.89	42.17	74.00	-31.83	peak
5	10420.000	11.23	37.14	62.37	57.67	43.67	68.20	-24.53	peak
6	p15630.000	13.90	41.13	62.90	58.24	50.37	74.00	-23.63	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

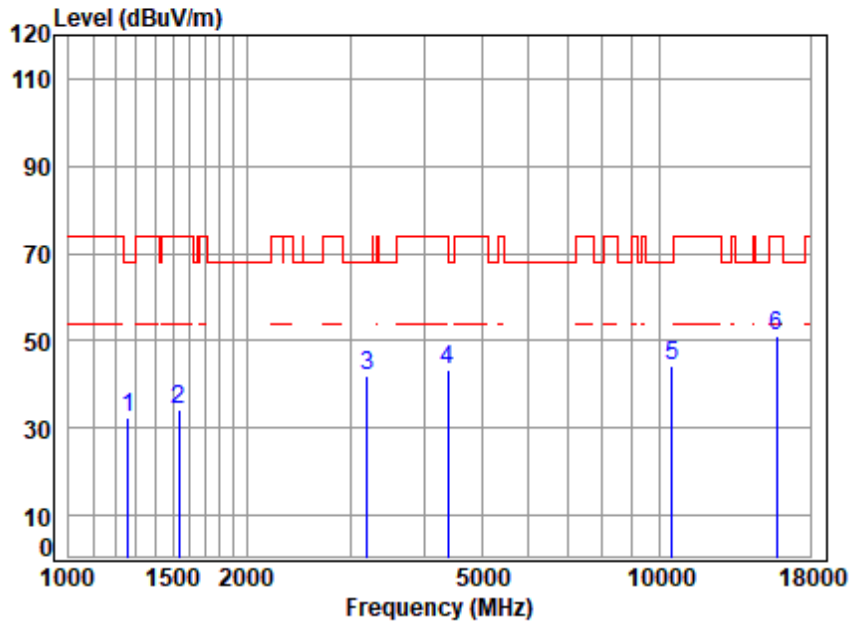


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5260 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	3.76	25.04	61.58	65.30	32.52	68.20	-35.68	peak
2	1538.281	4.10	26.95	61.67	64.72	34.10	74.00	-39.90	peak
3	3196.094	6.25	32.87	61.36	64.26	42.02	68.20	-26.18	peak
4	4392.376	7.13	34.74	61.53	62.97	43.31	74.00	-30.69	peak
5	10520.000	11.37	37.30	62.39	58.17	44.45	68.20	-23.75	peak
6	p15780.000	14.08	41.28	62.92	58.67	51.11	74.00	-22.89	peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

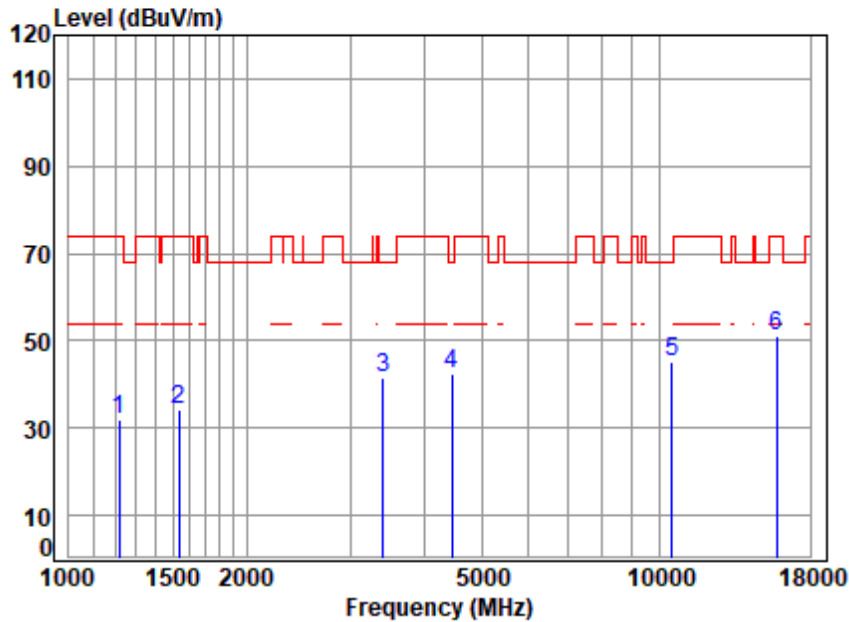

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5260 TX RSE
 Note : 5G WIFI 11A


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1217.190	3.71	24.64	61.56	65.33	32.12	74.00	-41.88	peak
2	1538.281	4.10	26.95	61.67	64.86	34.24	74.00	-39.76	peak
3	3405.929	6.44	32.33	61.31	63.89	41.35	68.20	-26.85	peak
4	4456.315	7.20	34.12	61.59	62.93	42.66	68.20	-25.54	peak
5	10520.000	11.37	37.30	62.39	58.67	44.95	68.20	-23.25	peak
6	p15780.000	14.08	41.28	62.92	58.79	51.23	74.00	-22.77	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

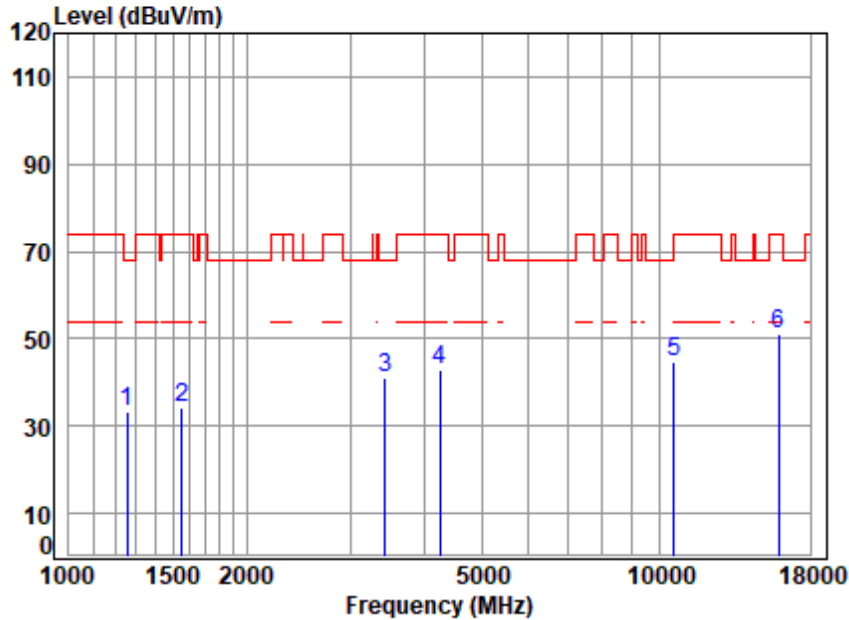

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5300 TX RSE
 Note : 5G WIFI 11A


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	3.76	25.06	61.58	66.09	33.33	68.20	-34.87	peak
2	1556.169	4.12	26.98	61.67	64.68	34.11	74.00	-39.89	peak
3	3435.590	6.47	31.97	61.30	63.97	41.11	68.20	-27.09	peak
4	4242.641	6.95	33.80	61.40	63.72	43.07	74.00	-30.93	peak
5	10600.000	11.43	37.30	62.41	58.48	44.80	68.20	-23.40	peak
6	p15900.000	14.23	41.40	62.94	58.27	50.96	74.00	-23.04	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

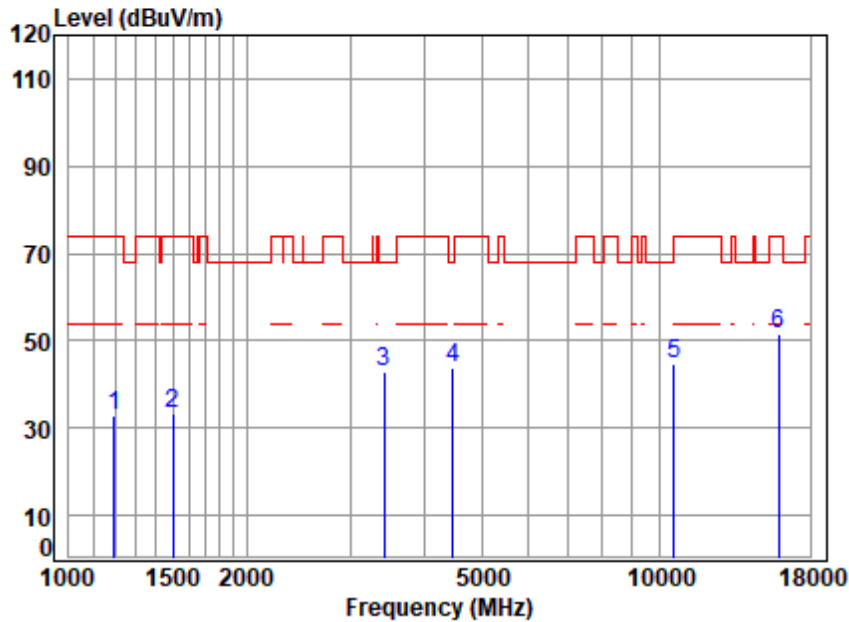


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5300 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1192.811	3.67	24.33	61.55	66.27	32.72	74.00	-41.28	peak
2	1503.119	4.04	26.81	61.66	64.32	33.51	74.00	-40.49	peak
3	3415.787	6.45	32.21	61.31	65.71	43.06	68.20	-25.14	peak
4	4469.214	7.22	33.97	61.60	64.15	43.74	68.20	-24.46	peak
5	10600.000	11.43	37.30	62.41	58.30	44.62	68.20	-23.58	peak
6	p15900.000	14.23	41.40	62.94	59.03	51.72	74.00	-22.28	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

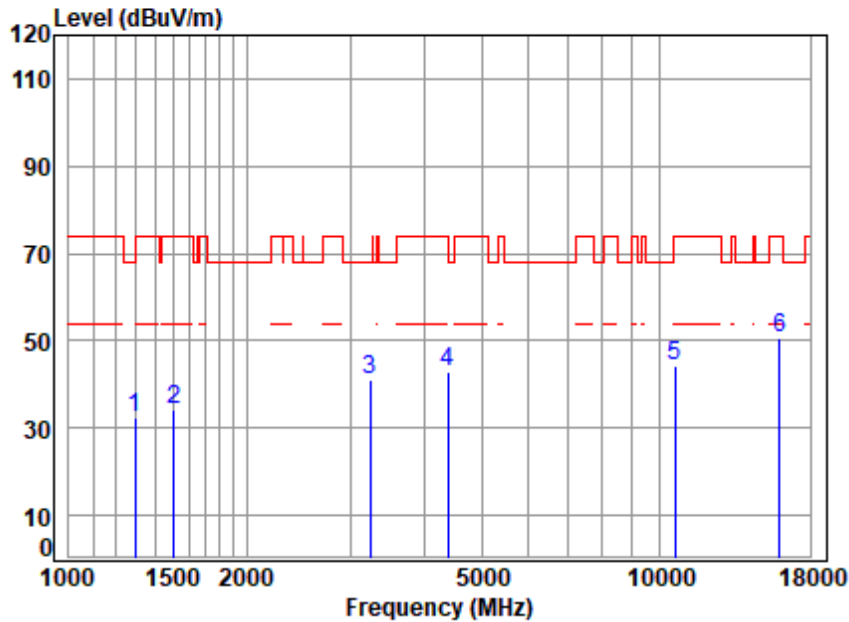


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5320 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	3.81	24.82	61.59	65.17	32.21	68.20	-35.99	peak
2	1507.470	4.05	26.83	61.66	64.88	34.10	74.00	-39.90	peak
3	3242.619	6.30	32.22	61.35	64.08	41.25	68.20	-26.95	peak
4	4379.699	7.11	34.64	61.52	62.54	42.77	74.00	-31.23	peak
5	10640.000	11.45	37.22	62.42	57.90	44.15	74.00	-29.85	peak
6	p15960.000	14.30	41.52	62.95	57.65	50.52	74.00	-23.48	peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

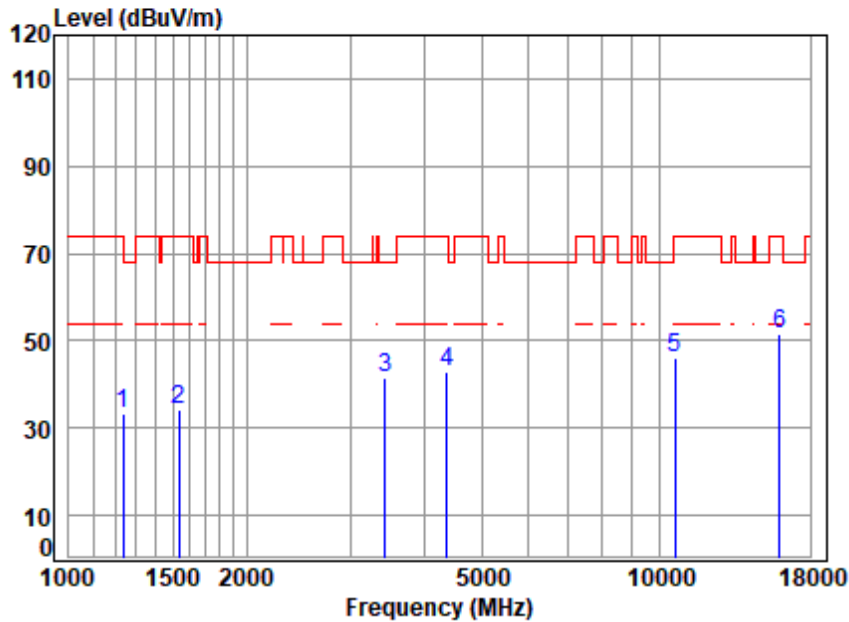


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5320 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1234.909	3.73	24.89	61.57	66.14	33.19	74.00	-40.81	peak
2	1538.281	4.10	26.95	61.67	64.66	34.04	74.00	-39.96	peak
3	3435.590	6.47	31.97	61.30	64.22	41.36	68.20	-26.84	peak
4	4367.058	7.10	34.54	61.51	62.86	42.99	74.00	-31.01	peak
5	10640.000	11.45	37.22	62.42	59.75	46.00	74.00	-28.00	peak
6	p15960.000	14.30	41.52	62.95	58.84	51.71	74.00	-22.29	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

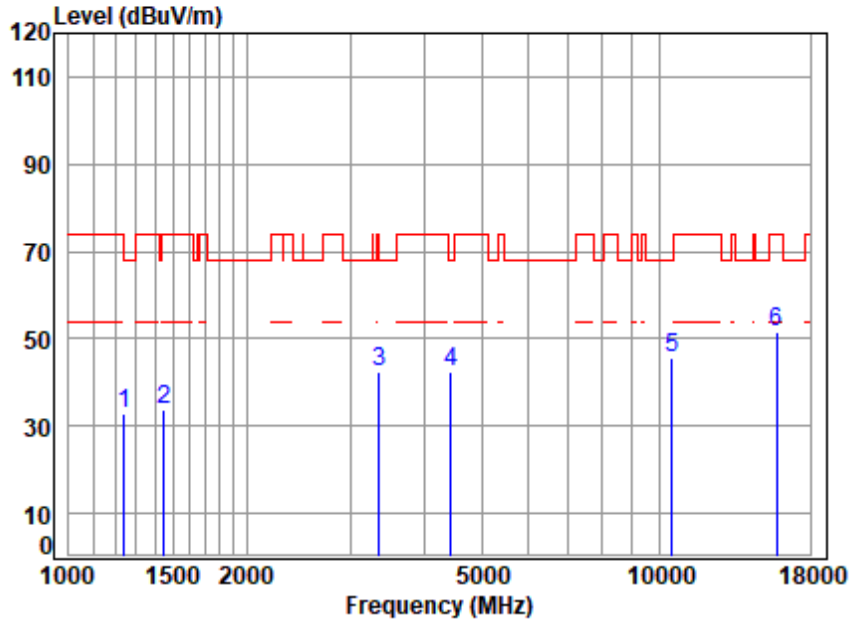


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5260 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.74	24.99	61.57	65.60	32.76	68.20	-35.44	peak
2	1451.878	3.99	25.45	61.64	65.87	33.67	74.00	-40.33	peak
3	3357.061	6.40	32.14	61.32	65.03	42.25	74.00	-31.75	peak
4	4430.628	7.17	34.43	61.57	62.44	42.47	68.20	-25.73	peak
5	10520.000	11.37	37.30	62.39	59.17	45.45	68.20	-22.75	peak
6	p15780.000	14.08	41.28	62.92	59.17	51.61	74.00	-22.39	peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

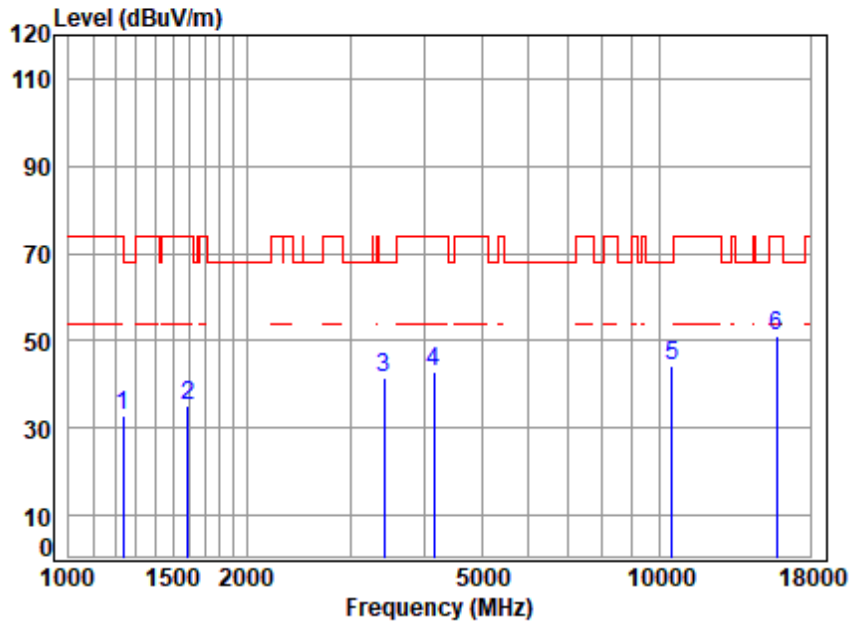


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5260 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1234.909	3.73	24.89	61.57	65.83	32.88	74.00	-41.12	peak
2	1592.571	4.18	26.83	61.68	65.74	35.07	74.00	-38.93	peak
3	3425.675	6.46	32.09	61.30	64.11	41.36	68.20	-26.84	peak
4	4145.664	6.83	33.73	61.31	63.47	42.72	74.00	-31.28	peak
5	10520.000	11.37	37.30	62.39	57.87	44.15	68.20	-24.05	peak
6	p15780.000	14.08	41.28	62.92	58.55	50.99	74.00	-23.01	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

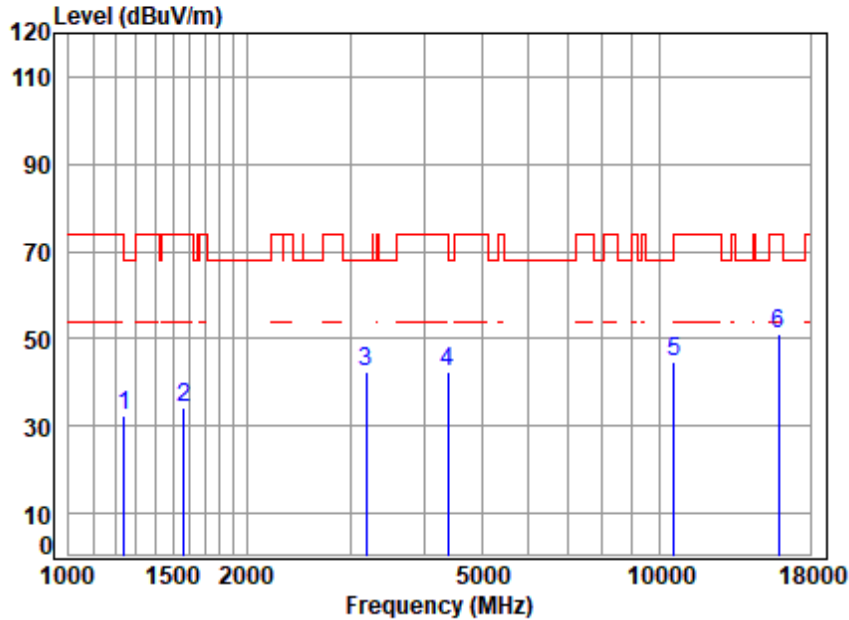


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5300 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.74	24.99	61.57	65.11	32.27	68.20	-35.93	peak
2	1565.191	4.14	26.94	61.68	64.77	34.17	74.00	-39.83	peak
3	3186.869	6.25	32.79	61.37	64.68	42.35	68.20	-25.85	peak
4	4392.376	7.13	34.74	61.53	62.12	42.46	74.00	-31.54	peak
5	10600.000	11.43	37.30	62.41	58.45	44.77	68.20	-23.43	peak
6	p15900.000	14.23	41.40	62.94	58.45	51.14	74.00	-22.86	peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

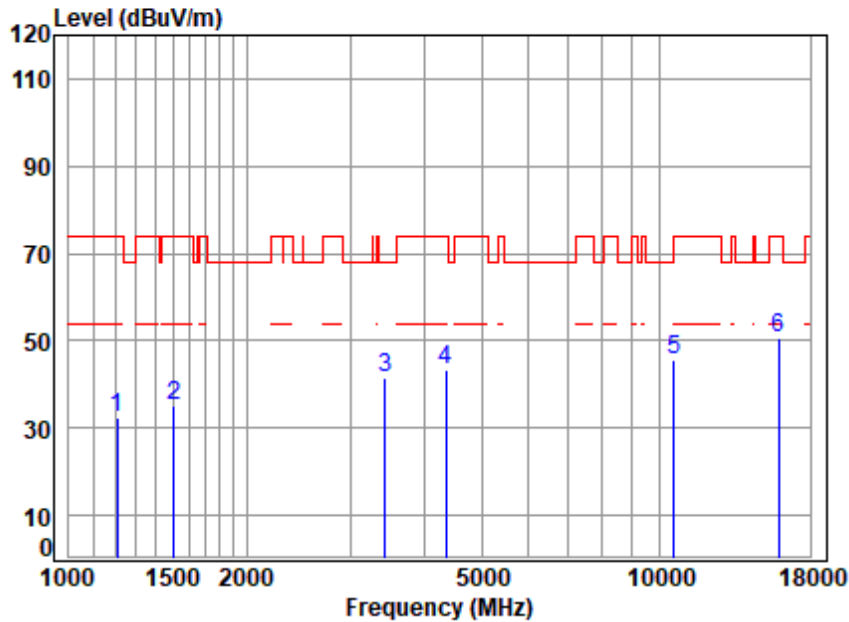


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5300 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1206.682	3.69	24.49	61.56	65.76	32.38	74.00	-41.62	peak
2	1507.470	4.05	26.83	61.66	65.85	35.07	74.00	-38.93	peak
3	3435.590	6.47	31.97	61.30	64.60	41.74	68.20	-26.46	peak
4	4354.454	7.08	34.44	61.50	63.54	43.56	74.00	-30.44	peak
5	10600.000	11.43	37.30	62.41	59.22	45.54	68.20	-22.66	peak
6	15900.000	14.23	41.40	62.94	57.96	50.65	74.00	-23.35	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

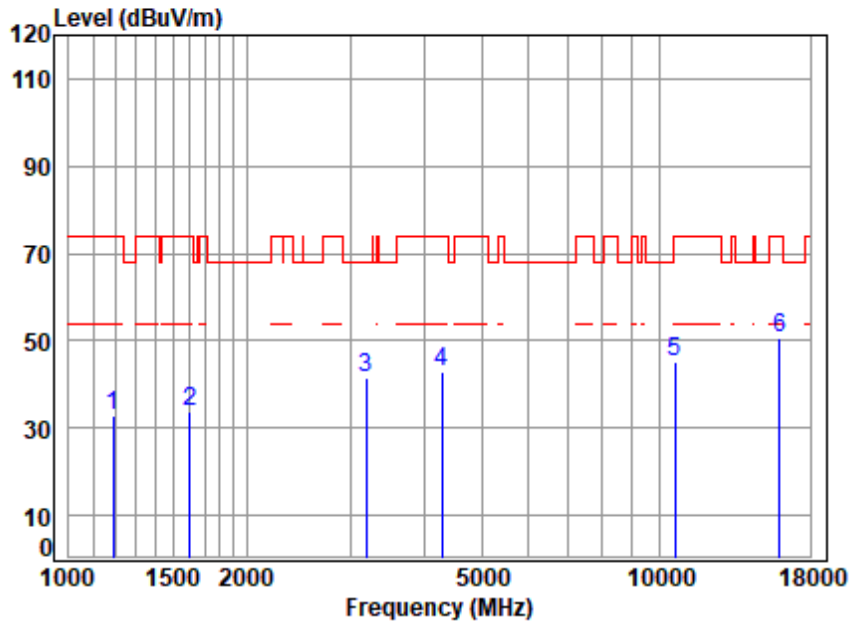


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5320 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1189.368	3.67	24.29	61.55	66.28	32.69	74.00	-41.31	peak
2	1606.441	4.19	26.74	61.69	64.75	33.99	74.00	-40.01	peak
3	3186.869	6.25	32.79	61.37	63.96	41.63	68.20	-26.57	peak
4	4279.589	6.99	33.92	61.43	63.31	42.79	74.00	-31.21	peak
5	10640.000	11.45	37.22	62.42	59.12	45.37	74.00	-28.63	peak
6	p15960.000	14.30	41.52	62.95	57.69	50.56	74.00	-23.44	peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

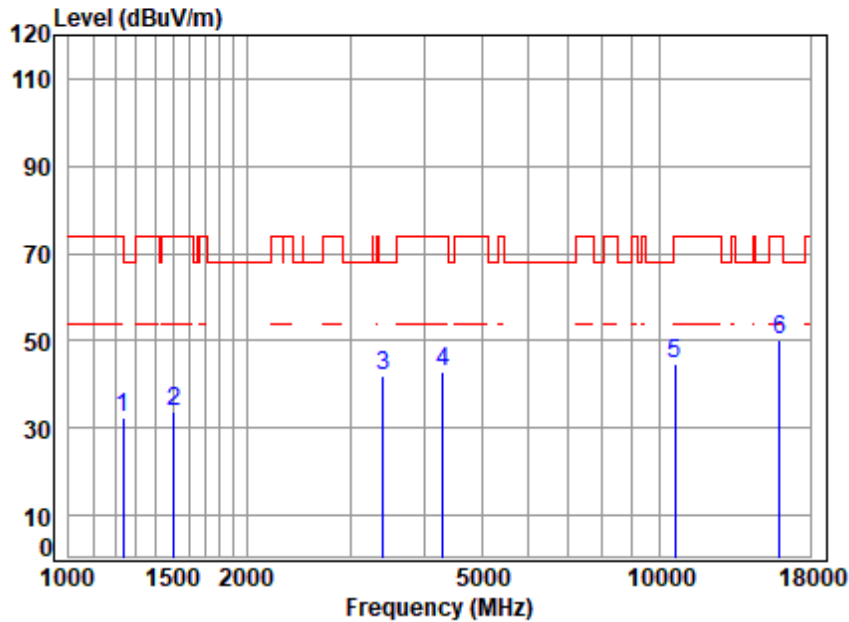


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5320 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.73	24.94	61.57	65.50	32.60	74.00	-41.40	peak
2	1507.470	4.05	26.83	61.66	64.40	33.62	74.00	-40.38	peak
3	3405.929	6.44	32.33	61.31	64.35	41.81	68.20	-26.39	peak
4	4304.400	7.02	34.04	61.46	63.43	43.03	74.00	-30.97	peak
5	10640.000	11.45	37.22	62.42	58.56	44.81	74.00	-29.19	peak
6	p15960.000	14.30	41.52	62.95	57.50	50.37	74.00	-23.63	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

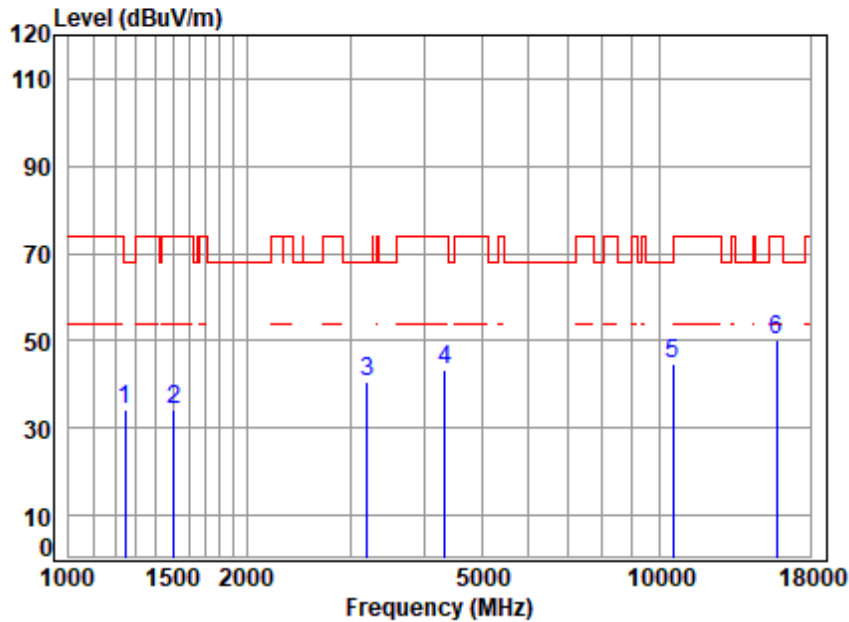


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5270 TX RSE
 Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.74	25.04	61.57	67.03	34.24	68.20	-33.96	peak
2	1507.470	4.05	26.83	61.66	64.81	34.03	74.00	-39.97	peak
3	3196.094	6.25	32.87	61.36	63.07	40.83	68.20	-27.37	peak
4	4341.886	7.07	34.34	61.49	63.56	43.48	74.00	-30.52	peak
5	10540.000	11.39	37.30	62.40	58.26	44.55	68.20	-23.65	peak
6	15810.000	14.12	41.31	62.93	57.68	50.18	74.00	-23.82	peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

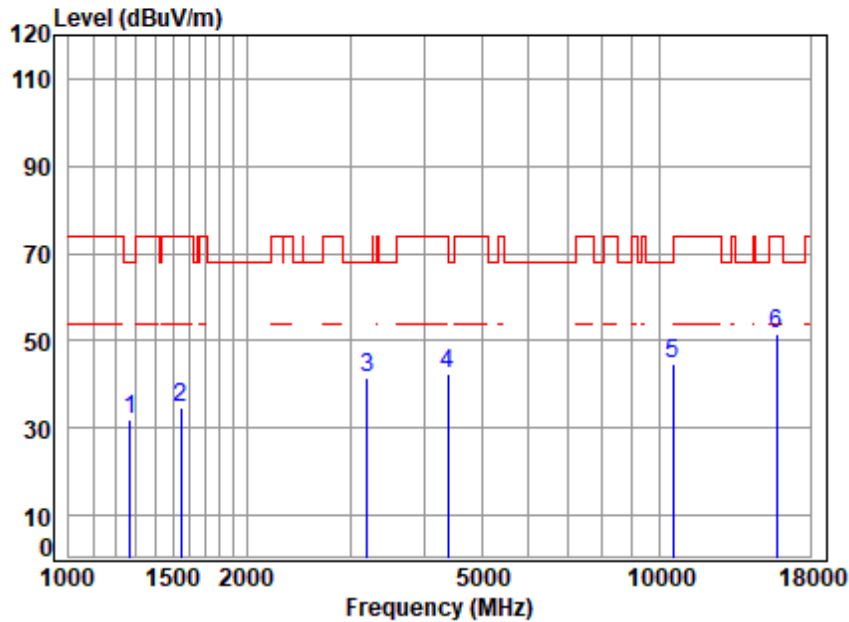


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5270 TX RSE
 Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1271.123	3.77	24.97	61.58	64.89	32.05	68.20	-36.15	peak
2	1547.199	4.11	26.99	61.67	65.03	34.46	74.00	-39.54	peak
3	3196.094	6.25	32.87	61.36	63.71	41.47	68.20	-26.73	peak
4	4379.699	7.11	34.64	61.52	62.32	42.55	74.00	-31.45	peak
5	10540.000	11.39	37.30	62.40	58.31	44.60	68.20	-23.60	peak
6	p15810.000	14.12	41.31	62.93	58.90	51.40	74.00	-22.60	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

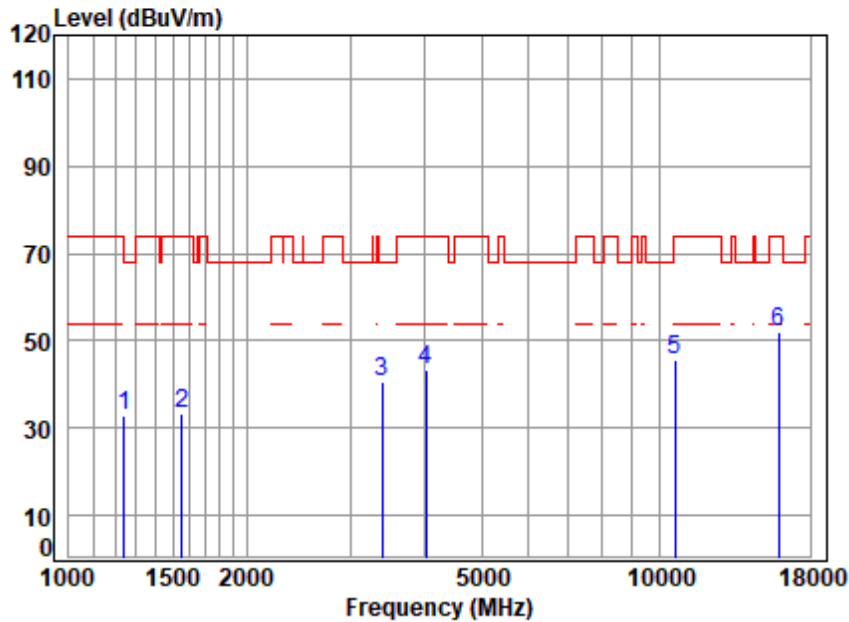


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5310 TX RSE
 Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.74	24.99	61.57	65.75	32.91	68.20	-35.29	peak
2	1556.169	4.12	26.98	61.67	64.04	33.47	74.00	-40.53	peak
3	3396.098	6.43	32.38	61.31	63.30	40.80	68.20	-27.40	peak
4	4027.554	6.68	32.72	61.20	65.05	43.25	74.00	-30.75	peak
5	10620.000	11.44	37.26	62.42	59.26	45.54	74.00	-28.46	peak
6	p15930.000	14.27	41.46	62.95	59.14	51.92	74.00	-22.08	peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

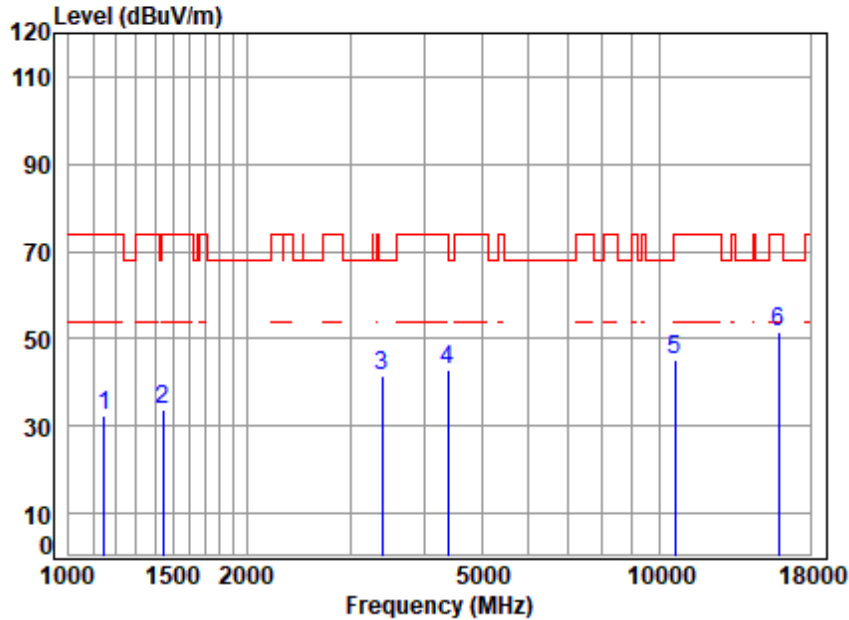


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5310 TX RSE
 Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1148.823	3.61	23.90	61.53	66.30	32.28	74.00	-41.72	peak
2	1443.509	3.98	25.30	61.64	66.28	33.92	74.00	-40.08	peak
3	3396.098	6.43	32.38	61.31	63.92	41.42	68.20	-26.78	peak
4	4379.699	7.11	34.64	61.52	62.65	42.88	74.00	-31.12	peak
5	10620.000	11.44	37.26	62.42	58.67	44.95	74.00	-29.05	peak
6	p15930.000	14.27	41.46	62.95	58.73	51.51	74.00	-22.49	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

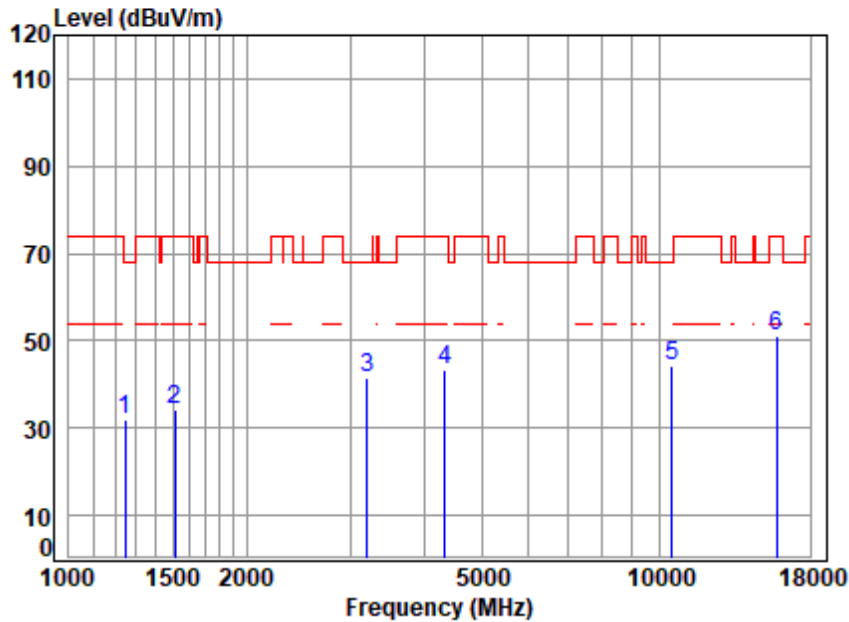

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5260 TX RSE
 Note : 5G WIFI 11AX20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.74	25.04	61.57	64.92	32.13	68.20	-36.07	peak
2	1511.833	4.06	26.85	61.66	64.75	34.00	74.00	-40.00	peak
3	3205.345	6.26	32.81	61.36	63.92	41.63	68.20	-26.57	peak
4	4341.886	7.07	34.34	61.49	63.27	43.19	74.00	-30.81	peak
5	10520.000	11.37	37.30	62.39	57.94	44.22	68.20	-23.98	peak
6	p15780.000	14.08	41.28	62.92	58.74	51.18	74.00	-22.82	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

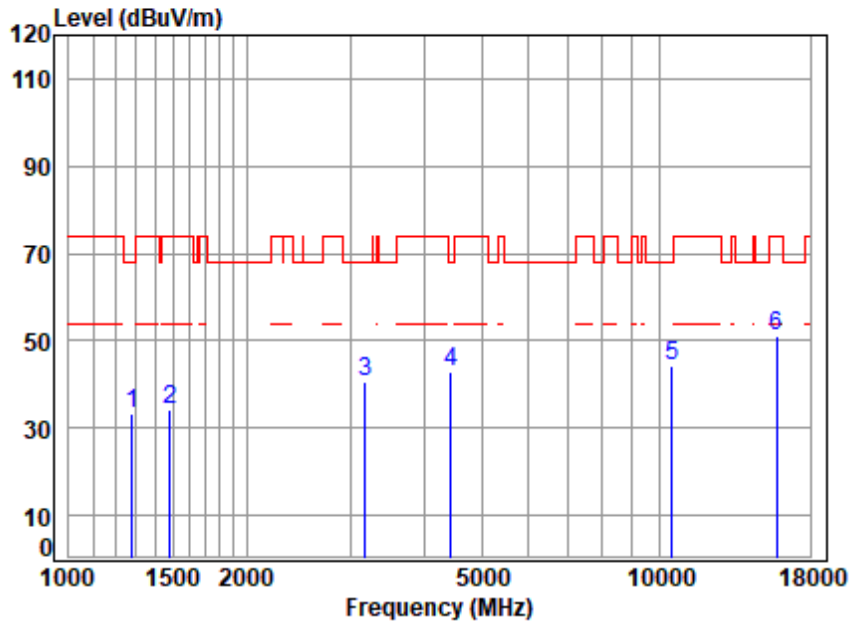


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5260 TX RSE
 Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.79	24.91	61.58	65.97	33.09	68.20	-35.11	peak
2	1485.841	4.02	26.40	61.65	65.23	34.00	74.00	-40.00	peak
3	3177.672	6.24	32.72	61.37	63.03	40.62	68.20	-27.58	peak
4	4430.628	7.17	34.43	61.57	63.05	43.08	68.20	-25.12	peak
5	10520.000	11.37	37.30	62.39	58.04	44.32	68.20	-23.88	peak
6	p15780.000	14.08	41.28	62.92	58.78	51.22	74.00	-22.78	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

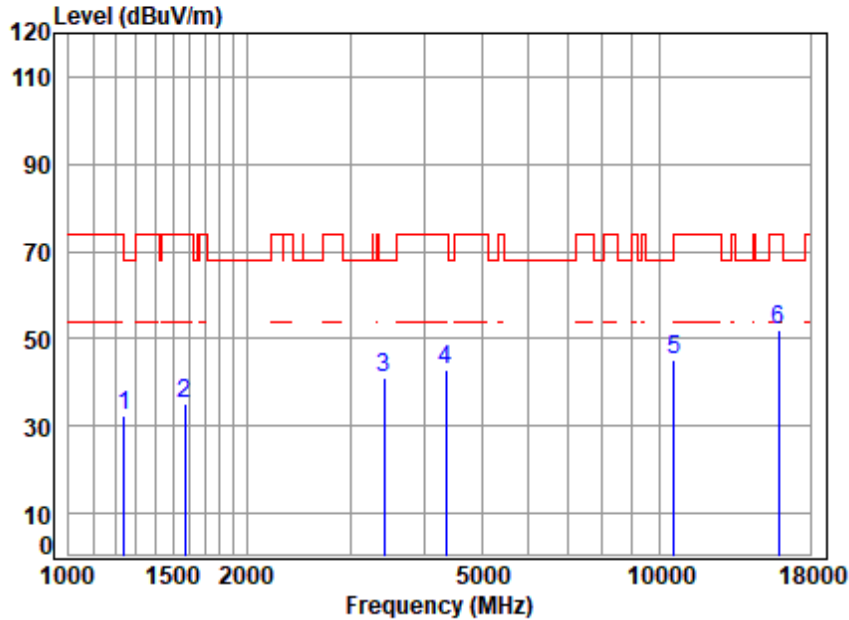


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5300 TX RSE
 Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1242.068	3.74	24.99	61.57	65.12	32.28	68.20	-35.92 peak
2	1574.265	4.15	26.90	61.68	65.71	35.08	74.00	-38.92 peak
3	3425.675	6.46	32.09	61.30	64.01	41.26	68.20	-26.94 peak
4	4354.454	7.08	34.44	61.50	62.73	42.75	74.00	-31.25 peak
5	10600.000	11.43	37.30	62.41	58.72	45.04	68.20	-23.16 peak
6	p15900.000	14.23	41.40	62.94	59.17	51.86	74.00	-22.14 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

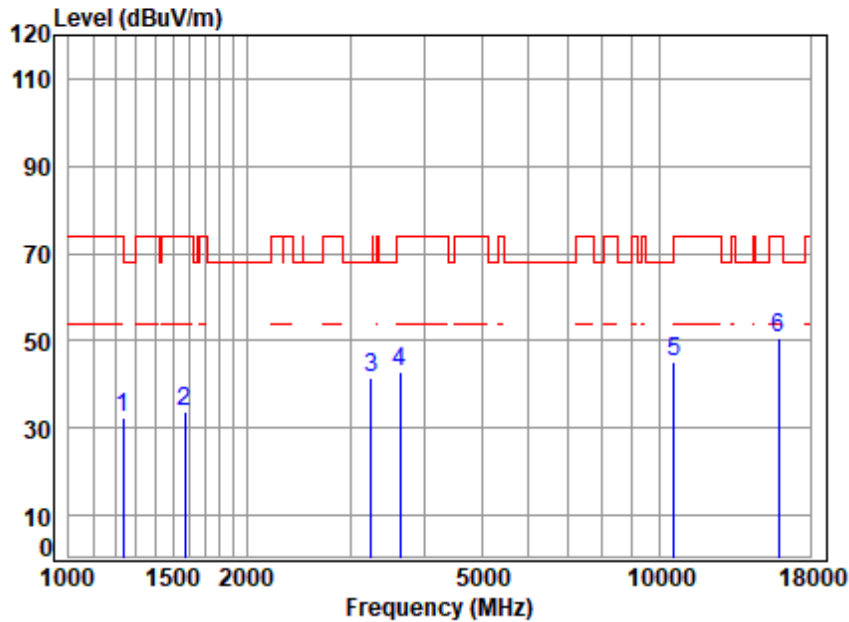


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5300 TX RSE
 Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.73	24.94	61.57	65.32	32.42	74.00	-41.58	peak
2	1574.265	4.15	26.90	61.68	64.54	33.91	74.00	-40.09	peak
3	3252.005	6.31	32.06	61.35	64.60	41.62	68.20	-26.58	peak
4	3640.045	6.56	32.58	61.25	65.10	42.99	74.00	-31.01	peak
5	10600.000	11.43	37.30	62.41	58.82	45.14	68.20	-23.06	peak
6	15900.000	14.23	41.40	62.94	58.01	50.70	74.00	-23.30	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 06; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

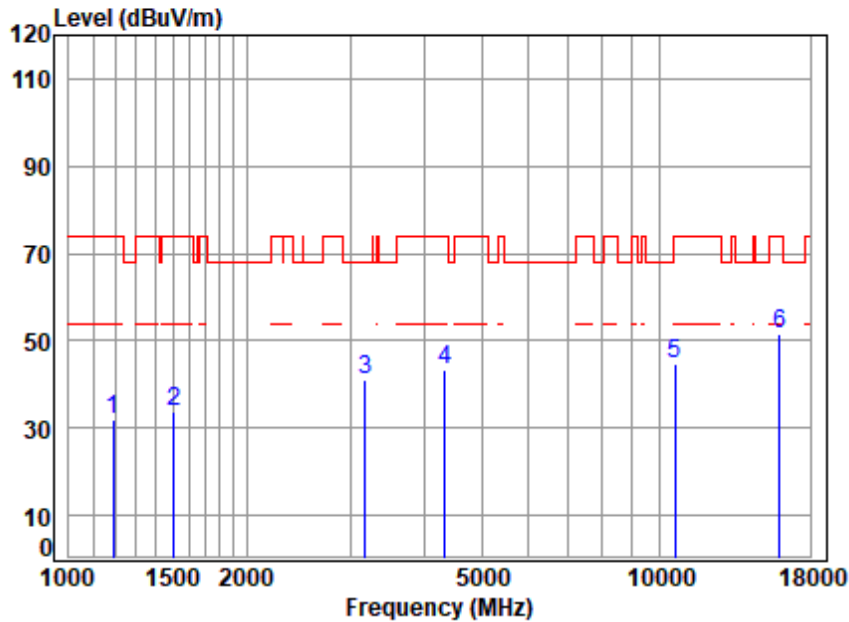

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5320 TX RSE
 Note : 5G WIFI 11AX20


	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1189.368	3.67	24.29	61.55	65.37	31.78	74.00	-42.22 peak
2	1507.470	4.05	26.83	61.66	64.62	33.84	74.00	-40.16 peak
3	3177.672	6.24	32.72	61.37	63.57	41.16	68.20	-27.04 peak
4	4341.886	7.07	34.34	61.49	63.40	43.32	74.00	-30.68 peak
5	10640.000	11.45	37.22	62.42	58.31	44.56	74.00	-29.44 peak
6	p15960.000	14.30	41.52	62.95	58.87	51.74	74.00	-22.26 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

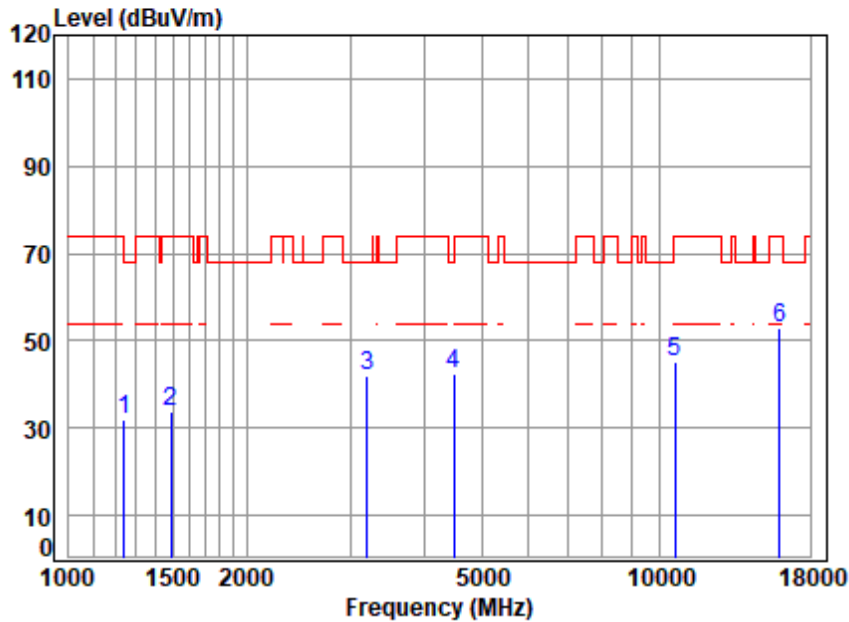

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5320 TX RSE
 Note : 5G WIFI 11AX20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1242.068	3.74	24.99	61.57	65.01	32.17	68.20	-36.03 peak
2	1490.142	4.03	26.52	61.65	64.86	33.76	74.00	-40.24 peak
3	3196.094	6.25	32.87	61.36	64.39	42.15	68.20	-26.05 peak
4	4482.150	7.23	33.81	61.61	62.85	42.28	68.20	-25.92 peak
5	10640.000	11.45	37.22	62.42	59.01	45.26	74.00	-28.74 peak
6	p15960.000	14.30	41.52	62.95	59.86	52.73	74.00	-21.27 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 06; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

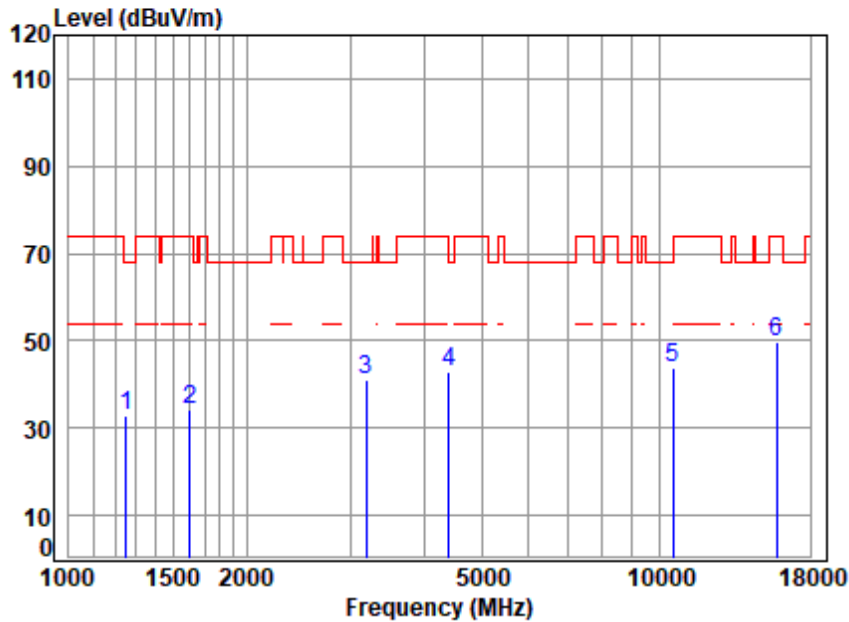

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5270 TX RSE
 Note : 5G WIFI 11AX40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.75	25.09	61.57	65.55	32.82	68.20	-35.38	peak
2	1601.804	4.19	26.78	61.69	65.08	34.36	74.00	-39.64	peak
3	3186.869	6.25	32.79	61.37	63.52	41.19	68.20	-27.01	peak
4	4405.090	7.14	34.74	61.55	62.47	42.80	68.20	-25.40	peak
5	10540.000	11.39	37.30	62.40	57.54	43.83	68.20	-24.37	peak
6	15810.000	14.12	41.31	62.93	57.10	49.60	74.00	-24.40	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

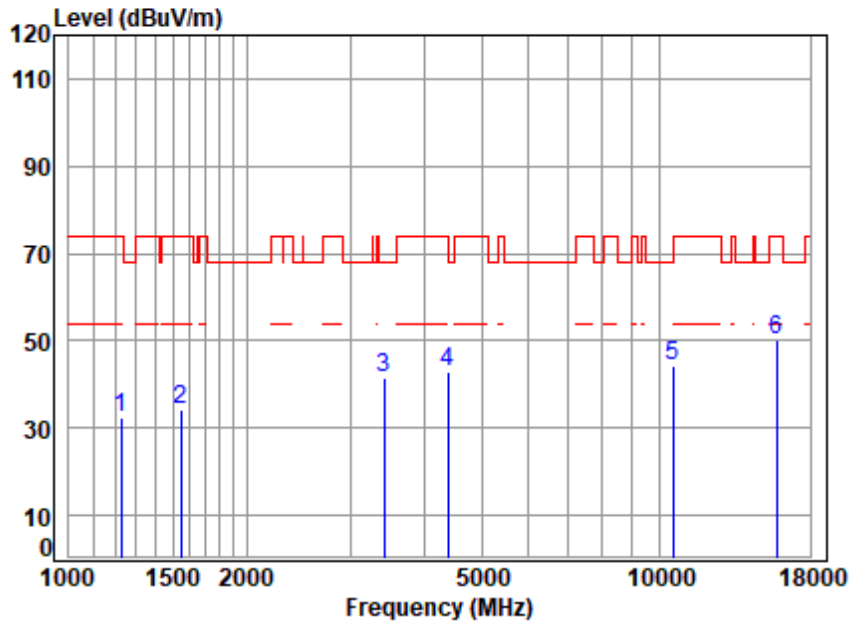


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5270 TX RSE
 Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1227.791	3.72	24.79	61.56	65.50	32.45	74.00	-41.55	peak
2	1547.199	4.11	26.99	61.67	64.77	34.20	74.00	-39.80	peak
3	3425.675	6.46	32.09	61.30	64.18	41.43	68.20	-26.77	peak
4	4392.376	7.13	34.74	61.53	62.75	43.09	74.00	-30.91	peak
5	10540.000	11.39	37.30	62.40	57.85	44.14	68.20	-24.06	peak
6	p15810.000	14.12	41.31	62.93	57.81	50.31	74.00	-23.69	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

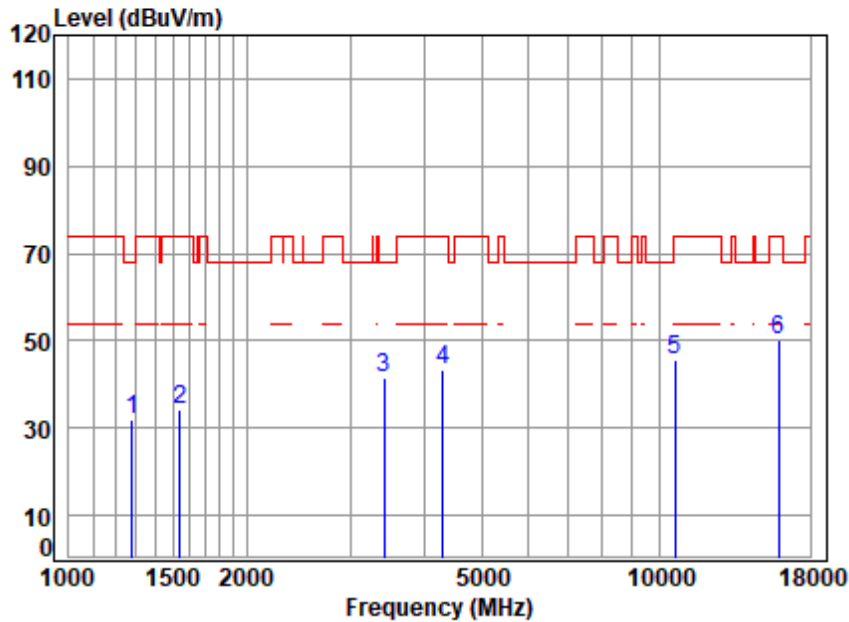


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5310 TX RSE
 Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1278.492	3.78	24.93	61.58	64.60	31.73	68.20	-36.47	peak
2	1542.733	4.10	26.97	61.67	65.05	34.45	74.00	-39.55	peak
3	3415.787	6.45	32.21	61.31	64.12	41.47	68.20	-26.73	peak
4	4304.400	7.02	34.04	61.46	63.73	43.33	74.00	-30.67	peak
5	10620.000	11.44	37.26	62.42	59.19	45.47	74.00	-28.53	peak
6	p15930.000	14.27	41.46	62.95	57.56	50.34	74.00	-23.66	peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

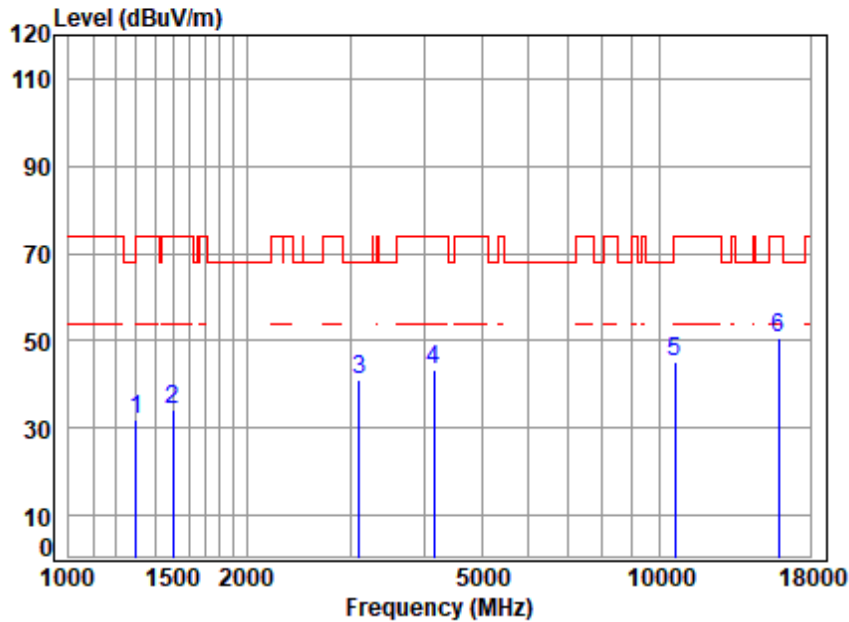


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5310 TX RSE
 Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	3.81	24.79	61.59	65.14	32.15	74.00	-41.85	peak
2	1503.119	4.04	26.81	61.66	64.94	34.13	74.00	-39.87	peak
3	3105.037	6.17	31.69	61.39	64.43	40.90	68.20	-27.30	peak
4	4145.664	6.83	33.73	61.31	63.99	43.24	74.00	-30.76	peak
5	10620.000	11.44	37.26	62.42	58.79	45.07	74.00	-28.93	peak
6	p15930.000	14.27	41.46	62.95	58.05	50.83	74.00	-23.17	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

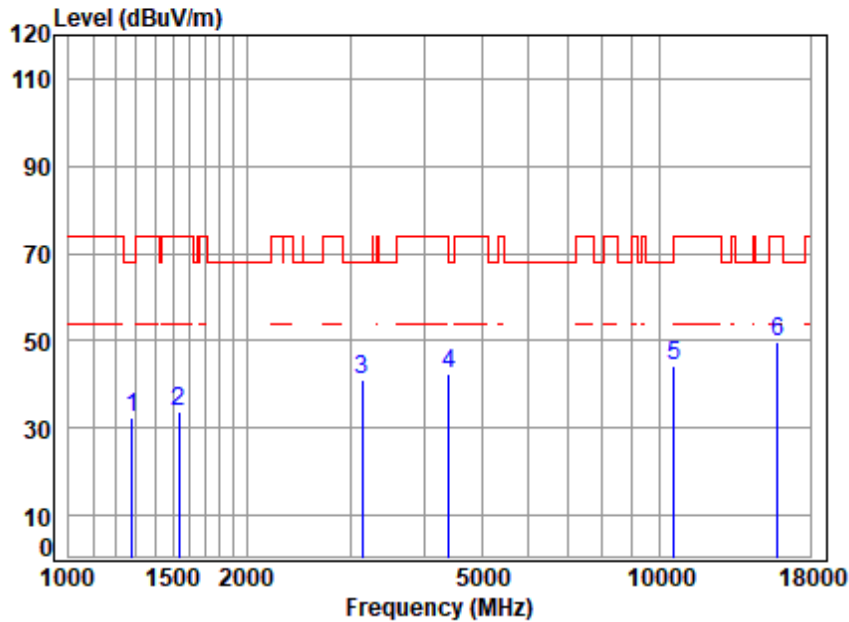


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5290 TX RSE
 Note : 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.79	24.91	61.58	65.45	32.57	68.20	-35.63	peak
2	1538.281	4.10	26.95	61.67	64.52	33.90	74.00	-40.10	peak
3	3141.145	6.20	32.34	61.38	63.88	41.04	68.20	-27.16	peak
4	4405.090	7.14	34.74	61.55	61.92	42.25	68.20	-25.95	peak
5	10580.000	11.41	37.30	62.41	58.16	44.46	68.20	-23.74	peak
6	15870.000	14.19	41.37	62.94	57.18	49.80	74.00	-24.20	peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

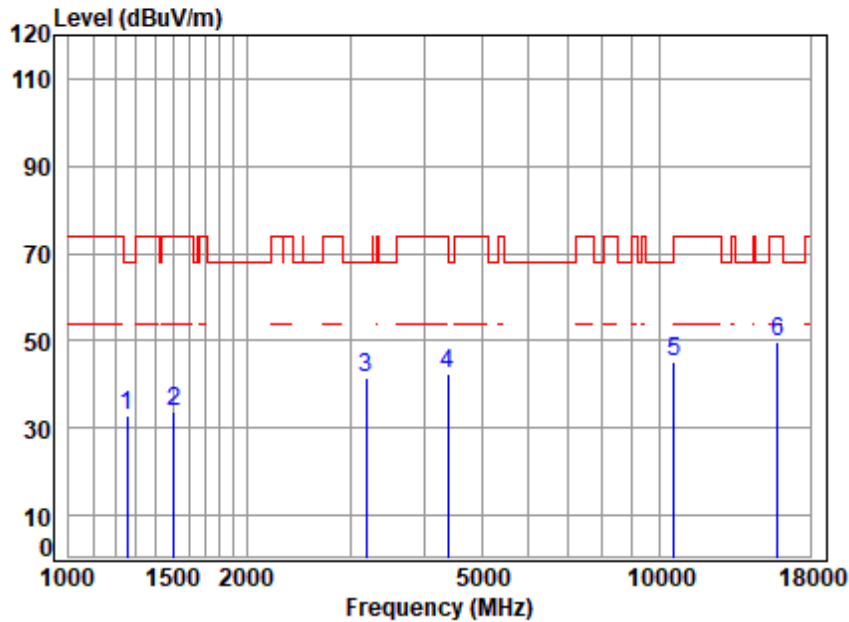

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5290 TX RSE
 Note : 5G WIFI 11AX80


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1256.512	3.76	25.06	61.58	65.76	33.00	68.20	-35.20 peak
2	1507.470	4.05	26.83	61.66	64.46	33.68	74.00	-40.32 peak
3	3186.869	6.25	32.79	61.37	63.72	41.39	68.20	-26.81 peak
4	4392.376	7.13	34.74	61.53	62.12	42.46	74.00	-31.54 peak
5	10580.000	11.41	37.30	62.41	58.77	45.07	68.20	-23.13 peak
6	15870.000	14.19	41.37	62.94	57.07	49.69	74.00	-24.31 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

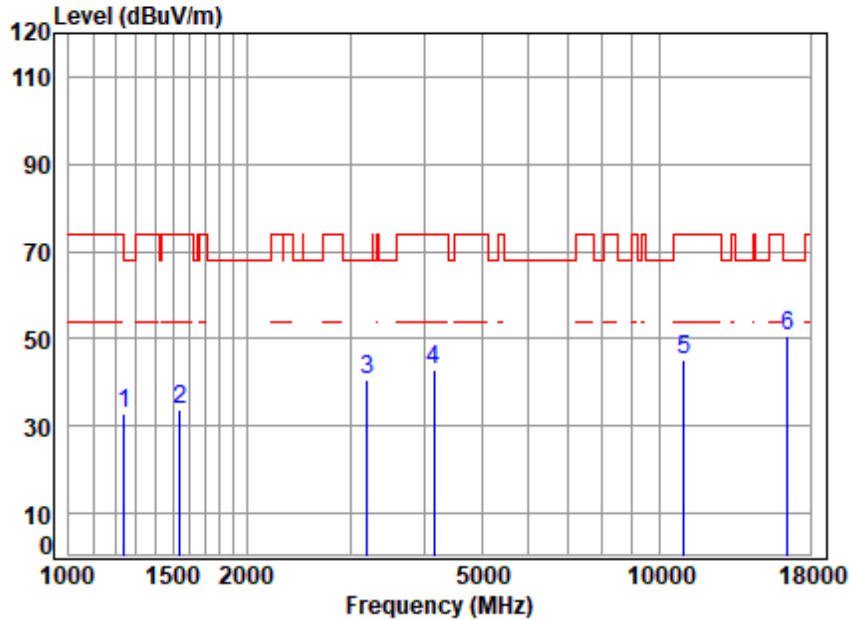


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5500 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.74	24.99	61.57	65.70	32.86	68.20	-35.34	peak
2	1542.733	4.10	26.97	61.67	64.40	33.80	74.00	-40.20	peak
3	3205.345	6.26	32.81	61.36	62.92	40.63	68.20	-27.57	peak
4	4145.664	6.83	33.73	61.31	63.67	42.92	74.00	-31.08	peak
5	11000.000	11.68	37.50	62.51	58.61	45.28	74.00	-28.72	peak
6	p16500.000	13.99	42.10	62.42	57.05	50.72	68.20	-17.48	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

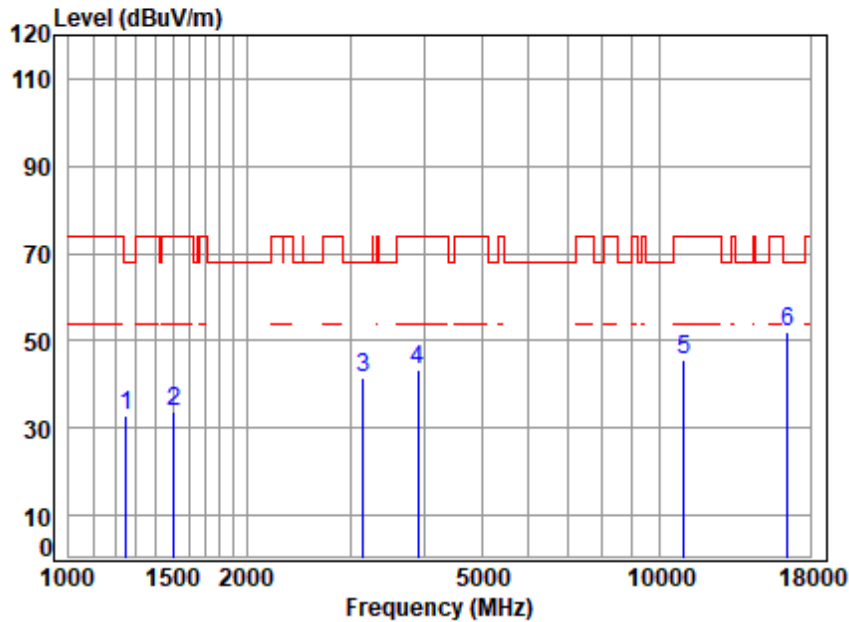


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5500 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.75	25.09	61.57	65.43	32.70	68.20	-35.50	peak
2	1507.470	4.05	26.83	61.66	64.39	33.61	74.00	-40.39	peak
3	3150.237	6.21	32.50	61.38	64.02	41.35	68.20	-26.85	peak
4	3901.516	6.63	33.79	61.19	63.97	43.20	74.00	-30.80	peak
5	11000.000	11.68	37.50	62.51	58.99	45.66	74.00	-28.34	peak
6	p16500.000	13.99	42.10	62.42	58.30	51.97	68.20	-16.23	peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

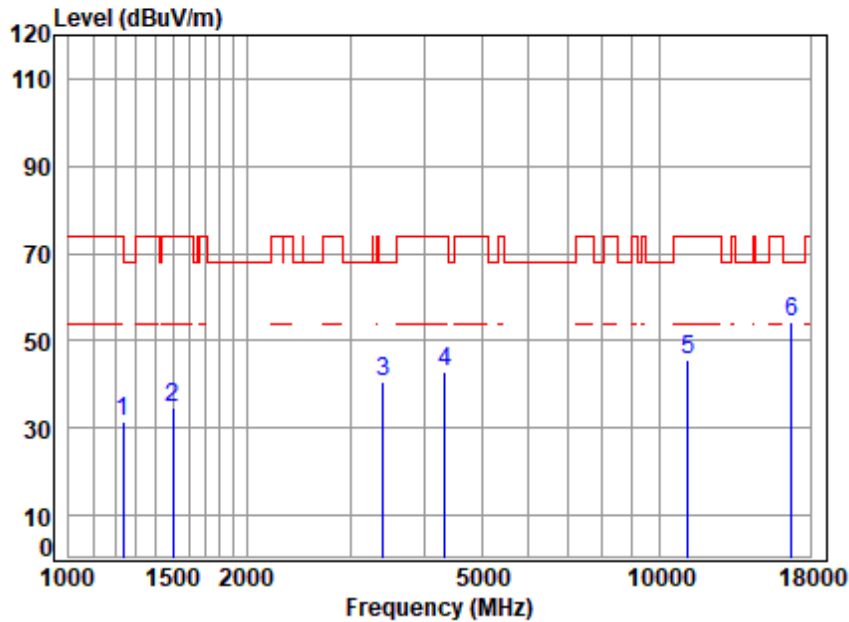


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5580 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1234.909	3.73	24.89	61.57	64.56	31.61	74.00	-42.39	peak
2	1503.119	4.04	26.81	61.66	65.49	34.68	74.00	-39.32	peak
3	3405.929	6.44	32.33	61.31	63.23	40.69	68.20	-27.51	peak
4	4341.886	7.07	34.34	61.49	62.98	42.90	74.00	-31.10	peak
5	11160.000	11.77	37.62	62.54	58.73	45.58	74.00	-28.42	peak
6	p16740.000	14.15	42.78	62.17	59.42	54.18	68.20	-14.02	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

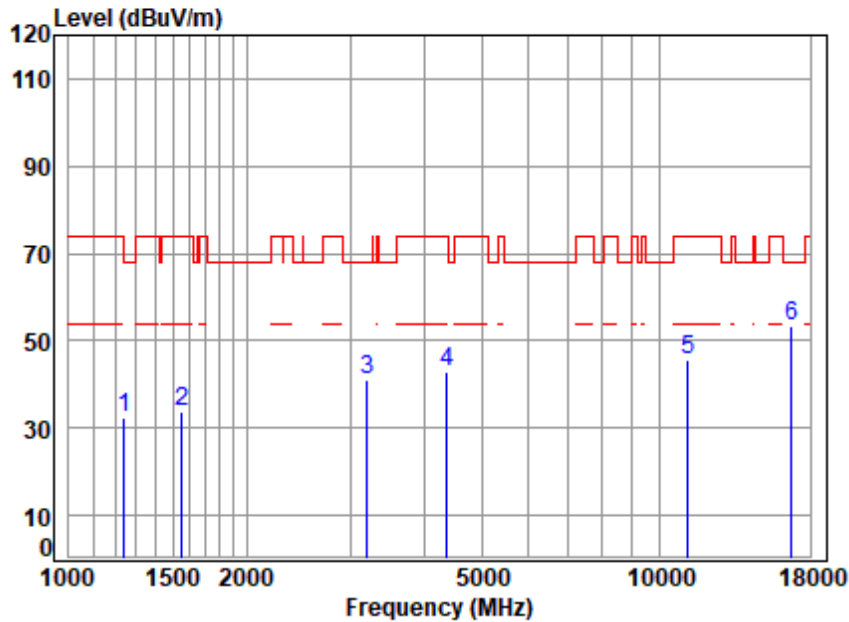

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5580 TX RSE
 Note : 5G WIFI 11A


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.74	24.99	61.57	65.39	32.55	68.20	-35.65	peak
2	1556.169	4.12	26.98	61.67	64.22	33.65	74.00	-40.35	peak
3	3196.094	6.25	32.87	61.36	63.28	41.04	68.20	-27.16	peak
4	4367.058	7.10	34.54	61.51	62.88	43.01	74.00	-30.99	peak
5	11160.000	11.77	37.62	62.54	58.57	45.42	74.00	-28.58	peak
6	p16740.000	14.15	42.78	62.17	58.70	53.46	68.20	-14.74	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

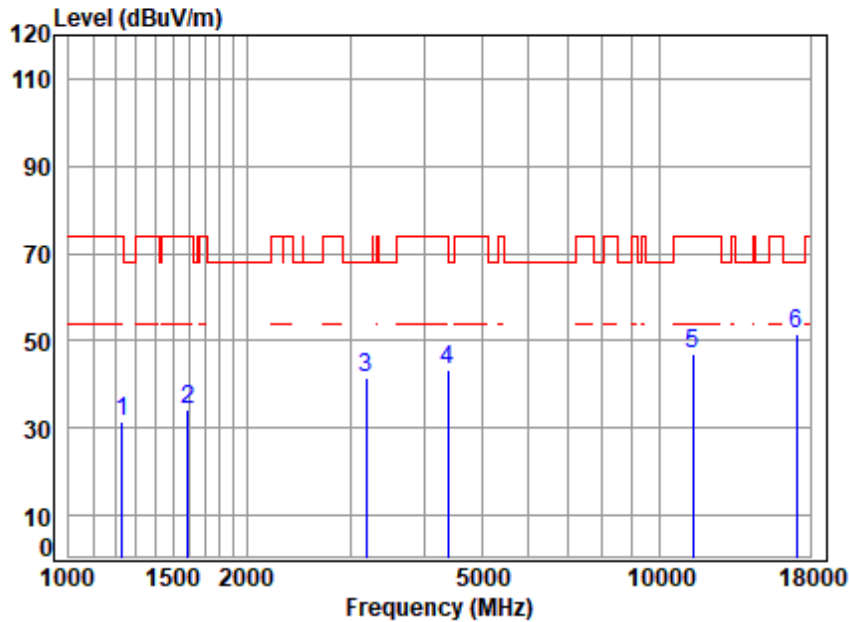

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5700 TX RSE
 Note : 5G WIFI 11A


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1231.345	3.72	24.84	61.57	64.56	31.55	74.00	-42.45 peak
2	1592.571	4.18	26.83	61.68	65.09	34.42	74.00	-39.58 peak
3	3186.869	6.25	32.79	61.37	63.68	41.35	68.20	-26.85 peak
4	4379.699	7.11	34.64	61.52	63.13	43.36	74.00	-30.64 peak
5	11400.000	11.90	37.70	62.60	60.07	47.07	74.00	-26.93 peak
6	p17100.000	14.44	43.10	61.79	55.93	51.68	68.20	-16.52 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

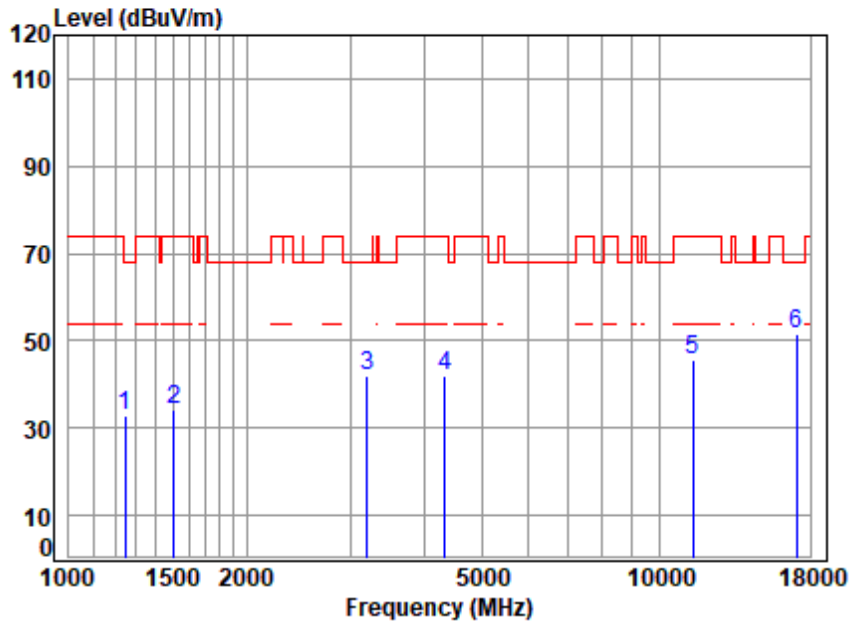

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5700 TX RSE
 Note : 5G WIFI 11A


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.74	25.04	61.57	65.48	32.69	68.20	-35.51	peak
2	1507.470	4.05	26.83	61.66	65.12	34.34	74.00	-39.66	peak
3	3196.094	6.25	32.87	61.36	64.14	41.90	68.20	-26.30	peak
4	4329.354	7.05	34.23	61.48	62.27	42.07	74.00	-31.93	peak
5	11400.000	11.90	37.70	62.60	58.80	45.80	74.00	-28.20	peak
6	p17100.000	14.44	43.10	61.79	55.93	51.68	68.20	-16.52	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

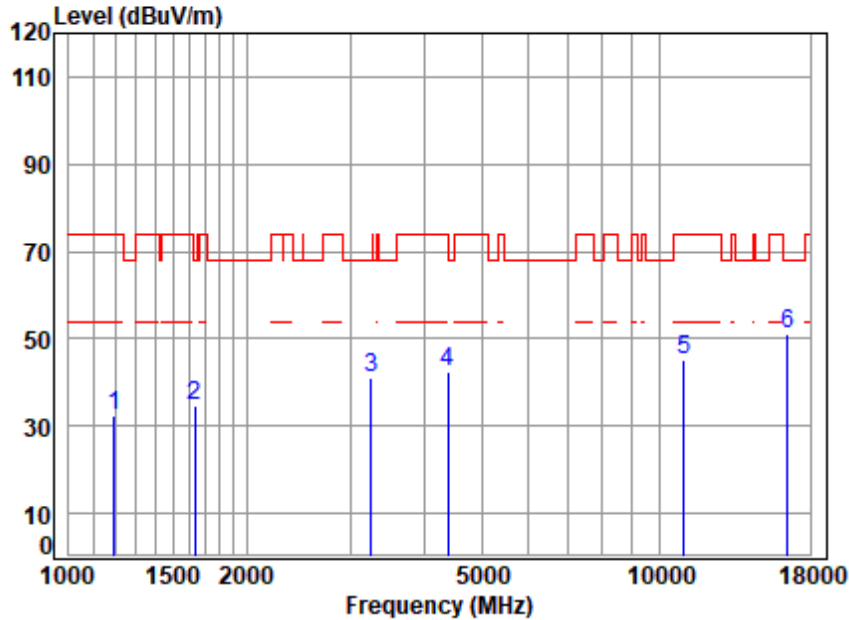

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5500 TX RSE
 Note : 5G WIFI 11N20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1192.811	3.67	24.33	61.55	66.06	32.51	74.00	-41.49	peak
2	1634.543	4.23	26.45	61.70	65.50	34.48	68.20	-33.72	peak
3	3252.005	6.31	32.06	61.35	64.09	41.11	68.20	-27.09	peak
4	4379.699	7.11	34.64	61.52	62.37	42.60	74.00	-31.40	peak
5	11000.000	11.68	37.50	62.51	58.58	45.25	74.00	-28.75	peak
6	p16500.000	13.99	42.10	62.42	57.51	51.18	68.20	-17.02	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

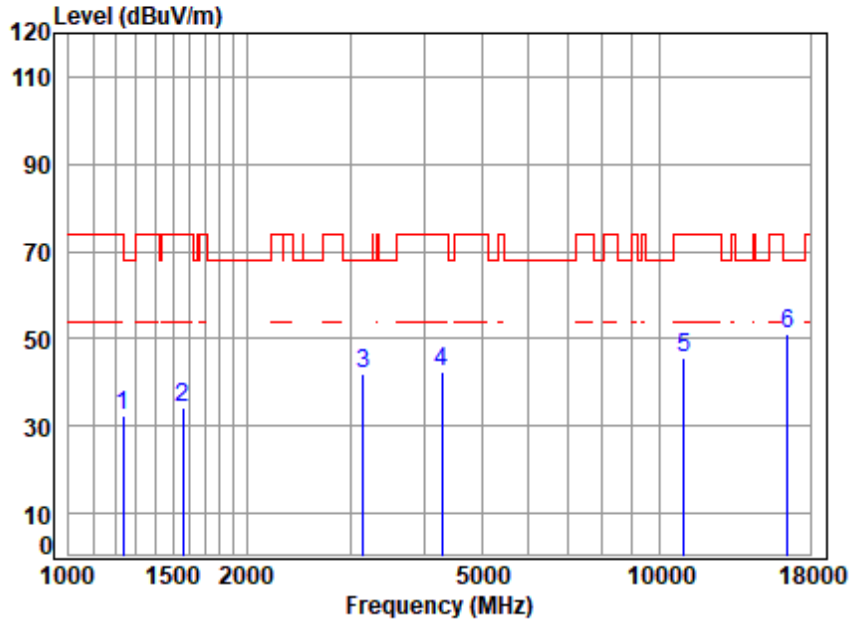


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5500 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.73	24.94	61.57	65.39	32.49	74.00	-41.51	peak
2	1560.673	4.13	26.96	61.68	64.88	34.29	74.00	-39.71	peak
3	3150.237	6.21	32.50	61.38	64.45	41.78	68.20	-26.42	peak
4	4279.589	6.99	33.92	61.43	63.11	42.59	74.00	-31.41	peak
5	11000.000	11.68	37.50	62.51	58.85	45.52	74.00	-28.48	peak
6	p16500.000	13.99	42.10	62.42	57.37	51.04	68.20	-17.16	peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

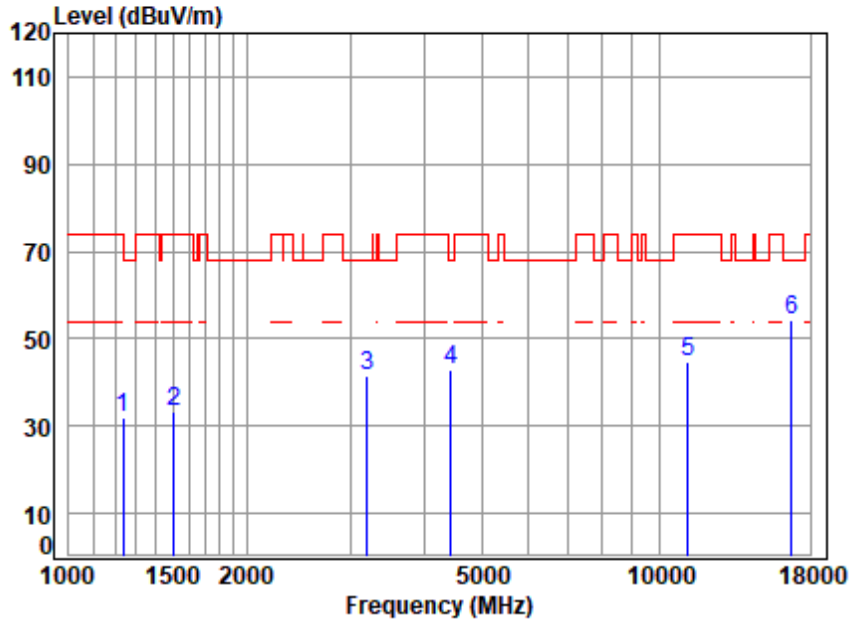


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5580 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1234.909	3.73	24.89	61.57	65.03	32.08	74.00	-41.92	peak
2	1507.470	4.05	26.83	61.66	64.07	33.29	74.00	-40.71	peak
3	3205.345	6.26	32.81	61.36	64.03	41.74	68.20	-26.46	peak
4	4443.453	7.19	34.28	61.58	62.91	42.80	68.20	-25.40	peak
5	11160.000	11.77	37.62	62.54	58.02	44.87	74.00	-29.13	peak
6	p16740.000	14.15	42.78	62.17	59.42	54.18	68.20	-14.02	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

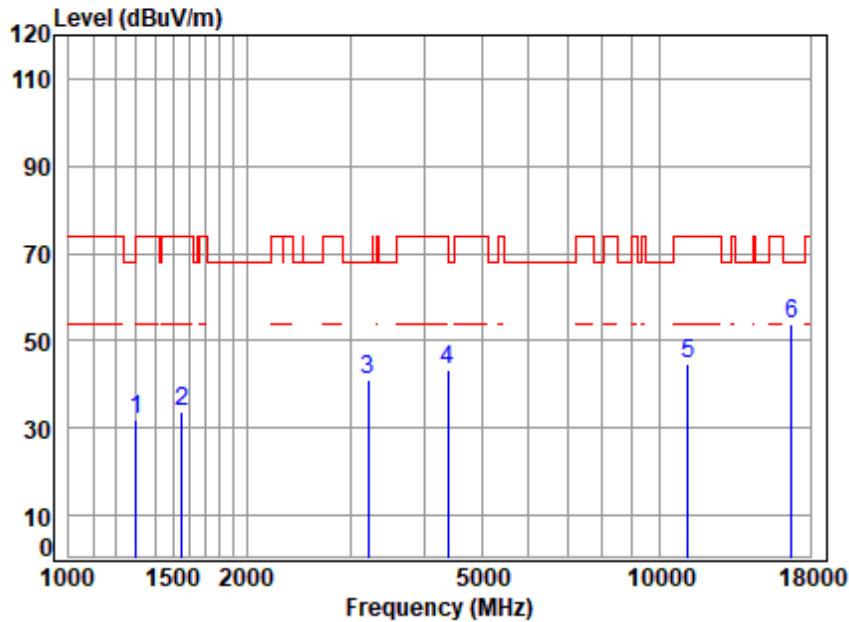

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5580 TX RSE
 Note : 5G WIFI 11N20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	3.81	24.79	61.59	65.05	32.06	74.00	-41.94	peak
2	1551.677	4.12	26.99	61.67	64.22	33.66	74.00	-40.34	peak
3	3214.623	6.27	32.67	61.36	63.32	40.90	68.20	-27.30	peak
4	4379.699	7.11	34.64	61.52	63.11	43.34	74.00	-30.66	peak
5	11160.000	11.77	37.62	62.54	58.01	44.86	74.00	-29.14	peak
6	p16740.000	14.15	42.78	62.17	59.00	53.76	68.20	-14.44	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

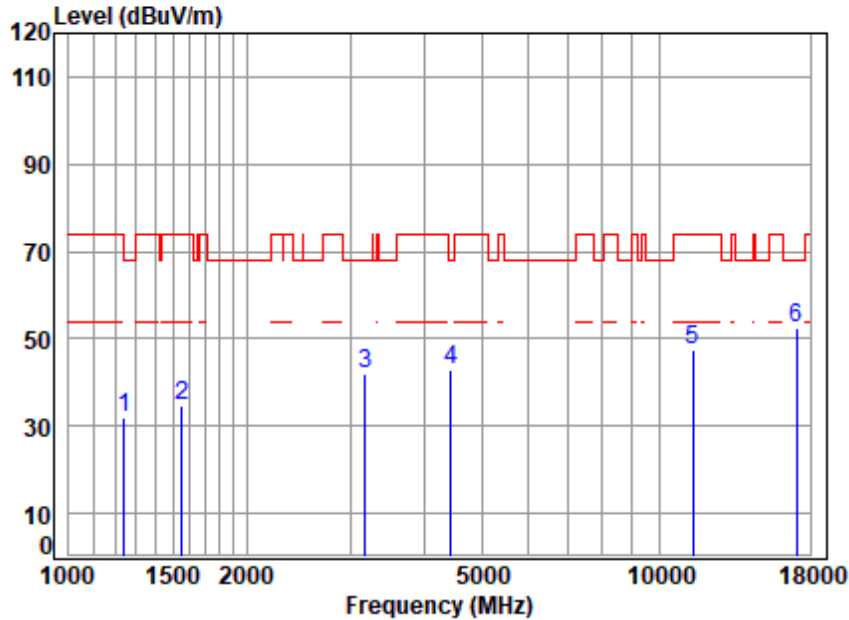


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5700 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.74	24.99	61.57	64.81	31.97	68.20	-36.23	peak
2	1556.169	4.12	26.98	61.67	65.32	34.75	74.00	-39.25	peak
3	3177.672	6.24	32.72	61.37	64.17	41.76	68.20	-26.44	peak
4	4443.453	7.19	34.28	61.58	63.05	42.94	68.20	-25.26	peak
5	11400.000	11.90	37.70	62.60	60.48	47.48	74.00	-26.52	peak
6	p17100.000	14.44	43.10	61.79	56.86	52.61	68.20	-15.59	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

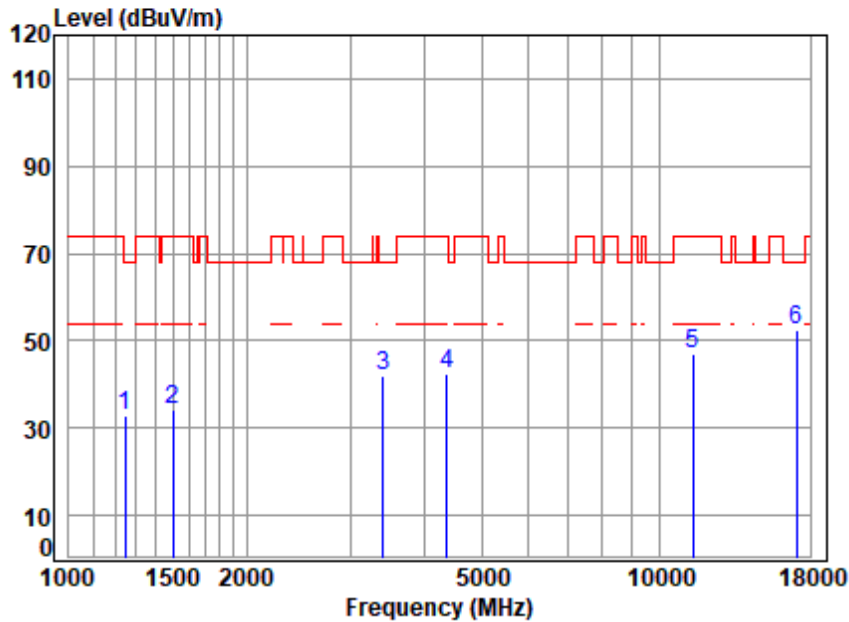


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5700 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.74	25.04	61.57	65.64	32.85	68.20	-35.35	peak
2	1503.119	4.04	26.81	61.66	65.24	34.43	74.00	-39.57	peak
3	3405.929	6.44	32.33	61.31	64.39	41.85	68.20	-26.35	peak
4	4367.058	7.10	34.54	61.51	62.53	42.66	74.00	-31.34	peak
5	11400.000	11.90	37.70	62.60	59.89	46.89	74.00	-27.11	peak
6	p17100.000	14.44	43.10	61.79	56.94	52.69	68.20	-15.51	peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

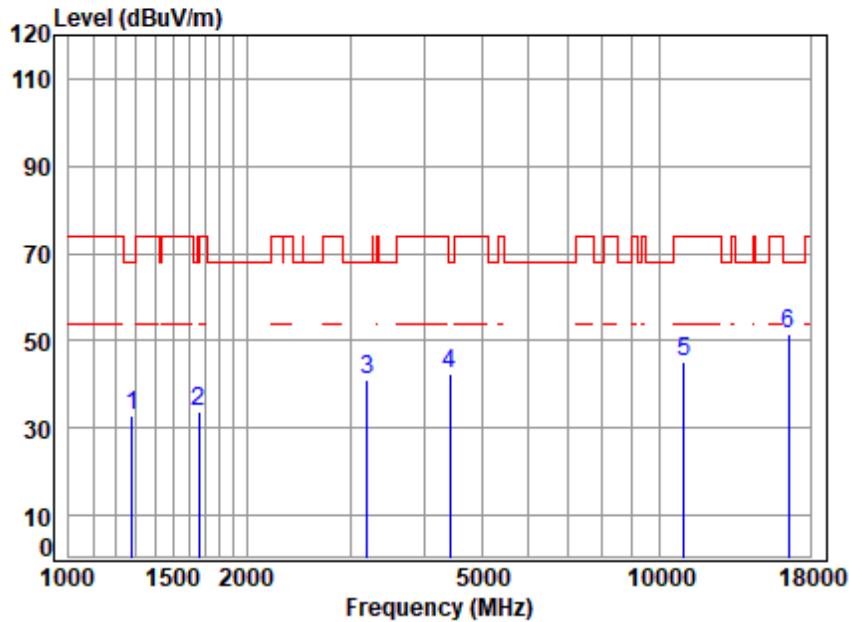


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5510 TX RSE
 Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1278.492	3.78	24.93	61.58	65.71	32.84	68.20	-35.36	peak
2	1658.337	4.27	26.28	61.70	64.93	33.78	68.20	-34.42	peak
3	3196.094	6.25	32.87	61.36	63.37	41.13	68.20	-27.07	peak
4	4417.841	7.16	34.59	61.56	62.10	42.29	68.20	-25.91	peak
5	11020.000	11.69	37.50	62.51	58.42	45.10	74.00	-28.90	peak
6	p16530.000	14.01	42.16	62.39	57.67	51.45	68.20	-16.75	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

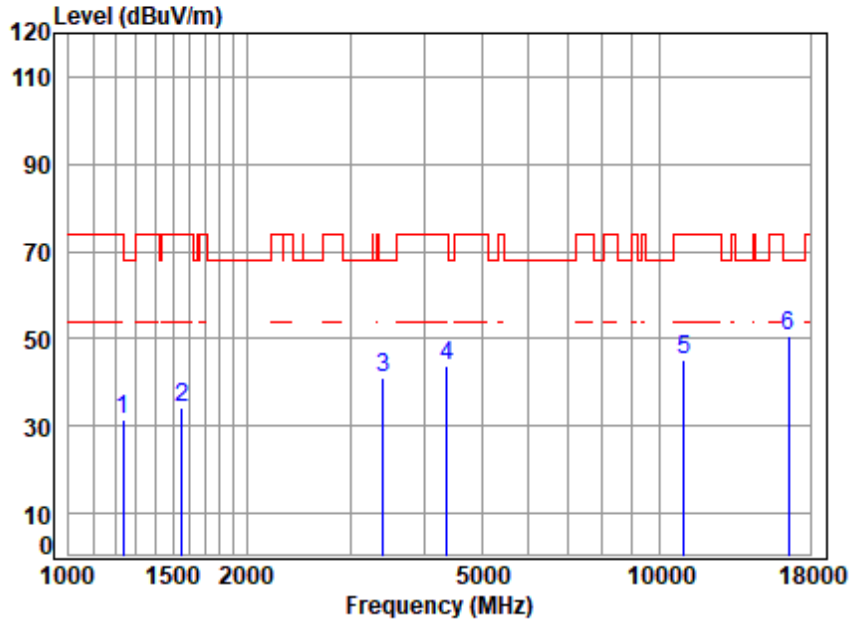

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5510 TX RSE
 Note : 5G WIFI 11N40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.73	24.94	61.57	64.60	31.70	74.00	-42.30	peak
2	1551.677	4.12	26.99	61.67	64.62	34.06	74.00	-39.94	peak
3	3405.929	6.44	32.33	61.31	63.55	41.01	68.20	-27.19	peak
4	4367.058	7.10	34.54	61.51	63.67	43.80	74.00	-30.20	peak
5	11020.000	11.69	37.50	62.51	58.30	44.98	74.00	-29.02	peak
6	p16530.000	14.01	42.16	62.39	56.72	50.50	68.20	-17.70	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

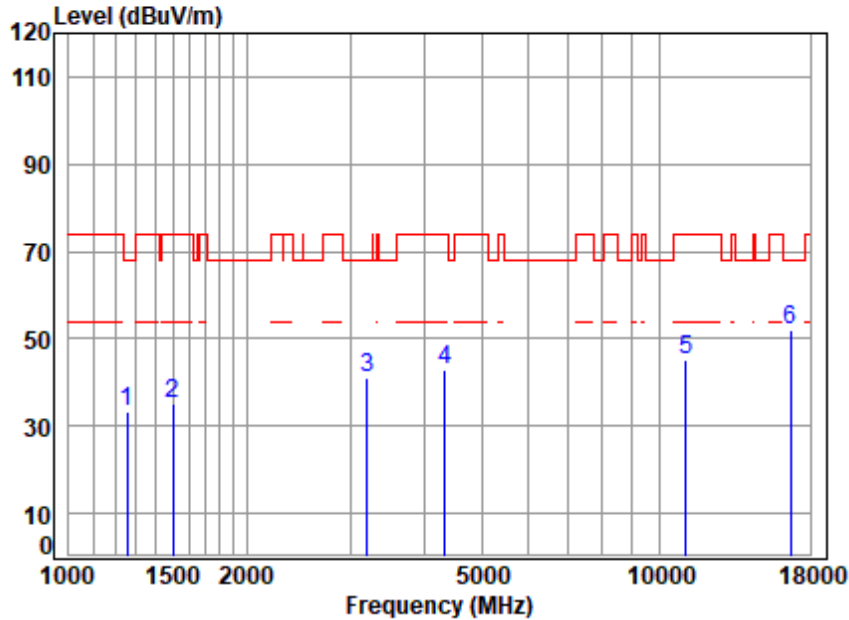


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5550 TX RSE
 Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	3.76	25.06	61.58	66.02	33.26	68.20	-34.94	peak
2	1503.119	4.04	26.81	61.66	65.92	35.11	74.00	-38.89	peak
3	3196.094	6.25	32.87	61.36	63.21	40.97	68.20	-27.23	peak
4	4329.354	7.05	34.23	61.48	62.87	42.67	74.00	-31.33	peak
5	11100.000	11.73	37.50	62.53	58.32	45.02	74.00	-28.98	peak
6	p16650.000	14.09	42.50	62.26	57.79	52.12	68.20	-16.08	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

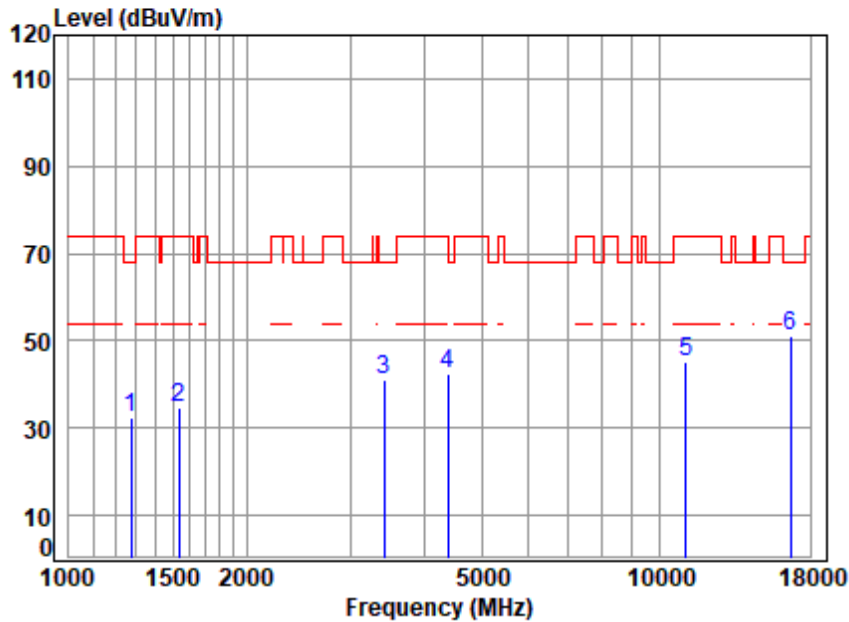


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5550 TX RSE
 Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1274.802	3.78	24.95	61.58	65.42	32.57	68.20	-35.63	peak
2	1533.841	4.09	26.94	61.67	65.13	34.49	74.00	-39.51	peak
3	3425.675	6.46	32.09	61.30	63.94	41.19	68.20	-27.01	peak
4	4392.376	7.13	34.74	61.53	62.28	42.62	74.00	-31.38	peak
5	11100.000	11.73	37.50	62.53	58.43	45.13	74.00	-28.87	peak
6	p16650.000	14.09	42.50	62.26	56.63	50.96	68.20	-17.24	peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

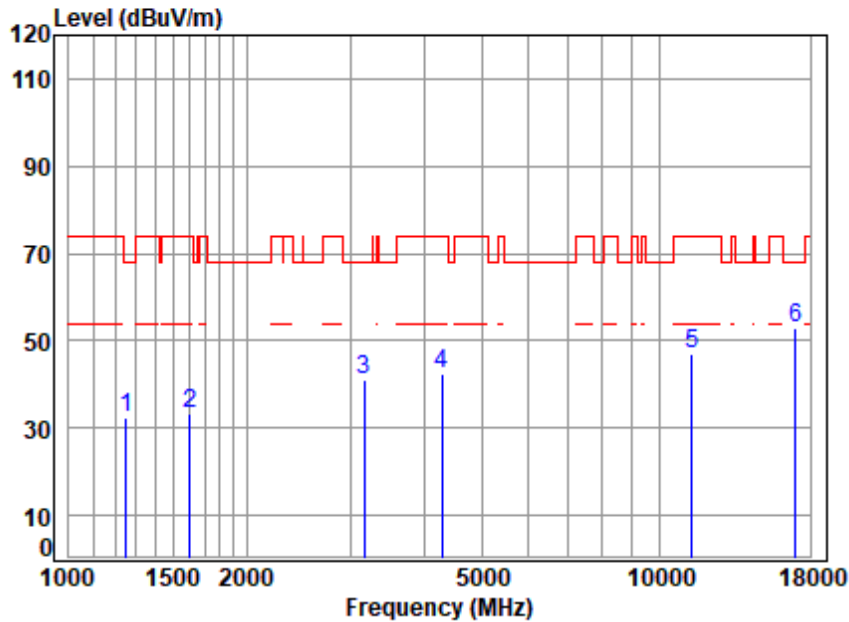


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5670 TX RSE
 Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	3.75	25.08	61.57	65.10	32.36	68.20	-35.84	peak
2	1601.804	4.19	26.78	61.69	64.23	33.51	74.00	-40.49	peak
3	3159.355	6.22	32.57	61.38	63.64	41.05	68.20	-27.15	peak
4	4279.589	6.99	33.92	61.43	62.73	42.21	74.00	-31.79	peak
5	11340.000	11.86	37.76	62.58	59.82	46.86	74.00	-27.14	peak
6	p17010.000	14.33	43.10	61.88	57.17	52.72	68.20	-15.48	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

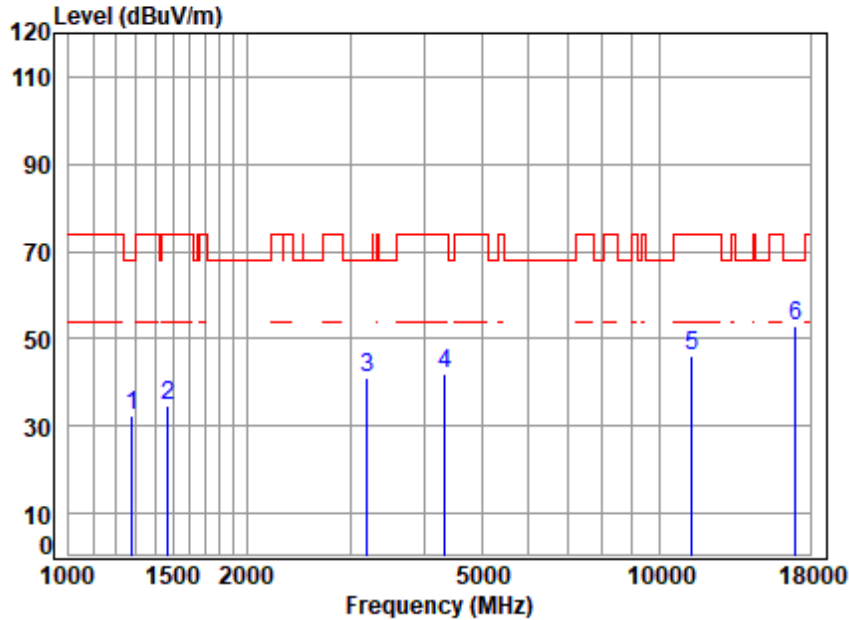


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5670 TX RSE
 Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1278.492	3.78	24.93	61.58	65.36	32.49	68.20	-35.71	peak
2	1473.013	4.01	26.04	61.65	66.06	34.46	74.00	-39.54	peak
3	3196.094	6.25	32.87	61.36	63.39	41.15	68.20	-27.05	peak
4	4329.354	7.05	34.23	61.48	62.26	42.06	74.00	-31.94	peak
5	11340.000	11.86	37.76	62.58	59.03	46.07	74.00	-27.93	peak
6	p17010.000	14.33	43.10	61.88	57.25	52.80	68.20	-15.40	peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

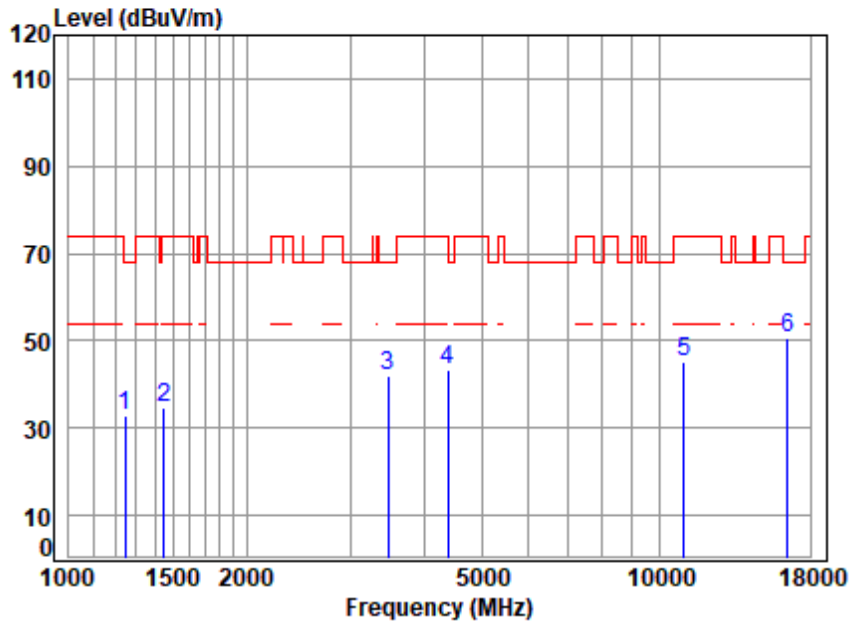


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5500 TX RSE
 Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.74	25.04	61.57	65.50	32.71	68.20	-35.49	peak
2	1451.878	3.99	25.45	61.64	66.83	34.63	74.00	-39.37	peak
3	3475.541	6.50	31.70	61.29	64.89	41.80	68.20	-26.40	peak
4	4392.376	7.13	34.74	61.53	62.80	43.14	74.00	-30.86	peak
5	11000.000	11.68	37.50	62.51	58.57	45.24	74.00	-28.76	peak
6	p16500.000	13.99	42.10	62.42	57.12	50.79	68.20	-17.41	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

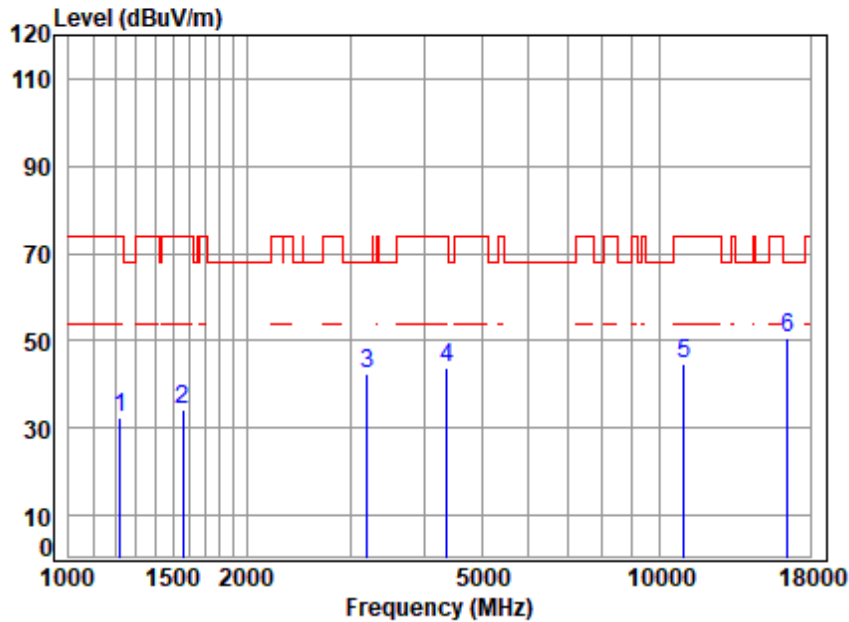


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5500 TX RSE
 Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1224.247	3.71	24.74	61.56	65.68	32.57	74.00	-41.43	peak
2	1560.673	4.13	26.96	61.68	64.98	34.39	74.00	-39.61	peak
3	3205.345	6.26	32.81	61.36	64.73	42.44	68.20	-25.76	peak
4	4367.058	7.10	34.54	61.51	63.79	43.92	74.00	-30.08	peak
5	11000.000	11.68	37.50	62.51	58.17	44.84	74.00	-29.16	peak
6	p16500.000	13.99	42.10	62.42	56.85	50.52	68.20	-17.68	peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

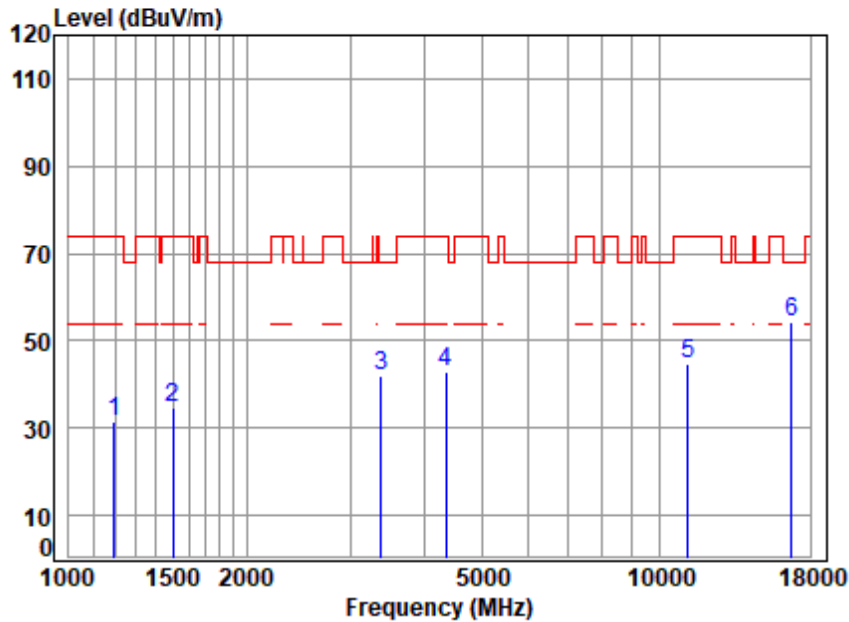

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5580 TX RSE
 Note : 5G WIFI 11AX20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1192.811	3.67	24.33	61.55	65.23	31.68	74.00	-42.32	peak
2	1503.119	4.04	26.81	61.66	65.63	34.82	74.00	-39.18	peak
3	3386.297	6.42	32.32	61.31	64.59	42.02	68.20	-26.18	peak
4	4354.454	7.08	34.44	61.50	62.89	42.91	74.00	-31.09	peak
5	11160.000	11.77	37.62	62.54	57.69	44.54	74.00	-29.46	peak
6	p16740.000	14.15	42.78	62.17	59.35	54.11	68.20	-14.09	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

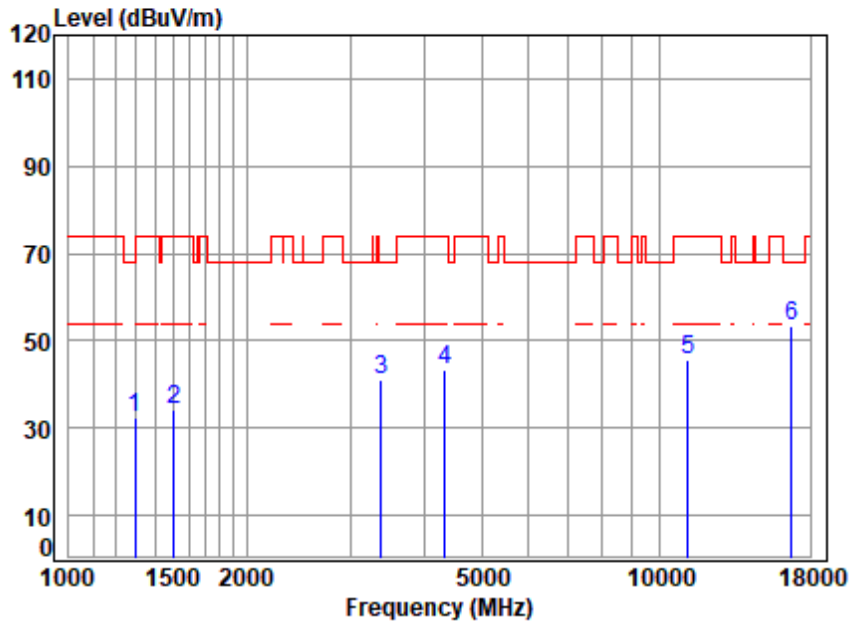


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5580 TX RSE
 Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	3.81	24.82	61.59	65.52	32.56	68.20	-35.64	peak
2	1507.470	4.05	26.83	61.66	64.98	34.20	74.00	-39.80	peak
3	3376.523	6.42	32.26	61.32	63.68	41.04	68.20	-27.16	peak
4	4329.354	7.05	34.23	61.48	63.36	43.16	74.00	-30.84	peak
5	11160.000	11.77	37.62	62.54	58.75	45.60	74.00	-28.40	peak
6	p16740.000	14.15	42.78	62.17	58.52	53.28	68.20	-14.92	peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

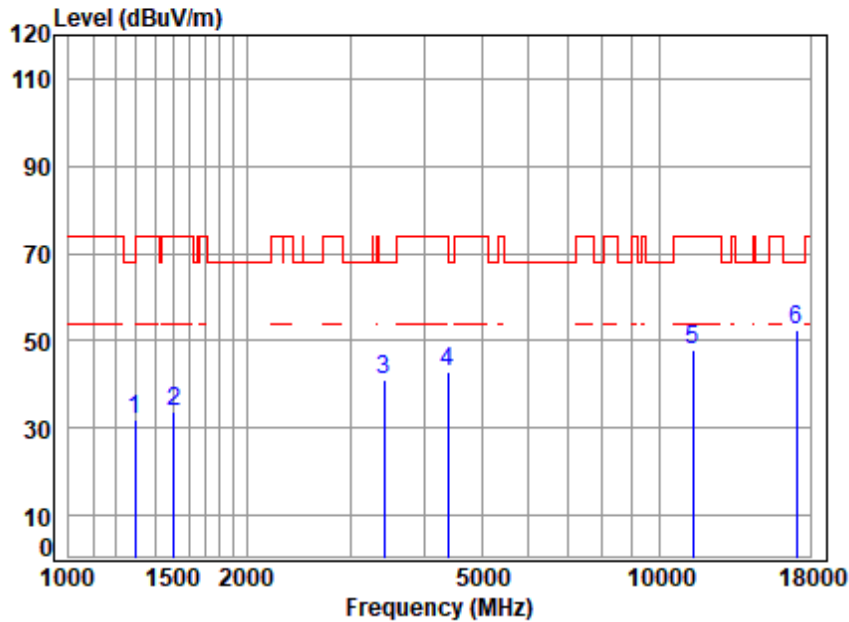

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5700 TX RSE
 Note : 5G WIFI 11AX20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1293.359	3.80	24.84	61.59	64.72	31.77	68.20	-36.43 peak
2	1507.470	4.05	26.83	61.66	64.54	33.76	74.00	-40.24 peak
3	3425.675	6.46	32.09	61.30	63.80	41.05	68.20	-27.15 peak
4	4379.699	7.11	34.64	61.52	62.73	42.96	74.00	-31.04 peak
5	11400.000	11.90	37.70	62.60	60.86	47.86	74.00	-26.14 peak
6	p17100.000	14.44	43.10	61.79	56.88	52.63	68.20	-15.57 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

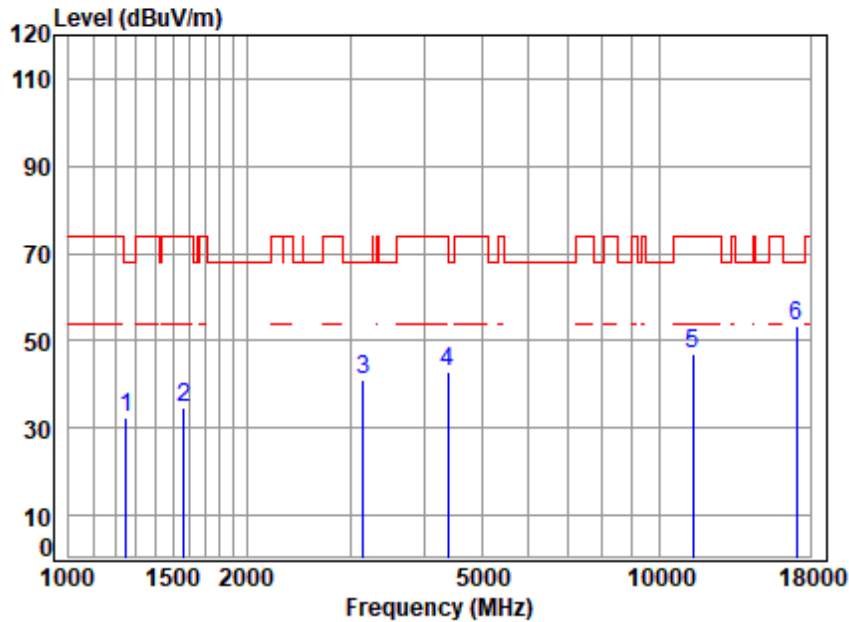


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5700 TX RSE
 Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1249.269	3.75	25.09	61.57	65.15	32.42	68.20	-35.78 peak
2	1569.721	4.14	26.92	61.68	65.17	34.55	74.00	-39.45 peak
3	3150.237	6.21	32.50	61.38	63.90	41.23	68.20	-26.97 peak
4	4379.699	7.11	34.64	61.52	62.51	42.74	74.00	-31.26 peak
5	11400.000	11.90	37.70	62.60	59.91	46.91	74.00	-27.09 peak
6	p17100.000	14.44	43.10	61.79	57.77	53.52	68.20	-14.68 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

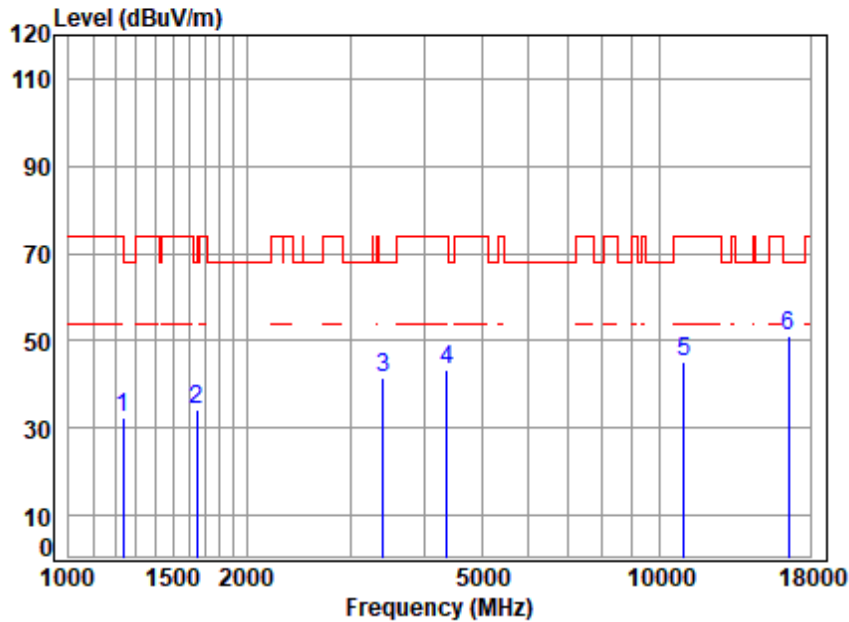

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5510 TX RSE
 Note : 5G WIFI 11AX40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.73	24.94	61.57	65.37	32.47	74.00	-41.53	peak
2	1648.778	4.25	26.31	61.70	65.55	34.41	68.20	-33.79	peak
3	3405.929	6.44	32.33	61.31	64.08	41.54	68.20	-26.66	peak
4	4367.058	7.10	34.54	61.51	63.14	43.27	74.00	-30.73	peak
5	11020.000	11.69	37.50	62.51	58.37	45.05	74.00	-28.95	peak
6	p16530.000	14.01	42.16	62.39	57.20	50.98	68.20	-17.22	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

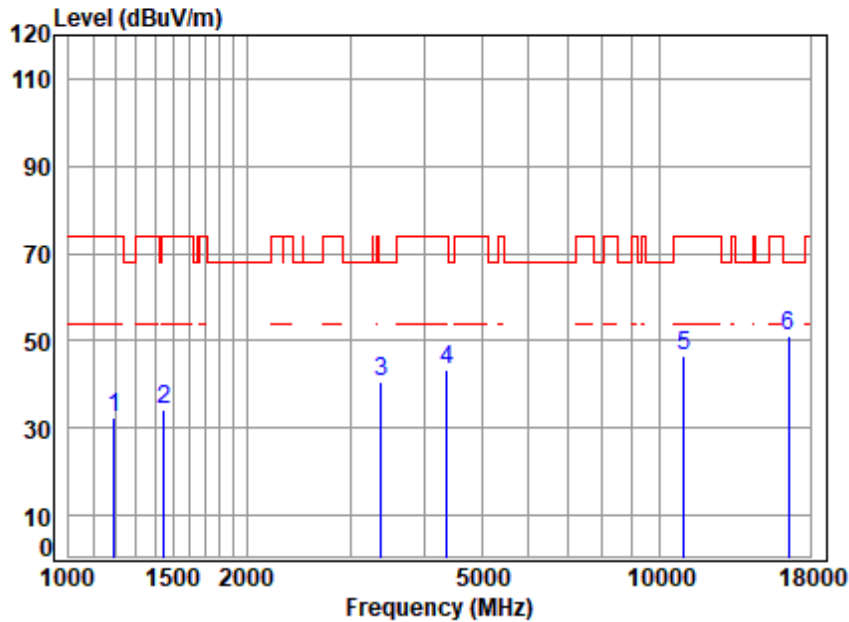


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5510 TX RSE
 Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1192.811	3.67	24.33	61.55	66.06	32.51	74.00	-41.49	peak
2	1447.688	3.98	25.36	61.64	66.42	34.12	74.00	-39.88	peak
3	3386.297	6.42	32.32	61.31	63.08	40.51	68.20	-27.69	peak
4	4367.058	7.10	34.54	61.51	63.34	43.47	74.00	-30.53	peak
5	11020.000	11.69	37.50	62.51	59.78	46.46	74.00	-27.54	peak
6	p16530.000	14.01	42.16	62.39	57.16	50.94	68.20	-17.26	peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:middle

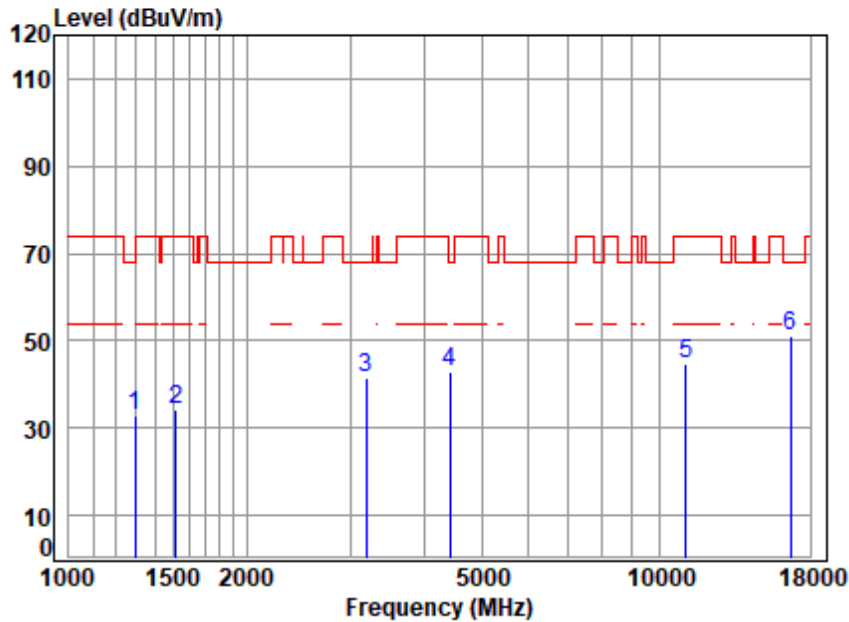


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5550 TX RSE
 Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	3.80	24.84	61.59	65.60	32.65	68.20	-35.55	peak
2	1516.210	4.06	26.86	61.66	65.06	34.32	74.00	-39.68	peak
3	3186.869	6.25	32.79	61.37	63.96	41.63	68.20	-26.57	peak
4	4417.841	7.16	34.59	61.56	62.69	42.88	68.20	-25.32	peak
5	11100.000	11.73	37.50	62.53	57.88	44.58	74.00	-29.42	peak
6	p16650.000	14.09	42.50	62.26	56.93	51.26	68.20	-16.94	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:middle

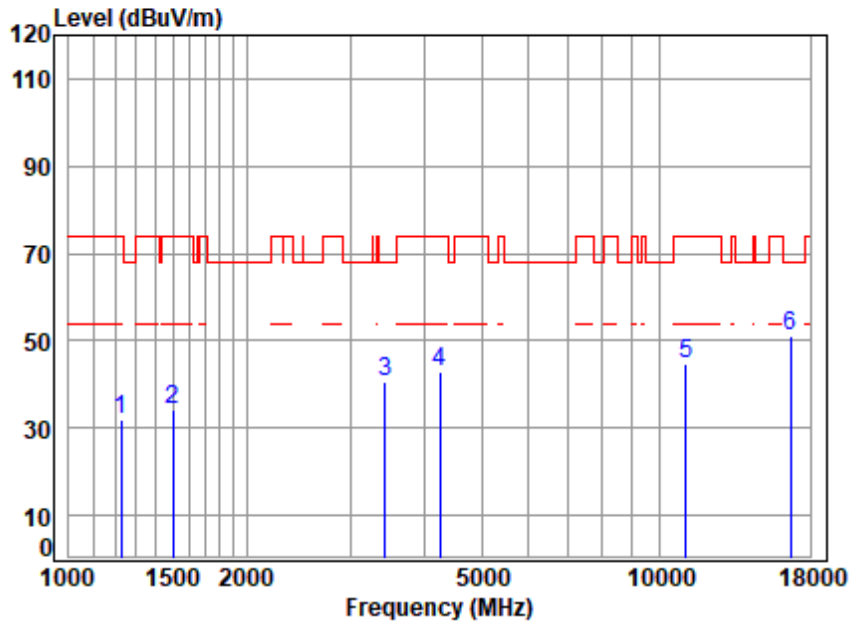


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5550 TX RSE
 Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1227.791	3.72	24.79	61.56	64.98	31.93	74.00	-42.07	peak
2	1498.781	4.04	26.77	61.66	64.87	34.02	74.00	-39.98	peak
3	3435.590	6.47	31.97	61.30	63.58	40.72	68.20	-27.48	peak
4	4242.641	6.95	33.80	61.40	63.60	42.95	74.00	-31.05	peak
5	11100.000	11.73	37.50	62.53	58.05	44.75	74.00	-29.25	peak
6	p16650.000	14.09	42.50	62.26	56.87	51.20	68.20	-17.00	peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

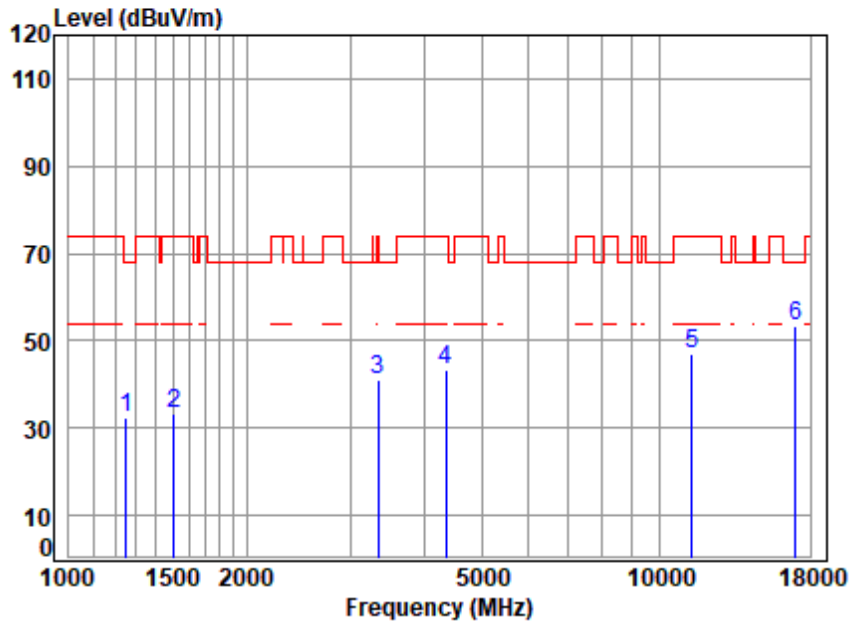

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5670 TX RSE
 Note : 5G WIFI 11AX40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1252.885	3.75	25.08	61.57	64.97	32.23	68.20	-35.97 peak
2	1507.470	4.05	26.83	61.66	64.22	33.44	74.00	-40.56 peak
3	3347.371	6.39	32.05	61.32	63.83	40.95	74.00	-33.05 peak
4	4354.454	7.08	34.44	61.50	63.19	43.21	74.00	-30.79 peak
5	11340.000	11.86	37.76	62.58	59.79	46.83	74.00	-27.17 peak
6	p17010.000	14.33	43.10	61.88	57.82	53.37	68.20	-14.83 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

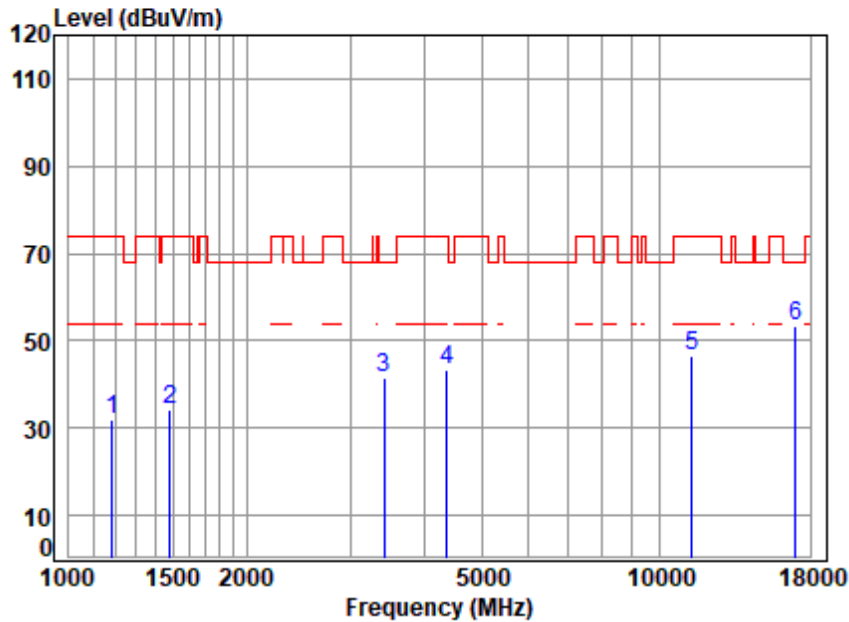

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5670 TX RSE
 Note : 5G WIFI 11AX40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1185.936	3.66	24.26	61.55	65.77	32.14	74.00	-41.86	peak
2	1485.841	4.02	26.40	61.65	65.57	34.34	74.00	-39.66	peak
3	3415.787	6.45	32.21	61.31	64.14	41.49	68.20	-26.71	peak
4	4367.058	7.10	34.54	61.51	63.37	43.50	74.00	-30.50	peak
5	11340.000	11.86	37.76	62.58	59.42	46.46	74.00	-27.54	peak
6	p17010.000	14.33	43.10	61.88	57.70	53.25	68.20	-14.95	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

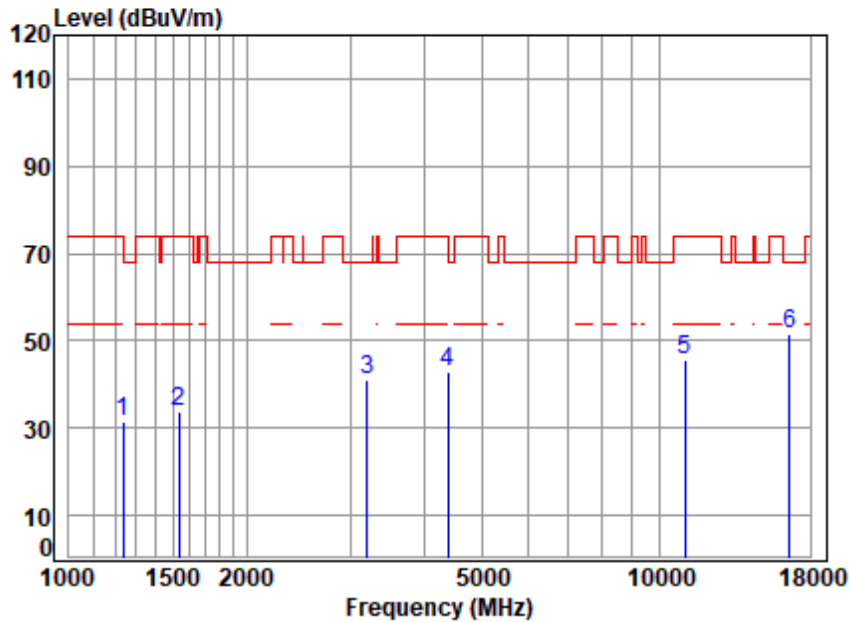


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5530 TX RSE
 Note : 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1238.483	3.73	24.94	61.57	64.34	31.44	74.00	-42.56 peak
2	1538.281	4.10	26.95	61.67	64.55	33.93	74.00	-40.07 peak
3	3196.094	6.25	32.87	61.36	63.32	41.08	68.20	-27.12 peak
4	4392.376	7.13	34.74	61.53	62.65	42.99	74.00	-31.01 peak
5	11060.000	11.71	37.50	62.52	59.10	45.79	74.00	-28.21 peak
6	p16590.000	14.05	42.28	62.32	57.76	51.77	68.20	-16.43 peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

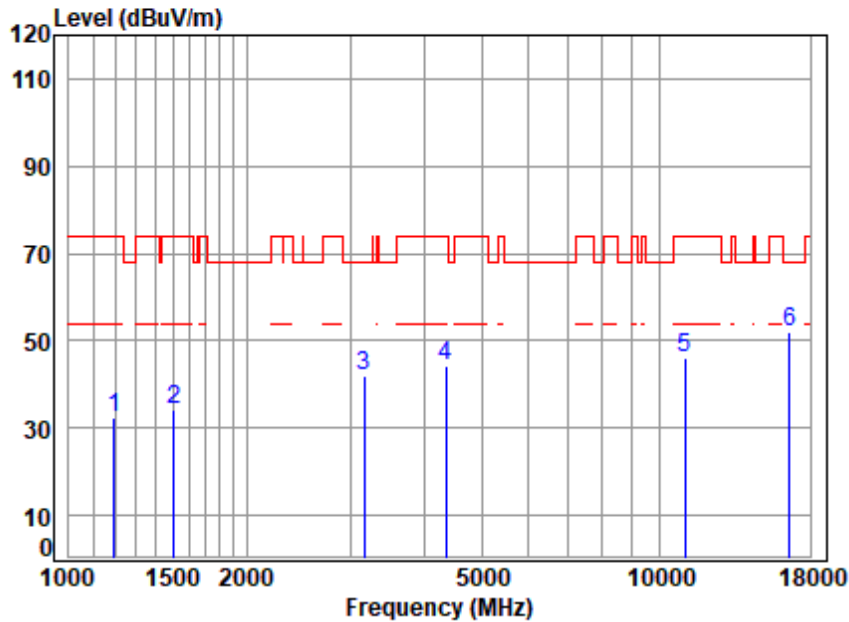


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5530 TX RSE
 Note : 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1192.811	3.67	24.33	61.55	66.13	74.00	-41.42	peak
2	1507.470	4.05	26.83	61.66	65.05	74.00	-39.73	peak
3	3159.355	6.22	32.57	61.38	64.40	68.20	-26.39	peak
4	4354.454	7.08	34.44	61.50	64.05	74.00	-29.93	peak
5	11060.000	11.71	37.50	62.52	59.47	74.00	-27.84	peak
6	p16590.000	14.05	42.28	62.32	57.87	68.20	-16.32	peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

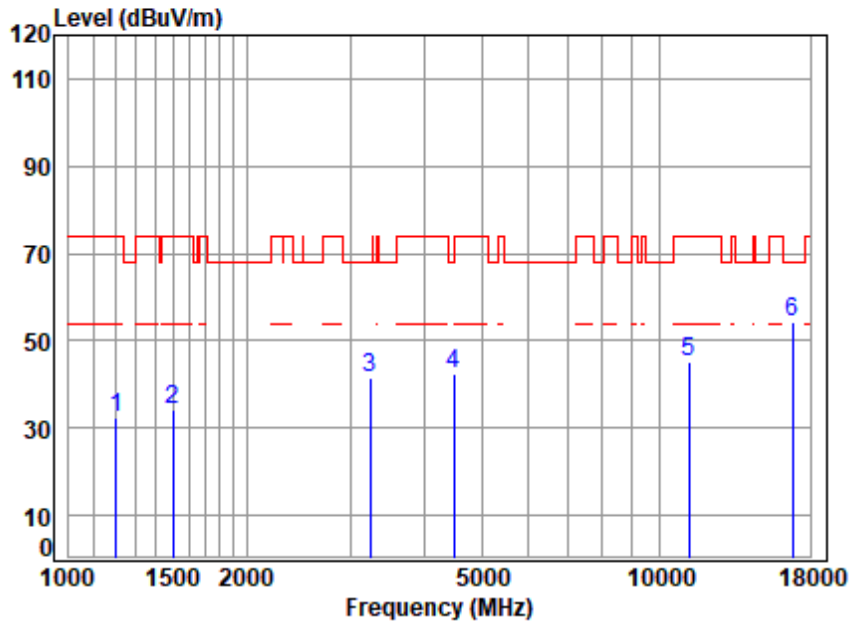

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5610 TX RSE
 Note : 5G WIFI 11AX80


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	3.69	24.44	61.56	65.61	32.18	74.00	-41.82	peak
2	1503.119	4.04	26.81	61.66	64.95	34.14	74.00	-39.86	peak
3	3242.619	6.30	32.22	61.35	64.37	41.54	68.20	-26.66	peak
4	4482.150	7.23	33.81	61.61	63.13	42.56	68.20	-25.64	peak
5	11220.000	11.80	37.72	62.56	58.24	45.20	74.00	-28.80	peak
6	p16830.000	14.21	42.99	62.07	59.11	54.24	68.20	-13.96	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

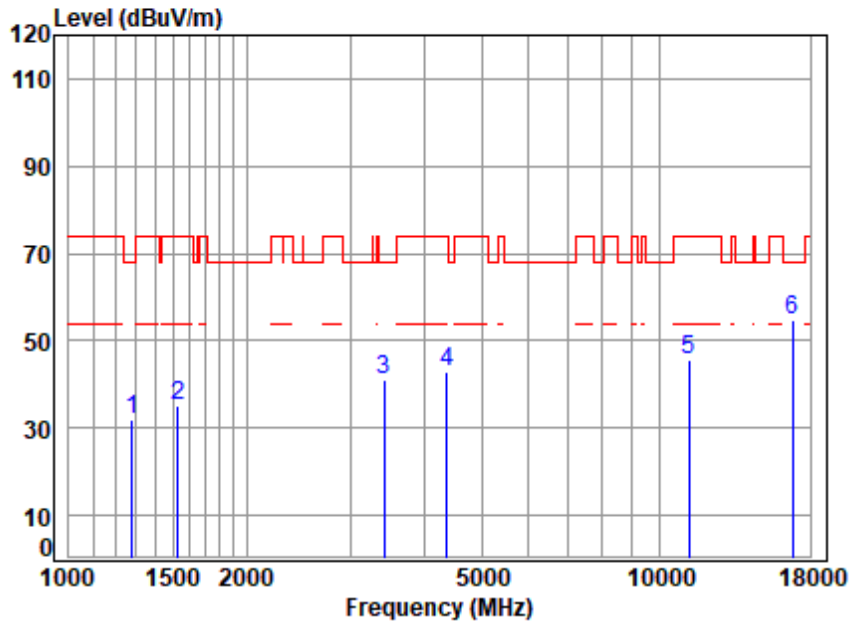


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5610 TX RSE
 Note : 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.79	24.91	61.58	64.71	31.83	68.20	-36.37	peak
2	1529.414	4.08	26.92	61.67	65.65	34.98	74.00	-39.02	peak
3	3415.787	6.45	32.21	61.31	63.74	41.09	68.20	-27.11	peak
4	4367.058	7.10	34.54	61.51	62.65	42.78	74.00	-31.22	peak
5	11220.000	11.80	37.72	62.56	58.60	45.56	74.00	-28.44	peak
6	p16830.000	14.21	42.99	62.07	59.61	54.74	68.20	-13.46	peak



Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

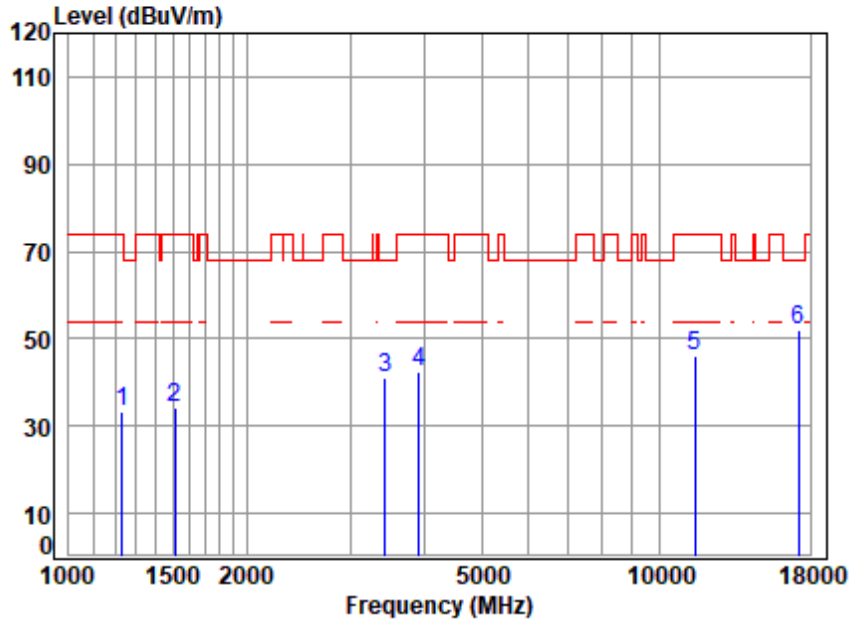

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5745 TX RSE
 Note : 5G WIFI 11A


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1231.345	3.72	24.84	61.57	66.16	33.15	74.00	-40.85	peak
2	1511.833	4.06	26.85	61.66	64.90	34.15	74.00	-39.85	peak
3	3435.590	6.47	31.97	61.30	63.85	40.99	68.20	-27.21	peak
4	3912.809	6.63	33.72	61.19	63.42	42.58	74.00	-31.42	peak
5	11490.000	11.94	37.79	62.62	58.94	46.05	74.00	-27.95	peak
6	p17235.000	14.59	43.03	61.65	56.00	51.97	68.20	-16.23	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

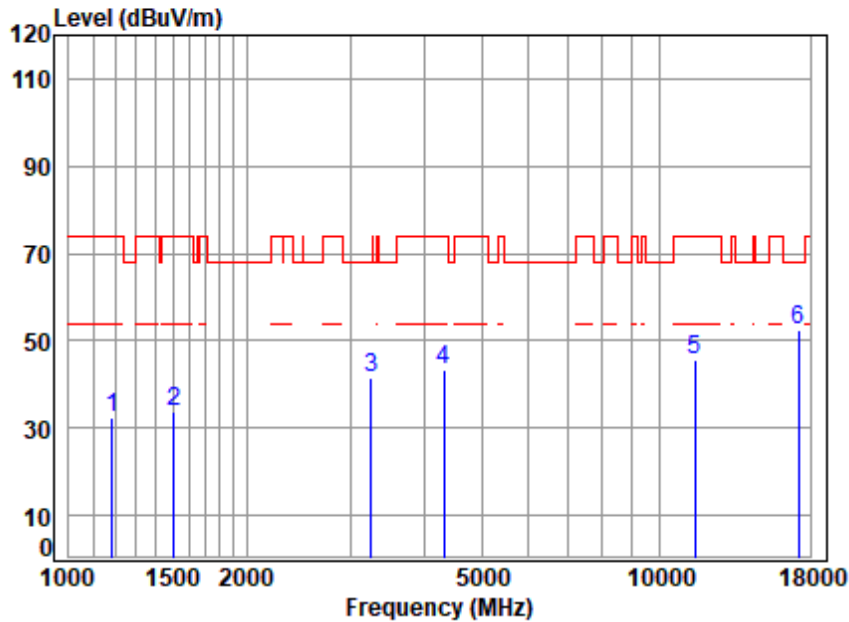


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5745 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1185.936	3.66	24.26	61.55	66.10	32.47	74.00	-41.53	peak
2	1507.470	4.05	26.83	61.66	64.49	33.71	74.00	-40.29	peak
3	3252.005	6.31	32.06	61.35	64.55	41.57	68.20	-26.63	peak
4	4316.859	7.04	34.13	61.47	63.53	43.23	74.00	-30.77	peak
5	11490.000	11.94	37.79	62.62	58.35	45.46	74.00	-28.54	peak
6	p17235.000	14.59	43.03	61.65	56.72	52.69	68.20	-15.51	peak



Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

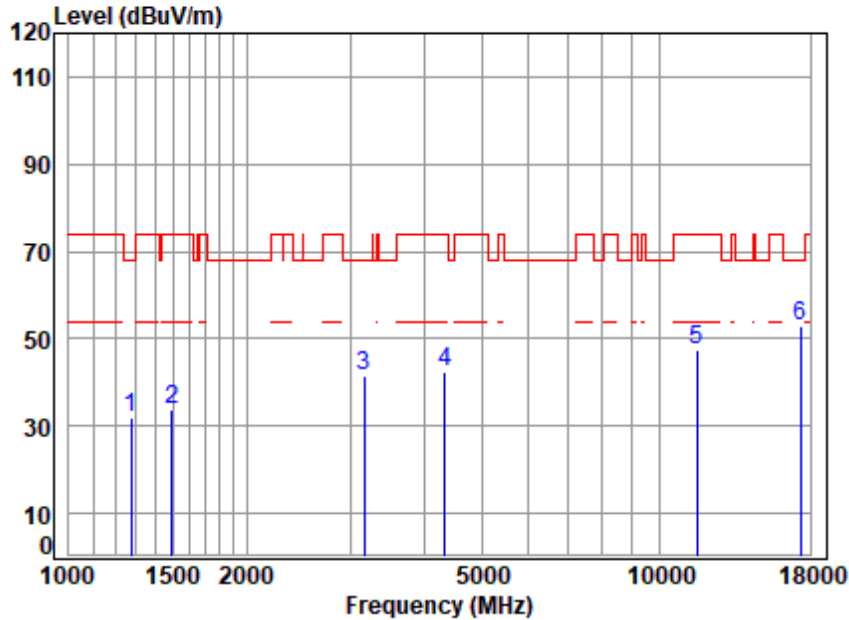


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5785 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1274.802	3.78	24.95	61.58	64.83	31.98	68.20	-36.22	peak
2	1494.455	4.03	26.64	61.66	64.83	33.84	74.00	-40.16	peak
3	3168.500	6.23	32.65	61.37	63.96	41.47	68.20	-26.73	peak
4	4341.886	7.07	34.34	61.49	62.63	42.55	74.00	-31.45	peak
5	11570.000	11.95	37.73	62.64	60.24	47.28	74.00	-26.72	peak
6	p17355.000	14.73	43.26	61.53	56.53	52.99	68.20	-15.21	peak



Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

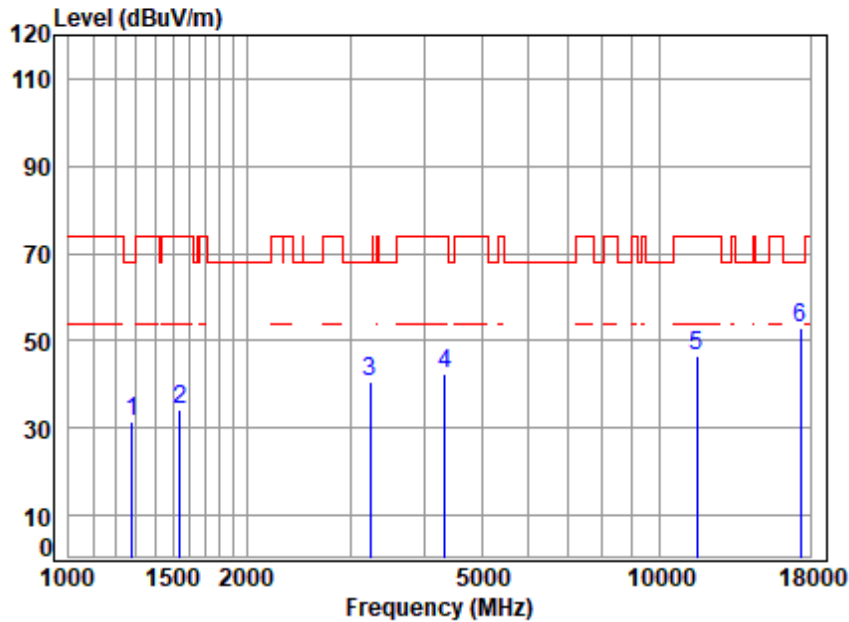


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5785 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.79	24.91	61.58	64.52	31.64	68.20	-36.56	peak
2	1542.733	4.10	26.97	61.67	64.68	34.08	74.00	-39.92	peak
3	3242.619	6.30	32.22	61.35	63.60	40.77	68.20	-27.43	peak
4	4341.886	7.07	34.34	61.49	62.73	42.65	74.00	-31.35	peak
5	11570.000	11.95	37.73	62.64	59.44	46.48	74.00	-27.52	peak
6	p17355.000	14.73	43.26	61.53	56.61	53.07	68.20	-15.13	peak



Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

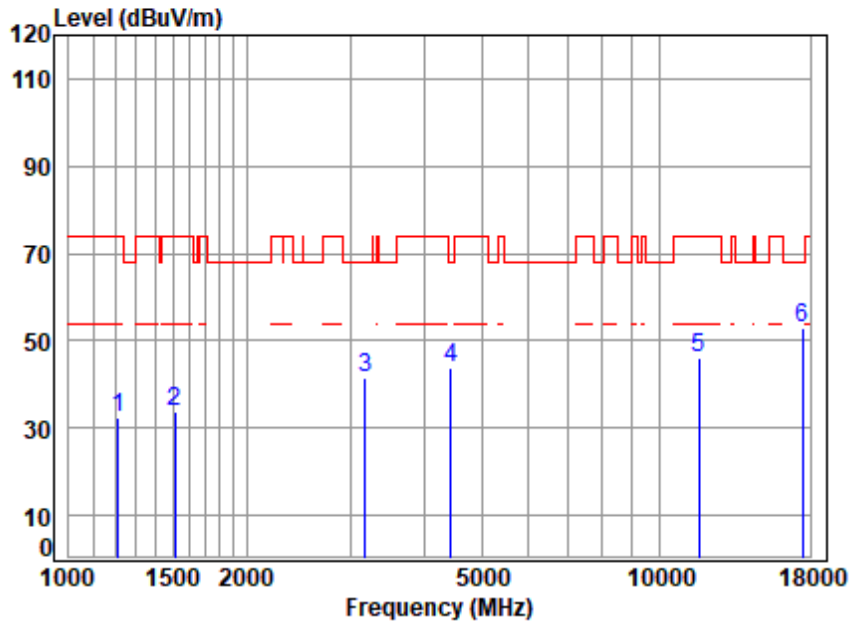

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5825 TX RSE
 Note : 5G WIFI 11A


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1210.174	3.70	24.54	61.56	65.75	32.43	74.00	-41.57	peak
2	1511.833	4.06	26.85	61.66	64.31	33.56	74.00	-40.44	peak
3	3177.672	6.24	32.72	61.37	63.81	41.40	68.20	-26.80	peak
4	4443.453	7.19	34.28	61.58	64.03	43.92	68.20	-24.28	peak
5	11650.000	11.95	37.80	62.65	58.90	46.00	74.00	-28.00	peak
6	p17475.000	14.86	43.40	61.41	56.22	53.07	68.20	-15.13	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

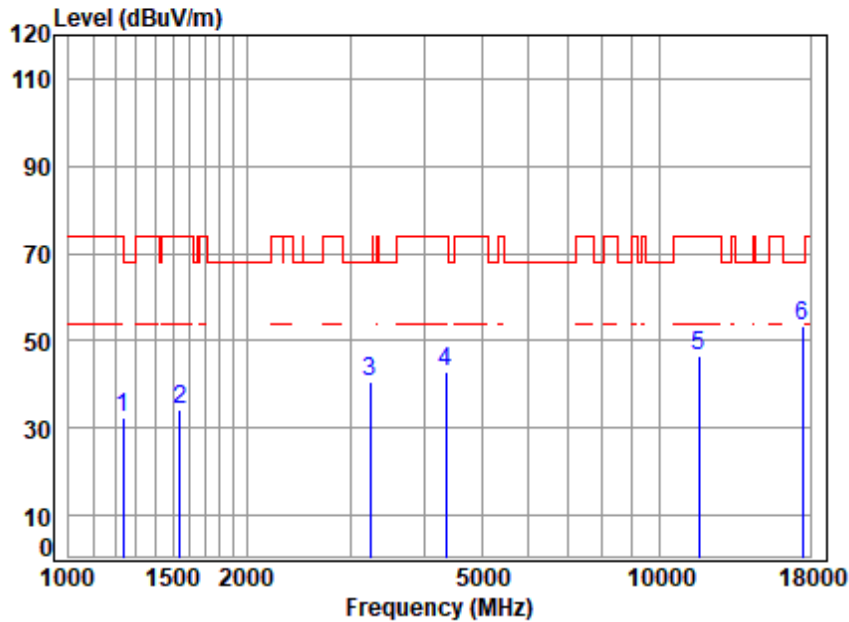

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5825 TX RSE
 Note : 5G WIFI 11A


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1234.909	3.73	24.89	61.57	65.30	32.35	74.00	-41.65	peak
2	1542.733	4.10	26.97	61.67	64.64	34.04	74.00	-39.96	peak
3	3242.619	6.30	32.22	61.35	63.36	40.53	68.20	-27.67	peak
4	4354.454	7.08	34.44	61.50	62.83	42.85	74.00	-31.15	peak
5	11650.000	11.95	37.80	62.65	59.53	46.63	74.00	-27.37	peak
6	p17475.000	14.86	43.40	61.41	56.55	53.40	68.20	-14.80	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

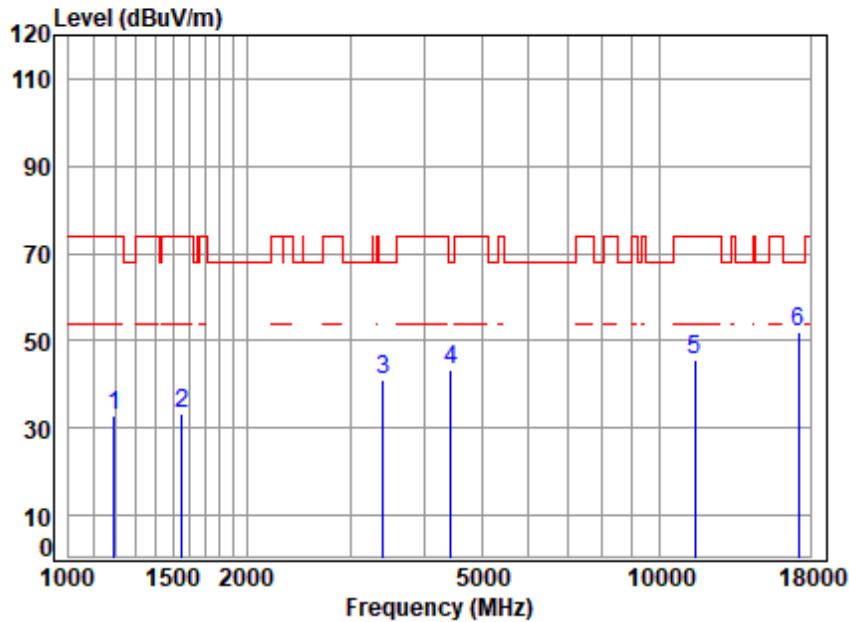


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5745 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1192.811	3.67	24.33	61.55	66.25	32.70	74.00	-41.30	peak
2	1556.169	4.12	26.98	61.67	64.05	33.48	74.00	-40.52	peak
3	3405.929	6.44	32.33	61.31	63.71	41.17	68.20	-27.03	peak
4	4430.628	7.17	34.43	61.57	63.09	43.12	68.20	-25.08	peak
5	11490.000	11.94	37.79	62.62	58.71	45.82	74.00	-28.18	peak
6	p17235.000	14.59	43.03	61.65	56.07	52.04	68.20	-16.16	peak



Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

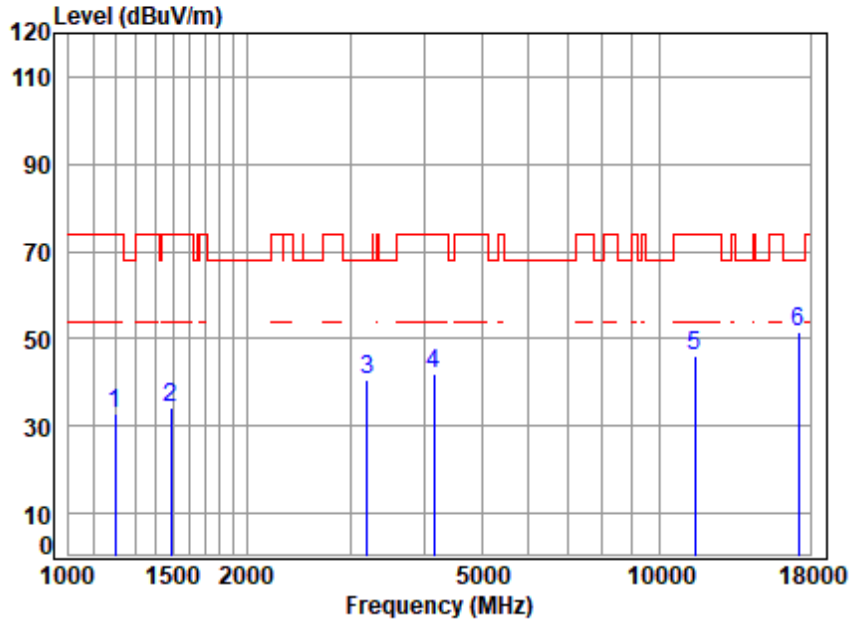


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5745 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	3.68	24.36	61.55	66.22	32.71	74.00	-41.29	peak
2	1490.142	4.03	26.52	61.65	65.13	34.03	74.00	-39.97	peak
3	3196.094	6.25	32.87	61.36	62.70	40.46	68.20	-27.74	peak
4	4145.664	6.83	33.73	61.31	62.95	42.20	74.00	-31.80	peak
5	11490.000	11.94	37.79	62.62	59.06	46.17	74.00	-27.83	peak
6	p17235.000	14.59	43.03	61.65	55.73	51.70	68.20	-16.50	peak



Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

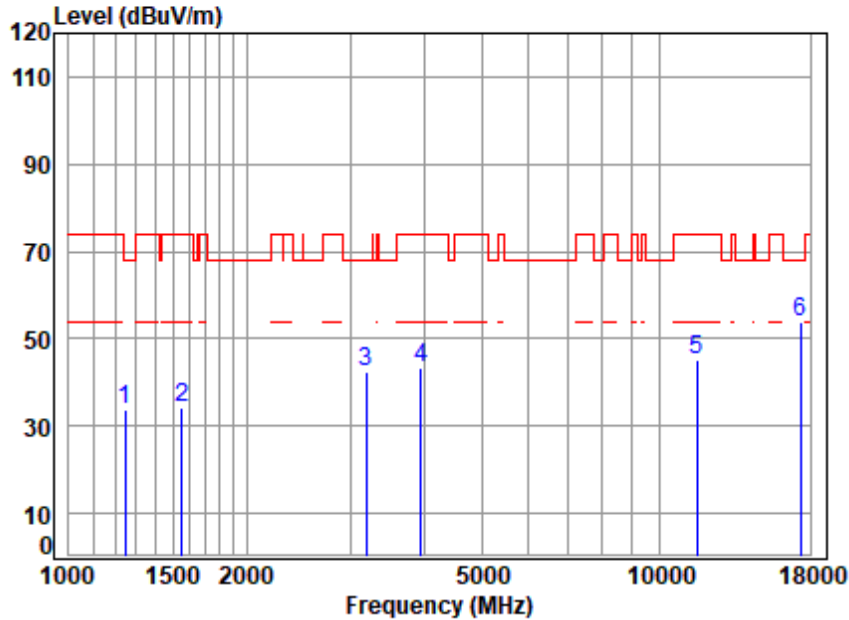

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5785 TX RSE
 Note : 5G WIFI 11N20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.74	25.04	61.57	66.70	33.91	68.20	-34.29	peak
2	1556.169	4.12	26.98	61.67	65.00	34.43	74.00	-39.57	peak
3	3186.869	6.25	32.79	61.37	64.73	42.40	68.20	-25.80	peak
4	3946.885	6.64	33.52	61.18	64.29	43.27	74.00	-30.73	peak
5	11570.000	11.95	37.73	62.64	58.07	45.11	74.00	-28.89	peak
6	p17355.000	14.73	43.26	61.53	57.36	53.82	68.20	-14.38	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

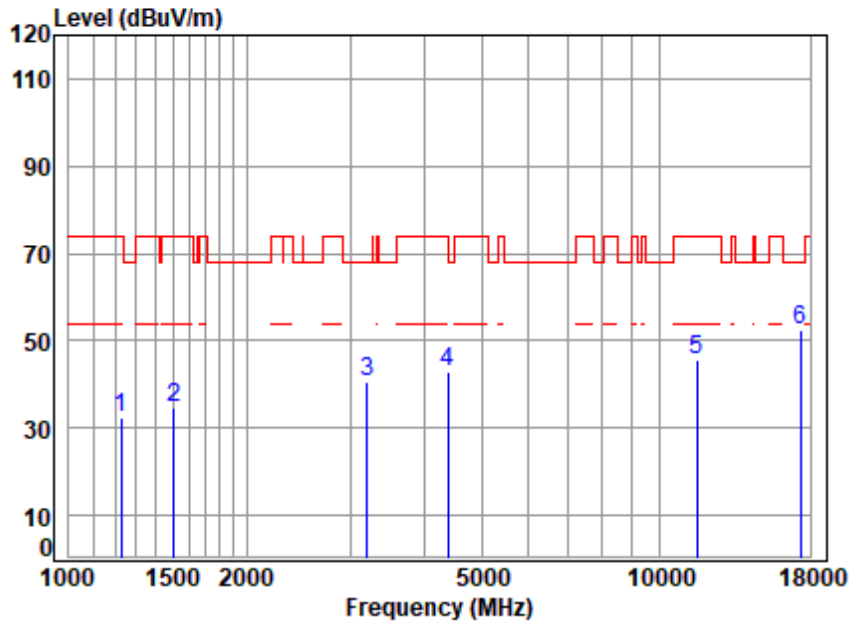

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5785 TX RSE
 Note : 5G WIFI 11N20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1227.791	3.72	24.79	61.56	65.22	32.17	74.00	-41.83	peak
2	1507.470	4.05	26.83	61.66	65.60	34.82	74.00	-39.18	peak
3	3205.345	6.26	32.81	61.36	62.95	40.66	68.20	-27.54	peak
4	4392.376	7.13	34.74	61.53	62.73	43.07	74.00	-30.93	peak
5	11570.000	11.95	37.73	62.64	58.70	45.74	74.00	-28.26	peak
6	p17355.000	14.73	43.26	61.53	56.10	52.56	68.20	-15.64	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

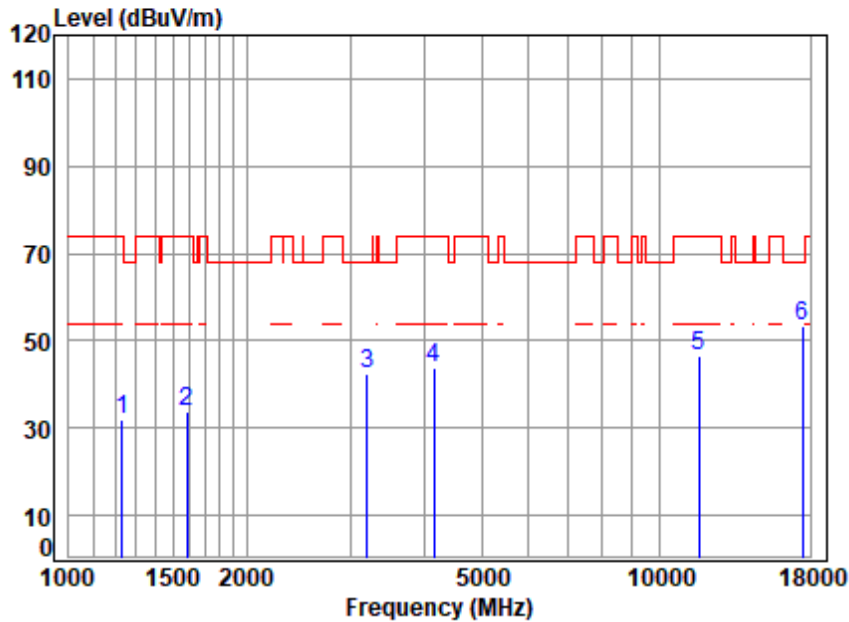


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5825 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1231.345	3.72	24.84	61.57	64.88	31.87	74.00	-42.13	peak
2	1587.975	4.17	26.85	61.68	64.48	33.82	74.00	-40.18	peak
3	3196.094	6.25	32.87	61.36	64.47	42.23	68.20	-25.97	peak
4	4145.664	6.83	33.73	61.31	64.39	43.64	74.00	-30.36	peak
5	11650.000	11.95	37.80	62.65	59.49	46.59	74.00	-27.41	peak
6	p17475.000	14.86	43.40	61.41	56.70	53.55	68.20	-14.65	peak



Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

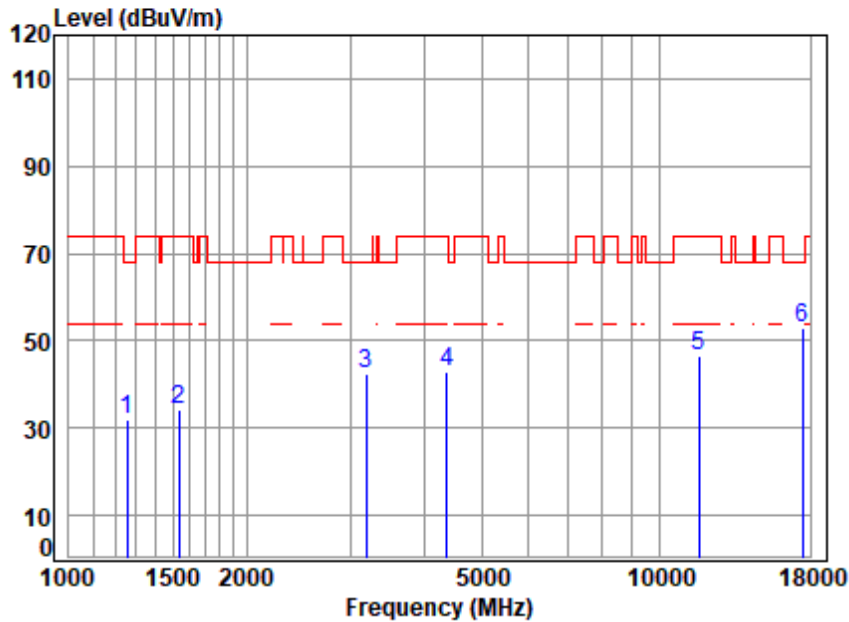

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5825 TX RSE
 Note : 5G WIFI 11N20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	3.76	25.06	61.58	64.69	31.93	68.20	-36.27	peak
2	1538.281	4.10	26.95	61.67	64.87	34.25	74.00	-39.75	peak
3	3186.869	6.25	32.79	61.37	64.55	42.22	68.20	-25.98	peak
4	4367.058	7.10	34.54	61.51	62.55	42.68	74.00	-31.32	peak
5	11650.000	11.95	37.80	62.65	59.45	46.55	74.00	-27.45	peak
6	p17475.000	14.86	43.40	61.41	55.91	52.76	68.20	-15.44	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

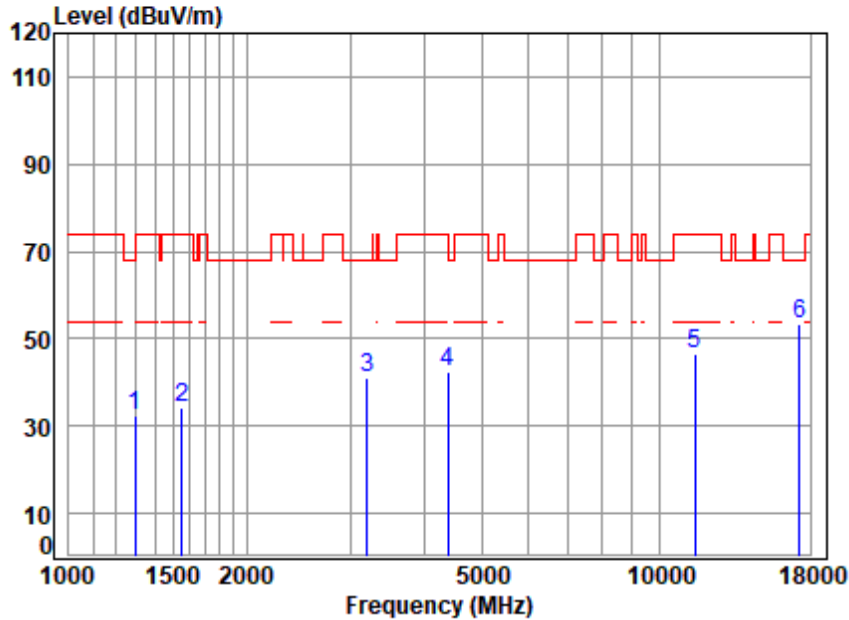

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5755 TX RSE
 Note : 5G WIFI 11N40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	3.81	24.82	61.59	65.45	32.49	68.20	-35.71	peak
2	1551.677	4.12	26.99	61.67	64.65	34.09	74.00	-39.91	peak
3	3196.094	6.25	32.87	61.36	63.19	40.95	68.20	-27.25	peak
4	4392.376	7.13	34.74	61.53	61.98	42.32	74.00	-31.68	peak
5	11510.000	11.95	37.79	62.62	59.27	46.39	74.00	-27.61	peak
6	p17265.000	14.62	43.06	61.62	57.44	53.50	68.20	-14.70	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

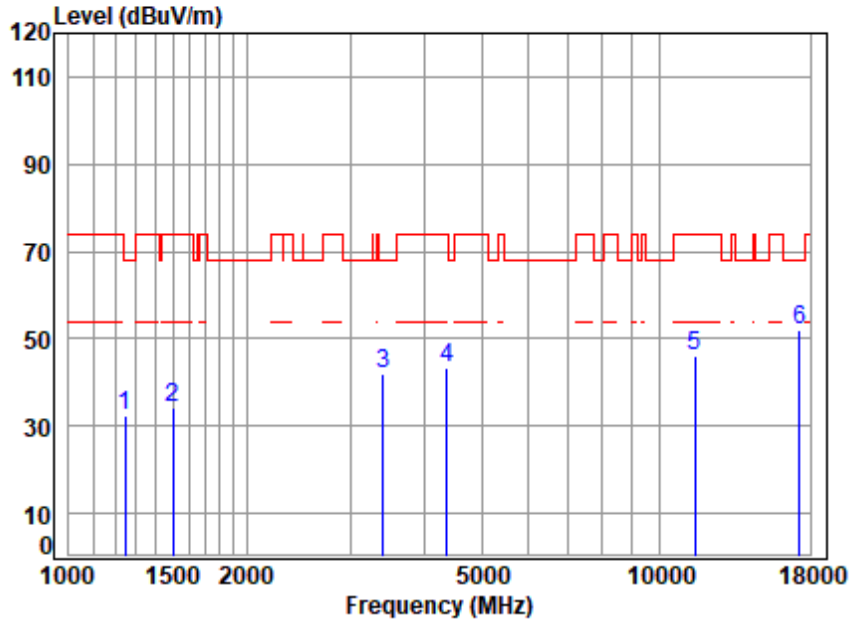


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5755 TX RSE
 Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.74	25.04	61.57	65.16	32.37	68.20	-35.83	peak
2	1503.119	4.04	26.81	61.66	65.13	34.32	74.00	-39.68	peak
3	3405.929	6.44	32.33	61.31	64.32	41.78	68.20	-26.42	peak
4	4367.058	7.10	34.54	61.51	63.19	43.32	74.00	-30.68	peak
5	11510.000	11.95	37.79	62.62	58.97	46.09	74.00	-27.91	peak
6	p17265.000	14.62	43.06	61.62	55.93	51.99	68.20	-16.21	peak



Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

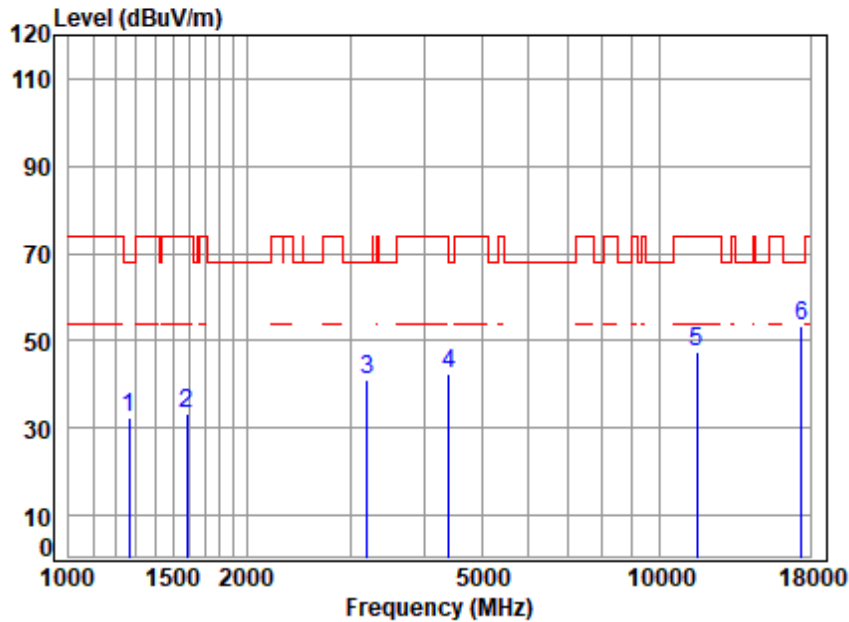


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5795 TX RSE
 Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	3.77	25.02	61.58	65.18	32.39	68.20	-35.81	peak
2	1583.392	4.16	26.87	61.68	63.91	33.26	74.00	-40.74	peak
3	3205.345	6.26	32.81	61.36	63.57	41.28	68.20	-26.92	peak
4	4405.090	7.14	34.74	61.55	61.88	42.21	68.20	-25.99	peak
5	11590.000	11.95	37.71	62.64	60.48	47.50	74.00	-26.50	peak
6	p17385.000	14.76	43.35	61.50	56.63	53.24	68.20	-14.96	peak



Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

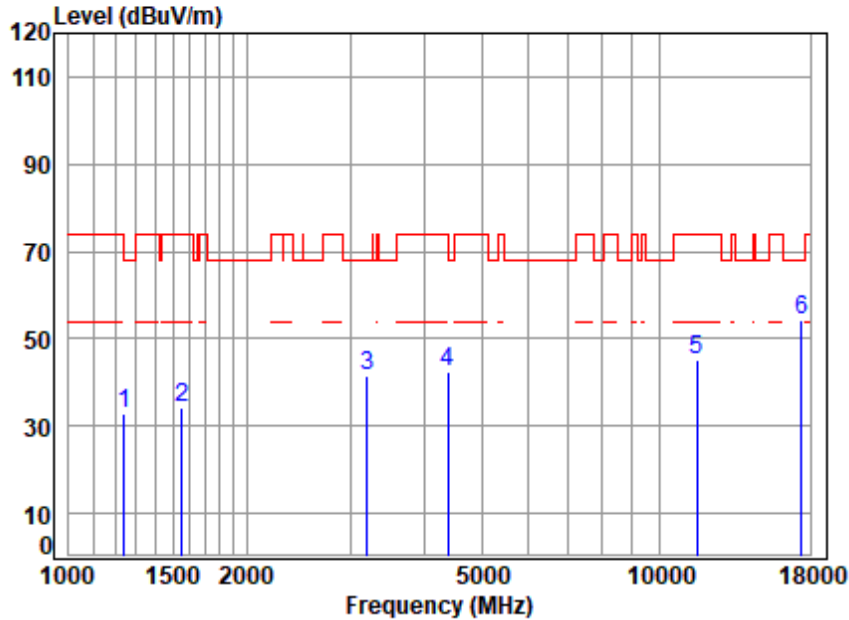


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5795 TX RSE
 Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.74	24.99	61.57	65.55	32.71	68.20	-35.49	peak
2	1551.677	4.12	26.99	61.67	64.61	34.05	74.00	-39.95	peak
3	3205.345	6.26	32.81	61.36	63.81	41.52	68.20	-26.68	peak
4	4392.376	7.13	34.74	61.53	62.03	42.37	74.00	-31.63	peak
5	11590.000	11.95	37.71	62.64	58.38	45.40	74.00	-28.60	peak
6	p17385.000	14.76	43.35	61.50	57.58	54.19	68.20	-14.01	peak



Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

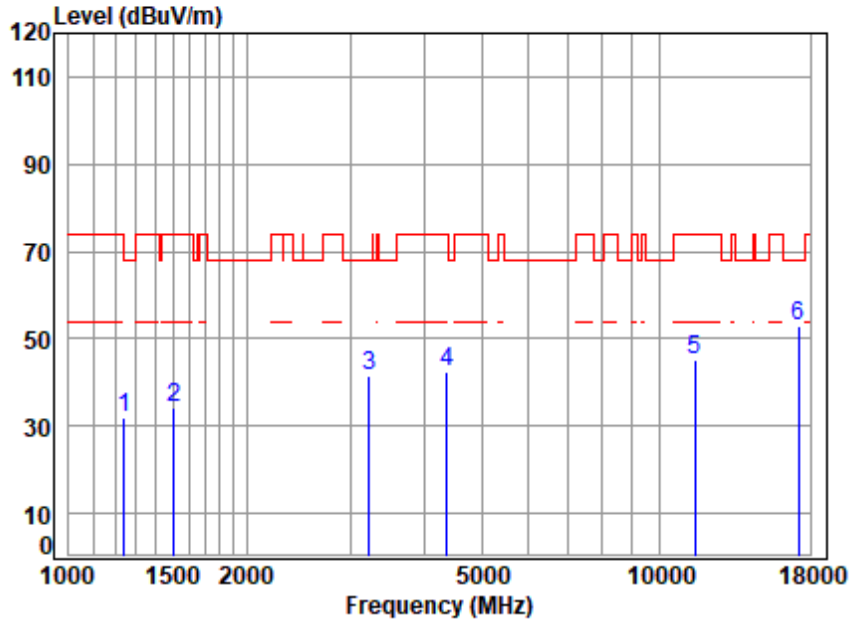

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5745 TX RSE
 Note : 5G WIFI 11AX20


	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.74	24.99	61.57	64.74	31.90	68.20	-36.30 peak
2	1507.470	4.05	26.83	61.66	65.10	34.32	74.00	-39.68 peak
3	3223.928	6.28	32.52	61.36	63.97	41.41	68.20	-26.79 peak
4	4367.058	7.10	34.54	61.51	62.30	42.43	74.00	-31.57 peak
5	11490.000	11.94	37.79	62.62	58.23	45.34	74.00	-28.66 peak
6	p17235.000	14.59	43.03	61.65	56.92	52.89	68.20	-15.31 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

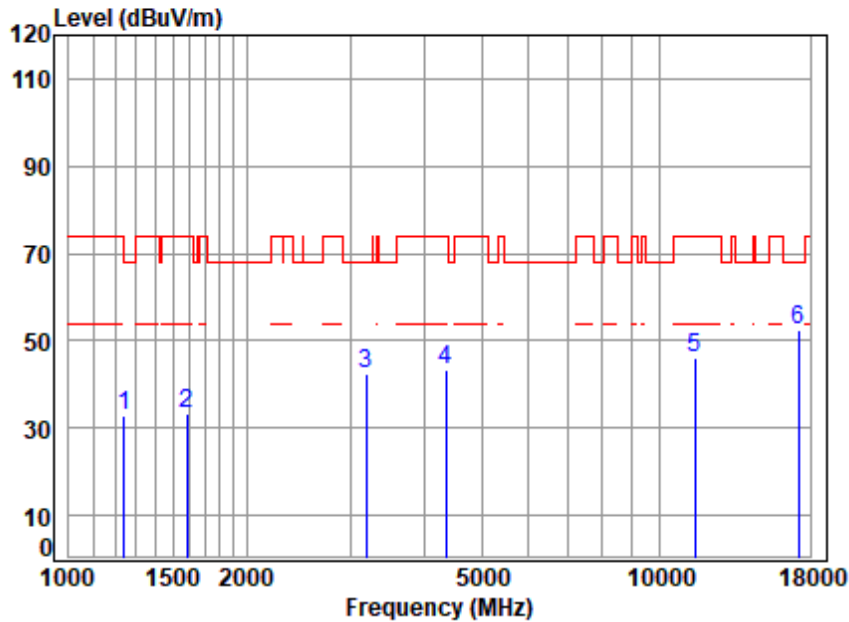


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5745 TX RSE
 Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1242.068	3.74	24.99	61.57	65.62	32.78	68.20	-35.42 peak
2	1587.975	4.17	26.85	61.68	64.10	33.44	74.00	-40.56 peak
3	3186.869	6.25	32.79	61.37	64.62	42.29	68.20	-25.91 peak
4	4354.454	7.08	34.44	61.50	63.39	43.41	74.00	-30.59 peak
5	11490.000	11.94	37.79	62.62	59.15	46.26	74.00	-27.74 peak
6	p17235.000	14.59	43.03	61.65	56.65	52.62	68.20	-15.58 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

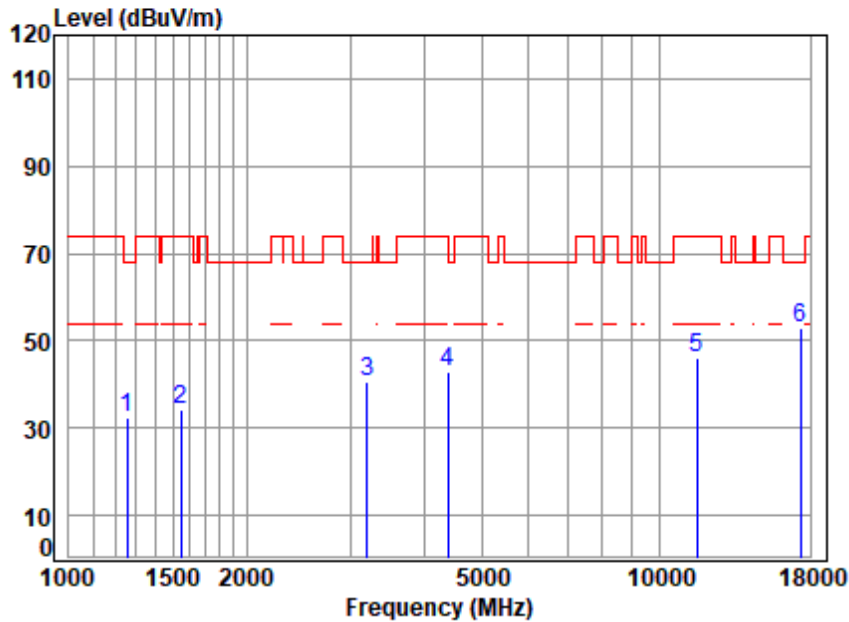


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5785 TX RSE
 Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1256.512	3.76	25.06	61.58	64.97	32.21	68.20	-35.99 peak
2	1547.199	4.11	26.99	61.67	64.91	34.34	74.00	-39.66 peak
3	3205.345	6.26	32.81	61.36	62.99	40.70	68.20	-27.50 peak
4	4392.376	7.13	34.74	61.53	62.46	42.80	74.00	-31.20 peak
5	11570.000	11.95	37.73	62.64	58.86	45.90	74.00	-28.10 peak
6	p17355.000	14.73	43.26	61.53	56.50	52.96	68.20	-15.24 peak



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

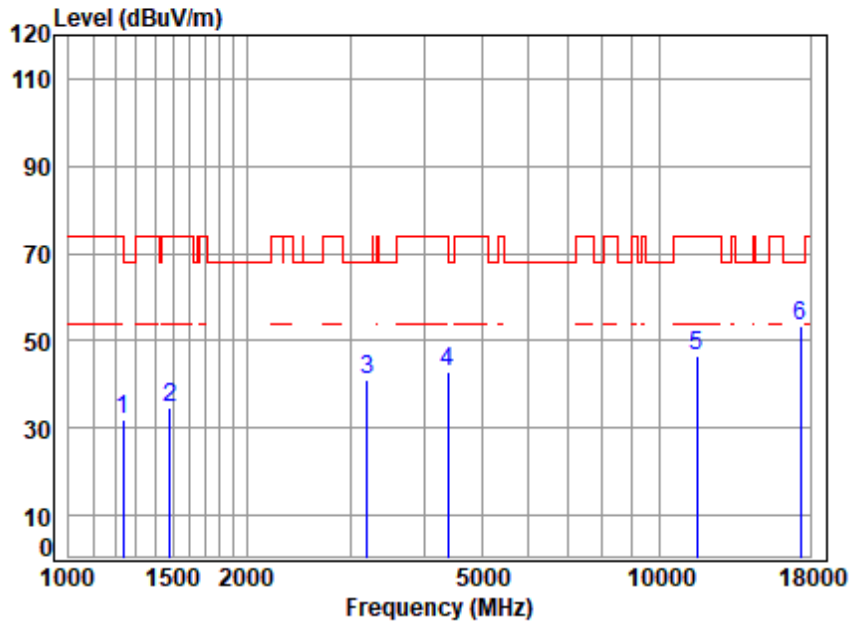

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5785 TX RSE
 Note : 5G WIFI 11AX20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1234.909	3.73	24.89	61.57	64.79	31.84	74.00	-42.16 peak
2	1485.841	4.02	26.40	61.65	65.77	34.54	74.00	-39.46 peak
3	3205.345	6.26	32.81	61.36	63.23	40.94	68.20	-27.26 peak
4	4392.376	7.13	34.74	61.53	62.58	42.92	74.00	-31.08 peak
5	11570.000	11.95	37.73	62.64	59.60	46.64	74.00	-27.36 peak
6	p17355.000	14.73	43.26	61.53	56.71	53.17	68.20	-15.03 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

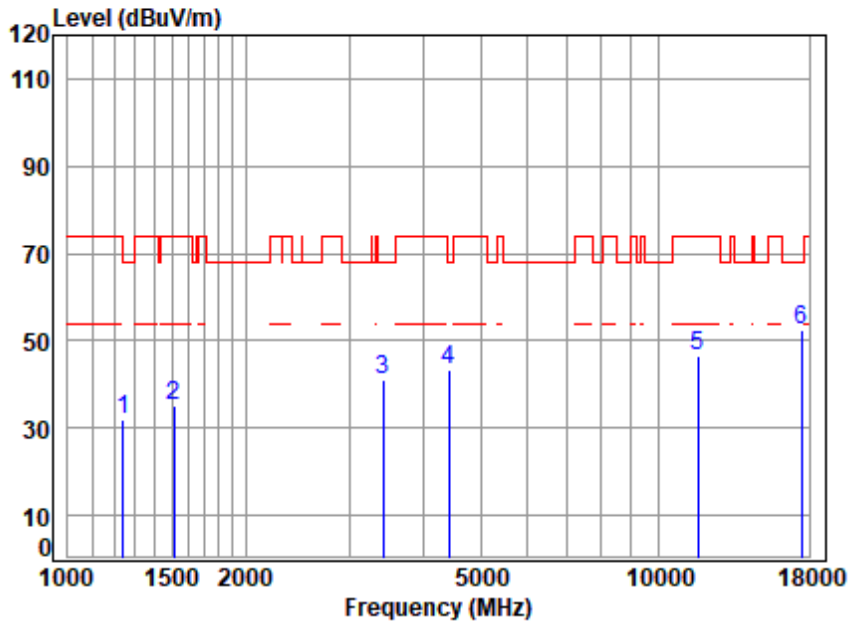


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5825 TX RSE
 Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.74	24.99	61.57	64.68	31.84	68.20	-36.36	peak
2	1511.833	4.06	26.85	61.66	65.74	34.99	74.00	-39.01	peak
3	3415.787	6.45	32.21	61.31	63.88	41.23	68.20	-26.97	peak
4	4417.841	7.16	34.59	61.56	63.06	43.25	68.20	-24.95	peak
5	11650.000	11.95	37.80	62.65	59.43	46.53	74.00	-27.47	peak
6	p17475.000	14.86	43.40	61.41	55.75	52.60	68.20	-15.60	peak



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

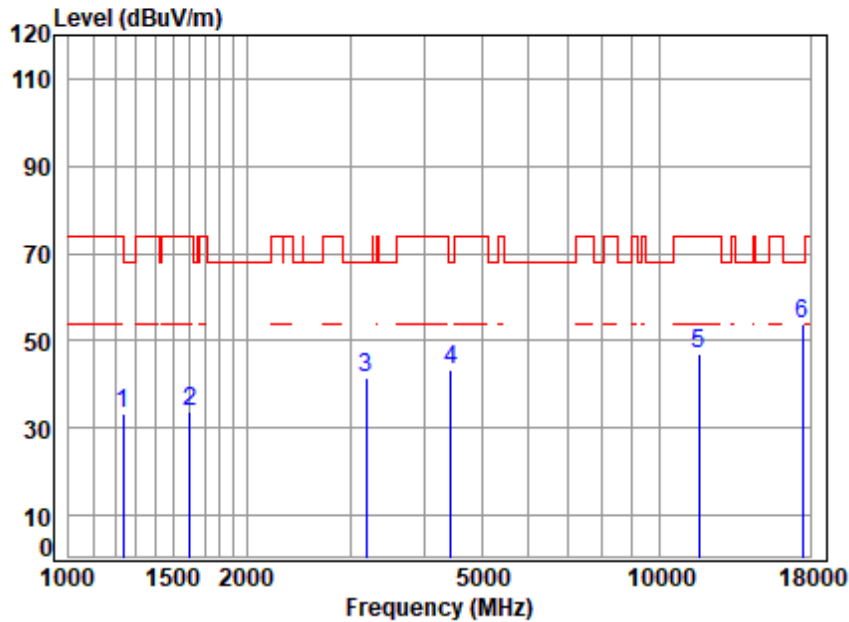

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5825 TX RSE
 Note : 5G WIFI 11AX20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.73	24.94	61.57	66.17	33.27	74.00	-40.73	peak
2	1601.804	4.19	26.78	61.69	64.28	33.56	74.00	-40.44	peak
3	3186.869	6.25	32.79	61.37	63.64	41.31	68.20	-26.89	peak
4	4443.453	7.19	34.28	61.58	63.48	43.37	68.20	-24.83	peak
5	11650.000	11.95	37.80	62.65	59.68	46.78	74.00	-27.22	peak
6	p17475.000	14.86	43.40	61.41	56.86	53.71	68.20	-14.49	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

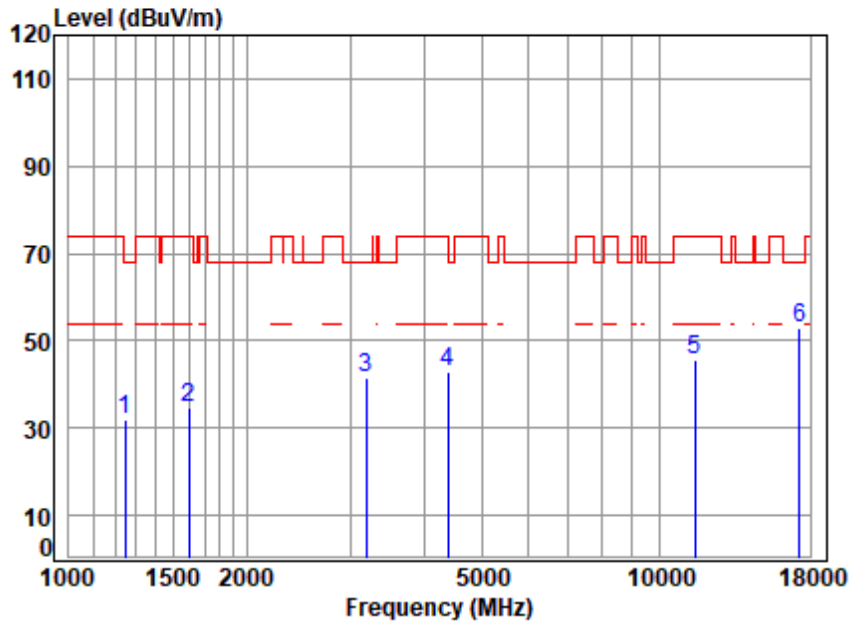

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5755 TX RSE
 Note : 5G WIFI 11AX40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1245.663	3.74	25.04	61.57	64.94	32.15	68.20	-36.05 peak
2	1597.181	4.18	26.81	61.69	65.53	34.83	74.00	-39.17 peak
3	3186.869	6.25	32.79	61.37	63.91	41.58	68.20	-26.62 peak
4	4379.699	7.11	34.64	61.52	62.71	42.94	74.00	-31.06 peak
5	11510.000	11.95	37.79	62.62	58.48	45.60	74.00	-28.40 peak
6	p17265.000	14.62	43.06	61.62	56.95	53.01	68.20	-15.19 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

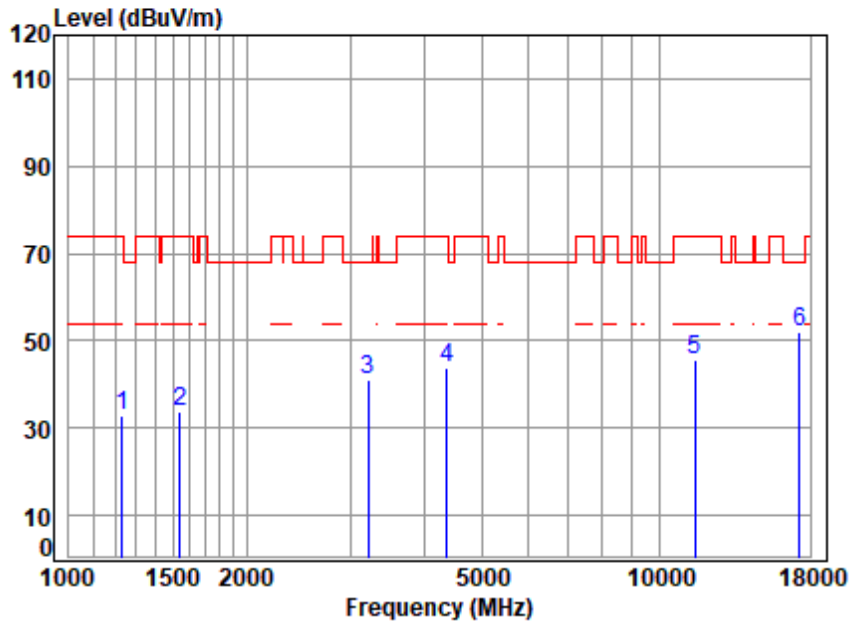


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5755 TX RSE
 Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1231.345	3.72	24.84	61.57	65.82	32.81	74.00	-41.19	peak
2	1542.733	4.10	26.97	61.67	64.41	33.81	74.00	-40.19	peak
3	3214.623	6.27	32.67	61.36	63.68	41.26	68.20	-26.94	peak
4	4367.058	7.10	34.54	61.51	63.80	43.93	74.00	-30.07	peak
5	11510.000	11.95	37.79	62.62	58.35	45.47	74.00	-28.53	peak
6	p17265.000	14.62	43.06	61.62	56.15	52.21	68.20	-15.99	peak



Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

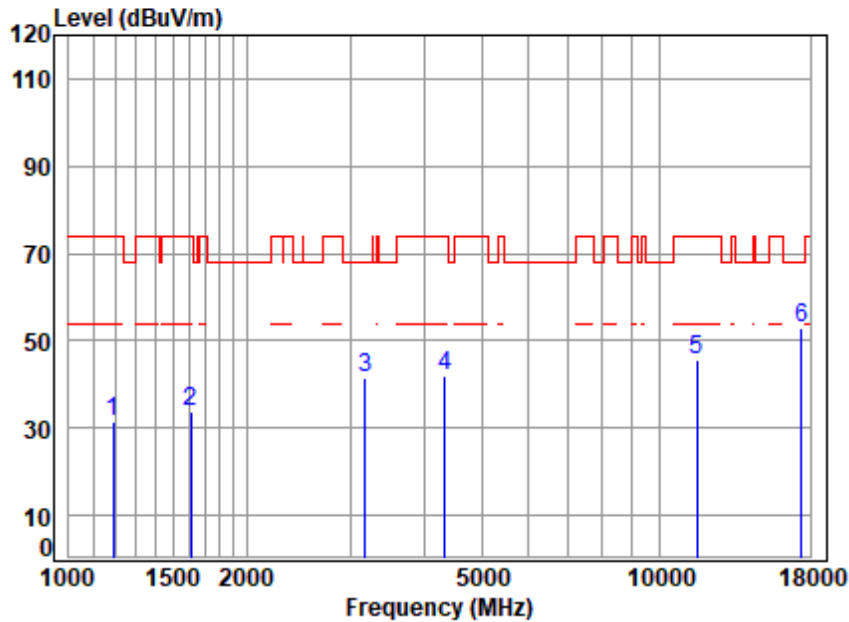


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5795 TX RSE
 Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1189.368	3.67	24.29	61.55	65.24	31.65	74.00	-42.35	peak
2	1611.091	4.20	26.69	61.69	64.59	33.79	74.00	-40.21	peak
3	3177.672	6.24	32.72	61.37	63.94	41.53	68.20	-26.67	peak
4	4329.354	7.05	34.23	61.48	62.27	42.07	74.00	-31.93	peak
5	11590.000	11.95	37.71	62.64	58.53	45.55	74.00	-28.45	peak
6	p17385.000	14.76	43.35	61.50	56.22	52.83	68.20	-15.37	peak



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

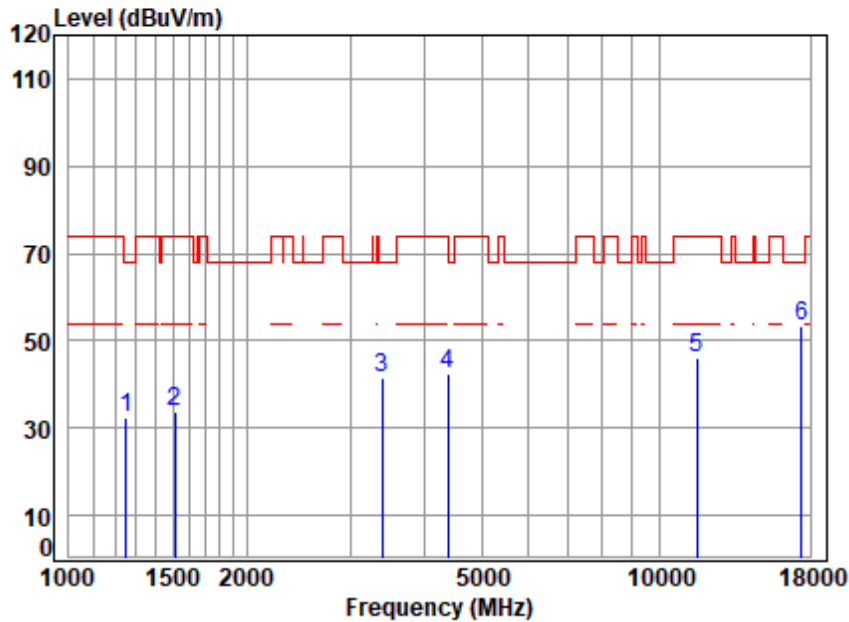


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5795 TX RSE
 Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	3.75	25.08	61.57	65.07	32.33	68.20	-35.87	peak
2	1511.833	4.06	26.85	61.66	64.38	33.63	74.00	-40.37	peak
3	3396.098	6.43	32.38	61.31	64.12	41.62	68.20	-26.58	peak
4	4379.699	7.11	34.64	61.52	62.20	42.43	74.00	-31.57	peak
5	11590.000	11.95	37.71	62.64	59.11	46.13	74.00	-27.87	peak
6	p17385.000	14.76	43.35	61.50	56.63	53.24	68.20	-14.96	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

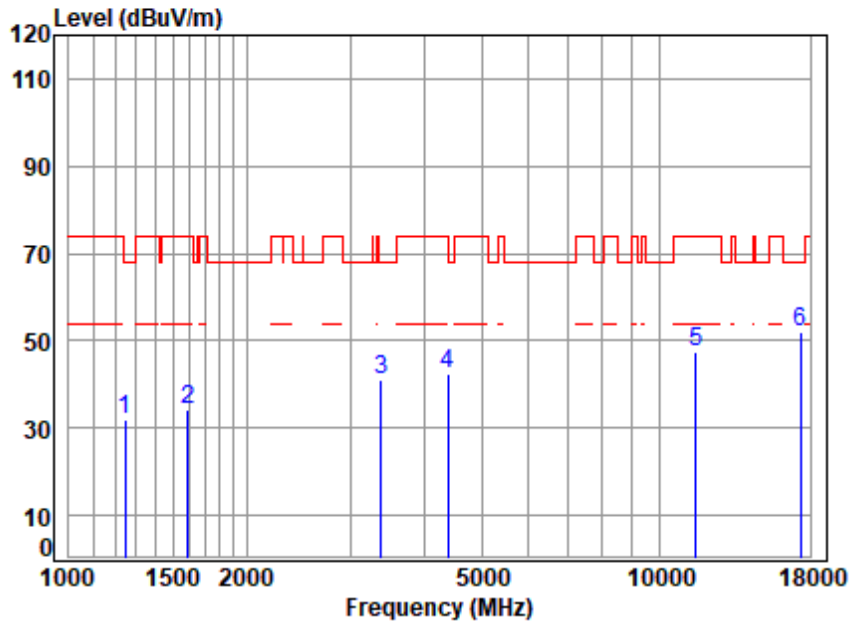


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5775 TX RSE
 Note : 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1245.663	3.74	25.04	61.57	64.61	31.82	68.20	-36.38 peak
2	1592.571	4.18	26.83	61.68	64.84	34.17	74.00	-39.83 peak
3	3386.297	6.42	32.32	61.31	63.57	41.00	68.20	-27.20 peak
4	4379.699	7.11	34.64	61.52	62.40	42.63	74.00	-31.37 peak
5	11550.000	11.95	37.75	62.63	60.33	47.40	74.00	-26.60 peak
6	p17325.000	14.69	43.17	61.56	55.75	52.05	68.20	-16.15 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

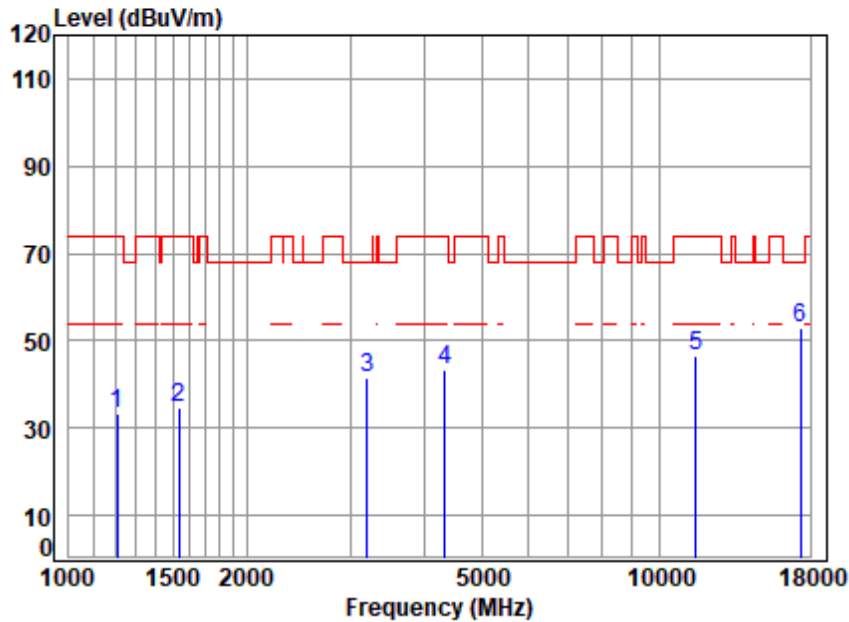

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5775 TX RSE
 Note : 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1206.682	3.69	24.49	61.56	66.71	33.33	74.00	-40.67 peak
2	1538.281	4.10	26.95	61.67	65.09	34.47	74.00	-39.53 peak
3	3205.345	6.26	32.81	61.36	63.60	41.31	68.20	-26.89 peak
4	4329.354	7.05	34.23	61.48	63.42	43.22	74.00	-30.78 peak
5	11550.000	11.95	37.75	62.63	59.39	46.46	74.00	-27.54 peak
6	p17325.000	14.69	43.17	61.56	56.54	52.84	68.20	-15.36 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

7.5 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: KDB 789033 D02 II G

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 22.9 °C Humidity: 67.5 % RH Atmospheric Pressure: 1020 mbar




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

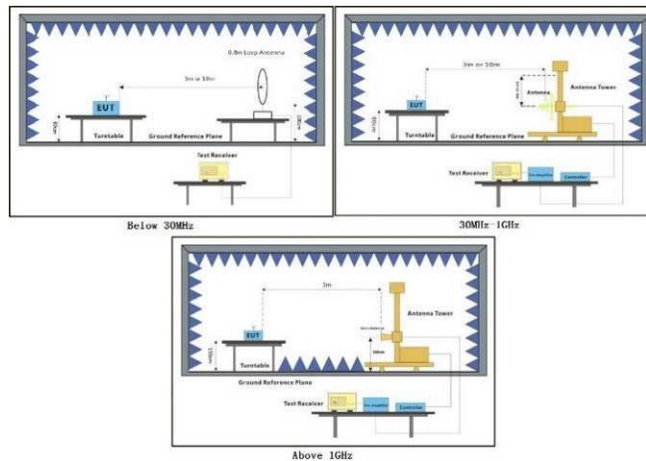

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.5.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

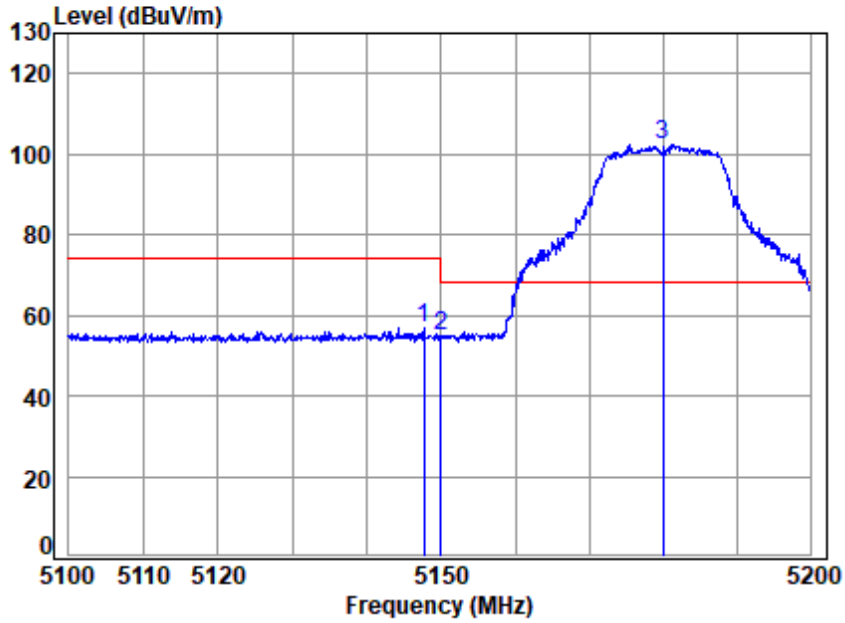


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5180 Band edge
 : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5147.658	18.83	33.90	31.28	35.62	57.07	74.00	-16.93 peak
2	5149.980	18.83	33.90	31.28	33.59	55.04	74.00	-18.96 peak
3 p	5180.000	18.88	33.96	31.30	80.82	102.36	68.20	34.16 peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

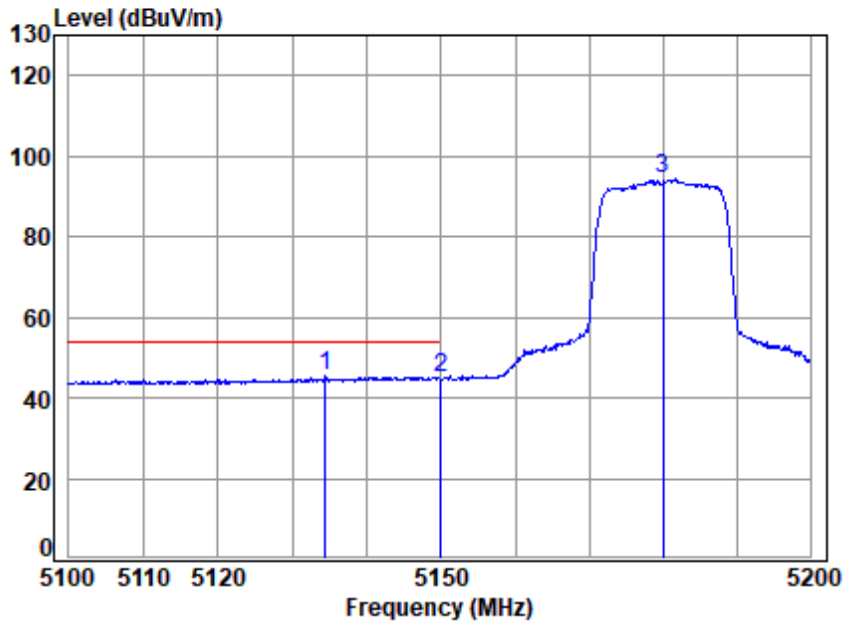


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5180 Band edge
 : 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	q 5134.380	18.81	33.93	31.27	23.79	45.26	54.00	-8.74 Average
2	5149.980	18.83	33.90	31.28	23.57	45.02	54.00	-8.98 Average
3	5180.000	18.88	33.96	31.30	72.66	94.20	-----	----- Average



Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

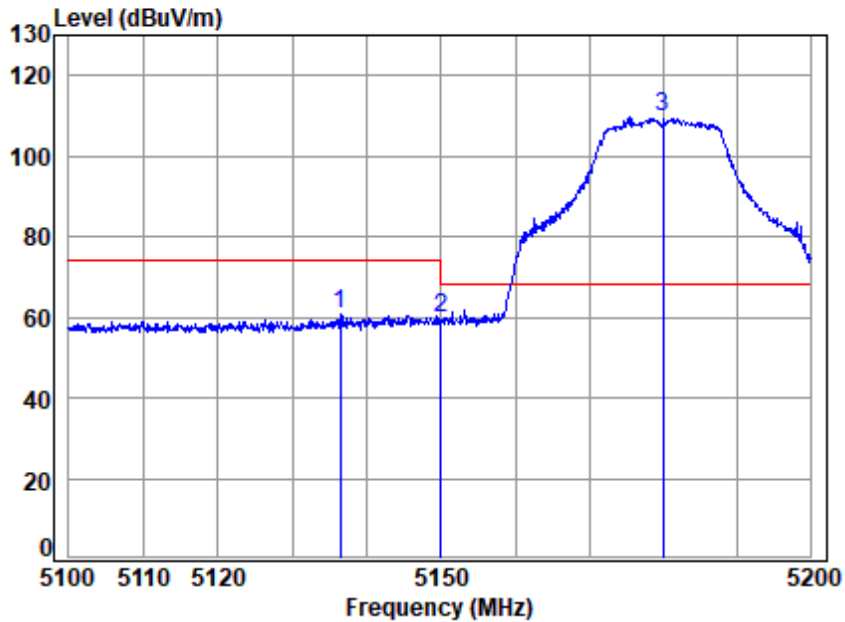


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5180 Band edge
 : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5136.375	18.81	33.93	31.27	39.35	60.82	74.00	-13.18 Peak
2	5149.980	18.83	33.90	31.28	38.58	60.03	74.00	-13.97 Peak
3 p	5180.000	18.88	33.96	31.30	88.00	109.54	68.20	41.34 Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

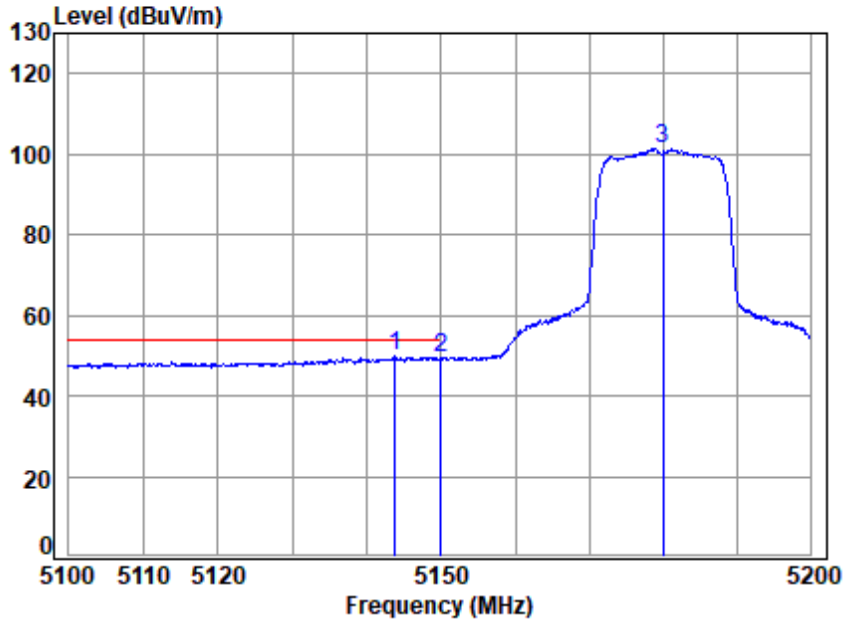


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5180 Band edge
 : 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit	
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q	5143.761	18.83	33.91	31.28	28.26	49.72	54.00	-4.28	Average
2	5149.980	18.83	33.90	31.28	27.85	49.30	54.00	-4.70	Average
3	5180.000	18.88	33.96	31.30	79.78	101.32	-----	-----	Average



Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

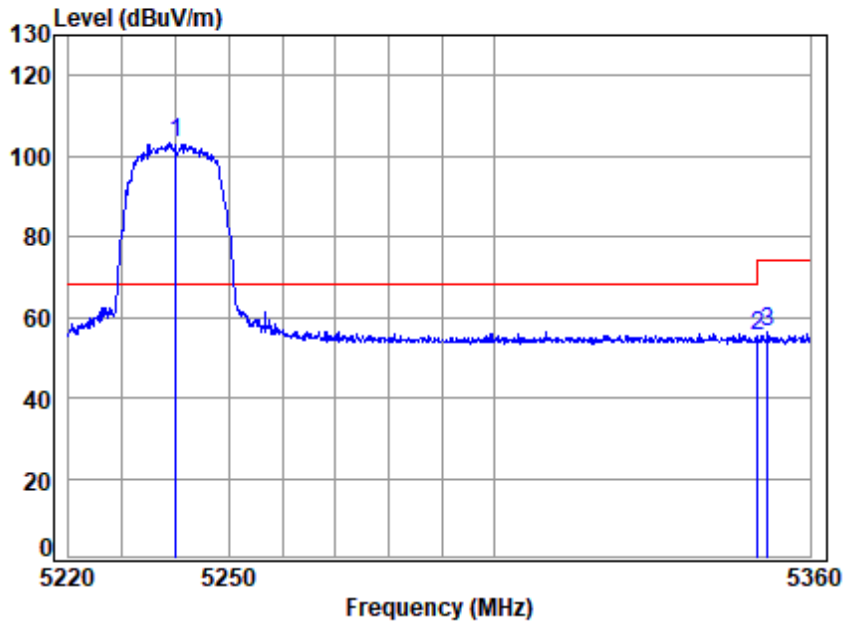


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5240 Band edge
 : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5240.000	18.96	34.08	31.33	81.36	103.07	68.20	34.87 peak
2	5350.020	19.11	34.40	31.39	33.01	55.13	74.00	-18.87 peak
3	5351.920	19.11	34.41	31.39	34.02	56.15	74.00	-17.85 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

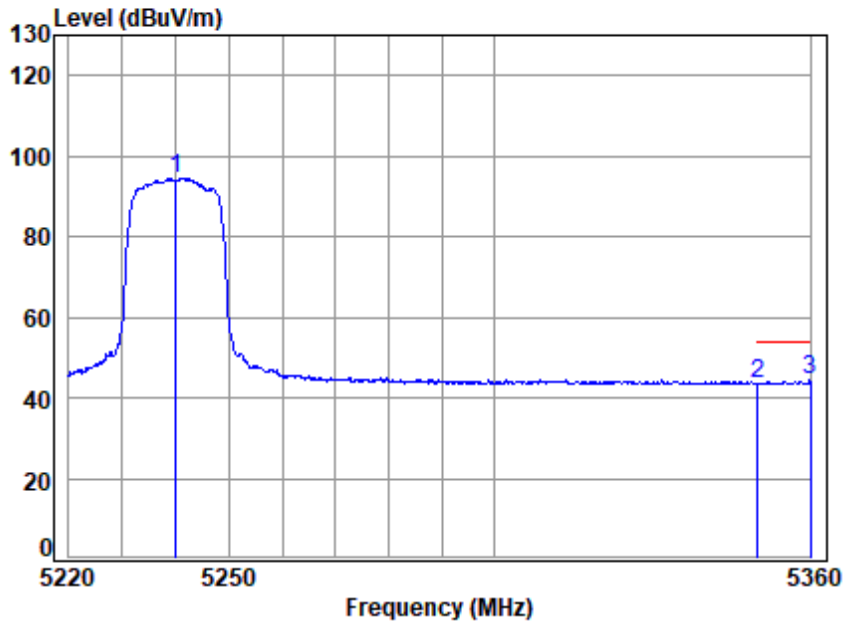


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5240 Band edge
 : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5240.000	18.96	34.08	31.33	72.83	94.54	-----	-----	Average
2	5350.020	19.11	34.40	31.39	21.51	43.63	54.00	-10.37	Average
3 q	5360.000	19.12	34.44	31.39	22.16	44.33	54.00	-9.67	Average



Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

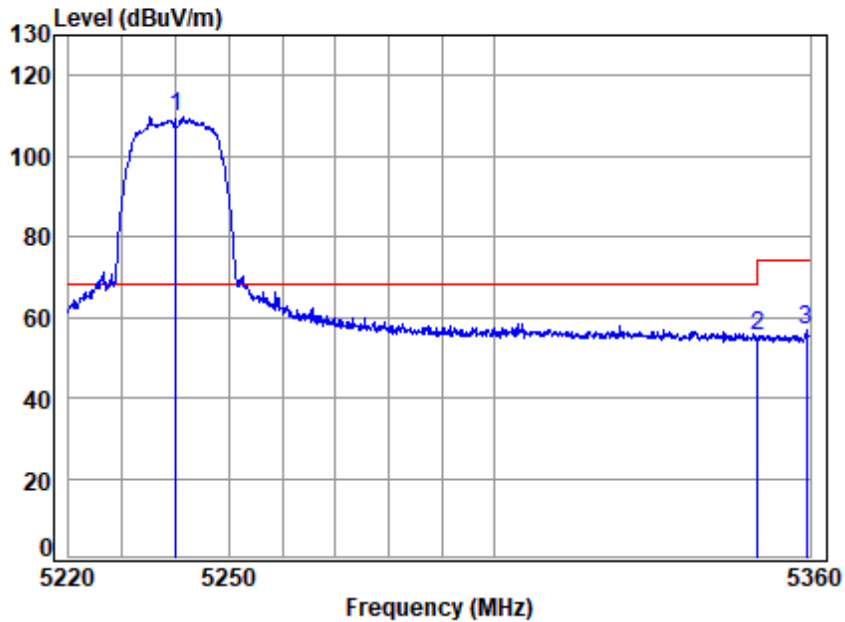


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5240 Band edge
 : 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5240.000	18.96	34.08	31.33	88.05	109.76	68.20	41.56 Peak
2	5350.020	19.11	34.40	31.39	33.14	55.26	74.00	-18.74 Peak
3	5359.291	19.12	34.44	31.39	34.53	56.70	74.00	-17.30 Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

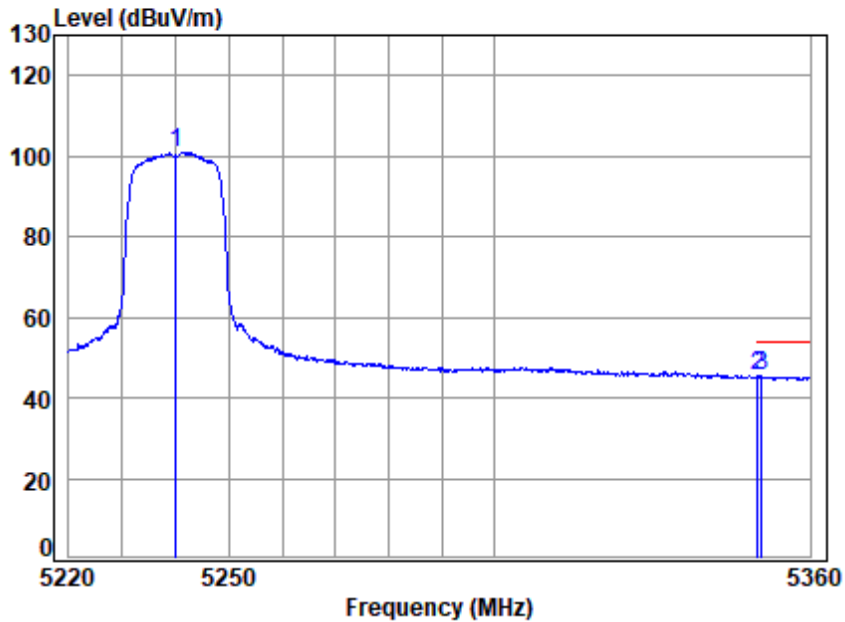


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5240 Band edge
 : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5240.000	18.96	34.08	31.33	79.25	100.96	-----	-----	Average
2 q	5350.020	19.11	34.40	31.39	23.47	45.59	54.00	-8.41	Average
3	5350.787	19.11	34.40	31.39	23.14	45.26	54.00	-8.74	Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

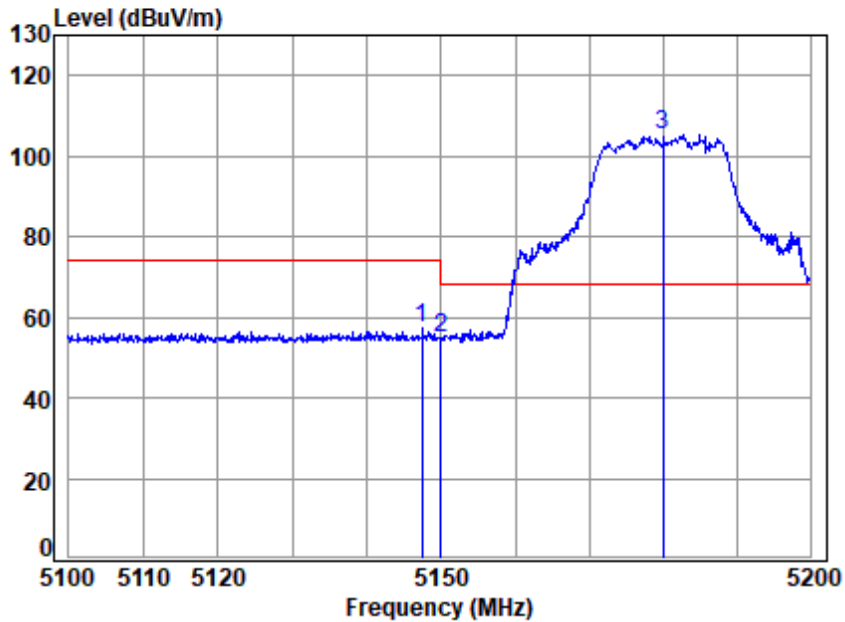


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5180 Band edge
 : 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5147.458	18.83	33.91	31.28	35.70	57.16	74.00	-16.84 peak
2	5149.980	18.83	33.90	31.28	33.38	54.83	74.00	-19.17 peak
3 p	5180.000	18.88	33.96	31.30	83.63	105.17	68.20	36.97 peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

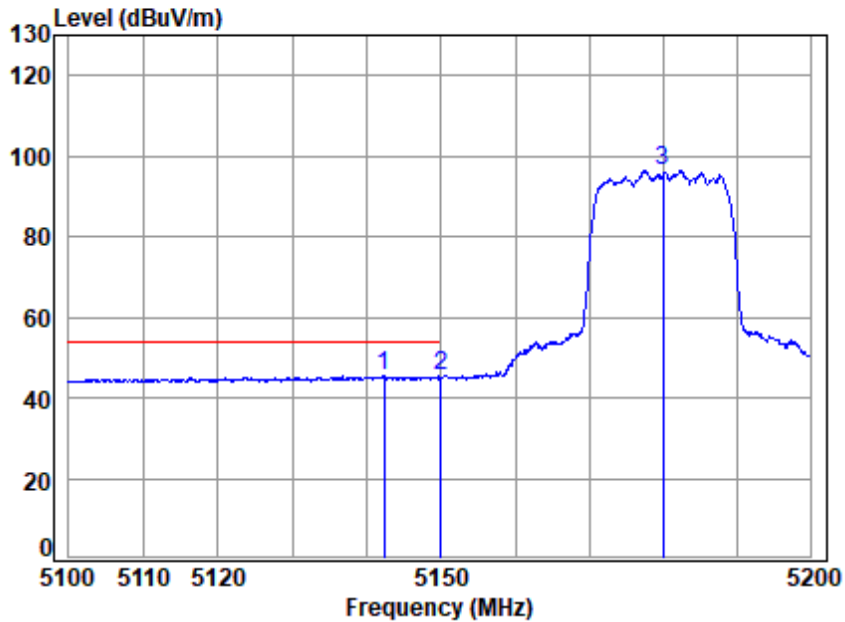


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5180 Band edge
 : 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	q 5142.263	18.82	33.92	31.28	23.92	45.38	54.00	-8.62	Average
2	5149.980	18.83	33.90	31.28	23.85	45.30	54.00	-8.70	Average
3	5180.000	18.88	33.96	31.30	75.07	96.61	-----	-----	Average



Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

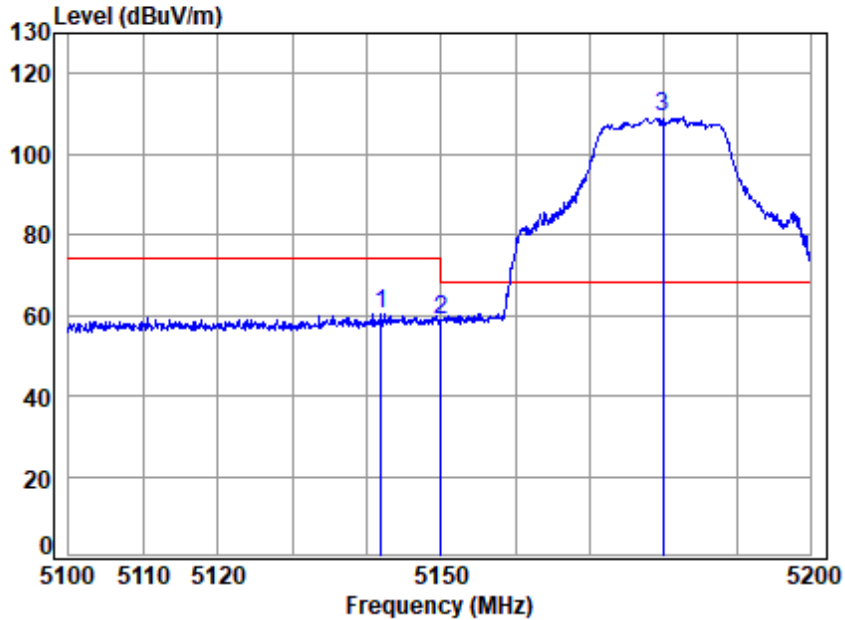


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5180 Band edge
 : 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5141.863	18.82	33.92	31.28	38.88	60.34	74.00	-13.66 Peak
2	5149.980	18.83	33.90	31.28	37.50	58.95	74.00	-15.05 Peak
3 p	5180.000	18.88	33.96	31.30	87.51	109.05	68.20	40.85 Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

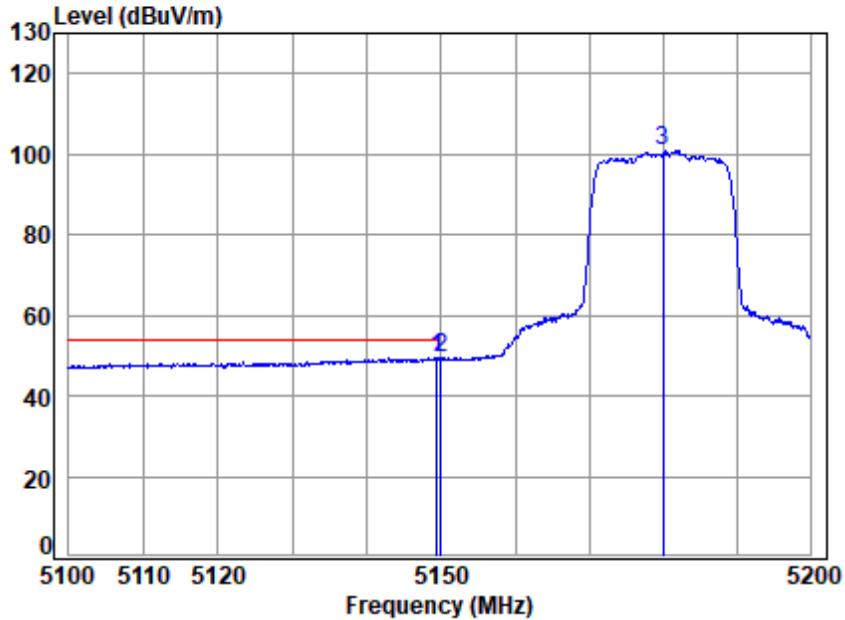


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5180 Band edge
 : 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	q 5149.357	18.83	33.90	31.28	28.04	49.49	54.00	-4.51	Average
2	5149.980	18.83	33.90	31.28	28.02	49.47	54.00	-4.53	Average
3	5180.000	18.88	33.96	31.30	79.24	100.78	-----	-----	Average



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

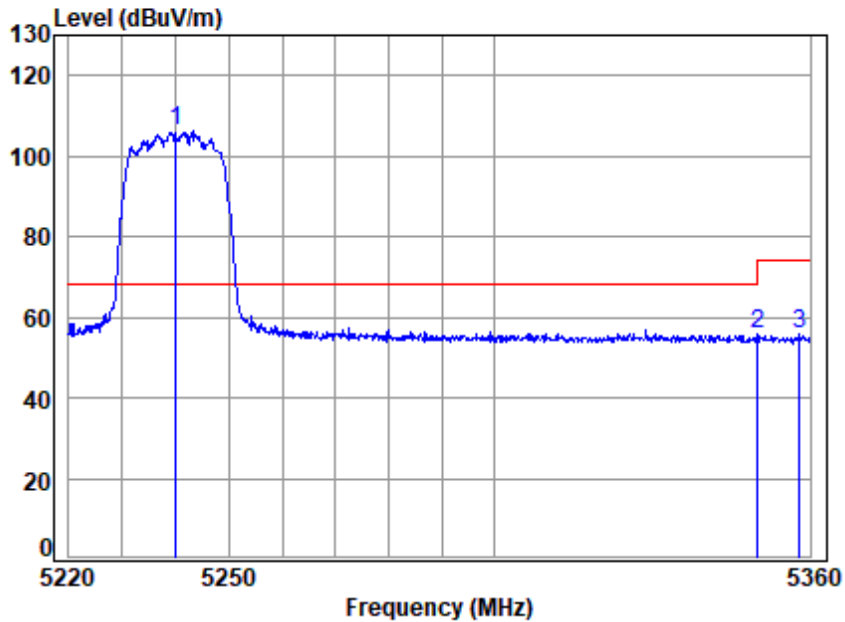


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5240 Band edge
 : 5G WIFI 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5240.000	18.96	34.08	31.33	84.34	106.05	68.20	37.85 peak
2	5350.020	19.11	34.40	31.39	33.67	55.79	74.00	-18.21 peak
3	5358.014	19.12	34.43	31.39	33.89	56.05	74.00	-17.95 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
 Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

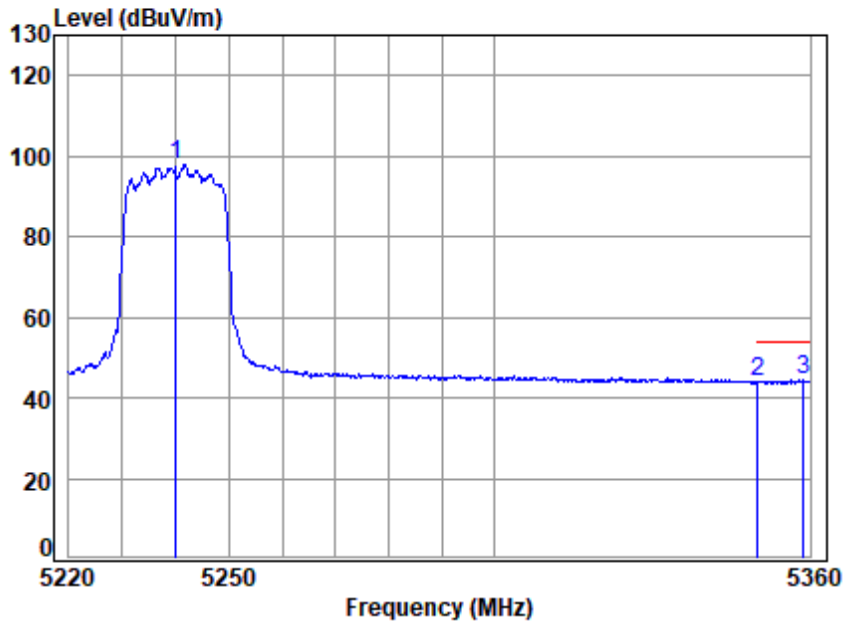


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5240 Band edge
 : 5G WIFI 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5240.000	18.96	34.08	31.33	76.27	97.98	-----	Average
2	5350.020	19.11	34.40	31.39	21.72	43.84	54.00	-10.16 Average
3 q	5358.724	19.12	34.43	31.39	22.28	44.44	54.00	-9.56 Average



Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

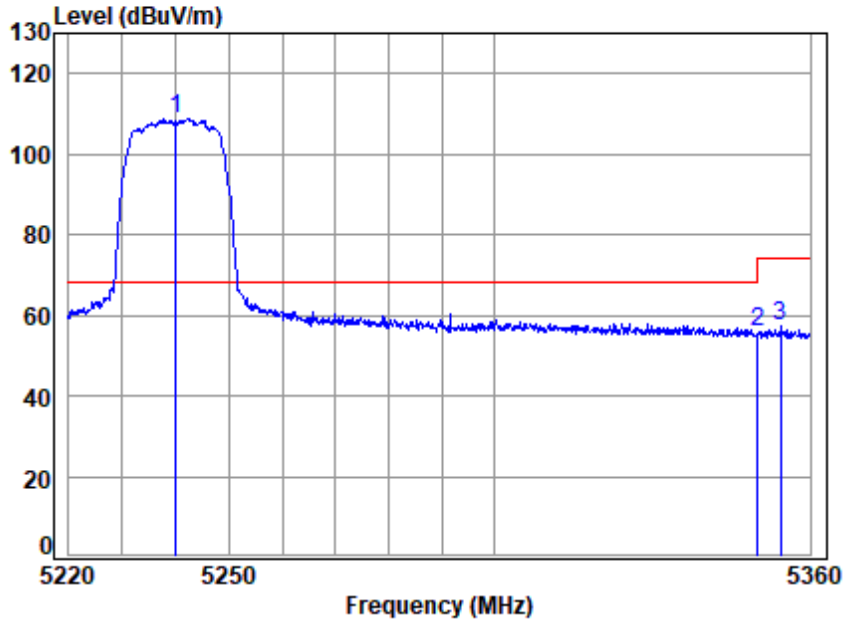


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5240 Band edge
 : 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1 p 5240.000	18.96	34.08	31.33	87.25	108.96	68.20	40.76	Peak
2 5350.020	19.11	34.40	31.39	33.65	55.77	74.00	-18.23	Peak
3 5354.329	19.12	34.42	31.39	35.29	57.44	74.00	-16.56	Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

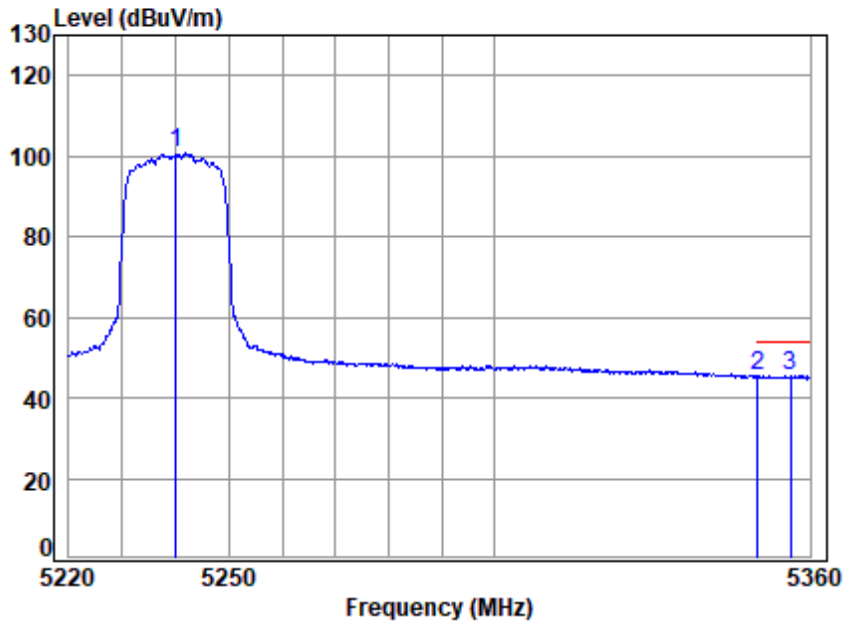


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5240 Band edge
 : 5G WIFI 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5240.000	18.96	34.08	31.33	78.98	100.69	-----	-----	Average
2 q	5350.020	19.11	34.40	31.39	23.36	45.48	54.00	-8.52	Average
3	5356.313	19.12	34.43	31.39	23.27	45.43	54.00	-8.57	Average



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

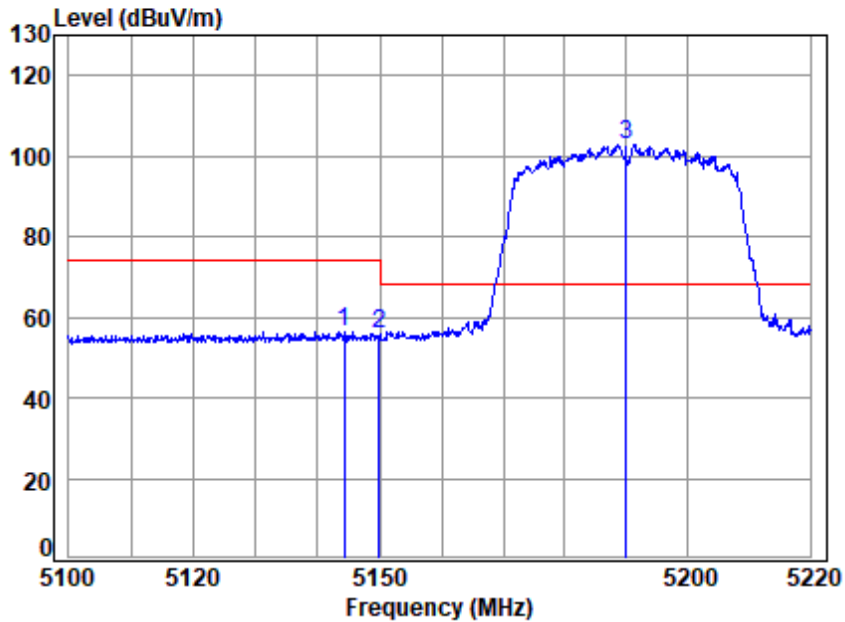


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5190 Band edge
 : 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5144.314	18.83	33.91	31.28	35.10	56.56	74.00	-17.44 peak
2	5149.980	18.83	33.90	31.28	34.41	55.86	74.00	-18.14 peak
3 p	5190.000	18.89	33.98	31.30	81.23	102.80	68.20	34.60 peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

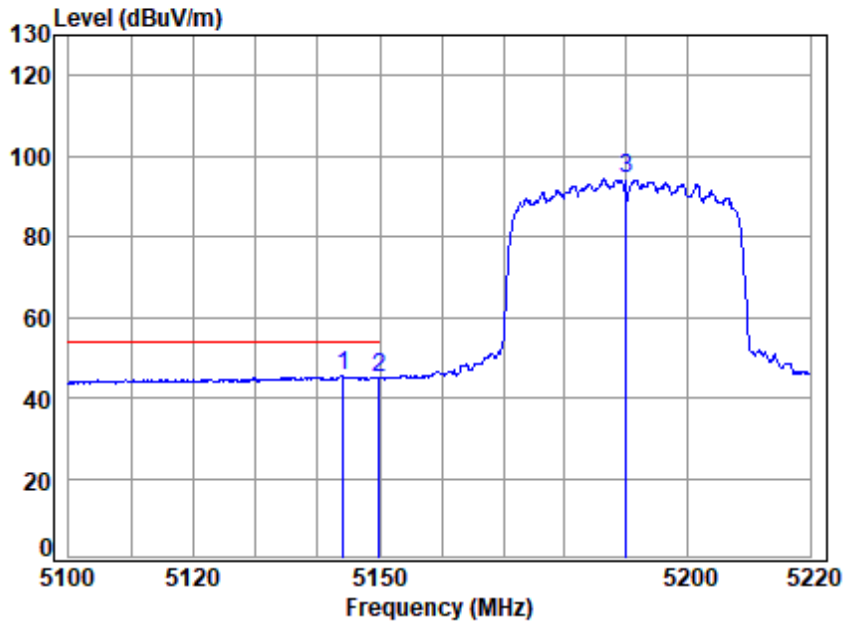


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5190 Band edge
 : 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	q 5144.075	18.83	33.91	31.28	24.12	45.58	54.00	-8.42	Average
2	5149.980	18.83	33.90	31.28	23.47	44.92	54.00	-9.08	Average
3	5190.000	18.89	33.98	31.30	72.78	94.35	-----	-----	Average



Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

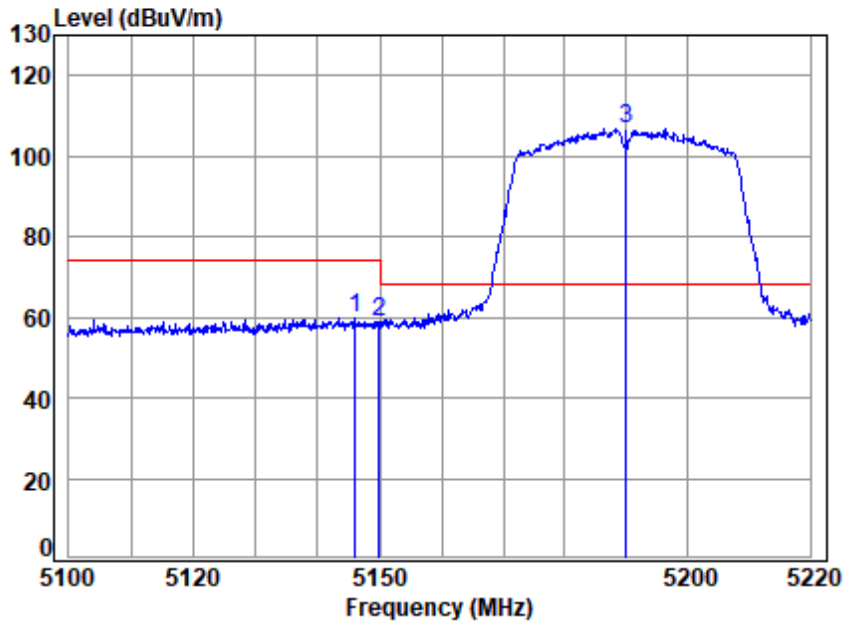


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5190 Band edge
 : 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	18.83	33.91	31.28	38.27	59.73	74.00	-14.27	Peak
2	18.83	33.90	31.28	37.38	58.83	74.00	-15.17	Peak
3 p	18.89	33.98	31.30	85.10	106.67	68.20	38.47	Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

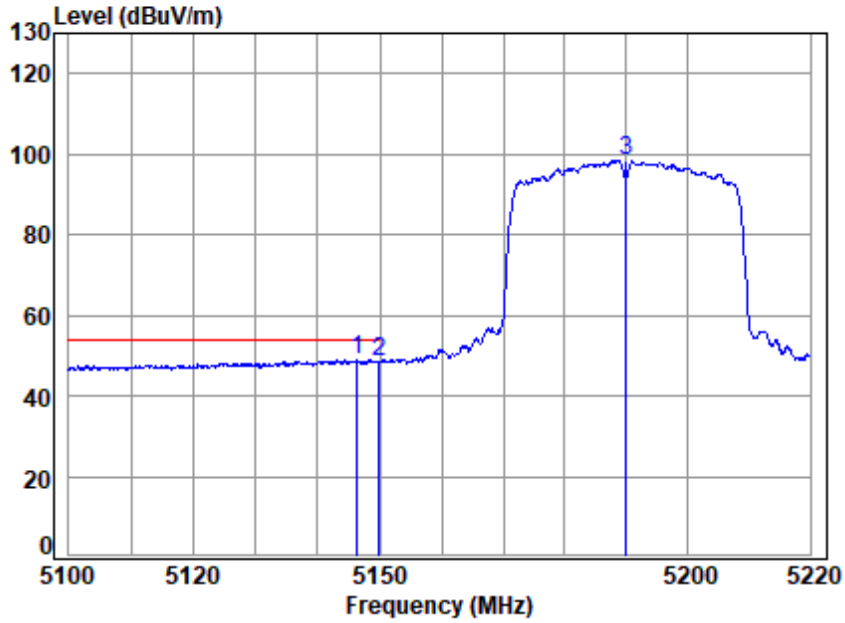


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5190 Band edge
 : 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	q 5146.349	18.83	33.91	31.28	27.56	49.02	54.00	-4.98	Average
2	5149.980	18.83	33.90	31.28	27.18	48.63	54.00	-5.37	Average
3	5190.000	18.89	33.98	31.30	76.95	98.52	-----	-----	Average



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

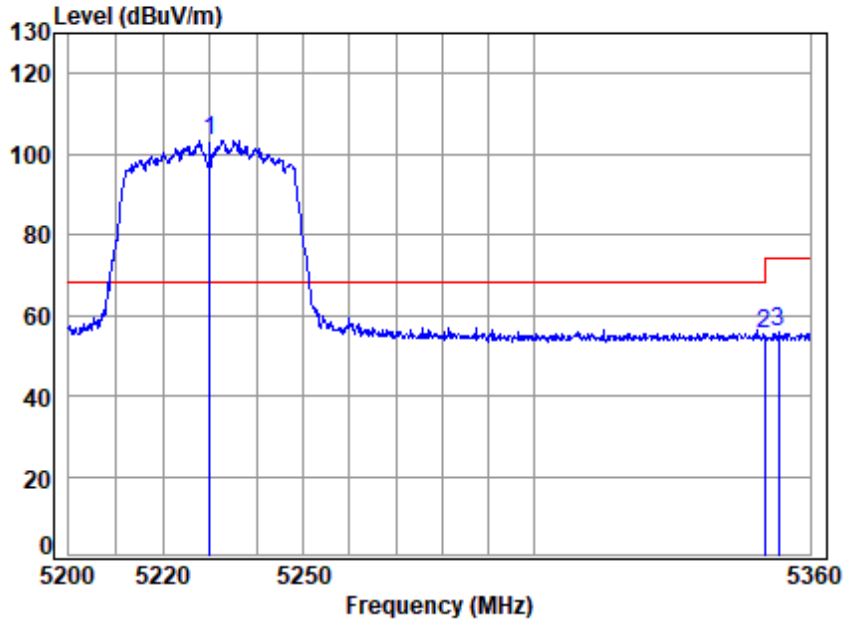


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5230 Band edge
 : 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1 p 5230.000	18.95	34.06	31.32	81.55	103.24	68.20	35.04	peak
2 5350.020	19.11	34.40	31.39	33.47	55.59	74.00	-18.41	peak
3 5353.020	19.11	34.41	31.39	33.74	55.87	74.00	-18.13	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

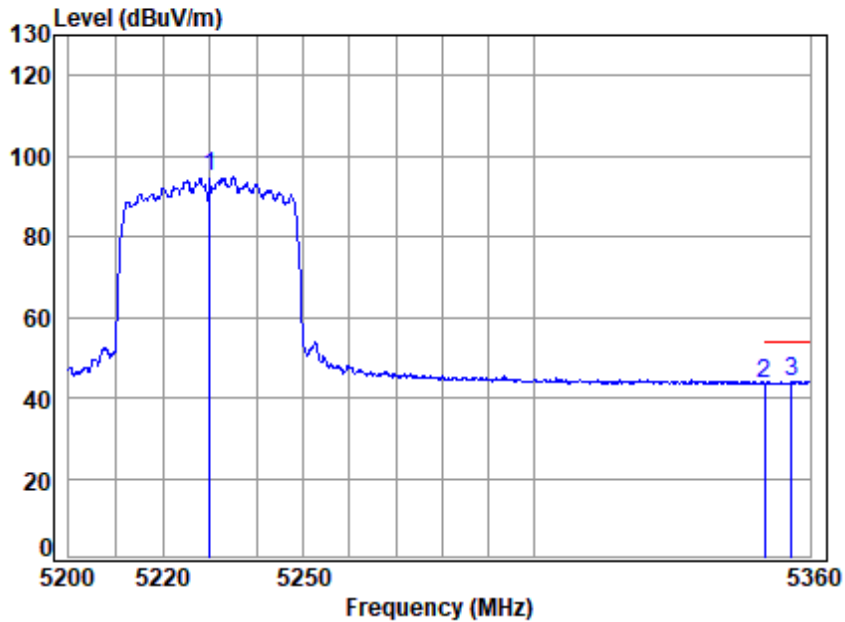


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5230 Band edge
 : 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5230.000	18.95	34.06	31.32	73.20	94.89	-----	-----	Average
2	5350.020	19.11	34.40	31.39	21.50	43.62	54.00	-10.38	Average
3 q	5355.940	19.12	34.42	31.39	21.81	43.96	54.00	-10.04	Average



Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

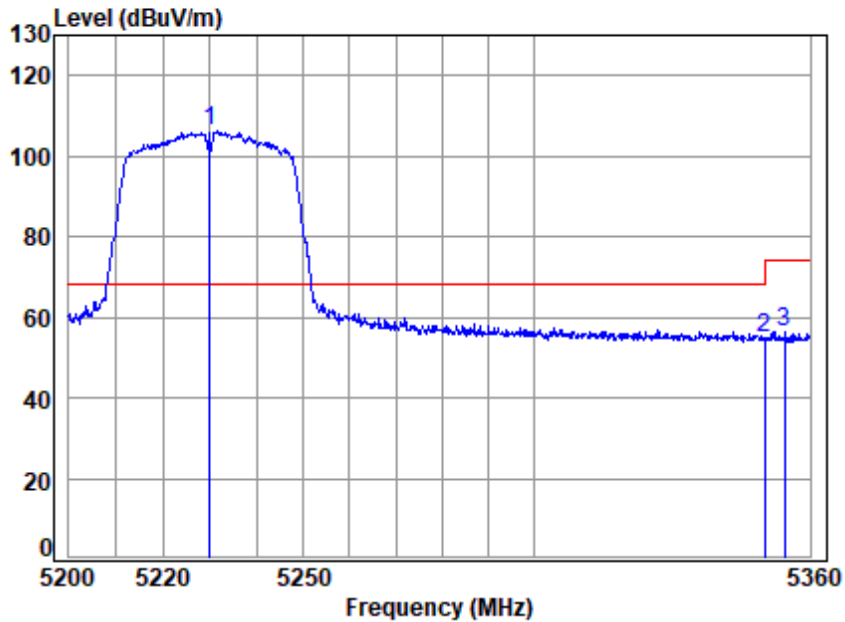


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5230 Band edge
 : 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5230.000	18.95	34.06	31.32	84.38	106.07	68.20	37.87 Peak
2	5350.020	19.11	34.40	31.39	32.93	55.05	74.00	-18.95 Peak
3	5354.480	19.12	34.42	31.39	34.17	56.32	74.00	-17.68 Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

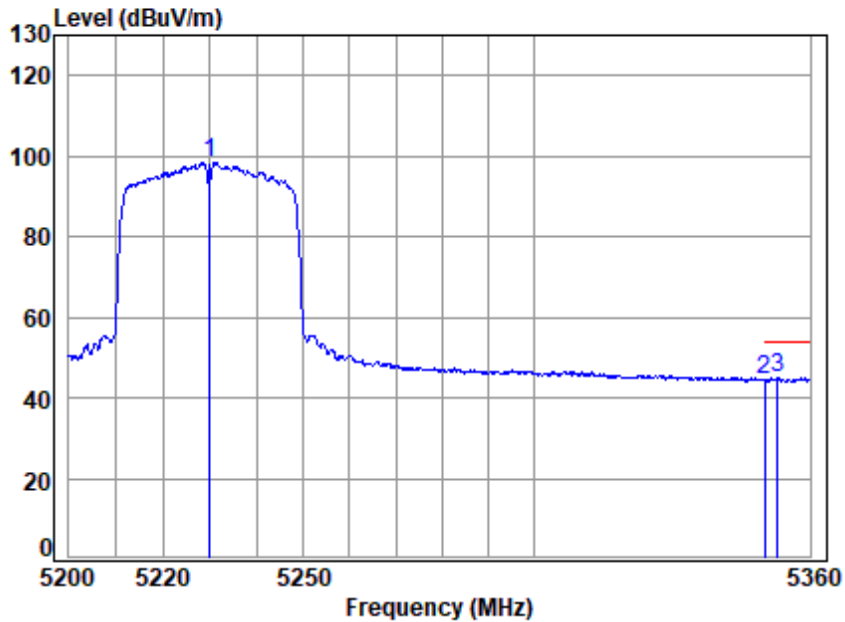


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5230 Band edge
 : 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5230.000	18.95	34.06	31.32	76.82	98.51	-----	-----	Average
2	5350.020	19.11	34.40	31.39	22.48	44.60	54.00	-9.40	Average
3 q	5352.857	19.11	34.41	31.39	22.88	45.01	54.00	-8.99	Average



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

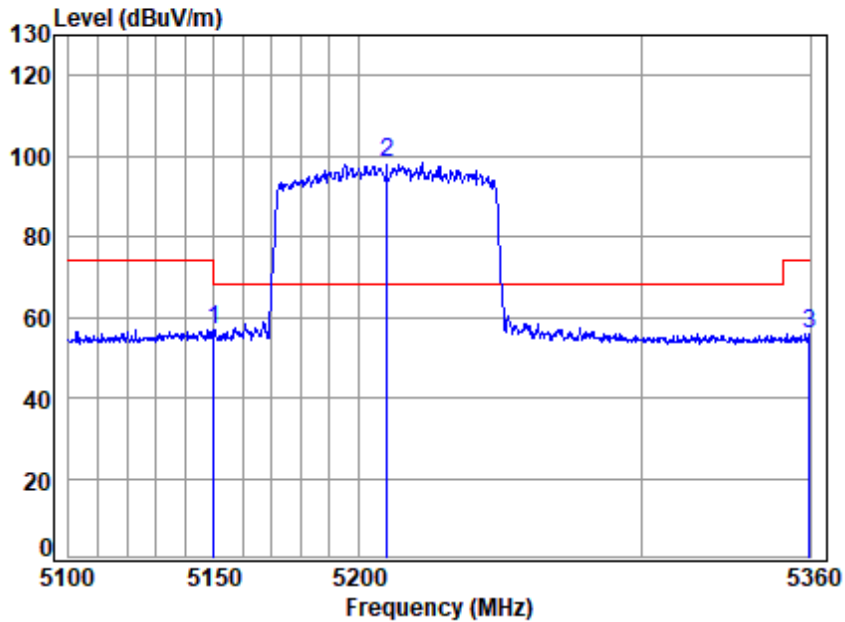


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5210 Band edge
 : 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5149.690	18.83	33.90	31.28	35.34	56.79	74.00	-17.21 peak
2 p	5210.000	18.92	34.02	31.31	76.52	98.15	68.20	29.95 peak
3	5359.733	19.12	34.44	31.39	33.62	55.79	74.00	-18.21 peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

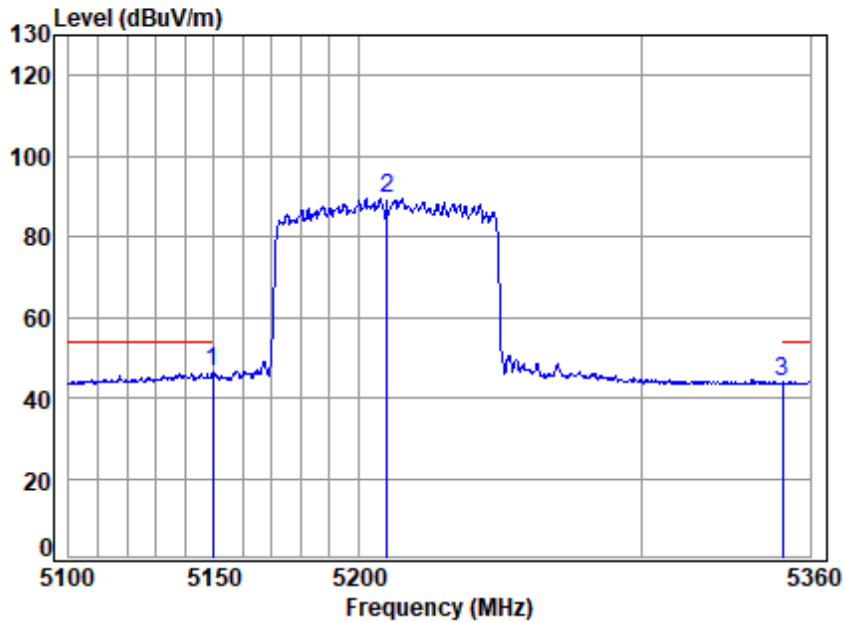


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5210 Band edge
 : 5G WIFI 11AC80

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	q 5149.435	18.83	33.90	31.28	24.88	46.33	54.00	-7.67	Average
2	5210.000	18.92	34.02	31.31	68.01	89.64	-----	-----	Average
3	5350.148	19.11	34.40	31.39	21.78	43.90	54.00	-10.10	Average



Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

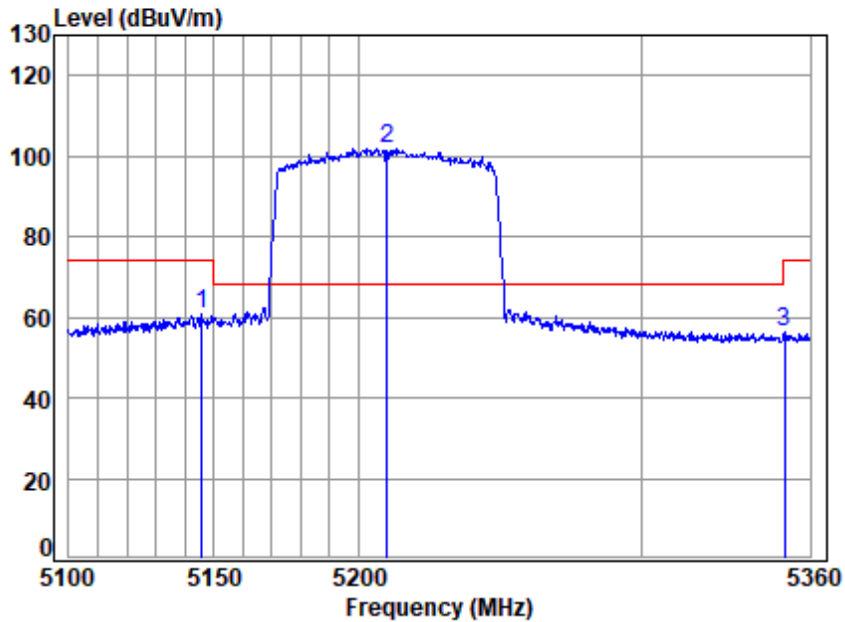


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5210 Band edge
 : 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5145.851	18.83	33.91	31.28	39.12	60.58	74.00	-13.42 Peak
2 p	5210.000	18.92	34.02	31.31	80.31	101.94	68.20	33.74 Peak
3	5350.680	19.11	34.40	31.39	34.00	56.12	74.00	-17.88 Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

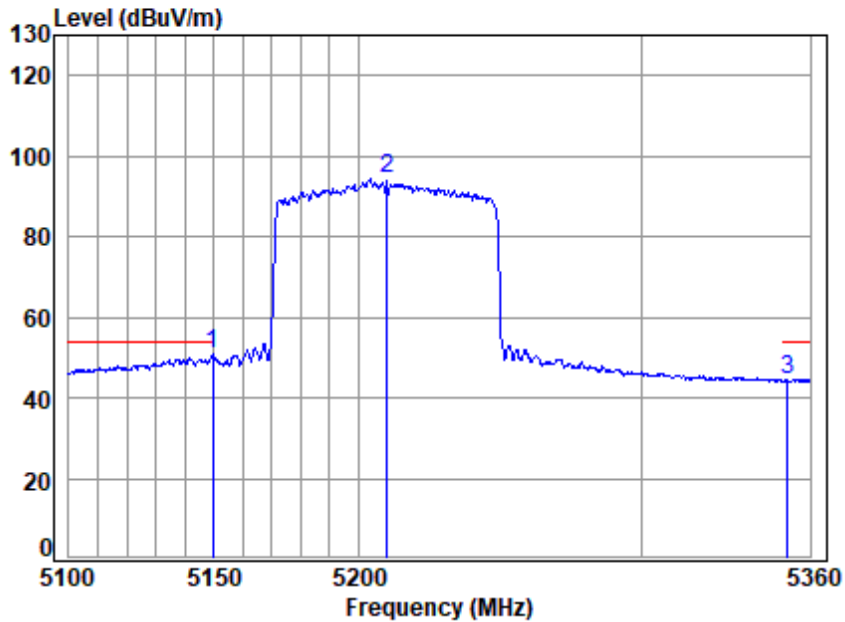

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5210 Band edge
 : 5G WIFI 11AC80


		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	q 5149.435	18.83	33.90	31.28	29.42	50.87	54.00	-3.13	Average
2	5210.000	18.92	34.02	31.31	72.64	94.27	-----	-----	Average
3	5351.744	19.11	34.41	31.39	22.52	44.65	54.00	-9.35	Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

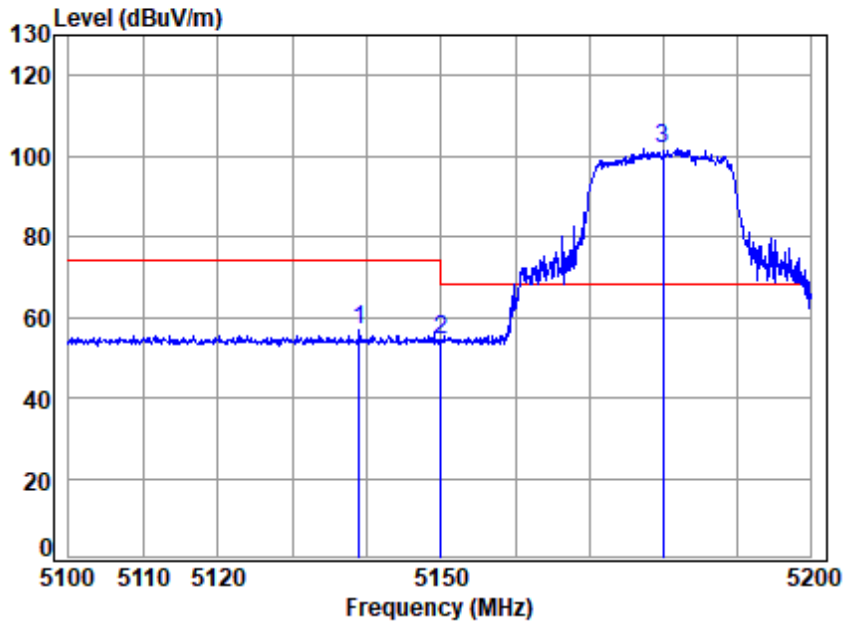


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5180 Band edge
 : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1	5138.969	18.82	33.92	31.28	35.41	56.87	74.00	-17.13 peak
2	5149.980	18.83	33.90	31.28	33.13	54.58	74.00	-19.42 peak
3 p	5180.000	18.88	33.96	31.30	80.25	101.79	68.20	33.59 peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

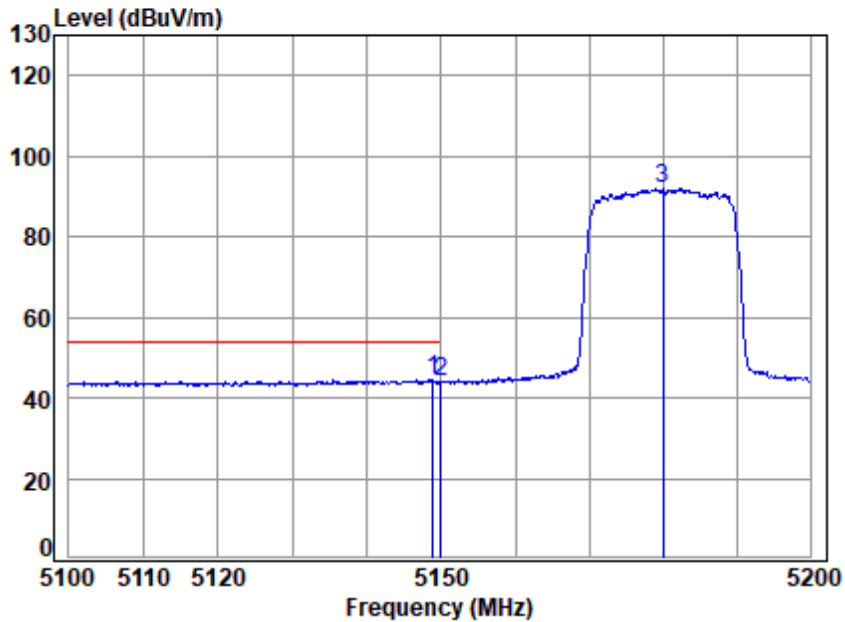


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5180 Band edge
 : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	q 5148.857	18.83	33.90	31.28	22.98	44.43	54.00	-9.57	Average
2	5149.980	18.83	33.90	31.28	22.66	44.11	54.00	-9.89	Average
3	5180.000	18.88	33.96	31.30	70.26	91.80	-----	-----	Average



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

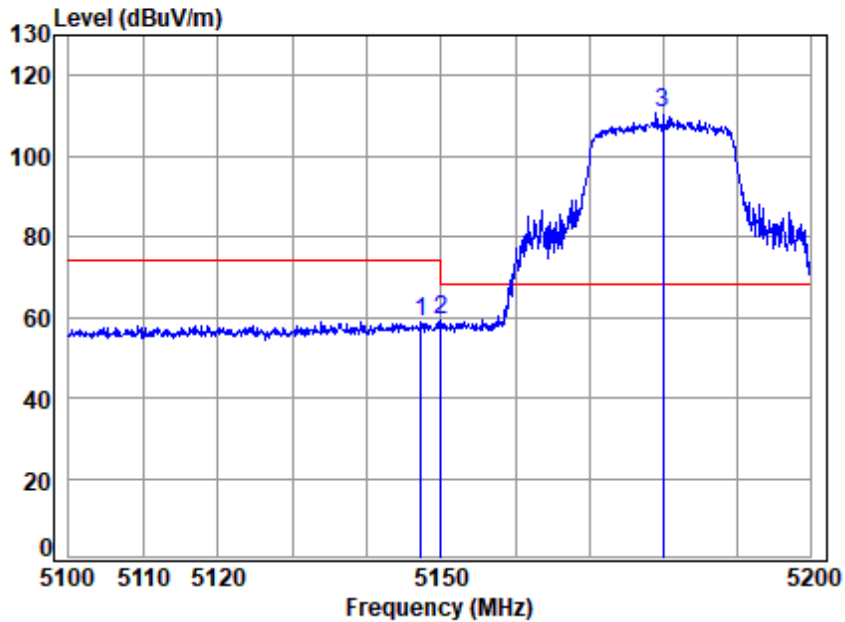


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5180 Band edge
 : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5147.258	18.83	33.91	31.28	37.55	59.01	74.00	-14.99 Peak
2	5149.980	18.83	33.90	31.28	38.04	59.49	74.00	-14.51 Peak
3 p	5180.000	18.88	33.96	31.30	89.25	110.79	68.20	42.59 Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

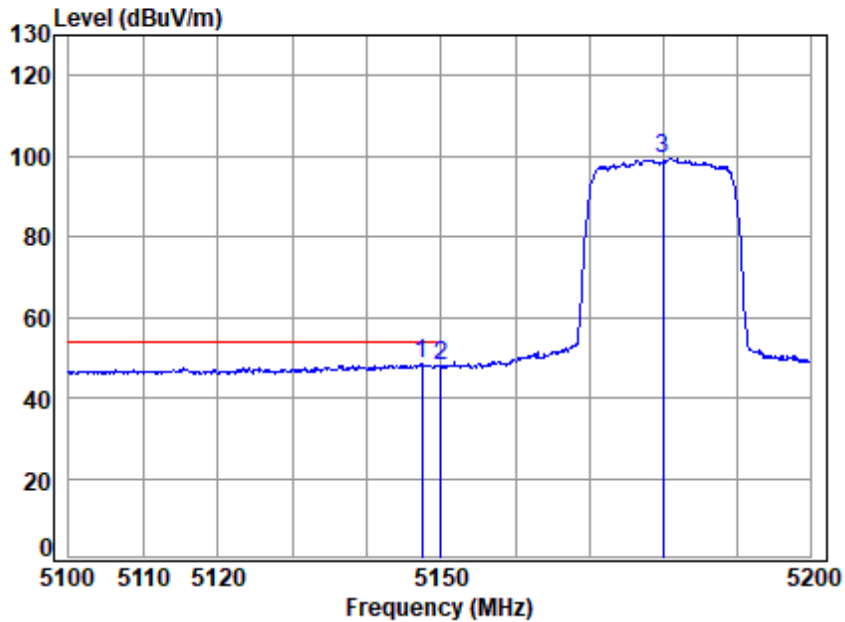


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5180 Band edge
 : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	q 5147.358	18.83	33.91	31.28	26.95	48.41	54.00	-5.59	Average
2	5149.980	18.83	33.90	31.28	26.50	47.95	54.00	-6.05	Average
3	5180.000	18.88	33.96	31.30	77.88	99.42	-----	-----	Average



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

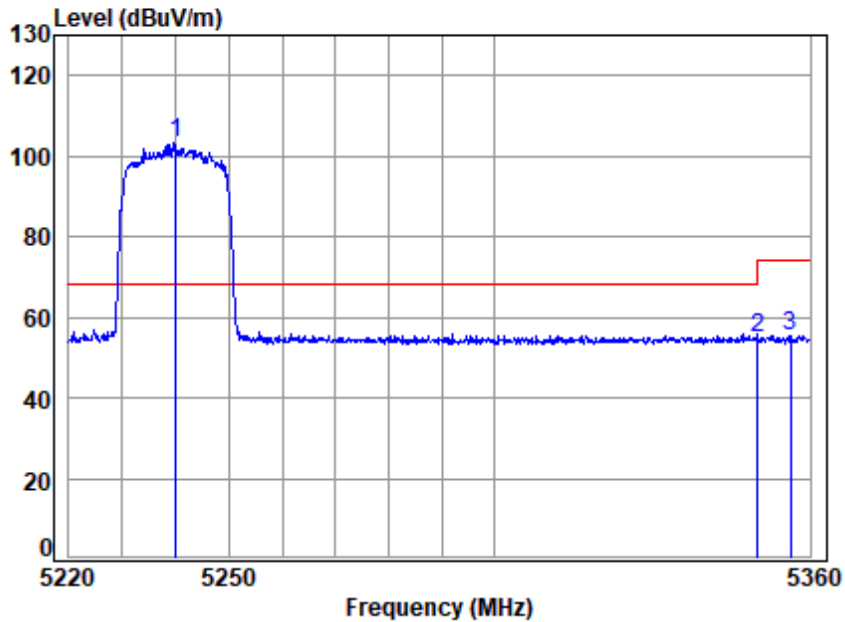


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5240 Band edge
 : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5240.000	18.96	34.08	31.33	81.49	103.20	68.20	35.00 peak
2	5350.020	19.11	34.40	31.39	32.85	54.97	74.00	-19.03 peak
3	5356.313	19.12	34.43	31.39	33.35	55.51	74.00	-18.49 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
 Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

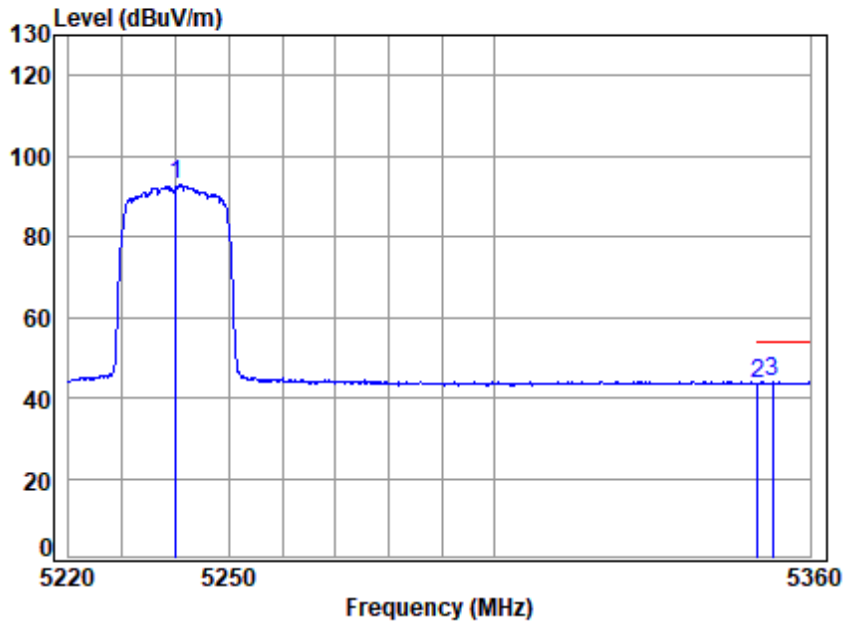


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5240 Band edge
 : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5240.000	18.96	34.08	31.33	71.18	92.89	-----	Average
2	5350.020	19.11	34.40	31.39	21.47	43.59	54.00	-10.41 Average
3 q	5352.912	19.11	34.41	31.39	21.80	43.93	54.00	-10.07 Average



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

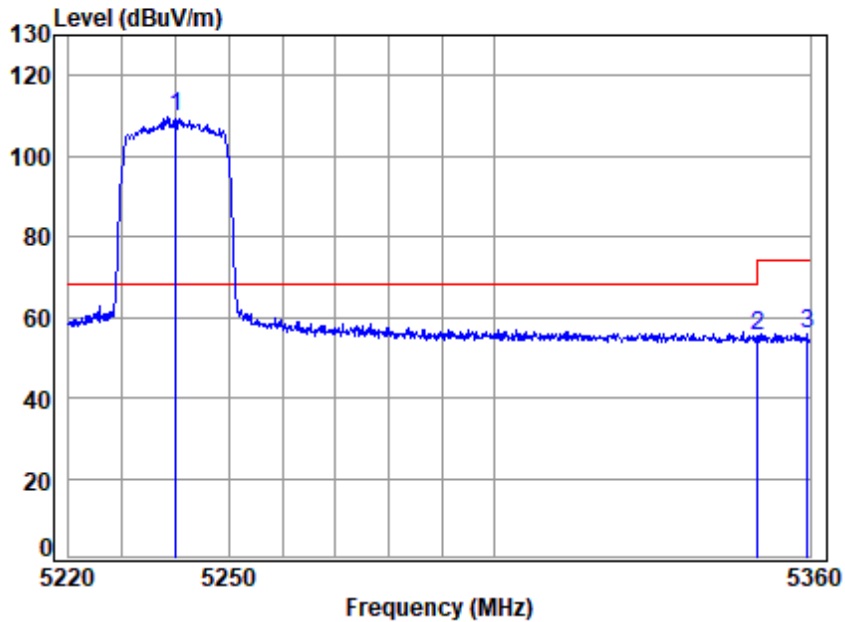


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5240 Band edge
 : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p	5240.000	18.96	34.08	31.33	87.92	109.63	68.20	41.43	Peak
2	5350.020	19.11	34.40	31.39	33.48	55.60	74.00	-18.40	Peak
3	5359.574	19.12	34.44	31.39	33.91	56.08	74.00	-17.92	Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

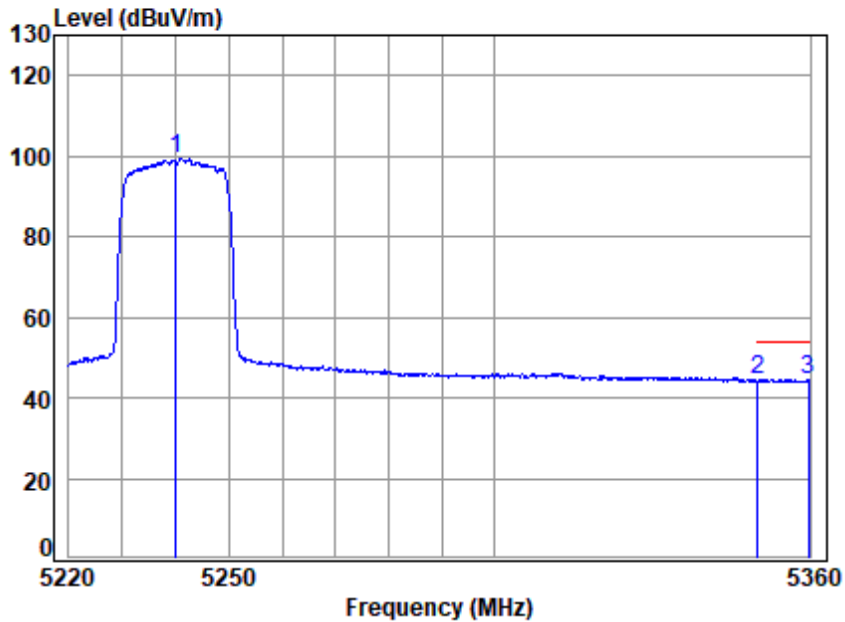


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5240 Band edge
 : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5240.000	18.96	34.08	31.33	77.88	99.59	-----	-----	Average
2	5350.020	19.11	34.40	31.39	22.33	44.45	54.00	-9.55	Average
3 q	5359.716	19.12	34.44	31.39	22.49	44.66	54.00	-9.34	Average




Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:Low

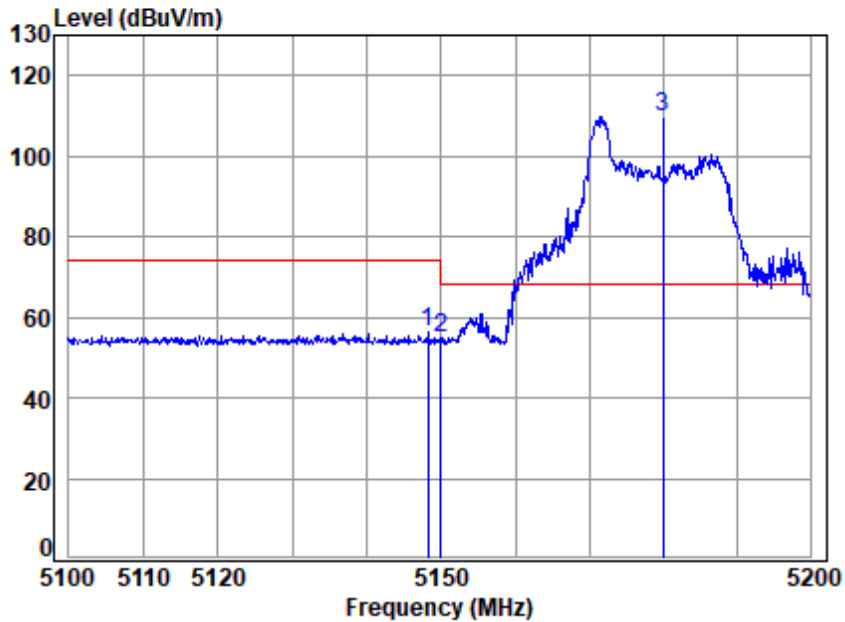

Site	: chamber							
Condition:	3m HORIZONTAL							
Job No	: 03197AT\03196AT							
Mode	: 5180 Band edge							
	: 5G WIFI 11AX20 Partial RU							
	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	18.83	33.90	31.28	34.82	56.27	74.00	-17.73	peak
2	18.83	33.90	31.28	33.50	54.95	74.00	-19.05	peak
3 p	18.88	33.96	31.30	88.32	109.86	68.20	41.66	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:Low

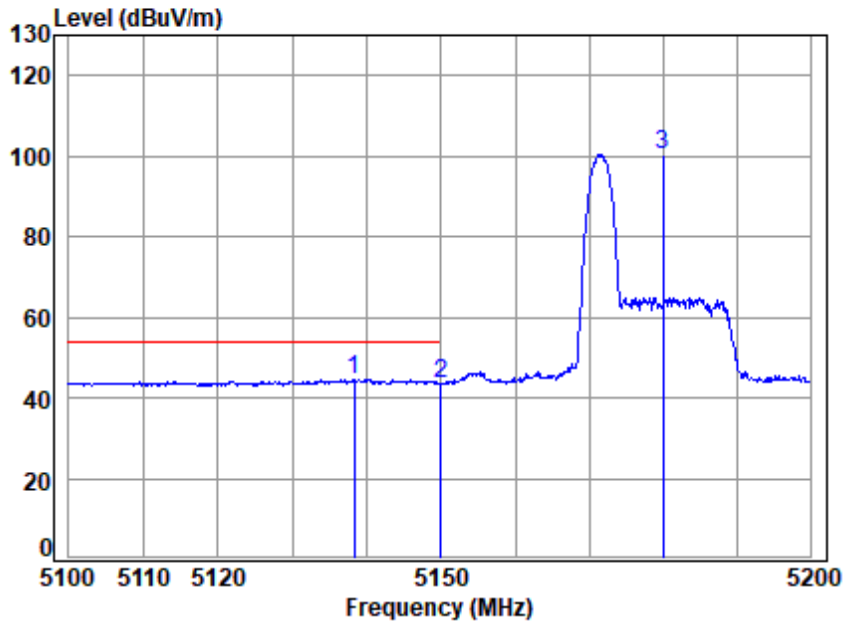


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5180 Band edge
 : 5G WIFI 11AX20 Partial RU

		Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 q 5138.271	18.82	33.92	31.27	23.14	44.61	54.00	-9.39	Average	
2 5149.980	18.83	33.90	31.28	22.21	43.66	54.00	-10.34	Average	
3 5180.000	18.88	33.96	31.30	78.74	100.28	-----	-----	Average	




Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:Low

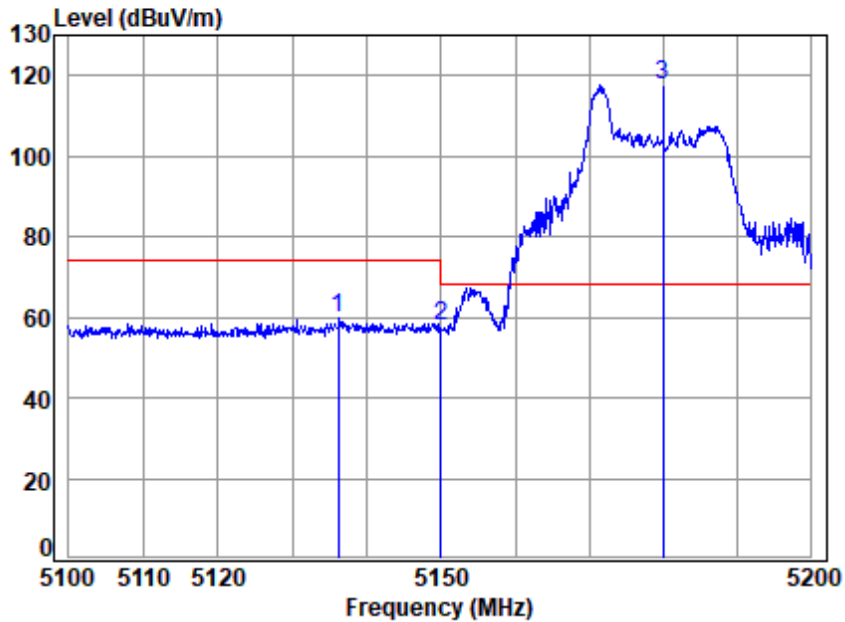

Site	: chamber						
Condition:	3m VERTICAL						
Job No	: 03197AT\03196AT						
Mode	: 5180 Band edge						
	: 5G WIFI 11AX20 Partial RU						
	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5136.175	18.81	33.93	31.27	38.28	59.75	74.00 -14.25 Peak
2	5149.980	18.83	33.90	31.28	36.37	57.82	74.00 -16.18 Peak
3 p	5180.000	18.88	33.96	31.30	96.30	117.84	68.20 49.64 Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:Low

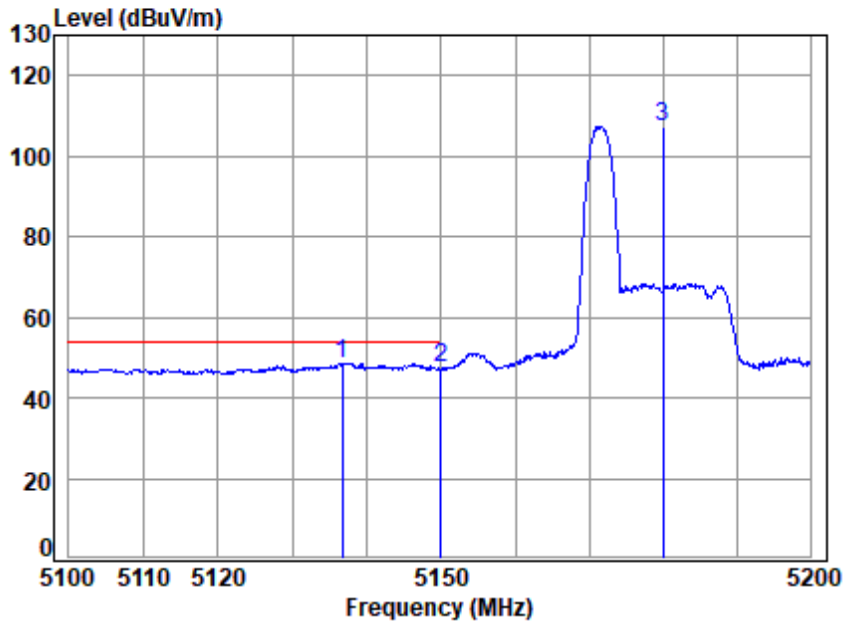


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5180 Band edge
 : 5G WIFI 11AX20 Partial RU

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5136.674	18.82	33.93	31.27	27.14	48.62	54.00	-5.38	Average
2 5149.980	18.83	33.90	31.28	26.04	47.49	54.00	-6.51	Average
3 5180.000	18.88	33.96	31.30	85.74	107.28	-----	-----	Average




Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:High

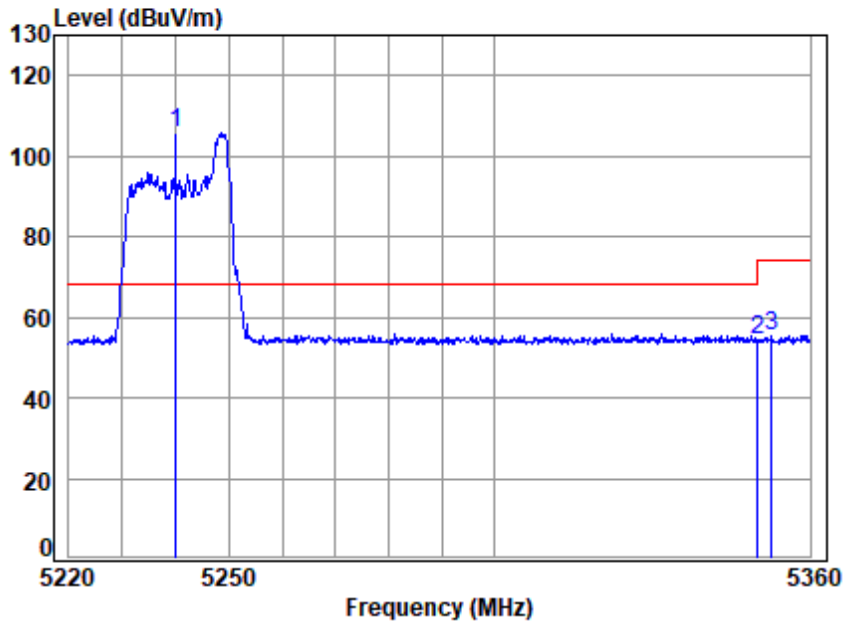

Site	: chamber							
Condition:	3m HORIZONTAL							
Job No	: 03197AT\03196AT							
Mode	: 5240 Band edge							
	: 5G WIFI 11AX20 Partial RU							
	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p	18.96	34.08	31.33	84.00	105.71	68.20	37.51	peak
2	19.11	34.40	31.39	32.47	54.59	74.00	-19.41	peak
3	19.11	34.41	31.39	33.39	55.52	74.00	-18.48	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:High

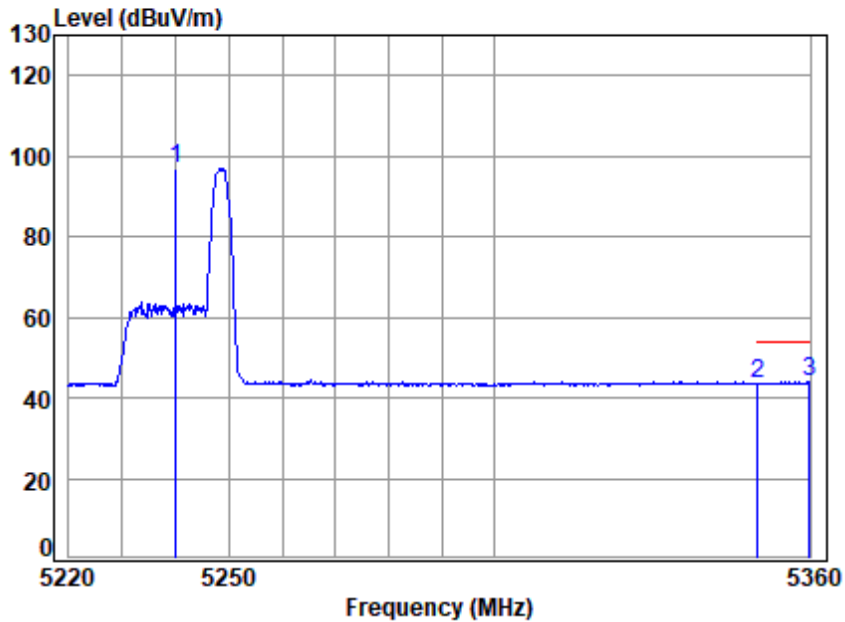

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5240 Band edge

: 5G WIFI 11AX20 Partial RU
 Cable Ant Preamp Read Limit Over
 Freq Loss Factor Factor Level Level Line Limit Remark


	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5240.000	18.96	34.08	31.33	75.36	97.07	-----	-----	Average
2	5350.020	19.11	34.40	31.39	21.48	43.60	54.00	-10.40	Average
3 q	5359.858	19.12	34.44	31.39	21.97	44.14	54.00	-9.86	Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:High

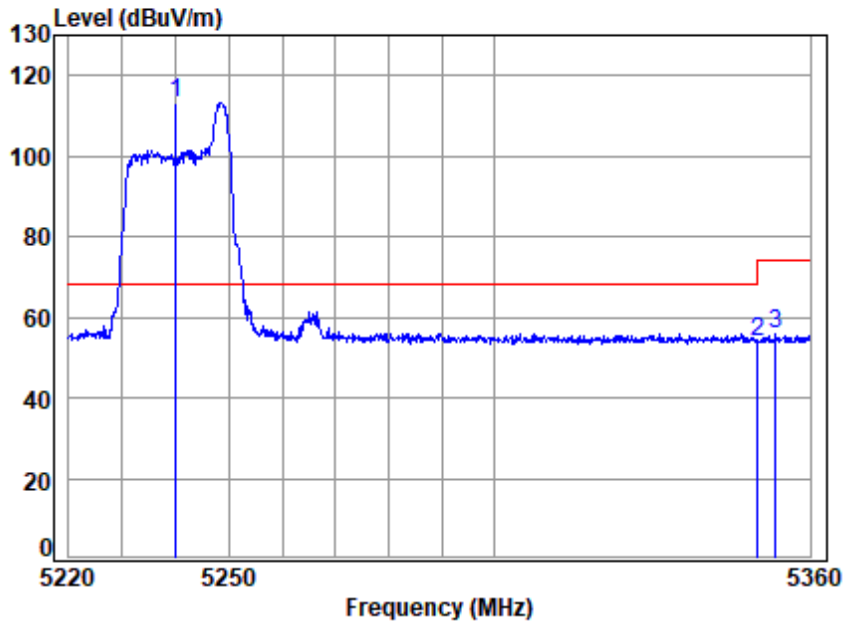

Site	: chamber						
Condition:	3m VERTICAL						
Job No	: 03197AT\03196AT						
Mode	: 5240 Band edge						
	: 5G WIFI 11AX20 Partial RU						
	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	18.96	34.08	31.33	91.64	113.35	68.20	45.15 Peak
2	19.11	34.40	31.39	31.91	54.03	74.00	-19.97 Peak
3	19.11	34.41	31.39	33.52	55.65	74.00	-18.35 Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:High

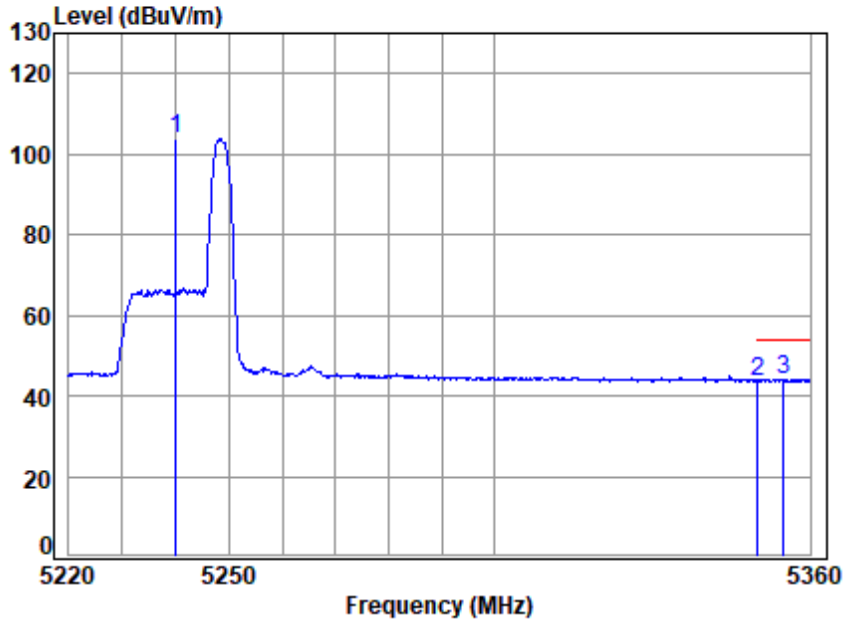


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5240 Band edge
 : 5G WIFI 11AX20 Partial RU

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5240.000	18.96	34.08	31.33	82.16	103.87	-----	-----	Average
2	5350.020	19.11	34.40	31.39	21.55	43.67	54.00	-10.33	Average
3 q	5354.896	19.12	34.42	31.39	21.99	44.14	54.00	-9.86	Average



Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

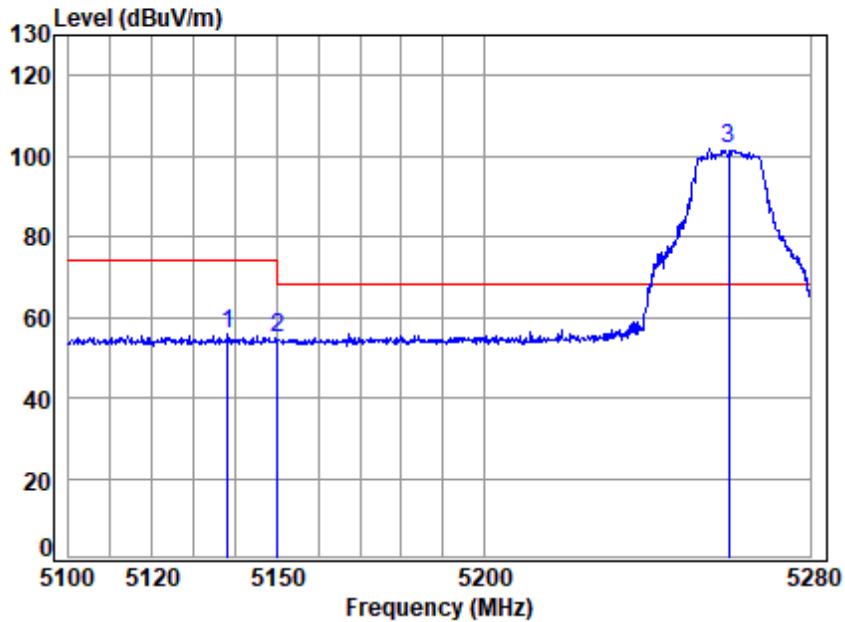


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5260 Band edge
 : 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5138.175	18.82	33.92	31.27	34.47	55.94	74.00	-18.06 peak
2	5149.980	18.83	33.90	31.28	33.43	54.88	74.00	-19.12 peak
3 p	5260.000	18.99	34.12	31.34	80.24	102.01	68.20	33.81 peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

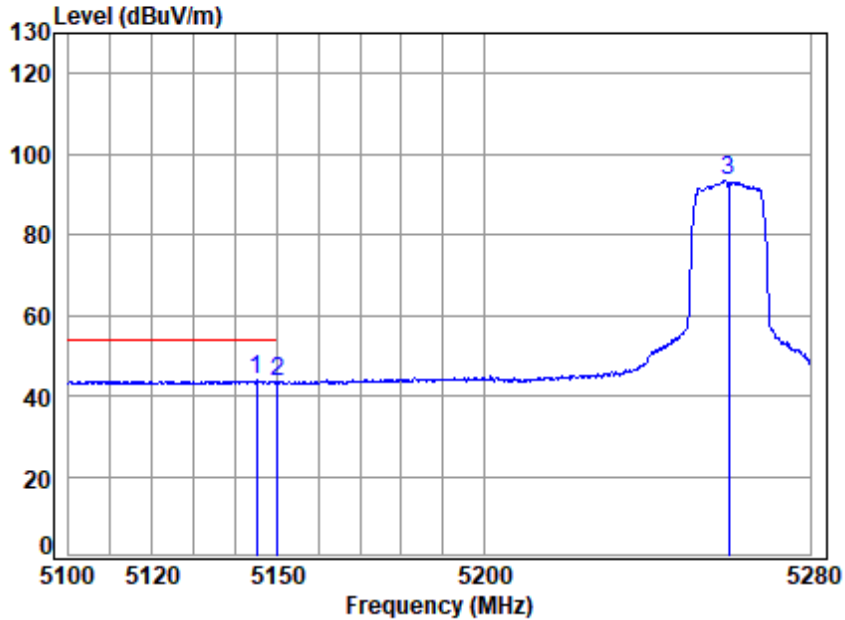


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5260 Band edge
 : 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1 q	5145.130	18.83	33.91	31.28	22.46	43.92	54.00	-10.08 Average
2	5149.980	18.83	33.90	31.28	22.04	43.49	54.00	-10.51 Average
3	5260.000	18.99	34.12	31.34	71.79	93.56	-----	----- Average



Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

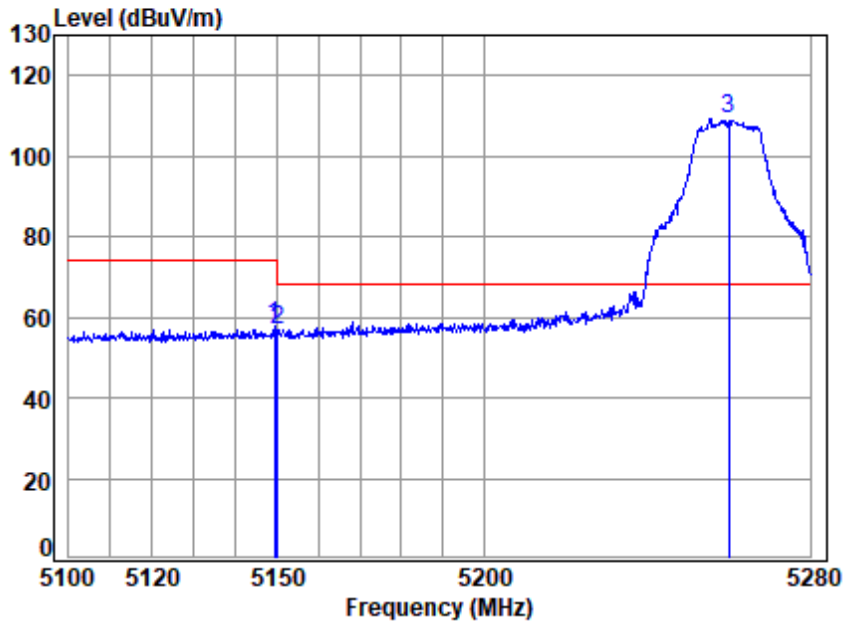


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5260 Band edge
 : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.236	18.83	33.90	31.28	36.33	57.78	74.00	-16.22	Peak
2	5149.980	18.83	33.90	31.28	35.50	56.95	74.00	-17.05	Peak
3 p	5260.000	18.99	34.12	31.34	87.47	109.24	68.20	41.04	Peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

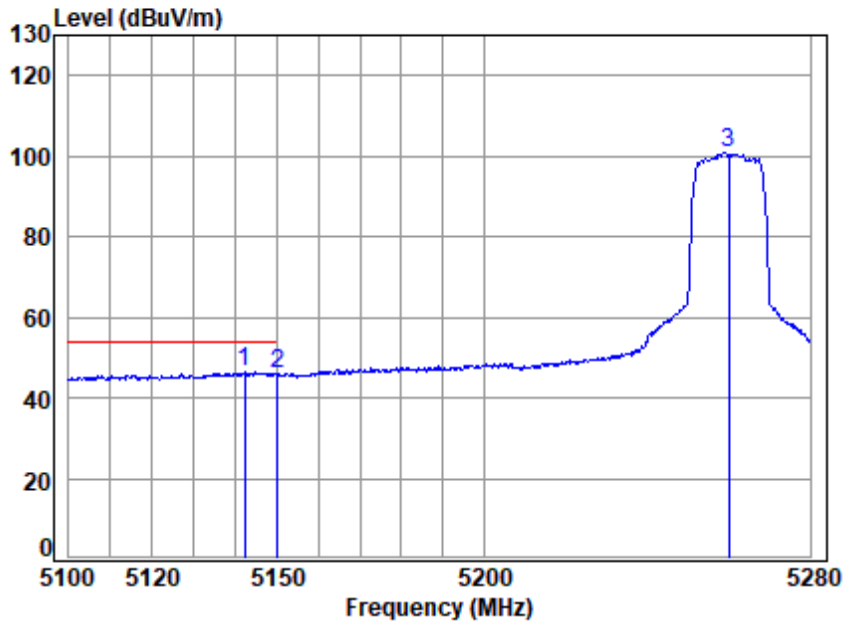


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5260 Band edge
 : 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1 q 5142.097	18.82	33.92	31.28	24.80	46.26	54.00	-7.74	Average
2 5149.980	18.83	33.90	31.28	24.59	46.04	54.00	-7.96	Average
3 5260.000	18.99	34.12	31.34	79.10	100.87	-----	-----	Average



Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

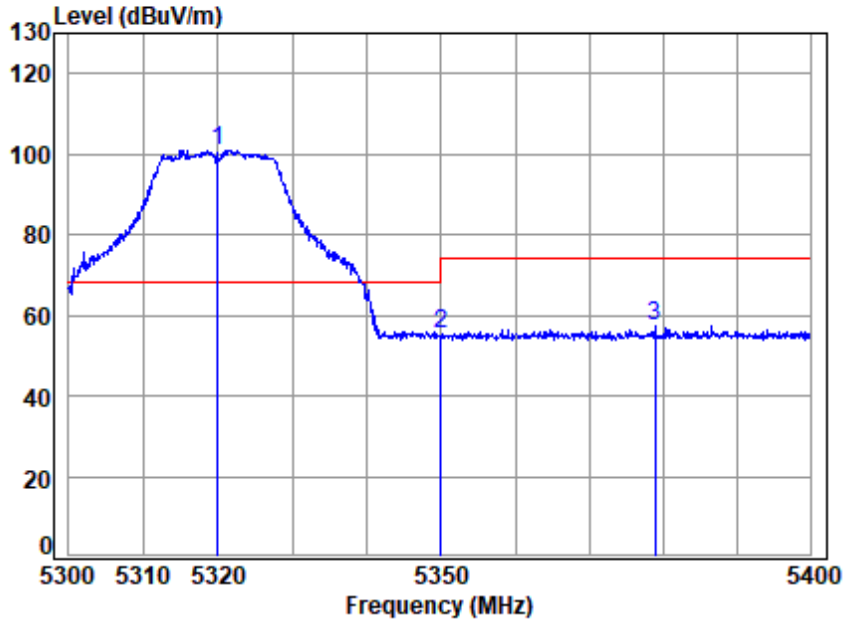


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5320 Band edge
 : 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1 p 5320.000	19.07	34.28	31.37	78.99	100.97	68.20	32.77	peak
2 5350.020	19.11	34.40	31.39	33.13	55.25	74.00	-18.75	peak
3 5378.945	19.15	34.52	31.40	35.12	57.39	74.00	-16.61	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

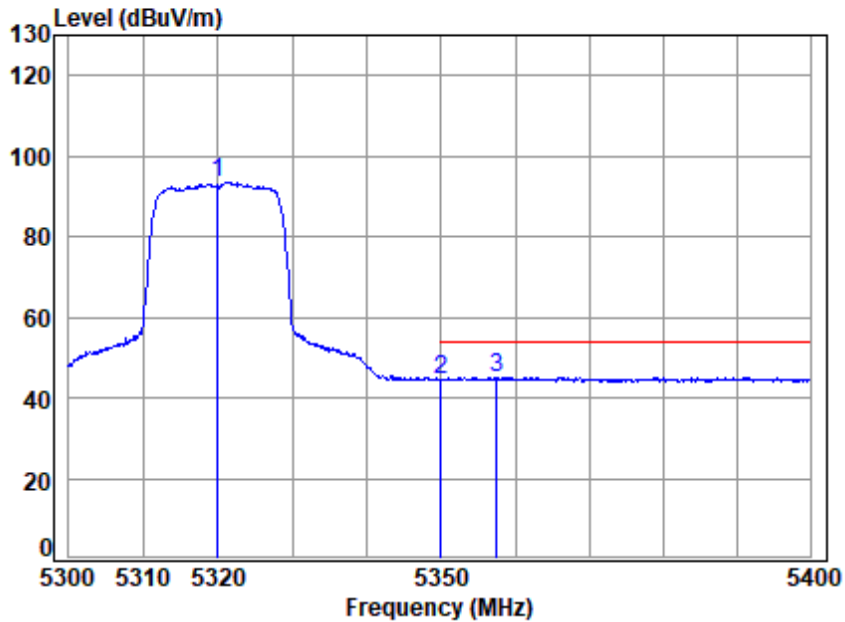


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5320 Band edge
 : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	19.07	34.28	31.37	71.64	93.62	-----	-----	Average
2	5350.020	19.11	34.40	31.39	22.59	44.71	54.00	-9.29	Average
3 q	5357.472	19.12	34.43	31.39	23.02	45.18	54.00	-8.82	Average



Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

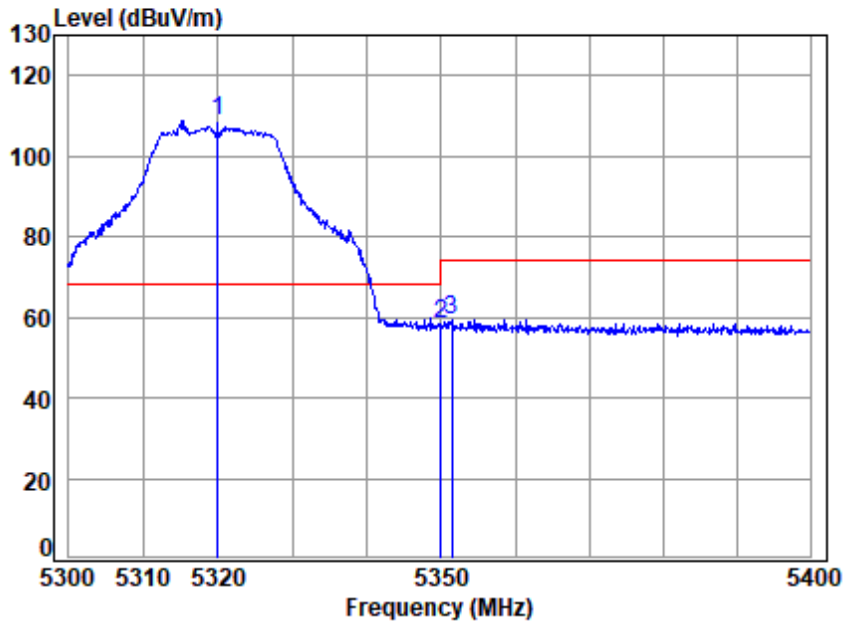


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5320 Band edge
 : 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1 p 5320.000	19.07	34.28	31.37	86.59	108.57	68.20	40.37	Peak
2 5350.020	19.11	34.40	31.39	36.35	58.47	74.00	-15.53	Peak
3 5351.467	19.11	34.41	31.39	37.31	59.44	74.00	-14.56	Peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

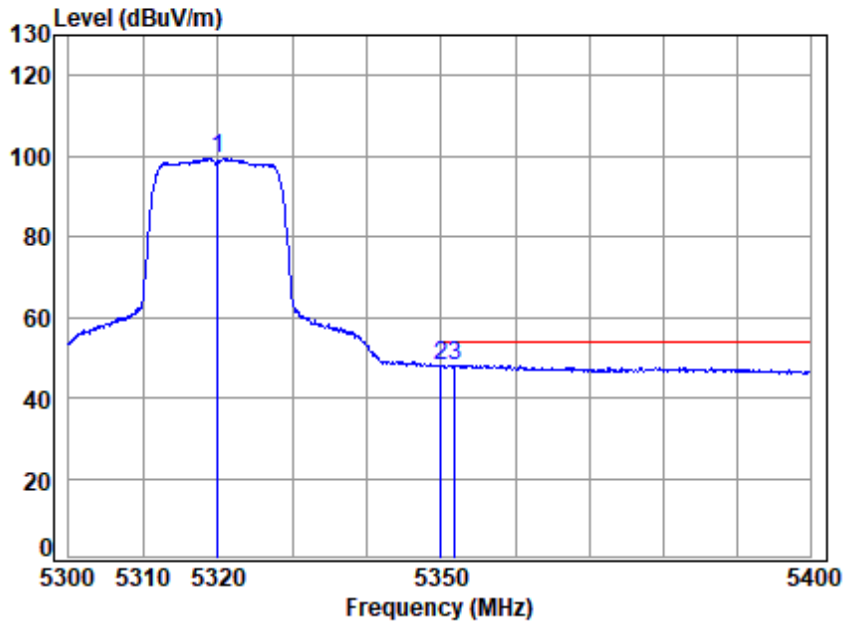

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5320 Band edge
 : 5G WIFI 11A


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	19.07	34.28	31.37	77.44	99.42	-----	-----	Average
2	5350.020	19.11	34.40	31.39	25.80	47.92	54.00	-6.08	Average
3 q	5351.867	19.11	34.41	31.39	25.98	48.11	54.00	-5.89	Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

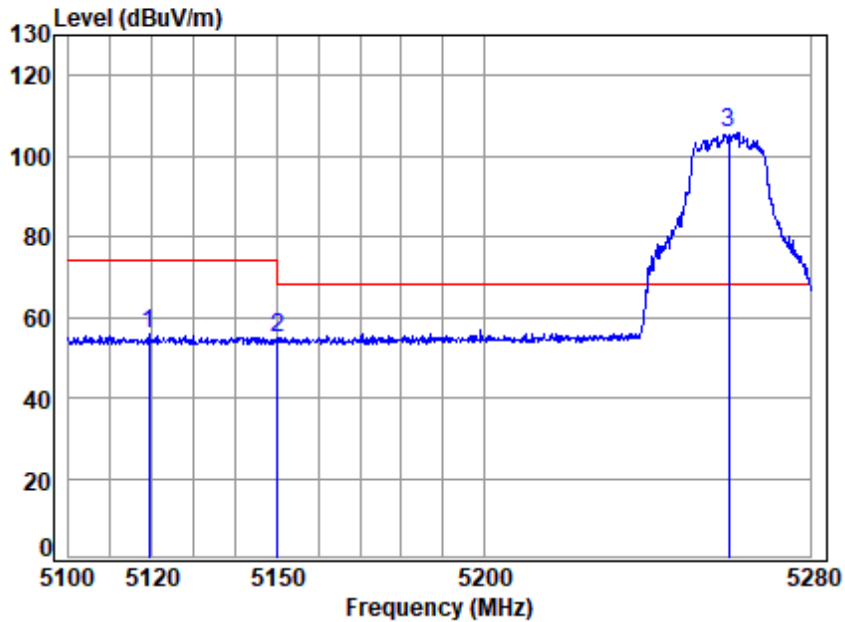


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5260 Band edge
 : 5G WIFI 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5119.141	18.79	33.96	31.26	34.51	56.00	74.00	-18.00	peak
2	5149.980	18.83	33.90	31.28	33.21	54.66	74.00	-19.34	peak
3 p	5260.000	18.99	34.12	31.34	84.00	105.77	68.20	37.57	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

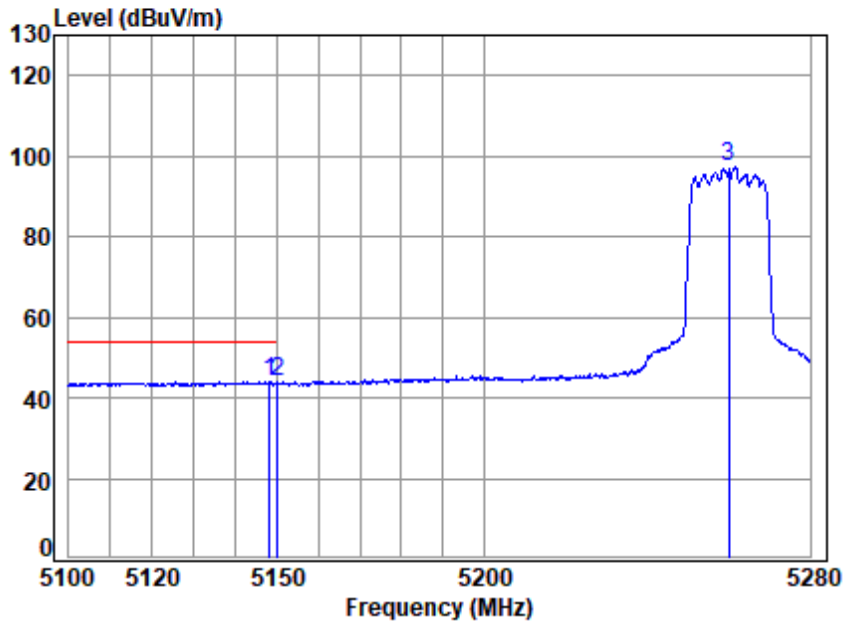


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5260 Band edge
 : 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	q 5148.165	18.83	33.90	31.28	22.42	43.87	54.00	-10.13	Average
2	5149.980	18.83	33.90	31.28	22.34	43.79	54.00	-10.21	Average
3	5260.000	18.99	34.12	31.34	75.49	97.26	-----	-----	Average



Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

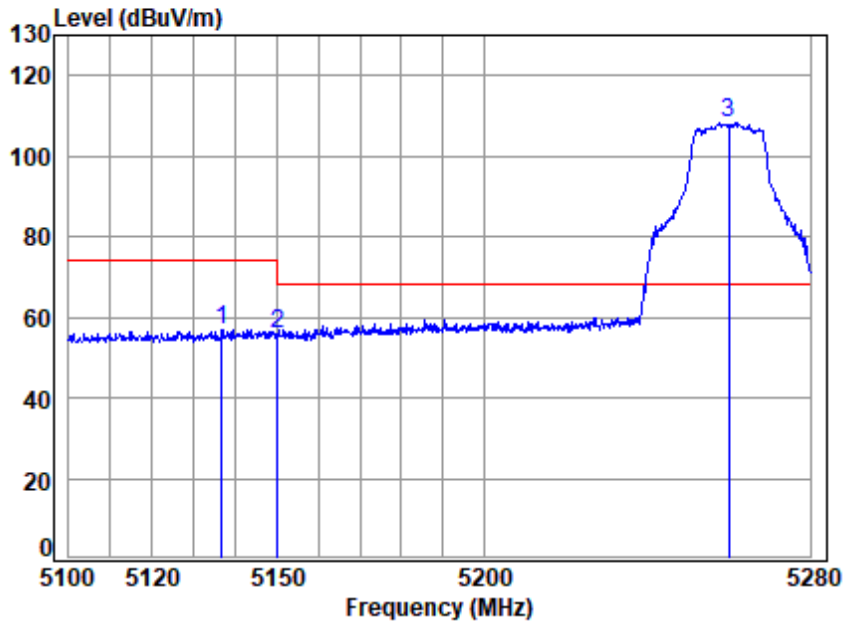


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5260 Band edge
 : 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5136.750	18.82	33.93	31.27	35.46	56.94	74.00 -17.06 Peak
2	5149.980	18.83	33.90	31.28	34.62	56.07	74.00 -17.93 Peak
3 p	5260.000	18.99	34.12	31.34	86.48	108.25	68.20 40.05 Peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

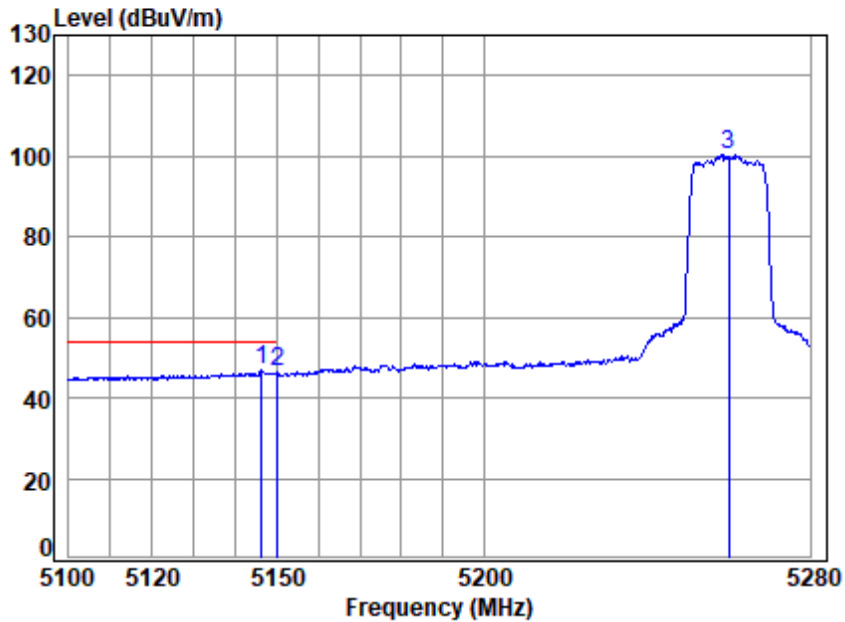


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5260 Band edge
 : 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	q 5146.201	18.83	33.91	31.28	25.27	46.73	54.00	-7.27	Average
2	5149.980	18.83	33.90	31.28	24.94	46.39	54.00	-7.61	Average
3	5260.000	18.99	34.12	31.34	78.62	100.39	-----	-----	Average



Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

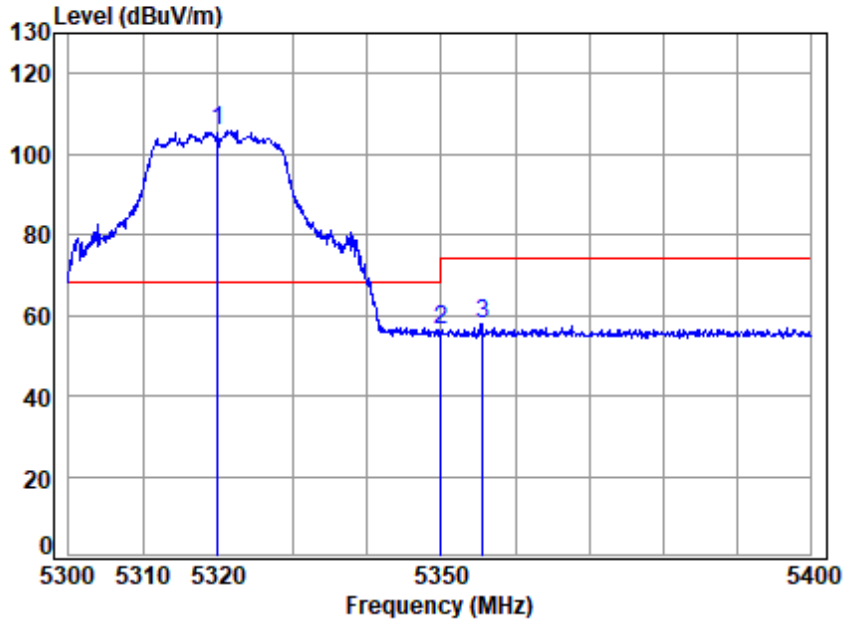


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5320 Band edge
 : 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5320.000	19.07	34.28	31.37	83.95	105.93	68.20	37.73	peak
2 5350.020	19.11	34.40	31.39	34.20	56.32	74.00	-17.68	peak
3 5355.569	19.12	34.42	31.39	35.60	57.75	74.00	-16.25	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

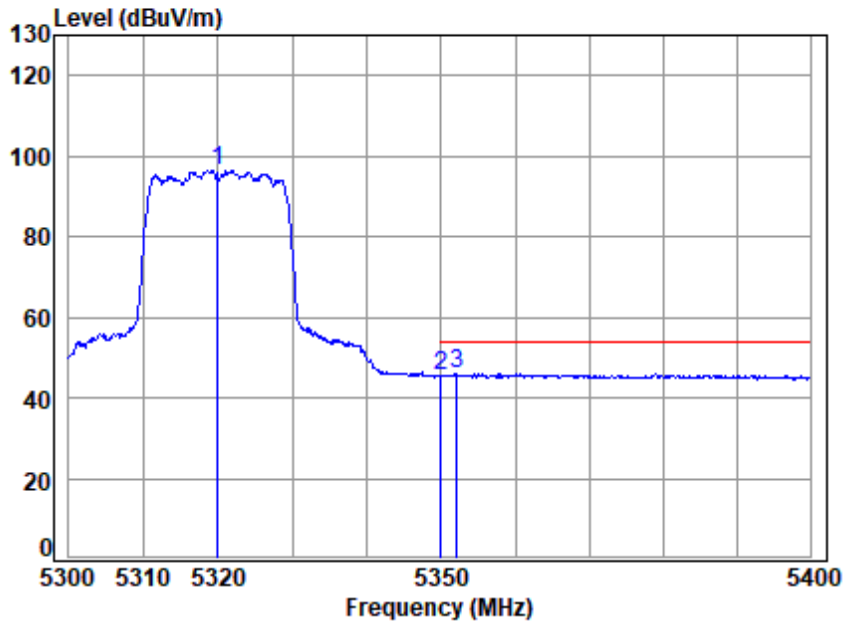


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5320 Band edge
 : 5G WIFI 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	19.07	34.28	31.37	74.36	96.34	-----	-----	Average
2	5350.020	19.11	34.40	31.39	23.43	45.55	54.00	-8.45	Average
3 q	5352.067	19.11	34.41	31.39	23.99	46.12	54.00	-7.88	Average



Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

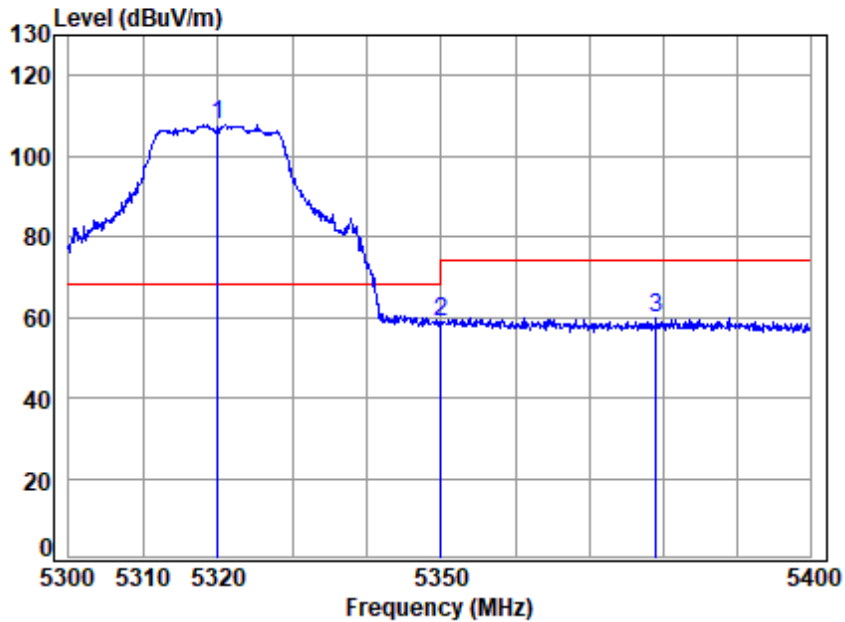


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5320 Band edge
 : 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1 p 5320.000	19.07	34.28	31.37	85.83	107.81	68.20	39.61	Peak
2 5350.020	19.11	34.40	31.39	36.92	59.04	74.00	-14.96	Peak
3 5379.046	19.15	34.52	31.40	37.72	59.99	74.00	-14.01	Peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

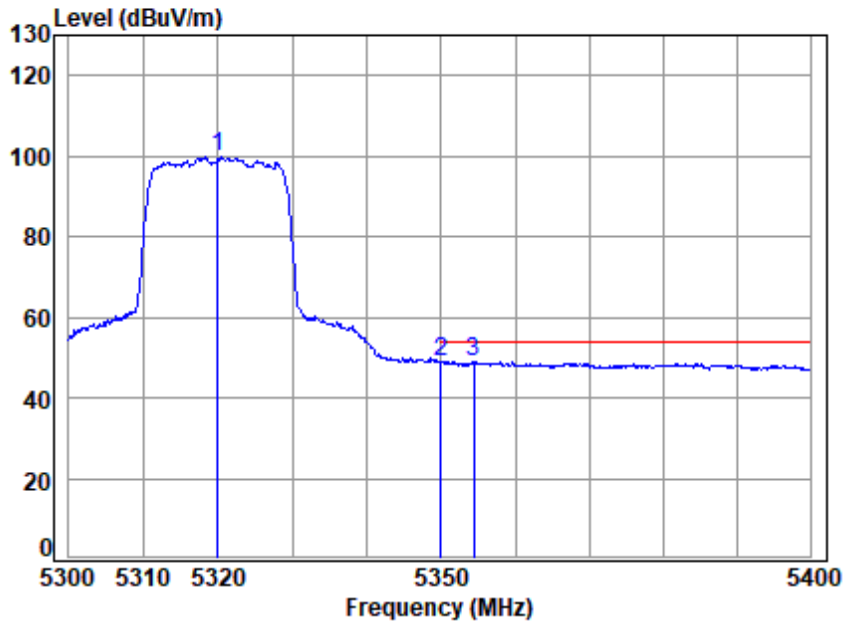


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5320 Band edge
 : 5G WIFI 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	19.07	34.28	31.37	77.84	99.82	-----	-----	Average
2	5350.020	19.11	34.40	31.39	26.77	48.89	54.00	-5.11	Average
3 q	5354.368	19.12	34.42	31.39	26.96	49.11	54.00	-4.89	Average



Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

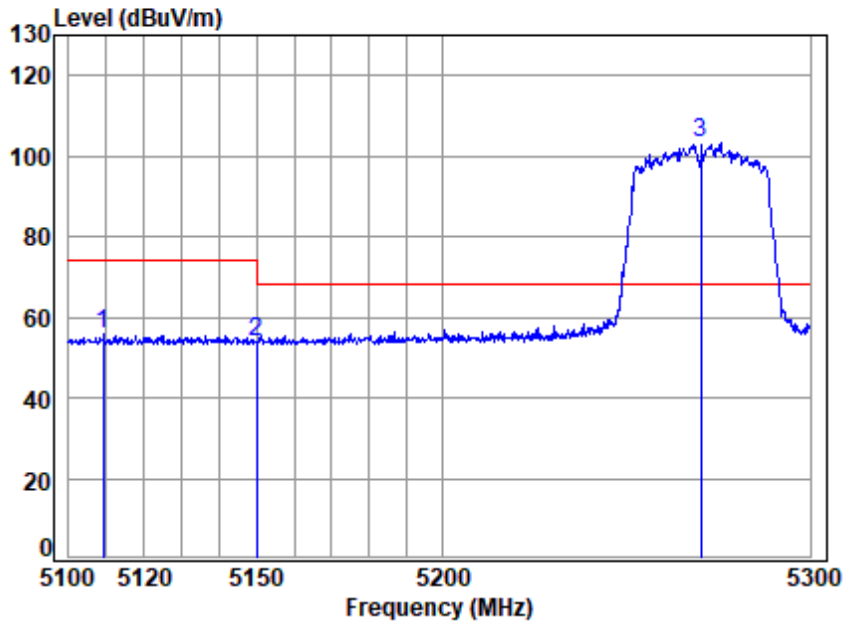


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5270 Band edge
 : 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5109.229	18.78	33.98	31.26	34.30	55.80	74.00	-18.20 peak
2	5149.980	18.83	33.90	31.28	32.34	53.79	74.00	-20.21 peak
3 p	5270.000	19.00	34.14	31.34	81.26	103.06	68.20	34.86 peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

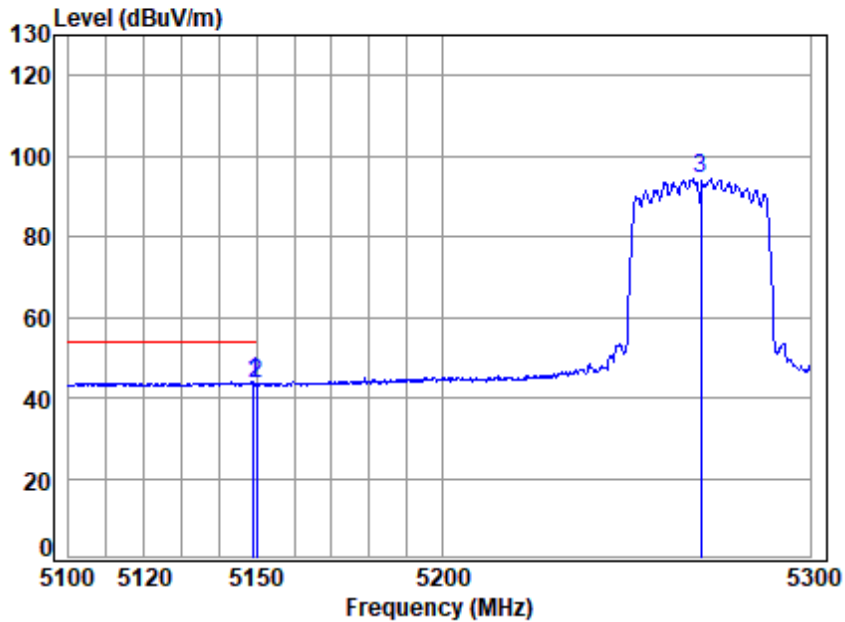


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5270 Band edge
 : 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	q 5149.083	18.83	33.90	31.28	22.49	43.94	54.00	-10.06	Average
2	5149.980	18.83	33.90	31.28	21.96	43.41	54.00	-10.59	Average
3	5270.000	19.00	34.14	31.34	72.66	94.46	-----	-----	Average



Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

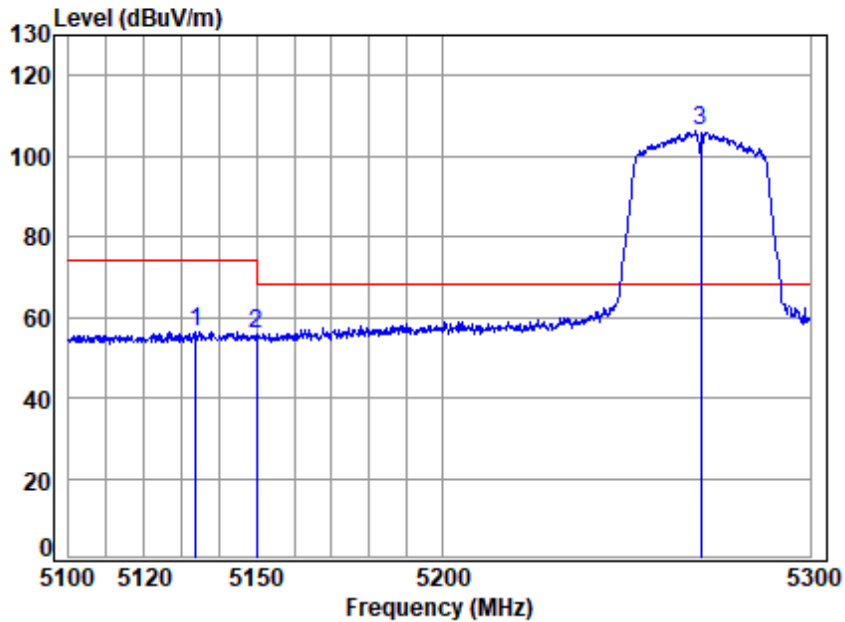

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5270 Band edge
 : 5G WIFI 11AC40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5133.657	18.81	33.93	31.27	35.08	56.55	74.00	-17.45 Peak
2	5149.980	18.83	33.90	31.28	34.20	55.65	74.00	-18.35 Peak
3 p	5270.000	19.00	34.14	31.34	84.29	106.09	68.20	37.89 Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

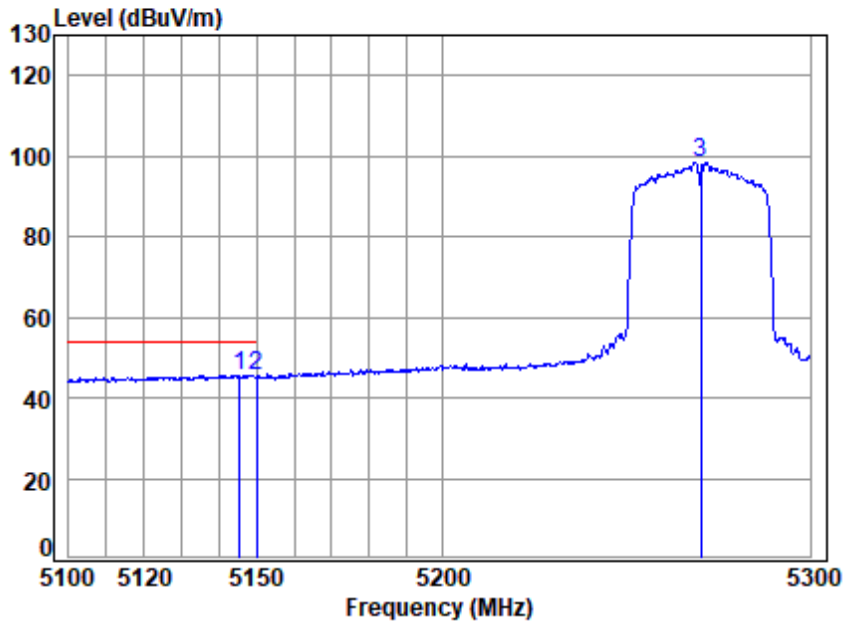


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5270 Band edge
 : 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 q	5145.321	18.83	33.91	31.28	24.17	45.63	54.00	-8.37 Average
2	5149.980	18.83	33.90	31.28	23.94	45.39	54.00	-8.61 Average
3	5270.000	19.00	34.14	31.34	76.61	98.41	-----	----- Average



Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

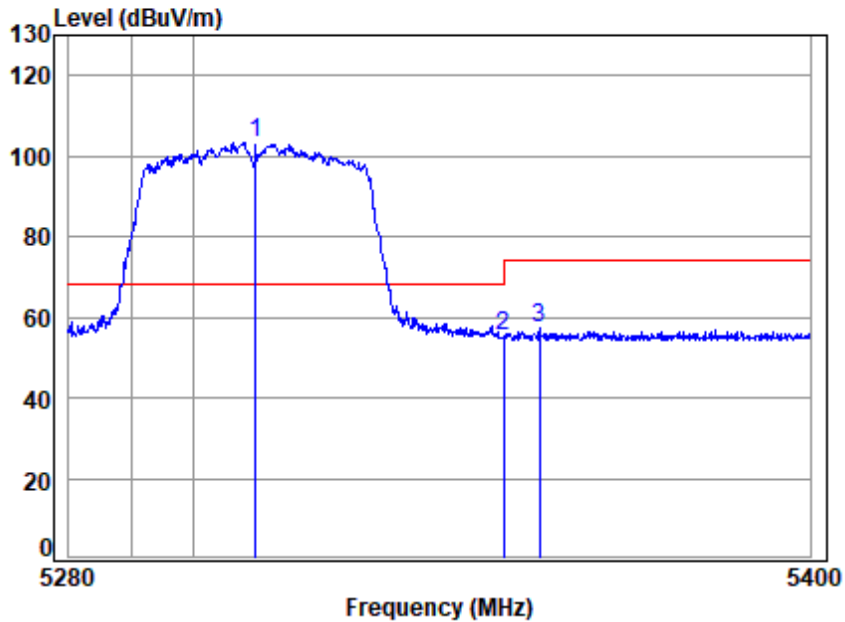


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5310 Band edge
 : 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5310.000	19.06	34.24	31.36	81.41	103.35	68.20	35.15	peak
2 5350.020	19.11	34.40	31.39	33.07	55.19	74.00	-18.81	peak
3 5355.887	19.12	34.42	31.39	35.30	57.45	74.00	-16.55	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

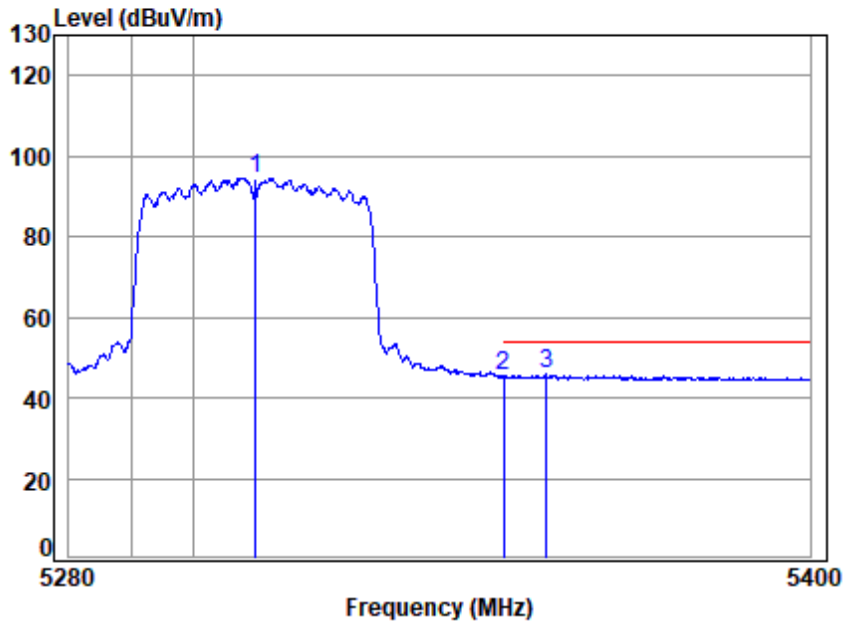


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5310 Band edge
 : 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5310.000	19.06	34.24	31.36	72.62	94.56	-----	-----	Average
2	5350.020	19.11	34.40	31.39	23.54	45.66	54.00	-8.34	Average
3 q	5356.971	19.12	34.43	31.39	23.59	45.75	54.00	-8.25	Average



Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

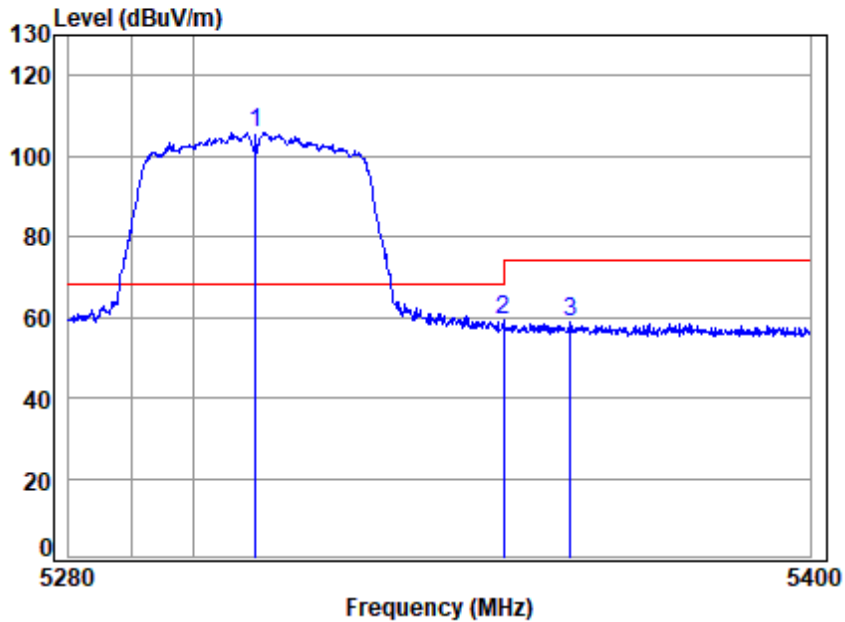


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5310 Band edge
 : 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1 p	5310.000	19.06	34.24	31.36	83.90	68.20	37.64	Peak
2	5350.020	19.11	34.40	31.39	37.18	74.00	-14.70	Peak
3	5360.945	19.12	34.44	31.39	36.48	74.00	-15.35	Peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

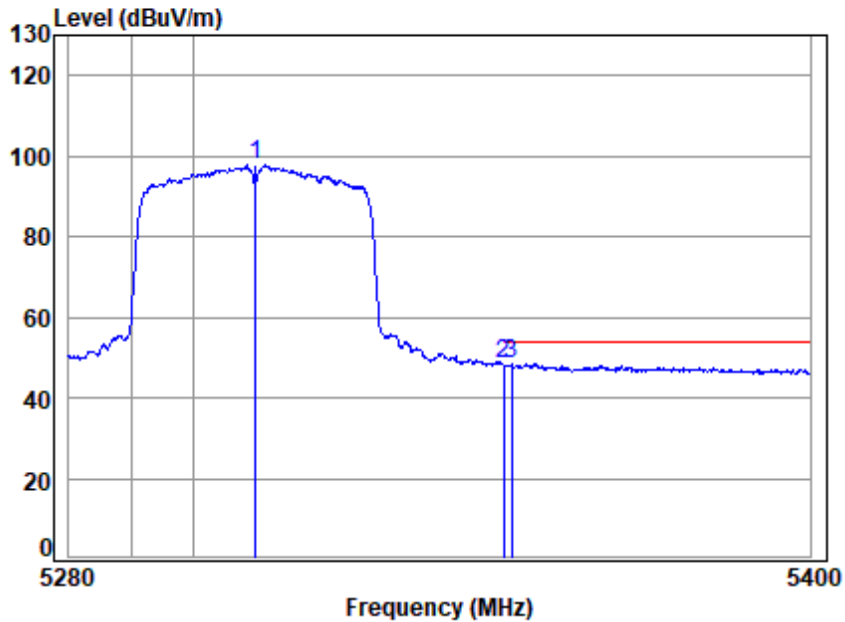


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5310 Band edge
 : 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5310.000	19.06	34.24	31.36	75.74	97.68	-----	-----	Average
2	5350.020	19.11	34.40	31.39	26.32	48.44	54.00	-5.56	Average
3 q	5351.315	19.11	34.41	31.39	26.36	48.49	54.00	-5.51	Average



Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

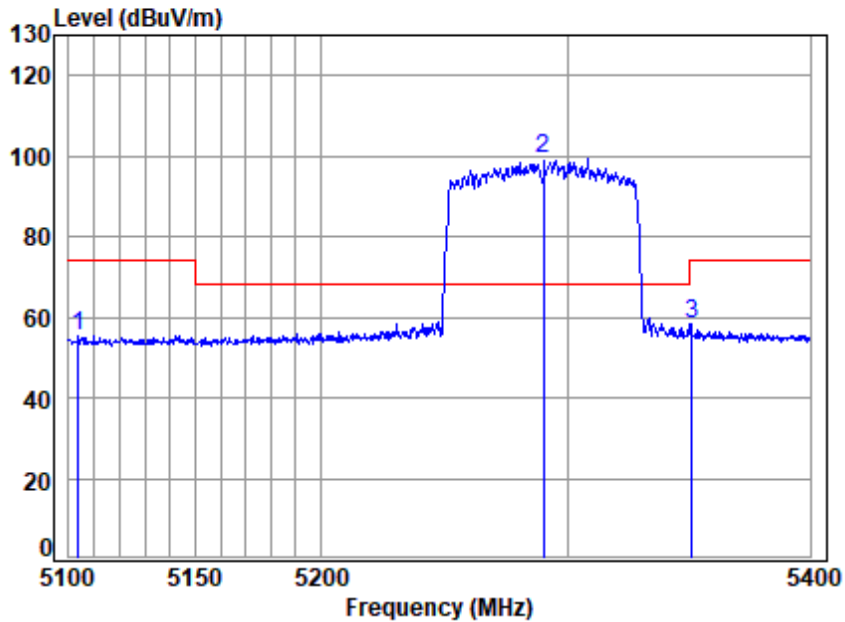

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5290 Band edge
 : 5G WIFI 11AC80


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5103.791	18.77	33.99	31.26	33.68	55.18	74.00	-18.82 peak
2 p	5290.000	19.03	34.18	31.35	77.57	99.43	68.20	31.23 peak
3	5350.840	19.11	34.40	31.39	36.08	58.20	74.00	-15.80 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

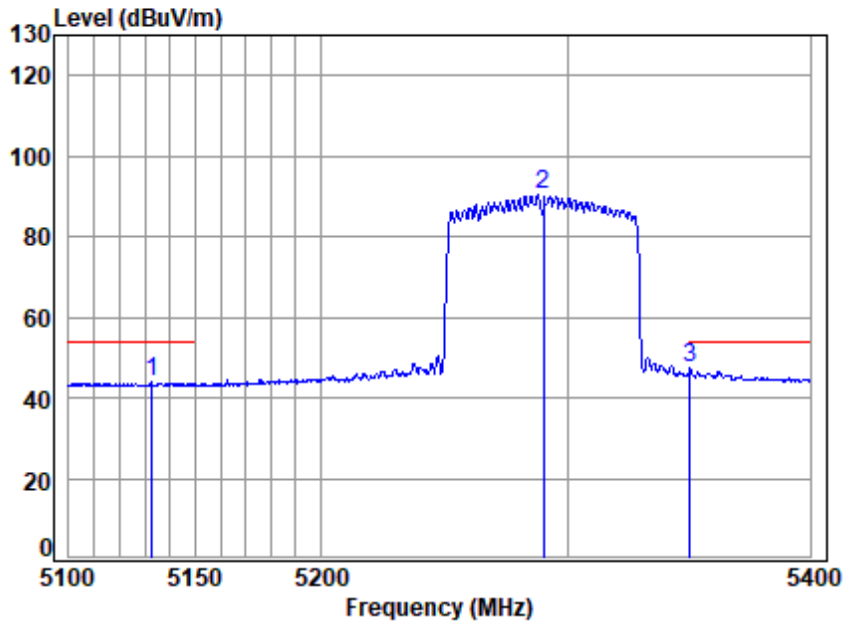


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5290 Band edge
 : 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5133.047	18.81	33.93	31.27	22.35	43.82	54.00	-10.18 Average
2	5290.000	19.03	34.18	31.35	68.75	90.61	-----	----- Average
3 q	5350.229	19.11	34.40	31.39	25.20	47.32	54.00	-6.68 Average



Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

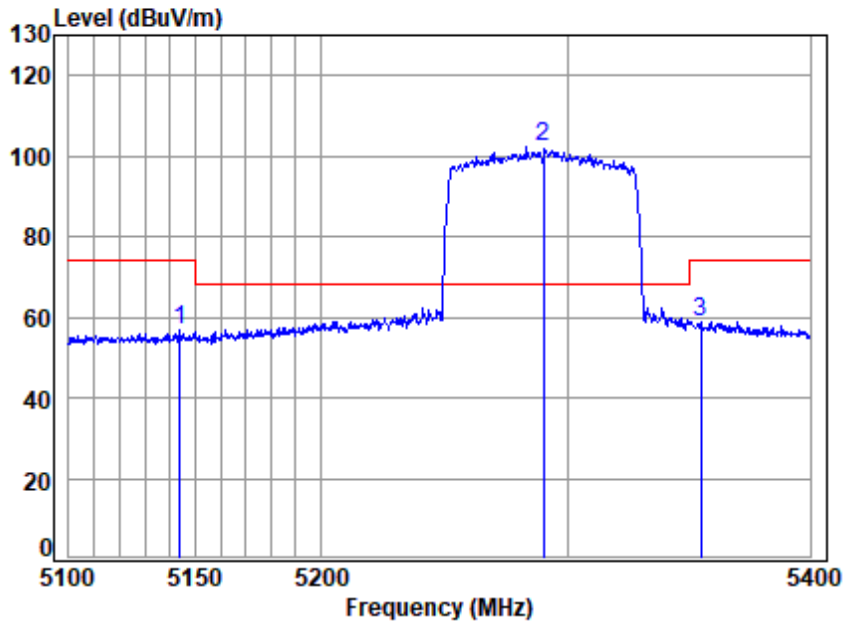


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5290 Band edge
 : 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5143.914	18.83	33.91	31.28	35.23	56.69	74.00	-17.31 Peak
2 p	5290.000	19.03	34.18	31.35	80.49	102.35	68.20	34.15 Peak
3	5354.818	19.12	34.42	31.39	36.56	58.71	74.00	-15.29 Peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

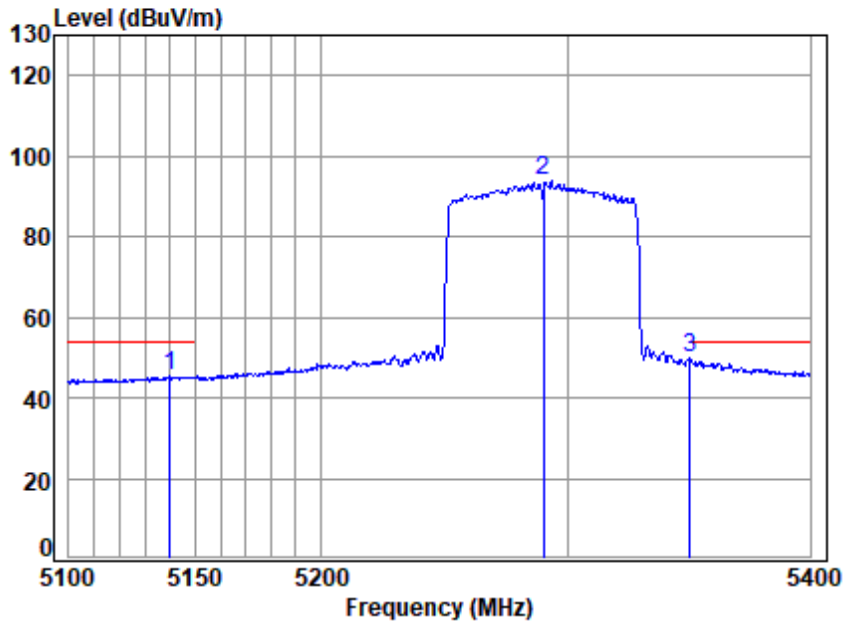


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5290 Band edge
 : 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5139.800	18.82	33.92	31.28	24.13	45.59	54.00	-8.41 Average
2	5290.000	19.03	34.18	31.35	71.84	93.70	-----	Average
3 q	5350.229	19.11	34.40	31.39	27.72	49.84	54.00	-4.16 Average



Test Mode: 06; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

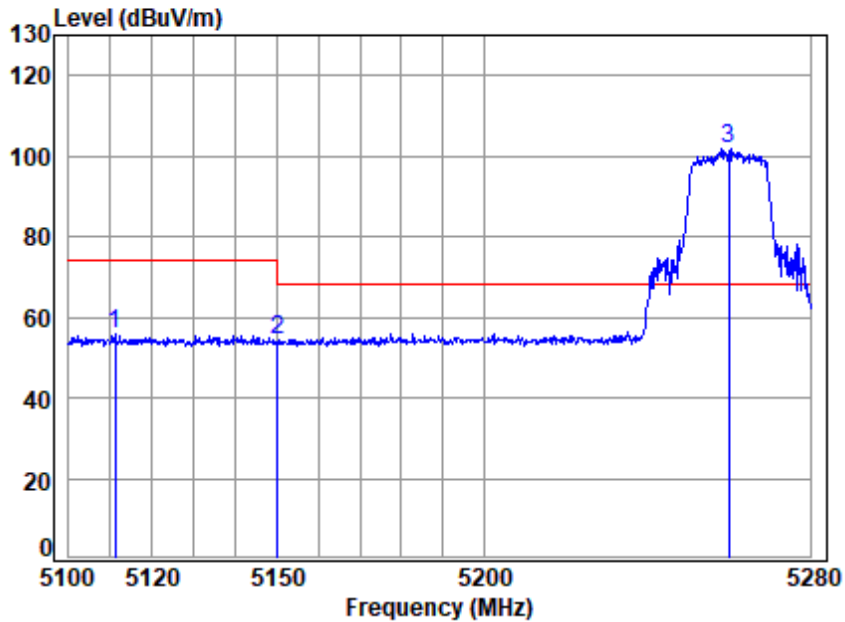


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5260 Band edge
 : 5G WIFI 11AX20

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5111.157	18.78	33.98	31.26	34.12	55.62	74.00	-18.38 peak
2	5149.980	18.83	33.90	31.28	32.97	54.42	74.00	-19.58 peak
3 p	5260.000	18.99	34.12	31.34	79.84	101.61	68.20	33.41 peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

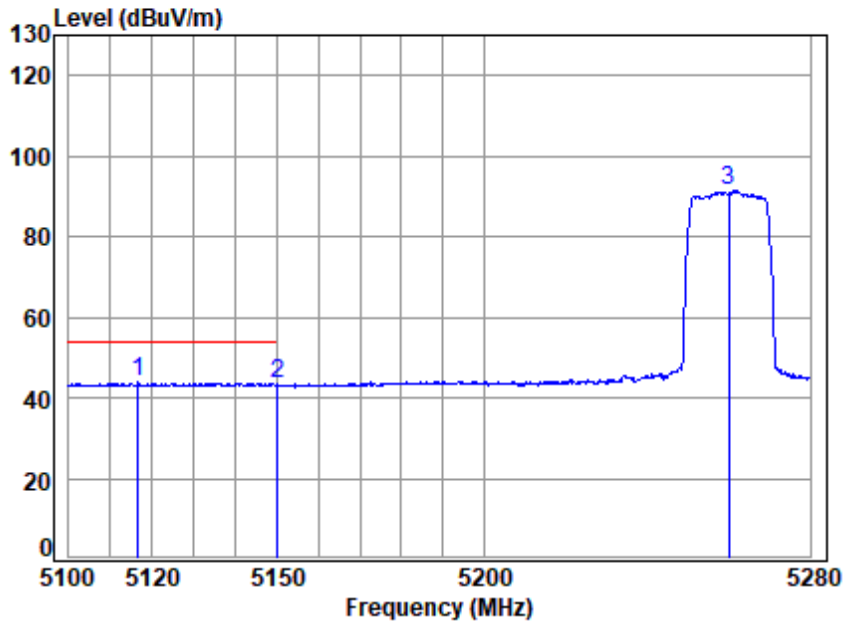


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5260 Band edge
 : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1 q	5116.655	18.79	33.97	31.26	22.37	43.87	54.00	-10.13 Average
2	5149.980	18.83	33.90	31.28	21.97	43.42	54.00	-10.58 Average
3	5260.000	18.99	34.12	31.34	69.73	91.50	-----	----- Average



Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

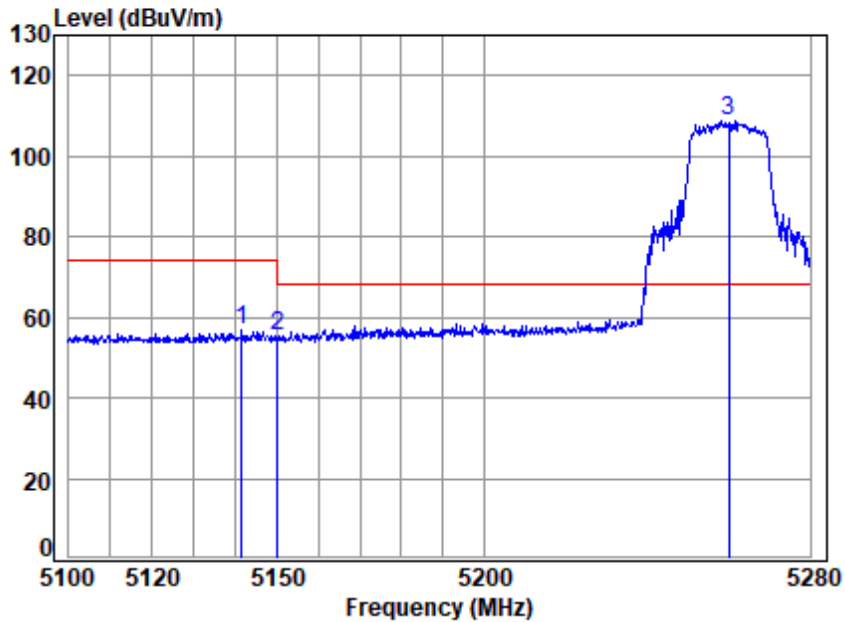


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5260 Band edge
 : 5G WIFI 11AX20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	18.82	33.92	31.28	35.30	56.76	74.00	-17.24
2	18.83	33.90	31.28	33.71	55.16	74.00	-18.84
3 p	18.99	34.12	31.34	87.09	108.86	68.20	40.66



Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

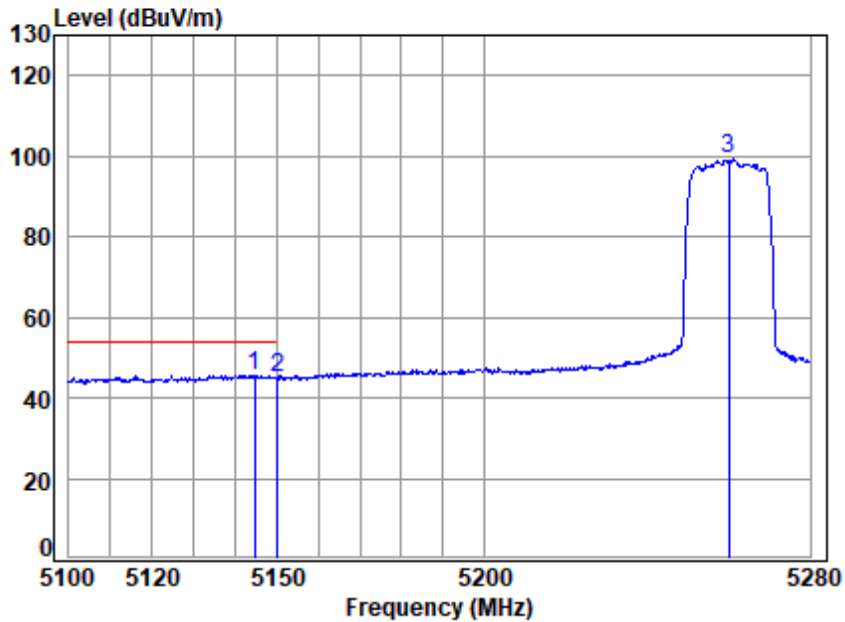


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5260 Band edge
 : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	q 5144.595	18.83	33.91	31.28	24.25	45.71	54.00	-8.29	Average
2	5149.980	18.83	33.90	31.28	23.76	45.21	54.00	-8.79	Average
3	5260.000	18.99	34.12	31.34	77.45	99.22	-----	-----	Average



Test Mode: 06; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

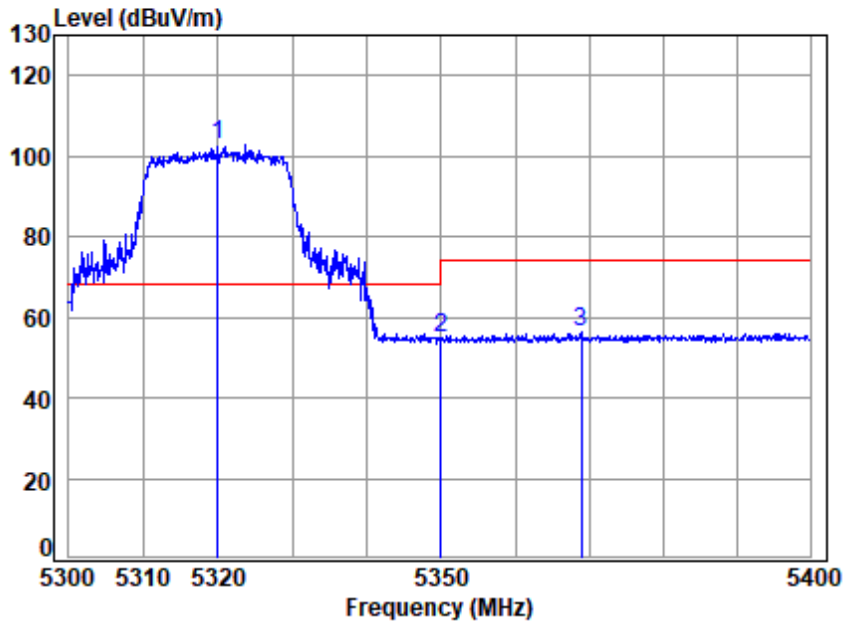


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5320 Band edge
 : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1 p 5320.000	19.07	34.28	31.37	80.98	102.96	68.20	34.76	peak
2 5350.020	19.11	34.40	31.39	32.65	54.77	74.00	-19.23	peak
3 5369.000	19.14	34.48	31.40	34.21	56.43	74.00	-17.57	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 06; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

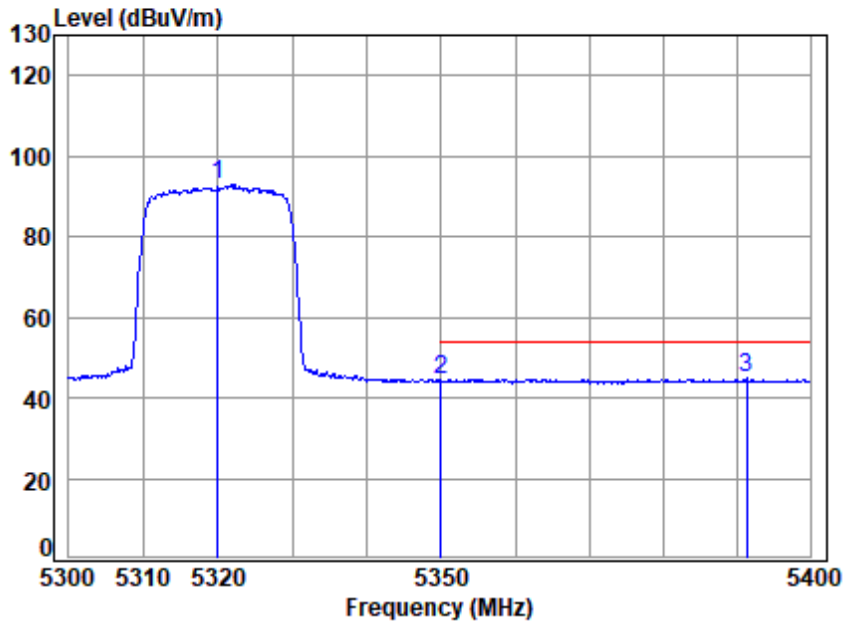


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5320 Band edge
 : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5320.000	19.07	34.28	31.37	71.04	93.02	-----	Average
2	5350.020	19.11	34.40	31.39	22.37	44.49	54.00	-9.51 Average
3 q	5391.326	19.17	34.57	31.41	22.63	44.96	54.00	-9.04 Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

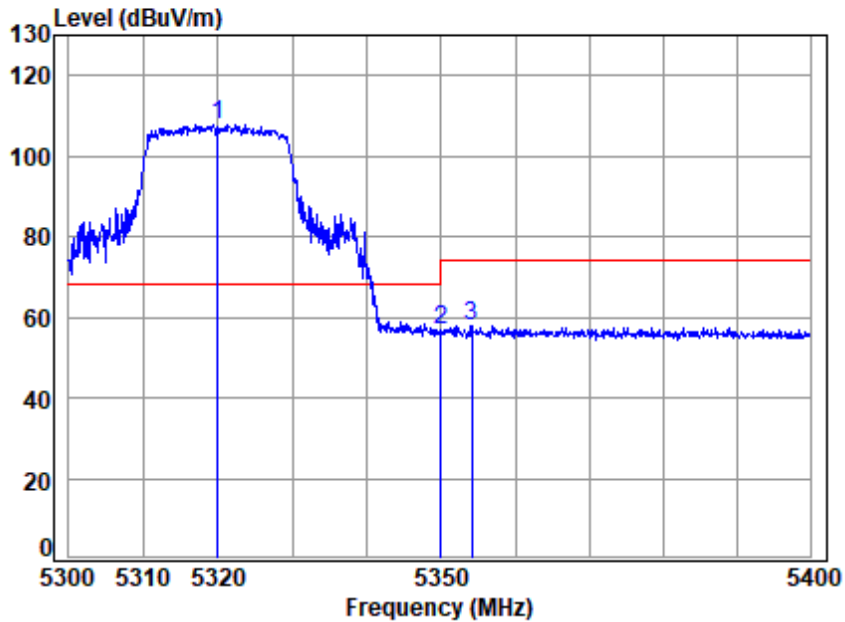


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5320 Band edge
 : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1 p 5320.000	19.07	34.28	31.37	85.84	107.82	68.20	39.62	Peak
2 5350.020	19.11	34.40	31.39	34.91	57.03	74.00	-16.97	Peak
3 5354.068	19.12	34.42	31.39	35.61	57.76	74.00	-16.24	Peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

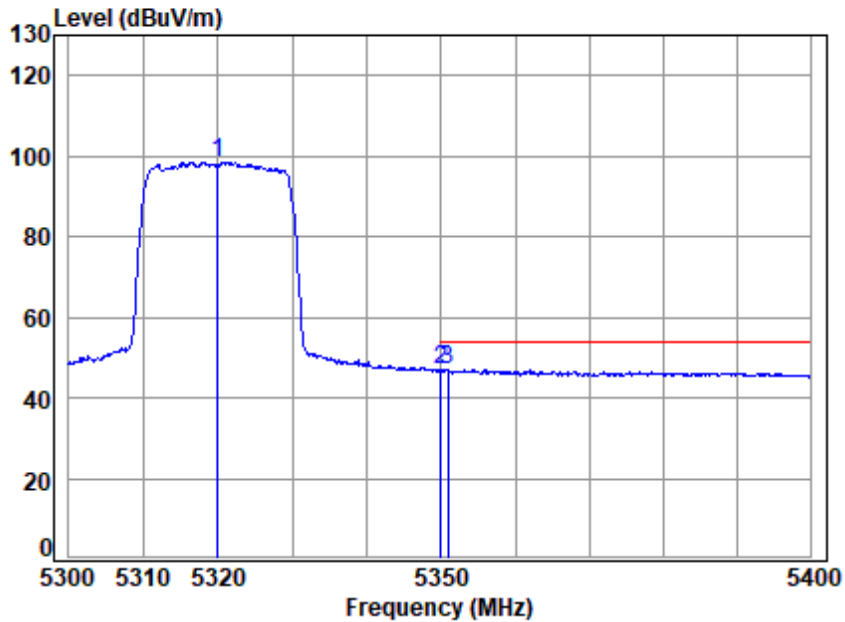


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5320 Band edge
 : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	19.07	34.28	31.37	76.53	98.51	-----	-----	Average
2	5350.020	19.11	34.40	31.39	24.70	46.82	54.00	-7.18	Average
3 q	5350.866	19.11	34.40	31.39	25.02	47.14	54.00	-6.86	Average



Test Mode: 06; Polarity: Horizontal; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:Low

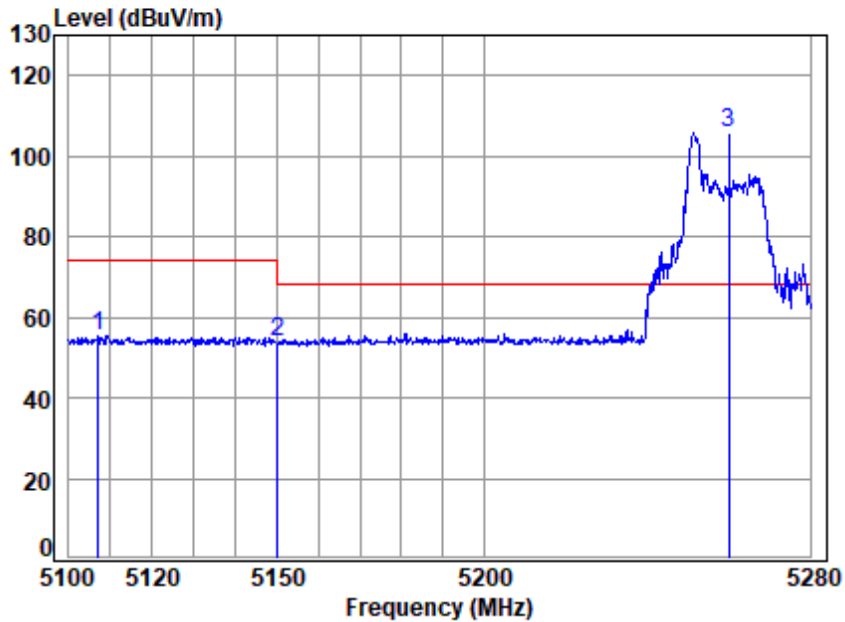


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5260 Band edge
 : 5G WIFI 11AX20 Partial RU

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5107.081	18.77	33.99	31.26	34.01	55.51	74.00	-18.49 peak
2	5149.980	18.83	33.90	31.28	32.47	53.92	74.00	-20.08 peak
3 p	5260.000	18.99	34.12	31.34	84.06	105.83	68.20	37.63 peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:Low

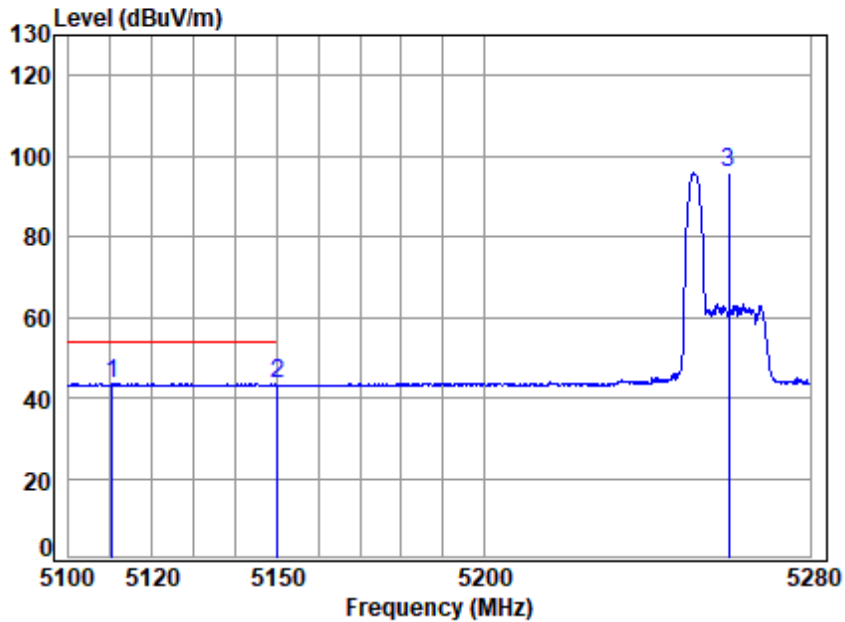


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5260 Band edge
 : 5G WIFI 11AX20 Partial RU

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5110.271	18.78	33.98	31.26	21.93	43.43	54.00	-10.57	Average
2 5149.980	18.83	33.90	31.28	21.89	43.34	54.00	-10.66	Average
3 5260.000	18.99	34.12	31.34	74.01	95.78	-----	-----	Average



Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:Low

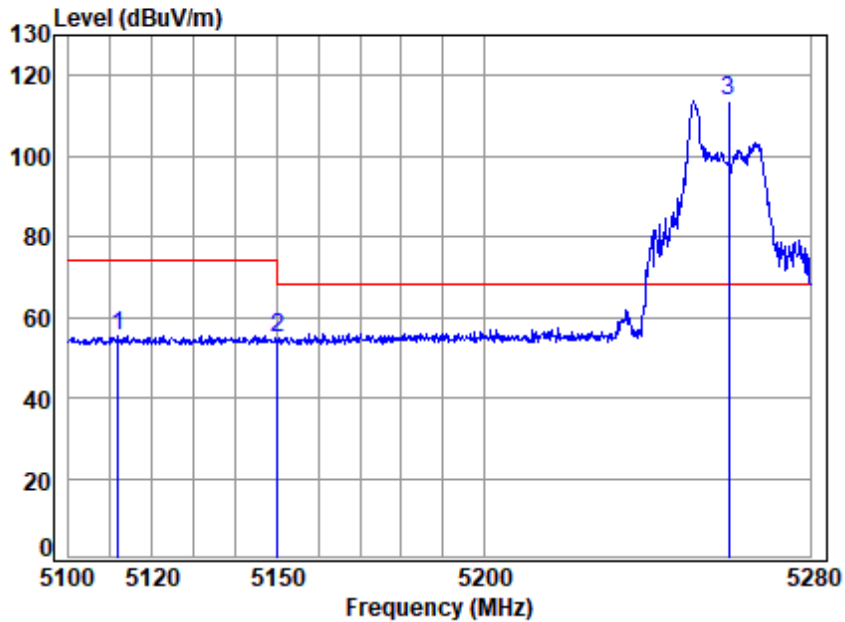


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5260 Band edge

: 5G WIFI 11AX20 Partial RU
 Cable Ant Preamp Read Limit Over
 Freq Loss Factor Factor Level Level Line Limit Remark

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5111.866	18.78	33.98	31.26	34.05	55.55	74.00	-18.45	Peak
2	5149.980	18.83	33.90	31.28	33.47	54.92	74.00	-19.08	Peak
3 p	5260.000	18.99	34.12	31.34	91.70	113.47	68.20	45.27	Peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:Low

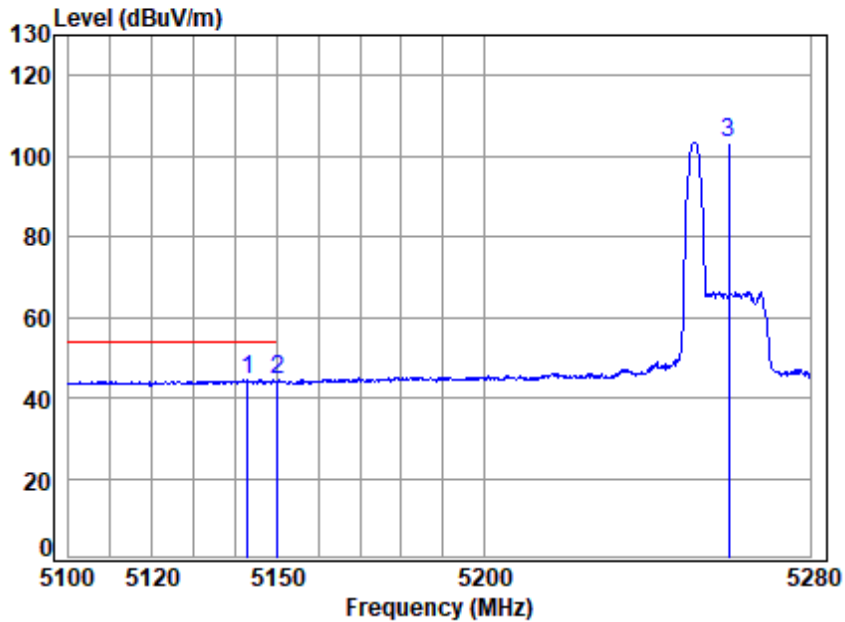


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5260 Band edge
 : 5G WIFI 11AX20 Partial RU

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dB	
1 q 5142.811	18.82	33.91	31.28	22.94	44.39	54.00	-9.61	Average
2 5149.980	18.83	33.90	31.28	22.83	44.28	54.00	-9.72	Average
3 5260.000	18.99	34.12	31.34	81.67	103.44	-----	-----	Average




Test Mode: 06; Polarity: Horizontal; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:High

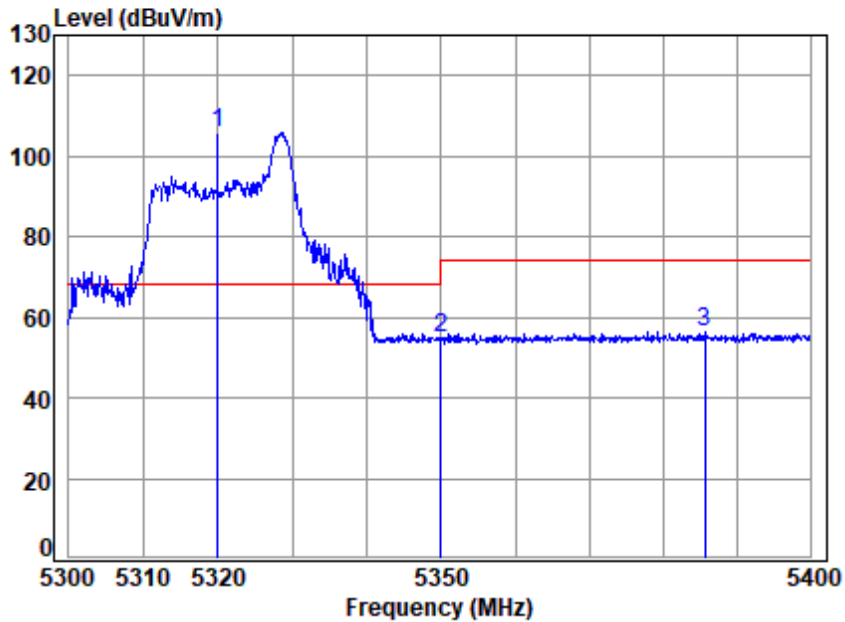

Site	: chamber						
Condition:	3m HORIZONTAL						
Job No	: 03197AT\03196AT						
Mode	: 5320 Band edge						
	: 5G WIFI 11AX20 Partial RU						
	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5320.000	19.07	34.28	31.37	83.92	105.90	68.20 37.70 peak
2	5350.020	19.11	34.40	31.39	32.86	54.98	74.00 -19.02 peak
3	5385.686	19.16	34.54	31.40	34.13	56.43	74.00 -17.57 peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:High

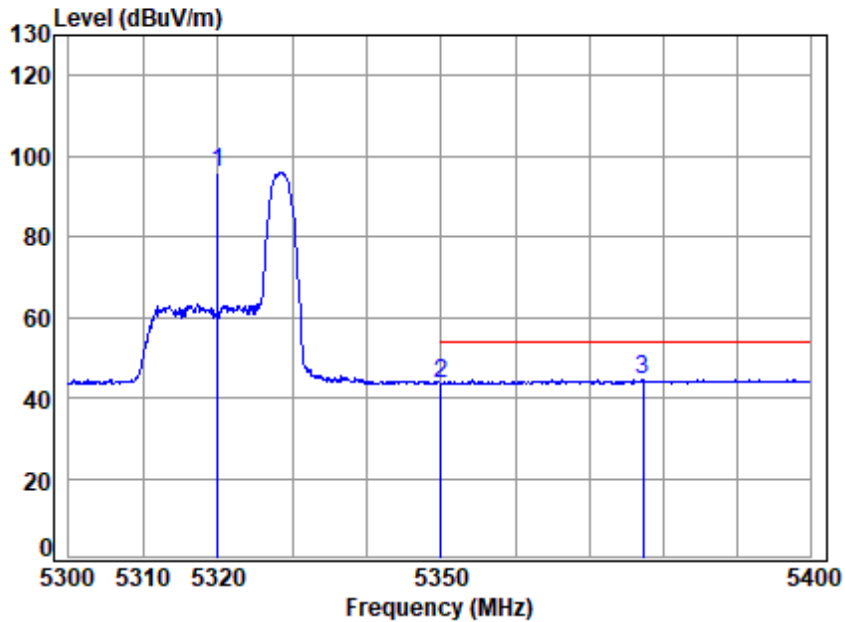

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5320 Band edge
 : 5G WIFI 11AX20 Partial RU
 Cable Ant Preamp Read Limit Over
 Freq Loss Factor Factor Level Level Line Limit Remark


	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	19.07	34.28	31.37	74.07	96.05	-----	-----	Average
2	5350.020	19.11	34.40	31.39	21.62	43.74	54.00	-10.26	Average
3 q	5377.337	19.15	34.51	31.40	22.28	44.54	54.00	-9.46	Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:High

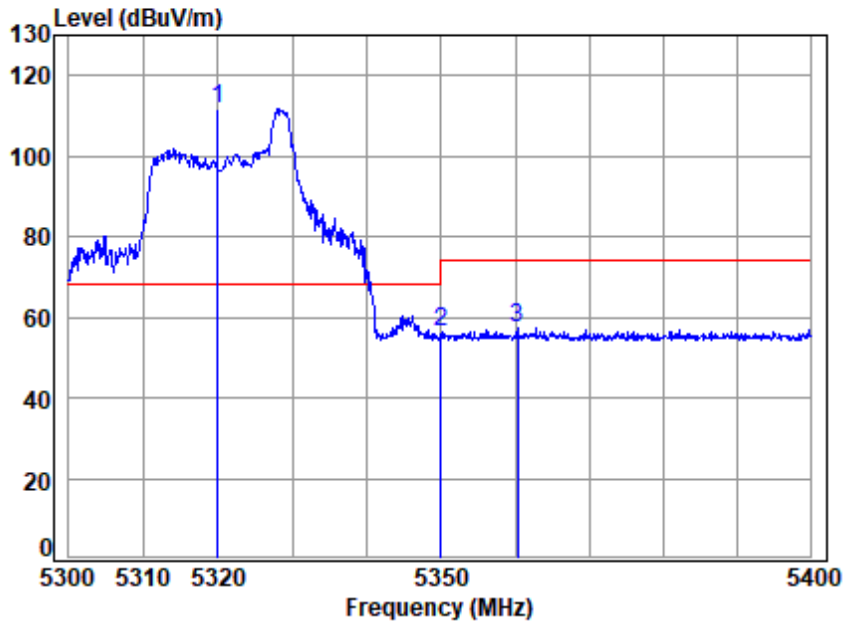

Site	: chamber						
Condition:	3m VERTICAL						
Job No	: 03197AT\03196AT						
Mode	: 5320 Band edge						
	: 5G WIFI 11AX20 Partial RU						
	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5320.000	19.07	34.28	31.37	89.66	111.64	68.20 43.44 Peak
2	5350.020	19.11	34.40	31.39	34.35	56.47	74.00 -17.53 Peak
3	5360.276	19.12	34.44	31.39	35.01	57.18	74.00 -16.82 Peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:High

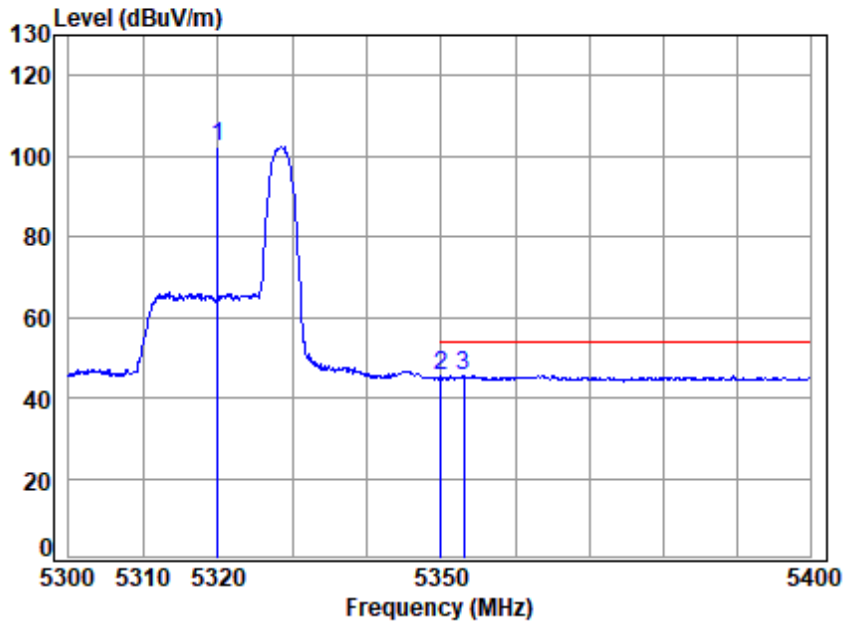

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5320 Band edge
 : 5G WIFI 11AX20 Partial RU

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	

1	5320.000	19.07	34.28	31.37	80.45	102.43	-----	-----	Average
2	5350.020	19.11	34.40	31.39	23.14	45.26	54.00	-8.74	Average
3 q	5353.067	19.11	34.41	31.39	23.48	45.61	54.00	-8.39	Average




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

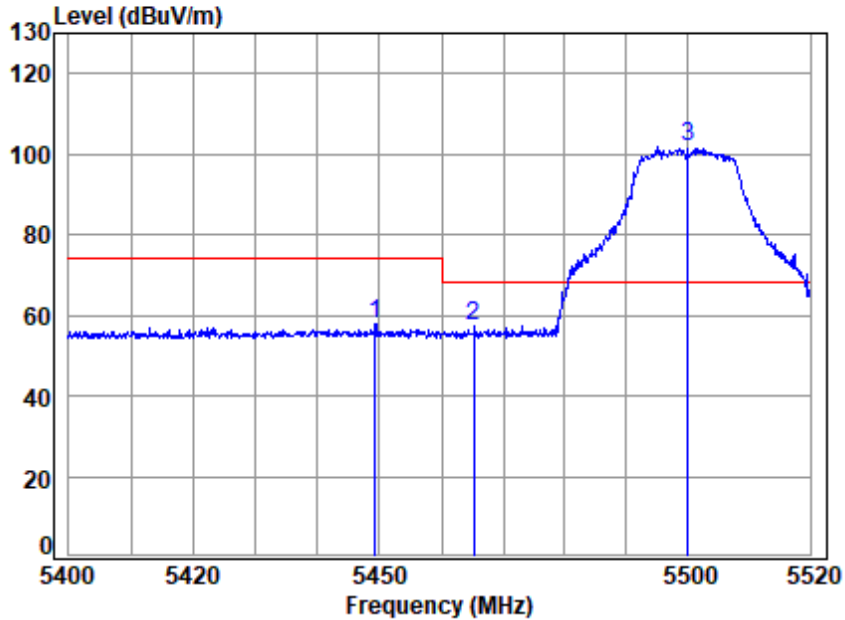


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5500 Band edge
 : 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	19.24	34.70	31.44	35.37	57.87	74.00	-16.13	peak
2	19.26	34.64	31.44	34.67	57.13	68.20	-11.07	peak
3 p	19.31	34.50	31.46	79.40	101.75	68.20	33.55	peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

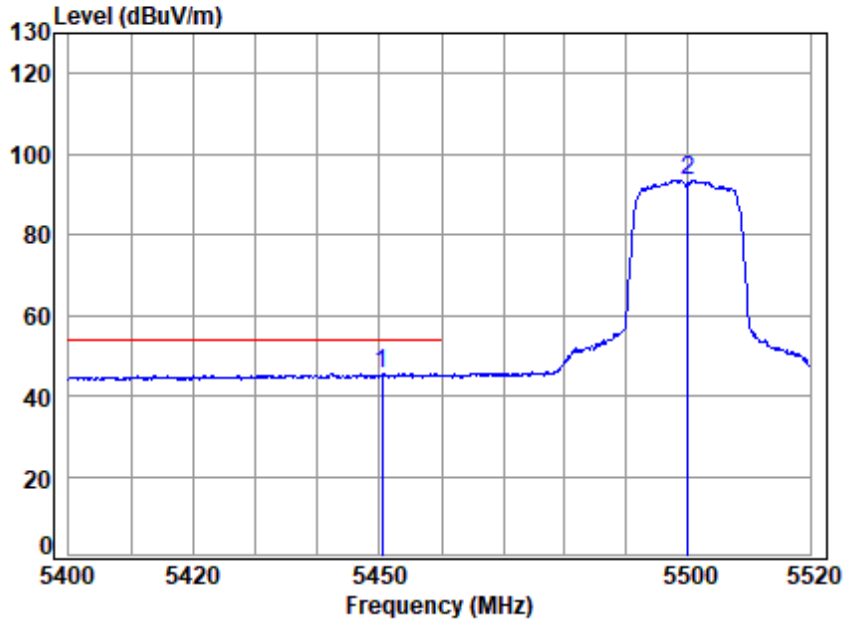


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5500 Band edge
 : 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	q 5450.438	19.24	34.70	31.44	22.98	45.48	54.00	-8.52	Average
2	5500.000	19.31	34.50	31.46	71.25	93.60	-----	-----	Average



Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

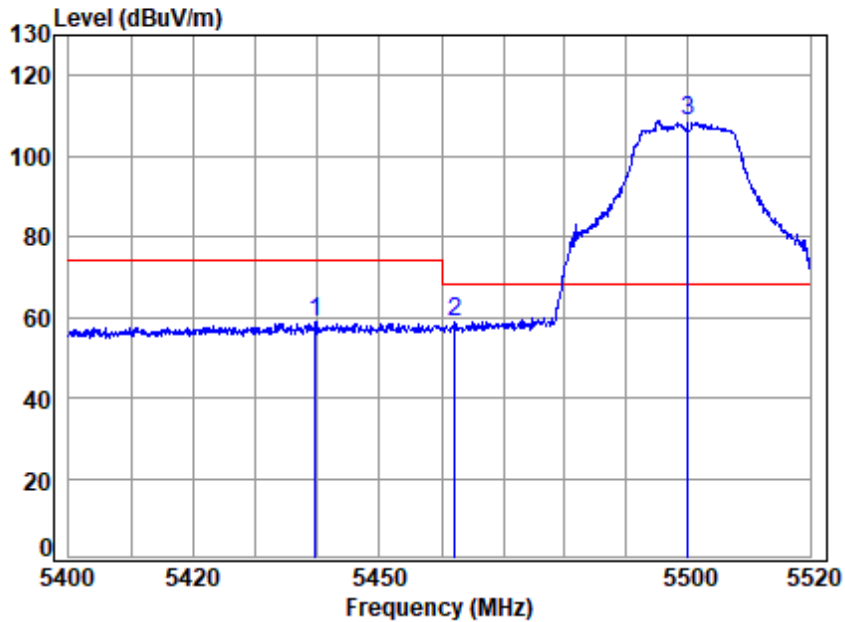


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5500 Band edge
 : 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5439.667	19.23	34.68	31.43	36.52	59.00	74.00 -15.00 Peak
2	5462.191	19.26	34.65	31.44	36.48	58.95	68.20 -9.25 peak
3 p	5500.000	19.31	34.50	31.46	86.50	108.85	68.20 40.65 Peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

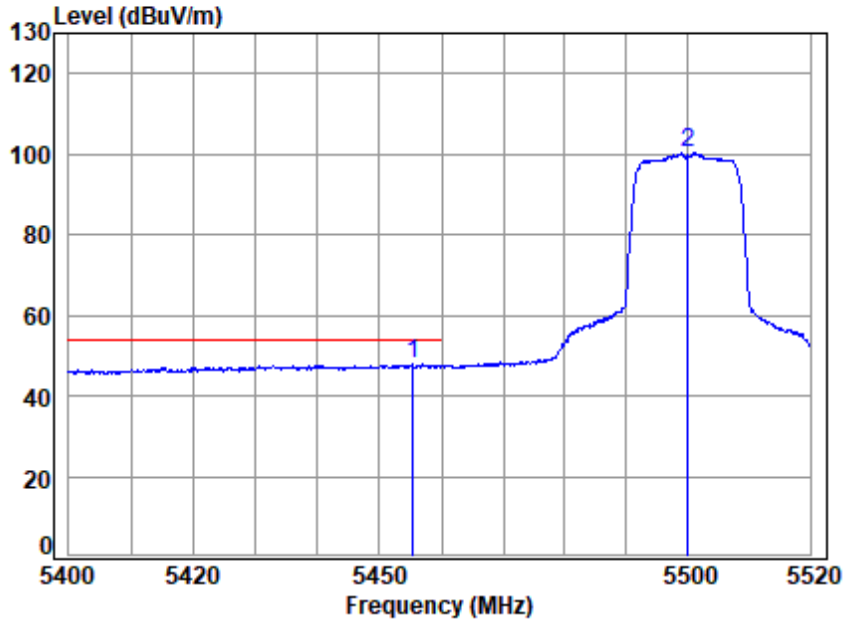

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5500 Band edge
 : 5G WIFI 11A


		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	q 5455.352	19.25	34.68	31.44	25.32	47.81	54.00	-6.19	Average
2	5500.000	19.31	34.50	31.46	77.85	100.20	-----	-----	Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

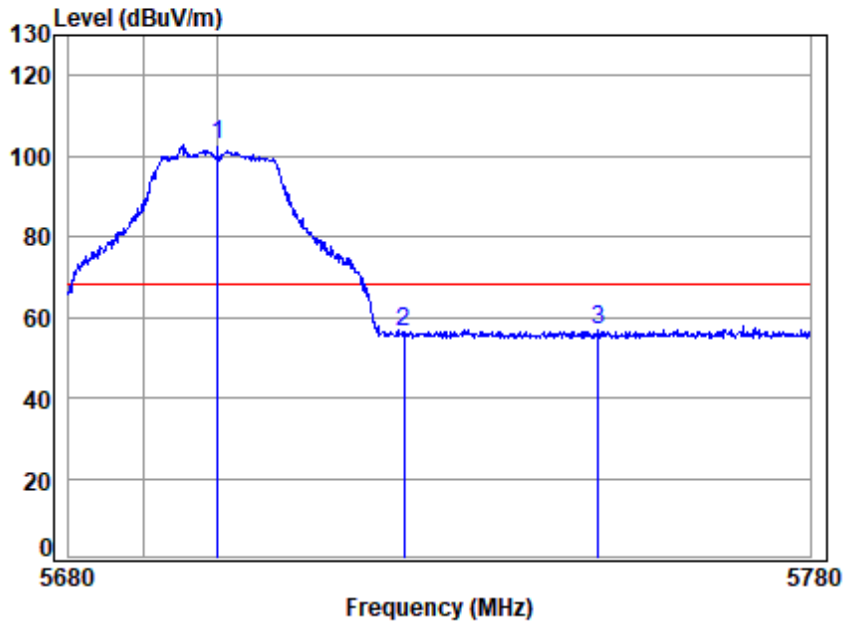


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5700 Band edge
 : 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p 5700.000	19.44	34.30	31.56	80.53	102.71	68.20	34.51 peak
2 5725.000	19.46	34.25	31.57	34.03	56.17	68.20	-12.03 peak
3 5751.222	19.47	34.20	31.58	34.92	57.01	68.20	-11.19 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
 Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

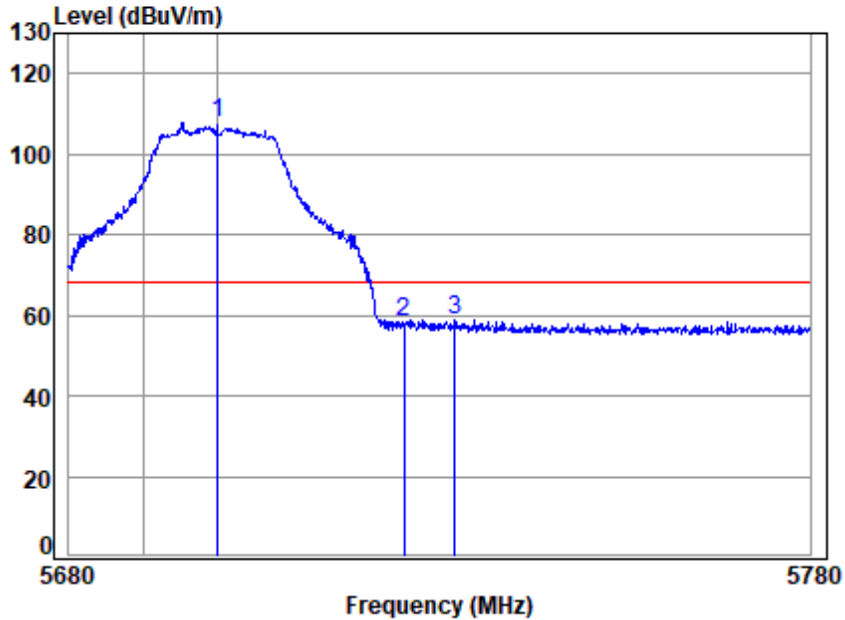


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5700 Band edge
 : 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5700.000	19.44	34.30	31.56	85.68	107.86	68.20	39.66 Peak
2	5725.000	19.46	34.25	31.57	36.40	58.54	68.20	-9.66 Peak
3	5731.882	19.46	34.24	31.57	36.89	59.02	68.20	-9.18 Peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

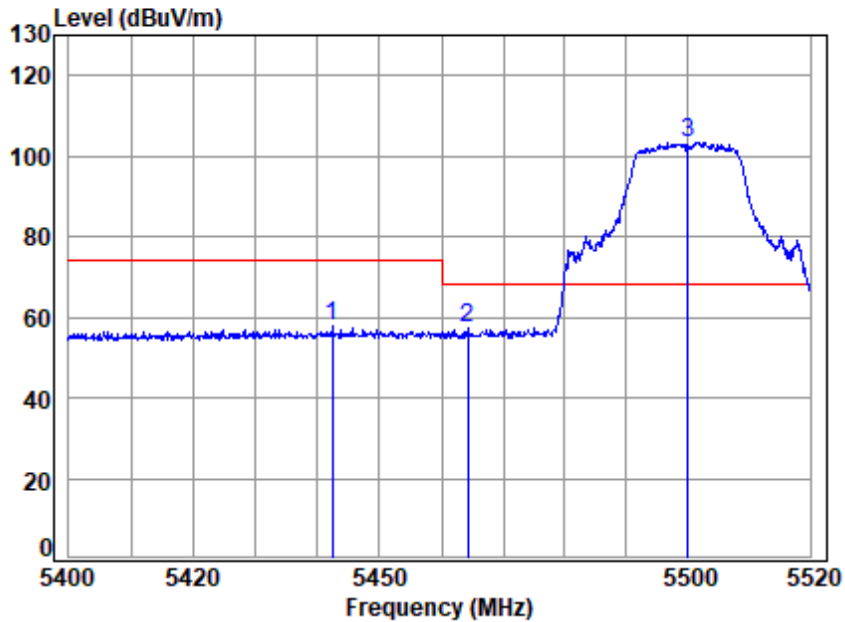


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5500 Band edge
 : 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5442.298	19.23	34.68	31.43	35.19	57.67	74.00 -16.33 peak
2	5464.232	19.26	34.64	31.44	34.94	57.40	68.20 -10.80 peak
3 p	5500.000	19.31	34.50	31.46	81.15	103.50	68.20 35.30 peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

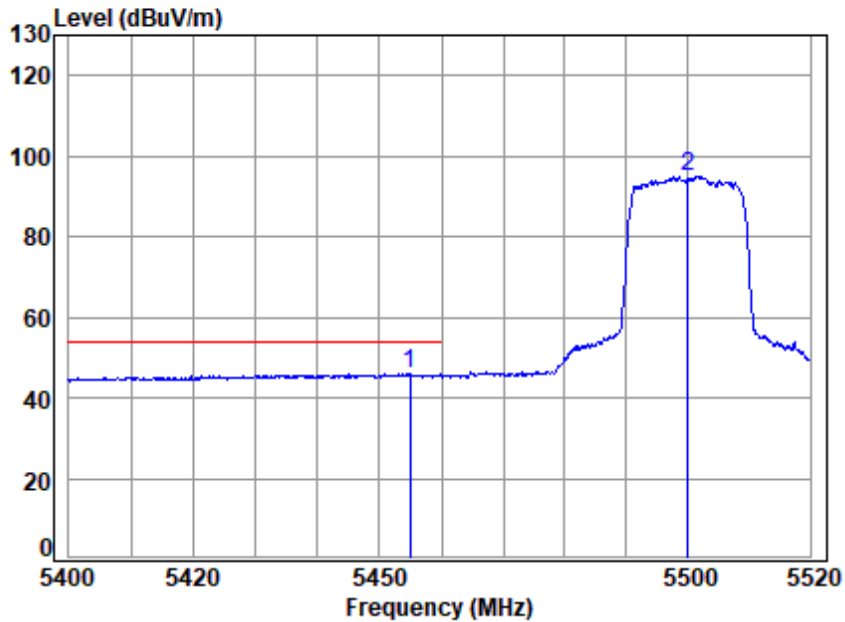


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5500 Band edge
 : 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5454.992	19.25	34.68	31.44	23.50	45.99	54.00	-8.01	Average
2 5500.000	19.31	34.50	31.46	72.69	95.04	-----	-----	Average



Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

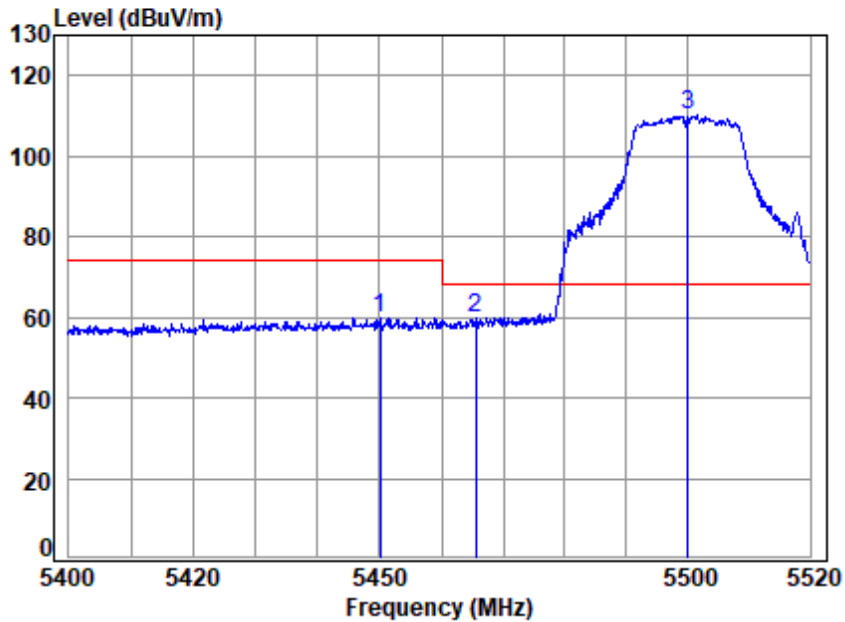


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5500 Band edge
 : 5G WIFI 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5450.079	19.24	34.70	31.44	37.46	59.96	74.00	-14.04	Peak
2	5465.553	19.26	34.64	31.44	37.45	59.91	68.20	-8.29	peak
3 p	5500.000	19.31	34.50	31.46	87.86	110.21	68.20	42.01	Peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

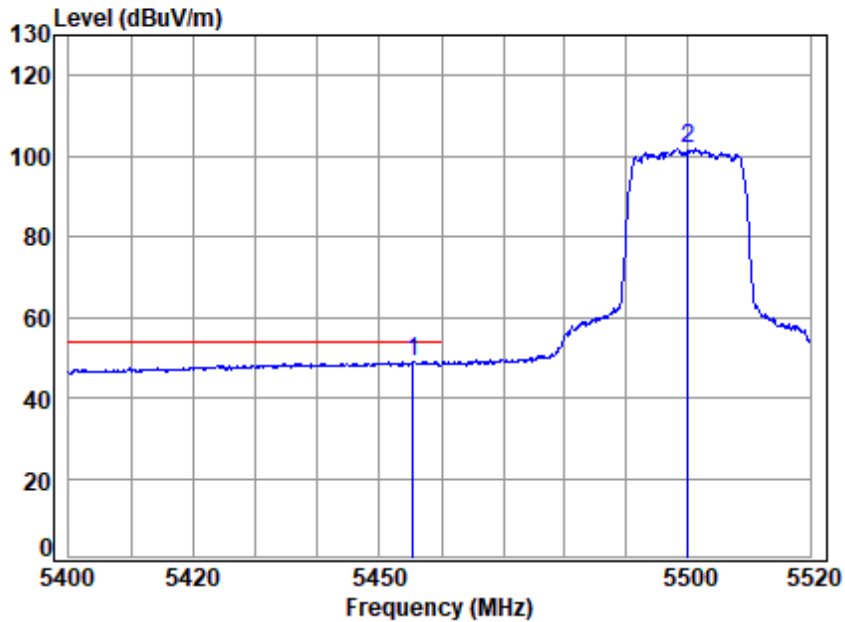


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5500 Band edge
 : 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q	5455.472	19.25	34.68	31.44	26.50	48.99	54.00	-5.01	Average
2	5500.000	19.31	34.50	31.46	79.47	101.82	-----	-----	Average



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

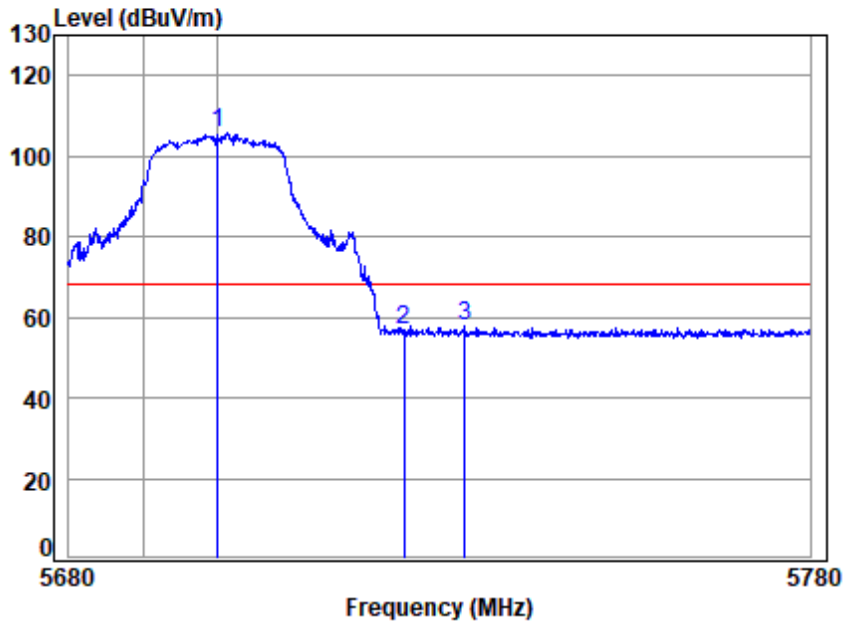


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5700 Band edge
 : 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p 5700.000	19.44	34.30	31.56	83.37	105.55	68.20	37.35 peak
2 5725.000	19.46	34.25	31.57	34.72	56.86	68.20	-11.34 peak
3 5733.183	19.46	34.23	31.58	35.95	58.06	68.20	-10.14 peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

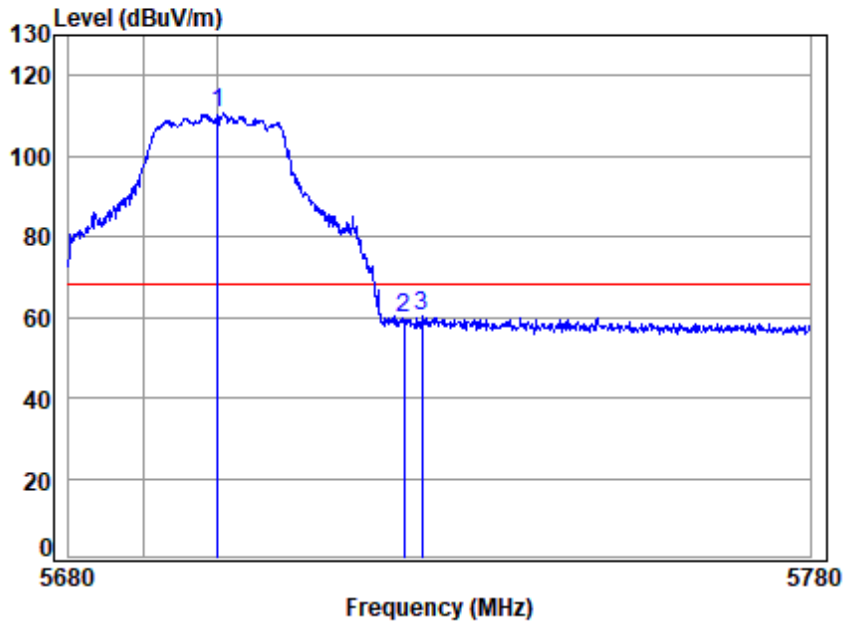


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5700 Band edge
 : 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1 p 5700.000	19.44	34.30	31.56	88.49	110.67	68.20	42.47	Peak
2 5725.000	19.46	34.25	31.57	37.85	59.99	68.20	-8.21	Peak
3 5727.482	19.46	34.25	31.57	38.41	60.55	68.20	-7.65	Peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

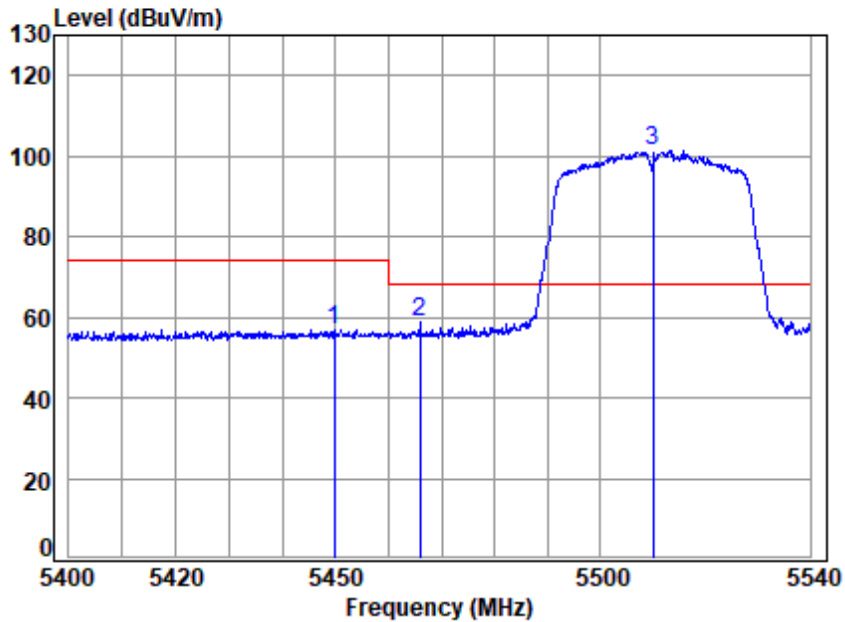


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5510 Band edge
 : 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5449.708	19.24	34.70	31.44	34.50	57.00	74.00	-17.00 peak
2	5465.914	19.26	34.64	31.44	36.25	58.71	68.20	-9.49 peak
3 p	5510.000	19.32	34.54	31.47	78.97	101.36	68.20	33.16 peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

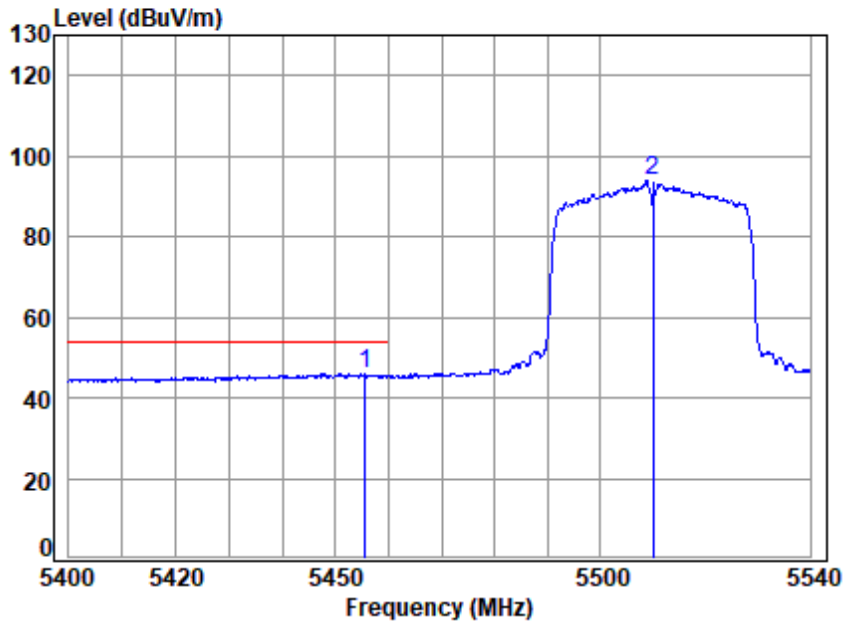


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5510 Band edge
 : 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	q 5455.570	19.25	34.68	31.44	23.45	45.94	54.00	-8.06	Average
2	5510.000	19.32	34.54	31.47	71.46	93.85	-----	-----	Average



Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

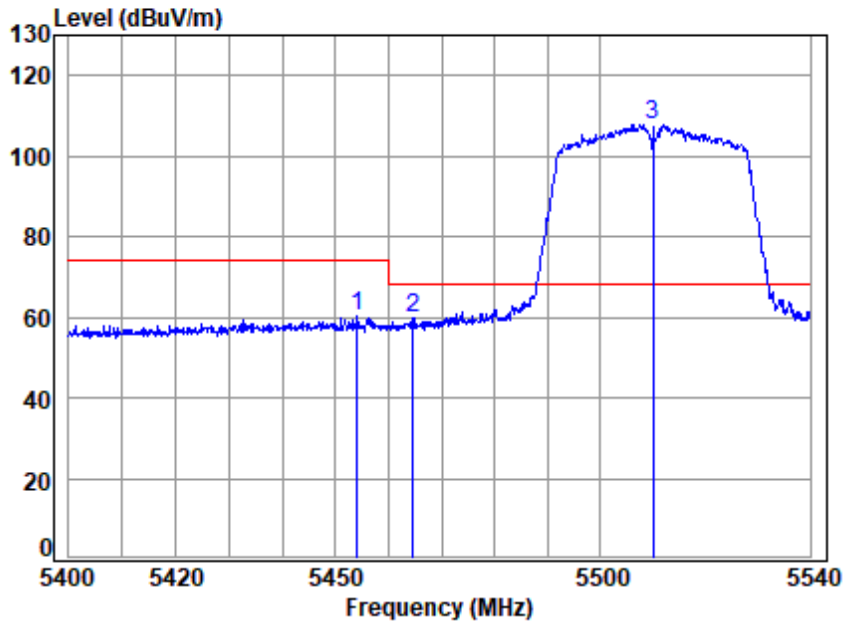


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5510 Band edge
 : 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5454.035	19.25	34.68	31.44	38.03	60.52	74.00	-13.48 Peak
2	5464.515	19.26	34.64	31.44	37.34	59.80	68.20	-8.40 peak
3 p	5510.000	19.32	34.54	31.47	85.47	107.86	68.20	39.66 Peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

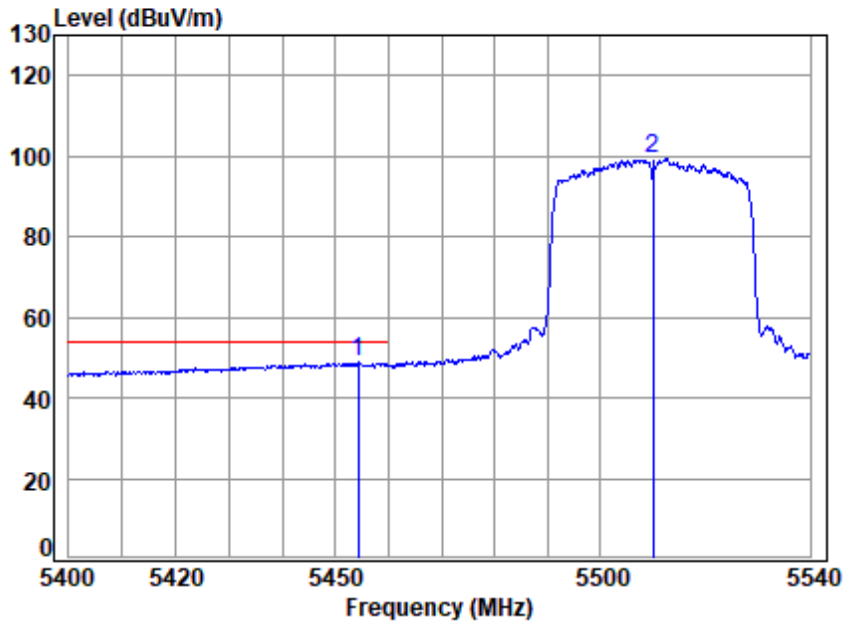


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5510 Band edge
 : 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	q 5454.314	19.25	34.68	31.44	26.39	48.88	54.00	-5.12	Average
2	5510.000	19.32	34.54	31.47	76.81	99.20	-----	-----	Average



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

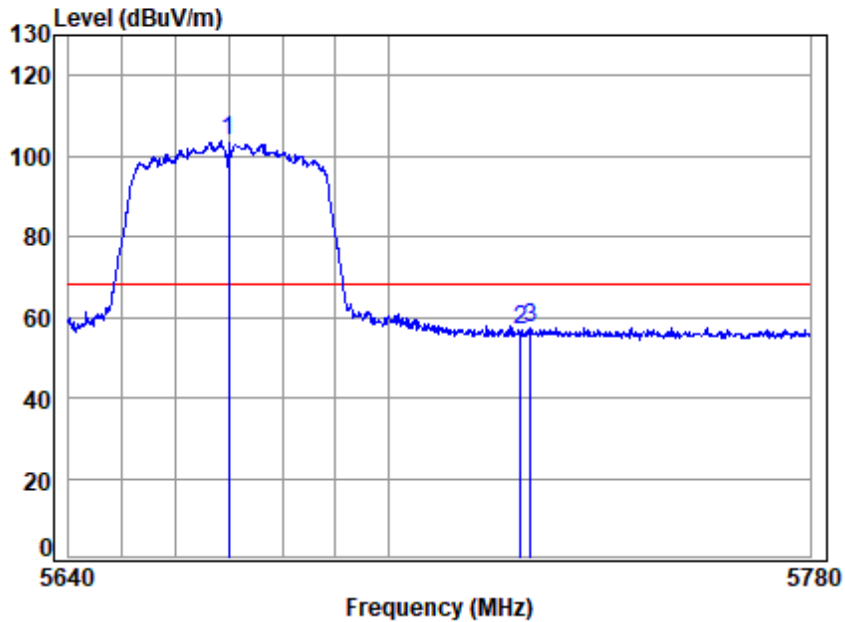


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5670 Band edge
 : 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5670.000	19.42	34.36	31.54	81.41	103.65	68.20	35.45 peak
2	5725.000	19.46	34.25	31.57	34.57	56.71	68.20	-11.49 peak
3	5726.816	19.46	34.25	31.57	35.44	57.58	68.20	-10.62 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

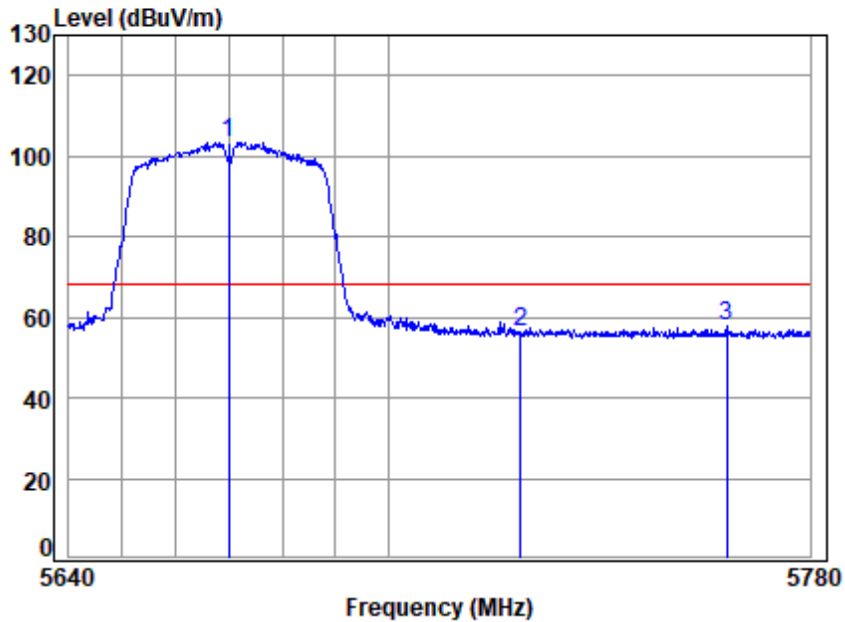


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5670 Band edge
 : 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5670.000	19.42	34.36	31.54	81.28	103.52	68.20	35.32 Peak
2	5725.000	19.46	34.25	31.57	34.45	56.59	68.20	-11.61 Peak
3	5764.007	19.48	34.23	31.59	35.60	57.72	68.20	-10.48 Peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

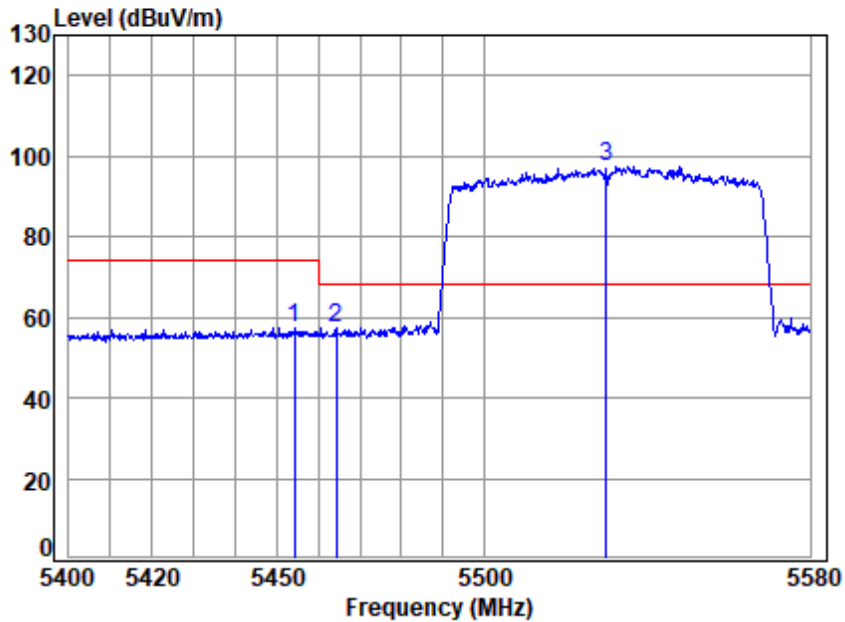


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5530 Band edge
 : 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5454.097	19.25	34.68	31.44	34.95	57.44	74.00	-16.56 peak
2	5464.300	19.26	34.64	31.44	34.88	57.34	68.20	-10.86 peak
3 p	5530.000	19.33	34.62	31.48	75.06	97.53	68.20	29.33 peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

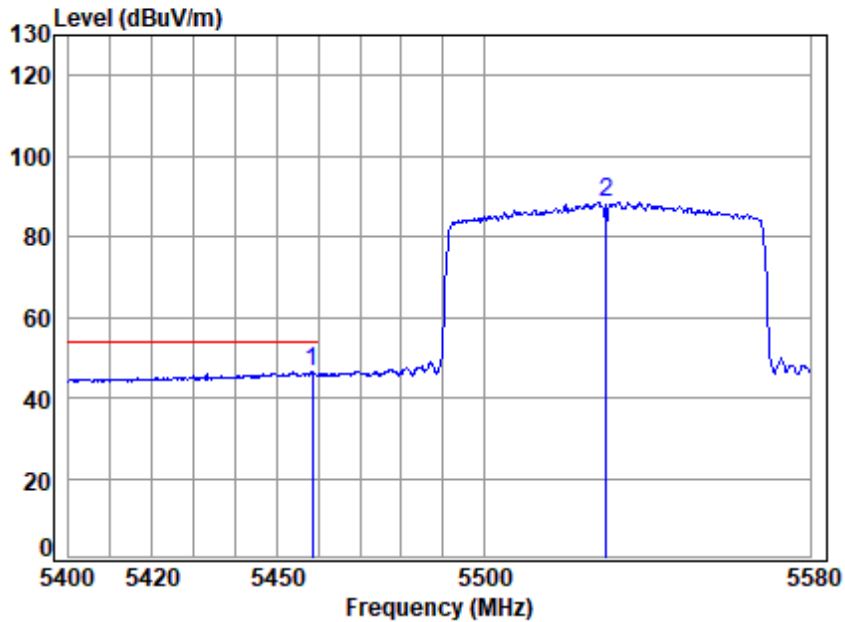


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5530 Band edge
 : 5G WIFI 11AC80

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q	5458.570	19.26	34.67	31.44	24.06	46.55	54.00	-7.45	Average
2	5530.000	19.33	34.62	31.48	66.23	88.70	-----	-----	Average



Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

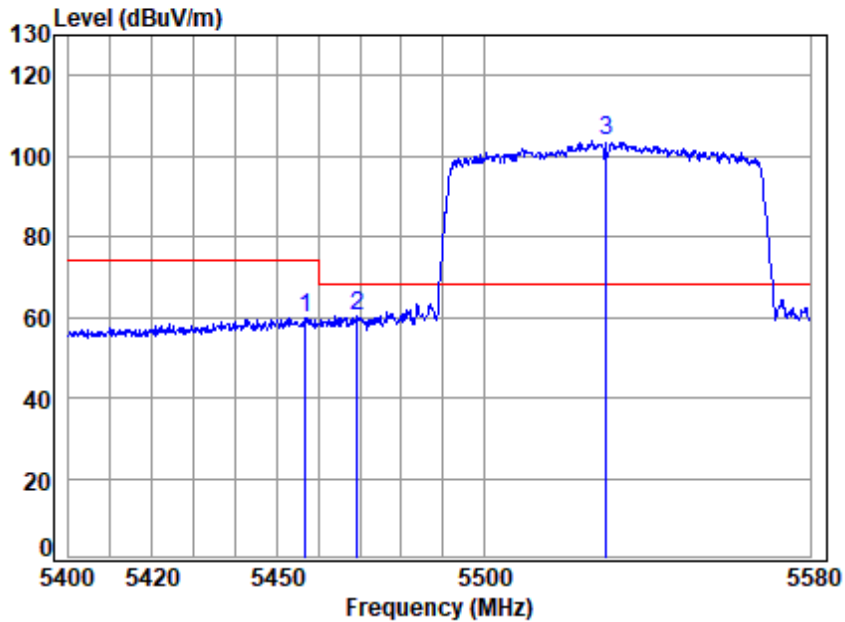


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5530 Band edge
 : 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5456.780	19.25	34.67	31.44	37.27	59.75	74.00	-14.25 Peak
2	5469.319	19.27	34.62	31.45	37.88	60.32	68.20	-7.88 peak
3 p	5530.000	19.33	34.62	31.48	81.11	103.58	68.20	35.38 Peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

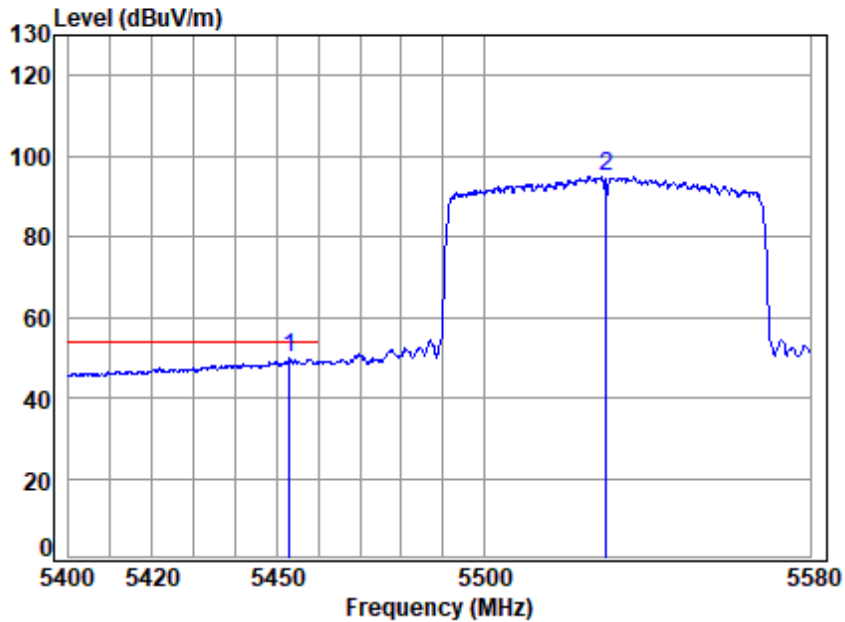


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5530 Band edge
 : 5G WIFI 11AC80

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	q 5453.024	19.25	34.69	31.44	27.29	49.79	54.00	-4.21	Average
2	5530.000	19.33	34.62	31.48	72.59	95.06	-----	-----	Average



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

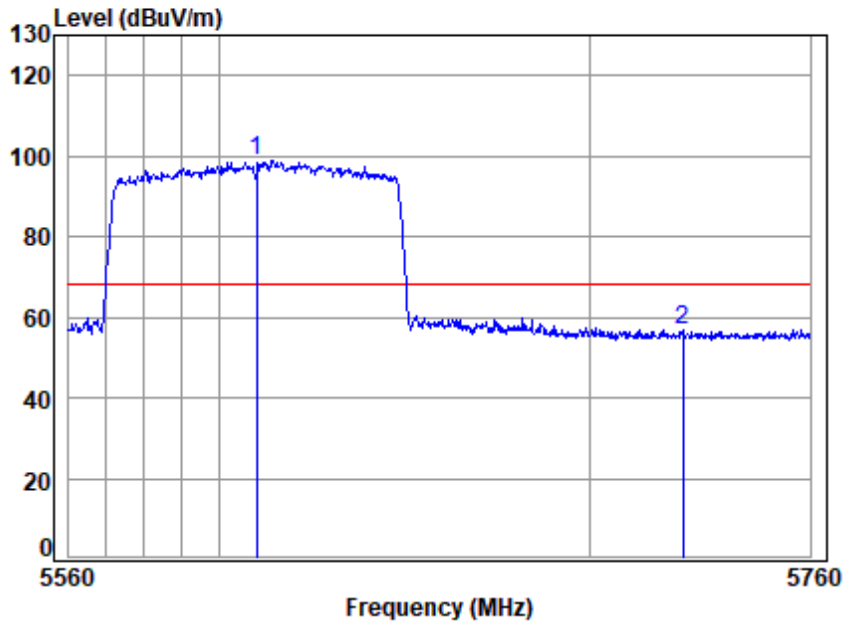


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5610 Band edge
 : 5G WIFI 11AC80

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1 p 5610.000	19.38	34.64	31.52	76.55	99.05	68.20	30.85	peak
2 5725.095	19.46	34.25	31.57	34.78	56.92	68.20	-11.28	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

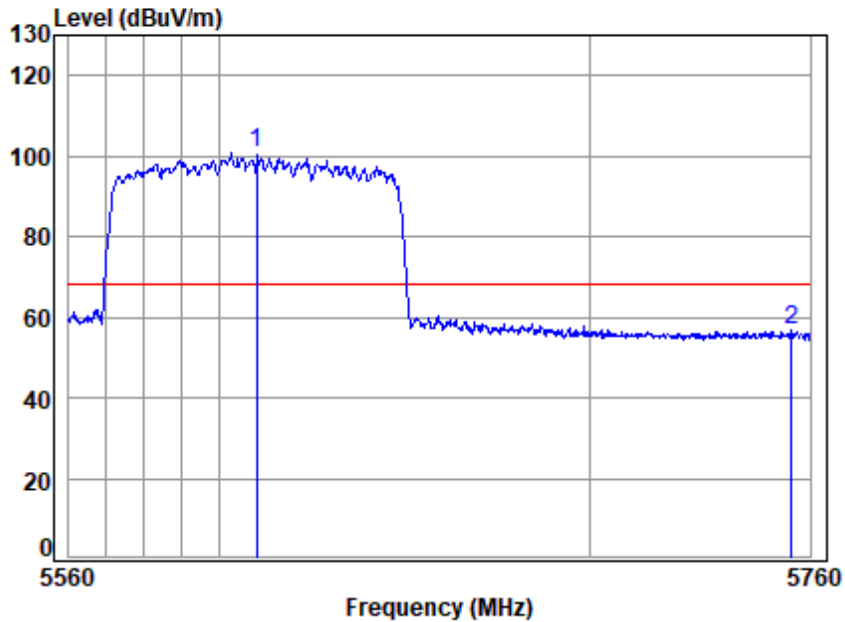


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5610 Band edge
 : 5G WIFI 11AC80

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1 p 5610.000	19.38	34.64	31.52	78.13	100.63	68.20	32.43	Peak
2 5754.914	19.48	34.21	31.59	34.62	56.72	68.20	-11.48	Peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

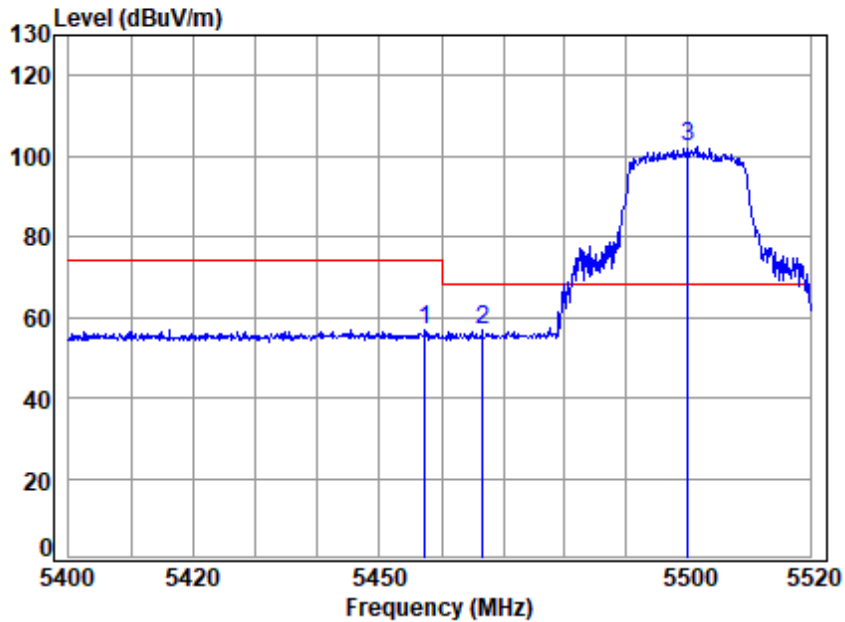


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5500 Band edge
 : 5G WIFI 11AX20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5457.271	19.25	34.67	31.44	34.48	56.96	74.00 -17.04 peak
2	5466.635	19.27	34.63	31.44	34.30	56.76	68.20 -11.44 peak
3 p	5500.000	19.31	34.50	31.46	80.12	102.47	68.20 34.27 peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

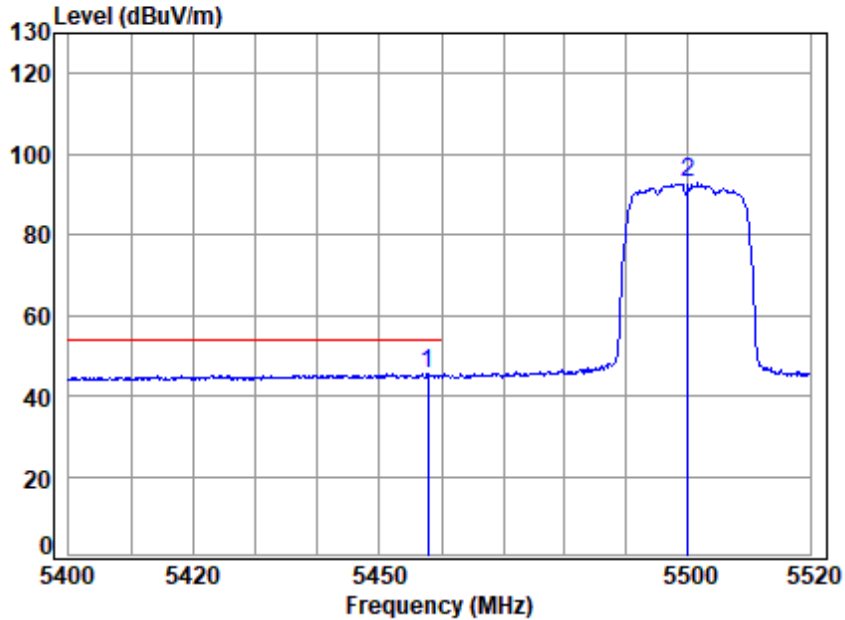


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5500 Band edge
 : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	q 5457.750	19.25	34.67	31.44	22.93	45.41	54.00	-8.59	Average
2	5500.000	19.31	34.50	31.46	70.38	92.73	-----	-----	Average



Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

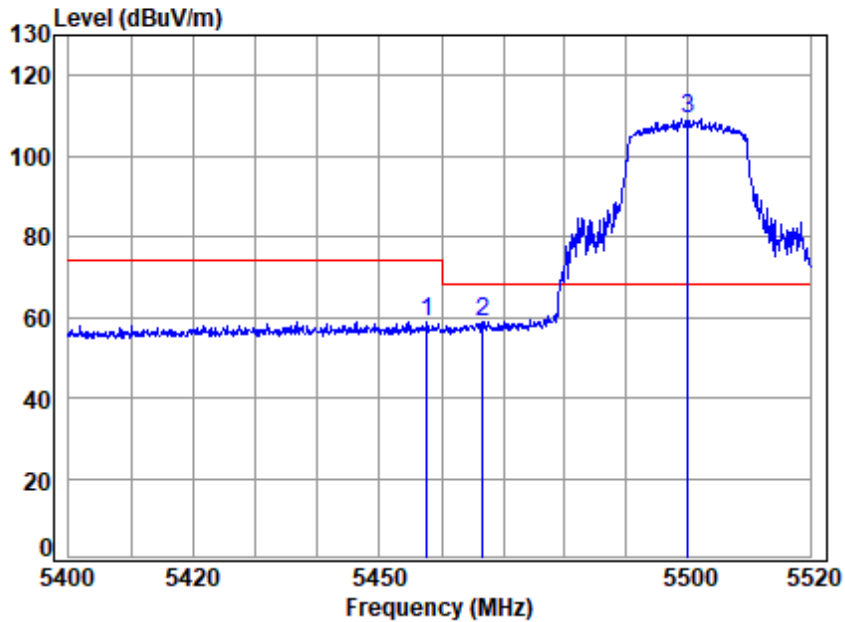


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5500 Band edge
 : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5457.631	19.25	34.67	31.44	36.42	58.90	74.00	-15.10 Peak
2	5466.755	19.27	34.63	31.44	36.40	58.86	68.20	-9.34 peak
3 p	5500.000	19.31	34.50	31.46	87.12	109.47	68.20	41.27 Peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

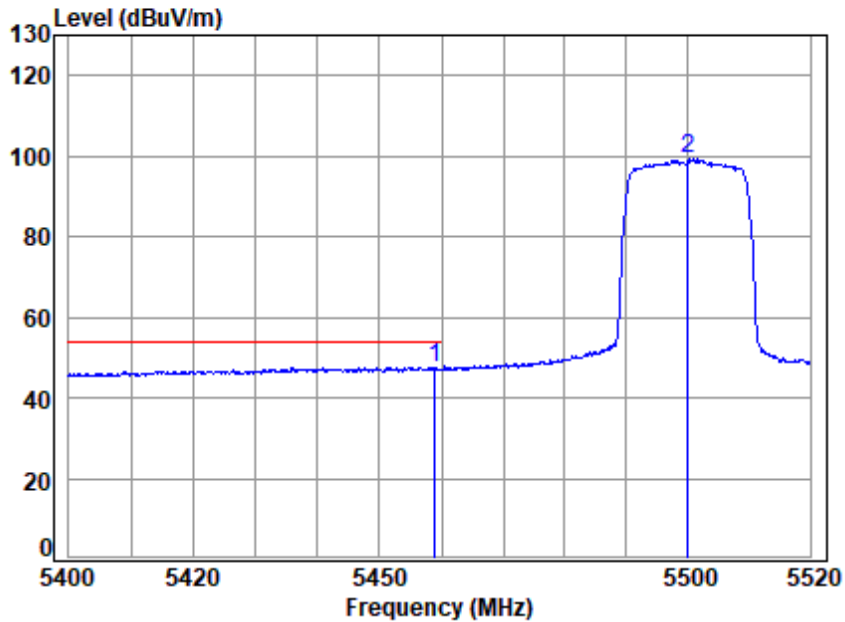


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5500 Band edge
 : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	q 5458.950	19.26	34.66	31.44	25.19	47.67	54.00	-6.33	Average
2	5500.000	19.31	34.50	31.46	76.82	99.17	-----	-----	Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

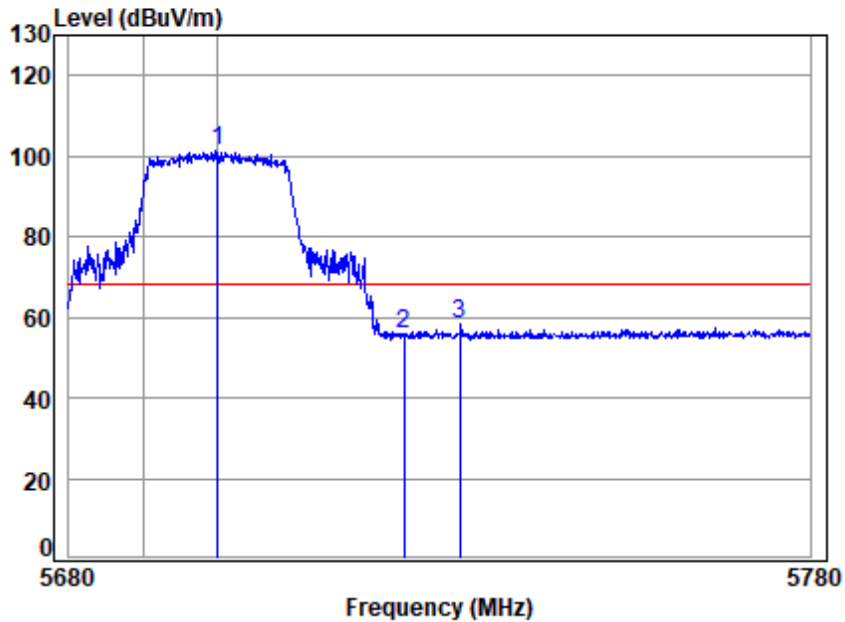


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5700 Band edge
 : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1 p 5700.000	19.44	34.30	31.56	79.03	101.21	68.20	33.01	peak
2 5725.000	19.46	34.25	31.57	33.93	56.07	68.20	-12.13	peak
3 5732.583	19.46	34.23	31.57	36.14	58.26	68.20	-9.94	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

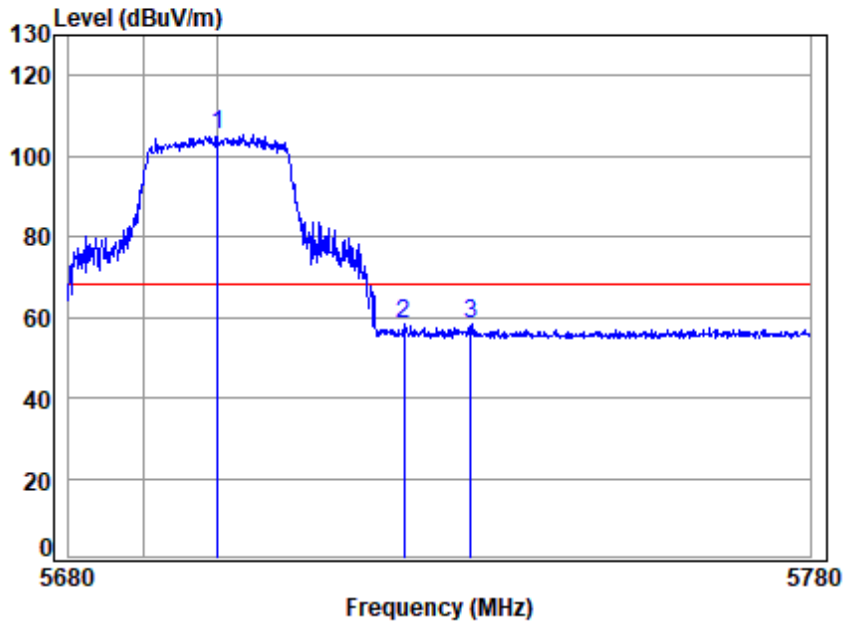


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5700 Band edge
 : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5700.000	19.44	34.30	31.56	83.12	105.30	68.20	37.10 Peak
2	5725.000	19.46	34.25	31.57	36.36	58.50	68.20	-9.70 Peak
3	5734.083	19.46	34.23	31.58	36.10	58.21	68.20	-9.99 Peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:Low

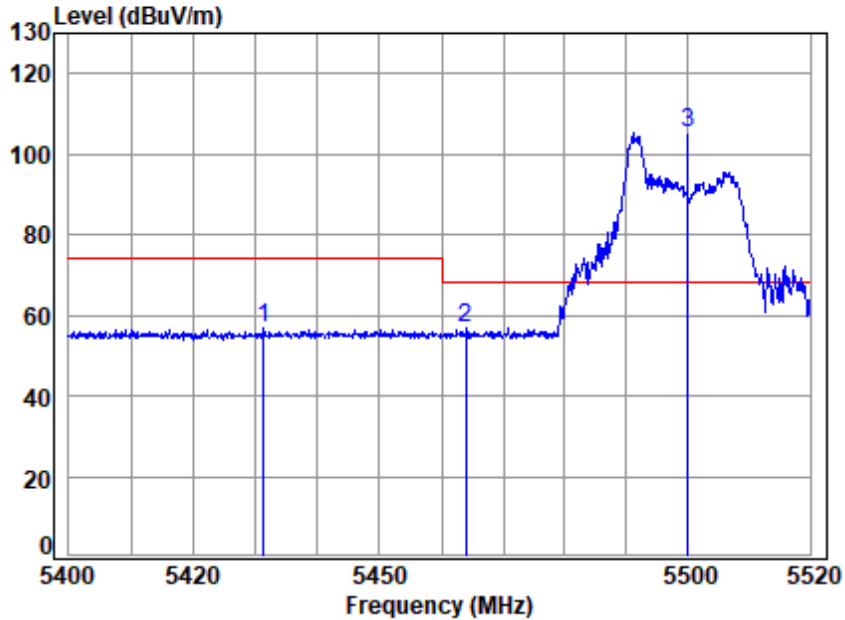


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5500 Band edge

: 5G WIFI 11AX20 Partial RU
 Cable Ant Preamp Read Limit Over
 Freq Loss Factor Factor Level Level Line Limit Remark

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5431.305	19.22	34.66	31.43	34.42	56.87	74.00	-17.13	peak
2	5463.992	19.26	34.64	31.44	34.38	56.84	68.20	-11.36	peak
3 p	5500.000	19.31	34.50	31.46	82.70	105.05	68.20	36.85	peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:Low

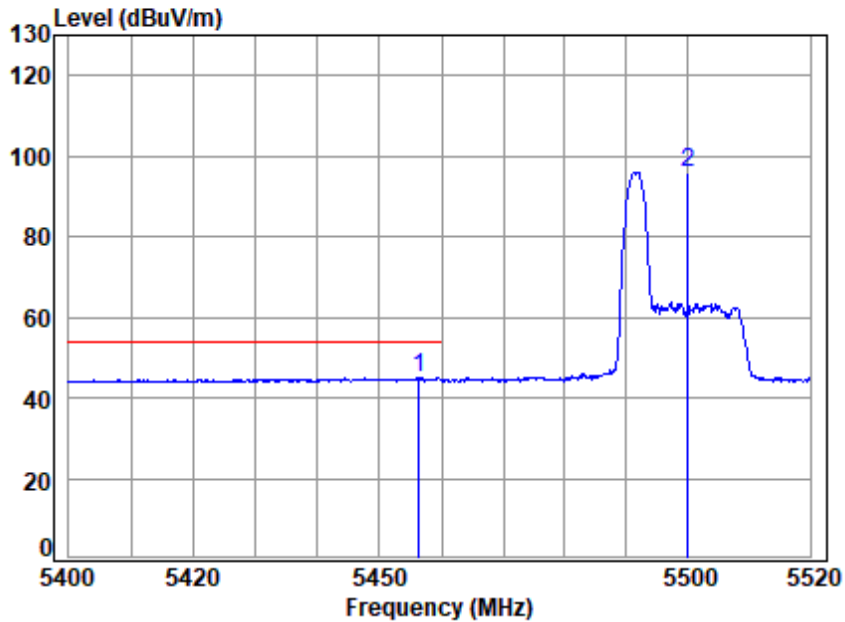

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5500 Band edge


: 5G WIFI 11AX20 Partial RU
 Cable Ant Preamp Read Limit Over
 Freq Loss Factor Factor Level Level Line Limit Remark

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q	5456.312	19.25	34.67	31.44	22.49	44.97	54.00	-9.03	Average
2	5500.000	19.31	34.50	31.46	73.66	96.01	-----	-----	Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:Low

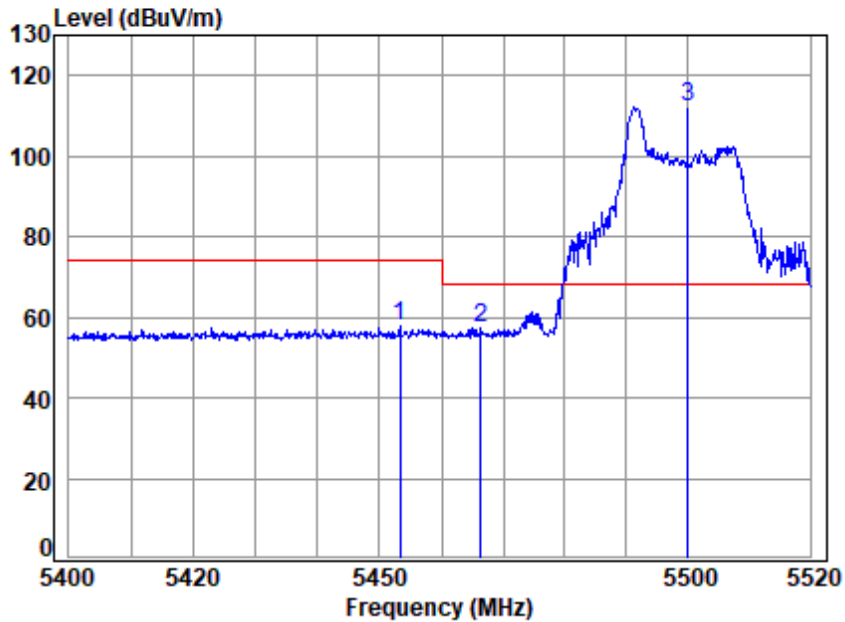


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5500 Band edge

: 5G WIFI 11AX20 Partial RU
 Cable Ant Preamp Read Limit Over
 Freq Loss Factor Factor Level Level Line Limit Remark

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5453.314	19.25	34.69	31.44	35.22	57.72	74.00	-16.28	Peak
2	5466.395	19.27	34.63	31.44	34.97	57.43	68.20	-10.77	peak
3 p	5500.000	19.31	34.50	31.46	89.92	112.27	68.20	44.07	Peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:Low

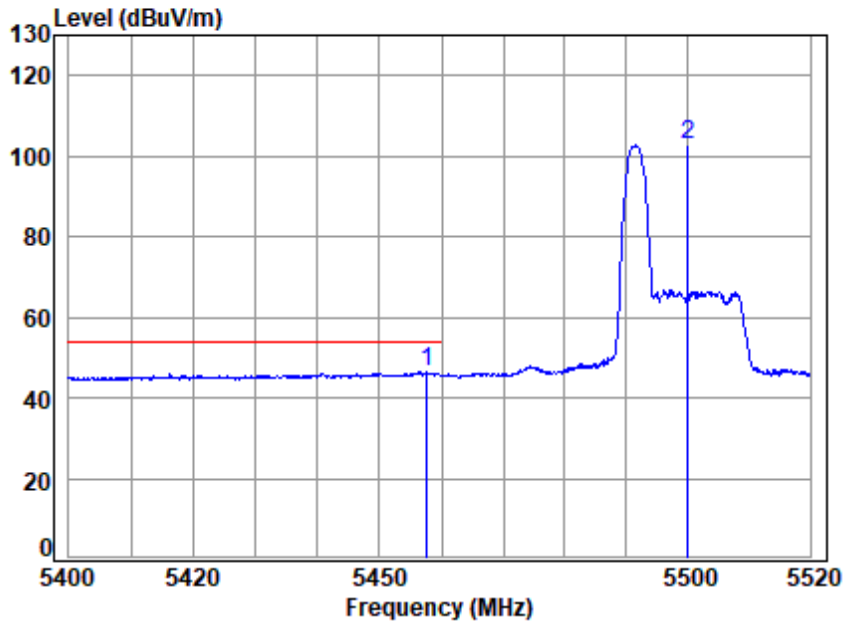


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5500 Band edge

: 5G WIFI 11AX20 Partial RU
 Cable Ant Preamp Read Limit Over
 Freq Loss Factor Factor Level Level Line Limit Remark

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q	5457.631	19.25	34.67	31.44	24.12	46.60	54.00	-7.40	Average
2	5500.000	19.31	34.50	31.46	80.36	102.71	-----	-----	Average



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:High

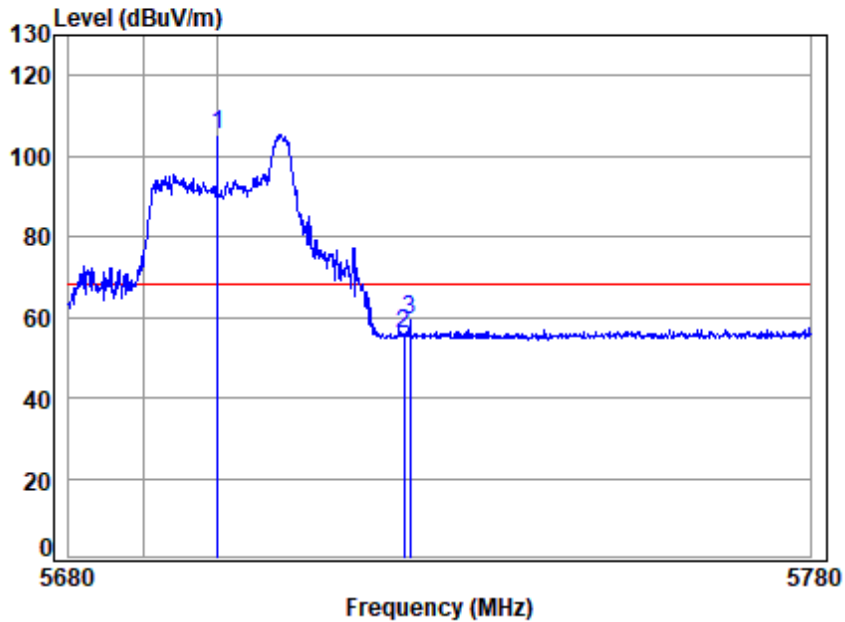

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5700 Band edge
 : 5G WIFI 11AX20 Partial RU


	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5700.000	19.44	34.30	31.56	83.20	105.38	68.20	37.18	peak
2 5725.000	19.46	34.25	31.57	33.96	56.10	68.20	-12.10	peak
3 5725.783	19.46	34.25	31.57	37.03	59.17	68.20	-9.03	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:High

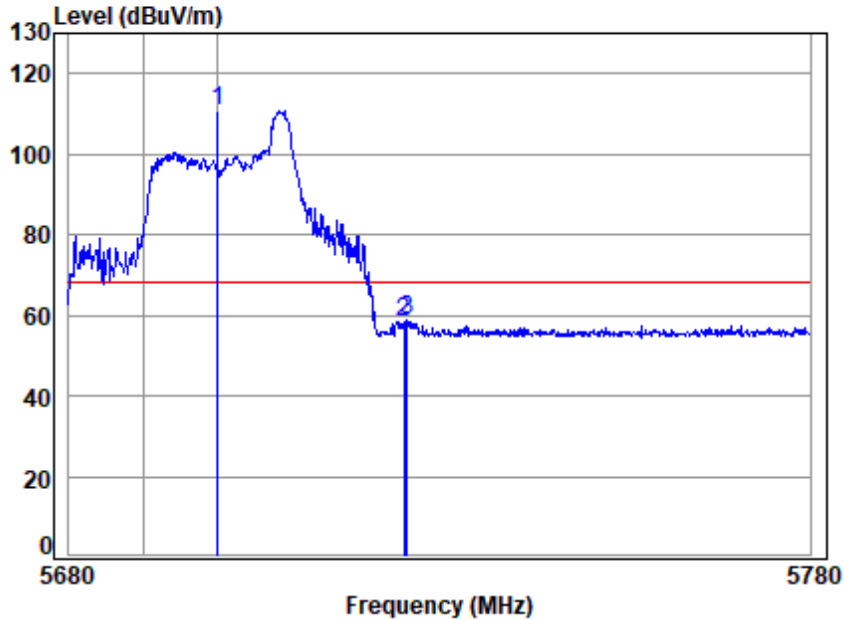


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5700 Band edge
 : 5G WIFI 11AX20 Partial RU

Peak	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p	5700.000	19.44	34.30	31.56	88.44	110.62	68.20	42.42	Peak
2	5725.000	19.46	34.25	31.57	36.22	58.36	68.20	-9.84	Peak
3	5725.483	19.46	34.25	31.57	36.66	58.80	68.20	-9.40	Peak



Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

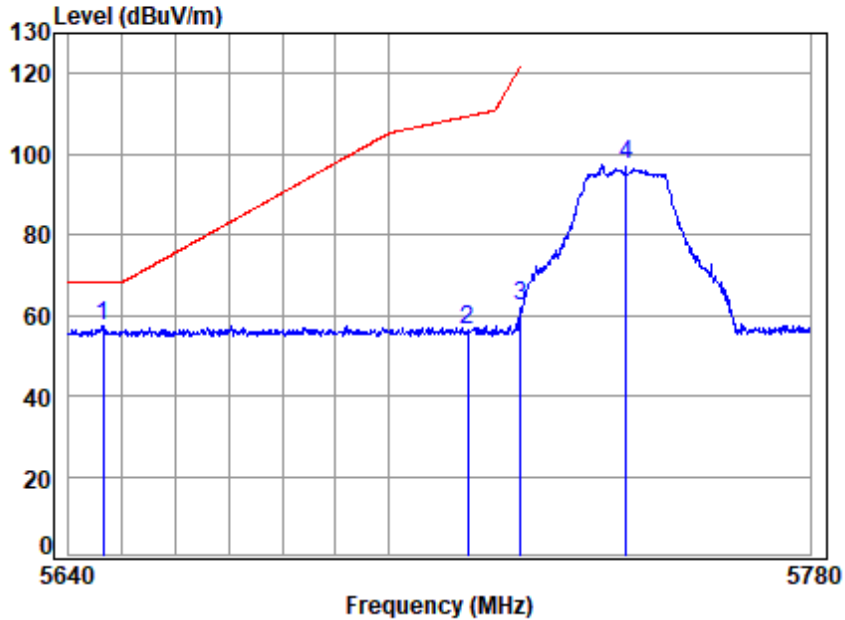


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5745 Band edge
 : 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5646.365	19.41	34.42	31.53	35.13	57.43	68.20	-10.77 peak
2	5715.000	19.45	34.27	31.57	34.07	56.22	109.40	-53.18 peak
3	5725.000	19.46	34.25	31.57	39.96	62.10	122.20	-60.10 peak
4	5745.000	19.47	34.21	31.58	75.14	97.24	-----	----- peak



Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

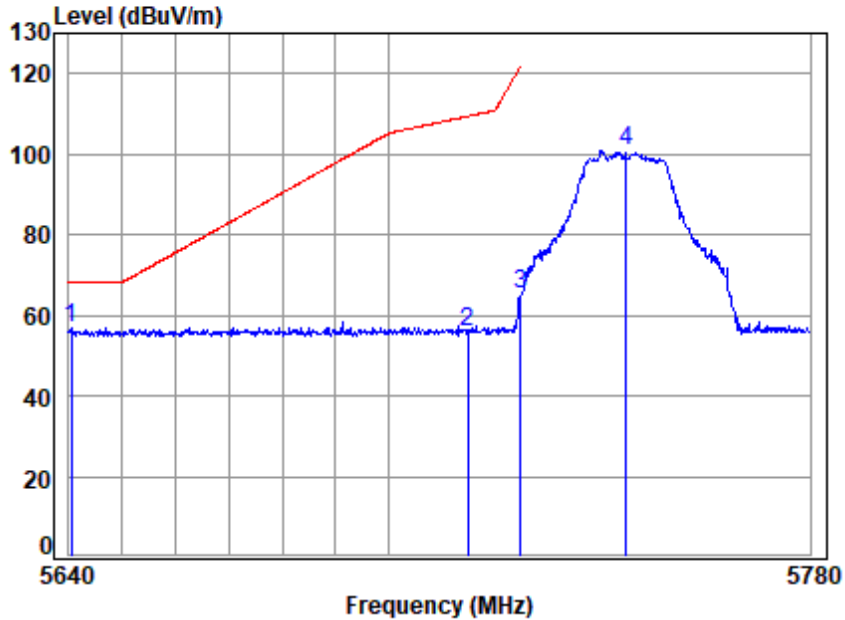


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5745 Band edge
 : 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5640.553	19.40	34.46	31.53	34.40	56.73	68.20	-11.47 peak
2	5715.000	19.45	34.27	31.57	33.83	55.98	109.40	-53.42 peak
3	5725.000	19.46	34.25	31.57	43.35	65.49	122.20	-56.71 peak
4	5745.000	19.47	34.21	31.58	78.97	101.07	-----	----- peak



Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

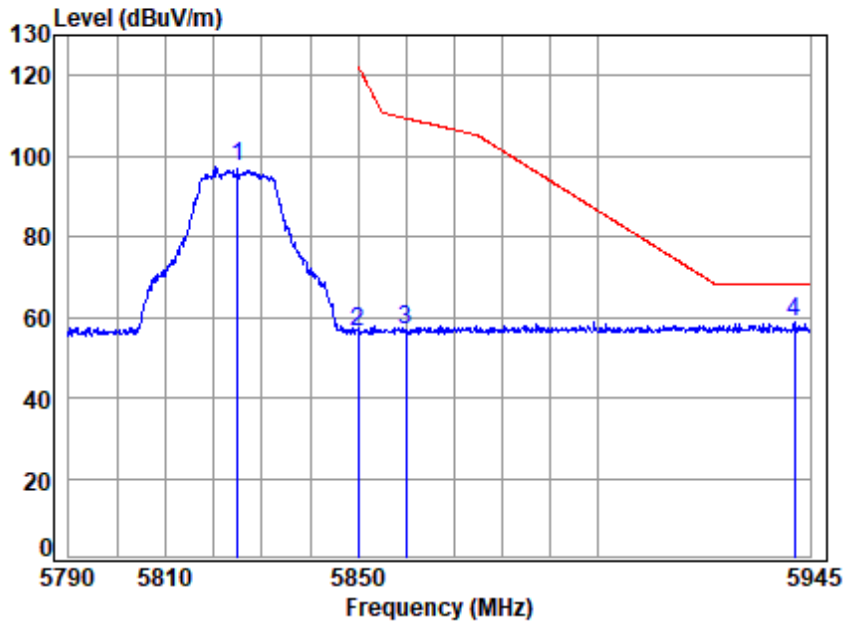

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5825 Band edge
 : 5G WIFI 11A


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5825.000	19.52	34.35	31.62	74.94	97.19	-----	-----	peak
2	5850.000	19.54	34.40	31.63	34.11	56.42	122.20	-65.78	peak
3	5860.000	19.54	34.44	31.64	34.59	56.93	109.40	-52.47	peak
4 p	5941.703	19.59	34.68	31.67	36.19	58.79	68.20	-9.41	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

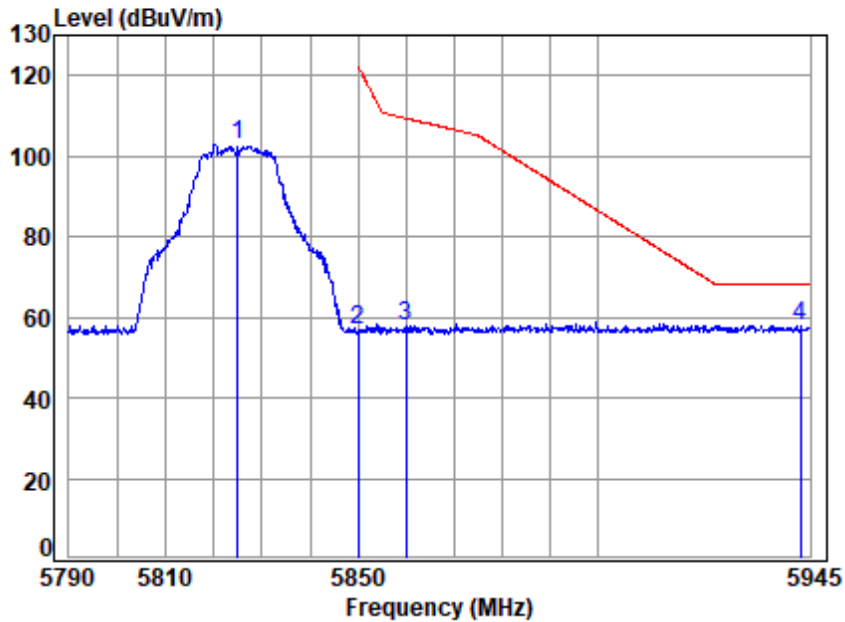

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5825 Band edge
 : 5G WIFI 11A


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5825.000	19.52	34.35	31.62	80.64	102.89	-----	-----	peak
2	5850.000	19.54	34.40	31.63	34.56	56.87	122.20	-65.33	peak
3	5860.000	19.54	34.44	31.64	35.57	57.91	109.40	-51.49	peak
4 p	5942.958	19.59	34.69	31.67	35.45	58.06	68.20	-10.14	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

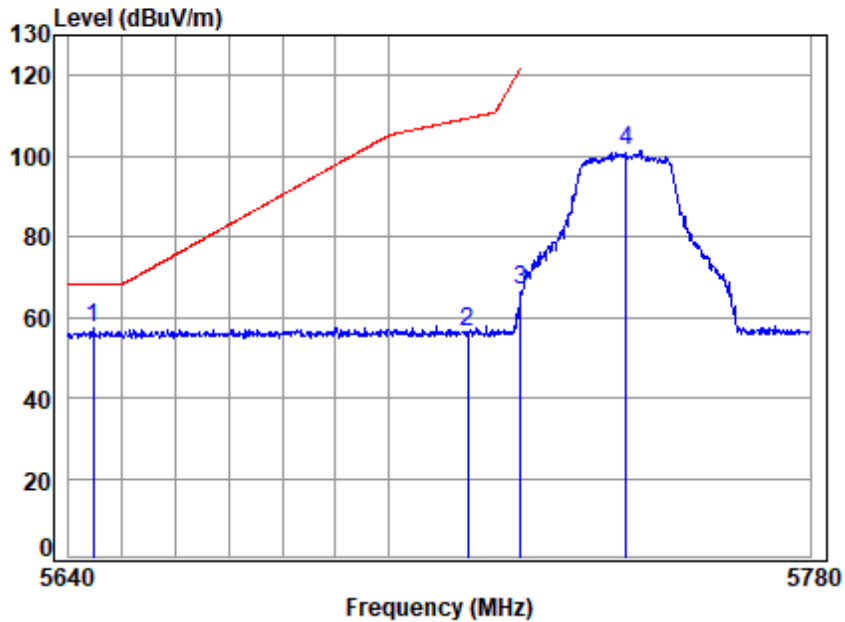


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5745 Band edge
 : 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5644.565	19.41	34.43	31.53	34.89	57.20	68.20	-11.00 peak
2	5715.000	19.45	34.27	31.57	34.36	56.51	109.40	-52.89 peak
3	5725.000	19.46	34.25	31.57	44.63	66.77	122.20	-55.43 peak
4	5745.000	19.47	34.21	31.58	79.12	101.22	-----	----- peak



Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

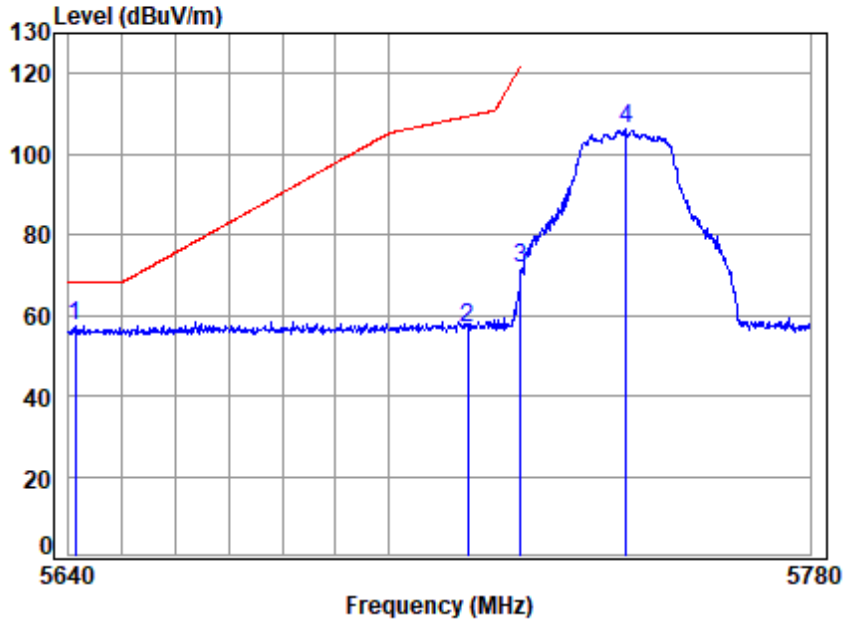


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5745 Band edge
 : 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5641.245	19.40	34.45	31.53	35.05	57.37	68.20	-10.83 peak
2	5715.000	19.45	34.27	31.57	34.64	56.79	109.40	-52.61 peak
3	5725.000	19.46	34.25	31.57	49.75	71.89	122.20	-50.31 peak
4	5745.000	19.47	34.21	31.58	84.26	106.36	-----	----- peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

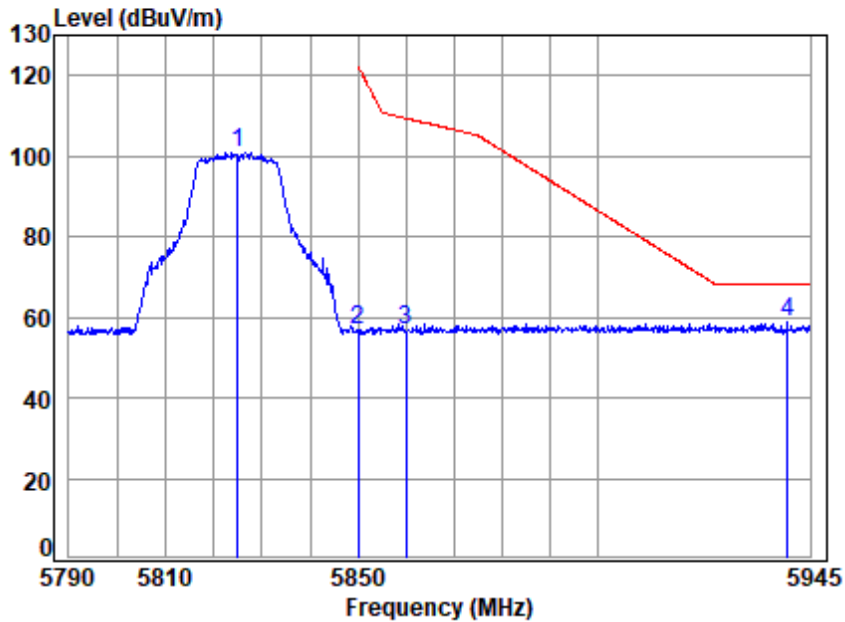


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5825 Band edge
 : 5G WIFI 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5825.000	19.52	34.35	31.62	78.73	100.98	-----	-----	peak
2	5850.000	19.54	34.40	31.63	34.67	56.98	122.20	-65.22	peak
3	5860.000	19.54	34.44	31.64	34.71	57.05	109.40	-52.35	peak
4 p	5940.133	19.59	34.68	31.67	36.13	58.73	68.20	-9.47	peak



Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

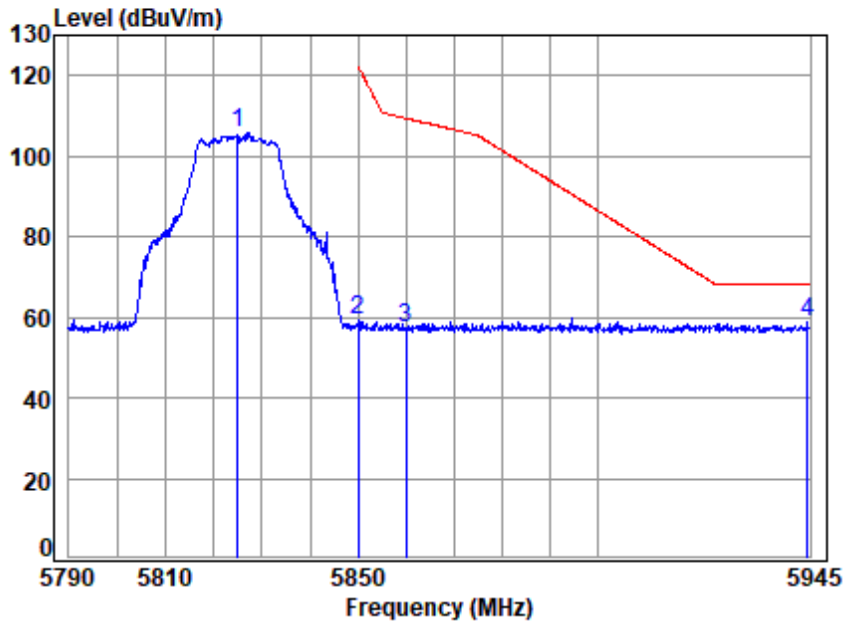


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5825 Band edge
 : 5G WIFI 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5825.000	19.52	34.35	31.62	83.36	105.61	-----	-----	peak
2	5850.000	19.54	34.40	31.63	36.91	59.22	122.20	-62.98	peak
3	5860.000	19.54	34.44	31.64	35.08	57.42	109.40	-51.98	peak
4 p	5944.372	19.60	34.69	31.67	36.28	58.90	68.20	-9.30	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

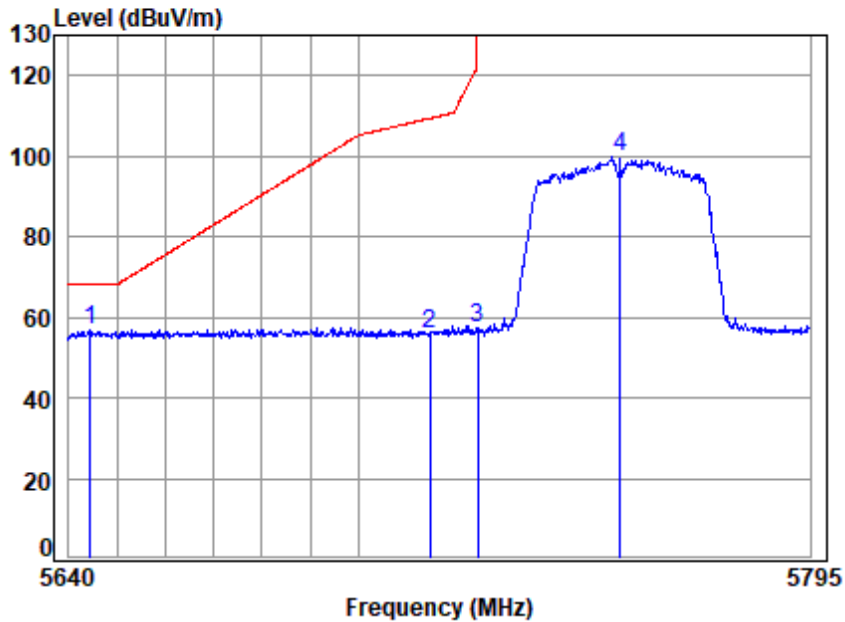


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5755 Band edge
 : 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit	
MHz	dB	dB/m	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p	5644.436	19.41	34.43	31.53	34.41	56.72	68.20	-11.48	peak
2	5715.000	19.45	34.27	31.57	33.87	56.02	109.40	-53.38	peak
3	5725.000	19.46	34.25	31.57	35.35	57.49	122.20	-64.71	peak
4	5755.000	19.48	34.21	31.59	77.54	99.64	-----	-----	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

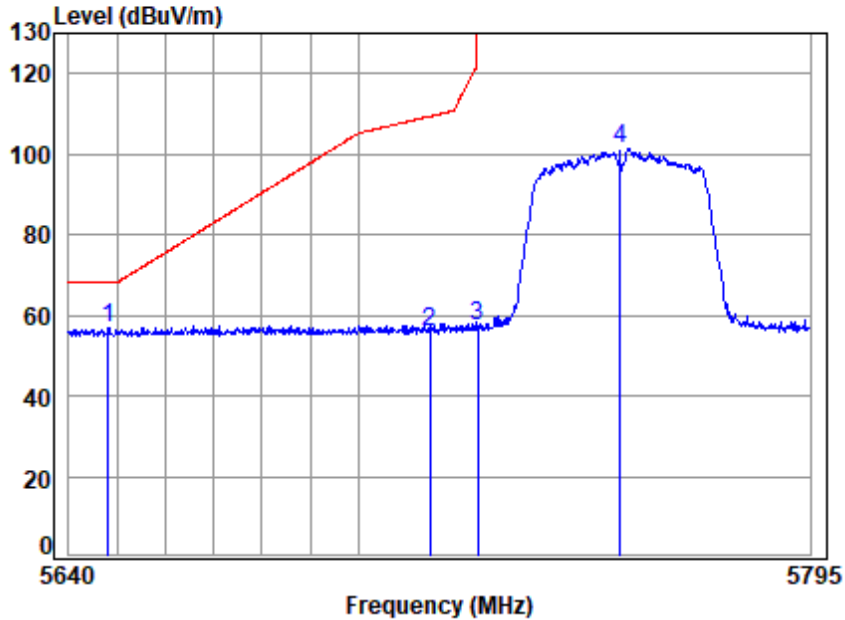


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5755 Band edge
 : 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p	5648.110	19.41	34.41	31.53	34.72	57.01	68.20	-11.19	peak
2	5715.000	19.45	34.27	31.57	33.72	55.87	109.40	-53.53	peak
3	5725.000	19.46	34.25	31.57	35.36	57.50	122.20	-64.70	peak
4	5755.000	19.48	34.21	31.59	79.08	101.18	-----	-----	peak



Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

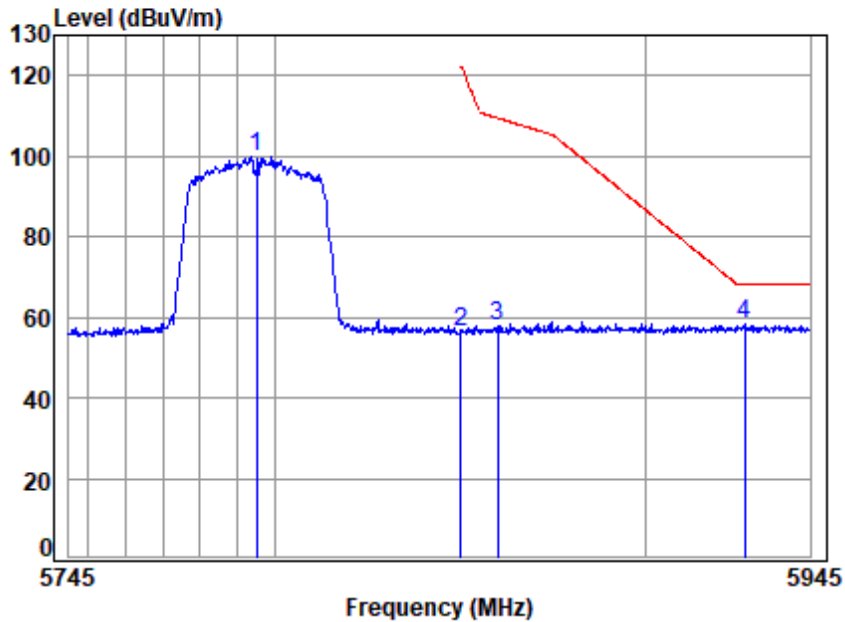

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5795 Band edge
 : 5G WIFI 11AC40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5795.000	19.50	34.29	31.60	77.67	99.86	-----	-----	peak
2	5850.000	19.54	34.40	31.63	33.95	56.26	122.20	-65.94	peak
3	5860.000	19.54	34.44	31.64	35.40	57.74	109.40	-51.66	peak
4 p	5927.124	19.59	34.65	31.67	35.67	58.24	68.20	-9.96	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

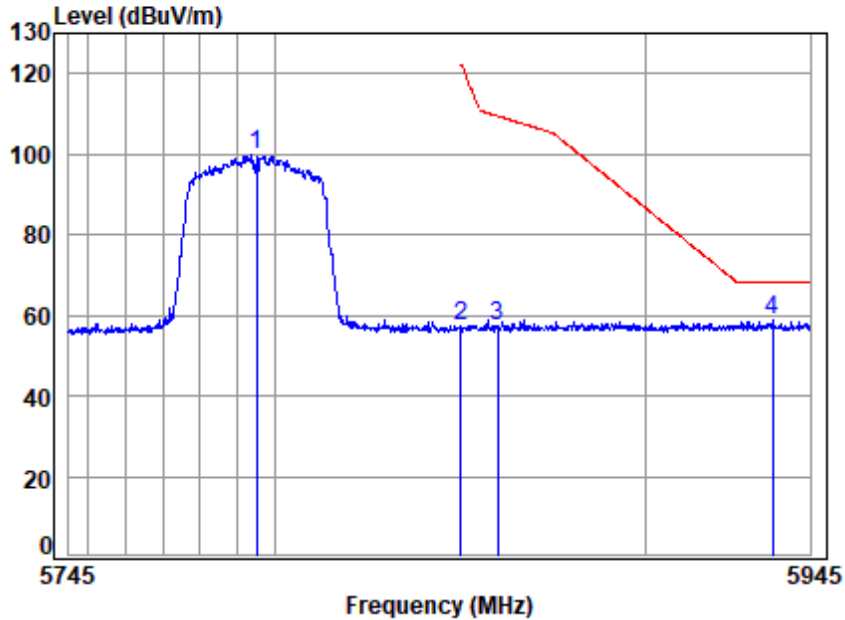


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5795 Band edge
 : 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5795.000	19.50	34.29	31.60	77.43	99.62	-----	----- peak
2	5850.000	19.54	34.40	31.63	34.94	57.25	122.20	-64.95 peak
3	5860.000	19.54	34.44	31.64	34.78	57.12	109.40	-52.28 peak
4 p	5934.633	19.59	34.67	31.67	36.29	58.88	68.20	-9.32 peak



Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

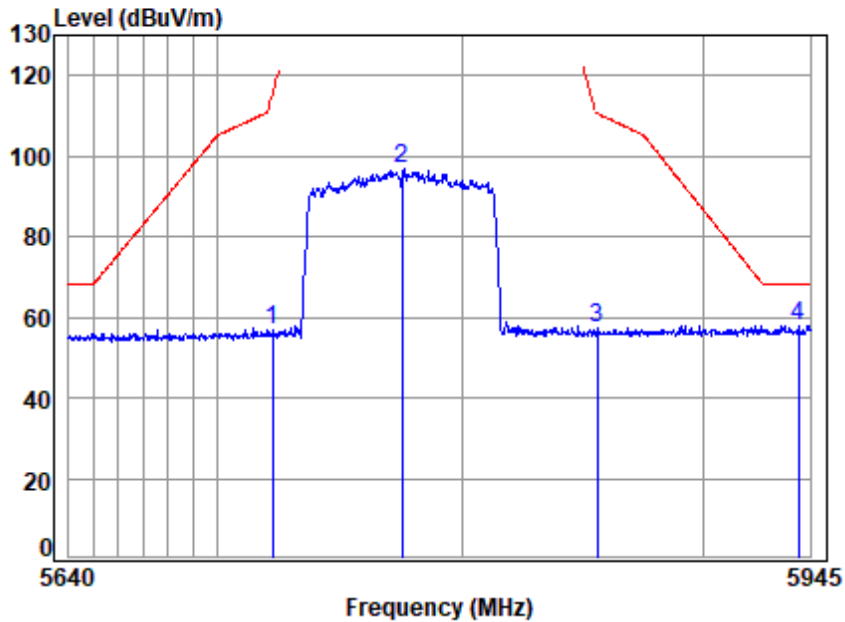

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5775 Band edge
 : 5G WIFI 11AC80


	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5722.280	19.46	34.26	31.57	34.91	57.06	116.00	-58.94 peak
2	5775.000	19.49	34.25	31.60	74.73	96.87	-----	----- peak
3	5855.815	19.54	34.42	31.63	34.99	57.32	110.57	-53.25 peak
4 p	5939.993	19.59	34.68	31.67	35.42	58.02	68.20	-10.18 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

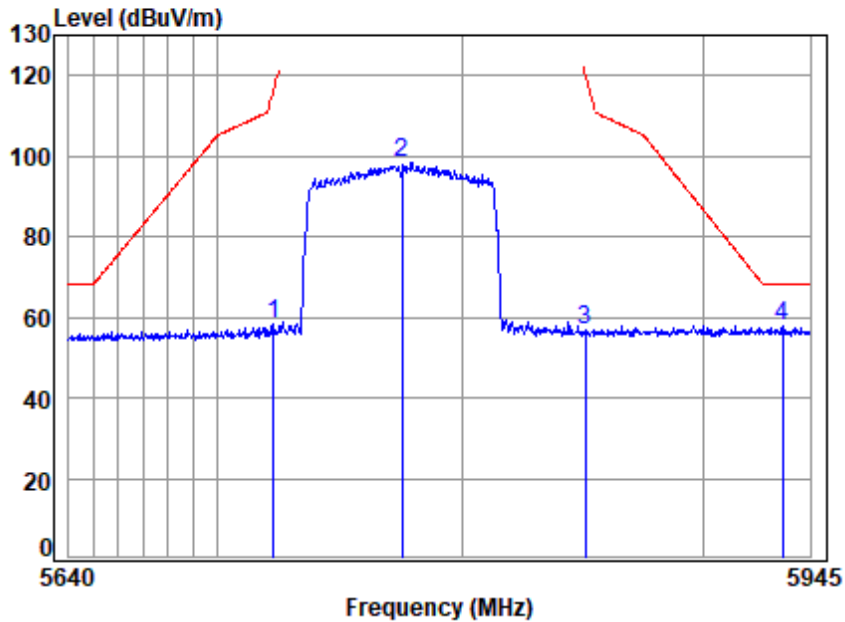

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5775 Band edge
 : 5G WIFI 11AC80


	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5722.582	19.46	34.25	31.57	36.29	58.43	116.69	-58.26 peak
2	5775.000	19.49	34.25	31.60	76.13	98.27	-----	----- peak
3	5850.883	19.54	34.40	31.63	34.51	56.82	120.19	-63.37 peak
4 p	5933.426	19.59	34.67	31.67	35.01	57.60	68.20	-10.60 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

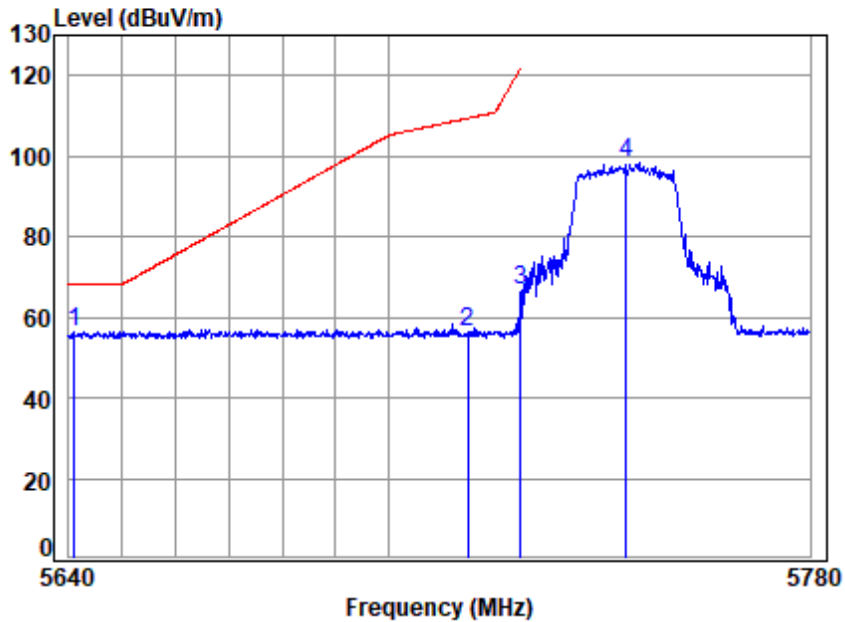


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5745 Band edge
 : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5640.968	19.40	34.45	31.53	34.17	56.49	68.20	-11.71 peak
2	5715.000	19.45	34.27	31.57	33.98	56.13	109.40	-53.27 peak
3	5725.000	19.46	34.25	31.57	44.51	66.65	122.20	-55.55 peak
4	5745.000	19.47	34.21	31.58	76.23	98.33	-----	----- peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

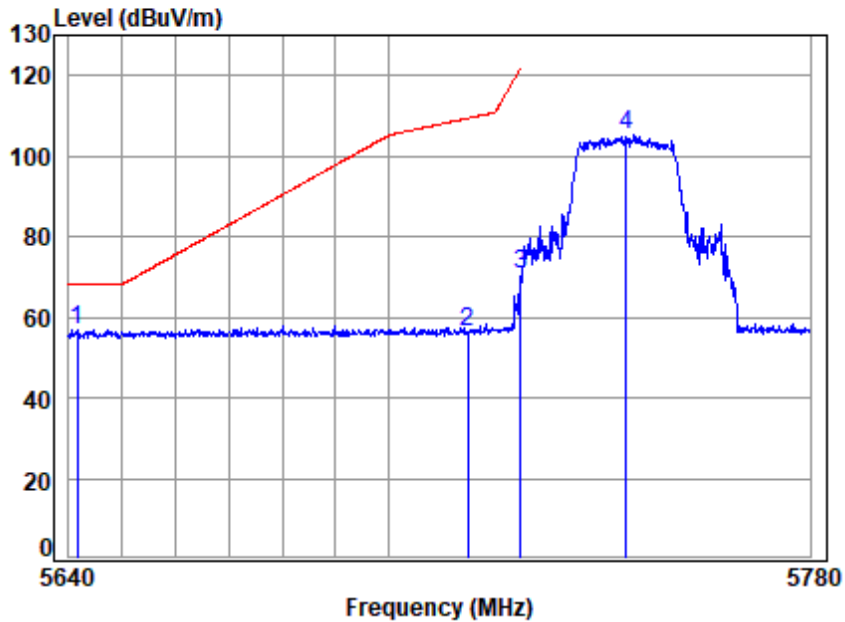


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5745 Band edge
 : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1 p 5641.521	19.40	34.45	31.53	34.71	57.03	68.20	-11.17	peak
2 5715.000	19.45	34.27	31.57	34.05	56.20	109.40	-53.20	peak
3 5725.000	19.46	34.25	31.57	48.48	70.62	122.20	-51.58	peak
4 5745.000	19.47	34.21	31.58	82.96	105.06	-----	-----	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

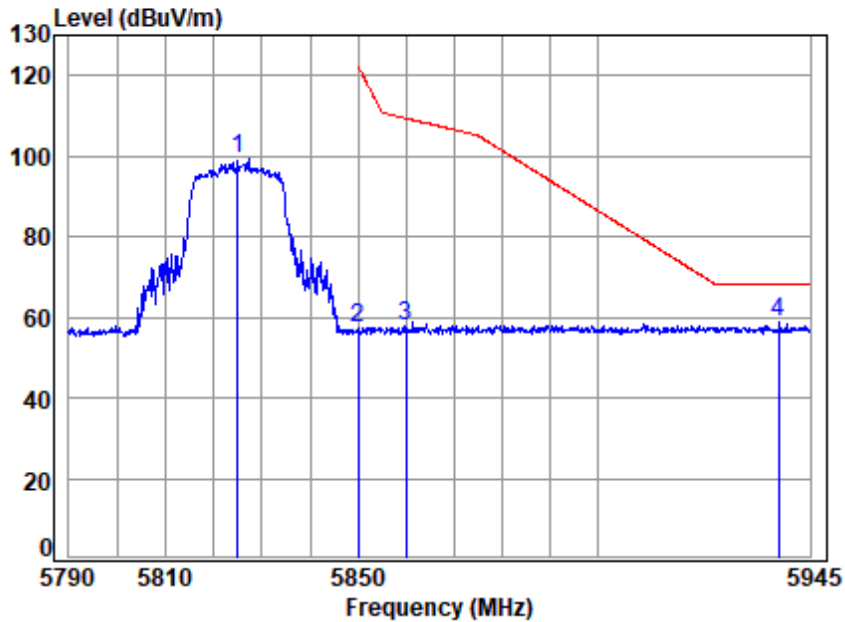


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5825 Band edge
 : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5825.000	19.52	34.35	31.62	76.86	99.11	-----	-----	peak
2	5850.000	19.54	34.40	31.63	35.01	57.32	122.20	-64.88	peak
3	5860.000	19.54	34.44	31.64	35.27	57.61	109.40	-51.79	peak
4 p	5938.407	19.59	34.68	31.67	36.10	58.70	68.20	-9.50	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

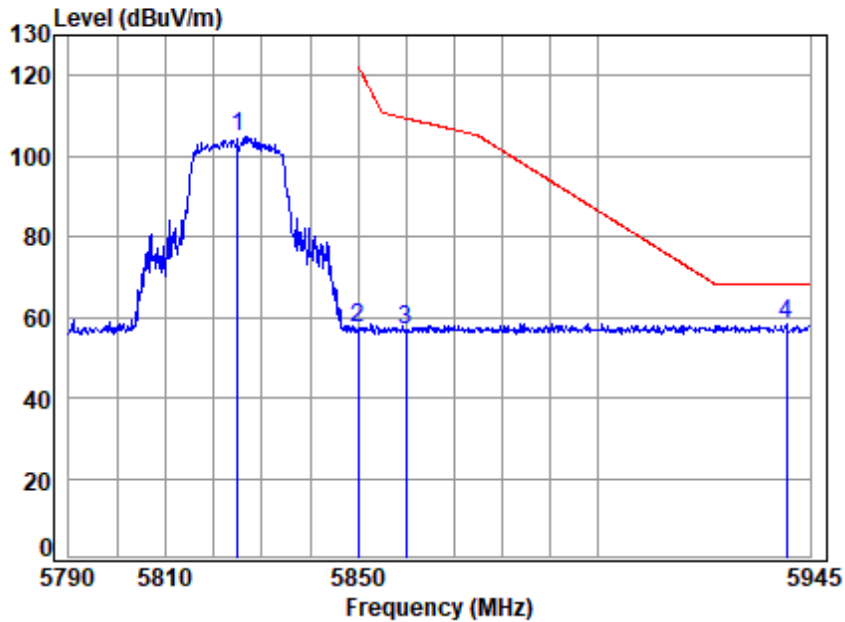

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5825 Band edge
 : 5G WIFI 11AX20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5825.000	19.52	34.35	31.62	82.79	105.04	-----	-----	peak
2	5850.000	19.54	34.40	31.63	34.79	57.10	122.20	-65.10	peak
3	5860.000	19.54	34.44	31.64	34.73	57.07	109.40	-52.33	peak
4 p	5939.976	19.59	34.68	31.67	35.80	58.40	68.20	-9.80	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:Low

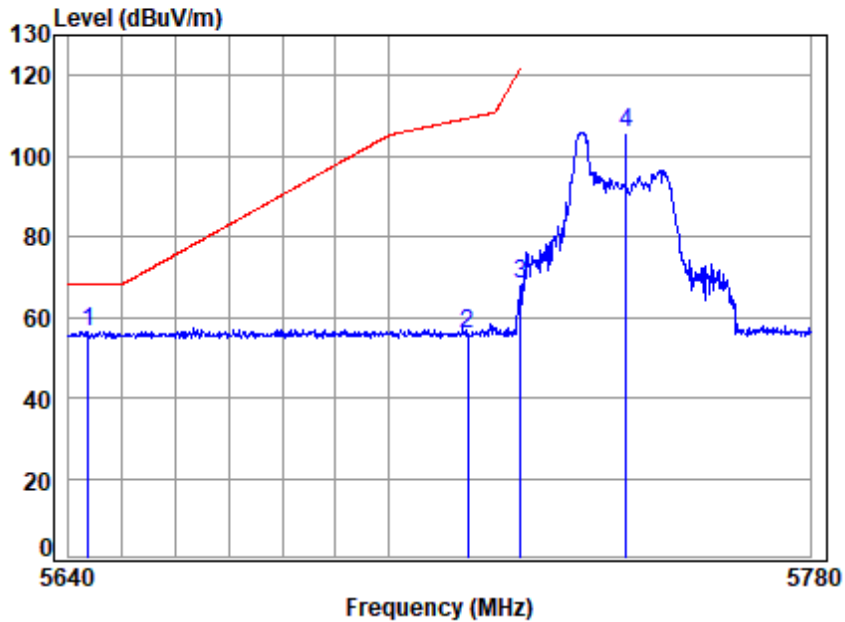


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5745 Band edge

: 5G WIFI 11AX20 Partial RU
 Cable Ant Preamp Read Limit Over
 Freq Loss Factor Factor Level Level Line Limit Remark

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p	5643.735	19.40	34.44	31.53	34.25	56.56	68.20	-11.64	peak
2	5715.000	19.45	34.27	31.57	33.86	56.01	109.40	-53.39	peak
3	5725.000	19.46	34.25	31.57	46.12	68.26	122.20	-53.94	peak
4	5745.000	19.47	34.21	31.58	83.87	105.97	-----	-----	peak



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:Low

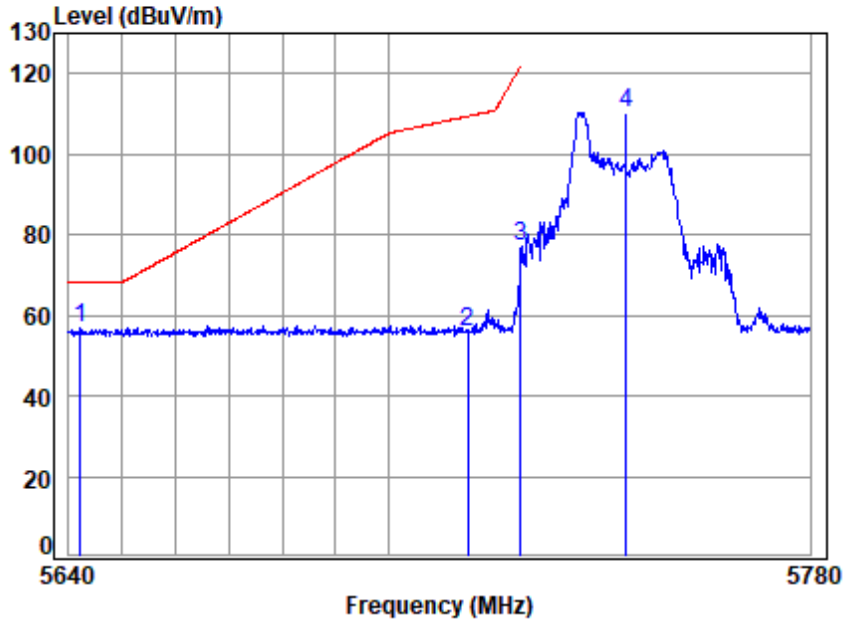


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5745 Band edge
 : 5G WIFI 11AX20 Partial RU

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5642.213	19.40	34.45	31.53	34.36	56.68	68.20	-11.52	peak
2 5715.000	19.45	34.27	31.57	33.55	55.70	109.40	-53.70	peak
3 5725.000	19.46	34.25	31.57	55.21	77.35	122.20	-44.85	peak
4 5745.000	19.47	34.21	31.58	88.32	110.42	-----	-----	peak



Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:High

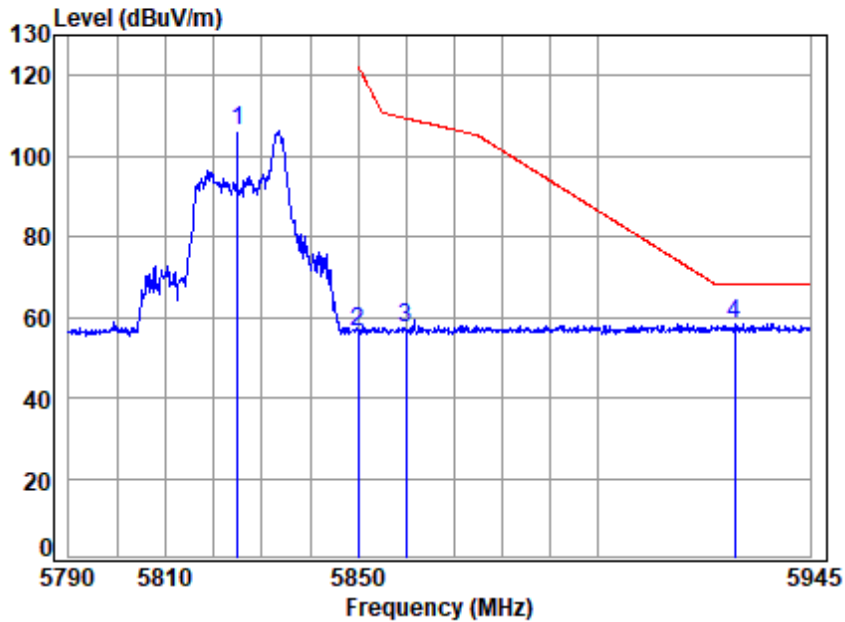

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03197AT\03196AT
 Mode : 5825 Band edge


: 5G WIFI 11AX20 Partial RU
 Cable Ant Preamp Read Limit Over
 Freq Loss Factor Factor Level Level Line Limit Remark

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5825.000	19.52	34.35	31.62	83.99	106.24	-----	-----	peak
2	5850.000	19.54	34.40	31.63	34.11	56.42	122.20	-65.78	peak
3	5860.000	19.54	34.44	31.64	35.05	57.39	109.40	-52.01	peak
4 p	5929.002	19.59	34.66	31.67	35.85	58.43	68.20	-9.77	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(26 RU0); Bandwidth:20MHz; Channel:High

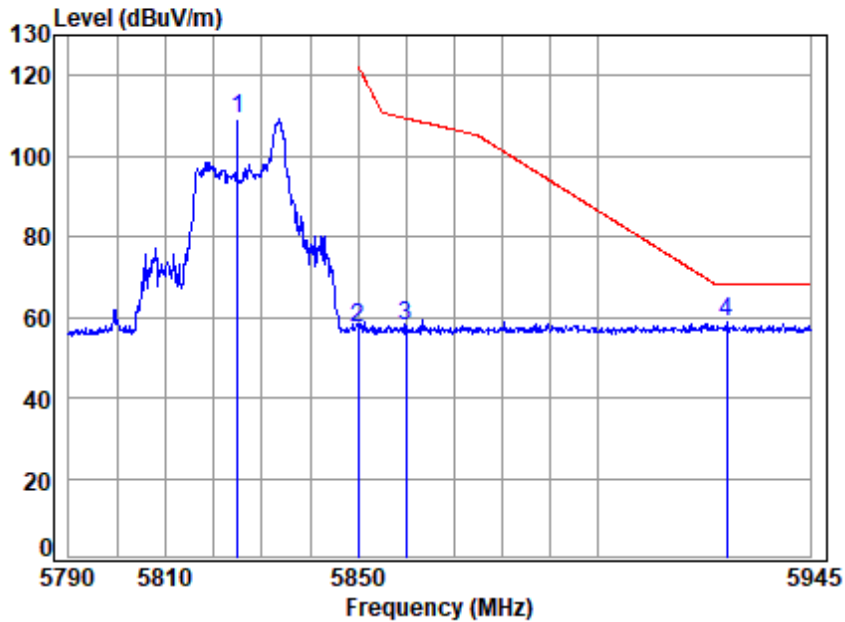

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03197AT\03196AT
 Mode : 5825 Band edge
 : 5G WIFI 11AX20 Partial RU

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5825.000	19.52	34.35	31.62	87.24	109.49	-----	----- peak
2	5850.000	19.54	34.40	31.63	35.13	57.44	122.20	-64.76 peak
3	5860.000	19.54	34.44	31.64	35.26	57.60	109.40	-51.80 peak
4 p	5927.279	19.59	34.65	31.67	36.14	58.71	68.20	-9.49 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

7.6 Channel Move Time

Test Requirement KDB 905462 D02 Section 5.1
 Test Method: KDB 905462 D02 Section 7.8.3

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.6.1 E.U.T. Operation


Operating Environment:

Temperature: 22.9 °C

Humidity: 67.4 % RH

Atmospheric Pressure: 1020 mbar

7.6.2 Test Setup Diagram

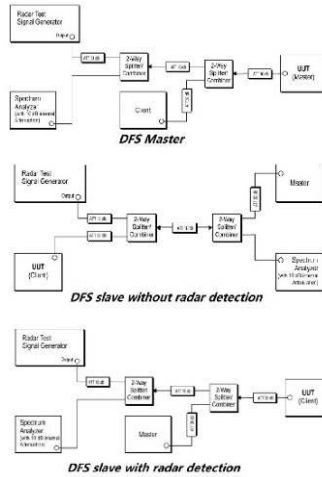

7.6.3 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.7 Duty Cycle

Test Requirement KDB 789033 D02 II B 1
 Test Method: KDB 789033 II B 1

7.7.1 E.U.T. Operation


Operating Environment:
 Temperature: 24.6 °C Humidity: 42.6 % RH Atmospheric Pressure: 1020 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.



7.7.3 Test Setup Diagram

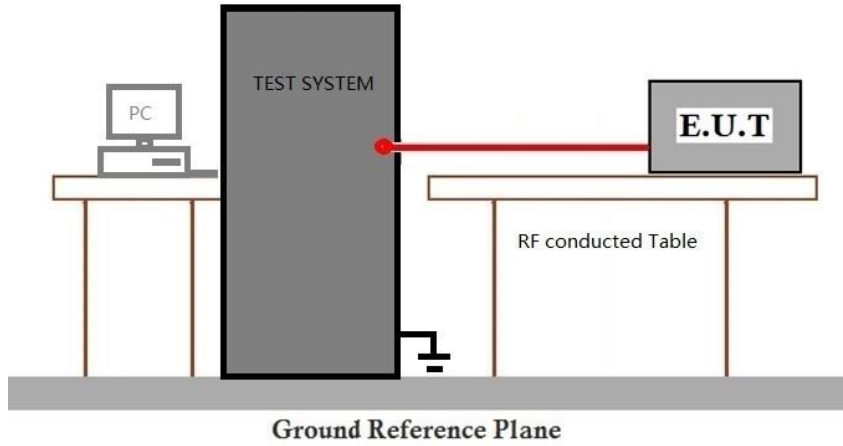

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details



7.8 99% Bandwidth

Test Requirement N/A
 Test Method: KDB 789033 II D

7.8.1 E.U.T. Operation

Operating Environment:
 Temperature: 24.6 °C Humidity: 42.6 % RH Atmospheric Pressure: 1020 mbar

7.8.2 Test Mode Description


Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.8.3 Test Setup Diagram

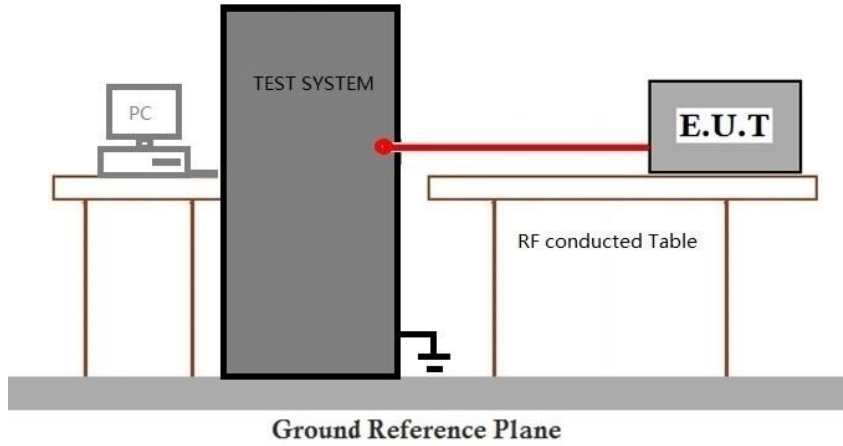

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details



7.9 26dB Emission bandwidth

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)
 Test Method: KDB 789033 D02 II C 1

7.9.1 E.U.T. Operation


Operating Environment:
 Temperature: 24.6 °C Humidity: 42.6 % RH Atmospheric Pressure: 1020 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.



7.9.3 Test Setup Diagram

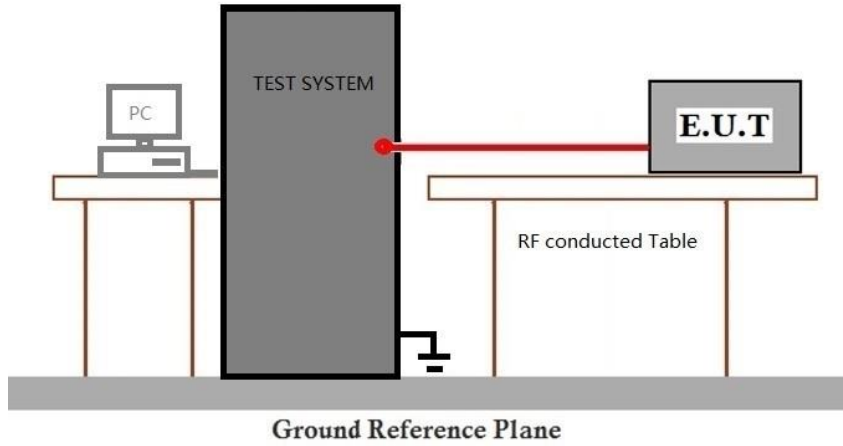

7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details



7.10 Minimum 6 dB bandwidth (5.725-5.85 GHz band)

Test Requirement 47 CFR Part 15, Subpart E 15.407 (e)
 Test Method: KDB 789033 D02 II C 2

Limit:

Frequency band(MHz)	Limit
5725-5850	≥500 kHz

7.10.1 E.U.T. Operation


Operating Environment:

Temperature: 24.6 °C Humidity: 42.6 % RH Atmospheric Pressure: 1020 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.

7.10.3 Test Setup Diagram

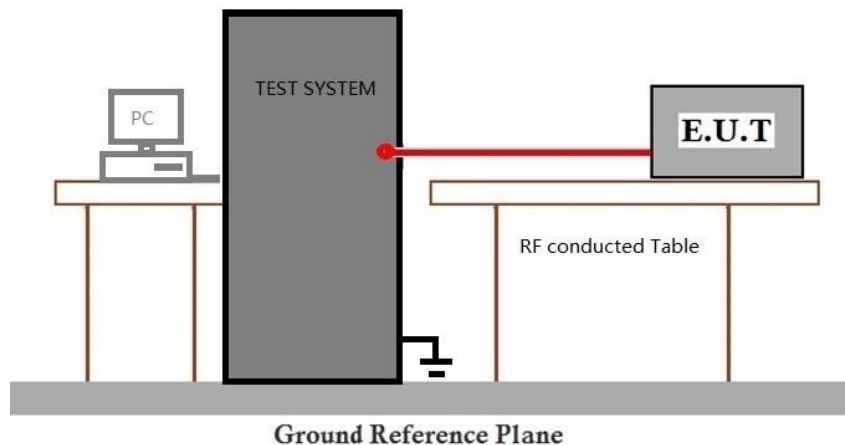

7.10.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

7.11 Peak Power spectrum density

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: KDB 789033 D02 II F

Limit:

Frequency band(MHz)	Limit
5150-5250	≤17dBm in 1MHz for master device
	≤11dBm in 1MHz for client device
5250-5350	≤11dBm in 1MHz for client device
5470-5725	≤11dBm in 1MHz for client device
5725-5850	≤30dBm in 500 kHz
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.

7.11.1 E.U.T. Operation

Operating Environment:

Temperature: 24.6 °C Humidity: 42.6 % RH Atmospheric Pressure: 1020 mbar


7.11.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

7.11.3 Test Setup Diagram

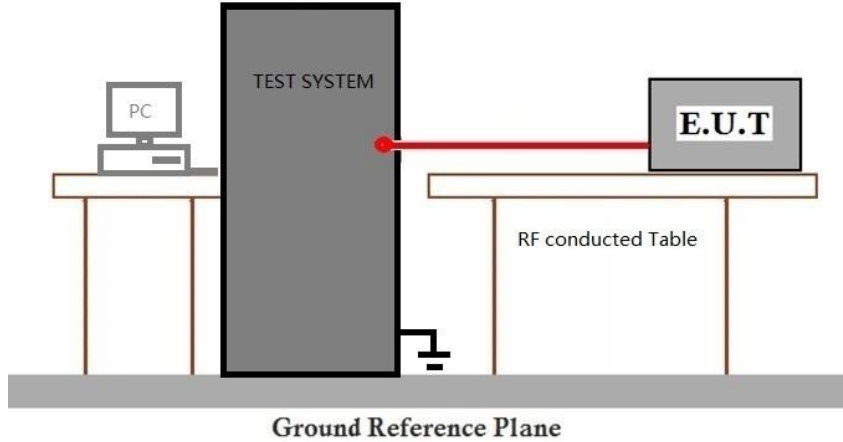

7.11.4 Measurement Procedure and Data

Please Refer to Appendix for Details



7.12 Frequency Stability

Test Requirement 47 CFR Part 15, Subpart E 15.407 (g)

Test Method: ANSI C63.10 (2013) Section 6.8

7.12.1 E.U.T. Operation

Operating Environment:

Temperature: 24.6 °C Humidity: 42.6 % RH Atmospheric Pressure: 1020 mbar

7.12.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com