


A.3 SAR Measurement Data


A.3.1 Left Head

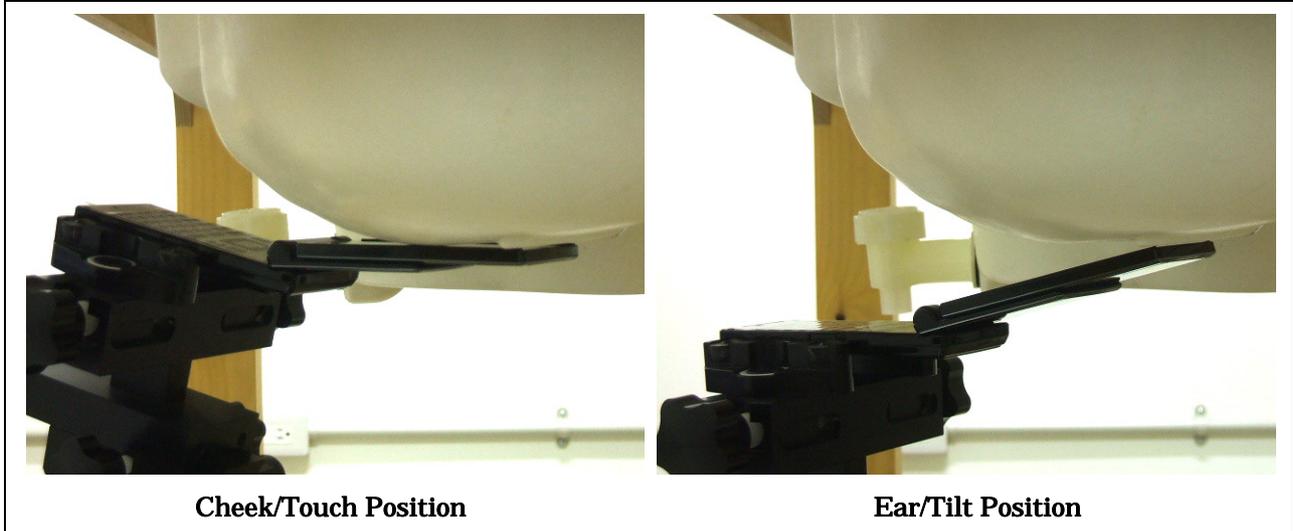

GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)							Date : August 26, 2008
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.72	-0.048		0.105	22.0
	0810	1909.80	--	--		**	--
Ear/Tilt	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.72	-0.047		0.073	22.0
	0810	1909.80	--	--		**	--


- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 4. Please refer to attachment for the result presentation in plot format.

A.3.2 Right Head

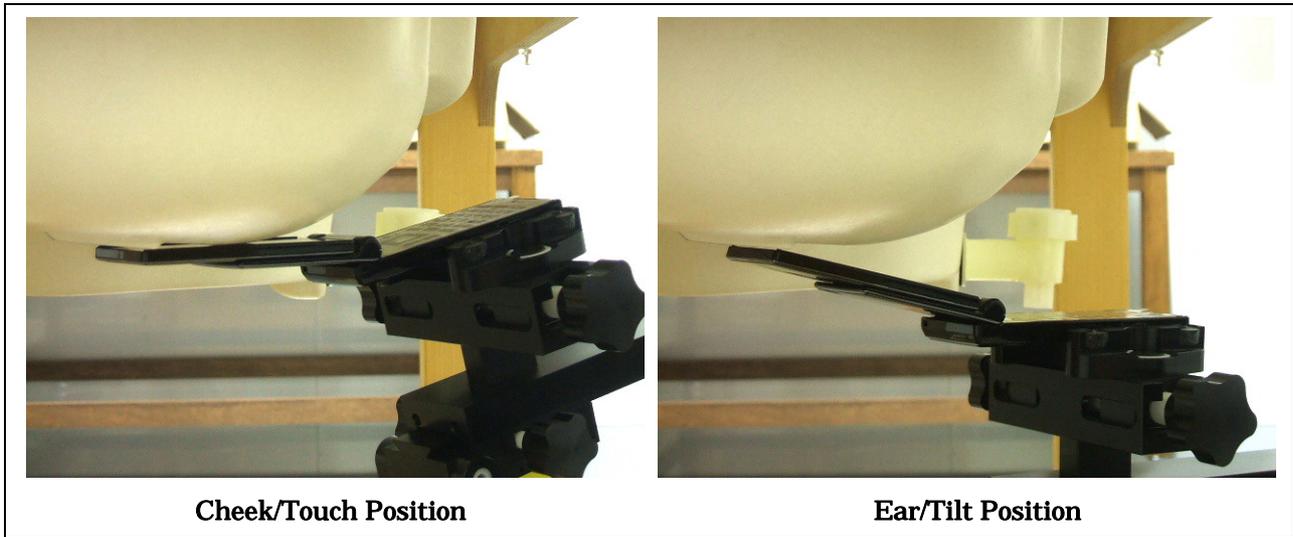

GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)					Date : August 26, 2008		
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	0512	1850.20	28.68	-0.088	1.6	0.128	22.0
	0661	1880.00	28.72	-0.070		0.123	22.0
	0810	1909.80	28.79	-0.095		0.137	22.0
Ear/Tilt	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.72	-0.031		0.072	22.0
	0810	1909.80	--	--		**	--
NOTES :							
1. Depth of Liquid : 15.0 cm							
2. Transmitter power was measured at the antenna-conducted terminal.							
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.							
4. Please refer to attachment for the result presentation in plot format.							

A.3.3 Body-worn Position

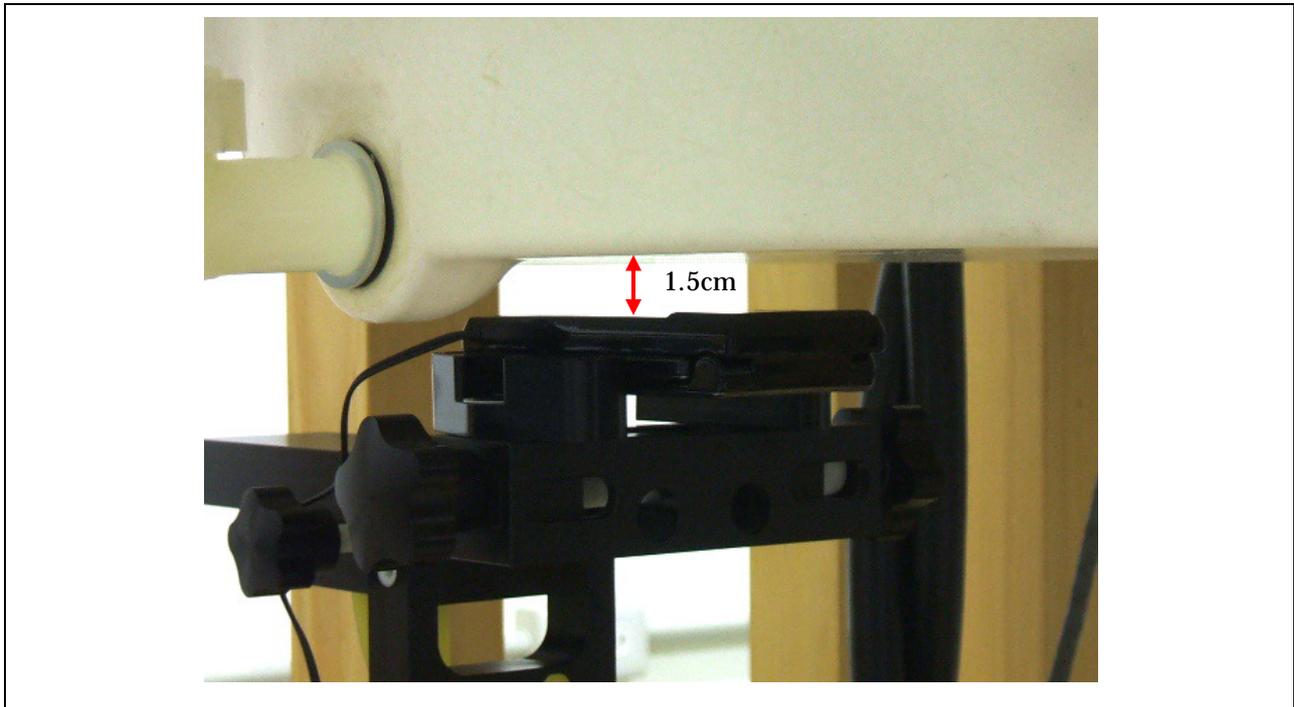

GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)							Date : August 27, 2008	
Separation Distance	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]	
	Channel	MHz						
1.5 cm	0512	1850.20	--	--	1.6	**	--	
	0661	1880.00	28.72	-0.015		0.166	22.0	
	0810	1909.80	--	--		**	--	
GSM 1900 GSM+GPRS (Duty Cycle: 24.0 %, Crest Factor: 4.15)								
1.5 cm	0512	1850.20	28.58	-0.047	1.6	0.385	22.0	
	0661	1880.00	28.60	-0.039		0.308	22.0	
	0810	1909.80	28.66	-0.024		0.294	22.0	

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
 5. Please refer to attachment for the result presentation in plot format.