



Attachment 1 – System Validation Plots

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

System Validation (Head 900 MHz)**DUT: Dipole 900 MHz; Type: D900V2; Serial: 153**

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: HSL900 Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.954 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.69, 6.69, 6.69); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn328; Calibrated: 2008/03/06
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna Input Power 250 mW/Area Scan (5x5x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (measured) = 2.87 mW/g


Antenna Input Power 250 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 57.7 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 3.71 W/kg

SAR(1 g) = 2.65 mW/g; SAR(10 g) = 1.73 mW/g

Maximum value of SAR (measured) = 2.89 mW/g

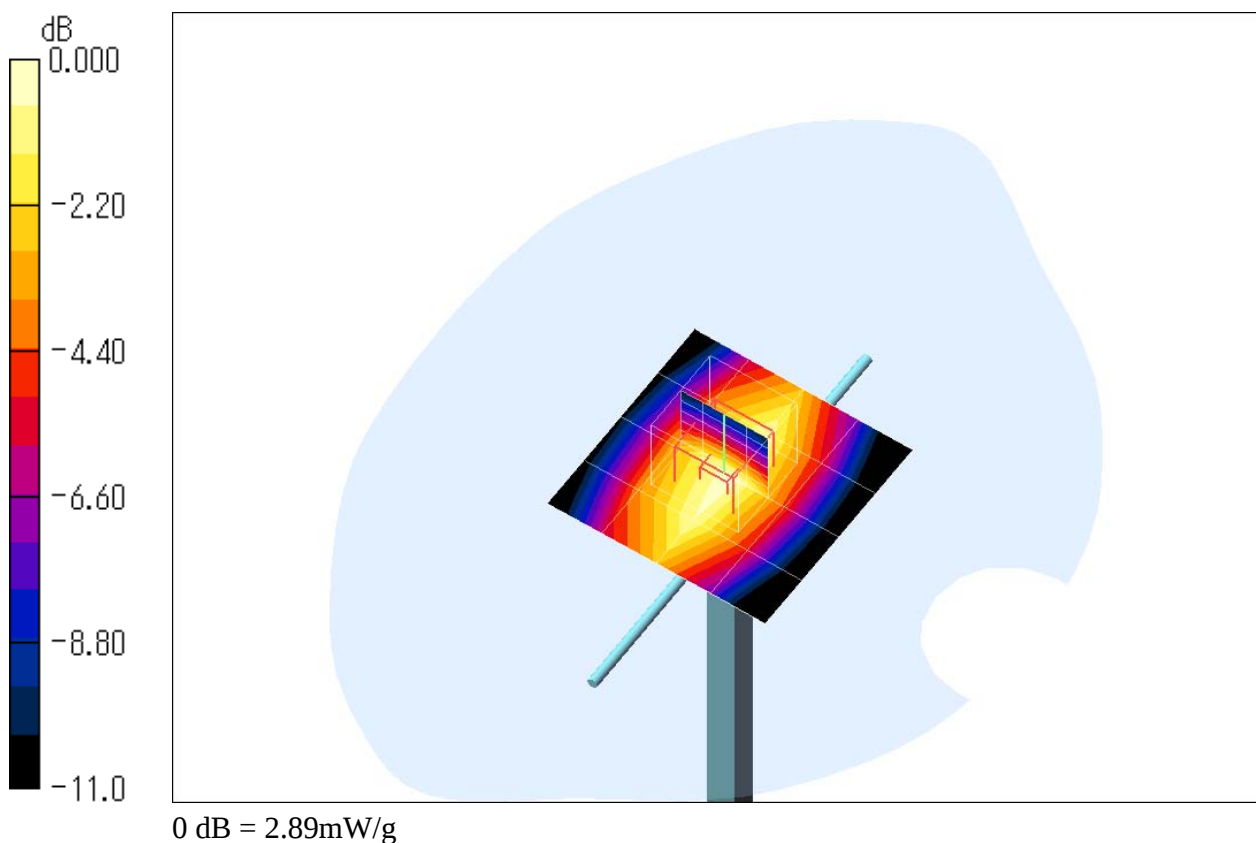

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

System Validation (Body 900 MHz)**DUT: Dipole 900 MHz; Type: D900V2; Serial: 153**

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: M900 Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.02 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.18, 6.18, 6.18); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn328; Calibrated: 2008/03/06
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna Input Power 250 mW/Area Scan (5x5x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (measured) = 2.96 mW/g


Antenna Input Power 250 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.8 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 3.80 W/kg

SAR(1 g) = 2.75 mW/g; SAR(10 g) = 1.81 mW/g

Maximum value of SAR (measured) = 3.01 mW/g

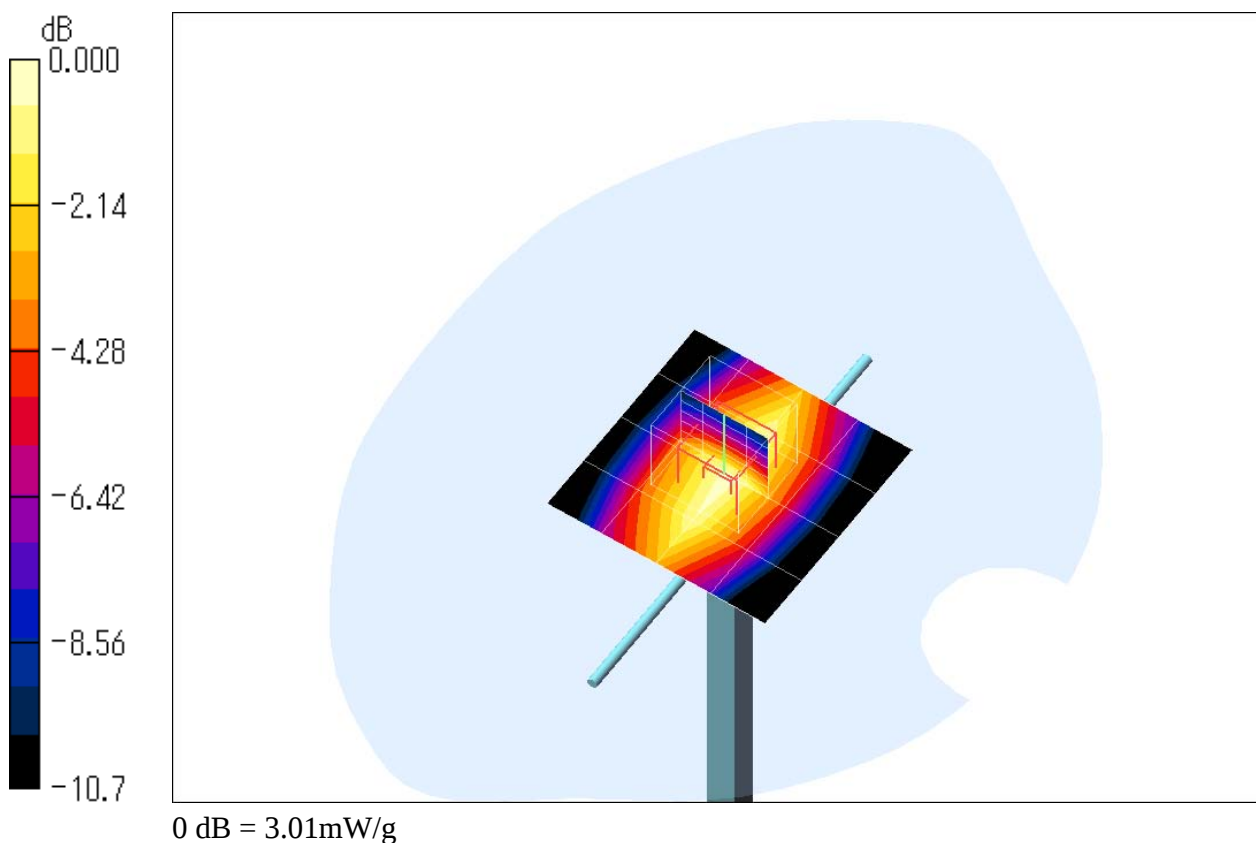

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

System Validation (Head 1800 MHz)**DUT: Dipole 1800 MHz; Type: D1800V2; Serial: 2d056**

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: HSL1800 Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.37 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.36, 5.36, 5.36); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn328; Calibrated: 2008/03/06
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna Input Power 250 mW/Area Scan (5x5x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 10.4 mW/g


Antenna Input Power 250 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 91.1 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 9.37 mW/g; SAR(10 g) = 5.02 mW/g

Maximum value of SAR (measured) = 10.6 mW/g

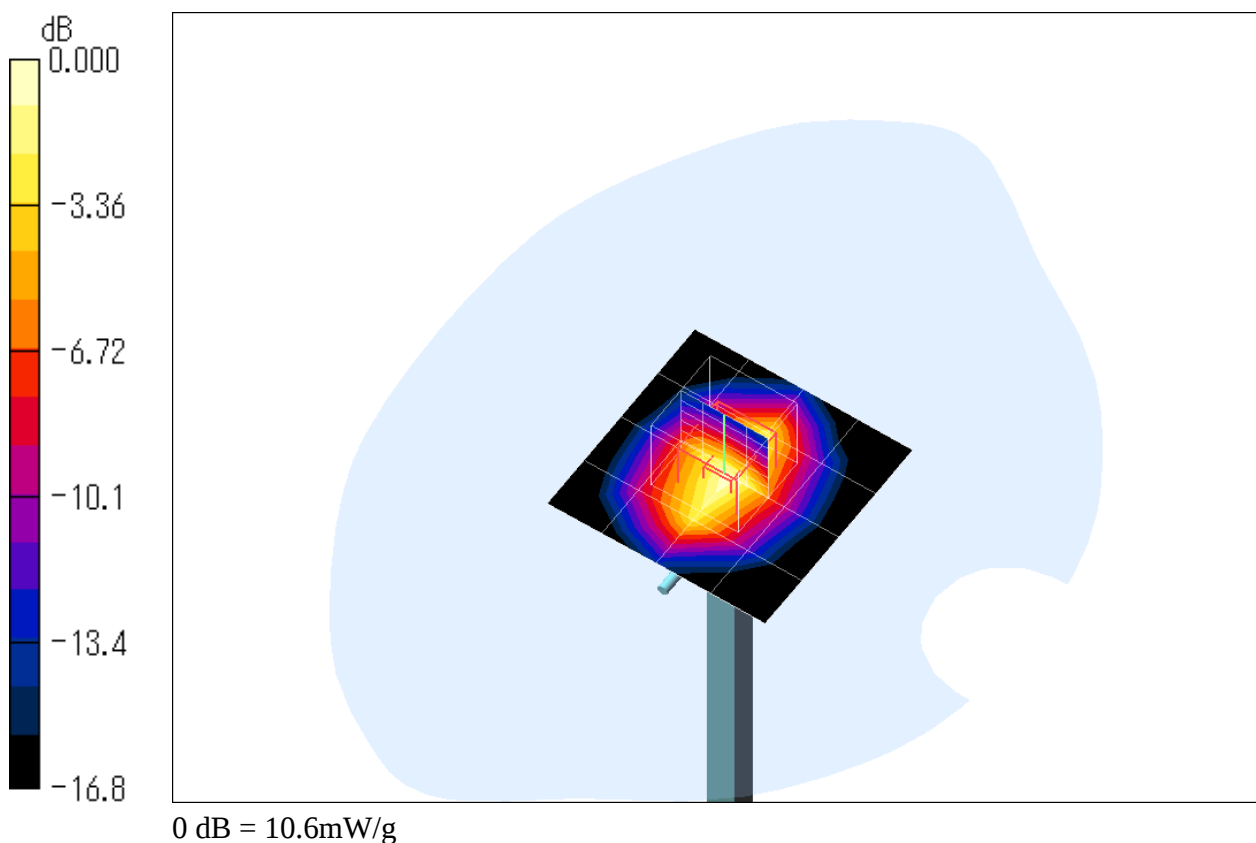

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

System Validation (Body 1800 MHz)**DUT: Dipole 1800 MHz; Type: D1800V2; Serial: 2d056**

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: M1800 Medium parameters used: $f = 1800$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(4.8, 4.8, 4.8); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn328; Calibrated: 2008/03/06
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna Input Power 250 mW/Area Scan (5x5x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 10.4 mW/g

Antenna Input Power 250 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 88.1 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 15.0 W/kg

SAR(1 g) = 9.26 mW/g; SAR(10 g) = 5.05 mW/g