



Attachment 1 – System Validation Plots

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

System Validation (Head 900 MHz)**DUT: Dipole 900 MHz; Type: D900V2; Serial: 165**

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: HSL900 Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.957 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1700; ConvF(6.27, 6.27, 6.27); Calibrated: 2008/10/21
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna Input Power 250 mW/Area Scan (5x5x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (measured) = 2.96 mW/g


Antenna Input Power 250 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 58.7 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 3.81 W/kg

SAR(1 g) = 2.72 mW/g; SAR(10 g) = 1.78 mW/g

Maximum value of SAR (measured) = 2.97 mW/g

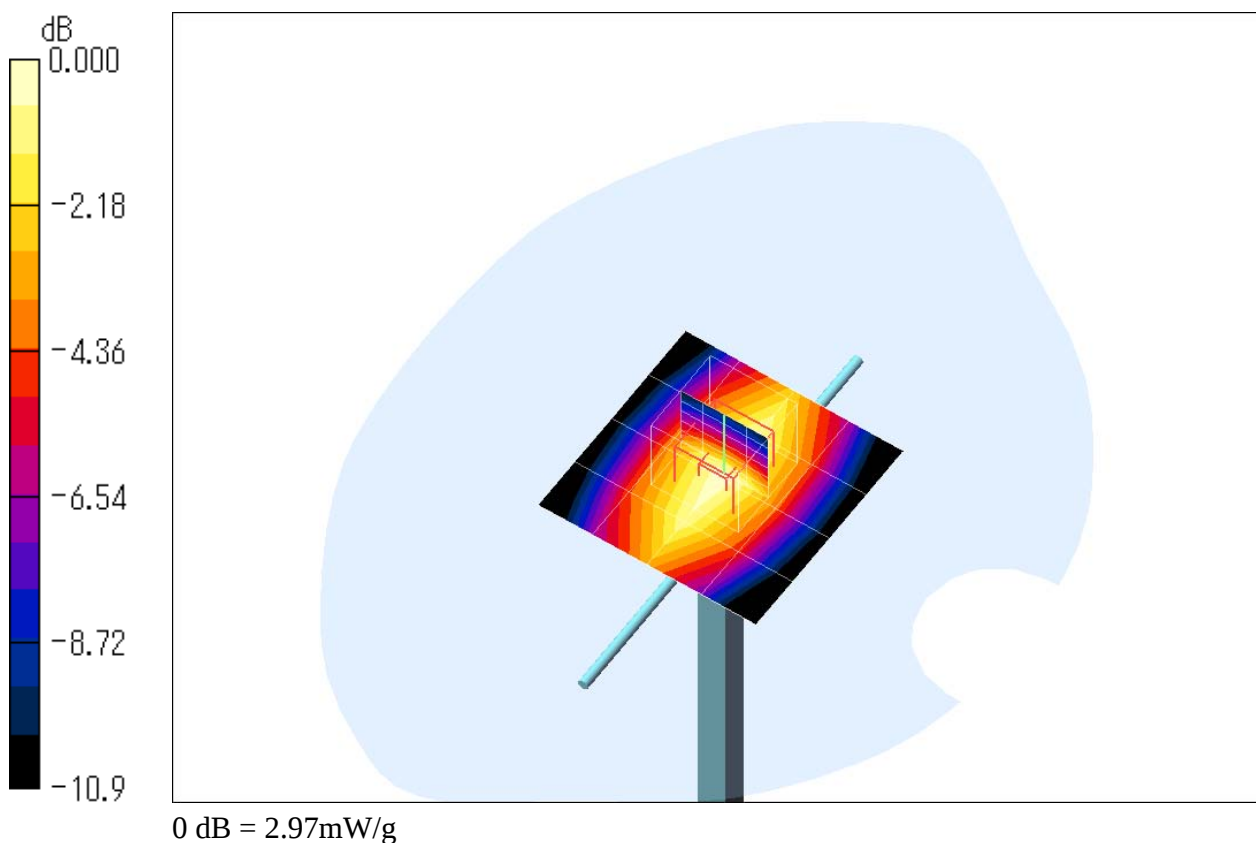

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

System Validation (Body 900 MHz)**DUT: Dipole 900 MHz; Type: D900V2; Serial: 165**

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: M900 Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.03 \text{ mho/m}$; $\epsilon_r = 53.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1700; ConvF(6.05, 6.05, 6.05); Calibrated: 2008/10/21
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna Input Power 250 mW/Area Scan (5x5x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (measured) = 2.97 mW/g


Antenna Input Power 250 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.8 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 3.57 W/kg

SAR(1 g) = 2.69 mW/g; SAR(10 g) = 1.79 mW/g

Maximum value of SAR (measured) = 2.92 mW/g

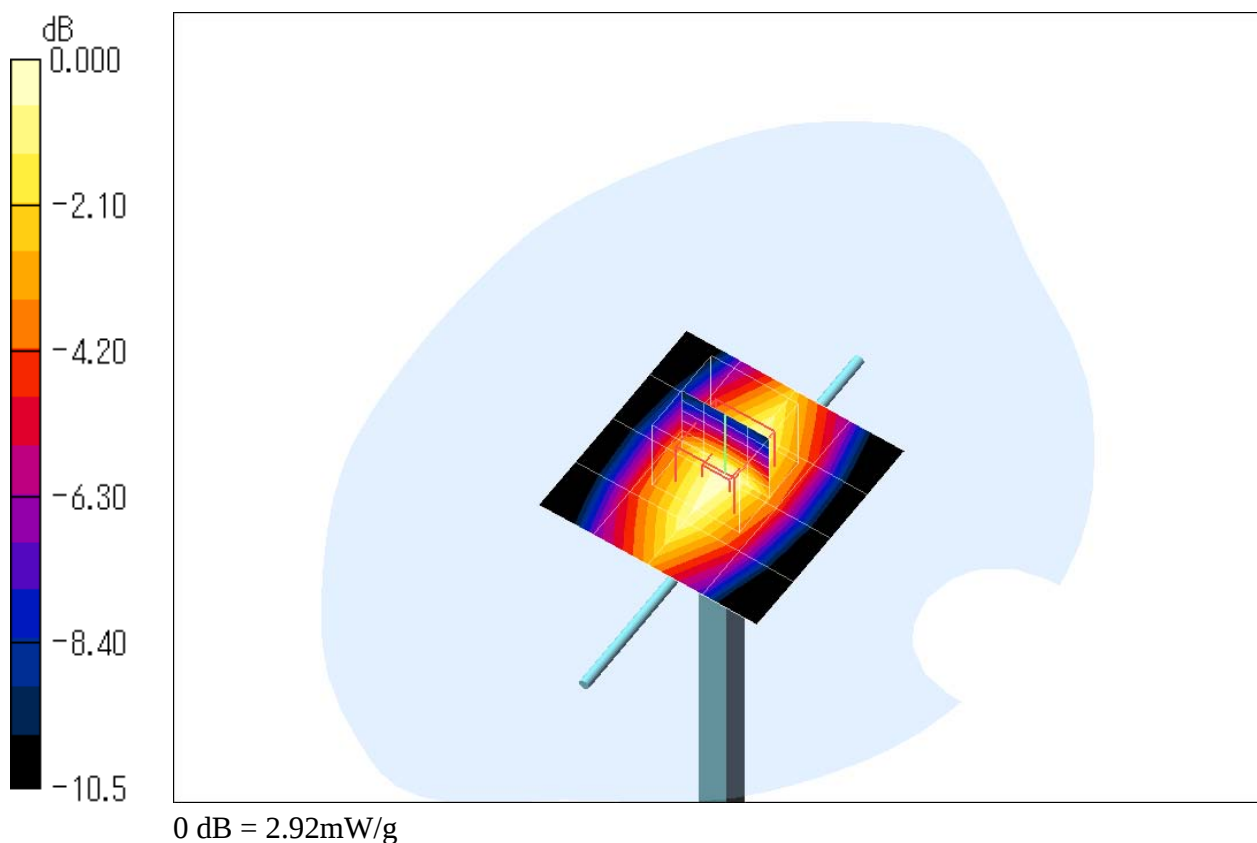

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

System Validation (Head 1800 MHz)**DUT: Dipole 1800 MHz; Type: D1800V2; Serial: 2d038**

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: HSL1800 Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 39.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1700; ConvF(5.22, 5.22, 5.22); Calibrated: 2008/10/21
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna Input Power 250 mW/Area Scan (5x5x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 10.3 mW/g


Antenna Input Power 250 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 90.9 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 15.8 W/kg

SAR(1 g) = 9.3 mW/g; SAR(10 g) = 5.01 mW/g

Maximum value of SAR (measured) = 10.5 mW/g

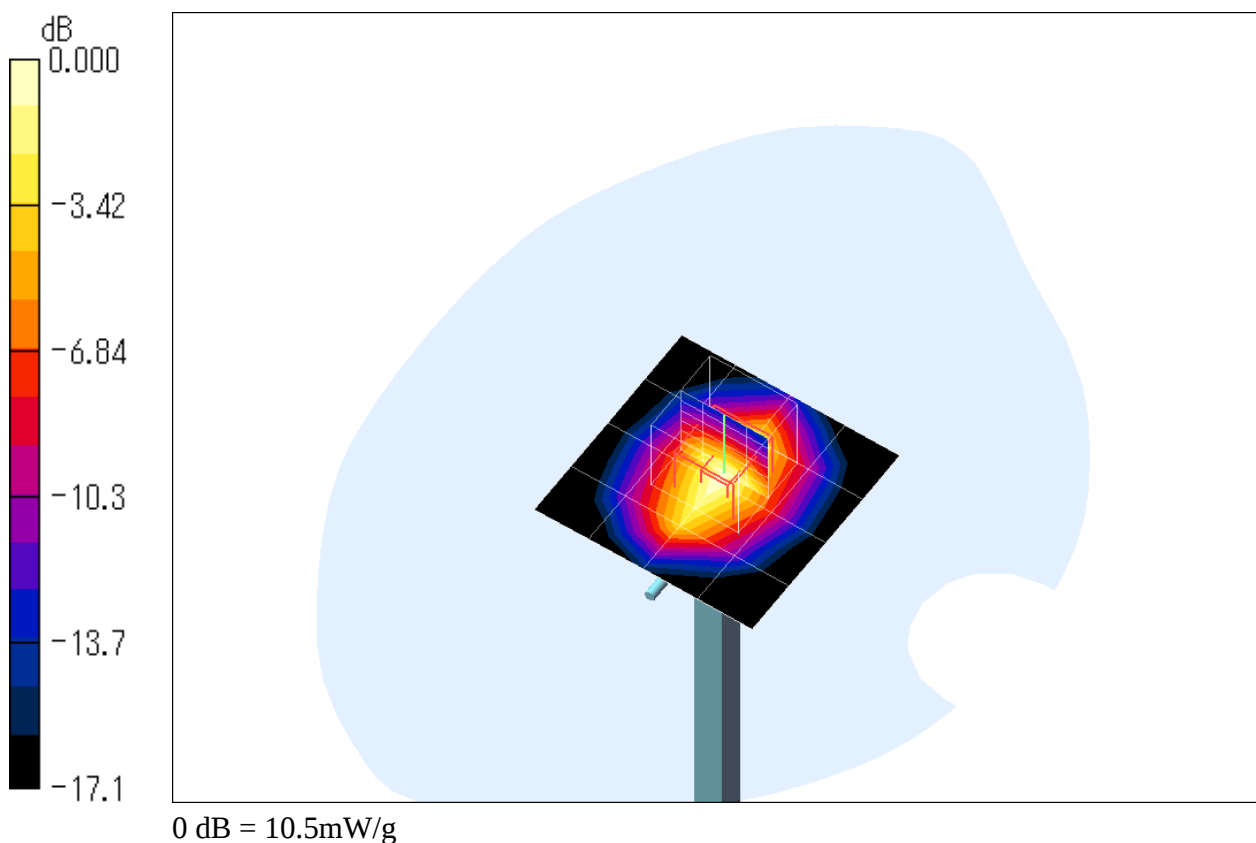

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

System Validation (Body 1800 MHz)**DUT: Dipole 1800 MHz; Type: D1800V2; Serial: 2d038**

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: M1800 Medium parameters used: $f = 1800$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1700; ConvF(4.67, 4.67, 4.67); Calibrated: 2008/10/21
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna Input Power 250 mW/Area Scan (5x5x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 10.8 mW/g

Antenna Input Power 250 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 90.7 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 9.66 mW/g; SAR(10 g) = 5.19 mW/g