

## TEST REPORT

**APPLICANT** : Sharp Corporation, Communication Systems Group  
**ADDRESS** : 2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,  
739-0192, JAPAN

**PRODUCTS** : Cellular Phone

**MODEL NO.** : SH80F  
**SERIAL NO.** : 004401113527226  
004401113527184

**FCC ID** : APYHRO00156

**TEST STANDARD** : CFR 47 FCC Rules and Regulations Part 15

**TESTING LOCATION** : Japan Quality Assurance Organization  
KITA-KANSAI Testing Center  
1-7-7, Ishimaru, Minoh-shi, Osaka 562-0027, Japan

**TEST RESULTS** : **Passed**

**DATE OF TEST** : July 15, 2011 ~ August 17, 2011



A handwritten signature in black ink, appearing to read 'K. Shibata', written over a horizontal line.

Kousei Shibata  
Manager  
Japan Quality Assurance Organization  
KITA-KANSAI Testing Center  
Testing Dept. SAITO EMC Branch  
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.
- The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
- The test results presented in this report relate only to the offered test sample.
- The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
- This test report shall not be reproduced except in full without the written approval of JQA.
- VLAC does not approve, certify or warrant the product by this test report.

**TABLE OF CONTENTS****Page**

<b>Documentation .....</b>	<b>3</b>
1 Test Regulation.....	3
2 Test Location.....	3
3 Recognition of Test Laboratory.....	3
4 Description of the Equipment Under Test.....	4
5 Test Condition.....	5
6 Preliminary Test and Test Setup.....	7
7 Equipment Under Test Modification.....	13
8 Responsible Party.....	13
9 Deviation from Standard.....	13
10 Test Results.....	14
11 Summary.....	17
12 Operating Condition.....	18
13 Test Configuration.....	18
14 Equipment Under Test Arrangement (Drawings) .....	19
<b>Appendix A: Test Data .....</b>	<b>20</b>
<b>Appendix B: Test Arrangement (Photographs).....</b>	<b>90</b>
<b>Appendix C: Test Instruments.....</b>	<b>92</b>

**DEFINITIONS FOR ABBREVIATION AND SYMBOLS USED IN THIS TEST REPORT****EUT** : Equipment Under Test**AE** : Associated Equipment**N/A** : Not Applicable**N/T** : Not Tested**EMC** : Electromagnetic Compatibility**EMI** : Electromagnetic Interference**EMS** : Electromagnetic Susceptibility - indicates that the listed condition, standard or equipment is applicable for this report. - indicates that the listed condition, standard or equipment is not applicable for this report.

**Documentation****1 Test Regulation**

Applied Standard : CFR 47 FCC Rules and Regulations Part 15  
Subpart C – Intentional Radiators

Test Requirements : §15.247, §15.207 and §15.209

Test Procedure : ANSI C63.4–2003

The tests were performed with reference to the FCC Public Notice DA 00-705, released March 30, 2000.  
The test set-up was made in accordance to the general provisions of ANSI C63.4-2003.

**2 Test Location**

Japan Quality Assurance Organization (JQA)  
KITA-KANSAI Testing Center Testing Department SAITO EMC Branch  
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan  
MINOH Test Site (KITA-KANSAI Testing Center)  
7-7, Ishimaru, 1-chome, Minoh-shi, Osaka, 562-0027, Japan  
KAMEOKA EMC Branch  
9-1, Ozaki, Inukanno, Nishibetsuin-cho, Kameoka-shi, Kyoto, 621-0126, Japan

**3 Recognition of Test Laboratory**

JQA KITA-KANSAI Testing Center Testing Dept. SAITO EMC Branch is accredited under ISO/IEC 17025 by following accreditation bodies and the test facility of Testing Division is registered by the following bodies.

VLAC Code : VLAC-001-2 (Effective through : March 30, 2012)

BSMI Recognition No. : SL2-IS-E-6006, SL2-IN-E-6006, SL2-AI-E-6006  
(Effective through : September 14, 2013)

IC Registration No. : 2079E-2 (Effective through : January 25, 2014)  
2079E-3, 2079E-4 (Effective through : July 20, 2014)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.  
(Effective through : February 22, 2012)

## 4 Description of the Equipment Under Test

### 4.1 General Information

1. Manufacturer : Sharp Corporation, Communication Systems Group  
2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,  
739-0192, JAPAN
2. Products : Cellular Phone
3. Model No. : SH80F
4. Serial No. : 004401113527226  
: 004401113527184
5. Product Type : Pre-production
6. Date of Manufacture : June, 2011
7. Transmitting Frequency : 2412.0 MHz(01CH) –2462.0MHz(11CH)
8. Receiving Frequency : 2412.0 MHz(01CH) –2462.0MHz(11CH)
9. Max. RF Output Power : 18.38dBm(Measure Value of IEEE802.11b)  
: 22.07dBm(Measure Value of IEEE802.11g)  
: 21.65dBm(Measure Value of IEEE802.11n)
10. Power Rating : 4.0VDC (Lithium-ion Battery Pack SH30 1240mAh)
11. EUT Grounding : None
12. EUT Authorization : Certification
13. Receive Date of EUT : July 12, 2011

### 4.2 Channel Plan

The carrier spacing is 5 MHz.

The carrier frequency is designated by the absolute frequency channel number (ARFCN).

The carrier frequency is expressed in the equation shown as follows:

$$\text{Transmitting Frequency (in MHz)} = 2407.0 + 5*n$$

$$\text{Receiving Frequency (in MHz)} = 2407.0 + 5*n$$

where, n : channel number ( $1 \leq n \leq 11$ )

## 5 Test Condition

### 5.1 Channel Separation

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Test site : SAITO	<input type="checkbox"/> - Shielded room (S1)	<input type="checkbox"/> - Shielded room (S2)
	<input type="checkbox"/> - Shielded room (S3)	<input type="checkbox"/> - Shielded room (S4)
MINOH	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - 2nd shielded room
KAMEOKA	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - Conducted emission facility

Test instruments : Refer to Appendix C.

### 5.2 Minimum Hopping Channel

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Test site : SAITO	<input type="checkbox"/> - Shielded room (S1)	<input type="checkbox"/> - Shielded room (S2)
	<input type="checkbox"/> - Shielded room (S3)	<input type="checkbox"/> - Shielded room (S4)
MINOH	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - 2nd shielded room
KAMEOKA	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - Conducted emission facility

Test instruments : Refer to Appendix C.

### 5.3 Occupied Bandwidth

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Test site : SAITO	<input type="checkbox"/> - Shielded room (S1)	<input type="checkbox"/> - Shielded room (S2)
	<input checked="" type="checkbox"/> - Shielded room (S3)	<input type="checkbox"/> - Shielded room (S4)
MINOH	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - 2nd shielded room
KAMEOKA	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - Conducted emission facility

Test instruments : Refer to Appendix C.

### 5.4 Dwell Time

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Test site : SAITO	<input type="checkbox"/> - Shielded room (S1)	<input type="checkbox"/> - Shielded room (S2)
	<input type="checkbox"/> - Shielded room (S3)	<input type="checkbox"/> - Shielded room (S4)
MINOH	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - 2nd shielded room
KAMEOKA	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - Conducted emission facility

Test instruments : Refer to Appendix C.

**5.5 Peak Output Power and Density (Conduction)**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Test site :	SAITO	<input type="checkbox"/> - Shielded room (S1)	<input type="checkbox"/> - Shielded room (S2)
		<input checked="" type="checkbox"/> - Shielded room (S3)	<input type="checkbox"/> - Shielded room (S4)
	MINOH	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - 2nd shielded room
	KAMEOKA	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - Conducted emission facility

Test instruments : Refer to Appendix C.

**5.6 Spurious Emission (Conduction)**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Test site :	SAITO	<input type="checkbox"/> - Shielded room (S1)	<input type="checkbox"/> - Shielded room (S2)
		<input checked="" type="checkbox"/> - Shielded room (S3)	<input type="checkbox"/> - Shielded room (S4)
	MINOH	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - 2nd shielded room
	KAMEOKA	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - Conducted emission facility

Test instruments : Refer to Appendix C.

**5.7 AC Powerline Conducted Emission**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Test site :	SAITO	<input type="checkbox"/> - Anechoic chamber (A1)	<input type="checkbox"/> - Measurement room (M1)
		<input type="checkbox"/> - Measurement room (M2)	<input type="checkbox"/> - Measurement room (M3)
		<input type="checkbox"/> - Shielded room (S1)	<input checked="" type="checkbox"/> - Shielded room (S2)
	MINOH	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - 2nd shielded room
		<input type="checkbox"/> - Anechoic chamber	
	KAMEOKA	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - Conducted emission facility
		<input type="checkbox"/> - 1st open site	

Test instruments : Refer to Appendix C.

**5.8 Field Strength of Spurious Radiation**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Test site :	SAITO	<input type="checkbox"/> - Anechoic chamber (A1)	<input checked="" type="checkbox"/> - Anechoic chamber (A2)
	KAMEOKA	<input type="checkbox"/> - 1st open site	

Test instruments : Refer to Appendix C.

**6 Preliminary Test and Test Setup**

**6.1 Channel Separation**


Not Applicable

**6.2 Minimum Hopping Channel**

Not Applicable

**6.3 Occupied Bandwidth**

The test system is shown as follows:

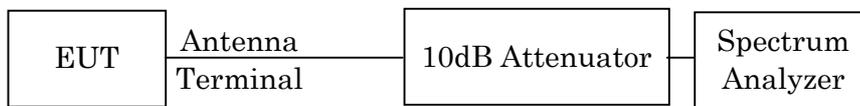

The setting of the spectrum analyzer are shown as follows:


Res. Bandwidth	100 kHz
Video Bandwidth	300 kHz
Span	30 MHz
Sweep Time	AUTO
Trace	Maxhold

**6.4 Dwell Time**


Not Applicable

**6.5 Peak Output Power and Peak Power Density**

The Conducted RF Power Output was measured with a power meter, one 10dB attenuator and a short, low loss cable.

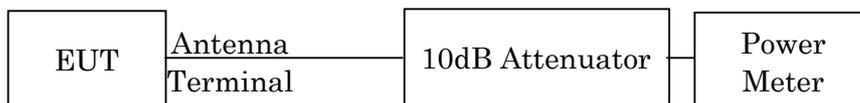

The Peak Power Density was measured with a spectrum analyzer, one 10dB attenuator and a short, low loss cable.

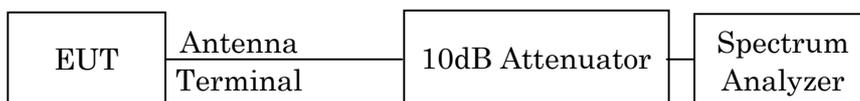

## 6.6 Spurious Emission(Conduction)

The test system is shown as follows:



The setting of the spectrum analyzer are shown as follows:

Frequency Range	30 MHz - 25 GHz	Band-Edge
Res. Bandwidth	100 kHz	100 kHz
Video Bandwidth	300 kHz	300 kHz
Sweep Time	AUTO	AUTO
Trace	Maxhold	Maxhold


## 6.7 AC Powerline Conducted Emission

The preliminary tests were performed using the scan mode of test receiver or spectrum analyzer to observe the emissions characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for final tests.

– Side View –

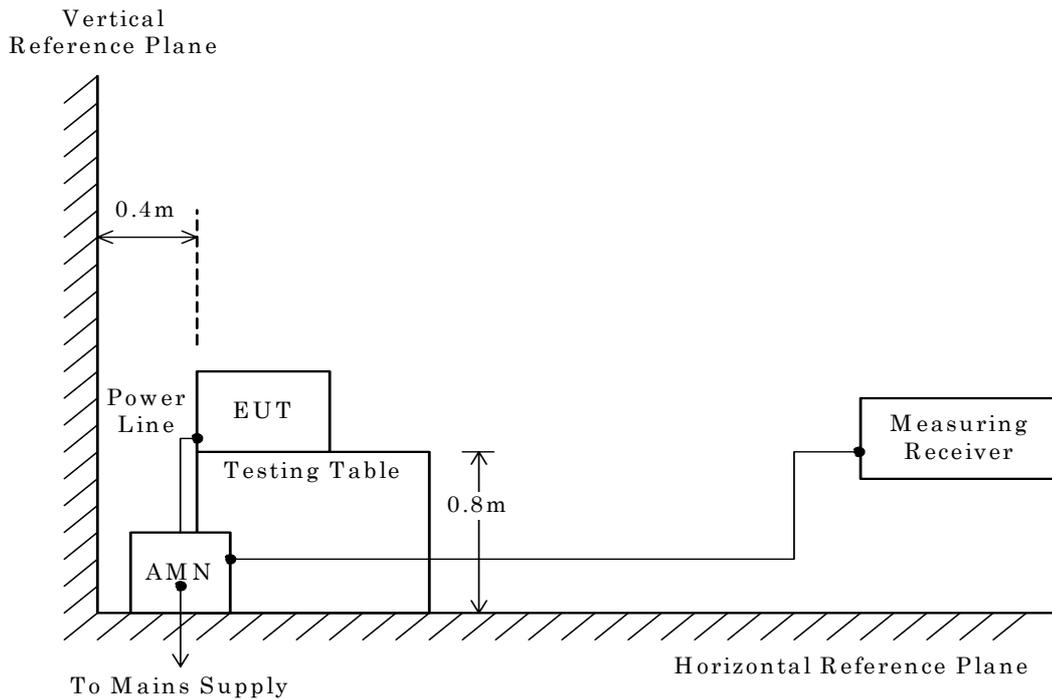

NOTE

AMN : Artificial Mains Network

## 6.8 Field Strength of Spurious Emission

### 6.8.1 Field Strength of Spurious Emission 9 kHz – 30 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –




**6.8.2 Field Strength of Spurious Emission 30 MHz – 1000 MHz**

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

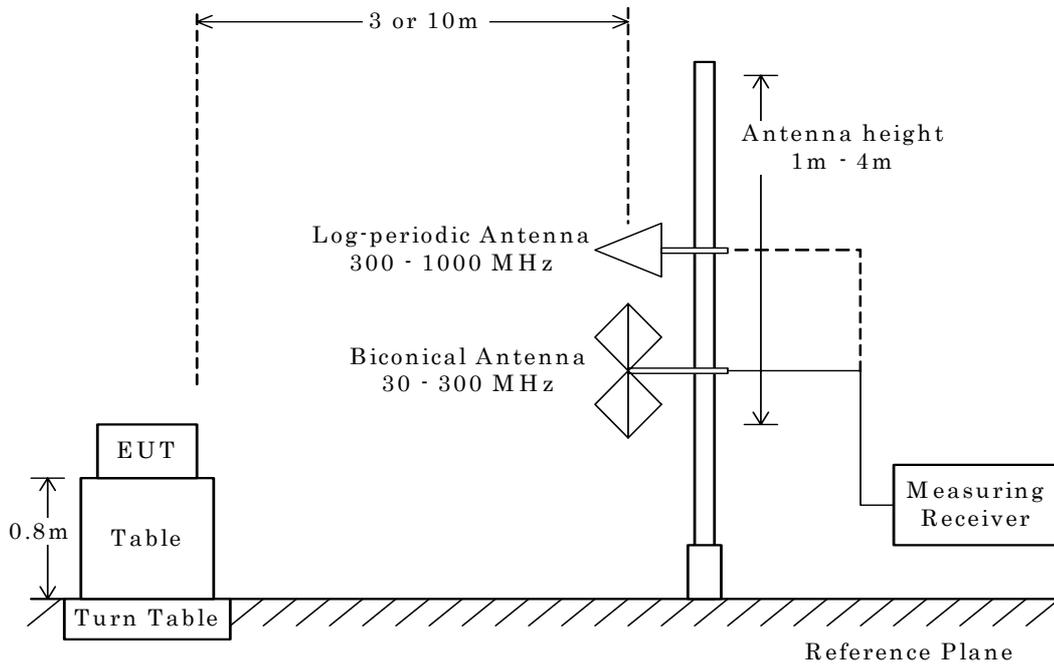


**6.8.3 Field Strength of Spurious Emission above 1 GHz**

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

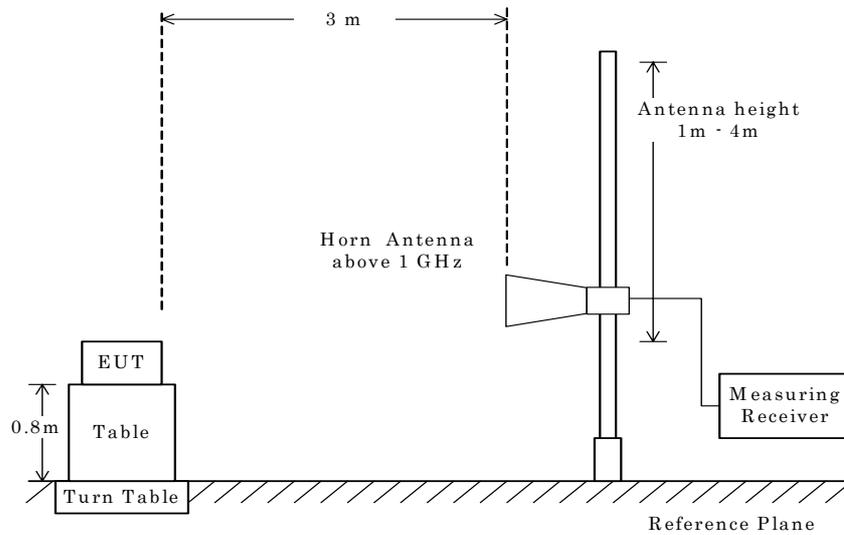

**NOTE**

The antenna height is scanned depending on the EUT's size and mounting height.

**7 Equipment Under Test Modification**

- No modifications were conducted by JQA to achieve compliance to the limitations.  
 - To achieve compliance to the limitations, the following changes were made by JQA during the compliance test.

The modifications will be implemented in all production models of this equipment.

Applicant : Not Applicable

Date : Not Applicable

Typed Name : Not Applicable

Position : Not Applicable

Signatory : Not Applicable

**8 Responsible Party**Responsible Party of Test Item (Product)

Responsible Party :	
Contact Person :	_____
	Signatory

**9 Deviation from Standard**

- No deviations from the standard described in clause 1.  
 - The following deviations were employed from the standard described in clause 1.
-

**10 Test Results****10.1 RF Power Output (§2.1046)****10.1.1 Channel Separation**

The requirements are  - Applicable [ - Tested.  - Not tested by applicant request.]  
 - Not Applicable

- Passed  - Failed  - Not judged

Channel Separation is \_\_\_\_\_ MHz  
 Channel Separation(Inquiry) is \_\_\_\_\_ MHz

Uncertainty of Measurement Results +/-0.9 %(2 $\sigma$ )

Remarks : \_\_\_\_\_

**10.1.2 Minimum Hopping Channel**

The requirements are  - Applicable [ - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Number of Channel is \_\_\_\_\_  
 Number of Channel (Inquiry) is \_\_\_\_\_

Remarks : \_\_\_\_\_

**10.1.3 Occupied Bandwidth**

The requirements are  - Applicable [ - Tested.  - Not tested by applicant request.]  
 - Not Applicable

- Passed  - Failed  - Not judged

The 99% Bandwidth of IEEE802.11b is 12.640 MHz at 2462.0 MHz  
 The 99% Bandwidth of IEEE802.11g is 16.307 MHz at 2462.0 MHz  
 The 99% Bandwidth of IEEE802.11n is 17.548 MHz at 2412.0 MHz

The 6dB Bandwidth of IEEE802.11b is 8.355 MHz at 2412.0 MHz  
 The 6dB Bandwidth of IEEE802.11g is 15.134 MHz at 2412.0 MHz  
 The 6dB Bandwidth of IEEE802.11n is 15.415 MHz at 2412.0 MHz

Uncertainty of Measurement Results +/-0.9 %(2 $\sigma$ )

Remarks : \_\_\_\_\_

**10.1.4 Dwell Time**

The requirements are  - Applicable [ - Tested.  - Not tested by applicant request.]  
 - Not Applicable

- Passed  - Failed  - Not judged

Dwell Time is \_\_\_\_\_ msec

Dwell Time (Inquiry) is \_\_\_\_\_ msec

Uncertainty of Measurement Results +/-0.6 %(2 $\sigma$ )

Remarks : \_\_\_\_\_

**10.1.5 Peak Output Power(Conduction)**

The requirements are  - Applicable [ - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Peak Output Power of IEEE802.11b is 18.38 dBm at 2462.0 MHz

Peak Output Power of IEEE802.11g is 22.07 dBm at 2462.0 MHz

Peak Output Power of IEEE802.11n is 21.65 dBm at 2462.0 MHz

Uncertainty of Measurement Results at Amplitude +/-1.2 dB(2 $\sigma$ )

Remarks : \_\_\_\_\_

**10.1.6 Peak Power Density(Conduction)**

The requirements are  - Applicable [ - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Peak Power Density of IEEE802.11b is -5.31 dBm at 2412.0 MHz

Peak Power Density of IEEE802.11g is -11.10 dBm at 2462.0 MHz

Peak Power Density of IEEE802.11n is -11.15 dBm at 2462.0 MHz

Uncertainty of Measurement Results at Amplitude +/-0.8 dB(2 $\sigma$ )

Remarks : \_\_\_\_\_

**10.2 Spurious Emissions(Conduction)**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

- Passed  - Failed  - Not judged

Uncertainty of Measurement Results	9 kHz – 1GHz	<u>+/-1.0</u>	dB(2 $\sigma$ )
	1GHz – 18GHz	<u>+/-1.2</u>	dB(2 $\sigma$ )
	18GHz – 40GHz	<u>+/-1.6</u>	dB(2 $\sigma$ )

Remarks : \_\_\_\_\_

**10.3 AC Powerline Conducted Emission**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

- Passed  - Failed  - Not judged

Min. Limit Margin (Quasi-Peak) 22.0 dB at 0.67 MHz

Max. Limit Exceeding (Quasi-Peak) \_\_\_\_\_ dB at \_\_\_\_\_ MHz

Uncertainty of Measurement Results +/-2.5 dB(2 $\sigma$ )

Remarks : \_\_\_\_\_

**10.4 Field Strength of Spurious Emission**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

- Passed  - Failed  - Not judged

Min. Limit Margin (Average) >4.3 dB at 22158.0 MHz

Max. Limit Exceeding (Average) \_\_\_\_\_ dB at \_\_\_\_\_ MHz

Uncertainty of Measurement Results	9 kHz – 30 MHz	<u>+/-1.7</u>	dB(2 $\sigma$ )
	30 MHz – 300 MHz	<u>+/-4.3</u>	dB(2 $\sigma$ )
	300 MHz – 1000 MHz	<u>+/-4.5</u>	dB(2 $\sigma$ )
	1 GHz – 18 GHz	<u>+/-4.0</u>	dB(2 $\sigma$ )
	18 GHz – 40 GHz	<u>+/-4.7</u>	dB(2 $\sigma$ )

Remarks : \_\_\_\_\_

**11 Summary****General Remarks :**

The EUT was tested according to the requirements of the following standard.

CFR 47 FCC Rules and Regulations Part 15

The test configuration is shown in clause 12 to 14.

The conclusion for the test items of which are required by the applied regulation is indicated under the test results.

Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

**Test Results :**

The "as received" sample;

- fulfill the test requirements of the regulation mentioned on clause 1.
- doesn't fulfill the test requirements of the regulation mentioned on clause 1.

Reviewed by:

Tested by:



---

Shigeru Kinoshita  
Deputy Manager  
JQA KITA-KANSAI Testing Center  
Testing Dept. SAITO EMC Branch



---

Shigeru Osawa  
Deputy Manager  
JQA KITA-KANSAI Testing Center  
Testing Dept. SAITO EMC Branch

## 12 Operating Condition

Transmitting/Receiving

Transmitting frequency : 2412.0 MHz(1CH) – 2462.0 MHz(11CH)

Receiver frequency : 2412.0 MHz(1CH) – 2462.0 MHz(11CH)

Modulation Type

1. 802.11b : DSSS

2. 802.11g : OFDM

3. 802.11n : OFDM

Other Clock Frequency

32.768 kHz, 19.2MHz, 27.12 MHz

## 13 Test Configuration

The equipment under test (EUT) consists of :

	Item	Manufacturer	Model No.	Serial No.	FCC ID
A	Cellular Phone	Sharp	SH80F	0044011135 27226*1) 0044011135 27184*2)	APYHRO00156
B	Lithium-ion Battery	Sharp	SH30	--	N/A
C	AC Charger	Sharp	SHN20(EU)	--	N/A
D	USB Data Cable	Sharp	SHN20(EU)	--	N/A
E	Stereo Handsfree	Sharp	542943	--	N/A

\*1) Used for AC Powerline Conducted Emission and Field Strength of Spurious Emission


\*2) Used for Antenna Conducted Emission

The auxiliary equipment used for testing :

None

Type of Cable:

No.	Description	Identification (Manu. etc.)	Connector Shielded	Cable Shielded	Ferrite Core	Length (m)
1	USB Data Cable	Sharp	YES	YES	NO	0.75
2	Handsfree Cable	--	NO	--	NO	1.5

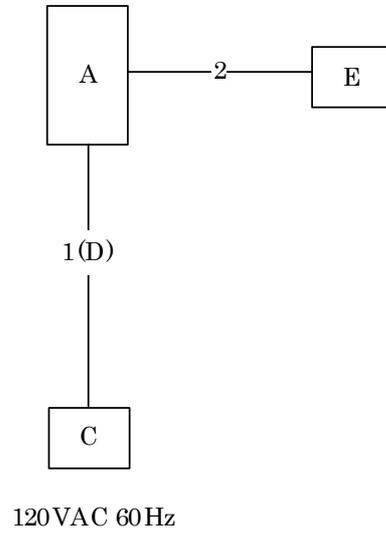**14 Equipment Under Test Arrangement (Drawings)**

**Appendix A: Test Data****A.1 Channel Separation**

Not Applicable

**A.2 Minimum Hopping Channel**

Not Applicable

**A.3 Occupied Bandwidth**

Test Date : July 21, 2011

Temp.:28°C, Humi:65%

The resolution bandwidth was set to about 1% of emission bandwidth, -6dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

## A) IEEE 802.11b

## 1)Data Rate : 1Mbps

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)
01	2412.0	12.590	8.092
06	2437.0	12.634	8.098
11	2462.0	12.636	8.131

## 2)Data Rate : 2Mbps

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)
01	2412.0	12.623	8.050
06	2437.0	12.591	8.092
11	2462.0	12.640	7.979

## 3)Data Rate : 5.5Mbps

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)
01	2412.0	12.533	8.355
06	2437.0	12.515	8.184
11	2462.0	12.515	8.112

## 4)Data Rate : 11Mbps

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)
01	2412.0	12.504	8.124
06	2437.0	12.512	8.020
11	2462.0	12.519	8.099

B) IEEE 802.11g

1) Data Rate : 6Mbps

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)
01	2412.0	16.282	15.107
06	2437.0	16.288	15.080
11	2462.0	16.288	15.131

2) Data Rate : 54Mbps

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)
01	2412.0	16.299	15.134
06	2437.0	16.300	15.132
11	2462.0	16.307	15.126

C) IEEE 802.11n


1) Data Rate : 6.5Mbps

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)
01	2412.0	17.518	15.131
06	2437.0	17.516	15.154
11	2462.0	17.511	15.161


2) Data Rate : 65Mbps

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)
01	2412.0	17.548	15.415
06	2437.0	17.522	15.151
11	2462.0	17.516	15.153


1)Data Rate : 1Mbps(IEEE 802.11b)  
Low Channel

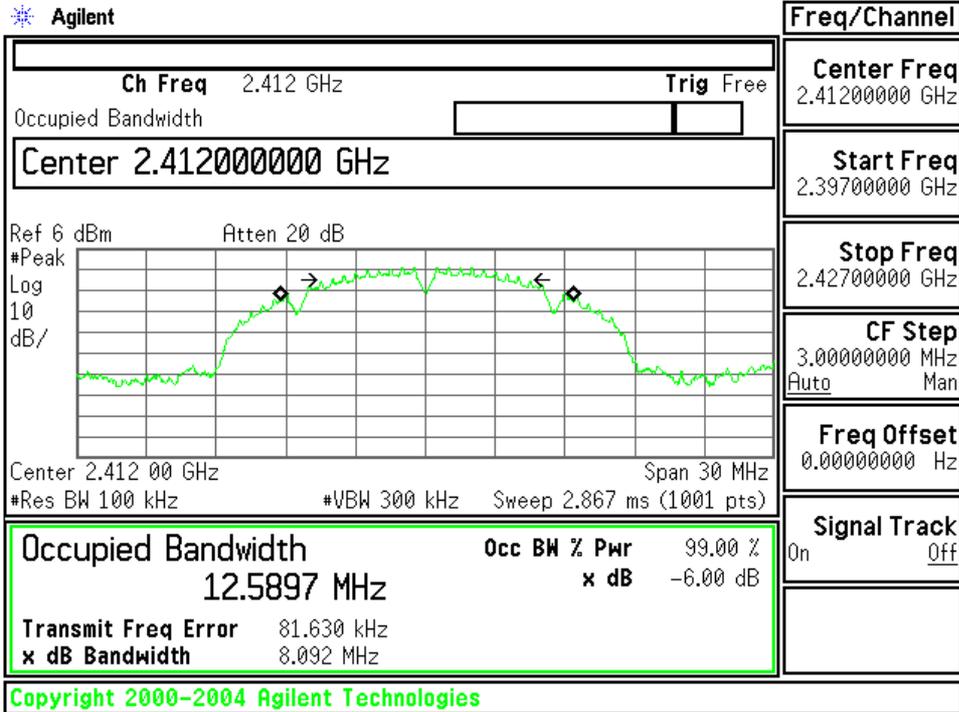

Middle Channel

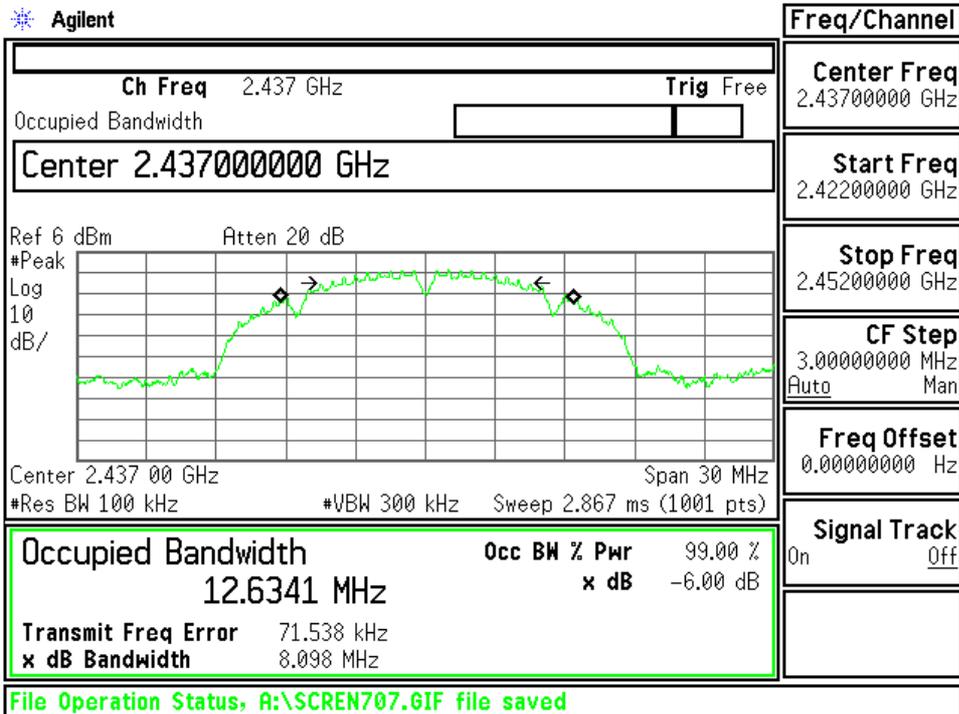


### High Channel

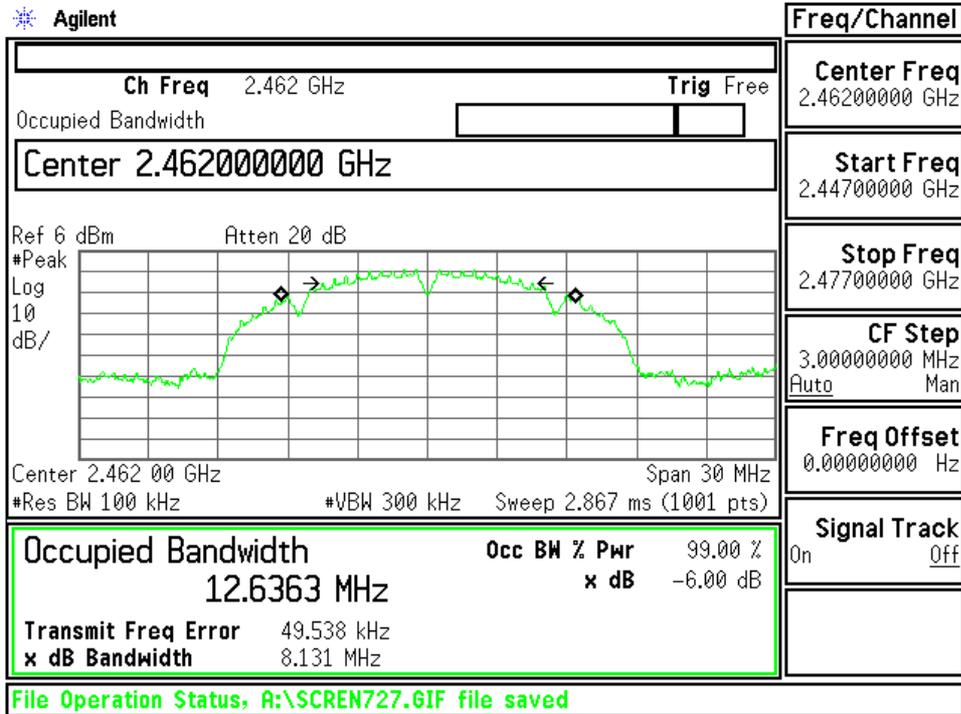


2) Data Rate : 2Mbps(IEEE 802.11b)


### Low Channel

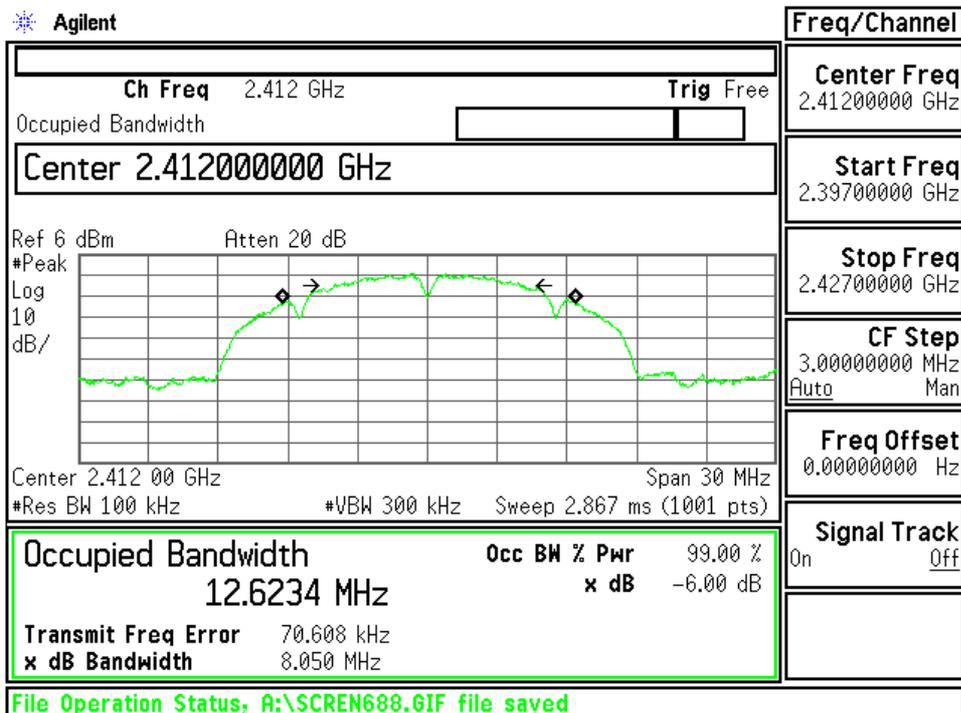


### Middle Channel

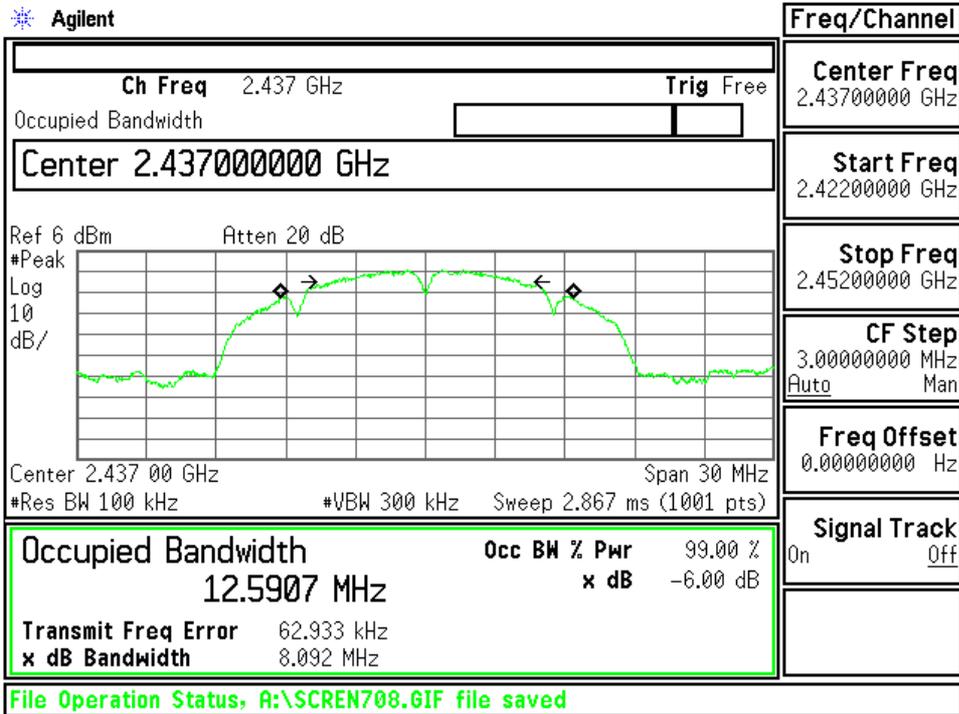


### High Channel

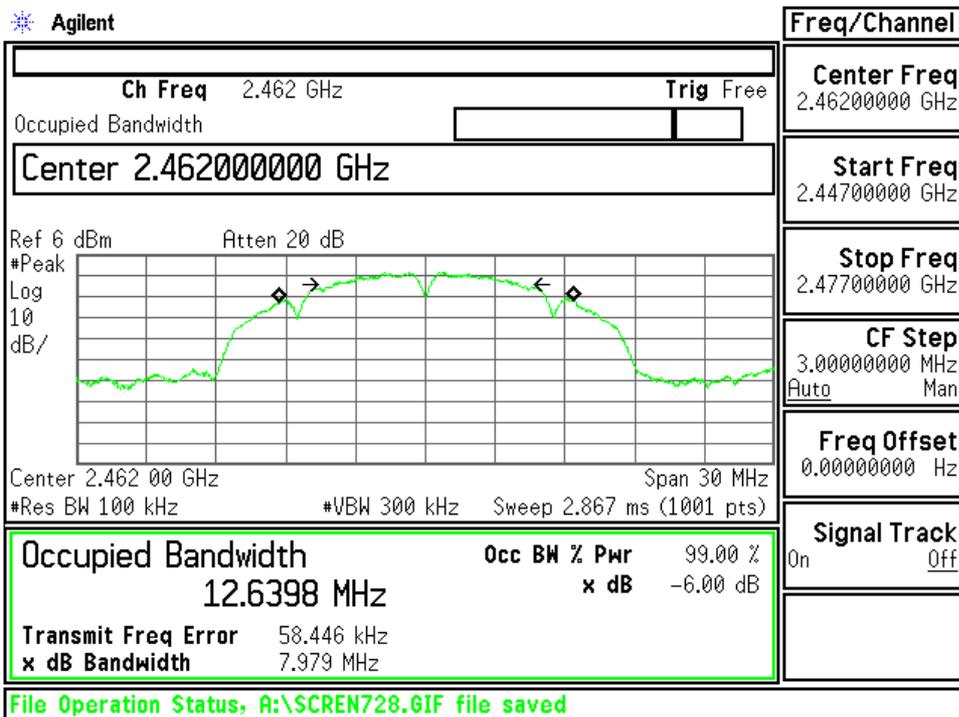


3)Data Rate : 5.5Mbps(IEEE 802.11b)  
Low Channel

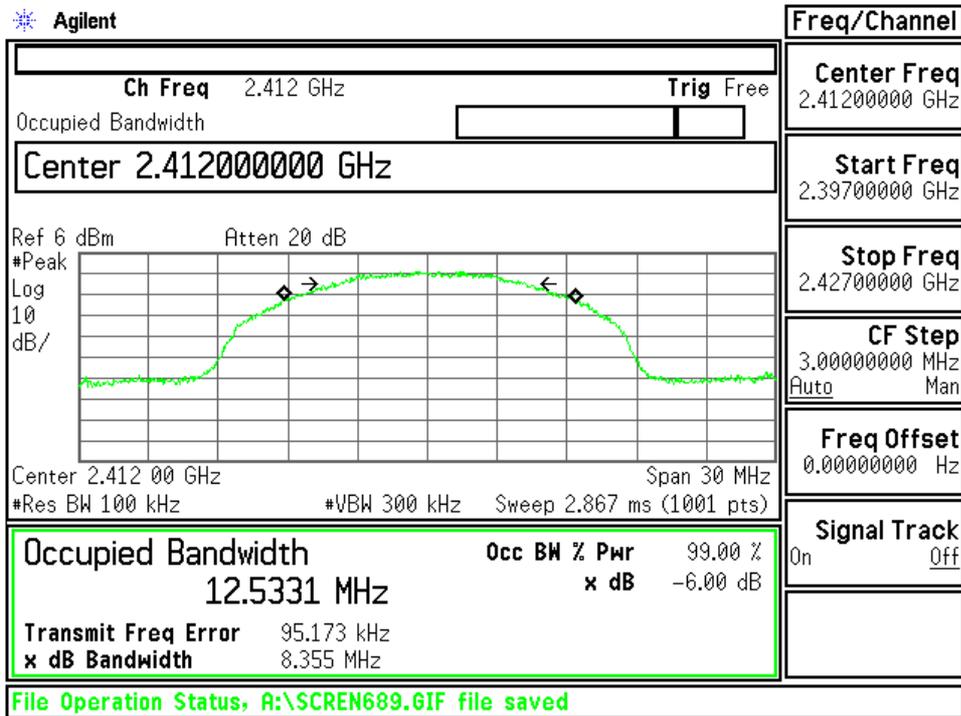

Middle Channel

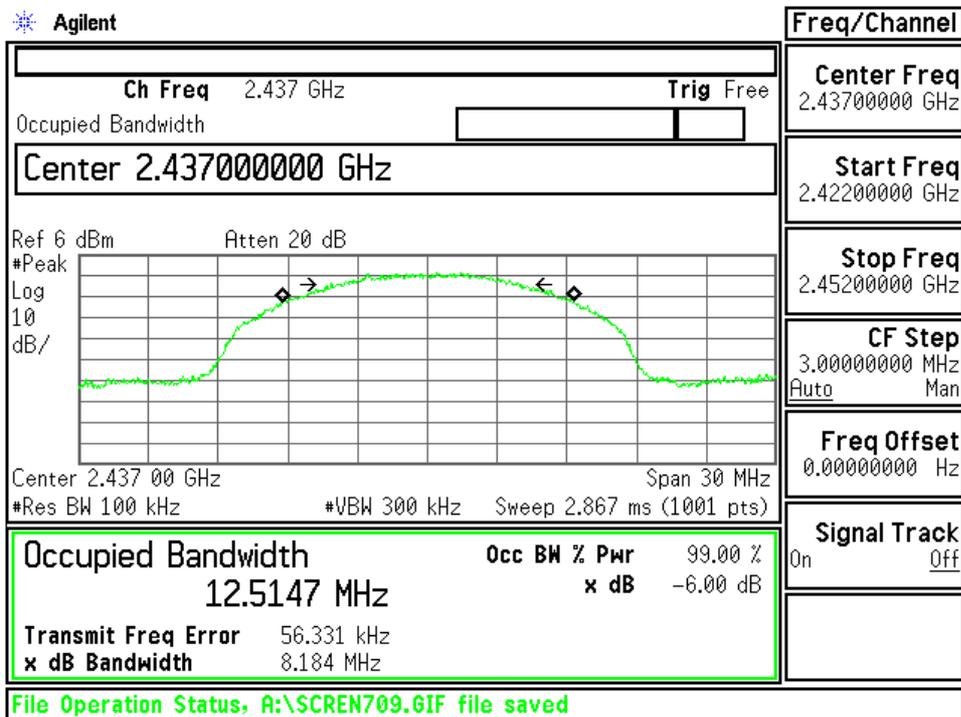


### High Channel

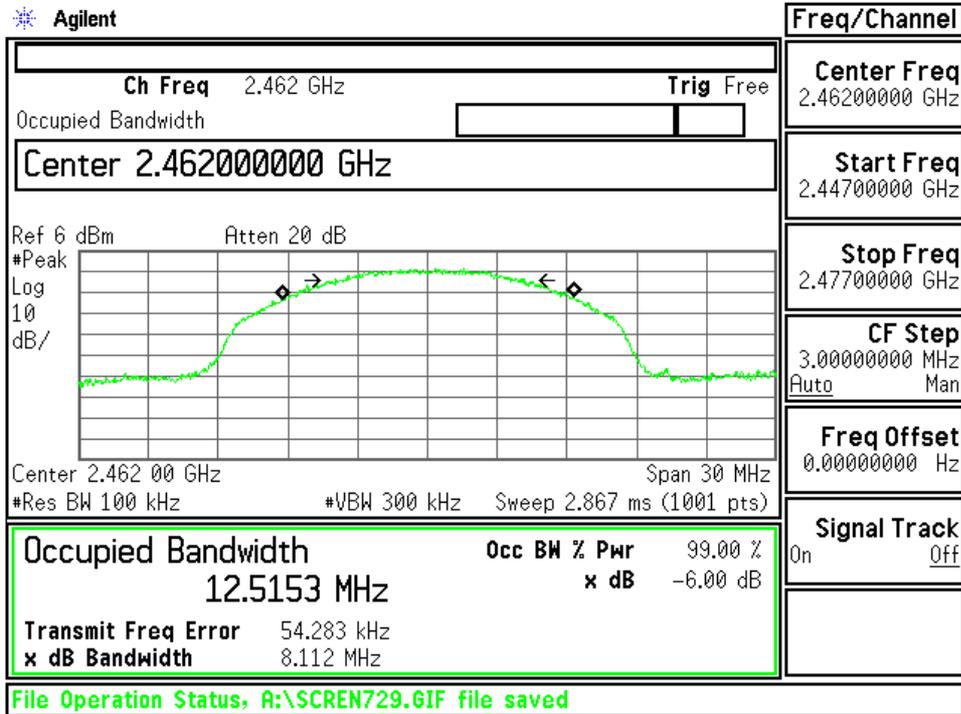


4)Data Rate : 11Mbps(IEEE 802.11b)


### Low Channel

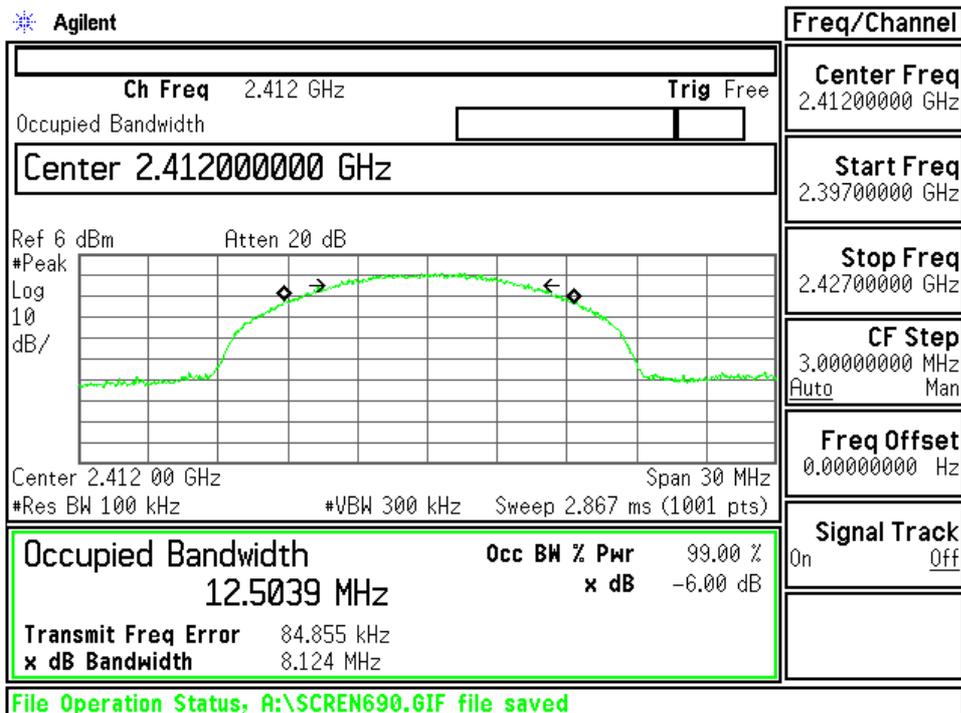


### Middle Channel

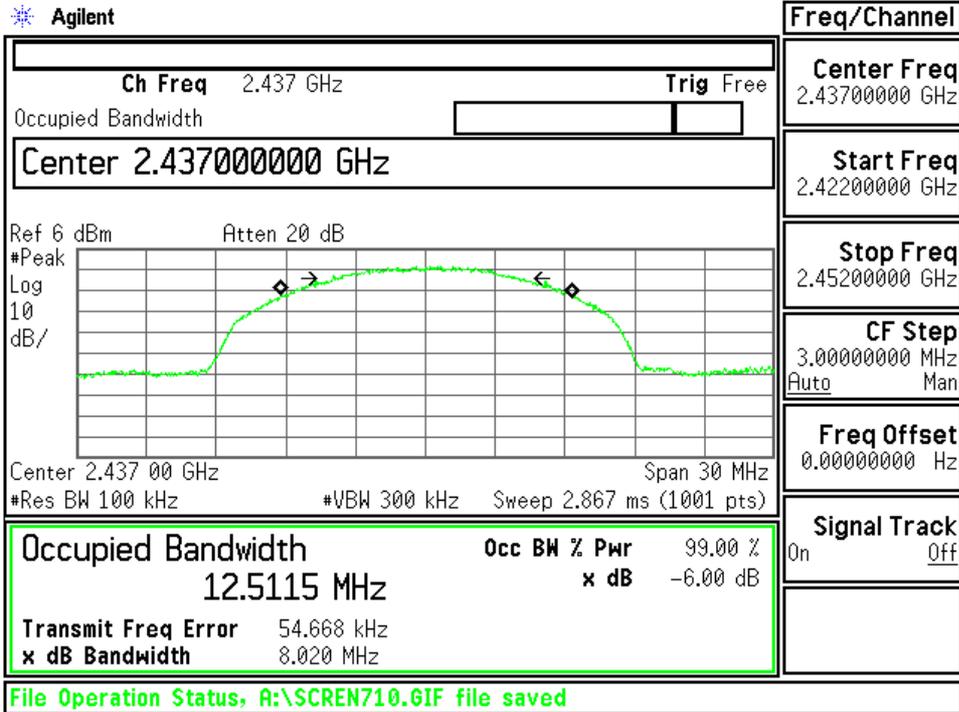


### High Channel

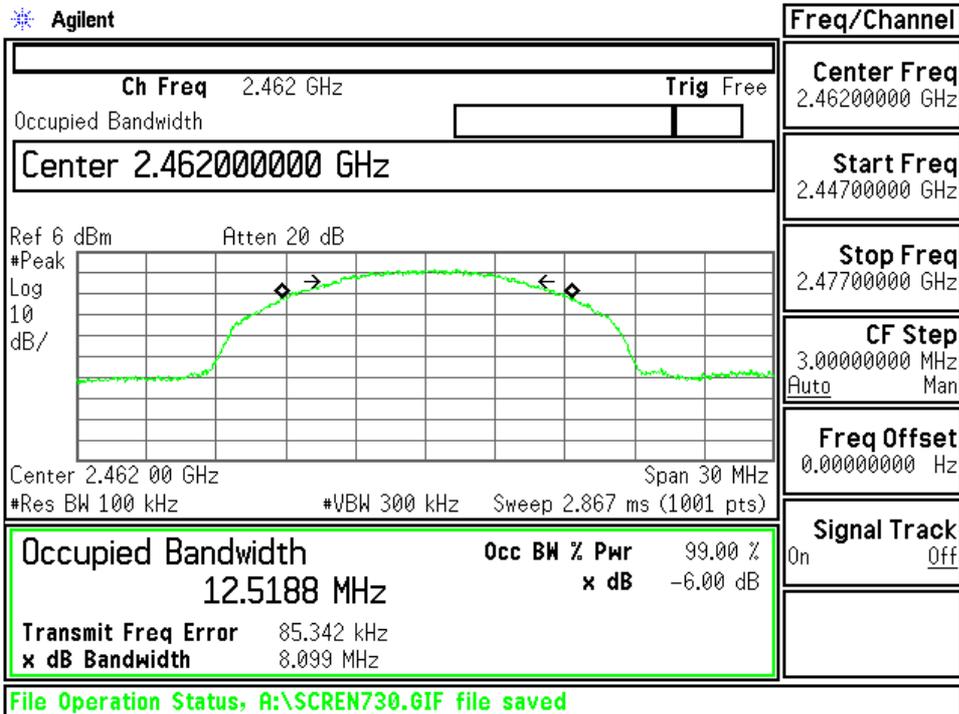


5)Data Rate : 6Mbps(IEEE 802.11g)  
Low Channel

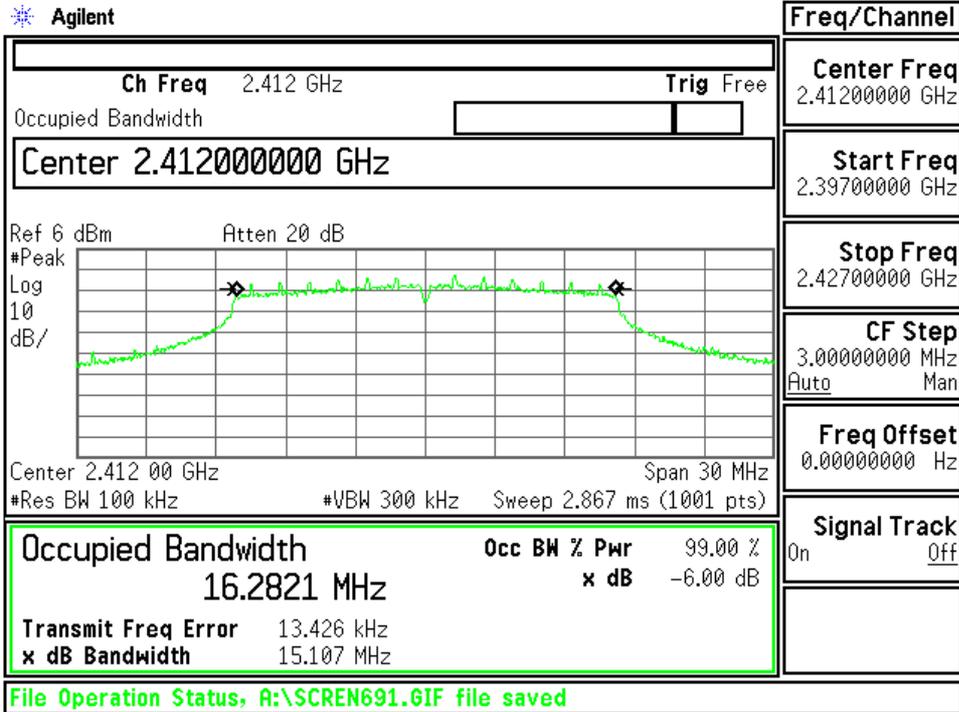

Middle Channel

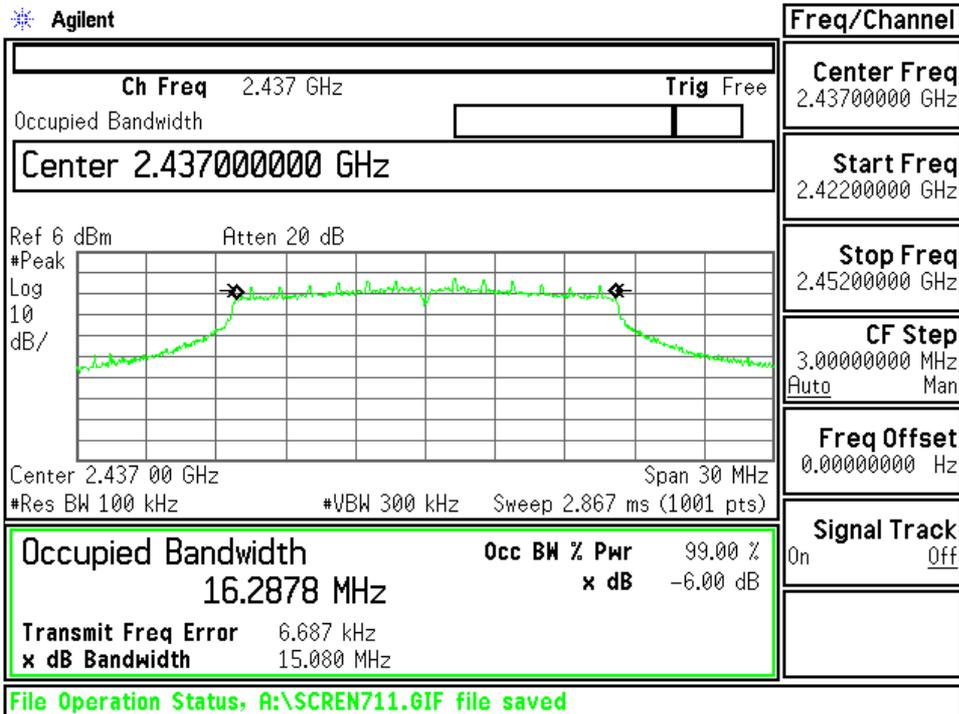


### High Channel

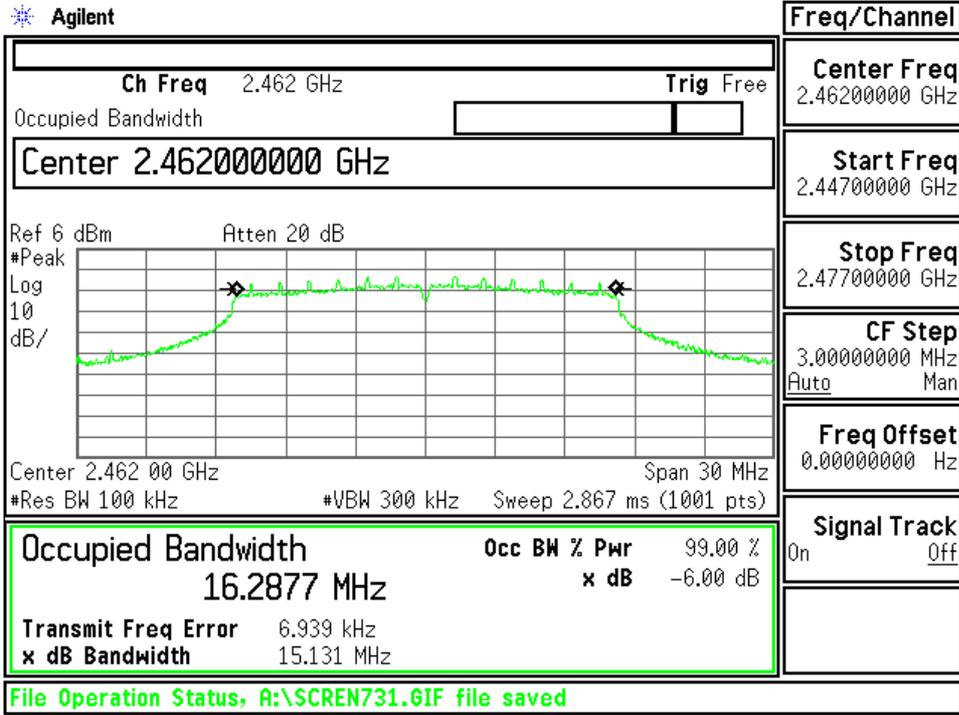


6)Data Rate : 54Mbps(IEEE 802.11g)


### Low Channel

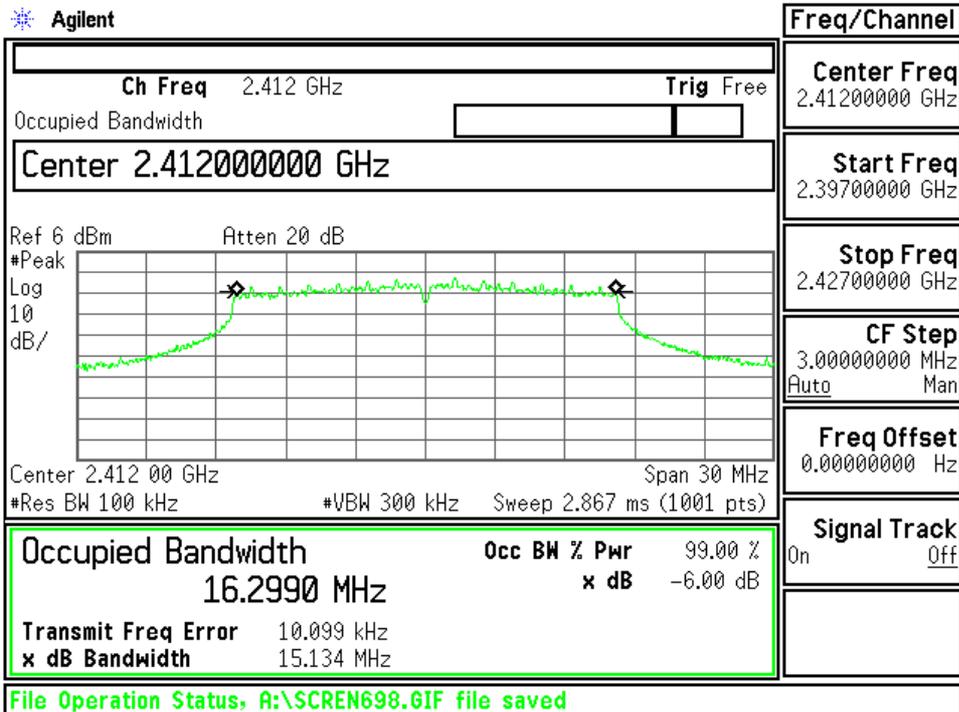


### Middle Channel

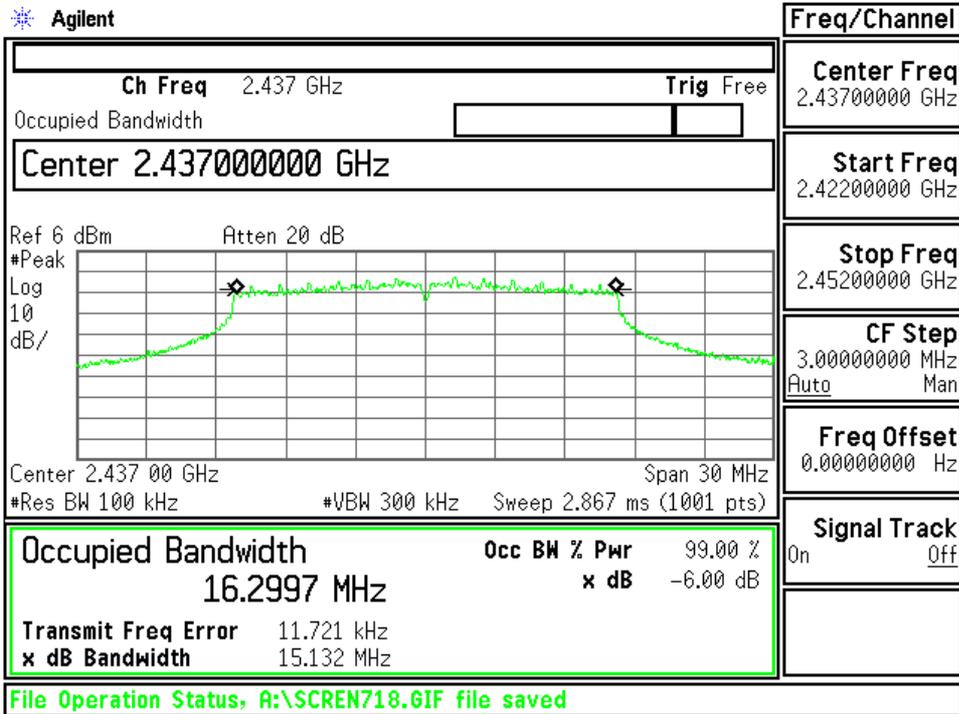


### High Channel

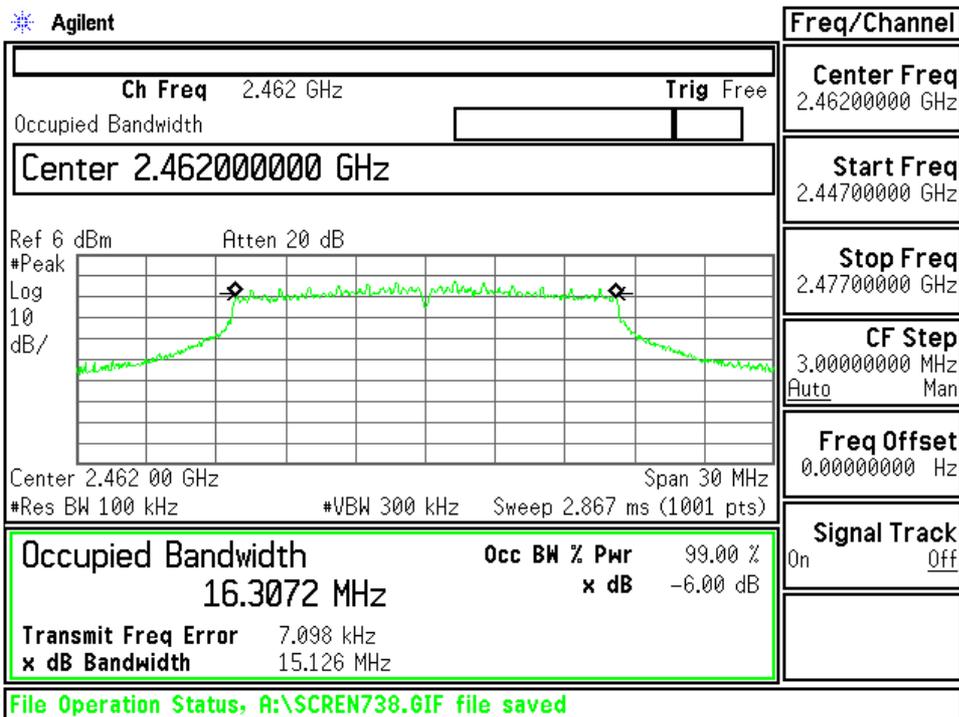


7)Data Rate : 6.5Mbps(IEEE 802.11n)  
Low Channel

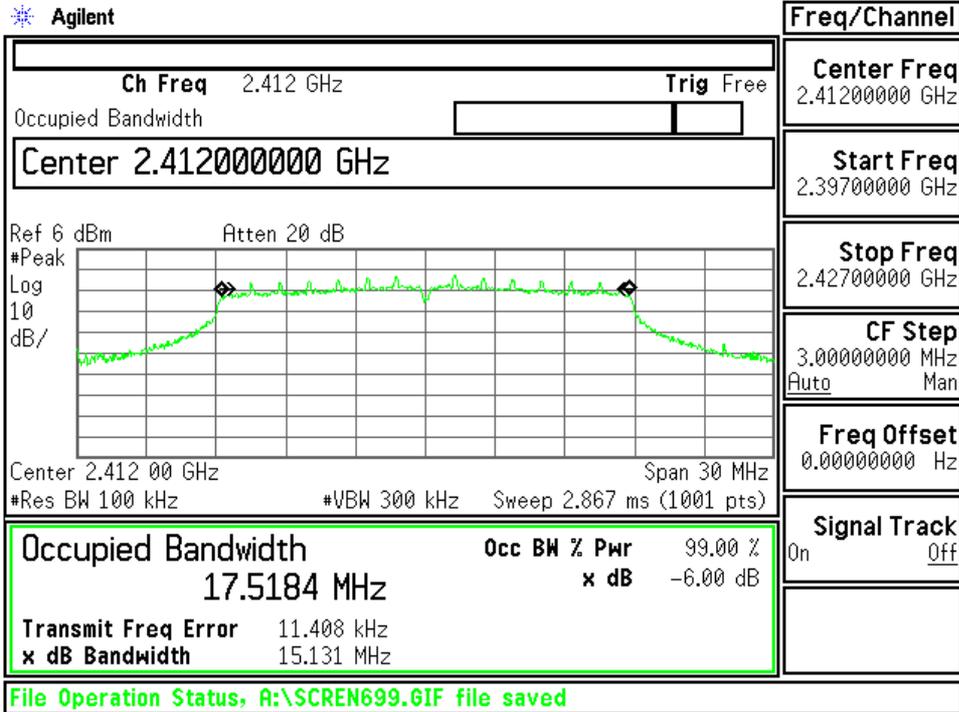

Middle Channel

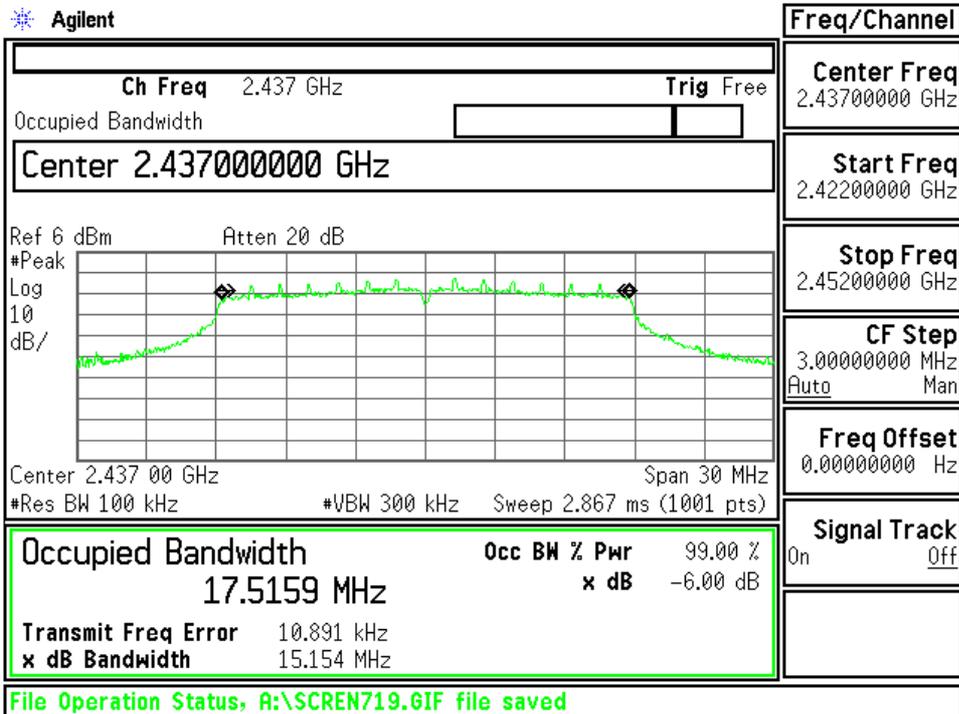


### High Channel

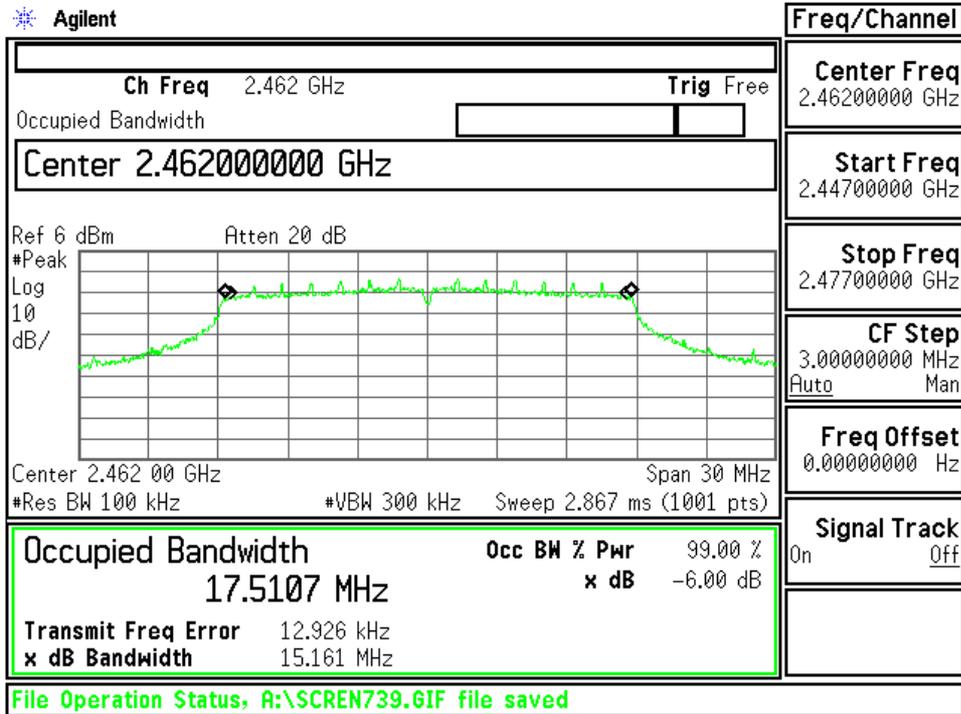


8)Data Rate : 65Mbps(IEEE 802.11n)


### Low Channel

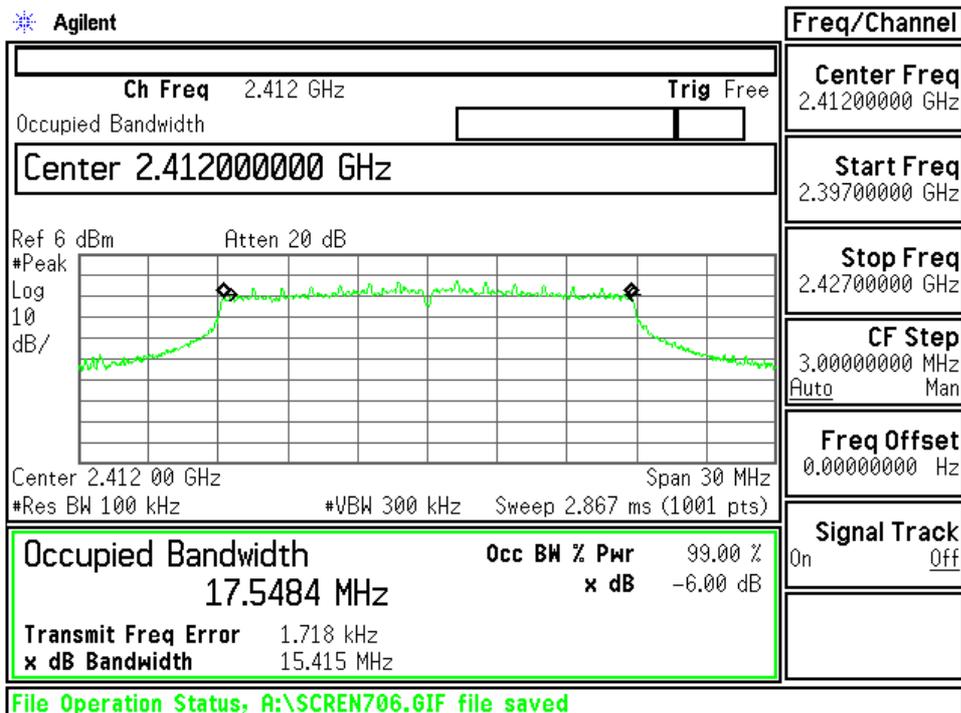

### Middle Channel

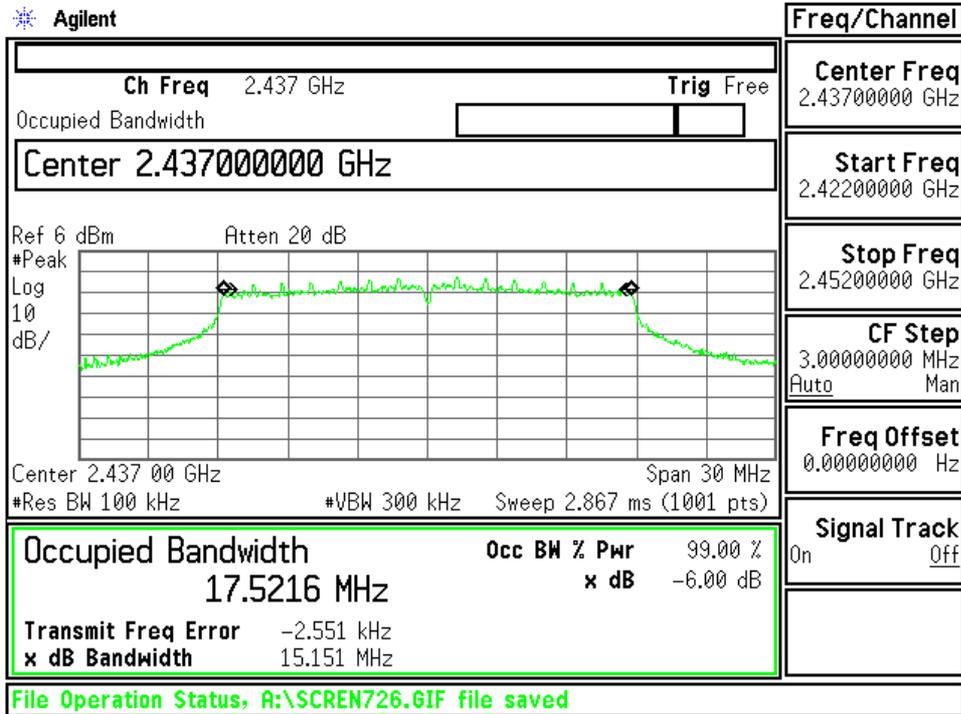

### High Channel

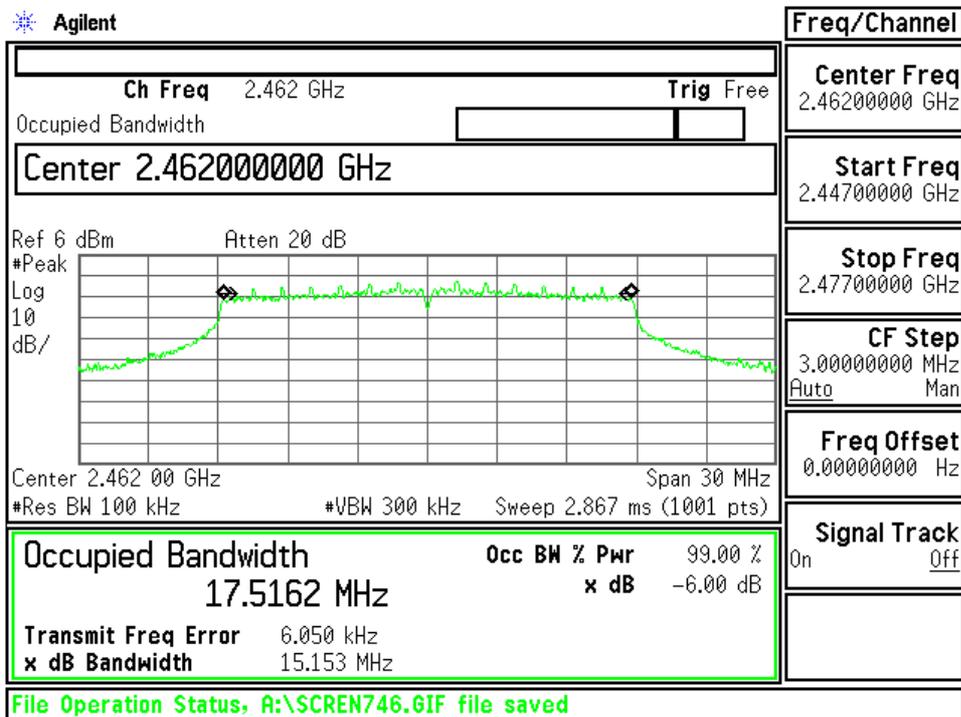

**A.4 Dwell Time**

Not Applicable

**A.5 Peak Output Power(Conduction)**

1)Data Rate : 1Mbps(IEEE 802.11b)

Test Date: July 15, 2011  
Temp.: 26 °C, Humi: 60 %

Data Rate : 1Mbps

CH	Transmitting Frequency [MHz]	Correction Factor [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
				[dBm]	[mW]		
01	2412	9.88	8.14	18.02	63.39	30.00	+11.98
06	2437	9.88	7.96	17.84	60.81	30.00	+12.16
11	2462	9.88	8.20	18.08	64.27	30.00	+11.92

Calculated result at 2462.000 MHz, as the worst point shown on underline:

Correction Factor	=	9.88 dB
+ ) Meter Reading	=	8.20 dBm
Result	=	18.08 dBm = 64.27 mW

Minimum Margin: 30.00 - 18.08 = 11.92 (dB)

NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	Off

2)Data Rate : 2Mbps(IEEE 802.11b)

Test Date: July 15, 2011  
Temp.: 26 °C, Humi: 60 %

Data Rate : 2Mbps

CH	Transmitting Frequency [MHz]	Correction Factor [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
				[dBm]	[mW]		
01	2412	9.88	7.99	17.87	61.24	30.00	+12.13
06	2437	9.88	8.36	18.24	66.68	30.00	+11.76
11	2462	9.88	8.34	18.22	66.37	30.00	+11.78

Calculated result at 2437.000 MHz, as the worst point shown on underline:

Correction Factor	=	9.88 dB
+ ) Meter Reading	=	8.36 dBm
Result	=	18.24 dBm = 66.68 mW

Minimum Margin: 30.00 - 18.24 = 11.76 (dB)

NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	Off

3)Data Rate : 5.5Mbps(IEEE 802.11b)

Data Rate : 5.5Mbps

Test Date: July 15, 2011  
Temp.: 26 °C, Humi: 60 %

CH	Transmitting Frequency [MHz]	Correction Factor [dB]	Meter Reading [dBm]	Conducted		Limits [dBm]	Margin [dB]
				Peak	Output Power [mW]		
01	2412	9.88	8.03	17.91	61.80	30.00	+12.09
06	2437	9.88	8.30	18.18	65.77	30.00	+11.82
11	2462	9.88	8.50	18.38	68.87	30.00	+11.62

Calculated result at 2462.000 MHz, as the worst point shown on underline:

Correction Factor	=	9.88 dB
+ ) Meter Reading	=	8.50 dBm
Result	=	18.38 dBm = 68.87 mW

Minimum Margin: 30.00 - 18.38 = 11.62 (dB)

NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	Off

4)Data Rate : 11Mbps(IEEE 802.11b)

Data Rate : 11Mbps

Test Date: July 15, 2011  
Temp.: 26 °C, Humi: 60 %

CH	Transmitting Frequency [MHz]	Correction Factor [dB]	Meter Reading [dBm]	Conducted		Limits [dBm]	Margin [dB]
				Peak	Output Power [mW]		
01	2412	9.88	7.97	17.85	60.95	30.00	+12.15
06	2437	9.88	8.26	18.14	65.16	30.00	+11.86
11	2462	9.88	8.46	18.34	68.23	30.00	+11.66

Calculated result at 2462.000 MHz, as the worst point shown on underline:

Correction Factor	=	9.88 dB
+ ) Meter Reading	=	8.46 dBm
Result	=	18.34 dBm = 68.23 mW

Minimum Margin: 30.00 - 18.34 = 11.66 (dB)

NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	Off

5)Data Rate : 6Mbps(IEEE 802.11g)

Test Date: July 15, 2011  
Temp.: 26 °C, Humi: 60 %

Data Rate : 6Mbps

CH	Transmitting Frequency [MHz]	Correction Factor [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
				[dBm]	[mW]		
01	2412	10.03	11.80	21.83	152.41	30.00	+ 8.17
06	2437	10.03	11.78	21.81	151.71	30.00	+ 8.19
11	2462	10.03	12.04	22.07	161.06	30.00	+ 7.93

Calculated result at 2462.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.03 dB
+ ) Meter Reading	=	12.04 dBm
Result	=	22.07 dBm = 161.06 mW

Minimum Margin: 30.00 - 22.07 = 7.93 (dB)

NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	Off

6)Data Rate : 54Mbps(IEEE 802.11g)

Test Date: July 15, 2011  
Temp.: 26 °C, Humi: 60 %

Data Rate : 54Mbps

CH	Transmitting Frequency [MHz]	Correction Factor [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
				[dBm]	[mW]		
01	2412	10.03	11.46	21.49	140.93	30.00	+ 8.51
06	2437	10.03	11.68	21.71	148.25	30.00	+ 8.29
11	2462	10.03	11.95	21.98	157.76	30.00	+ 8.02

Calculated result at 2462.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.03 dB
+ ) Meter Reading	=	11.95 dBm
Result	=	21.98 dBm = 157.76 mW

Minimum Margin: 30.00 - 21.98 = 8.02 (dB)

NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	Off

7)Data Rate : 6.5Mbps(IEEE 802.11n)

Data Rate : 6.5Mbps

Test Date: July 15, 2011  
Temp.: 26 °C, Humi: 60 %

CH	Transmitting Frequency [MHz]	Correction Factor [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
				[dBm]	[mW]		
01	2412	9.88	11.32	21.20	131.83	30.00	+ 8.80
06	2437	9.88	11.49	21.37	137.09	30.00	+ 8.63
11	2462	9.88	11.77	21.65	146.22	30.00	+ 8.35

Calculated result at 2462.000 MHz, as the worst point shown on underline:

Correction Factor	=	9.88 dB
+ ) Meter Reading	=	11.77 dBm
Result	=	21.65 dBm = 146.22 mW

Minimum Margin: 30.00 - 21.65 = 8.35 (dB)

NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	Off

8)Data Rate : 65Mbps(IEEE 802.11n)

Data Rate : 65Mbps

Test Date: July 15, 2011  
Temp.: 26 °C, Humi: 60 %

CH	Transmitting Frequency [MHz]	Correction Factor [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
				[dBm]	[mW]		
01	2412	9.88	11.33	21.21	132.13	30.00	+ 8.79
06	2437	9.88	11.40	21.28	134.28	30.00	+ 8.72
11	2462	9.88	11.64	21.52	141.91	30.00	+ 8.48

Calculated result at 2462.000 MHz, as the worst point shown on underline:

Correction Factor	=	9.88 dB
+ ) Meter Reading	=	11.64 dBm
Result	=	21.52 dBm = 141.91 mW

Minimum Margin: 30.00 - 21.52 = 8.48 (dB)

NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	Off

**A.6 Peak Power Density(Conduction)**

1)Data Rate : 1Mbps(IEEE 802.11b)


Data Rate : 1Mbps						Test Date: July 21, 2011 Temp.: 28 °C, Humi: 65 %	
Transmitting Frequency	Correction Factor	Meter Reading	Conducted Peak Output Power		Limits	Margin	
CH	[MHz]	[dB]	[dBm]	[dBm]	[mW]	[dBm]	[dB]
01	2412	9.88	-15.19	-5.31	0.29	8.00	+13.31
06	2437	9.88	-16.24	-6.36	0.23	8.00	+14.36
11	2462	9.88	-15.53	-5.65	0.27	8.00	+13.65

Calculated result at 2412.000 MHz, as the worst point shown on underline:  
 Correction Factor = 9.88 dB  
 + ) Meter Reading = -15.19 dBm  
 Result = -5.31 dBm = 0.29 mW  
 Minimum Margin: 8.00 - -5.31 = 13.31 (dB)

NOTES  
 1. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.  
 2. Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	3kHz	10kHz

Low Channel

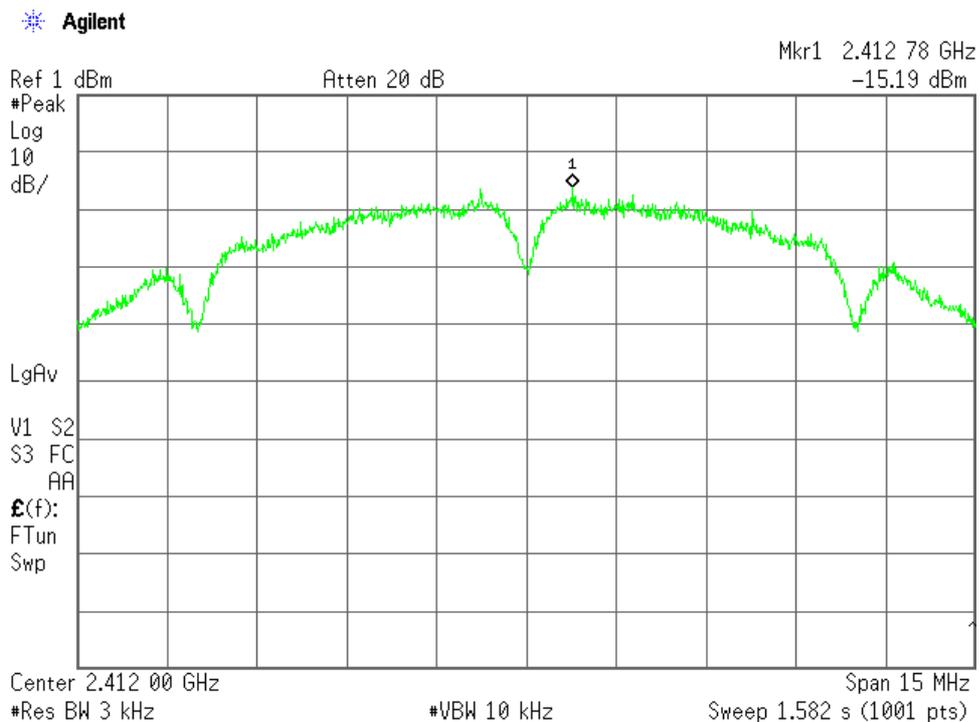



2)Data Rate : 2Mbps(IEEE 802.11b)

Data Rate : 2Mbps

Test Date: July 21, 2011  
Temp.: 28 °C. Humi: 65 %

CH	Transmitting Frequency [MHz]	Correction Factor [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
				[dBm]	[mW]		
01	2412	9.88	-16.13	-6.25	0.24	8.00	+14.25
06	2437	9.88	-15.63	-5.75	0.27	8.00	+13.75
11	2462	9.88	-15.59	-5.71	0.27	8.00	+13.71

Calculated result at 2462.000 MHz, as the worst point shown on underline:

Correction Factor	=	9.88 dB
+ ) Meter Reading	=	-15.59 dBm
Result	=	-5.71 dBm = 0.27 mW


Minimum Margin: 8.00 - -5.71 = 13.71 (dB)

NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	3kHz	10kHz

Low Channel

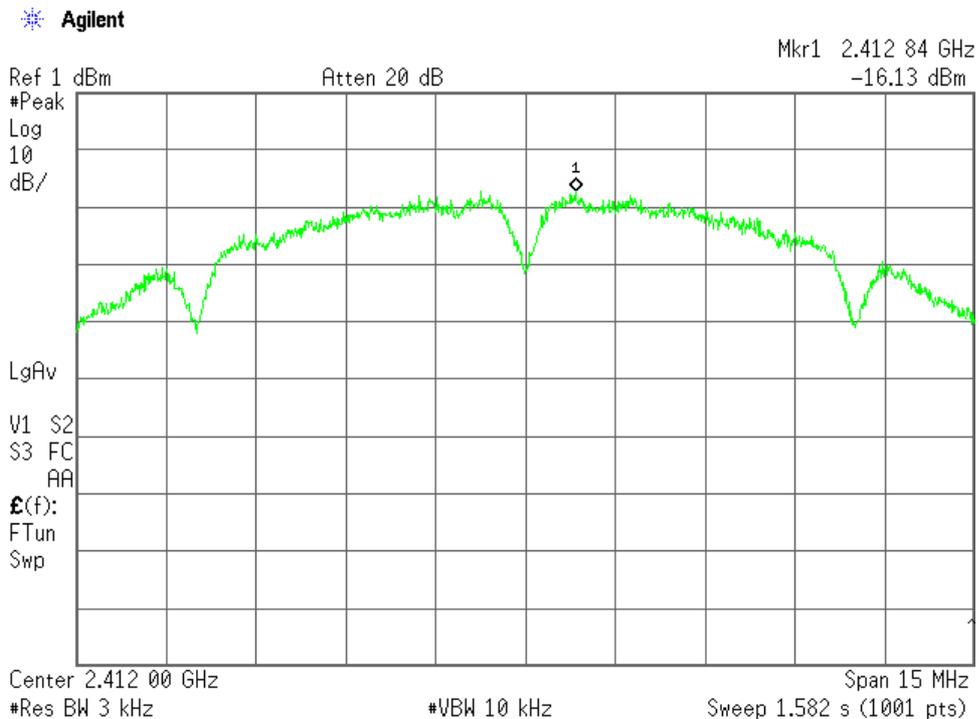



3)Data Rate : 5.5Mbps(IEEE 802.11b)

Data Rate : 5.5Mbps

Test Date: July 21, 2011  
Temp.: 28 °C. Humi: 65 %

CH	Transmitting Frequency [MHz]	Correction Factor [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
				[dBm]	[mW]		
01	2412	9.88	-17.23	-7.35	0.18	8.00	+15.35
06	2437	9.88	-17.26	-7.38	0.18	8.00	+15.38
11	2462	9.88	-15.44	-5.56	0.28	8.00	+13.56

Calculated result at 2462.000 MHz, as the worst point shown on underline:

Correction Factor	=	9.88 dB
+ ) Meter Reading	=	-15.44 dBm
Result	=	-5.56 dBm = 0.28 mW


Minimum Margin: 8.00 - -5.56 = 13.56 (dB)

NOTES


- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	3kHz	10kHz


Low Channel

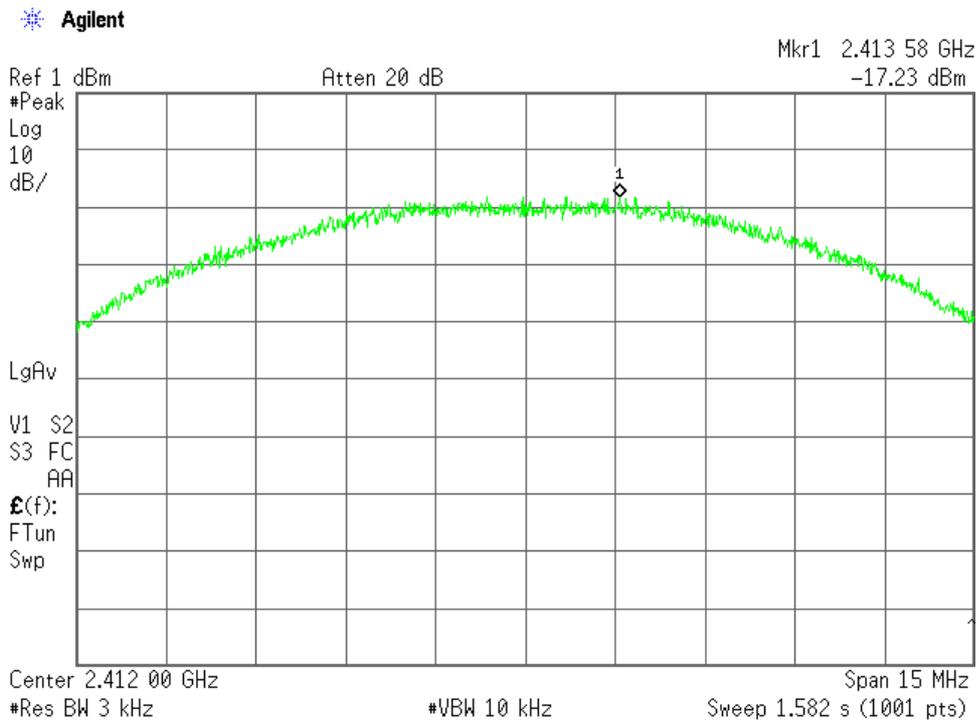

### Middle Channel

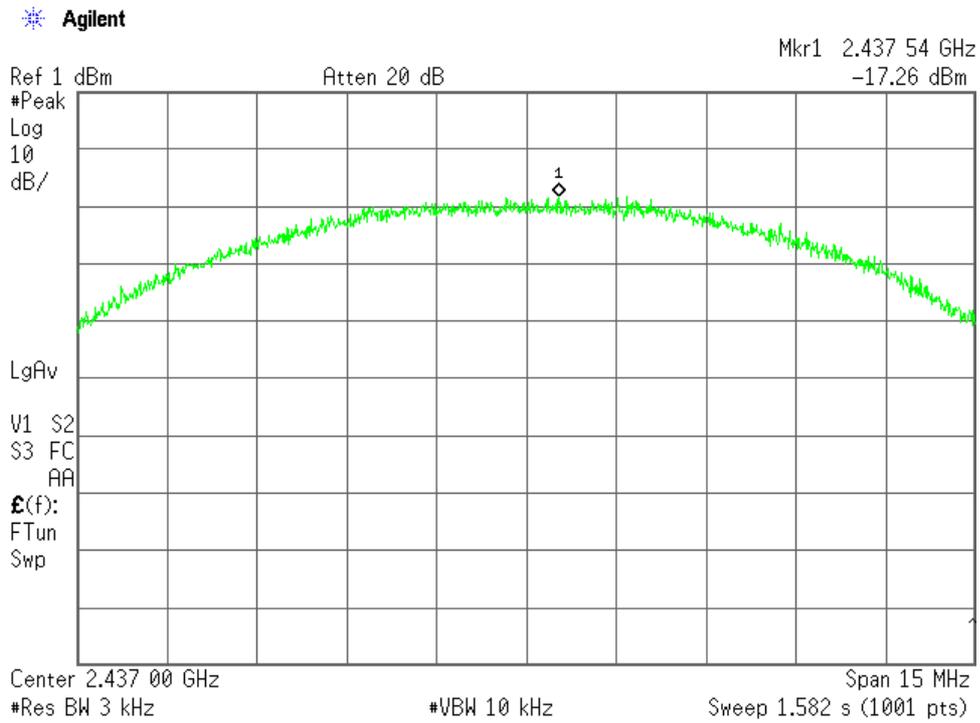

### High Channel

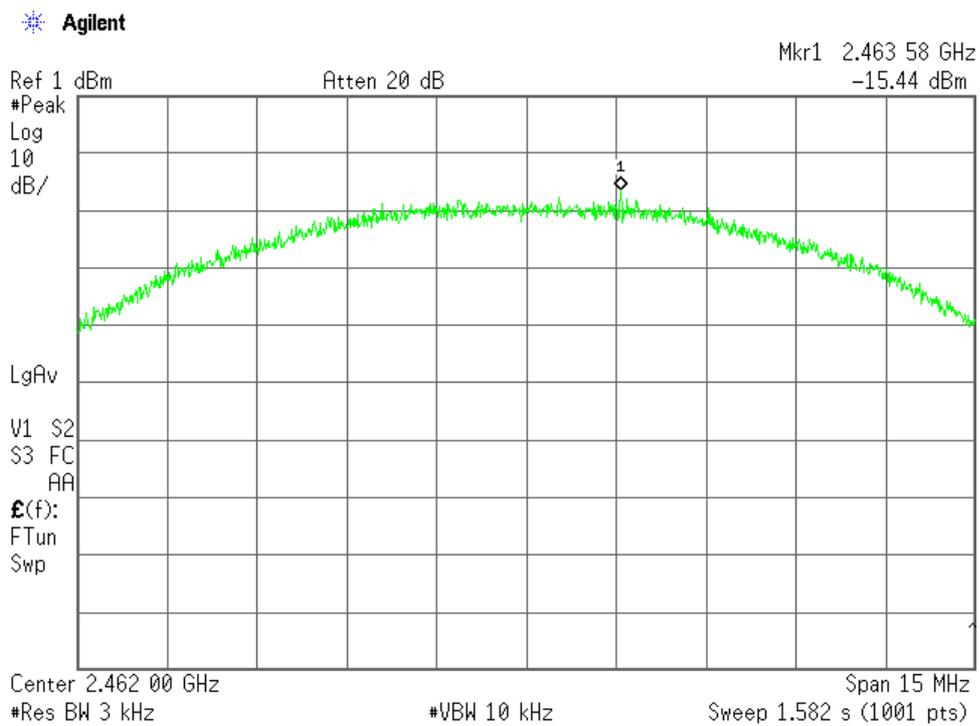





5)Data Rate : 6Mbps(IEEE 802.11g)

Data Rate : 6Mbps

Test Date: July 21, 2011  
Temp.: 28 °C. Humi: 65 %

CH	Transmitting Frequency		Correction Factor [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
	[MHz]	[MHz]			[dBm]	[mW]		
01	2412		9.88	-22.22	-12.34	0.06	8.00	+20.34
06	2437		9.88	-21.92	-12.04	0.06	8.00	+20.04
11	2462		9.88	-22.45	-12.57	0.06	8.00	+20.57

Calculated result at 2437.000 MHz, as the worst point shown on underline:

Correction Factor	=	9.88 dB
+ ) Meter Reading	=	-21.92 dBm
Result	=	-12.04 dBm = 0.06 mW


Minimum Margin: 8.00 - -12.04 = 20.04 (dB)

NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	3kHz	10kHz


Low Channel

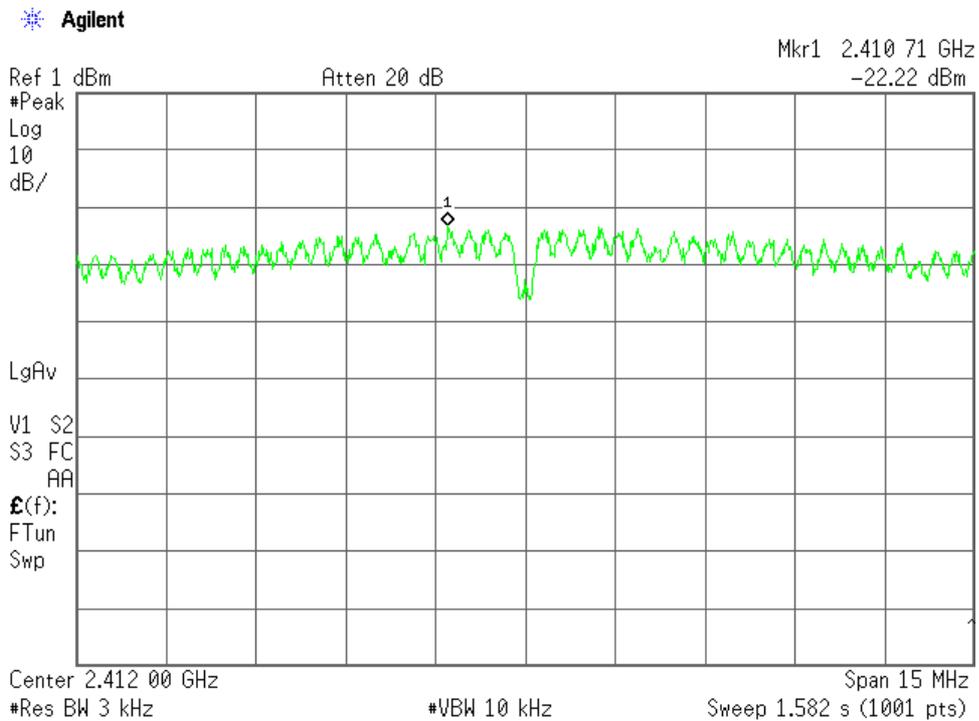






### Middle Channel

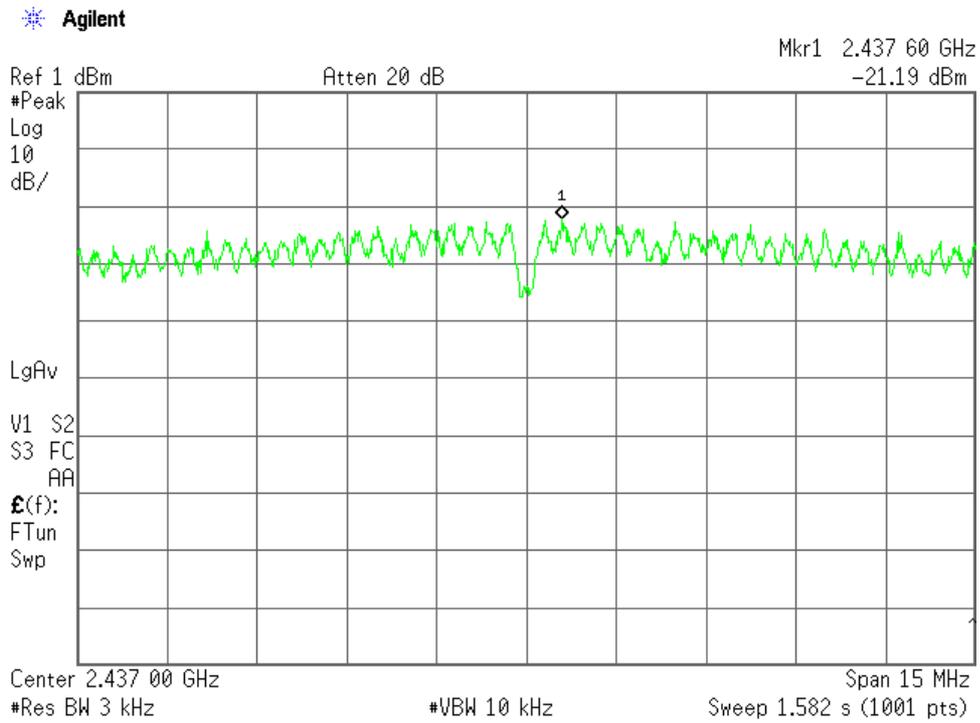

### High Channel

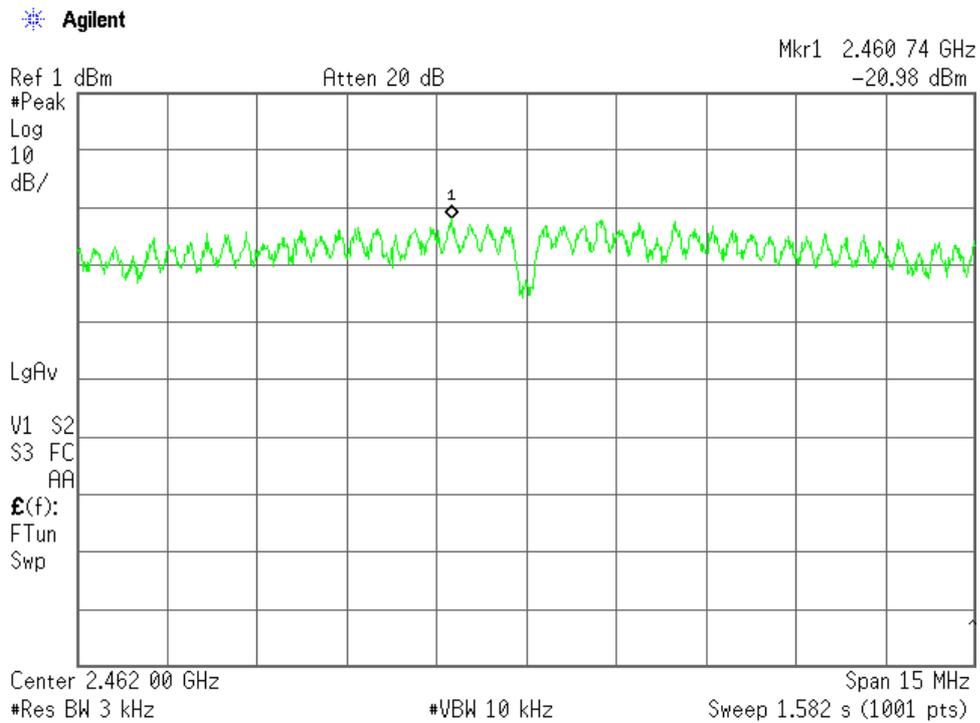

7)Data Rate : 6.5Mbps(IEEE 802.11n)

Test Date: July 21, 2011  
Temp.: 28 °C, Humi: 65 %

Data Rate : 6.5Mbps

CH	Transmitting Frequency	Correction Factor [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
	[MHz]			[dBm]	[mW]		
01	2412	9.88	-22.37	-12.49	0.06	8.00	+20.49
06	2437	9.88	-21.83	-11.95	0.06	8.00	+19.95
11	2462	9.88	-21.57	-11.69	0.07	8.00	+19.69

Calculated result at 2462.000 MHz, as the worst point shown on underline:

Correction Factor	=	9.88 dB
+ ) Meter Reading	=	-21.57 dBm
Result	=	-11.69 dBm = 0.07 mW


Minimum Margin: 8.00 - -11.69 = 19.69 (dB)

NOTES


- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	3kHz	10kHz


Low Channel

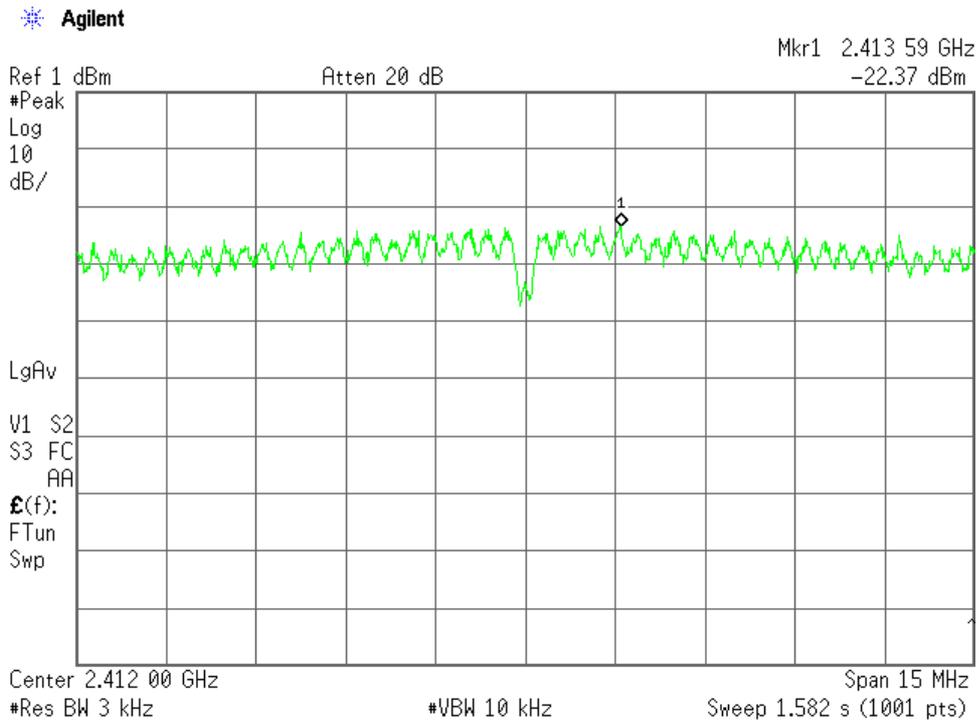

### Middle Channel

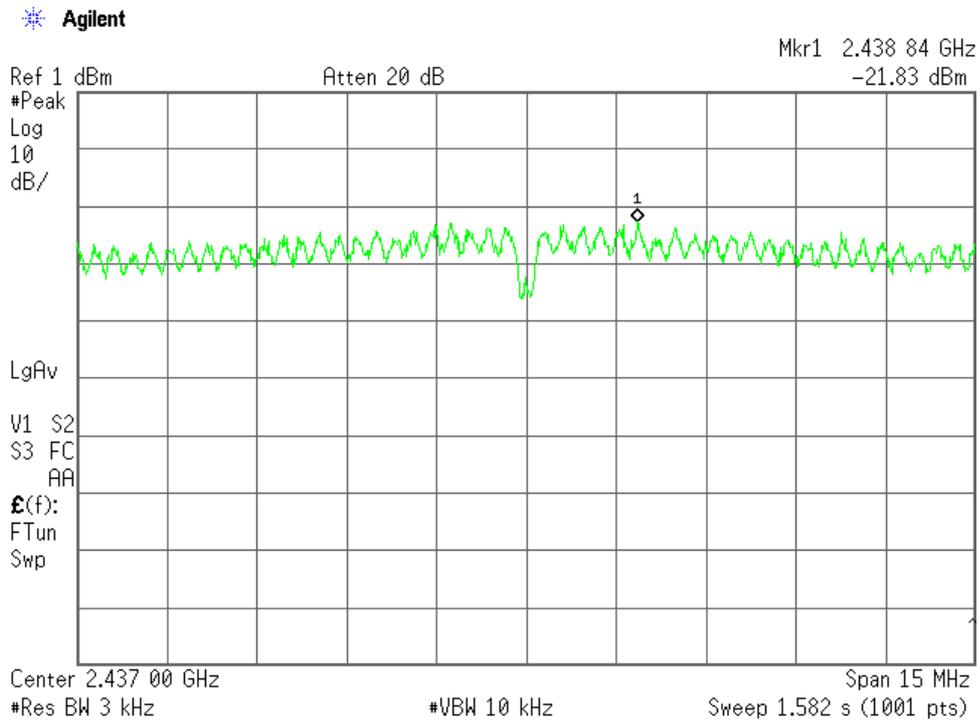


### High Channel

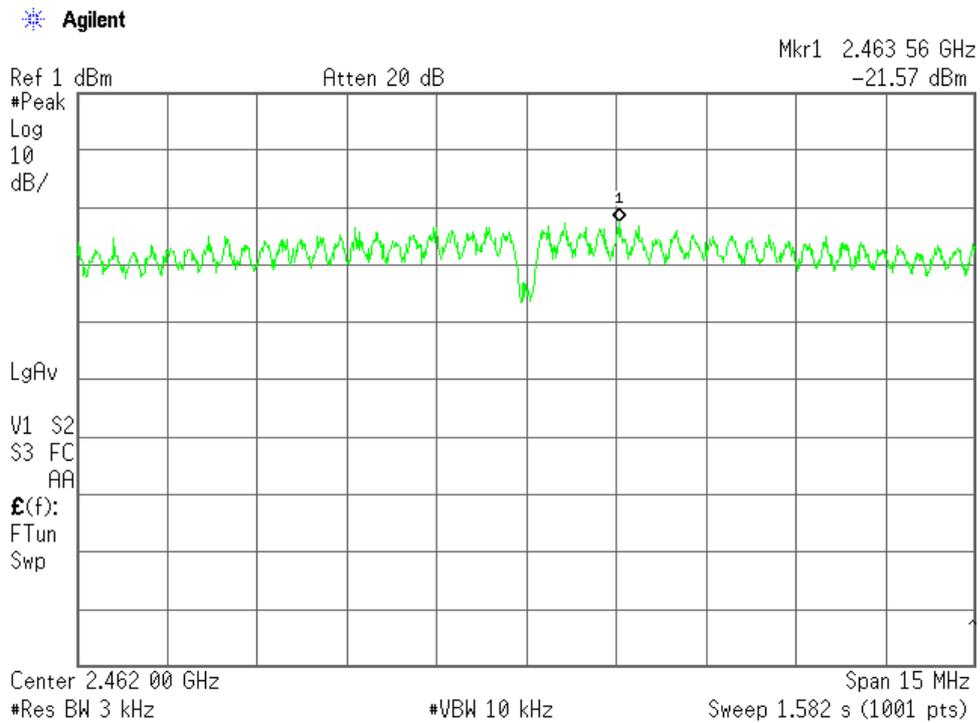




### Middle Channel

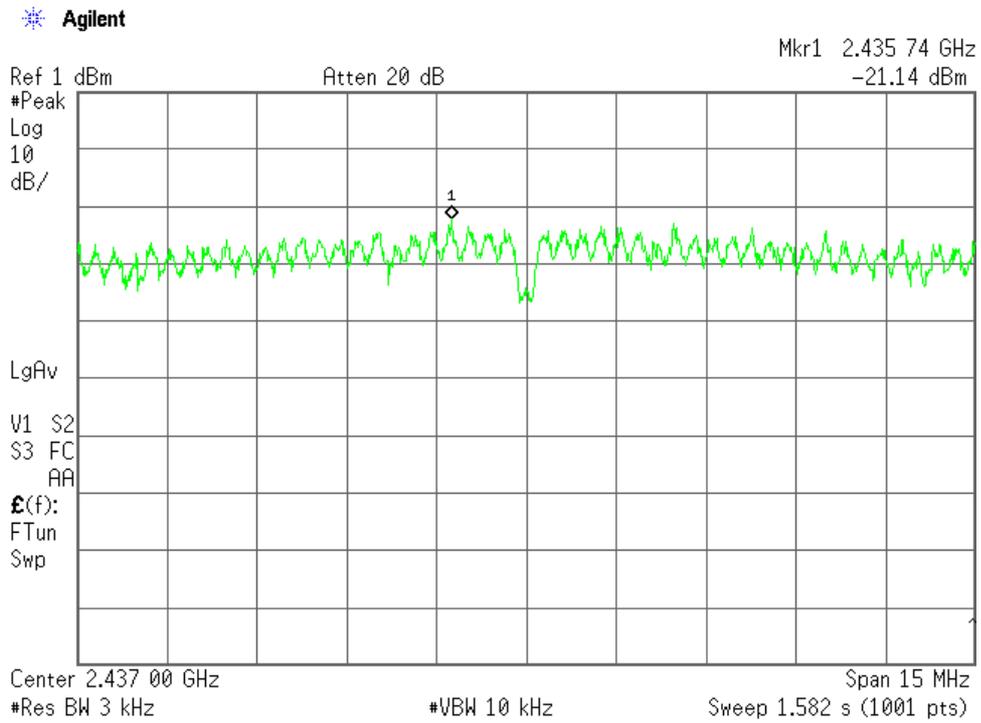

### High Channel

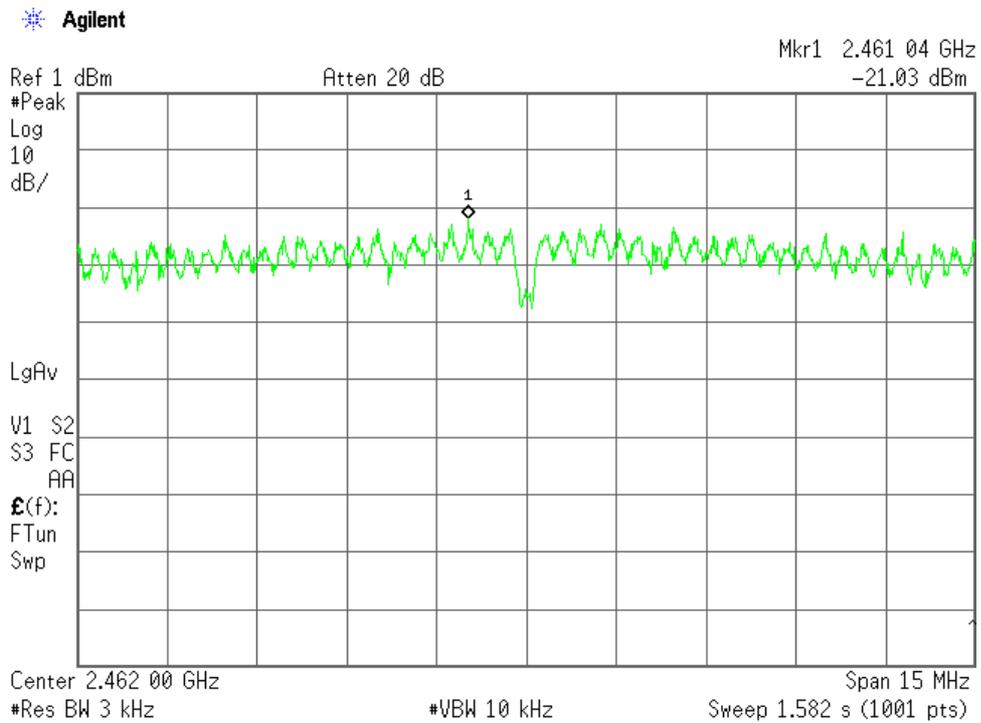


**A.7 Spurious Emission(Conduction)**


Test Date : July 21, 2011

Temp.:28°C, Humi:65%


1)Data Rate : 1Mbps(IEEE 802.11b)  
Low Channel

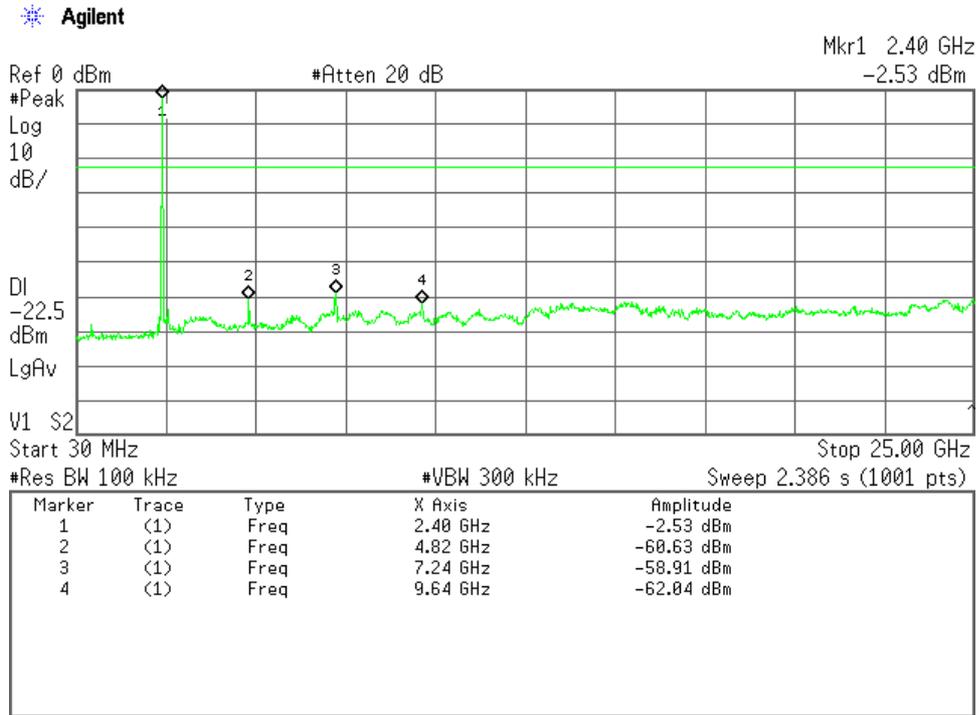

**Middle Channel**

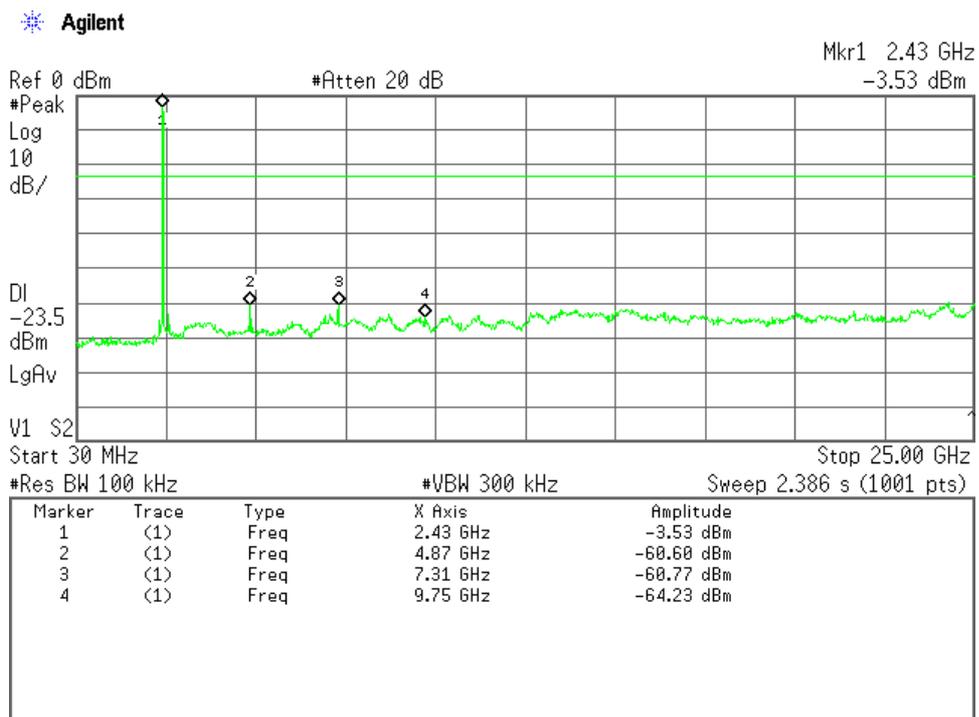


## High Channel

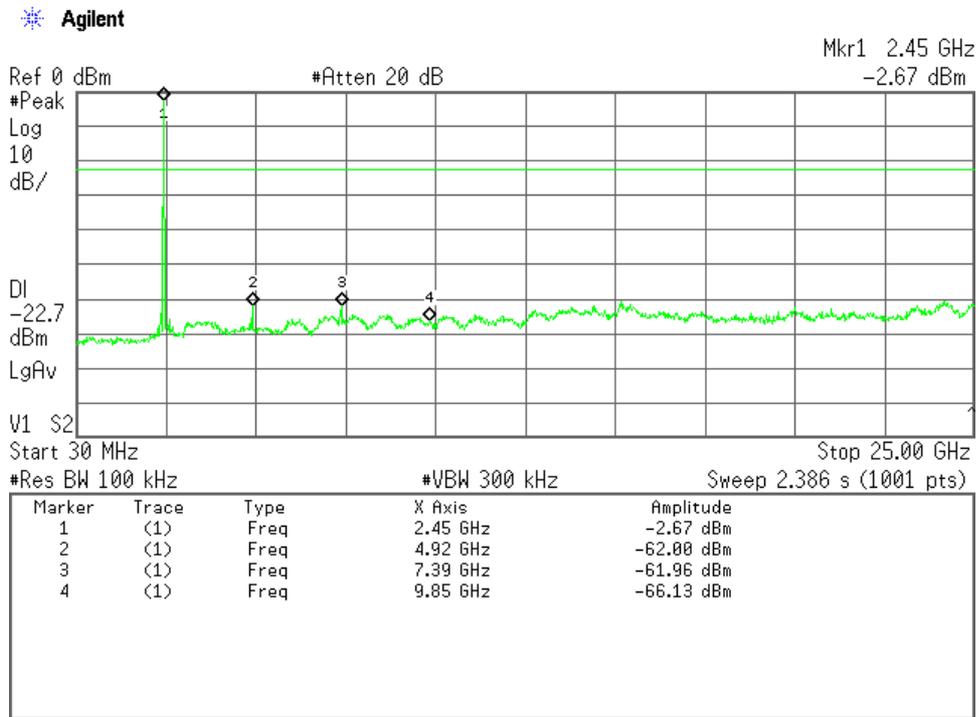


2)Data Rate : 11Mbps(IEEE 802.11b)


## Low Channel

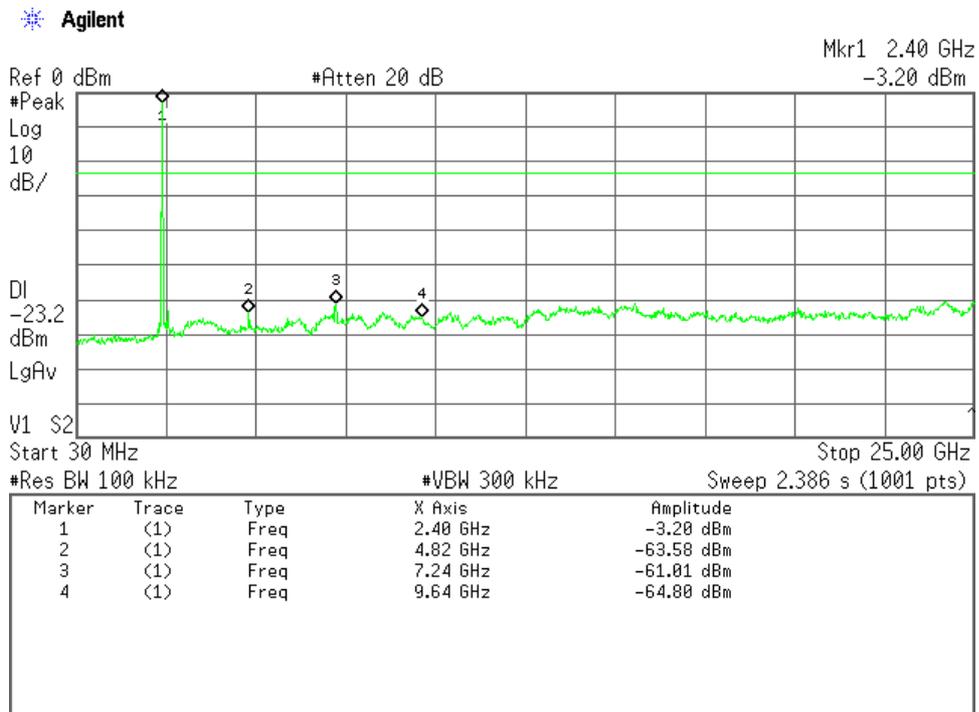


Middle Channel

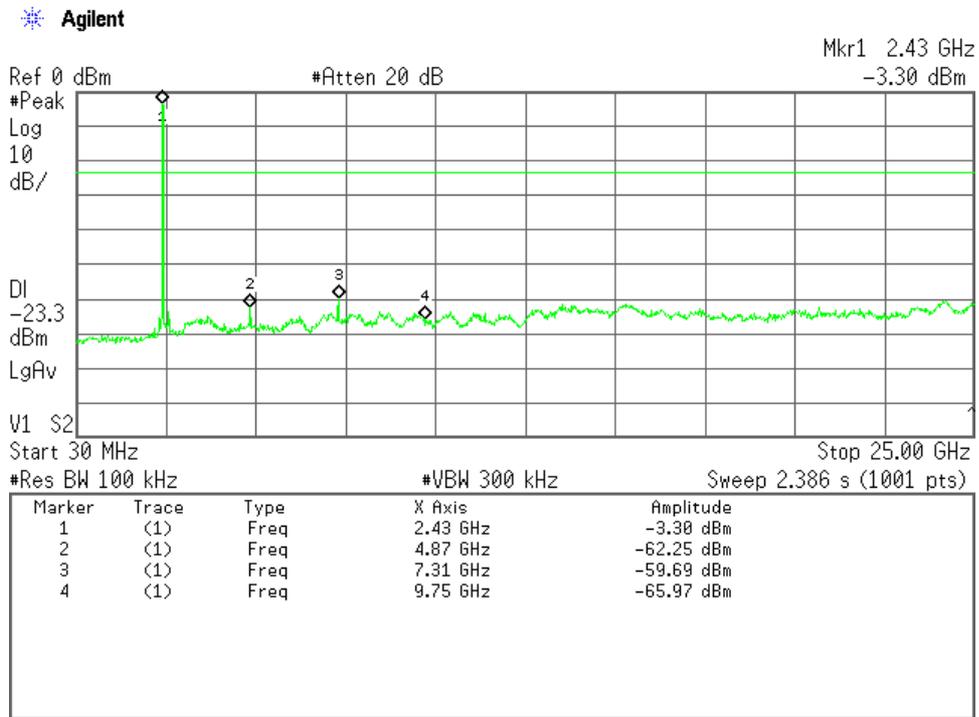


High Channel

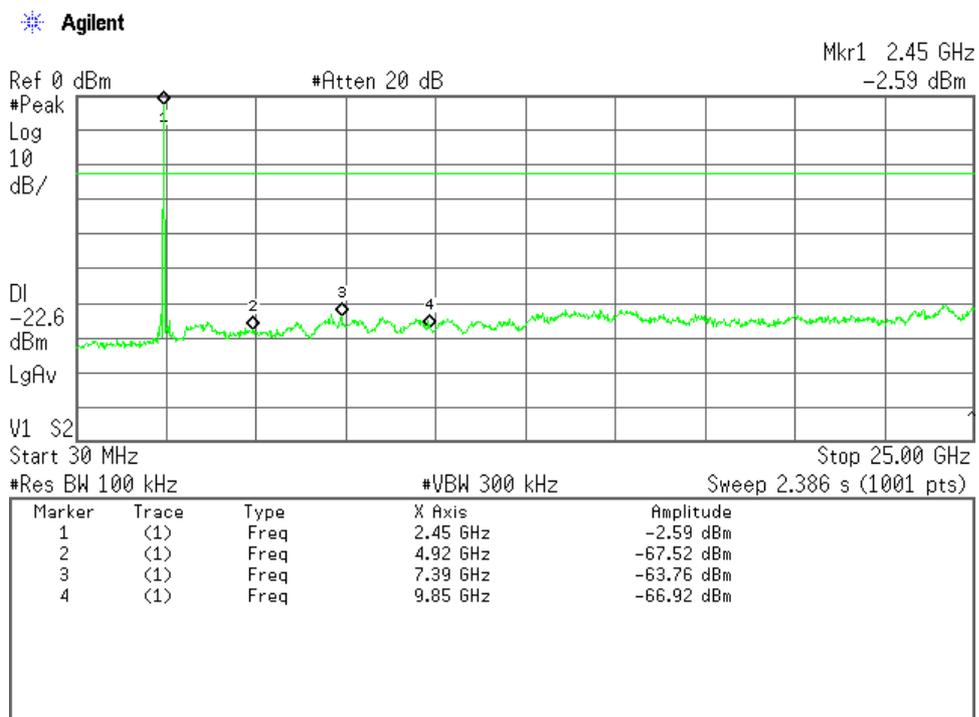


3)Data Rate : 6Mbps(IEEE 802.11g)  
Low Channel

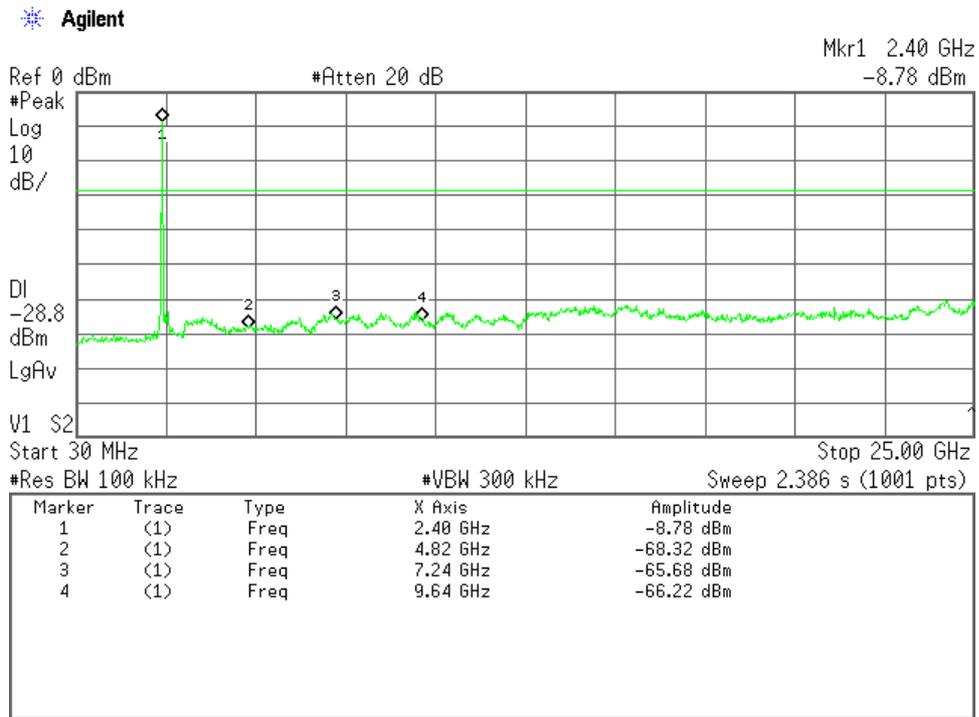

Middle Channel

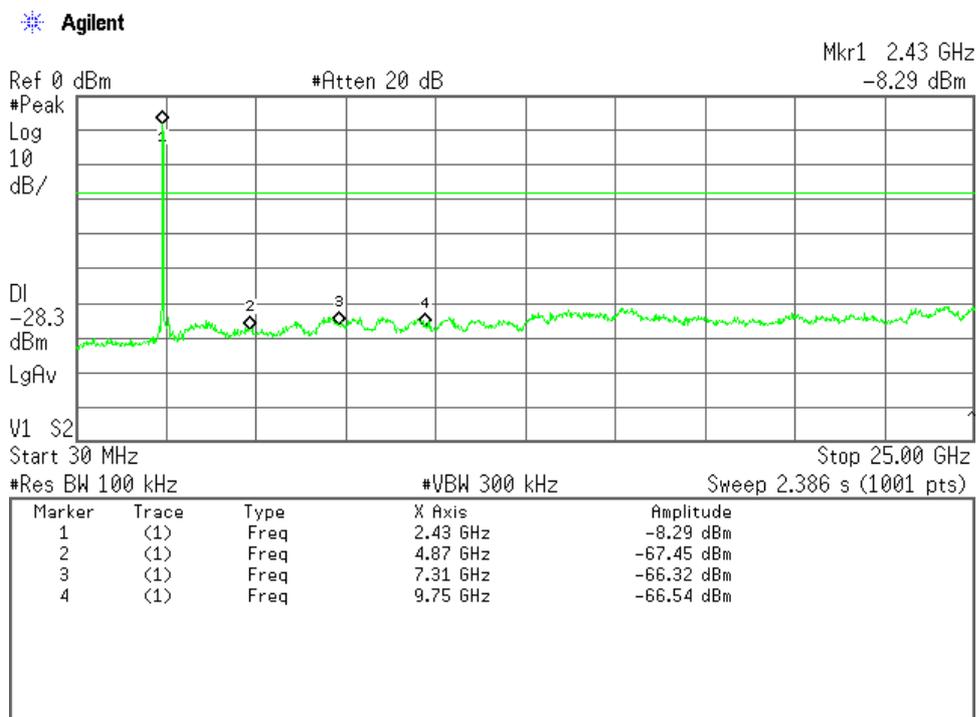


High Channel

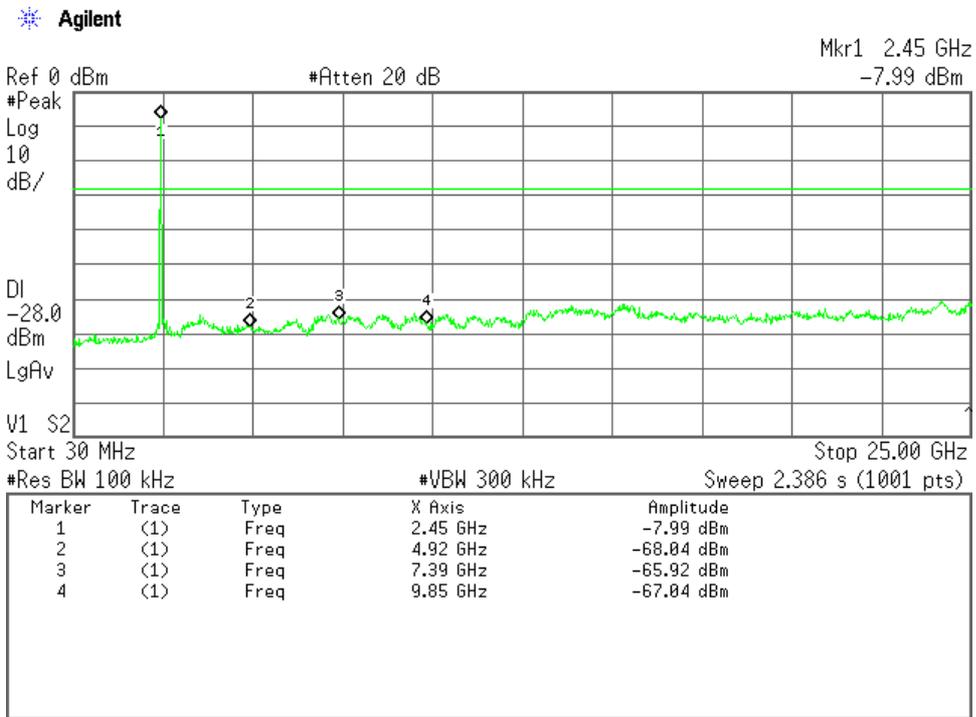


4)Data Rate : 54Mbps(IEEE 802.11g)


Low Channel

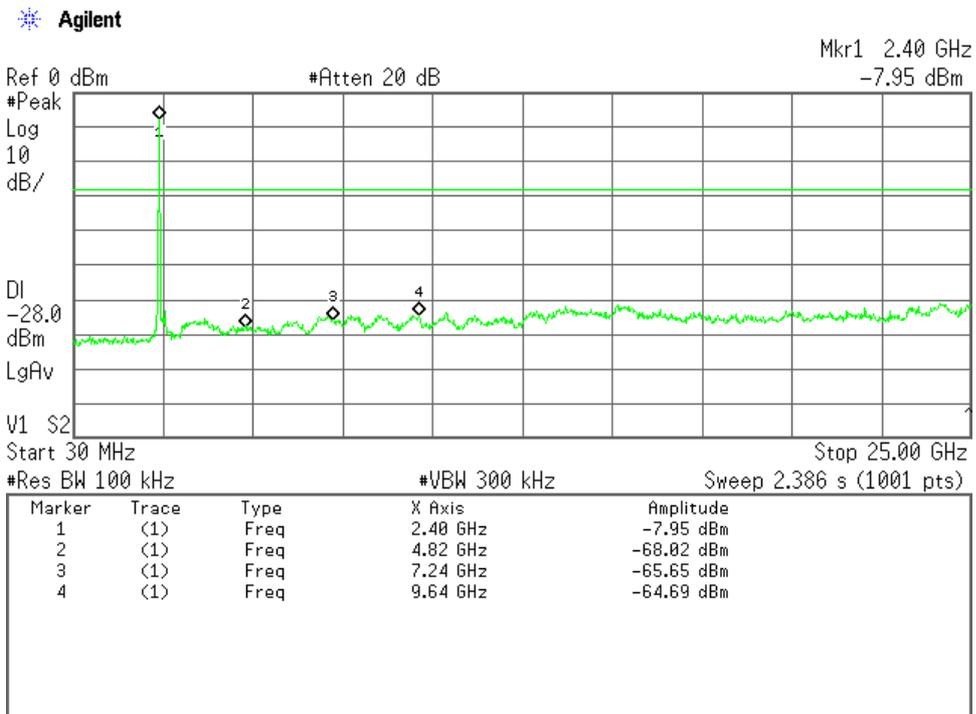


### Middle Channel

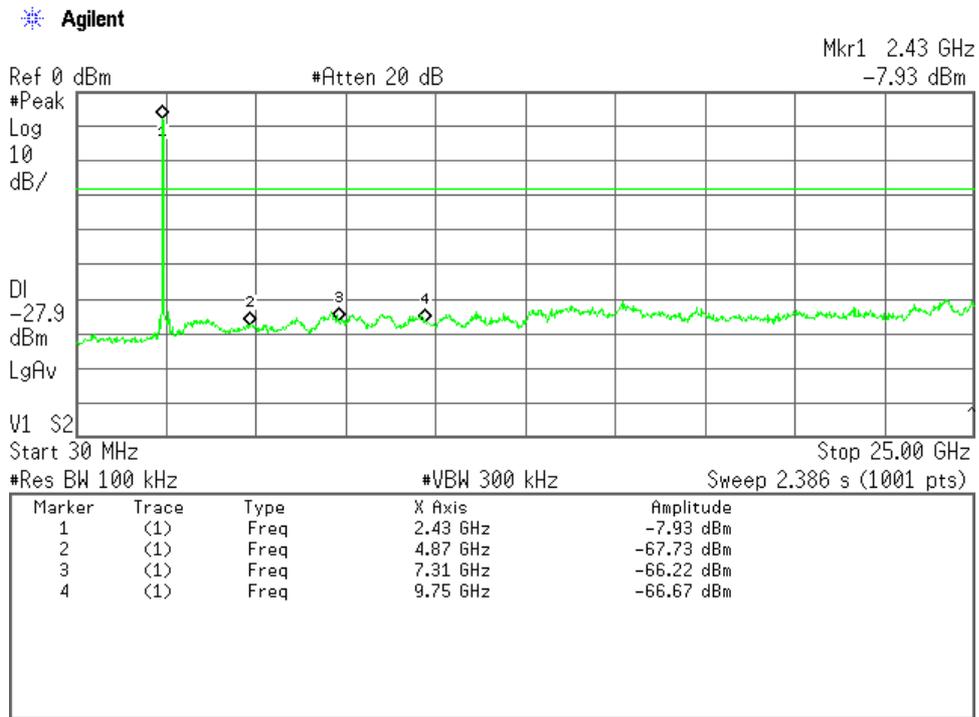


### High Channel

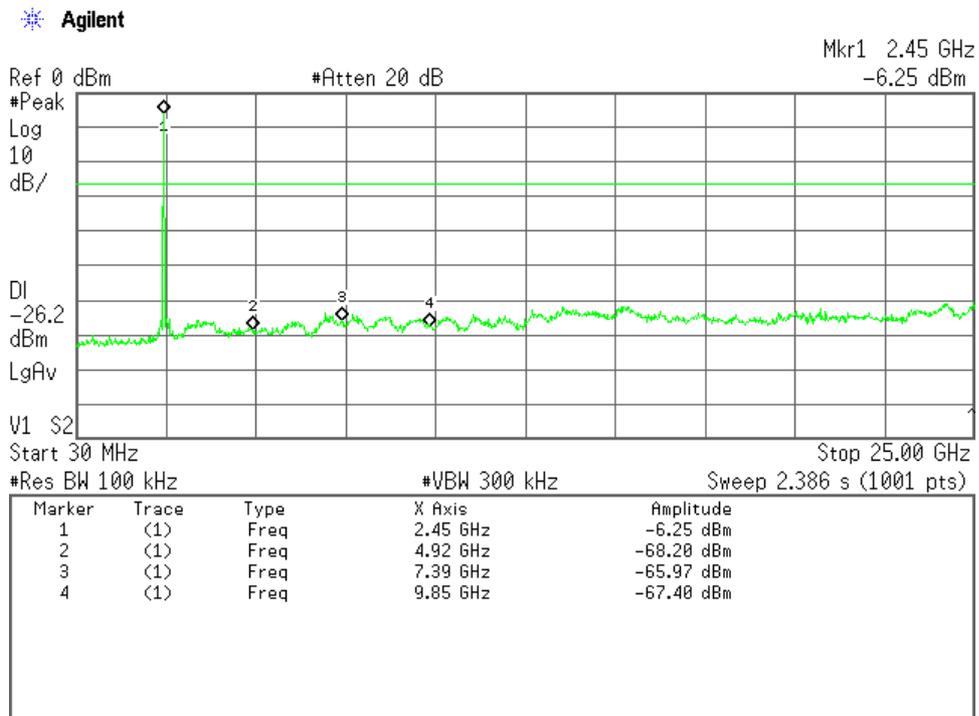


5)Data Rate : 6.5Mbps(IEEE 802.11n)  
Low Channel

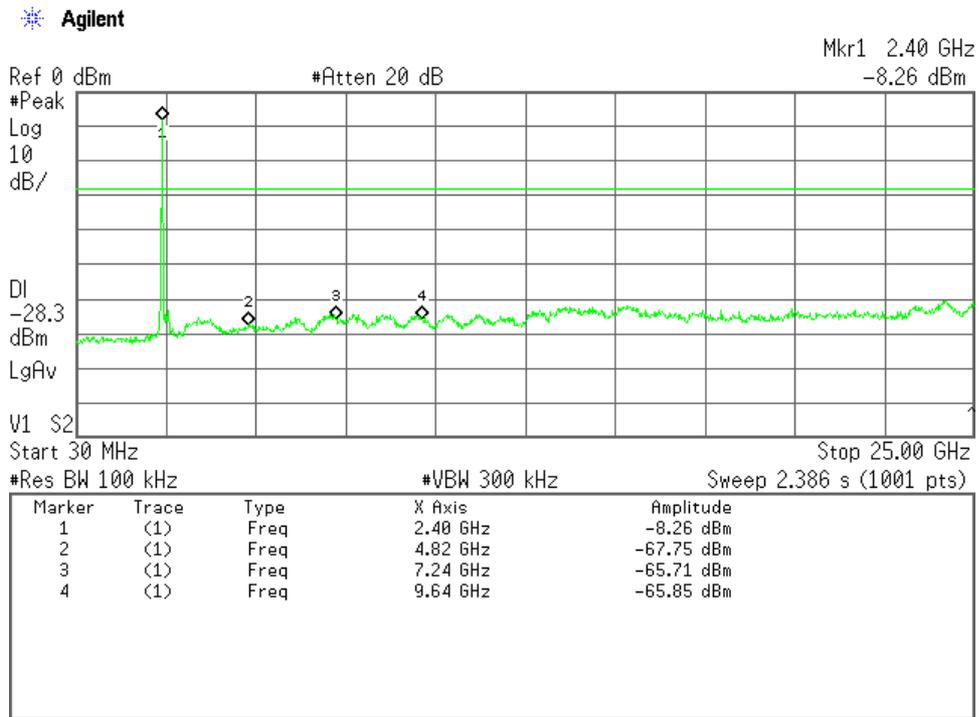

Middle Channel

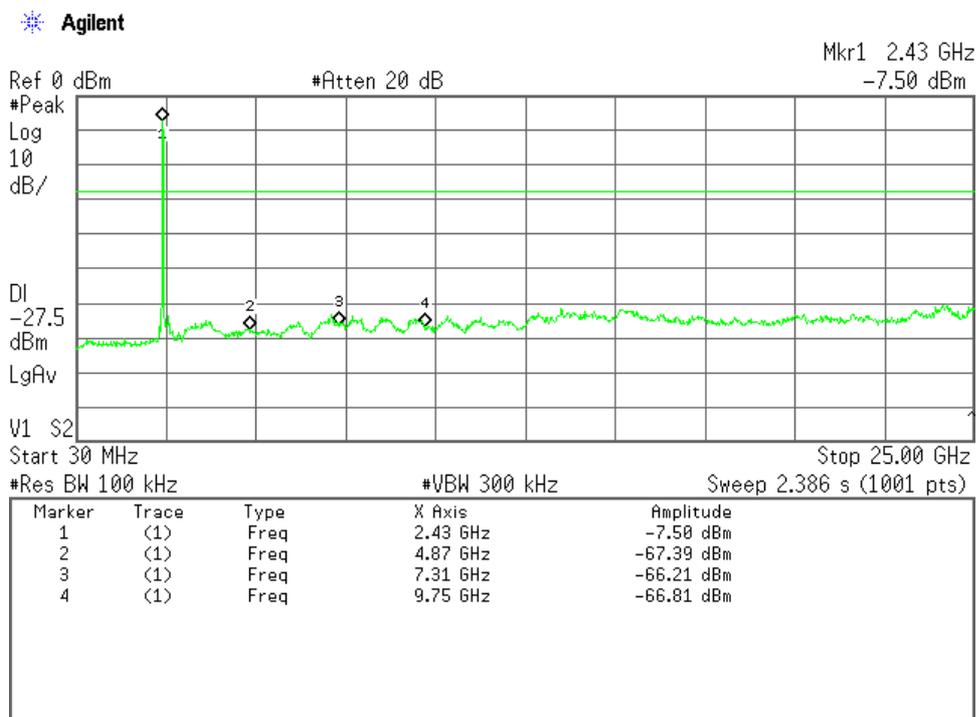


## High Channel

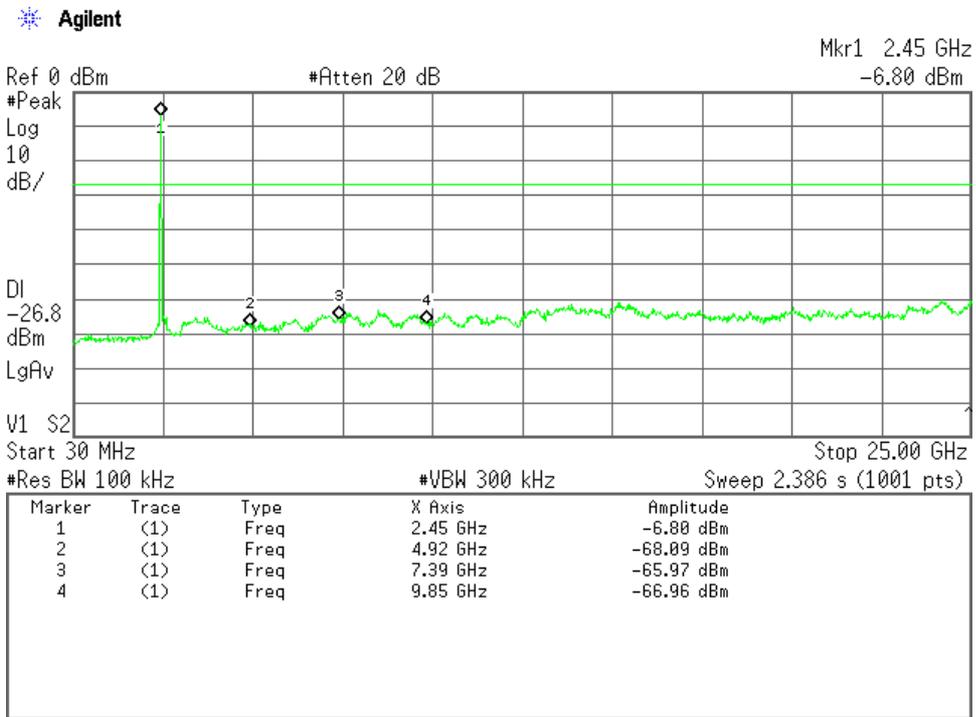


## 6)Data Rate : 65Mbps(IEEE 802.11n)


### Low Channel

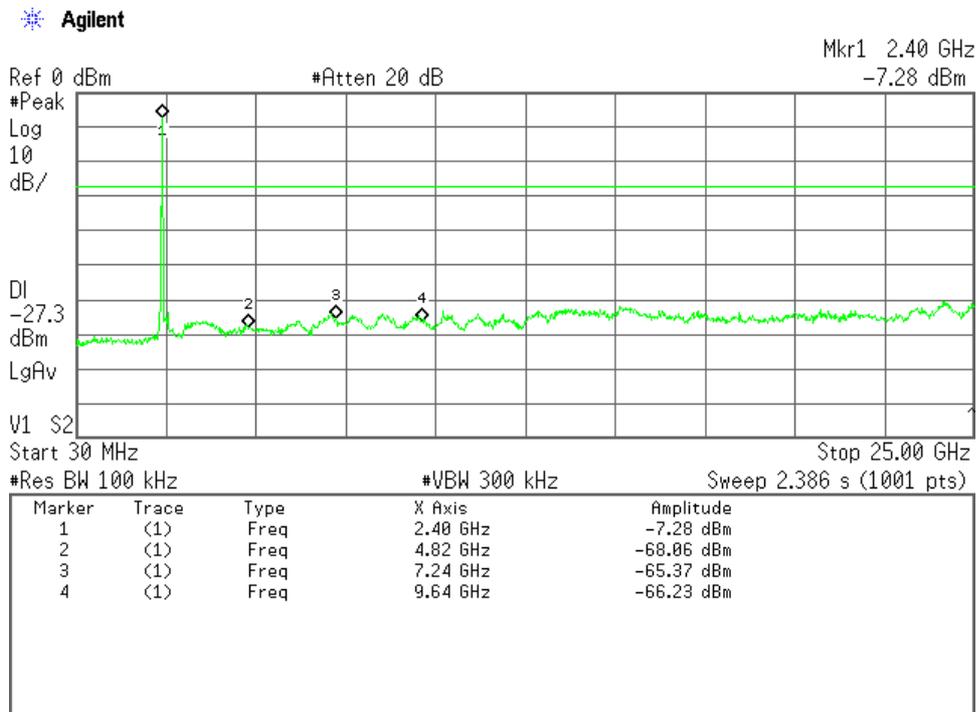

Middle Channel

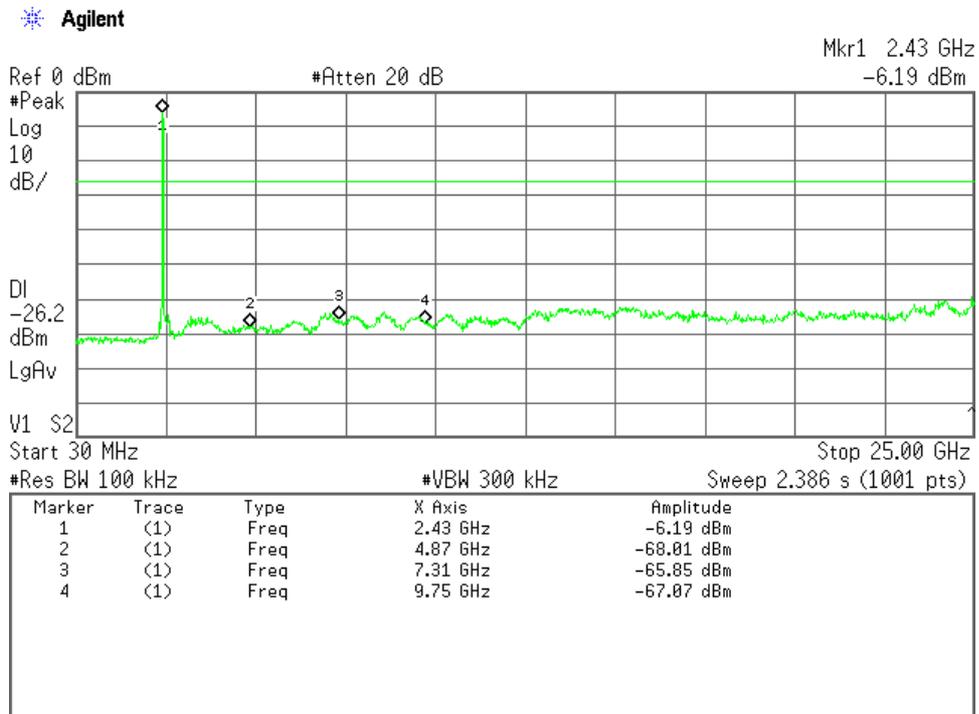


High Channel

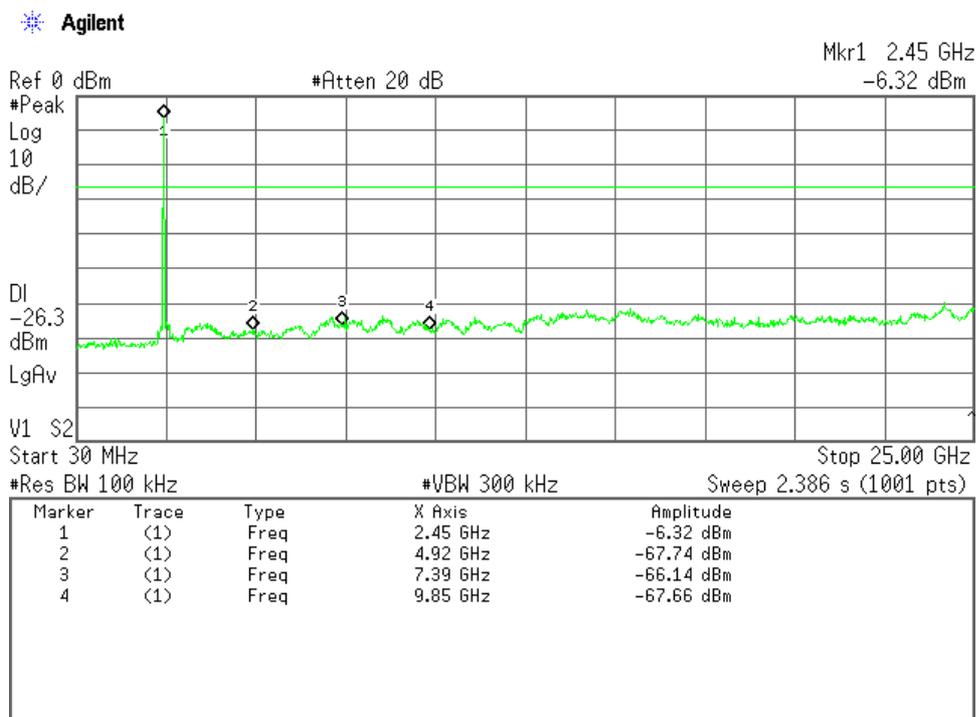


**Band-Edge Emission**


1)Data Rate : 1Mbps(IEEE 802.11b)  
Low Channel

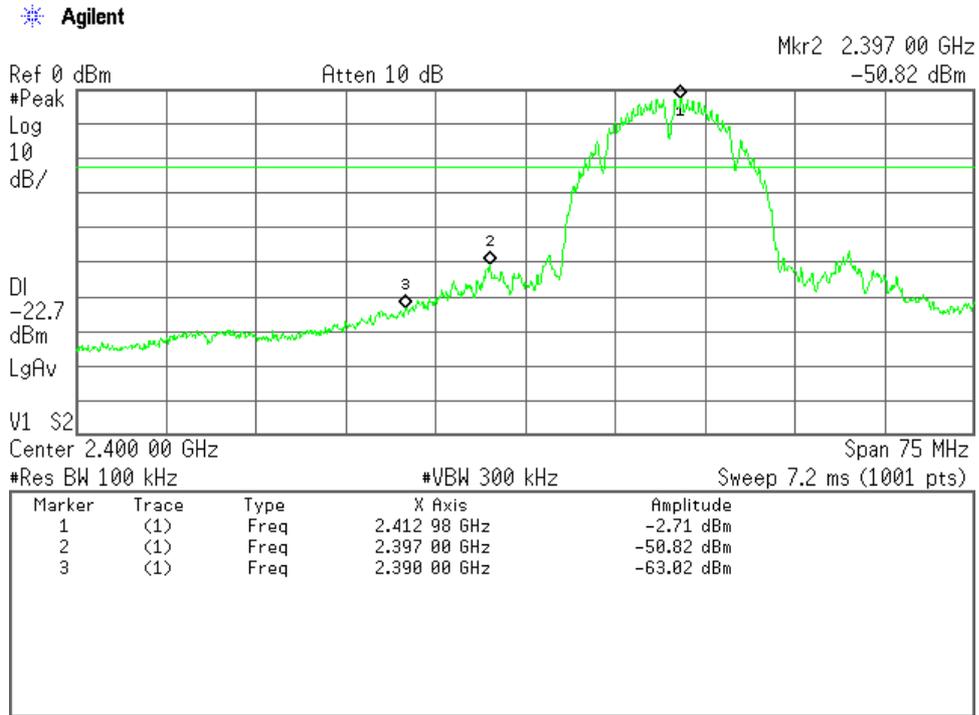


**High Channel**

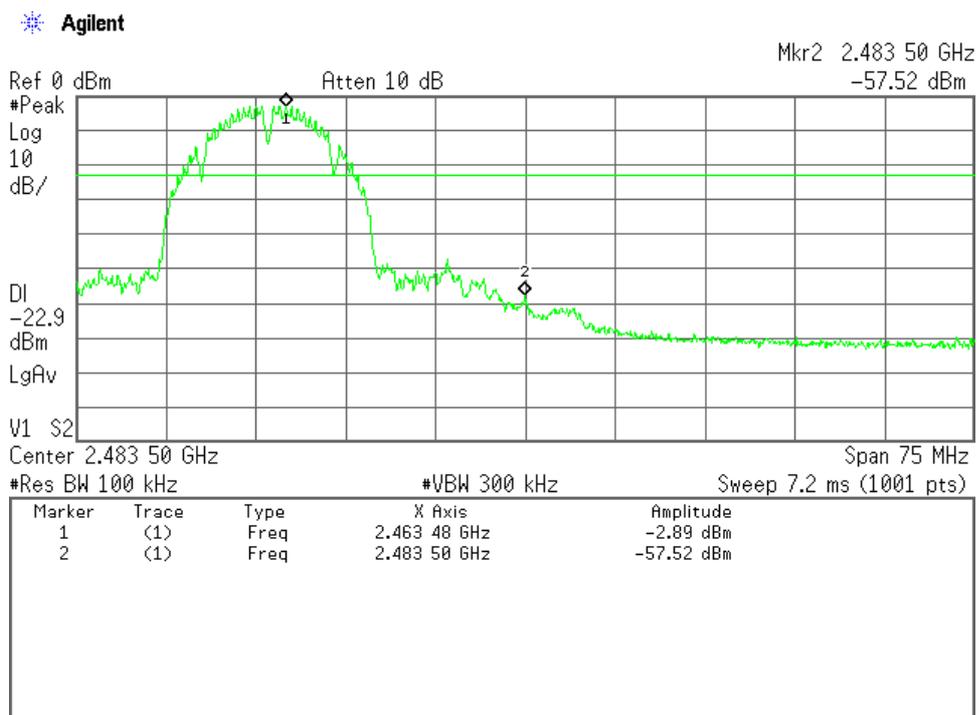


2)Data Rate : 6Mbps(IEEE 802.11g)  
Low Channel

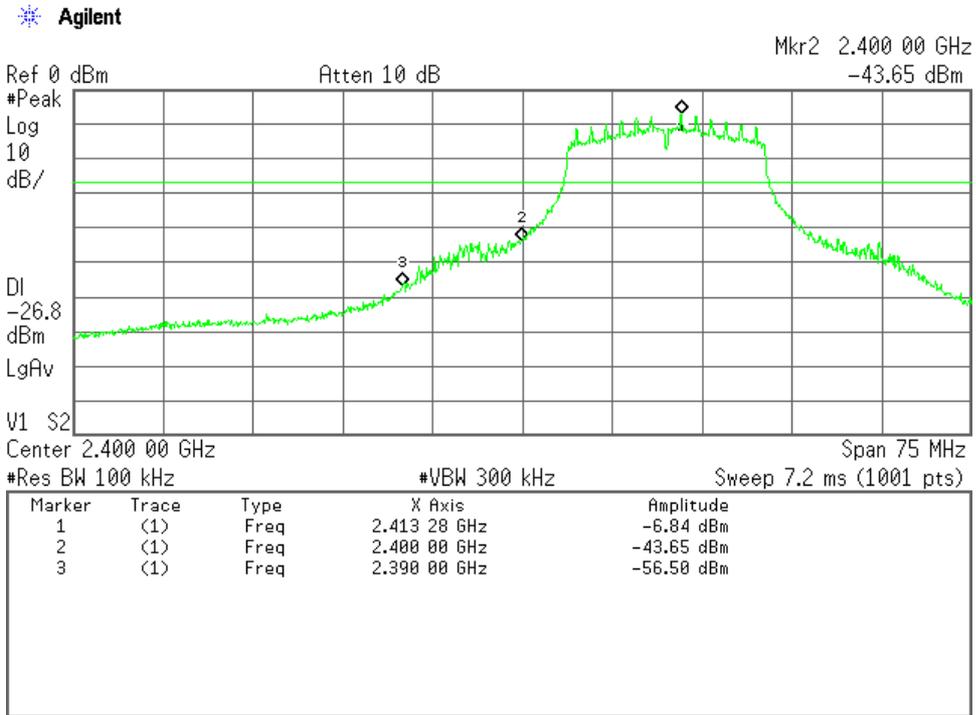


High Channel

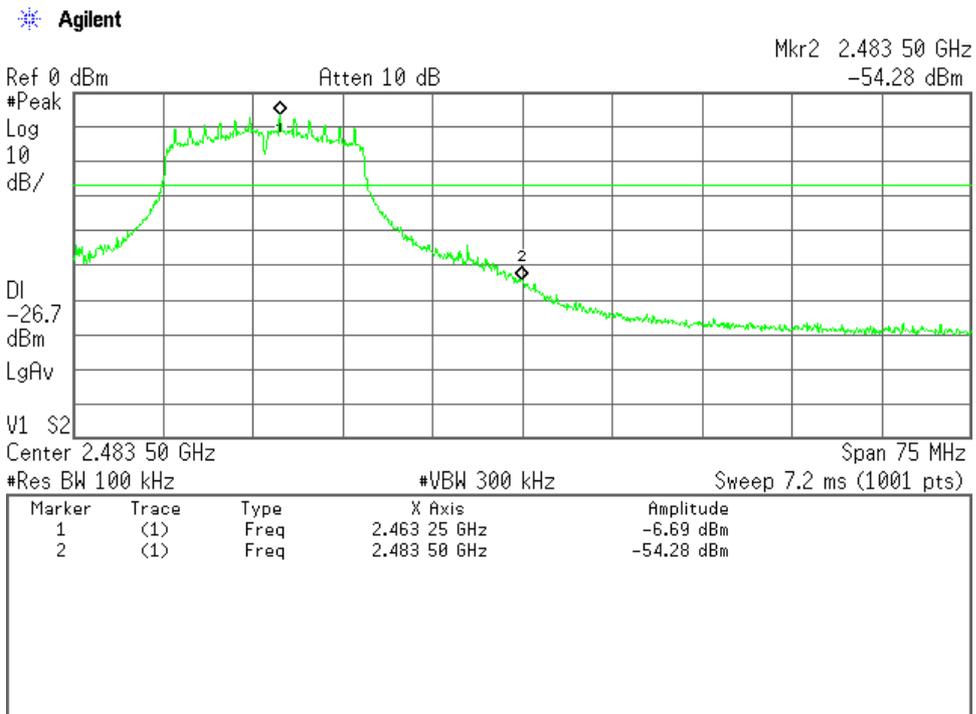

2)Data Rate : 6.5Mbps(IEEE 802.11n)  
Low Channel

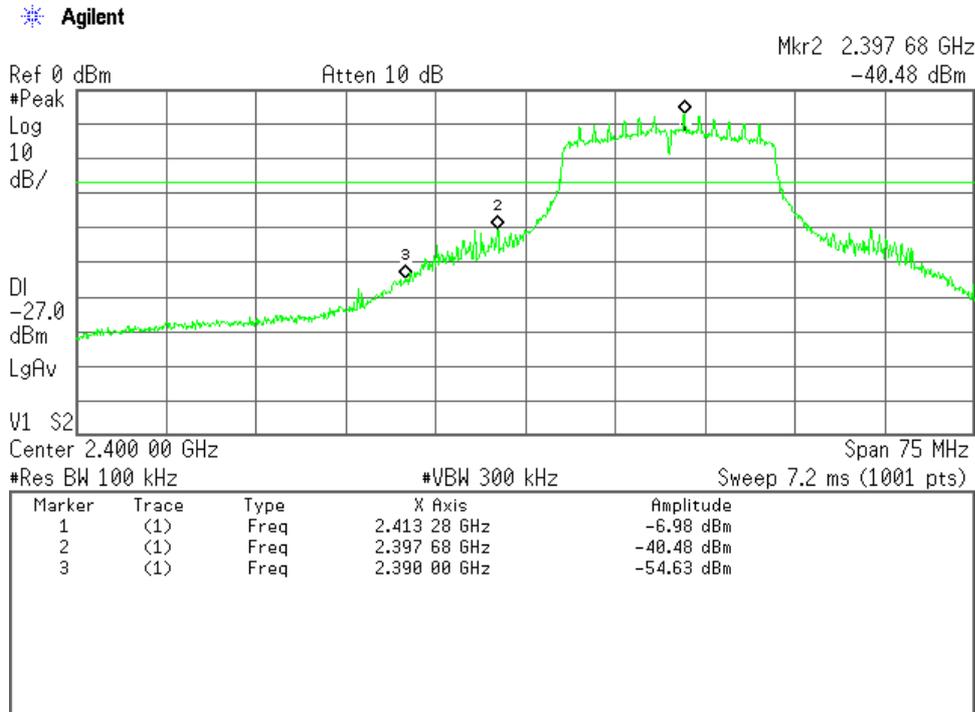

High Channel

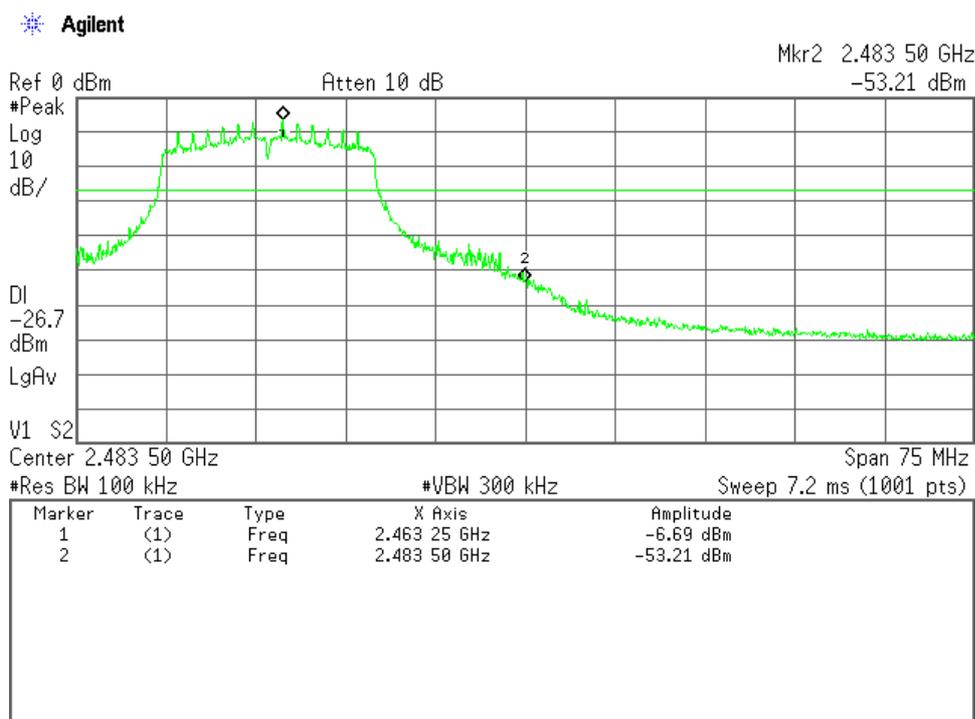


### A.8 AC Powerline Conducted Emission

Mode of EUT : All modes have been investigated and the worst case mode for channel (06ch: 2437MHz / IEEE 802.11b, IEEE 802.11g and IEEE 802.11n) has been listed.

Test Date: August 17, 2011  
Temp.: 24 °C, Humi.: 66 %

Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV)]		Results [dB(μV)]		Margin [dB]	Remarks
		VA	AVE	QB	AVE	QP	AVE	QP	AVE		
0.17	10.0	31.0	--	30.3	--	65.0	55.0	41.0	--	+24.0	-
0.21	9.9	29.3	--	26.0	--	63.2	53.2	39.2	--	+24.0	-
0.33	9.9	23.5	--	19.5	--	59.5	49.5	33.4	--	+26.1	-
0.39	9.9	25.1	--	15.9	--	58.1	48.1	35.0	--	+23.1	-
0.56	9.9	23.9	--	16.7	--	56.0	46.0	33.8	--	+22.2	-
0.67	9.9	24.1	--	18.0	--	56.0	46.0	34.0	--	+22.0	-
0.90	9.9	23.3	--	17.8	--	56.0	46.0	33.2	--	+22.8	-
1.51	10.0	20.6	--	16.8	--	56.0	46.0	30.6	--	+25.4	-
2.71	10.0	19.8	--	15.7	--	56.0	46.0	29.8	--	+26.2	-
4.89	10.1	19.6	--	16.3	--	56.0	46.0	29.7	--	+26.3	-

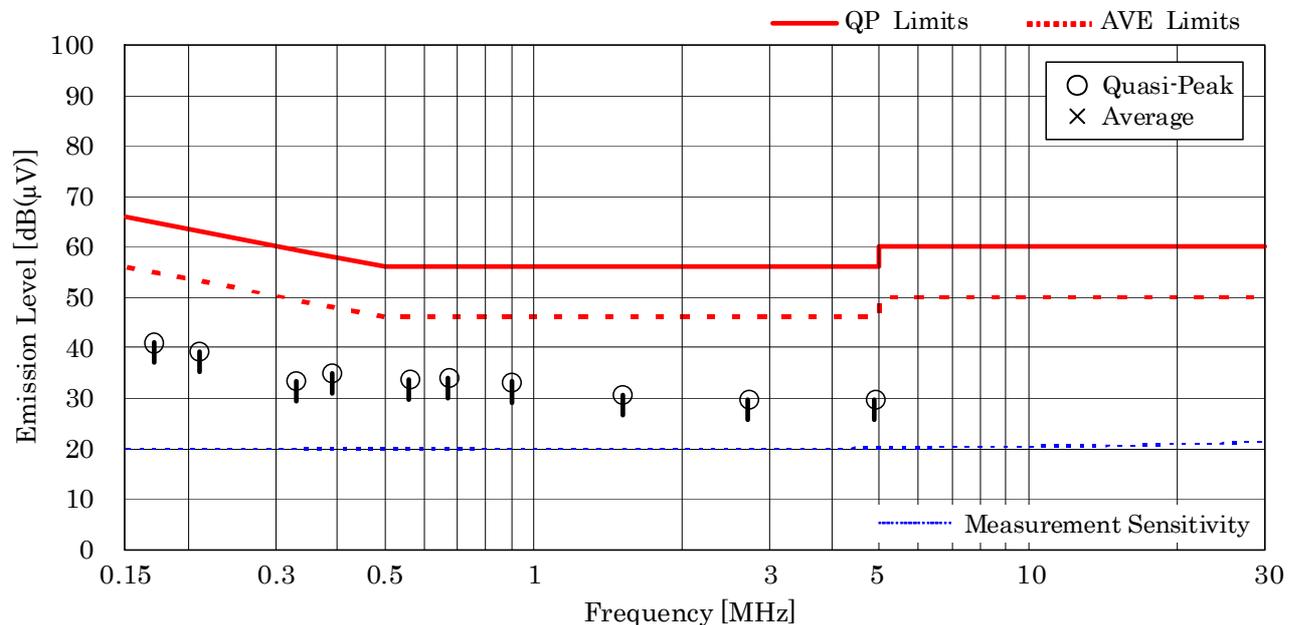

#### NOTES

1. The spectrum was checked from 0.15 MHz to 30 MHz.
2. The correction factor includes the AMN insertion loss and the cable loss.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. The symbol of "--" means "not applicable".
6. Calculated result at 0.67 MHz, as the worst point shown on underline:  
 Correction Factor + Meter Reading = 9.9 + 24.1 = 34.0 dB(μV)
7. QP : Quasi-Peak Detector / AVE : Average Detector
8. Test receiver setting(s) : CISPR QP 9 kHz / Average 9 kHz


**A.9 Field Strength of Spurious Radiation**  
**A.9.1 Band-edge Compliance**

Test Date : August 17, 2011

Temp.:25°C, Humi:61%

Mode of EUT : TX( 1ch: 2412 MHz, data rate : 1Mbps(IEEE 802.11b))


Antenna Polarization : Horizontal

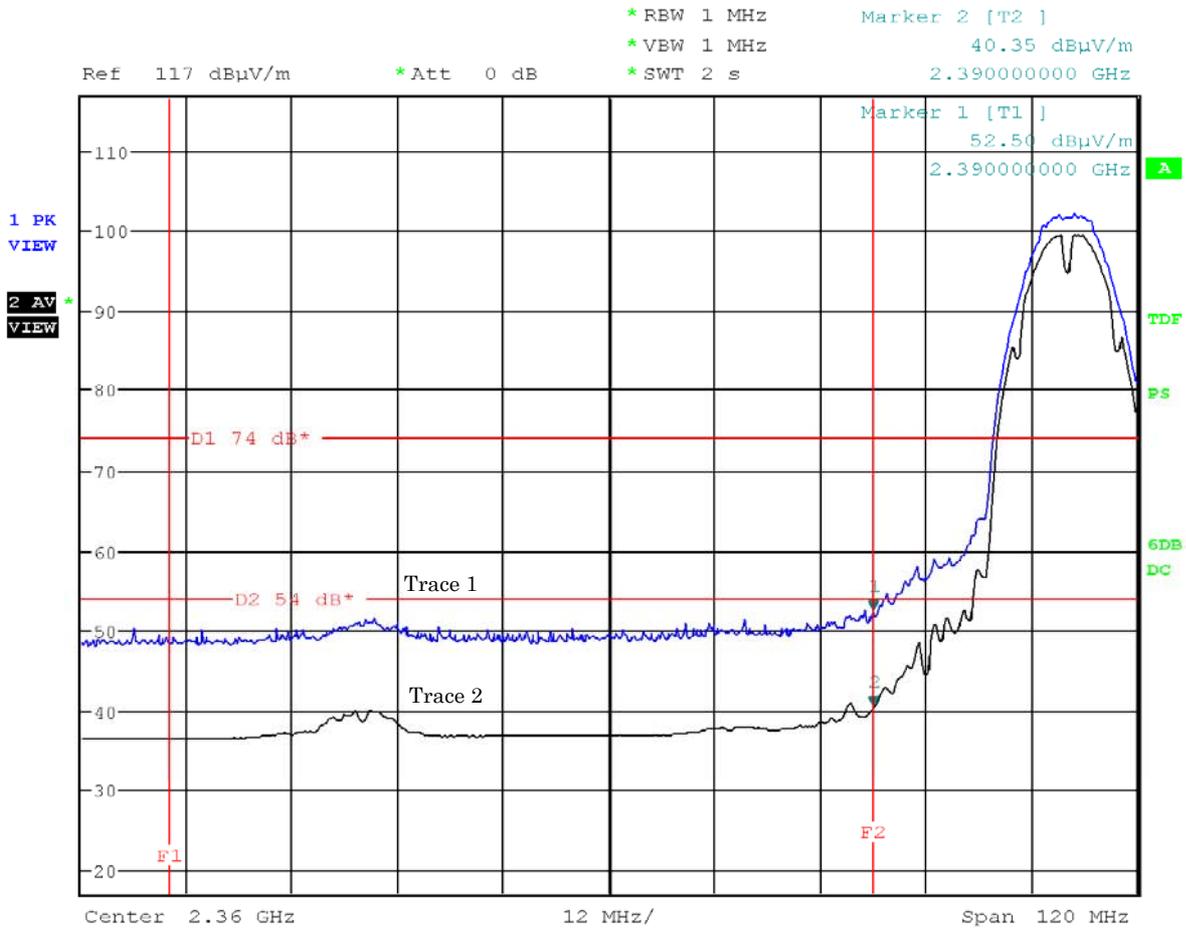

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 1ch: 2412 MHz, data rate : 1Mbps(IEEE 802.11b))


Antenna Polarization : Vertical

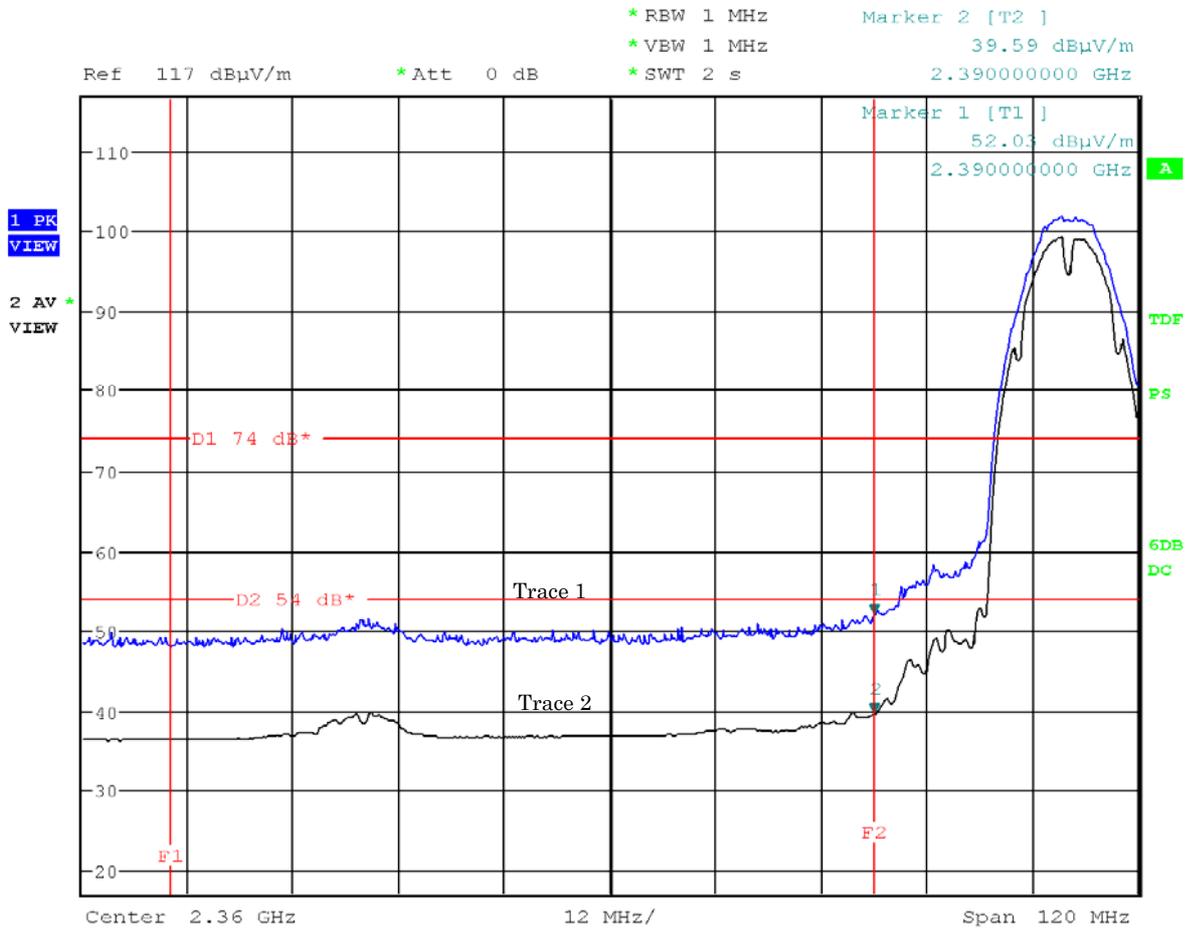

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 11ch: 2462 MHz, data rate : 1Mbps(IEEE 802.11b))


Antenna Polarization : Horizontal

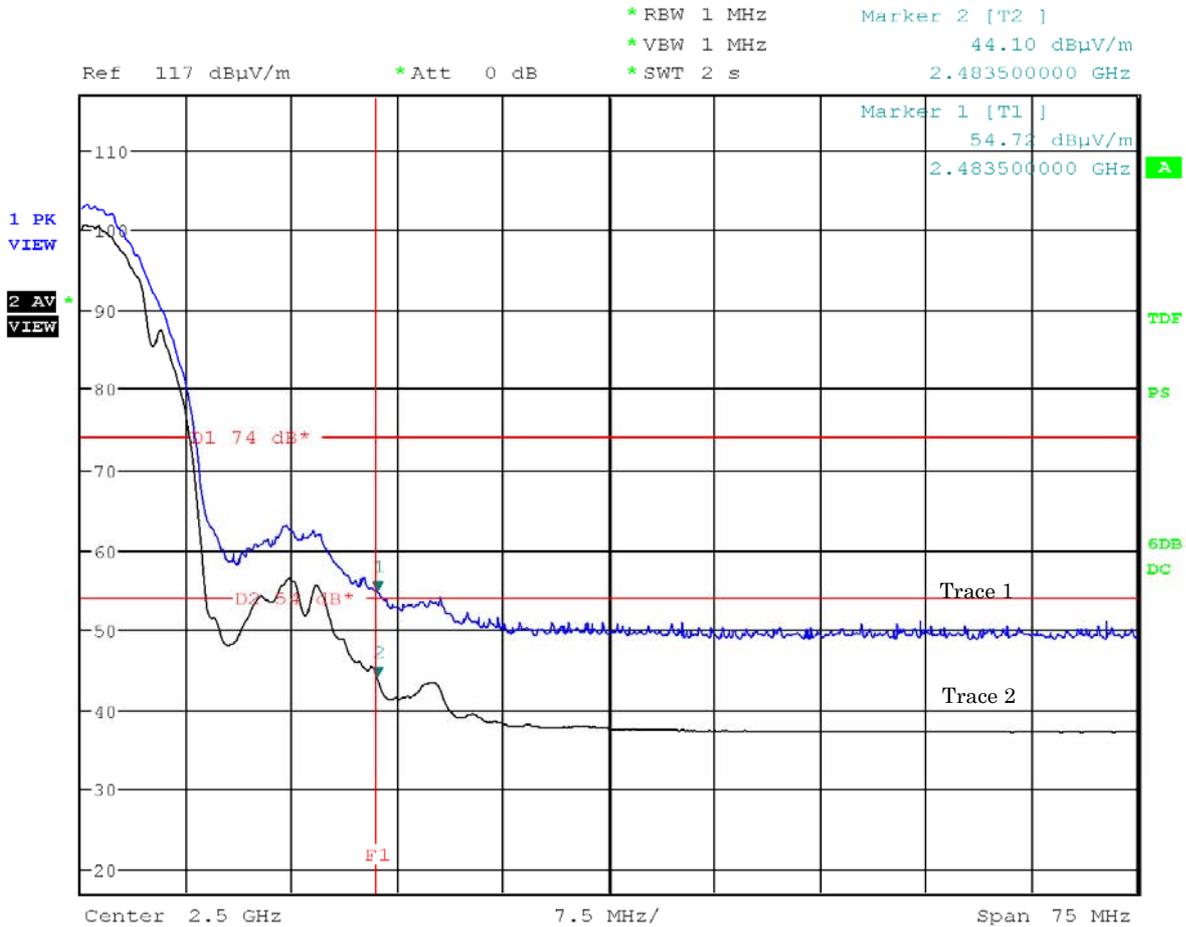

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 11ch: 2462 MHz, data rate : 1Mbps(IEEE 802.11b))


Antenna Polarization : Vertical

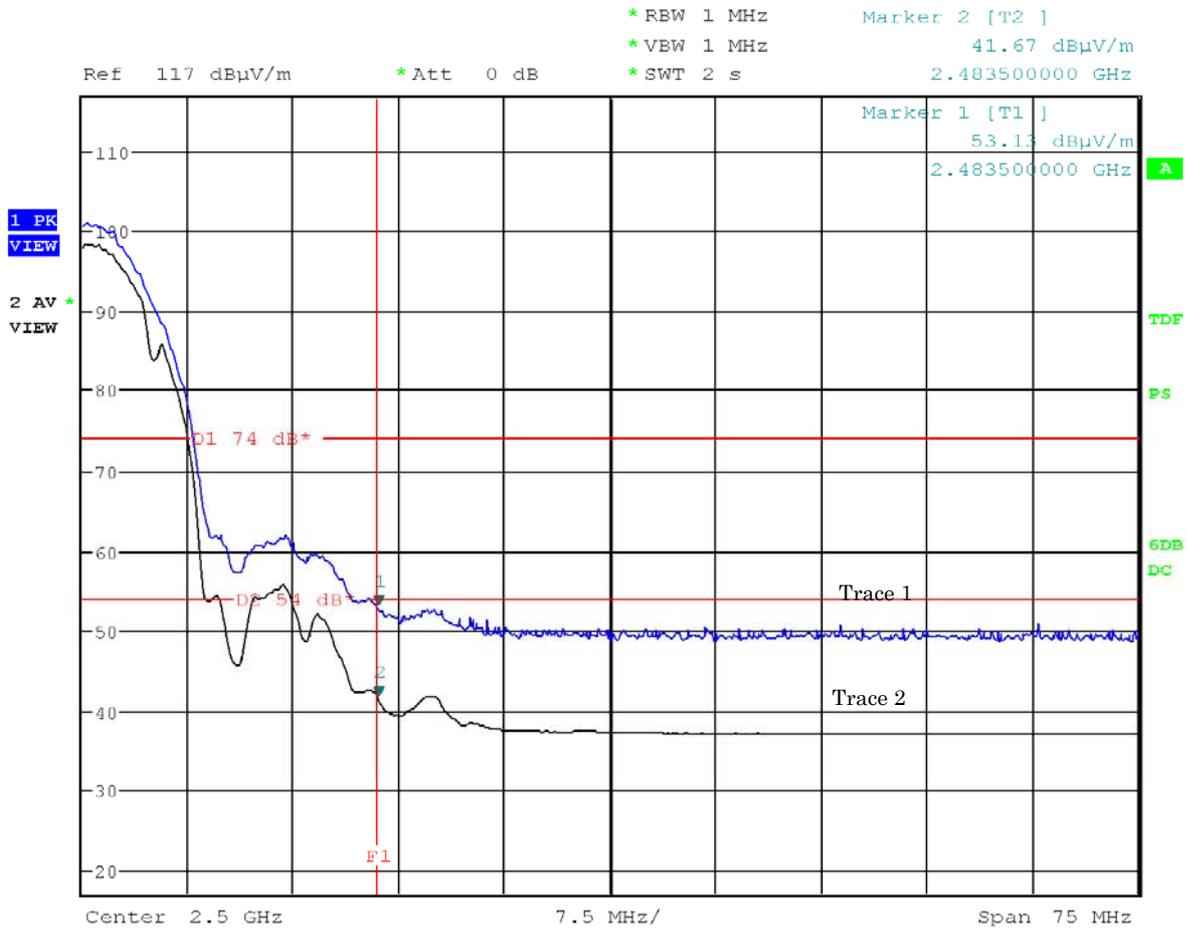

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 11ch: 2462 MHz, data rate : 5.5Mbps(IEEE 802.11b))


Antenna Polarization : Horizontal

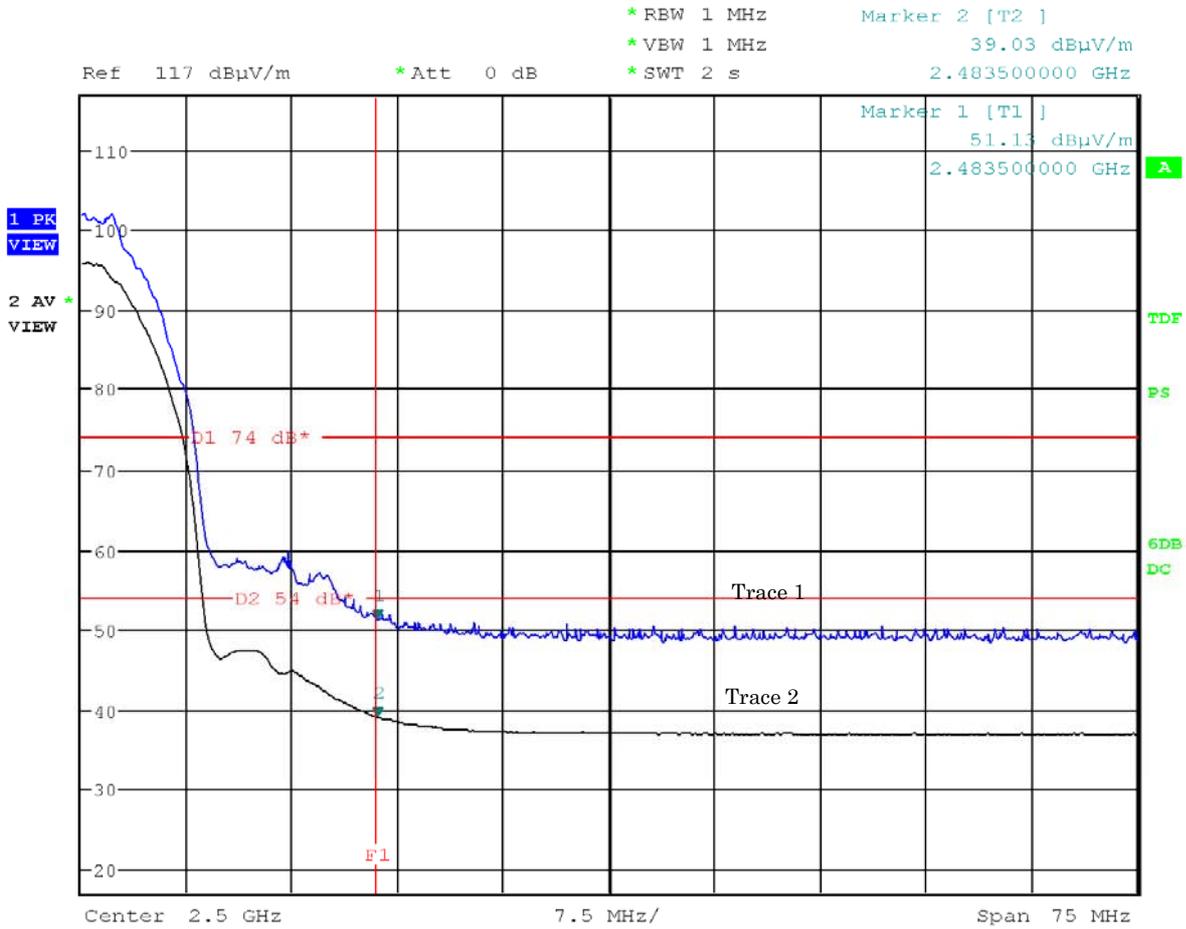

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 11ch: 2462 MHz, data rate : 5.5Mbps(IEEE 802.11b))


Antenna Polarization : Vertical

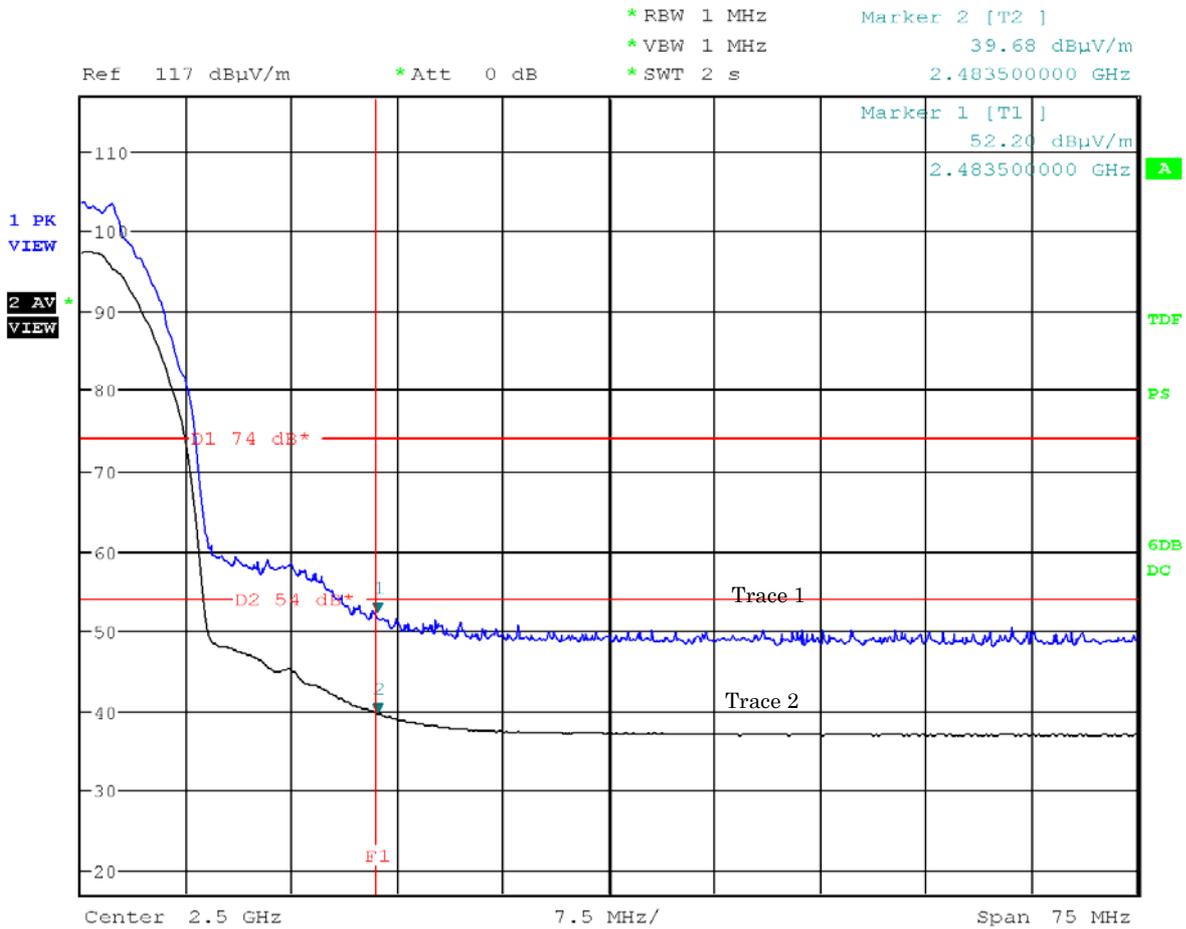

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 1ch: 2412 MHz, data rate : 6Mbps(IEEE 802.11g))


Antenna Polarization : Horizontal

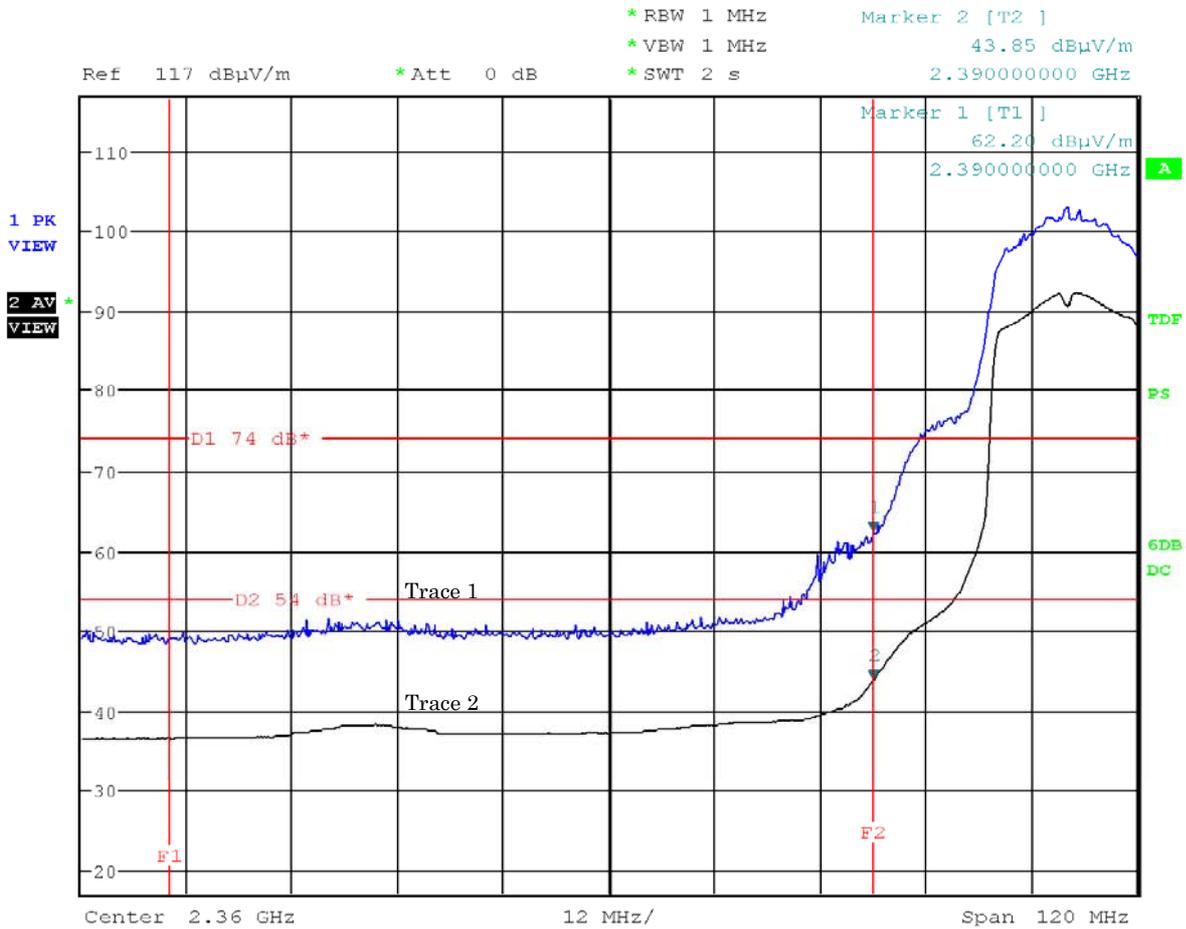

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 1ch: 2412 MHz, data rate : 6Mbps(IEEE 802.11g))


Antenna Polarization : Vertical

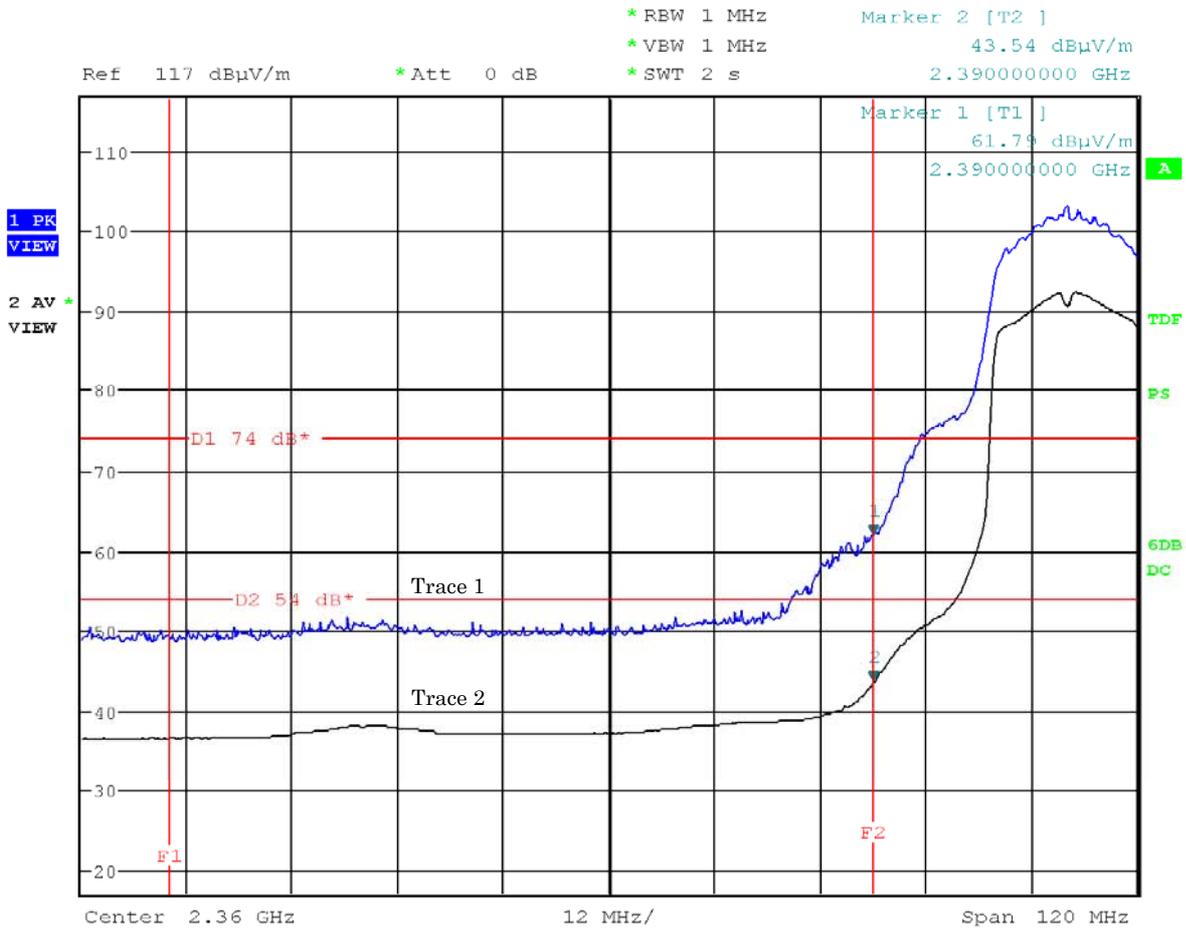

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 11ch: 2462 MHz, data rate : 6Mbps(IEEE 802.11g))


Antenna Polarization : Horizontal

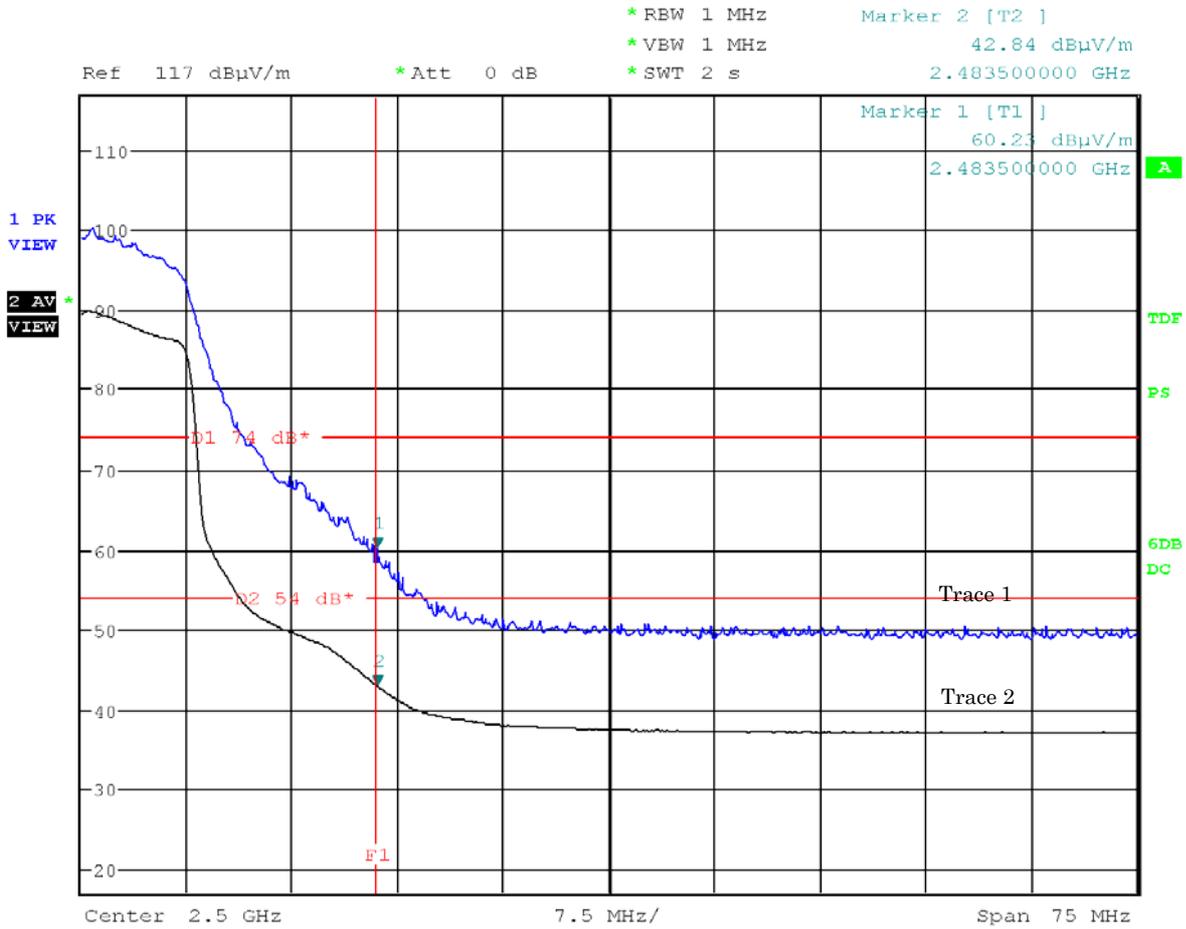

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 11ch: 2462 MHz, data rate : 6Mbps(IEEE 802.11g))


Antenna Polarization : Vertical

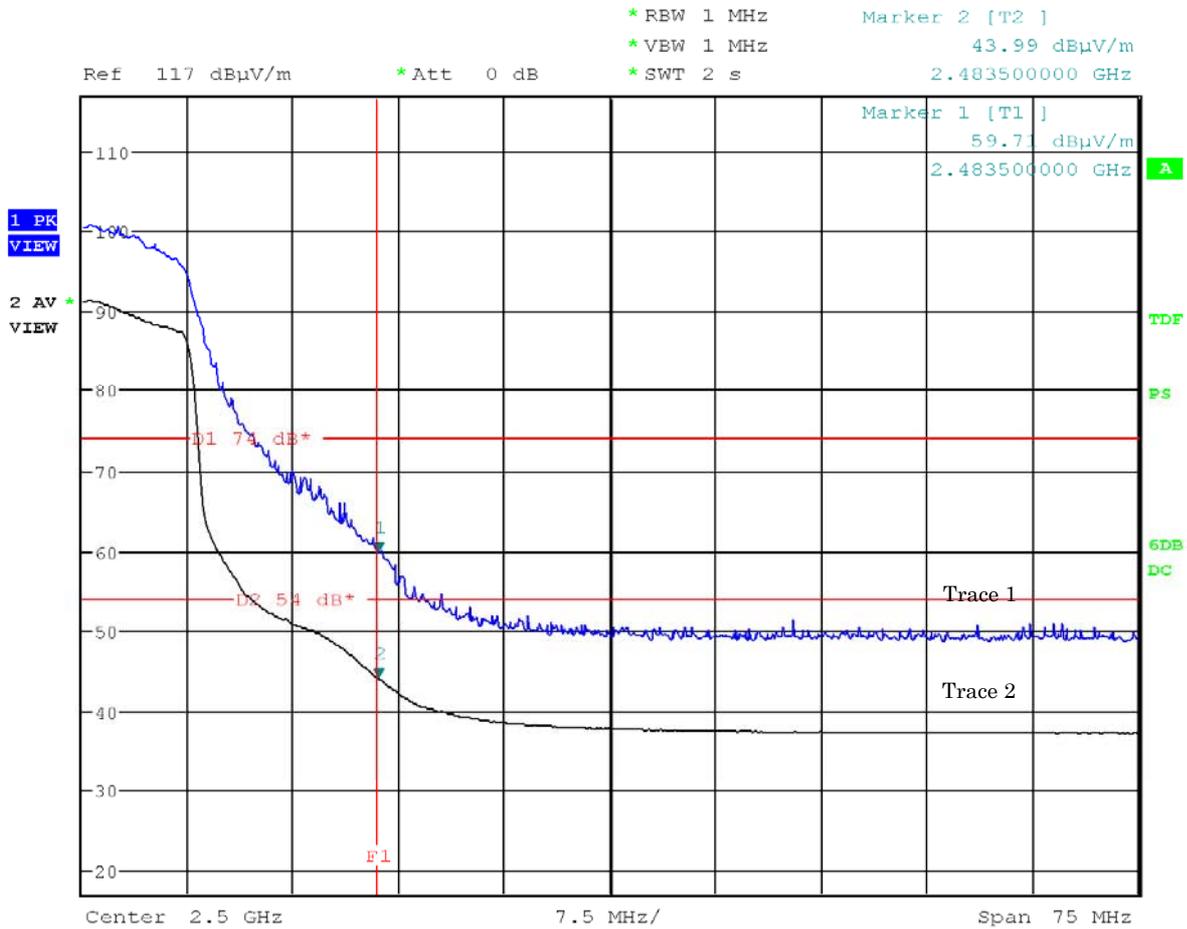

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 1ch: 2412 MHz, data rate : 6.5Mbps(IEEE 802.11n))


Antenna Polarization : Horizontal

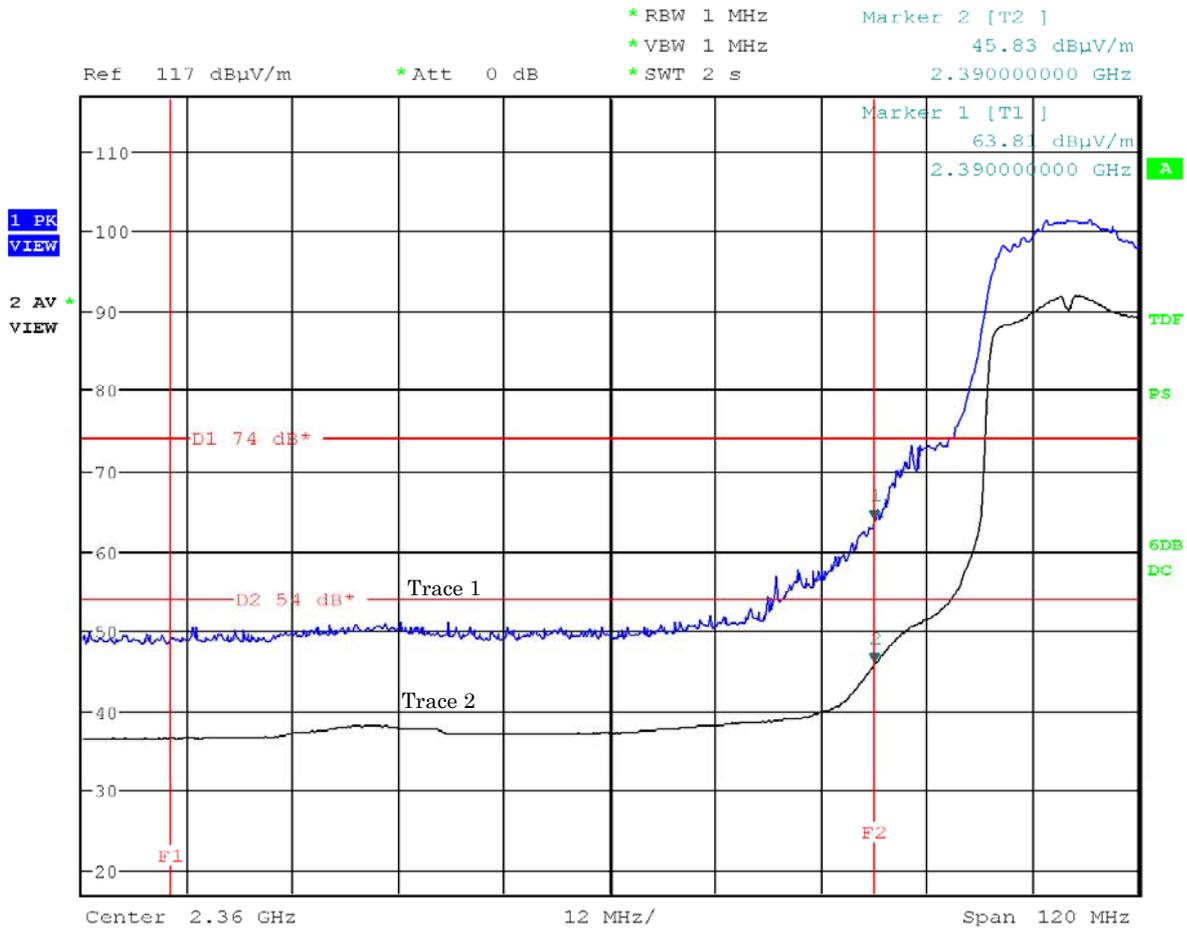

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 1ch: 2412 MHz, data rate : 6.5Mbps(IEEE 802.11n))


Antenna Polarization : Vertical

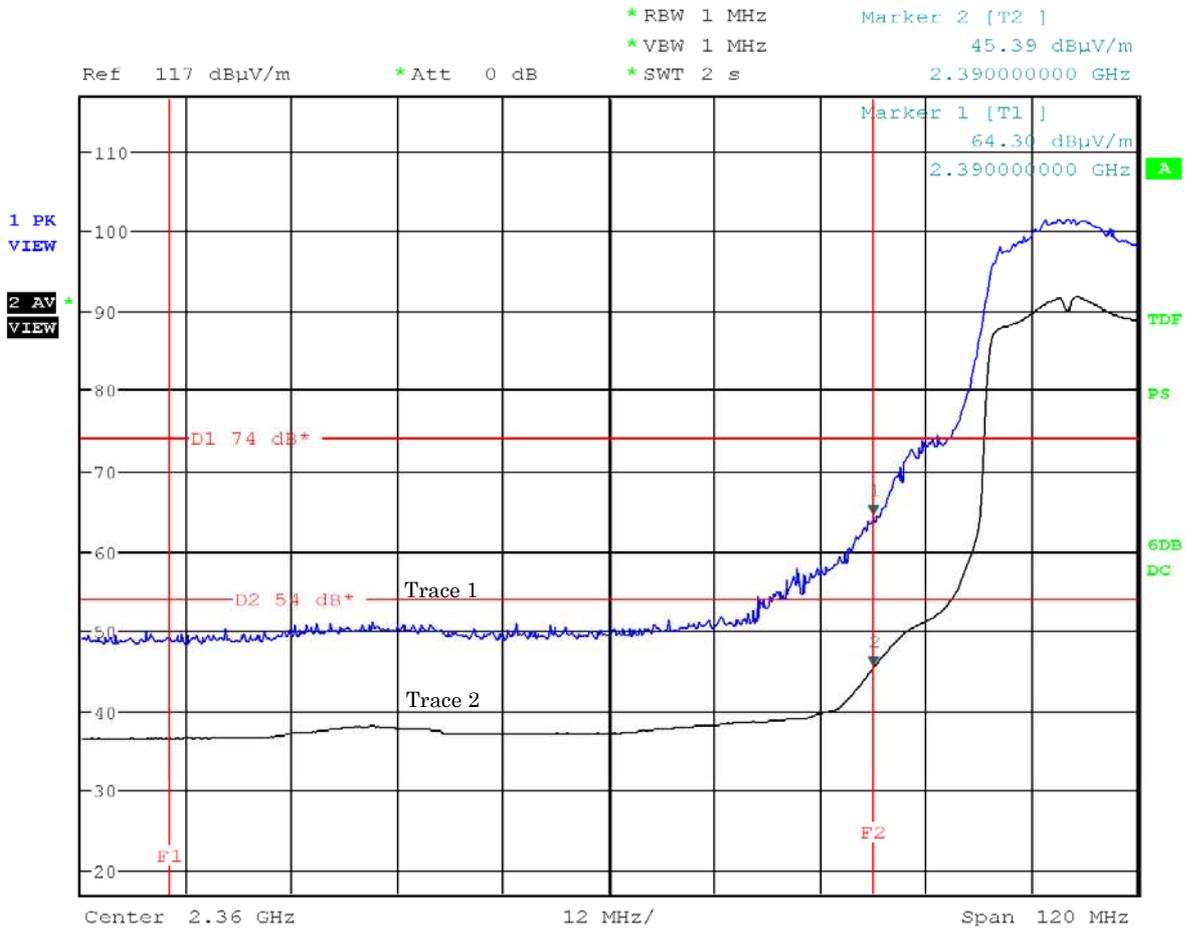

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 11ch: 2462 MHz, data rate : 6.5Mbps(IEEE 802.11n))


Antenna Polarization : Horizontal

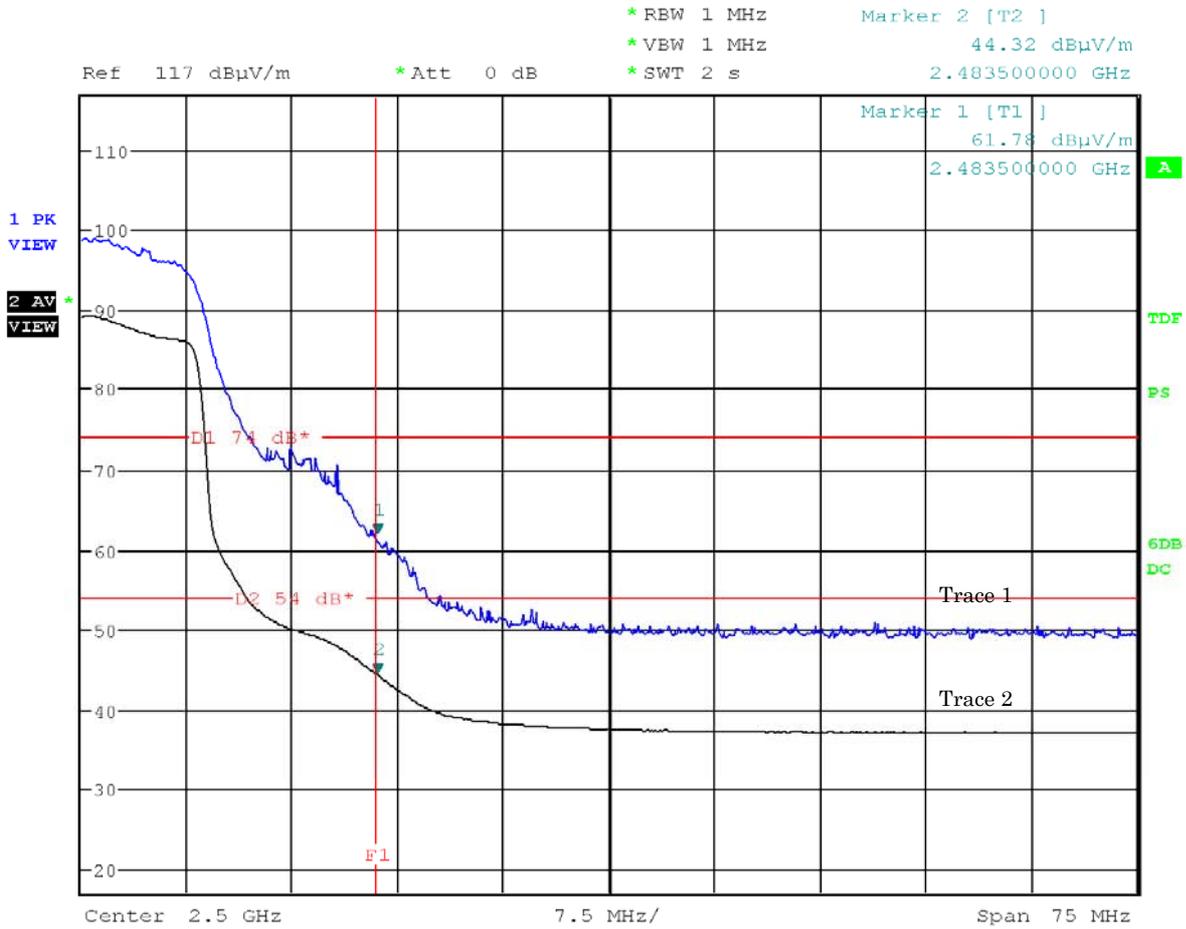

Note: The trace 1 is Peak detection. The trace 2 is Average detection.


Mode of EUT : TX( 11ch: 2462 MHz, data rate : 6.5Mbps(IEEE 802.11n))

Antenna Polarization : Vertical

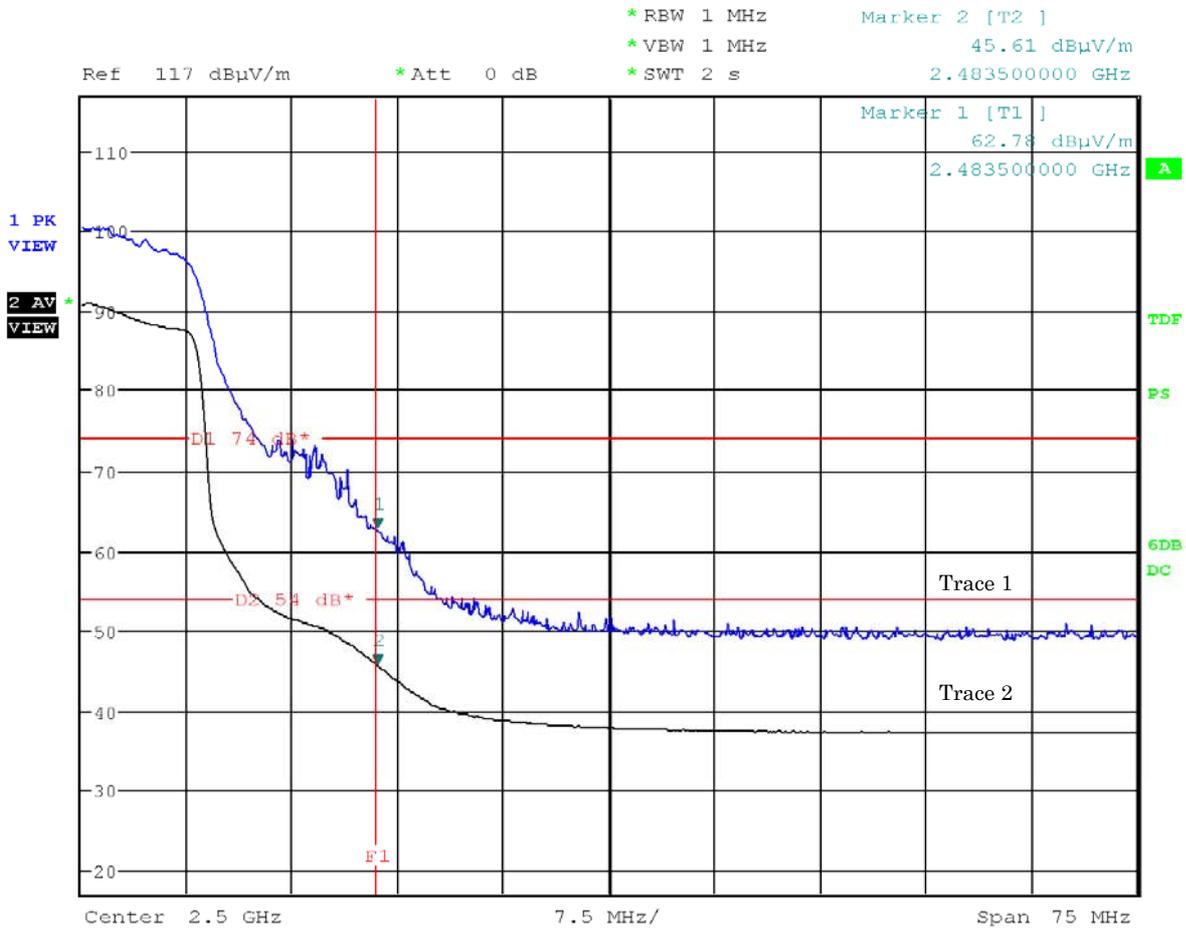

Note: The trace 1 is Peak detection. The trace 2 is Average detection.


Mode of EUT : TX( 1ch: 2412 MHz, data rate : 65Mbps(IEEE 802.11n))  
 Antenna Polarization : Horizontal

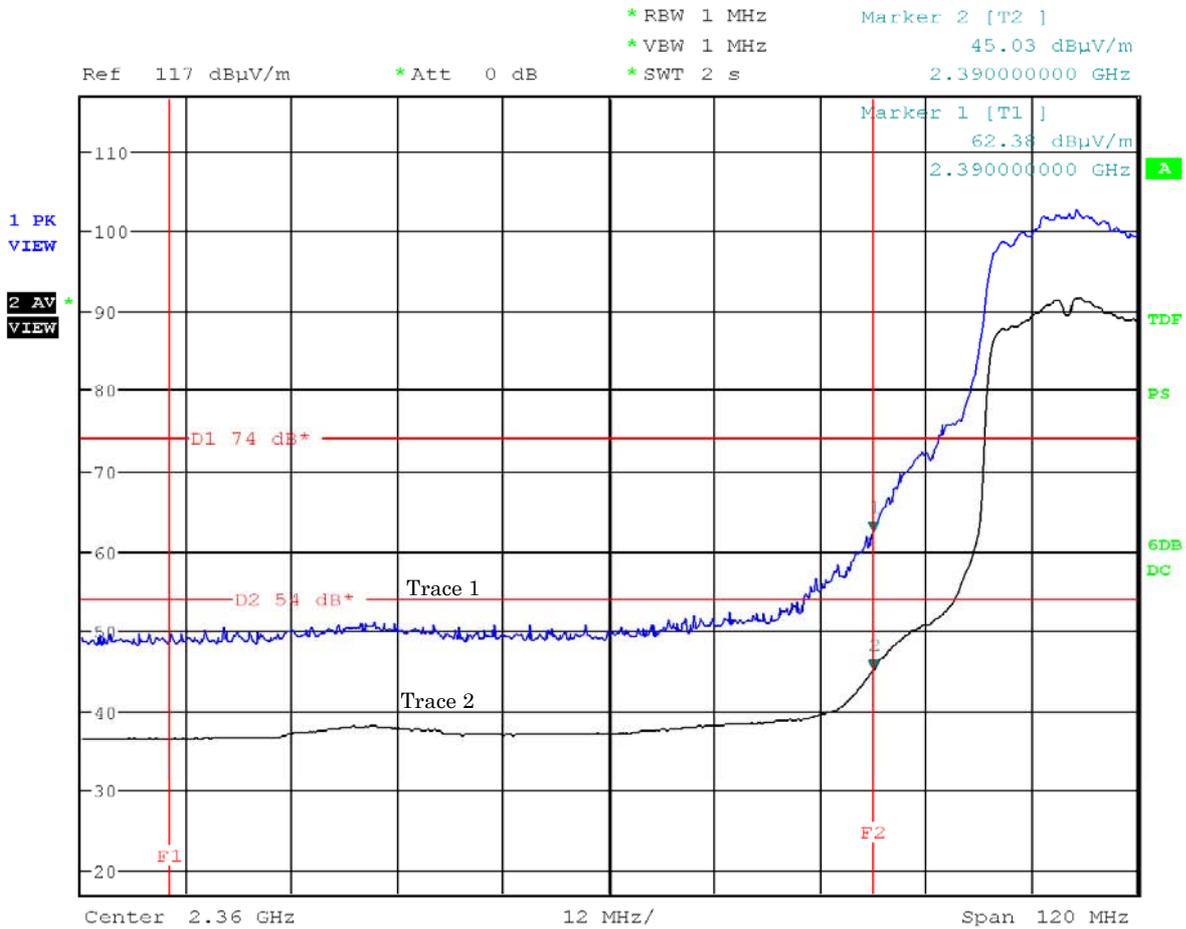

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 1ch: 2412 MHz, data rate : 65Mbps(IEEE 802.11n))

Antenna Polarization : Vertical

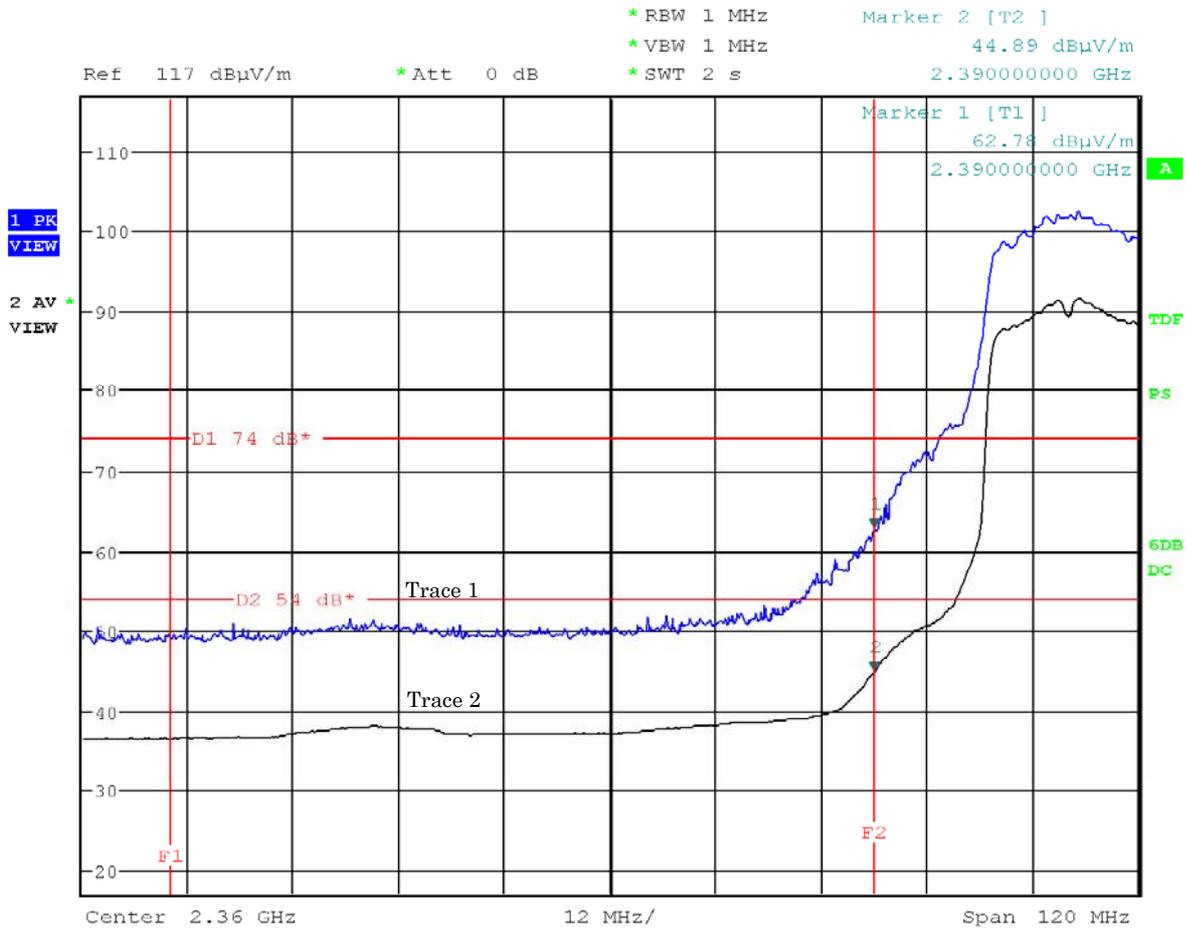

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

**A.9.2 Other Spurious Emission**

**A.9.2.1 Other Spurious Emission(9kHz – 30MHz)**

Test Date : August 17, 2011

Temp.:25°C, Humi:61%

Mode of EUT : All modes have been investigated and the worst case mode for channel (06ch: 2437MHz / IEEE802.11b, IEEE802.11g and IEEE802.11n) has been listed.

Results : No spurious emissions in the range 20dB below the limit.


**A.9.2.2 Other Spurious Emission(30MHz – 1000MHz)**

Mode of EUT : All modes have been investigated and the worst case mode for channel (06ch: 2437MHz / IEEE802.11b, IEEE802.11g and IEEE802.11n) has been listed.

Test Date: August 17, 2011

Temp.: 25 °C. Humi: 61 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Cable Loss [dB]	Meter Readings [dB(μV)]		Limits [dB(μV/m)]	Results [dB(μV/m)]		Margin [dB]	Remarks
			Hori.	Vert.		Hori.	Vert.		
42.3	14.0	0.9	2.8	12.6	40.0	17.7	27.5	+12.5	-
49.3	11.4	1.0	3.3	13.3	40.0	15.7	25.7	+14.3	-
71.4	6.6	1.2	0.1	1.3	40.0	7.9	9.1	+30.9	-
97.8	9.7	1.4	7.4	3.1	43.5	18.5	14.2	+25.0	-

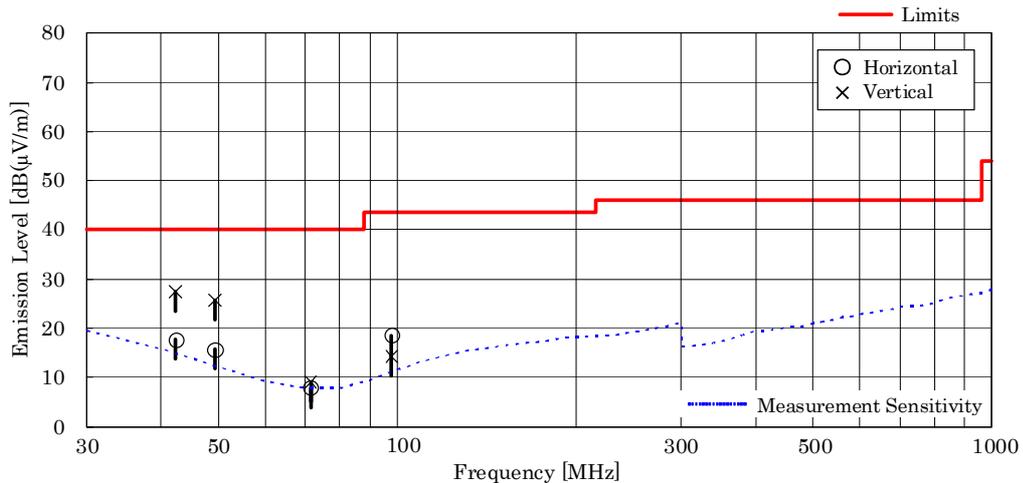

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 1000 MHz.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. Calculated result at 42.3 MHz, as the worst point shown on underline:  
Antenna Factor + Cable Loss + Meter Reading = 14.0 + 0.9 + 12.6 = 27.5 dB(μV/m)
6. Test receiver setting(s) : CISPR QP 120 kHz (QP : Quasi-Peak)

**A.9.2.3 Other Spurious Emission(Above 1000MHz)**

**A.9.2.3.1 Mode of TX**

**A.9.2.3.1.1 IEEE802.11b**

Test Date: August 17, 2011  
Temp.: 25 °C, Humi: 61 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
<b>Test condition : Tx Low Ch</b>												
4824.0	27.3	-21.1	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.2	< 36.2	> +17.8	A/B
12060.0	33.6	-25.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.7	< 37.7	> +16.3	A/B
19296.0	40.3	-21.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 58.7	< 48.7	> + 5.3	A/B
<b>Test condition : TX Middle Ch</b>												
4874.0	27.3	-21.1	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.2	< 36.2	> +17.8	A/B
7311.0	29.9	-19.4	42.8	33.3	42.1	33.1	74.0	54.0	53.3	43.8	+10.2	A/B
12185.0	33.5	-25.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.7	< 37.7	> +16.3	A/B
19496.0	40.2	-21.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 58.6	< 48.6	> + 5.4	A/B
<b>Test condition : TX High Ch</b>												
4924.0	27.3	-21.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.1	< 36.1	> +17.9	A/B
7386.0	29.9	-19.4	42.1	32.6	41.8	32.4	74.0	54.0	52.6	43.1	+10.9	A/B
12310.0	33.5	-25.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.7	< 37.7	> +16.3	A/B
19696.0	40.3	-21.4	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 58.9	< 48.9	> + 5.1	A/B
22158.0	40.3	-20.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 59.7	< 49.7	> + 4.3	A/B

Calculated result at 19696.0 MHz, as the worst point shown on underline:

Antenna Factor = 40.3 dB(1/m)  
 Corr. Factor = -21.4 dB  
 +) Meter Reading = <30.0 dB(μV)  
 Result = <48.9 dB(μV/m)

Minimum Margin: 54.0 - <48.9 = >4.3 (dB)

**NOTES**

- Test Distance : 3 m
- The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
- The correction factor is shown as follows:  
 Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)  
 Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)  
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak Detector / AVE : Average Detector
- Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	1 MHz	AUTO
B	Peak	1 MHz	10 Hz	AUTO

**A.9.2.3.1.2 IEEE802.11g**

Test Date: August 17, 2011  
 Temp.: 25 °C, Humi: 61 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
			PK	AVE	PK	AVE	PK	AVE	PK	AVE		
<b>Test condition : Tx Low Ch</b>												
4824.0	27.3	-20.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.5	< 36.5	> +17.5	A/B
12060.0	33.6	-25.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 48.0	< 38.0	> +16.0	A/B
19296.0	40.3	-21.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 58.7	< 48.7	> + 5.3	A/B
<b>Test condition : TX Middle Ch</b>												
4874.0	27.3	-20.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.5	< 36.5	> +17.5	A/B
7311.0	29.9	-19.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.9	< 40.9	> +13.1	A/B
12185.0	33.5	-25.4	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 48.1	< 38.1	> +15.9	A/B
19496.0	40.2	-21.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 58.6	< 48.6	> + 5.4	A/B
<b>Test condition : TX High Ch</b>												
4924.0	27.3	-20.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.4	< 36.4	> +17.6	A/B
7386.0	29.9	-19.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.9	< 40.9	> +13.1	A/B
12310.0	33.5	-25.4	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 48.1	< 38.1	> +15.9	A/B
19696.0	40.3	-21.4	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 58.9	< 48.9	> + 5.1	A/B
22158.0	40.3	-20.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 59.7	< 49.7	> + 4.3	A/B

Calculated result at 19696.0 MHz, as the worst point shown on underline:

Antenna Factor	=	40.3 dB(1/m)
Corr. Factor	=	-21.4 dB
+ ) Meter Reading	=	<30.0 dB(μV)
Result	=	<48.9 dB(μV/m)

Minimum Margin: 54.0 - <48.9 = >4.3 (dB)

**NOTES**

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
3. The correction factor is shown as follows:  
 Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)  
 Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)  
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	1 MHz	AUTO
B	Peak	1 MHz	10 Hz	AUTO

**A.9.2.3.1.3 IEEE802.11n**

Test Date: August 17, 2011

Temp.: 25 °C, Humi: 61 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
			PK	AVE	PK	AVE						
<b>Test condition : Tx Low Ch</b>												
4824.0	27.3	-20.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.5	< 36.5	> +17.5	A/B
12060.0	33.6	-25.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 48.0	< 38.0	> +16.0	A/B
19296.0	40.3	-21.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 58.7	< 48.7	> + 5.3	A/B
<b>Test condition : TX Middle Ch</b>												
4874.0	27.3	-20.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.5	< 36.5	> +17.5	A/B
7311.0	29.9	-19.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.9	< 40.9	> +13.1	A/B
12185.0	33.5	-25.4	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 48.1	< 38.1	> +15.9	A/B
19496.0	40.2	-21.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 58.6	< 48.6	> + 5.4	A/B
<b>Test condition : TX High Ch</b>												
4924.0	27.3	-20.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.4	< 36.4	> +17.6	A/B
7386.0	29.9	-19.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.9	< 40.9	> +13.1	A/B
12310.0	33.5	-25.4	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 48.1	< 38.1	> +15.9	A/B
19696.0	40.3	-21.4	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 58.9	< 48.9	> + 5.1	A/B
22158.0	40.3	-20.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 59.7	< 49.7	> + 4.3	A/B

Calculated result at 19696.0 MHz, as the worst point shown on underline:

Antenna Factor	=	40.3 dB(1/m)
Corr. Factor	=	-21.4 dB
+ ) Meter Reading	=	<30.0 dB(μV)
Result	=	<48.9 dB(μV/m)

Minimum Margin: 54.0 - <48.9 = >4.3 (dB)

**NOTES**

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
3. The correction factor is shown as follows:  
 Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)  
 Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)  
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	1 MHz	AUTO
B	Peak	1 MHz	10 Hz	AUTO

**A.9.2.3.2 Mode of RX**

Test Date: August 17, 2011

Temp.: 25 °C, Humi: 61 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
			PK	AVE	PK	AVE	PK	AVE	PK	AVE		
<b>Test condition : RX Middle Ch</b>												
2437.0	21.4	-22.2	40.7	30.5	40.7	< 30.0	74.0	54.0	39.9	29.7	+24.3	A/B
4874.0	27.3	-21.4	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 45.9	< 35.9	> +18.1	A/B
7311.0	29.9	-19.7	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.2	< 40.2	> +13.8	A/B

Calculated result at 4874.0 MHz, as the worst point shown on underline:

Antenna Factor = 27.3 dB(1/m)

Corr. Factor = -21.4 dB

+ ) Meter Reading = <30.0 dB(μV)

Result = <35.9 dB(μV/m)

Minimum Margin: 54.0 - <35.9 = >13.8 (dB)

**NOTES**

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
3. The correction factor is shown as follows:  
Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	1 MHz	AUTO
B	Peak	1 MHz	10 Hz	AUTO

## Appendix B: Test Arrangement (Photographs)

### B.1 AC Powerline Conducted Emission

*This page is CONFIDENTIAL.*

## B.2 Radiated Emission

*This page is CONFIDENTIAL.*

**Appendix C: Test Instruments**

**C.1 Channel Separation**

Not Applicable

**C.2 Minimum Hopping Channel**

Not Applicable

**C.3 Occupied Bandwidth**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2010/9	1 Year
Attenuator	54A-10	Weinschel	D-29	2010/10	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2011/6	1 Year

**C.4 Dwell Time**

Not Applicable

**C.5.1 Peak Output Power (Conduction)**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Power Meter	ML2495A	Anritsu	100-02-507E0	2010/12	1 Year
Power Sensor	MA2491A	Anritsu	100-02-507E0	2010/12	1 Year
Attenuator	54A-10	Weinschel	D-29	2010/10	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2011/6	1 Year

**C.5.2 Peak Output Power Density (Conduction)**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2010/9	1 Year
Attenuator	54A-10	Weinschel	D-29	2010/10	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2011/6	1 Year

**C.6 Spurious Emission (Conduction)**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2010/9	1 Year
Attenuator	54A-10	Weinschel	D-29	2010/10	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2011/6	1 Year

**C.7 AC Power Conducted Emission**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESCI 7	Rohde & Schwarz	A-8	2011/1	1 Year
AMN (main)	KNW-407R	Kyoritsu	D-39	2010/9	1 Year
Attenuator	MP721C	Anritsu	D-105	2010/9	1 Year
RF Cable	5D-2W	FUJIKURA	H-33	2011/6	1 Year

**C.8 Radiated Emission**

**C.8.1 Radiated Emission 9 kHz – 30 MHz**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESCI 7	Rohde & Schwarz	A-8	2011/1	1 Year
Loop Antenna	HFH2-Z2	Rohde & Schwarz	C-2	2011/8	1 Year
RF Cable	RG213/U	SUHNER	H-28	2011/8	1 Year

**C.8.2 Radiated Emission 30MHz – 1000 MHz**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESCI 7	Rohde & Schwarz	A-8	2011/1	1 Year
Biconical Antenna	VHA9103/BBA9106	Schwarzbeck	C-30	2011/5	1 Year
Log-periodic Antenna	UHALP9108-A1	Schwarzbeck	C-31	2011/5	1 Year
RF Cable	S 10162 B-11 etc.	SUHNER	H-4	2011/3	1 Year
Site Attenuation	--	----	H-15	2011/2	1 Year

**C.8.3 Radiated Emission Above 1000 MHz**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESU 26	Rohde & Schwarz	A-6	2011/5	1 Year
RF Cable	SUCOFLEX104	SUHNER	C-40-11	2010/12	1 Year
RF Cable	SUCOFLEX104	SUHNER	C-40-14	2010/12	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-54	2010/12	1 Year
RF Cable	SUCOFLEX102EA	SUHNER	C-69	2010/12	1 Year
Attenuator	2-10	Weinschel	D-79	2010/10	1 Year
Attenuator	54-10	Weinschel	D-28	2010/9	1 Year
Pre-Amplifier	WJ-6611-513	Watkins Johnson	A-23	2010/12	1 Year
Pre-Amplifier	WJ-6882-824	Watkins Johnson	A-21	2010/12	1 Year
Pre-Amplifier	DBL-0618N515	DBS Microwave	A-33	2010/12	1 Year
Pre-Amplifier	BZ1804LD1	B&T Technologies	A-29	2010/12	1 Year
Band Rejection Filter	BRM50701	MICRO-TRONICS	D-93	2011/2	1 Year
Horn Antenna	91888-2	EATON	C-41-1	2011/6	1 Year
Horn Antenna	91889-2	EATON	C-41-2	2011/6	1 Year
Horn Antenna	3160-05	EMCO	C-55	2011/6	2 Years
Horn Antenna	3160-06	EMCO	C-57	2011/6	2 Years
Horn Antenna	3160-07	EMCO	C-58	2011/6	2 Years
Horn Antenna	3160-08	EMCO	C-59	2011/6	2 Years
Horn Antenna	3160-09	EMCO	C-48	2011/6	2 Years