



Product Service

**Choose certainty.
Add value.**

Report On

FCC Testing of the
Sharp 204SH Quad-band WCDMA (FDD I / FDD V / FDD VIII / FDD XI)
Cellular Phone with Bluetooth, WLAN and GPS
In accordance with FCC CFR 47 Part 15C (Bluetooth)

COMMERCIAL-IN-CONFIDENCE

FCC ID: APYHRO00188

Document 75921586 Report 09 Issue 1

March 2013



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North, Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuv-sud.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ON

FCC Testing of the
Sharp 204SH Quad-band WCDMA (FDD I / FDD V / FDD VIII / FDD XI) Cellular Phone with Bluetooth, WLAN and GPS
In accordance with FCC CFR 47 Part 15C (Bluetooth)

Document 75921586 Report 09 Issue 1

March 2013

PREPARED FOR

Sharp Communication Compliance Ltd
Azure House
Bagshot Road
Bracknell
Berkshire
RG12 7QY

PREPARED BY

Natalie Bennett
Senior Administrator (Technical)

APPROVED BY

Mark Jenkins
Authorised Signatory

DATED

26 March 2013

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 15C. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

R Henley

G Lawler



M Russell



CONTENTS

Section	Page No
1	REPORT SUMMARY 3
1.1	Introduction 4
1.2	Brief Summary of Results 5
1.3	Application Form 6
1.4	Product Information 11
1.5	Test Conditions 11
1.6	Deviations from the Standard 11
1.7	Modification Record 11
2	TEST DETAILS 12
2.1	AC Line Conducted Emissions 13
2.2	Frequency Hopping Systems - 20dB Bandwidth and Channel Separation 16
2.3	Frequency Hopping Systems - Channel Dwell Time and Number of Hopping Channels 24
2.4	Maximum Peak Conducted Output Power 31
2.5	EIRP Peak Power 33
2.6	Spurious and Band Edge Emissions 37
3	TEST EQUIPMENT USED 56
3.1	Test Equipment Used 57
3.2	Measurement Uncertainty 59
4	ACCREDITATION, DISCLAIMERS AND COPYRIGHT 60
4.1	Accreditation, Disclaimers and Copyright 61



Product Service

SECTION 1

REPORT SUMMARY

FCC Testing of the
Sharp 204SH Quad-band WCDMA (FDD I / FDD V / FDD VIII / FDD XI) Cellular Phone with
Bluetooth, WLAN and GPS
In accordance with FCC CFR 47 Part 15C (Bluetooth)



Product Service

1.1 INTRODUCTION

The information contained in this report is intended to show verification of the FCC Testing of the Sharp 204SH Quad-band WCDMA (FDD I / FDD V / FDD VIII / FDD XI) Cellular Phone with Bluetooth, WLAN and GPS to the requirements of FCC CFR 47 Part 15C.

Objective	To perform FCC Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Sharp Corporation
Model Number(s)	204SH
Serial Number(s)	IMEI 004401114727312 IMEI 004401114727056
Number of Samples Tested	2
Test Specification/Issue/Date	FCC CFR 47 Part 15C (2012)
Incoming Release Date	Application Form 01 March 2013
Disposal Reference Number Date	Held Pending Disposal Not Applicable Not Applicable
Order Number Date	9557 27 February 2013
Start of Test	2 March 2013
Finish of Test	7 March 2013
Name of Engineer(s)	R Henley G Lawler M Russell
Related Document(s)	ANSI C63.10: 2009



1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC CFR 47 Part 15C is shown below.

Section	Spec Clause	Test Description	Result	Comments/Base Standard
Bluetooth				
2.1	15.207	AC Line Conducted Emissions	Pass	
2.2	15.247 (a)(1)	Frequency Hopping Systems - 20dB Bandwidth and Channel Separation	Pass	
2.3	15.247 (a)(1)(iii)	Frequency Hopping Systems - Channel Dwell Time and Number of Hopping Channels	Pass	
2.4	15.247 (b)(3)	Maximum Peak Conducted Output Power	Pass	
2.5	15.247 (b)(4)	EIRP Peak Power	Pass	
2.6	15.247 (d)	Spurious and Band Edge Emissions	Pass	



Product Service

1.3 APPLICATION FORM

EQUIPMENT DESCRIPTION	
Model Name/Number	204SH
Part Number	
FCC ID (if applicable)	APYHRO00188
Industry Canada ID (if applicable)	
Technical Description (Please provide a brief description of the intended use of the equipment)	Quad-band WCDMA (FDD I / FDD V / FDD VIII / FDD XI) Cellular Phone with Bluetooth, WLAN and GPS

EXTREME TEMPERATURE RANGE over which the equipment is to be type tested	
<input type="checkbox"/> -20°C to +55°C	
<input checked="" type="checkbox"/> Other (2)	
<input type="checkbox"/> Not applicable (no extreme temperature testing required)	
Extreme temperature range for the host(s):	10C to 55C

- (2) The equipment shall be tested over the following temperature ranges :
- a) 0°C to +35°C for equipment for indoor use only, or intended for used in areas where the temperature is controlled within this range.
 - b) Over the extremes of the temperature range(s) of the declared host equipment(s) in case of plug-in radio devices.

TYPE OF ANTENNA	
<input checked="" type="checkbox"/> Integral	
Temporary RF connector provided:	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
<input type="checkbox"/> Antenna connector	
<input type="checkbox"/> Number of antenna assembly(ies) submitted	
Gain of the antenna intended for normal use:	
0 dBi for assembly identified as Bluetooth/WLAN	
dBi for assembly identified as	

TRANSMITTER TECHNICAL CHARACTERISTICS		
TRANSMITTER OPERATING FREQUENCY RANGE(S)		
	FCC and/or Industry Canada	EU
Bluetooth	2402 to 2480 MHz	2402 to 2480 MHz
WLAN	2412 to 2462 MHz	2412 to 2472 MHz
FCC and/or Industry Canada (only)		
Highest Internally Generated Frequency 1400 MHz		



SPREAD SPECTRUM PARAMETERS		
<input checked="" type="checkbox"/> Bluetooth	Version: 3.0 (H/W : 2.1+EDR)	
FHSS: Channel <input checked="" type="checkbox"/> 79 Other	EDR <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	
Medium Access Protocol (Customer Declaration)		
"We have implemented Bluetooth protocol which satisfies the medium access protocol requirement of EN 300 328".		
<input checked="" type="checkbox"/> WLAN		
IEEE 802.11(b) – DSSS	<input checked="" type="checkbox"/>	
IEEE 802.11(g) – OFDM	<input checked="" type="checkbox"/>	
IEEE 802.11(n) – OFDM	<input checked="" type="checkbox"/>	
Supported Spatial Streams	2.4 GHz	5GHz
Transmitter (Tx)	1	0
Receiver (Rx)	1	0
GI (Guard Interval)	<input checked="" type="checkbox"/> 800 ns	<input type="checkbox"/> 400 ns
Band Width	<input checked="" type="checkbox"/> 20 MHz	<input type="checkbox"/> 40 MHz
Medium Access Protocol (Customer Declaration)		
"We have implemented IEEE 802.11 (b/g/n) protocol which satisfies the medium access protocol requirement of EN 300 328".		
<input type="checkbox"/> Other Technology		
<input type="checkbox"/> Direct Sequence	<input type="checkbox"/> Frequency Hopping	<input type="checkbox"/> Combined <input type="checkbox"/> Other
DSSS	Chip Sequence Length	bit
	Spectrum Width	MHz
FHSS	Total Number of Hops	
	Dwell Time	ms
	Bandwidth Per Hop	MHz
	Maximum Separation of Hops	MHz for ETSI EN 300 328
Other		
Medium Access Protocol (Customer Declaration)		
"We have implemented a protocol which satisfies the medium access protocol requirement of EN 300 328".		



TRANSMITTER POWER CHARACTERISTICS				
Bluetooth				
Maximum Rated Transmitter Output				
Effective radiated power (for equipment with antenna connector)				W
Effective radiated power (for equipment with integral antenna)	2.5m			W
Minimum Rated Transmitter Output				
Effective radiated power (for equipment with antenna connector)				W
Effective radiated power (for equipment with integral antenna)	0.25m			W
Is transmitter intended for :				
Continuous duty		<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/> No
Intermittent duty		<input type="checkbox"/>	Yes	<input type="checkbox"/> No
If intermittent state DUTY CYCLE				
Transmitter ON	seconds	Transmitter OFF		minutes
Is continuous operation possible for testing purposes?				
		<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/> No
Is transmitter output power variable:				
		<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/> No
State during the test:				
Transmitter duty cycle	Tx on	Seconds	Tx Off	Seconds
Duty cycle (Tx on / (Tx on + Tx off))				
		%		
<input type="checkbox"/> Continuously variable		<input type="checkbox"/> Stepped		
	dB per step			
WLAN				
Maximum Rated Transmitter Output				
Effective radiated power (for equipment with antenna connector)				W
Effective radiated power (for equipment with integral antenna)	0.1			W
Minimum Rated Transmitter Output				
Effective radiated power (for equipment with antenna connector)				W
Effective radiated power (for equipment with integral antenna)				W
Is transmitter intended for :				
Continuous duty		<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/> No
Intermittent duty		<input type="checkbox"/>	Yes	<input type="checkbox"/> No
If intermittent state DUTY CYCLE				
Transmitter ON	seconds	Transmitter OFF		minutes
Is continuous operation possible for testing purposes?				
		<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/> No
Is transmitter output power variable:				
		<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/> No
State during the test:				
Transmitter duty cycle	Tx on	Seconds	Tx Off	Seconds
Duty cycle (Tx on / (Tx on + Tx off))				
		%		
<input type="checkbox"/> Continuously variable		<input type="checkbox"/> Stepped		
	dB per step			



Product Service

TRANSMITTER POWER SOURCE (3)			
<input checked="" type="checkbox"/> Common power source for transmitter and receiver			
<input type="checkbox"/> AC mains			
AC supply frequency	(Hz)	State voltage VAC	Max Current Hz
<input type="checkbox"/> Single phase		<input type="checkbox"/> Three phase	
And / Or			
<input type="checkbox"/> External DC supply			
Nominal voltage		Max Current A	
Extreme upper voltage		Extreme lower voltage	
Battery			
<input type="checkbox"/> Nickel Cadmium			
<input type="checkbox"/> Lead acid (Vehicle regulated)			
<input type="checkbox"/> Alkaline			
<input checked="" type="checkbox"/> Lithium			
<input type="checkbox"/> Other Details :			
4.0 Volts nominal.			
End point voltage as quoted by equipment manufacturer		3.7 V	

(3) If a transmitter and receiver use the same power source, this should be declared. In such cases only the box for the transmitter power source should be filled in.

AUTOMATIC EQUIPMENT SWITCH OFF	
If the equipment is designed to automatically switch off at a predetermined voltage level which is higher or lower in value than the battery minimum and minimum calculated values this shall be clearly stated.	
<input checked="" type="checkbox"/> Applies	3.35 V cut-off voltage
<input type="checkbox"/> Does not apply	



Product Service

RECEIVER POWER SOURCE (4)				
<input type="checkbox"/> AC mains		State voltage		
AC supply frequency	(Hz)	VAC	Max Current	Hz
<input type="checkbox"/> Single phase		<input type="checkbox"/> Three phase		
And / Or				
<input type="checkbox"/> External DC supply				
Nominal voltage		Max Current		A
Extreme upper voltage		Extreme lower voltage		
Battery				
<input type="checkbox"/> Nickel Cadmium				
<input type="checkbox"/> Lead acid (Vehicle regulated)				
<input type="checkbox"/> Alkaline				
<input type="checkbox"/> Lithium				
<input type="checkbox"/> Other Details :				
	Volts nominal.			
End point voltage as quoted by equipment manufacturer				V

(4) If a transmitter and receiver use the same power source, this should be declared. In such cases only the box for the transmitter power source should be filled in.

AUTOMATIC EQUIPMENT SWITCH OFF	
If the equipment is designed to automatically switch off at a predetermined voltage level which is higher or lower in value than the battery minimum and minimum calculated values this shall be clearly stated.	
<input type="checkbox"/> Applies	V cut-off voltage
<input type="checkbox"/> Does not apply	

I hereby declare that I am entitled to sign on behalf of the applicant and that the information supplied is correct and complete.

Signature:  Name: Hiroyuki Uwatoko
 Position held: Junior Manager Date: 01st March, 2013



Product Service

1.4 PRODUCT INFORMATION

1.4.1 Technical Description

The Equipment Under Test (EUT) was a Sharp 204SH Quad-band WCDMA (FDD I / FDD V / FDD VIII / FDD XI) Cellular Phone with Bluetooth, WLAN and GPS. A full technical description can be found in the manufacturer's documentation.

1.5 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 4.0 V DC supply.

FCC Accreditation
90987 Octagon House, Fareham Test Laboratory

1.6 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standard or test plan were made during testing.

1.7 MODIFICATION RECORD

Modification 0 - No modifications were made to the test sample during testing.



Product Service

SECTION 2

TEST DETAILS

FCC Testing of the
Sharp 204SH Quad-band WCDMA (FDD I / FDD V / FDD VIII / FDD XI) Cellular Phone with
Bluetooth, WLAN and GPS
In accordance with FCC CFR 47 Part 15C (Bluetooth)



2.1 AC LINE CONDUCTED EMISSIONS

2.1.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.207

2.1.2 Equipment Under Test and Modification State

204SH S/N: IMEI 004401114727312 - Modification State 0

2.1.3 Date of Test

6 March 2013

2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.5 Test Procedure

The EUT is set up on a test table 800mm above a horizontal ground plane. A vertical ground plane is also required and is placed 400mm from the EUT. Where a EUT is floor standing it will be stood on but insulated from the ground plane by up to 12mm.

The EUT is powered through a Line Impedance Stabilisation Network (LISN) which is bonded to the ground plane. The EUT is located so that the distance between the EUT and the LISN is no less than 800mm. Where possible the cable between the mains input of the EUT and the LISN is 1m. Where this is not possible the cable is non inductively bundled with the bundle not exceeding 400mm in length.

A preliminary profile of the Conducted Emissions is obtained over the frequency range 150kHz to 30MHz. Any points of interest are noted for formal measurements.

During formal measurements, the measuring receiver is tuned to the emission of interest where Quasi – Peak and Average measurements are performed in a 9kHz Video and Resolution Bandwidth.


2.1.6 Environmental Conditions

Ambient Temperature	18.8°C
Relative Humidity	35.0%



2.1.7 Test Results


Live Line

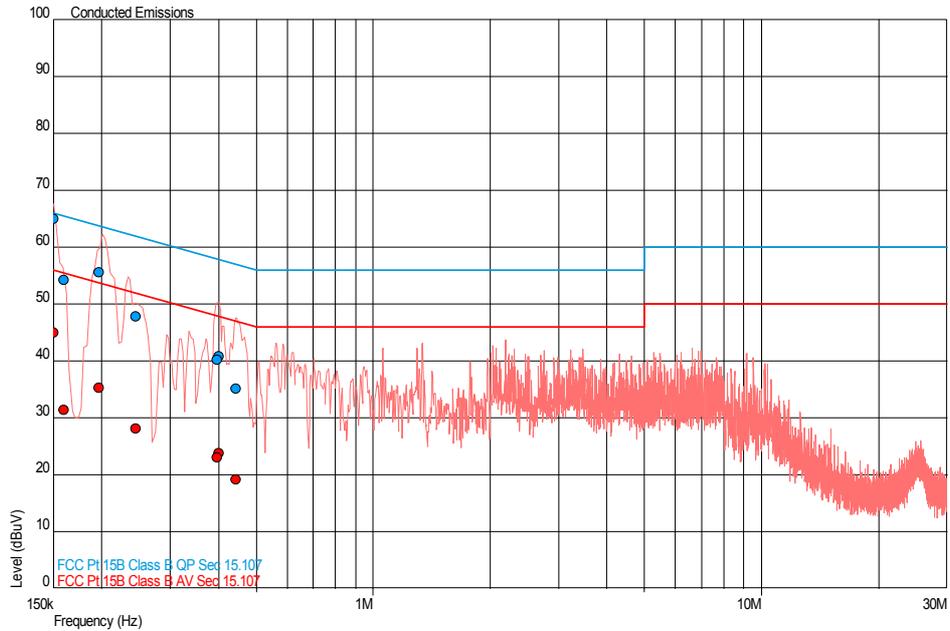

Frequency (MHz)	QP Level (dBμV)	QP Limit (dBμV)	QP Margin (dBμV)	AV Level (dBμV)	AV Limit (dBμV)	AV Margin (dBμV)
0.150	65.1	66.0	-0.9	44.9	56.0	-11.1
0.160	54.3	65.5	-11.2	31.5	55.5	-24.0
0.197	55.5	63.7	-8.2	35.4	53.7	-18.4
0.244	47.8	61.9	-14.1	28.1	51.9	-23.8
0.396	40.3	57.9	-17.7	23.1	47.9	-24.9
0.401	40.8	57.8	-17.0	23.8	47.8	-24.0
0.443	35.2	57.0	-21.8	19.1	47.0	-27.9



Neutral Line

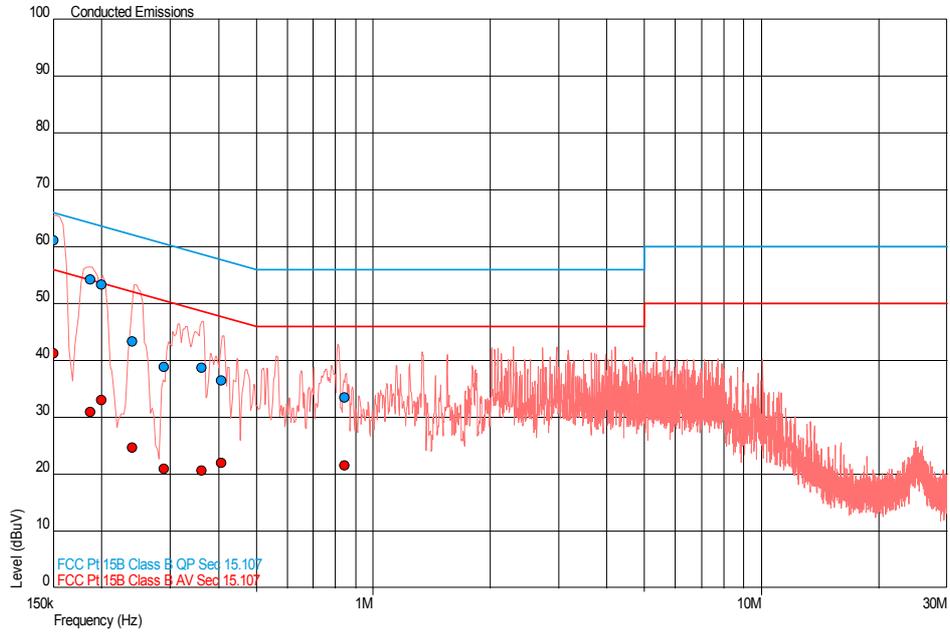

Frequency (MHz)	QP Level (dBuV)	QP Limit (dBuV)	QP Margin (dBuV)	AV Level (dBuV)	AV Limit (dBuV)	AV Margin (dBuV)
0.151	61.2	66.0	-4.8	41.3	56.0	-14.7
0.187	54.2	64.2	-10.0	31.0	54.2	-23.2
0.199	53.3	63.6	-10.3	33.0	53.6	-20.6
0.240	43.3	62.1	-18.8	24.6	52.1	-27.5
0.289	38.9	60.6	-21.7	20.9	50.6	-29.6
0.362	38.7	58.7	-20.0	20.6	48.7	-28.1
0.406	36.6	57.7	-21.2	22.0	47.7	-25.8
0.843	33.5	56.0	-22.5	21.5	46.0	-24.5



Product Service

2.2 FREQUENCY HOPPING SYSTEMS - 20DB BANDWIDTH AND CHANNEL SEPARATION

2.2.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.247 (a)(1)

2.2.2 Equipment Under Test and Modification State

204SH S/N: IMEI 004401114727056 - Modification State 0

2.2.3 Date of Test

6 March 2013

2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.5 Test Procedure

The EUT was transmitted at maximum power via a cable to the Spectrum Analyser. The Analyser settings were adjusted to display the resultant trace on screen. The peak point of the trace was measured and the markers positioned to give the -20dBc points of the displayed spectrum.

The EUT was transmitted at maximum power into a Spectrum Analyser. The trace was set to Max Hold to store several adjacent channels on screen. Using the marker delta function, the markers were positioned to show the separation between adjacent channels.

2.2.6 Environmental Conditions

Ambient Temperature	23.7°C
Relative Humidity	28.9%



Product Service

2.2.7 Test Results


4.0 V DC Supply

20dB Bandwidth

2402 MHz

Data Rate (Mbps)	20dB Bandwidth (kHz)
DH1	956.8
DH3	966.4
DH5 (worst)	963.2

DH1

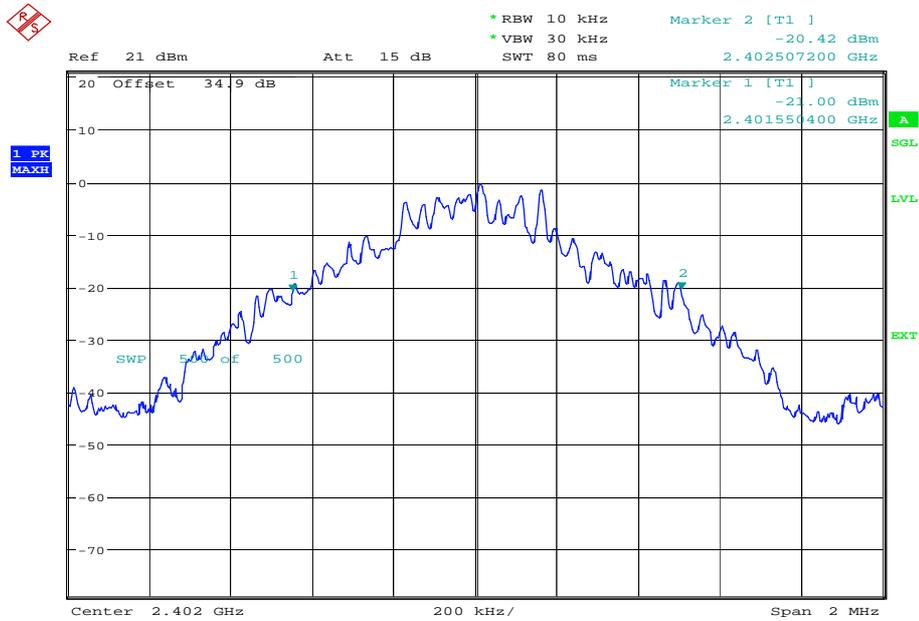


Date: 6.MAR.2013 15:12:03




Product Service

DH3

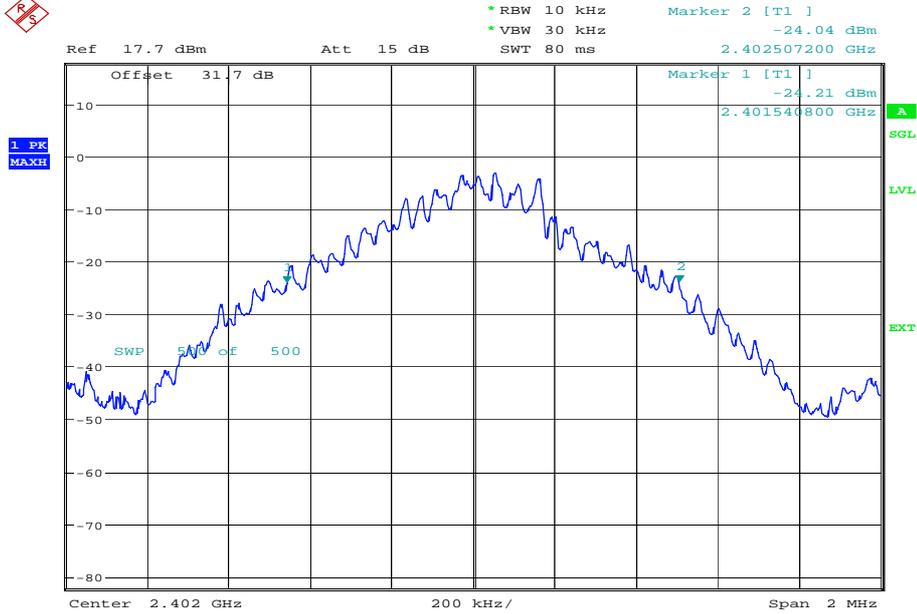

Date: 6.MAR.2013 15:27:01

DH5 (worst)

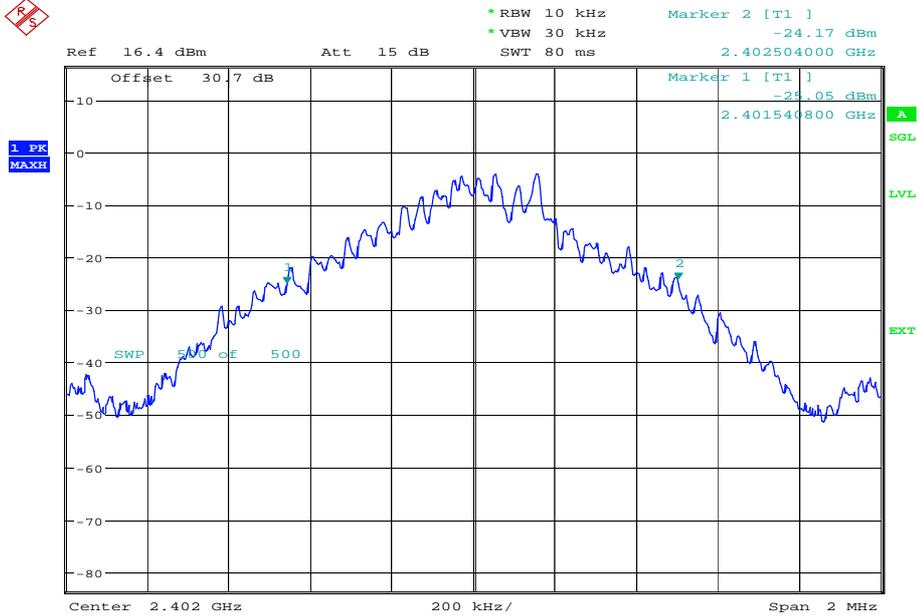

Date: 6.MAR.2013 15:39:19



Product Service

2441 MHz

Data Rate (Mbps)	20dB Bandwidth (kHz)
DH1	960.0
DH3	963.2
DH5 (worst)	960.0

DH1




Date: 6.MAR.2013 17:05:45




Product Service

DH3

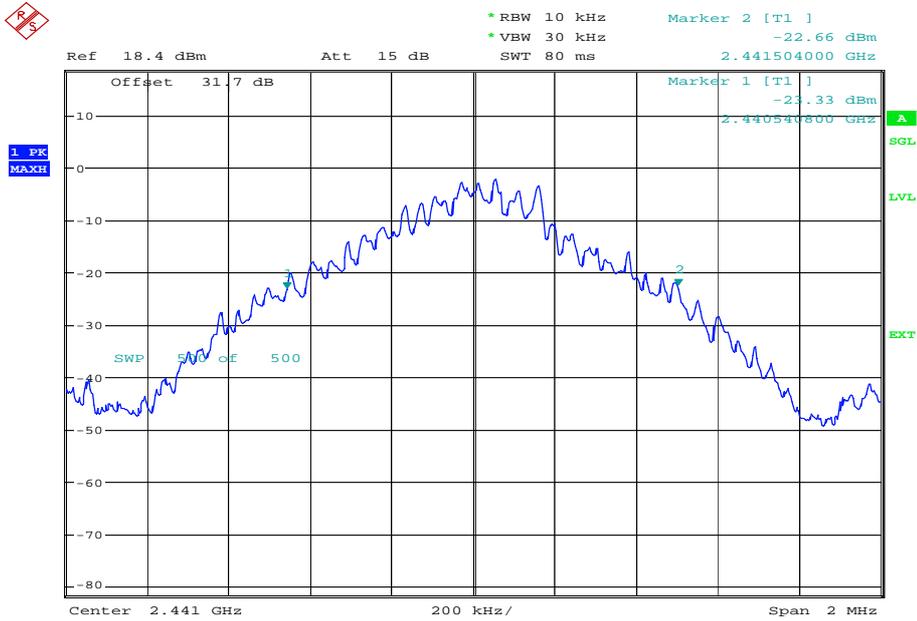

Date: 6.MAR.2013 15:29:30

DH5 (worst)

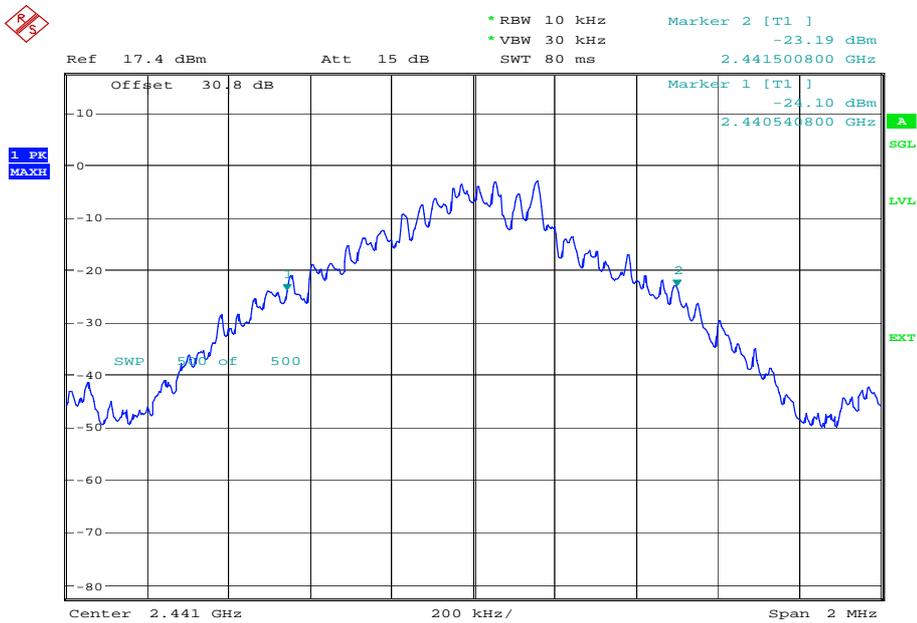

Date: 6.MAR.2013 15:54:29




Product Service

2480 MHz

Data Rate (Mbps)	20dB Bandwidth (kHz)
DH1	960.0
DH3	966.4
DH5 (worst)	963.2

DH1

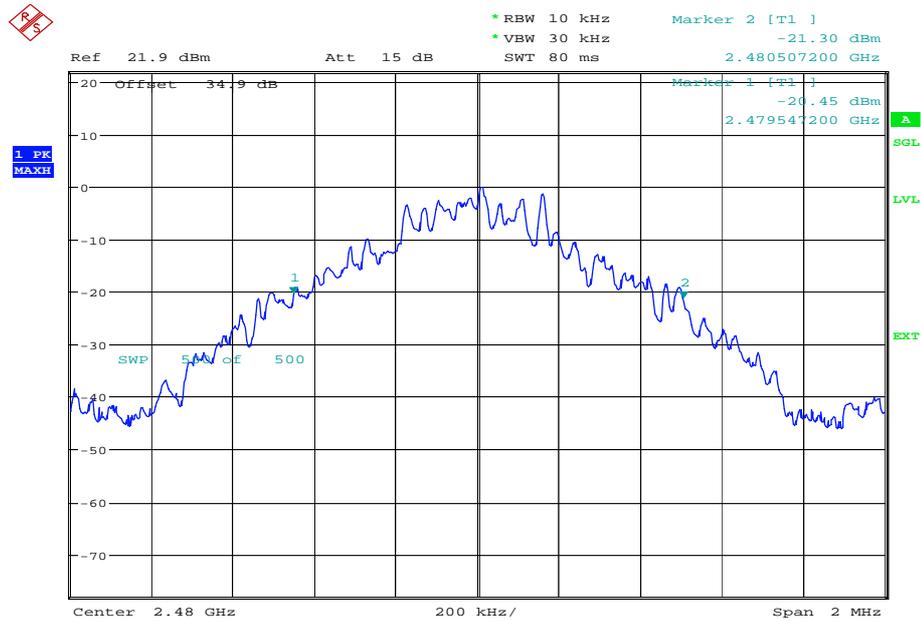


Date: 6.MAR.2013 15:13:32




Product Service

DH3

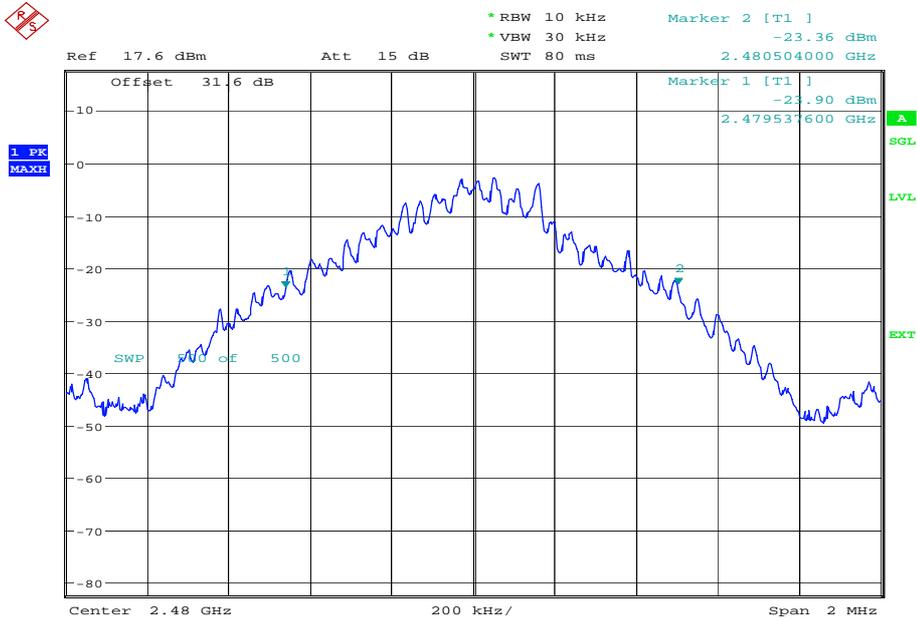

Date: 6.MAR.2013 15:31:33

DH5 (worst)

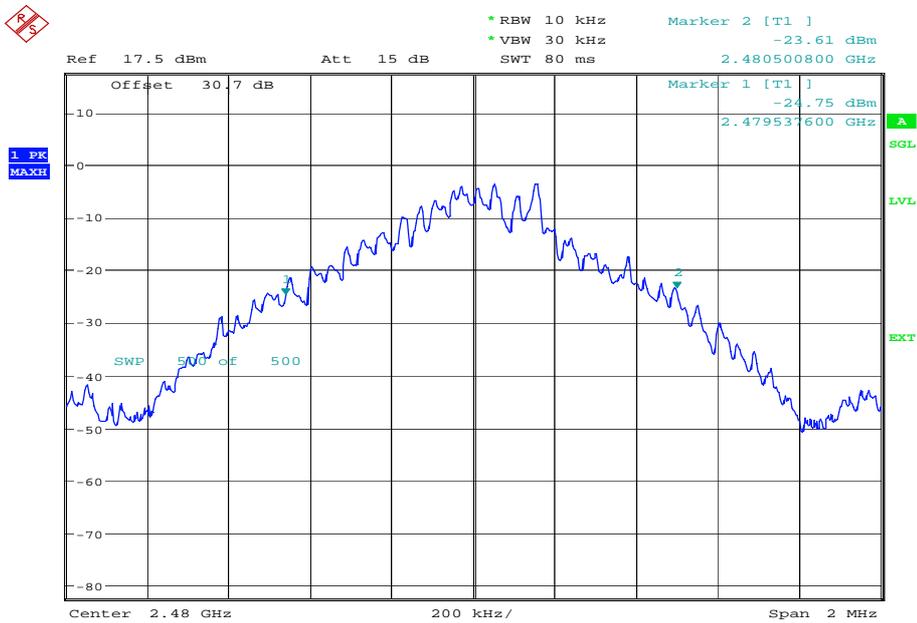

Date: 6.MAR.2013 15:56:34

Limit Clause


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater.



Product Service

Channel Separation

Channel Separation: 1 MHz

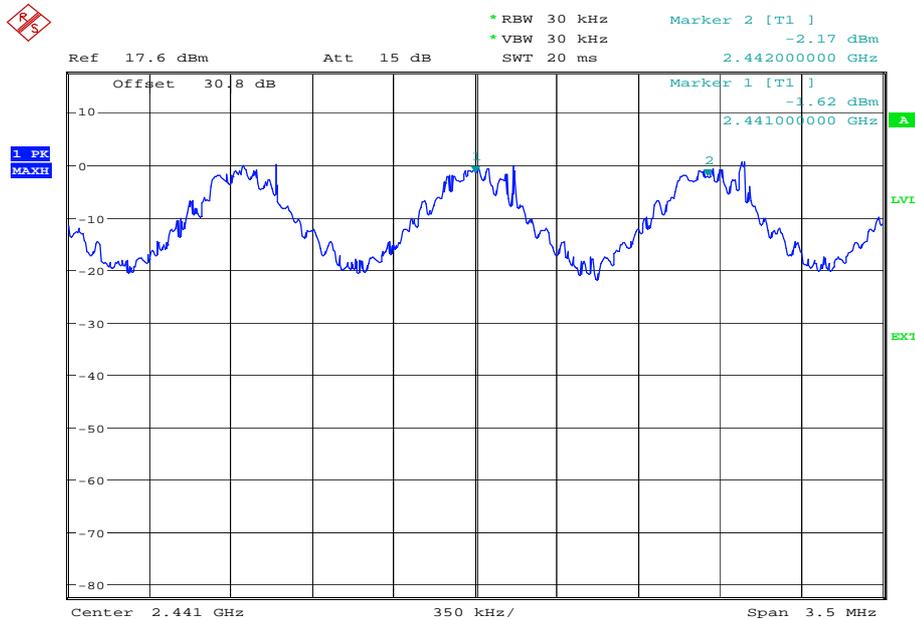

Date: 6.MAR.2013 15:51:26

Limit Clause

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125 W.

The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.



Product Service

2.3 FREQUENCY HOPPING SYSTEMS - CHANNEL DWELL TIME AND NUMBER OF HOPPING CHANNELS

2.3.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.247 (a)(1)(iii)

2.3.2 Equipment Under Test and Modification State

204SH S/N: IMEI 004401114727056 - Modification State 0

2.3.3 Date of Test

6 March 2013

2.3.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.5 Test Procedure

DH1


The Bluetooth system hops at a rate of 1600 times per second. Thus, this equates to 1600 timeslots in 1 second.

The DH1 data rate operates on a Transmit on 1 timeslot and Receive on 1 timeslot basis. Thus, in 1 second, there are 800 Transmit timeslots and 800 Receive timeslots.

Thus:

$$1 \text{ Timeslot} = \frac{1}{1600} = 625\mu\text{s}$$

In 1 transmit timeslot, the transmit on time is only 405µs. 220µs is reserved as off time for the synthesizer to re-tune ready for the next transmit frequency. The following timeslot is a receive slot. This process continues assuming the data rate remains the same.

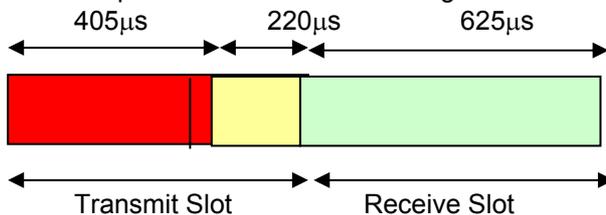



Product Service

DH1 Timeslot Arrangement Showing One Complete Transmit and Receive Cycle

So, with 800 Tx and 800 Rx timeslots, the transmitter is on for $800 \times 405\mu\text{s} = 0.324$ seconds.

$$\therefore \frac{\text{Total Tx Time On}}{\text{No of Channels}} = \frac{0.324}{80} = 4.05\text{ms}$$

So, in 32 seconds, the transmitter dwell time per channel is:

$$32 \times 4.05\text{ms} = 0.1296 \text{ seconds}$$

DH3


With data rate DH3, the data payload is higher and can use up to 3 timeslots. When more than one timeslot is used, the frequency does not hop and transmission is continuous on all 3 slots, (ie. no receive slot in-between the 3 transmit slots). The $220\mu\text{s}$ off time for synthesizer re-tuning at the end of a slot is only used on the final slot. Thus, for one cycle, there are 3 transmit timeslots. 2 are $625\mu\text{s}$ long and the final slot is transmitting for $405\mu\text{s}$.

The DH3 data rate operates on a Transmit on 3 timeslots and Receives on 1 timeslot basis, (assuming maximum data payload). The frequency-hopping rate is the same. Thus, in 1 second, there are 1200 Transmit timeslots and 400 Receive timeslots.

Thus:

$$1 \text{ Timeslot} = \frac{1}{1600} = 625\mu\text{s}$$

The first 2 Transmit timeslots are transmitting for the complete $625\mu\text{s}$. In the third transmit slot, the transmit on time is only $405\mu\text{s}$. $220\mu\text{s}$ is reserved as off time for the synthesizer to re-tune ready for the next transmit frequency. The following timeslot is a receive slot. This process continues assuming the data rate remains the same.

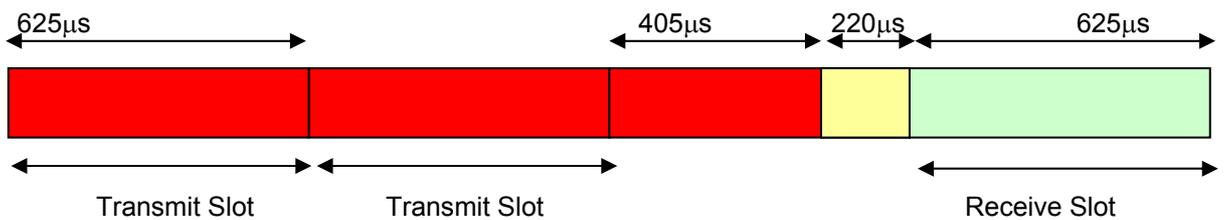



DH3 Timeslot Arrangement Showing One Complete Transmit and Receive Cycle, (Maximum Payload)

Thus, the transmitter for one complete transmit and receive cycle would be on for:

$$\text{Tx} \quad (2 \times 625\mu\text{s}) + (1 \times 405\mu\text{s}) \quad = \quad 1.655\text{ms}$$

So:

$$\begin{aligned} 800 \times 625\mu\text{s} &= 0.5 \text{ seconds} \\ 400 \times 405\mu\text{s} &= 0.162 \text{ seconds} \end{aligned}$$

Thus: $0.5 + 0.162 = 0.662 \text{ seconds}$

$$\therefore \frac{\text{Total Tx Time On}}{\text{No Of Channels}} = \frac{0.662}{80} = 8.275\text{ms}$$

So, in 32 seconds, the transmitter dwell time per channel is:

$$32 \times 8.275\text{ms} = 0.2648 \text{ seconds}$$

DH5


With data rate DH5, the data payload is higher and can use up to 5 timeslots. When more than one timeslot is used, the frequency does not hop and transmission is continuous on all 5 slots, (ie. no receive slot in-between the 5 transmit slots). The 220µs off time for synthesizer re-tuning at the end of a slot is only used on the final slot. Thus, for one cycle, there are 5 transmit timeslots. 4 are 625µs long and the final slot is transmitting for 405µs.

The DH5 data rate operates on a Transmit on 5 timeslots and Receives on 1 timeslot basis, (assuming maximum data payload). The frequency-hopping rate is the same. Thus, in 1 second, there are 1333.3 Transmit timeslots and 266.7 Receive timeslots.

Thus:

$$1 \text{ Timeslot} = \frac{1}{1600} = 625\mu\text{s}$$

The first 4 Transmit timeslots are transmitting for the complete 625µs. In the fifth transmit slot, the transmit on time is only 405µs. 220µs is reserved as off time for the synthesizer to re-tune ready for the next transmit frequency. The following timeslot is a receive slot. This process continues assuming the data rate remains the same.

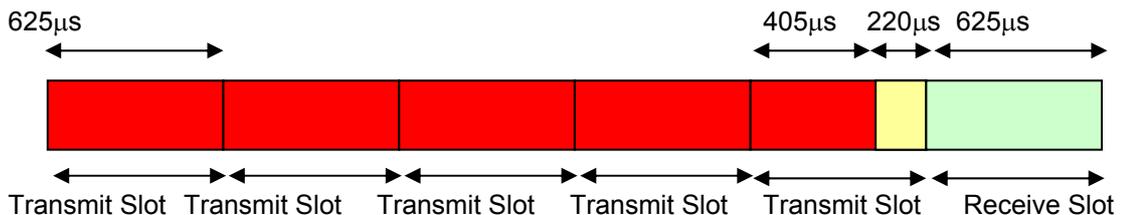



Product Service

DH5 Timeslot Arrangement Showing One Complete Transmit and Receive Cycle, (Maximum Payload)

Thus, the transmitter for one complete transmit and receive cycle would be on for:

$$\text{Tx} \quad (2 \times 625\mu\text{s}) + (1 \times 405\mu\text{s}) \quad = \quad 2.905\text{ms}$$

So:

$$1066.7 \times 625\mu\text{s} \quad = \quad 0.666 \text{ seconds}$$

$$266.7 \times 405\mu\text{s} \quad = \quad 0.108 \text{ seconds}$$

$$\text{Thus:} \quad 0.666 + 0.108 = 0.774 \text{ seconds}$$

$$\therefore \quad \frac{\text{Total Tx Time On}}{\text{No Of Channels}} \quad = \quad \frac{0.774}{80} \quad = \quad 9.675\text{ms}$$

So, in 32 seconds, the transmitter dwell time per channel is:

$$32 \times 9.675\text{ms} = \quad 0.31 \text{ seconds}$$

2.3.6 Environmental Conditions

Ambient Temperature 23.7°C
Relative Humidity 28.9%



Product Service


2.3.7 Test Results

4.0 V DC Supply

Channel Dwell Time

DH1

0.400 ms

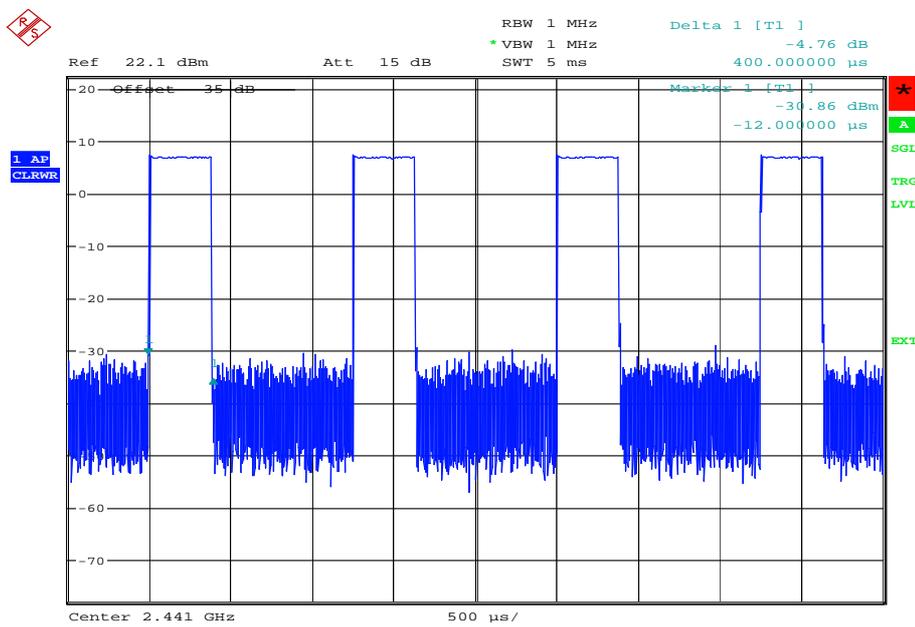


Date: 6.MAR.2013 15:09:15



Product Service

DH3


1.656 ms

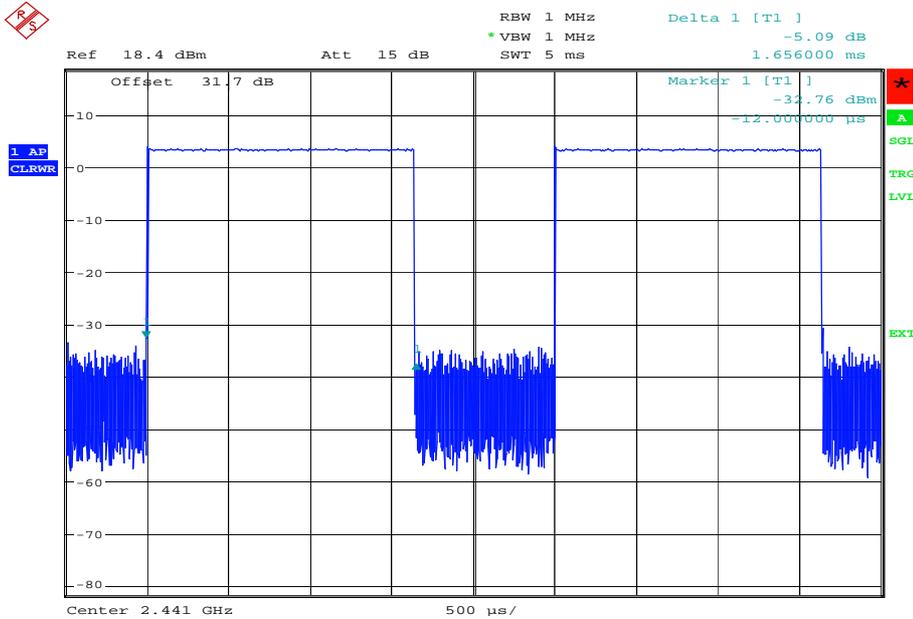

Date: 6.MAR.2013 15:28:30

DH5

2.912 ms

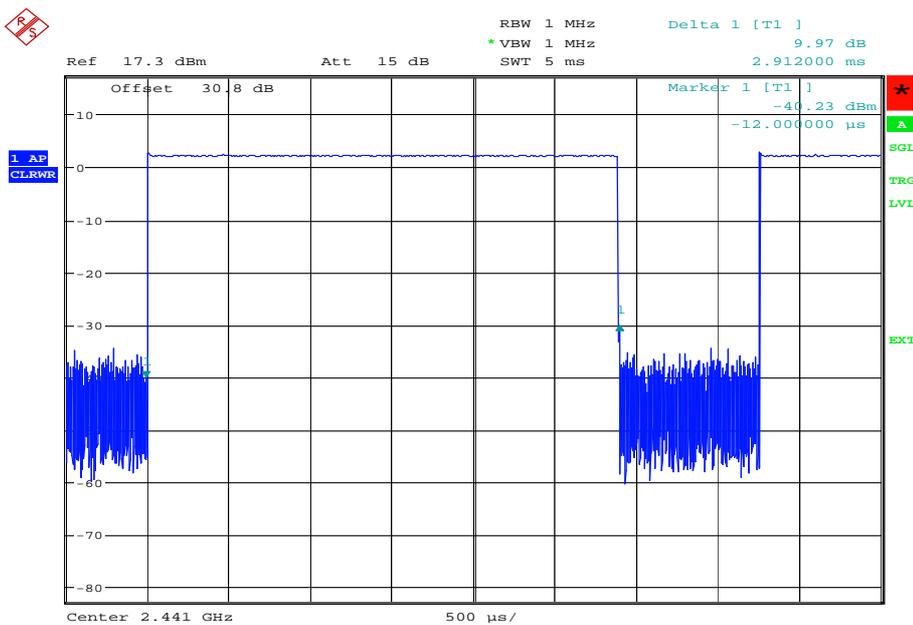

Date: 6.MAR.2013 15:53:25




Product Service

Limit

Frequency hopping systems operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that a minimum of 15 hopping channels are used.

Number of Hopping Channels

79

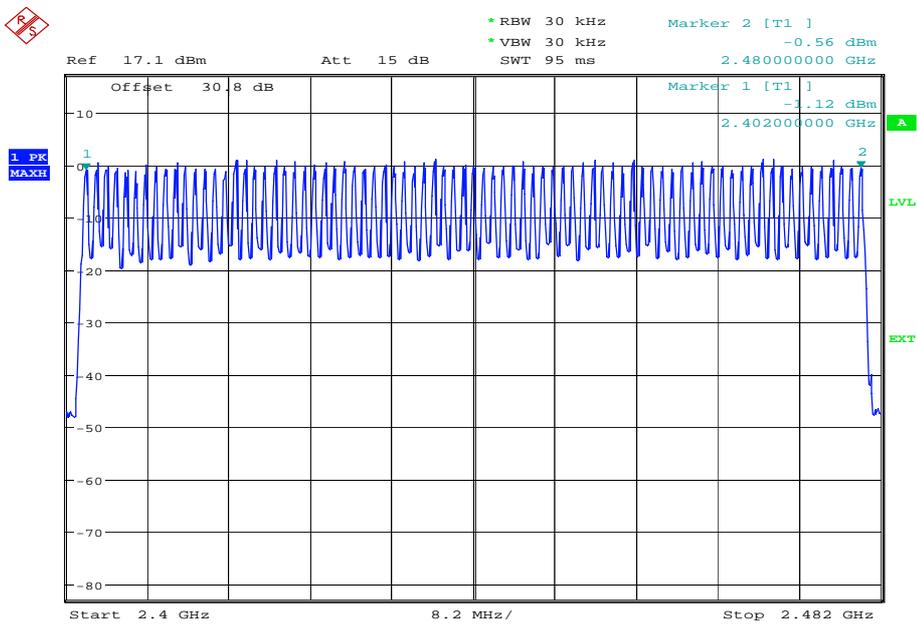

Date: 6.MAR.2013 15:47:06

Limit

≥ 15 channels



2.4 MAXIMUM PEAK CONDUCTED OUTPUT POWER

2.4.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.247 (b)(3)

2.4.2 Equipment Under Test and Modification State

204SH S/N: IMEI 004401114727056 - Modification State 0

2.4.3 Date of Test

7 March 2013

2.4.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.4.5 Test Procedure

The EUT was transmitted at maximum power via a cable to the Peak Power Analyser. The Analyser settings were adjusted to display the resultant trace on screen and a reference level offset was entered to account for the measurement path loss. The measurement bandwidth was set according to the signal being measured and the peak and average levels were recorded.

2.4.6 Environmental Conditions

Ambient Temperature	23.7°C
Relative Humidity	28.9%



Product Service

2.4.7 Test Results

4.0 V DC Supply

Packet Type	Maximum Peak Conducted Output Power					
	dBm			mW		
	2402 MHz	2441 MHz	2480 MHz	2402 MHz	2441 MHz	2480 MHz
DH1	0.45	1.02	1.04	1.109	1.265	1.271
DH3	0.25	0.89	0.86	1.059	1.227	1.219
DH5 (worst)	0.26	0.85	0.88	1.062	1.216	1.225

Limit Clause

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.



2.5 EIRP PEAK POWER

2.5.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.247 (b)(4)

2.5.2 Equipment Under Test and Modification State

204SH S/N: IMEI 004401114727312 - Modification State 0

2.5.3 Date of Test

2 March 2013

2.5.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.5.5 Test Procedure

The EUT was transmitted at maximum power via a cable to the Spectrum Analyser. The Analyser settings were adjusted to display the resultant trace on screen and a resolution bandwidth and video bandwidth of 1 MHz were used to perform the measurement. The level on the spectrum analyser was maximised by rotating the EUT 360° and a height search of the measuring antenna. A substitution was then performed using a substitution antenna and signal generator.

This level was maximised by adjusting the height of the measuring antenna once more. The level from the signal generator was then adjusted to achieve the same raw result as with the EUT. This level was then corrected to account for cable loss and antenna factor. If applicable, a peak power analyser was also used to obtain a correction factor for wideband signals such as WLAN.

A calculation was then performed to obtain the final figure.

2.5.6 Environmental Conditions

Ambient Temperature	18.0°C
Relative Humidity	25.0%




Product Service

2.5.7 Test Results

2402 MHz

EIRP (dBm)	EIRP (mW)
-2.72	0.535

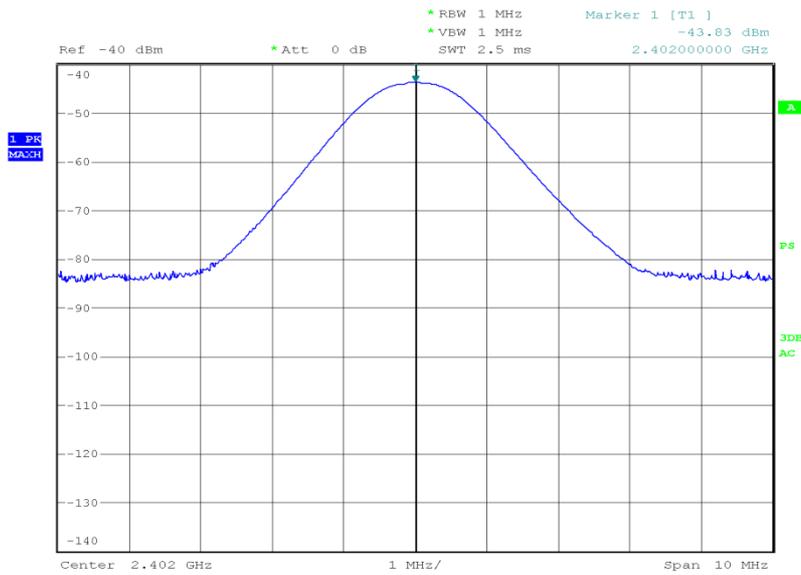


Date: 2.MAR.2013 21:21:16



Product Service

2441 MHz

EIRP (dBm)	EIRP (mW)
-1.81	0.659

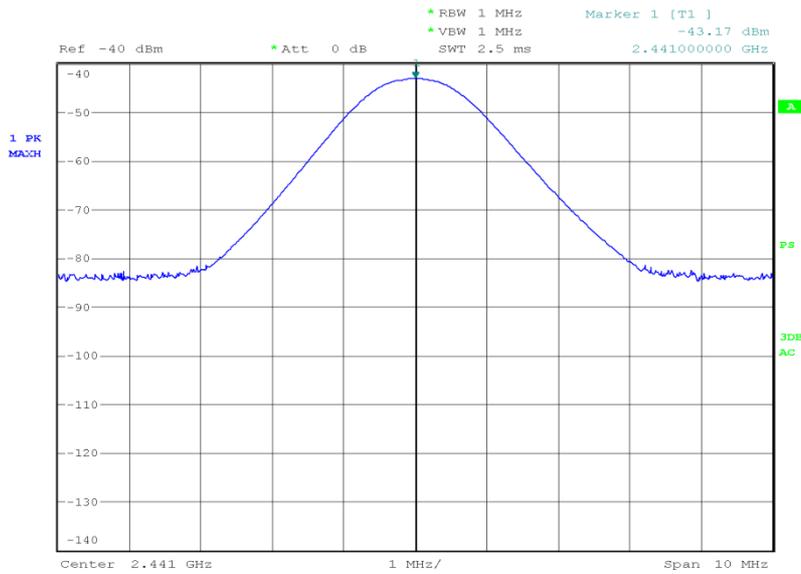


Date: 2.MAR.2013 21:53:39



Product Service

2480 MHz

EIRP (dBm)	EIRP (mW)
-2.59	0.551

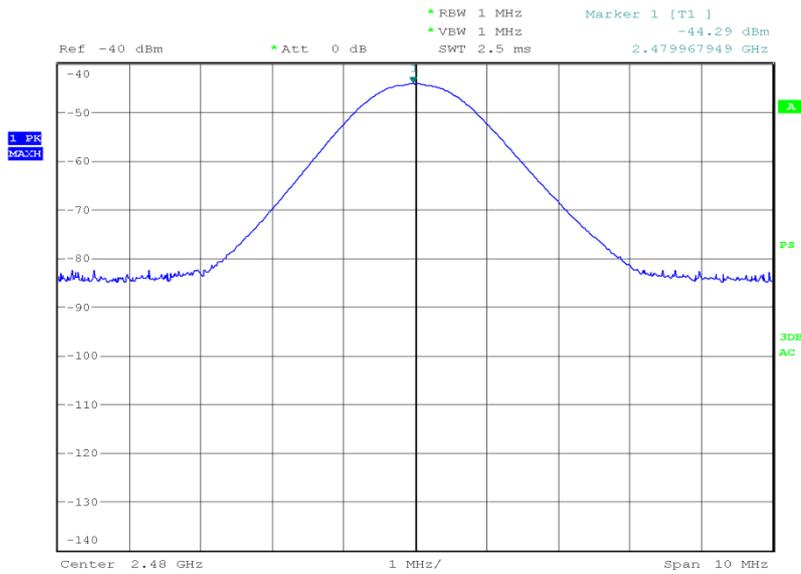

Date: 2.MAR.2013 21:59:26

Limit

EIRP (dBm)	EIRP (mW)
36.0	4000



2.6 SPURIOUS AND BAND EDGE EMISSIONS

2.6.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.247 (d)

2.6.2 Equipment Under Test and Modification State

204SH S/N: IMEI 004401114727056 - Modification State 0

2.6.3 Date of Test

2 March 2013, 4 March 2013, 5 March 2013 & 7 March 2013

2.6.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.6.5 Test Procedure

For conducted emissions, the EUT was set to operate at maximum power on the worst case data rate. The test was performed on the bottom, middle and top channels. The test was performed from 9 kHz to 25 GHz. Firstly, the power of each fundamental frequency was measured in 100 kHz bandwidth and this was used to show a -20 dBc limit line on the trace. The measurement path loss in each relevant frequency band was measured and entered as a reference level offset.

For radiated emissions, the test method described above was also used. However, the measurement was performed from 30 MHz to 25 GHz and the path loss is incorporated as a transducer factor and entered into the spectrum analyser.

The band edge measurements were performed in accordance with ANSI C63.10, Clause 6.9.3. The results were analysed to ensure compliance with restricted bands. The EUT was set to the lowest and highest operating frequencies.

2.6.6 Environmental Conditions

Ambient Temperature	18.0 - 23.7°C
Relative Humidity	25.0 - 32.0%



Product Service

2.6.7 Test Results


4.0 V DC Supply

Spurious Conducted Emissions

2DH1

2402 MHz

9 kHz to 4 GHz

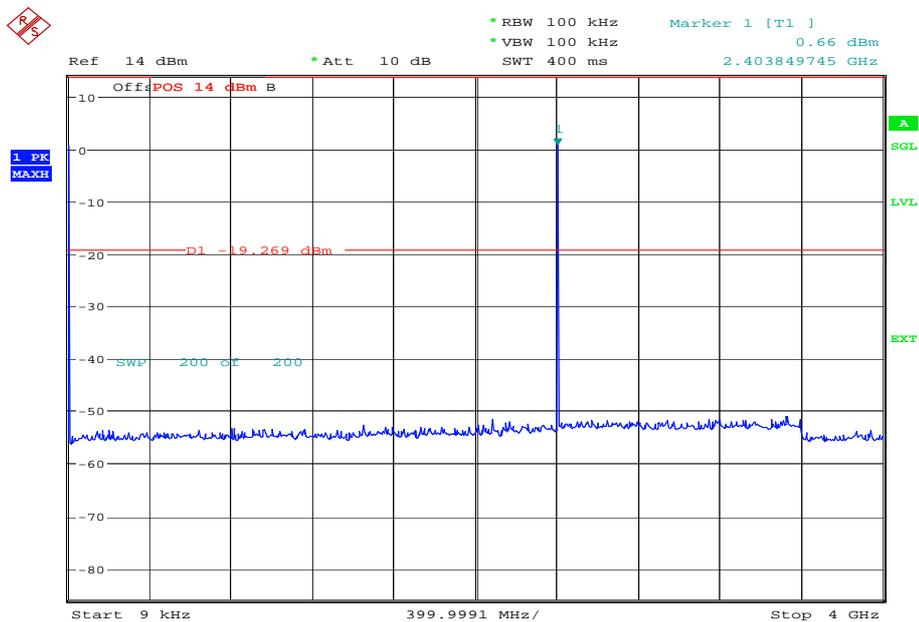


Date: 6.MAR.2013 16:18:19




Product Service

4 GHz to 12 GHz

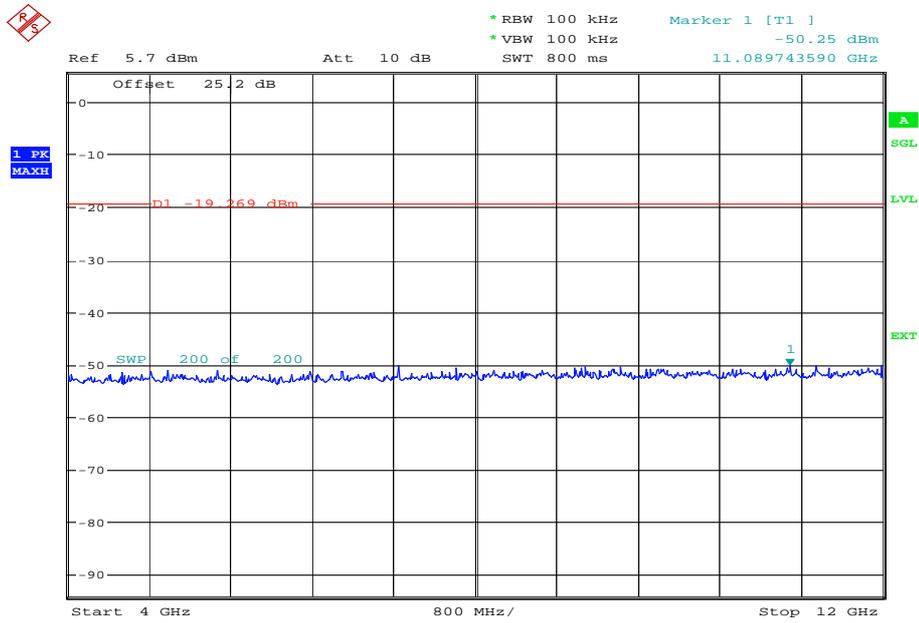

Date: 6.MAR.2013 16:28:22

12 GHz to 18 GHz

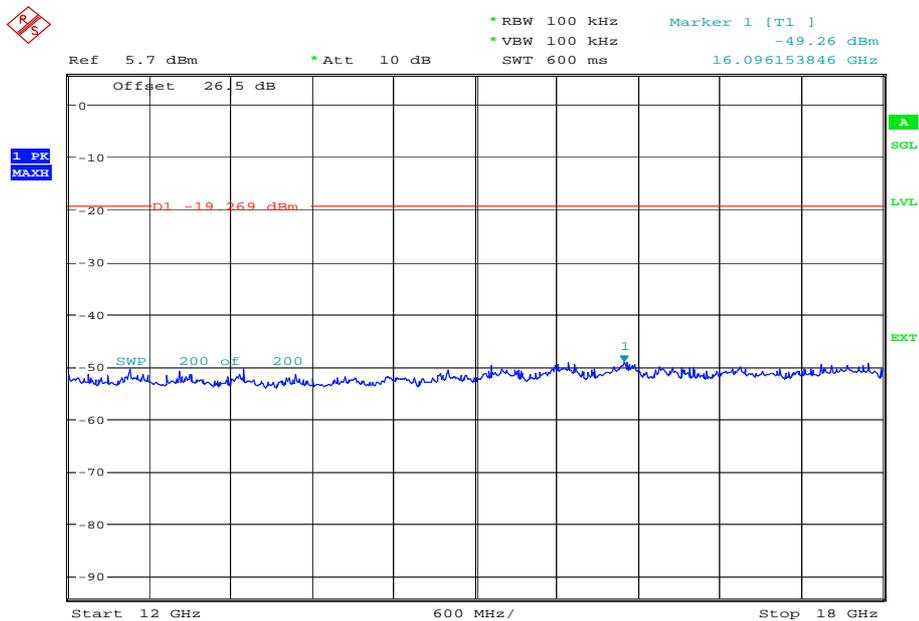


Date: 6.MAR.2013 16:44:27




Product Service

18 GHz to 25 GHz

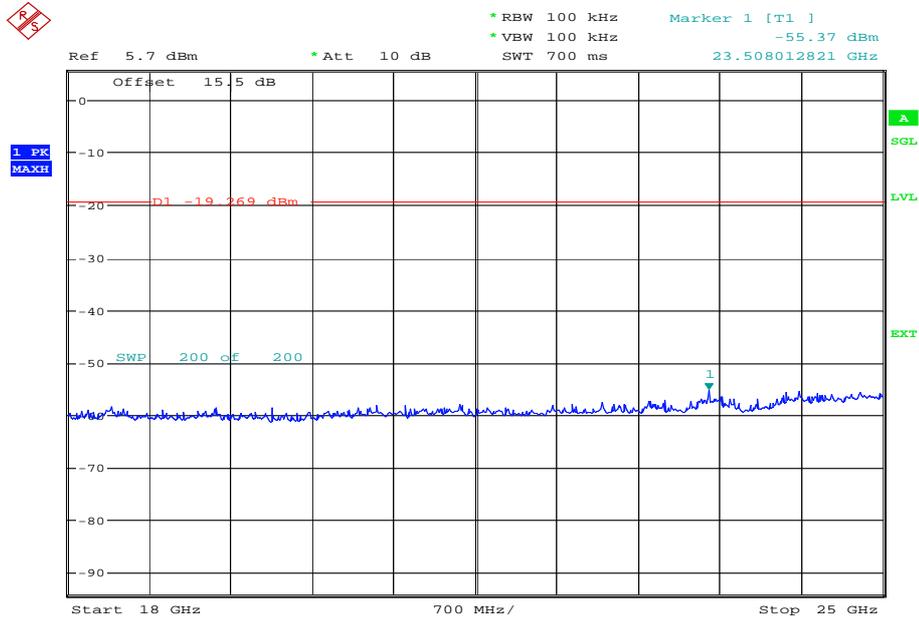

2441 MHz


9 kHz to 4 GHz

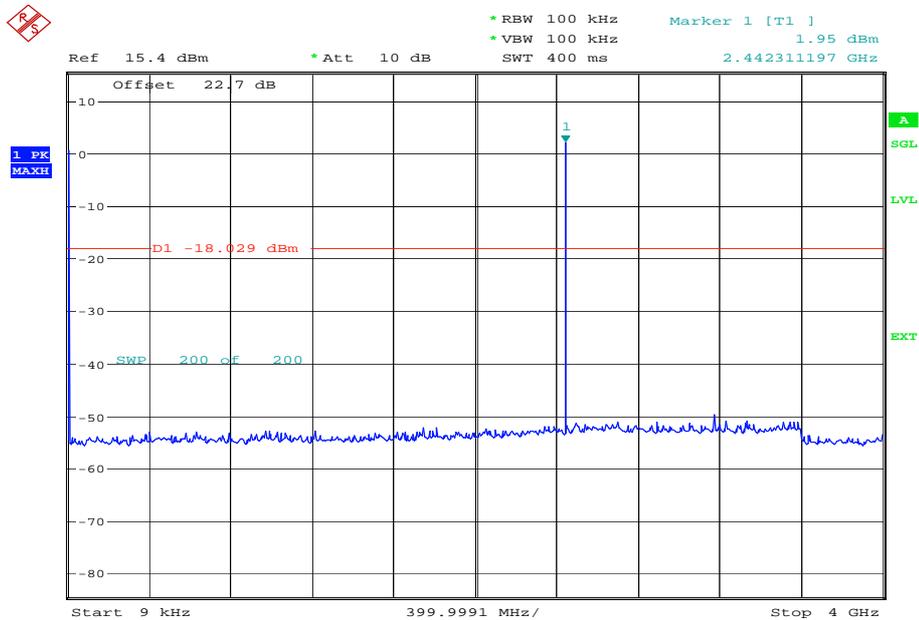




Product Service

4 GHz to 12 GHz

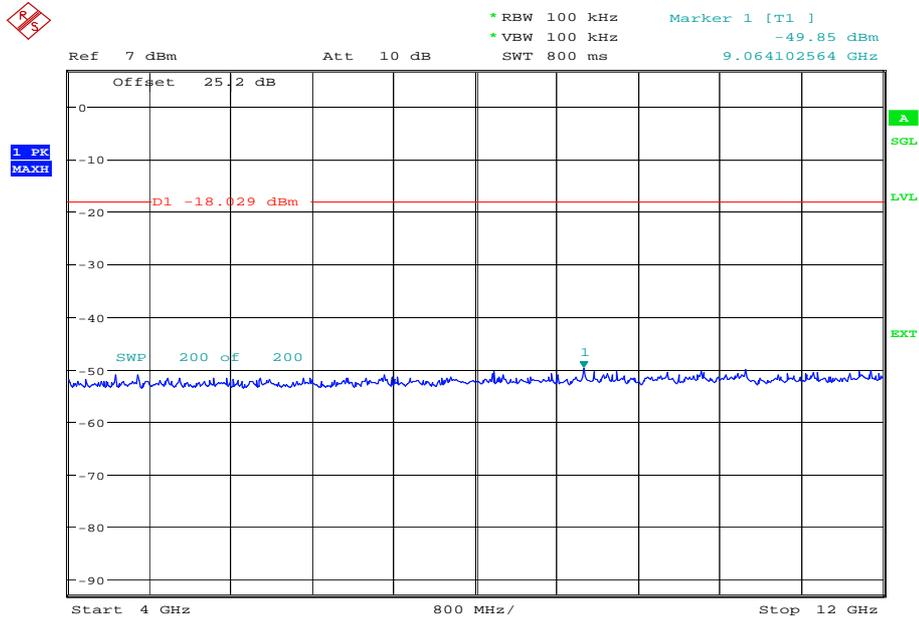

Date: 6.MAR.2013 16:32:31

12 GHz to 18 GHz

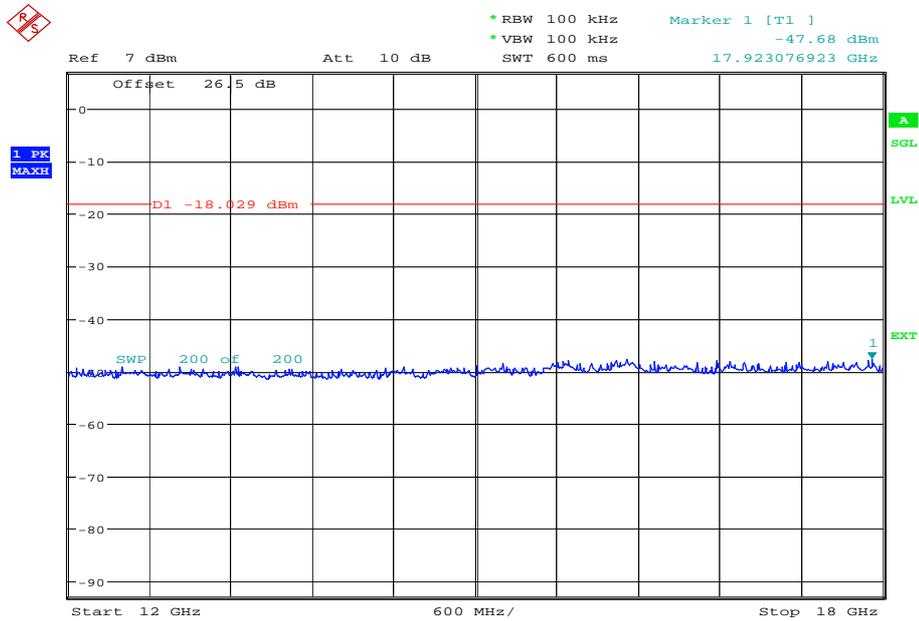


Date: 6.MAR.2013 16:41:35



Product Service


18 GHz to 25 GHz

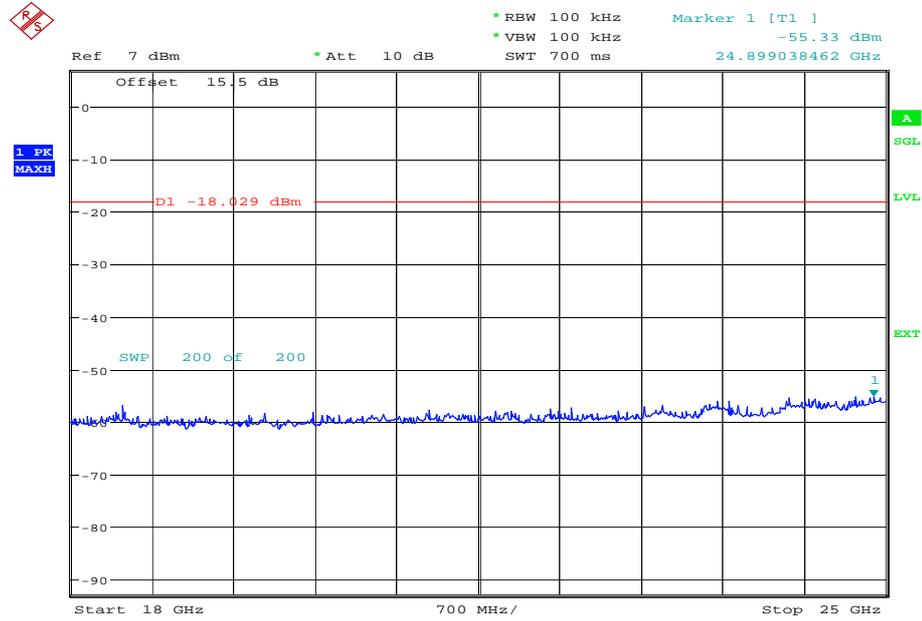

Date: 6.MAR.2013 16:53:19

2480 MHz

9 kHz to 4 GHz

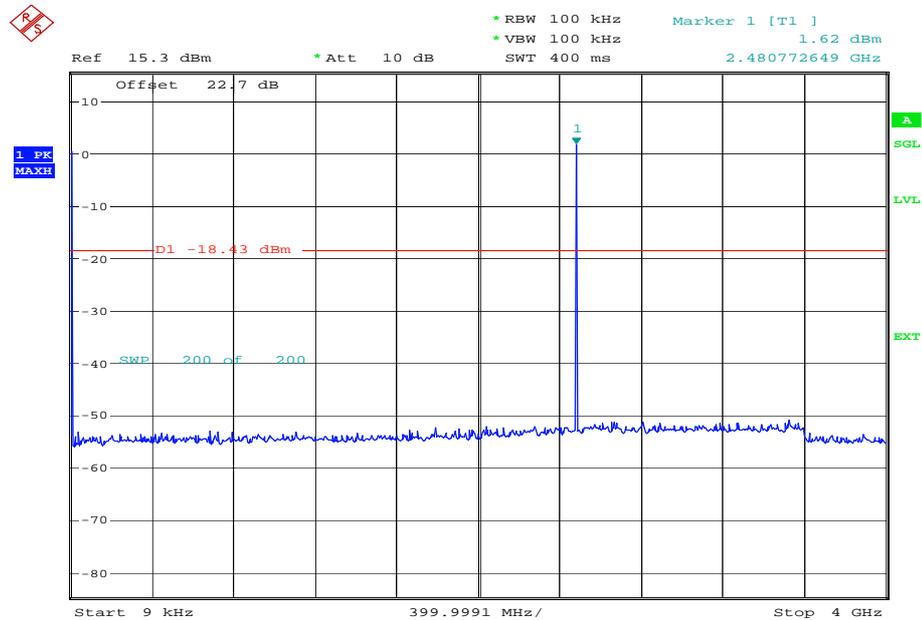


Date: 6.MAR.2013 16:23:50




Product Service

4 GHz to 12 GHz

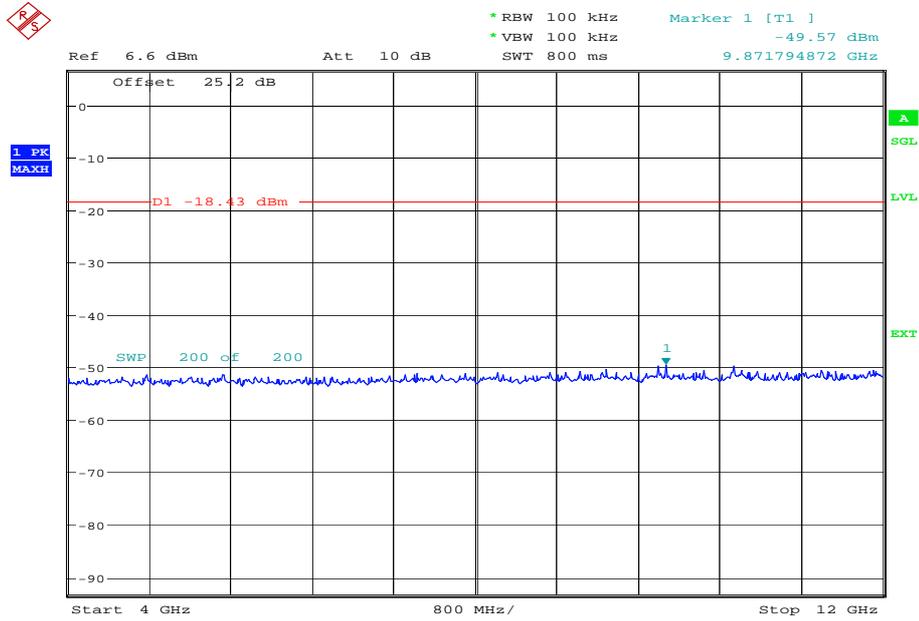

Date: 6.MAR.2013 16:36:07


12 GHz to 18 GHz

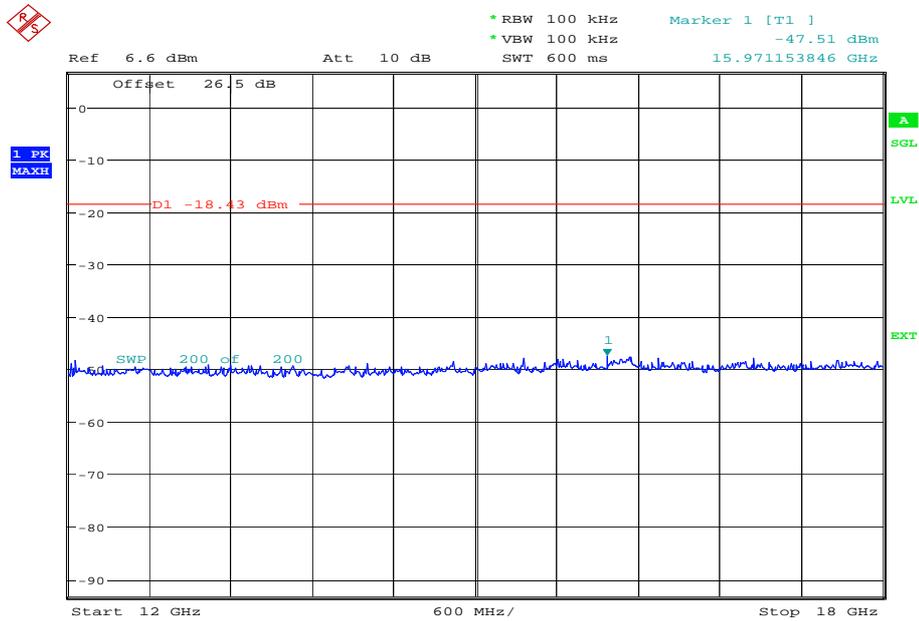

Date: 6.MAR.2013 16:38:43



18 GHz to 25 GHz

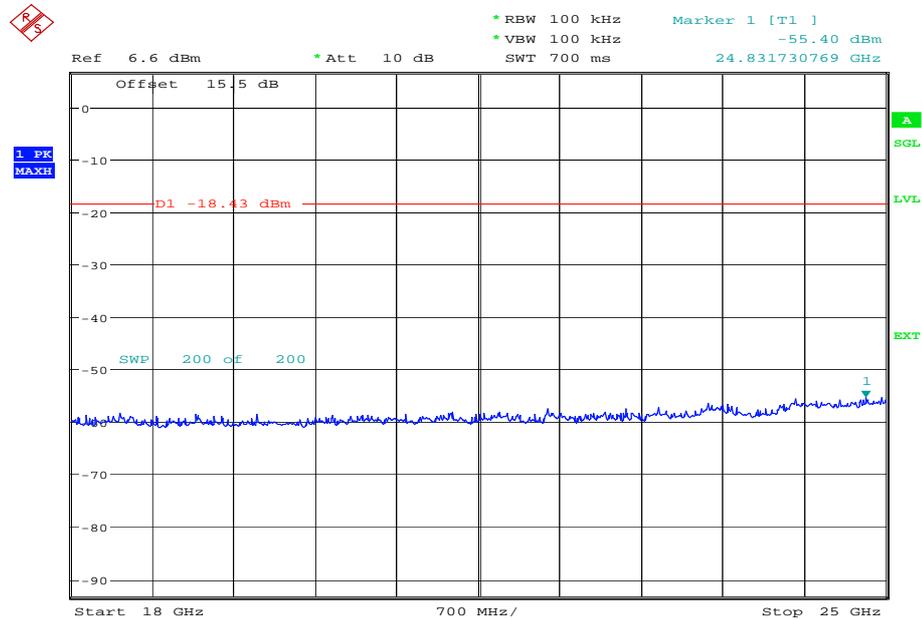

Date: 6.MAR.2013 16:56:26

Limit Clause

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval the attenuation required shall be 30 dB instead of 20 dB.




Product Service

Spurious Radiated Emissions

2402 MHz


30 MHz to 1 GHz

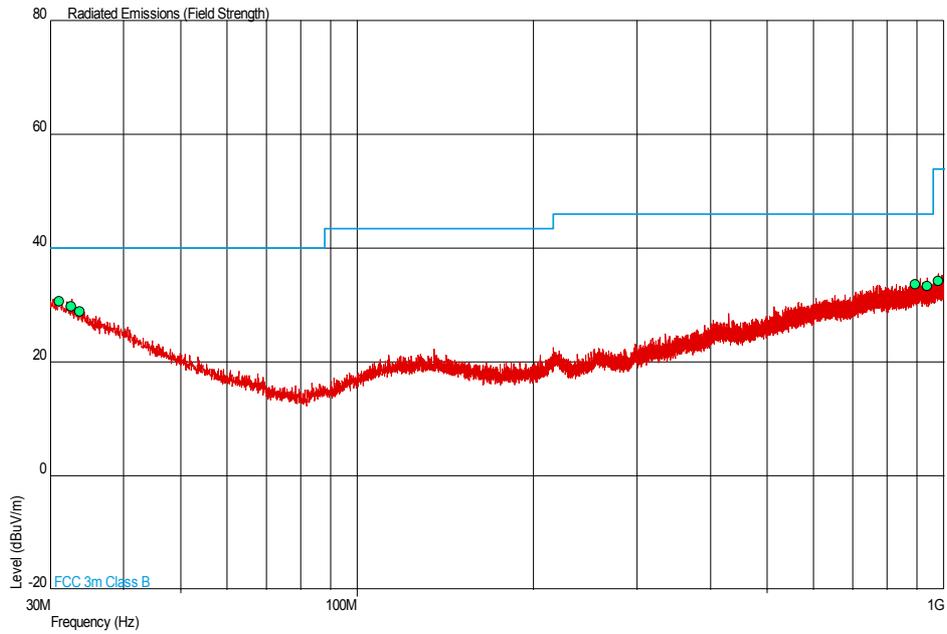

Frequency (MHz)	QP Level (dB μ V/m)	QP Level (μ V/m)	QP Limit (dB μ V/m)	QP Limit (μ V/m)	QP Margin (dB μ V/m)	QP Margin (μ V/m)	Angle (Deg)	Height (m)	Polarity
31.116	30.6	33.9	40.0	100	-9.4	66.1	0	1.00	Vertical
32.619	29.7	30.5	40.0	100	-10.3	69.5	270	1.00	Horizontal
33.735	28.9	27.9	40.0	100	-11.1	72.1	90	1.00	Vertical
893.155	33.7	48.4	46.0	200	-12.3	151.6	90	1.00	Horizontal
937.338	33.3	46.2	46.0	200	-12.7	153.8	0	1.00	Vertical
979.097	34.2	51.3	54.0	501	-19.8	448.7	270	1.00	Vertical




1GHz to 3GHz

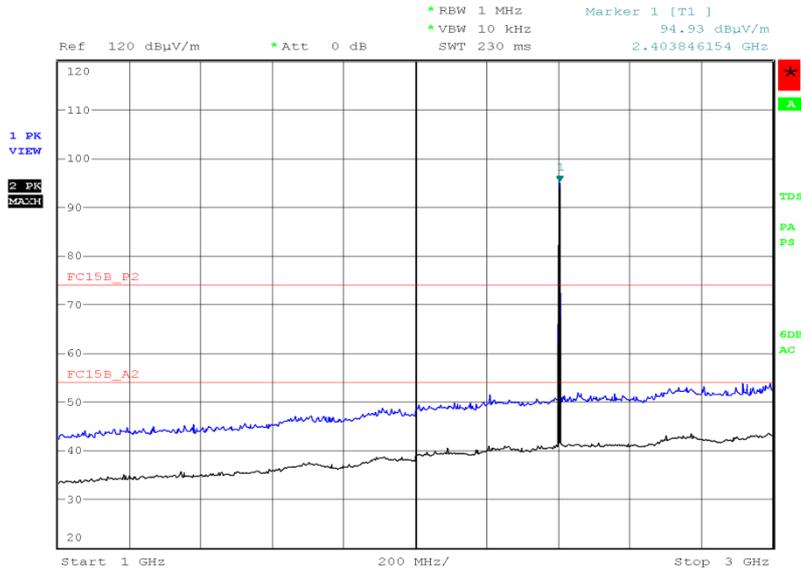

Date: 2.MAR.2013 21:32:59

3GHz to 8GHz

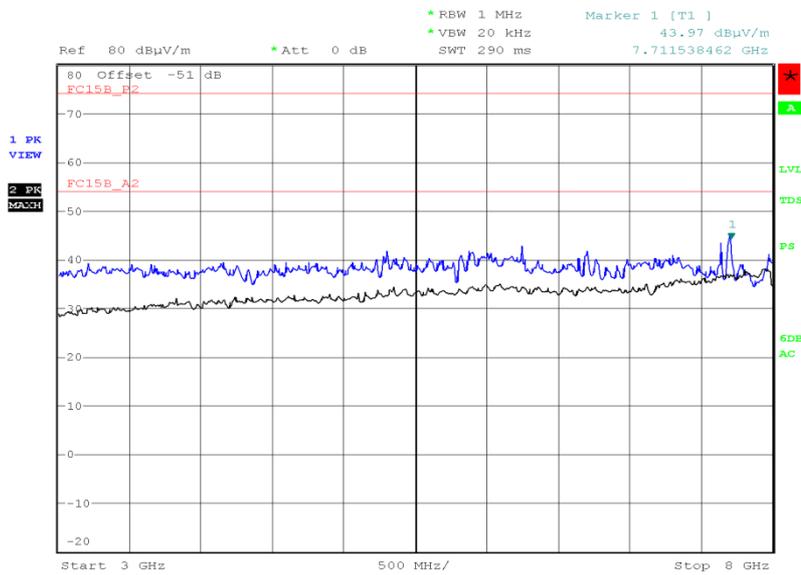


Date: 4.MAR.2013 22:08:52




Product Service

8GHz to 18GHz

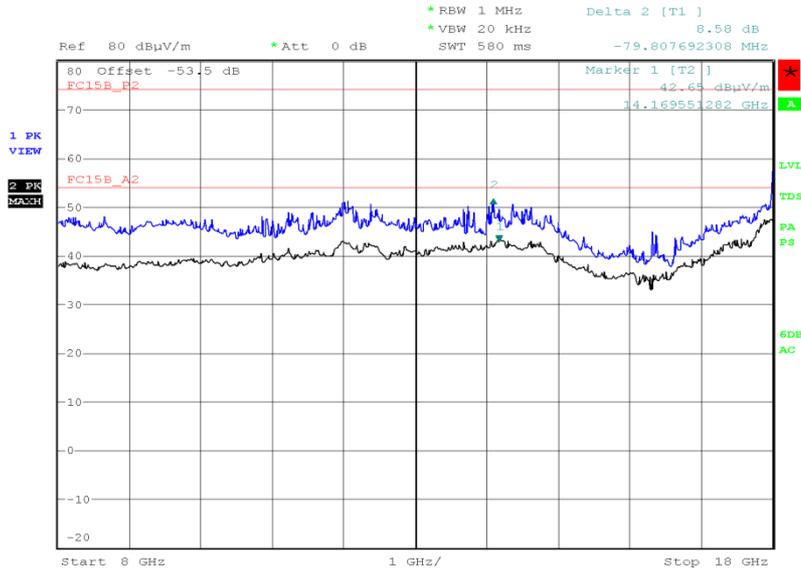

Date: 4.MAR.2013 23:12:06

18GHz to 25GHz

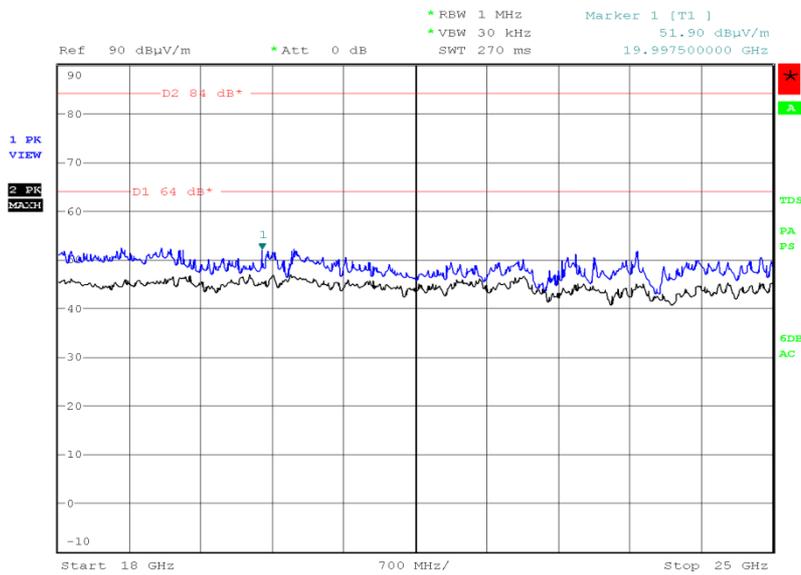


Date: 5.MAR.2013 21:04:51



2441 MHz

30 MHz to 1 GHz

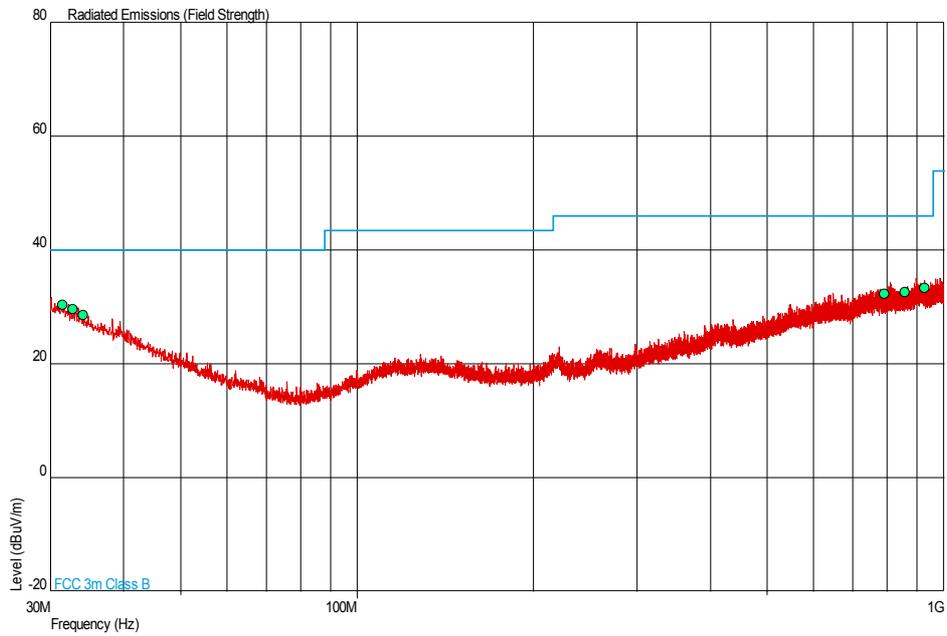


Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (Deg)	Height (m)	Polarity
31.504	30.3	32.7	40.0	100	-9.7	67.3	270	1.00	Vertical
32.813	29.7	30.5	40.0	100	-10.3	69.5	90	1.00	Horizontal
34.171	28.6	26.9	40.0	100	-11.4	73.1	180	1.00	Horizontal
791.984	32.3	41.2	46.0	200	-13.7	158.8	0	1.00	Vertical
858.118	32.6	42.7	46.0	200	-13.4	157.3	0	1.00	Vertical
926.347	33.4	46.8	46.0	200	-12.6	153.2	0	1.00	Vertical




Product Service

1GHz to 3GHz

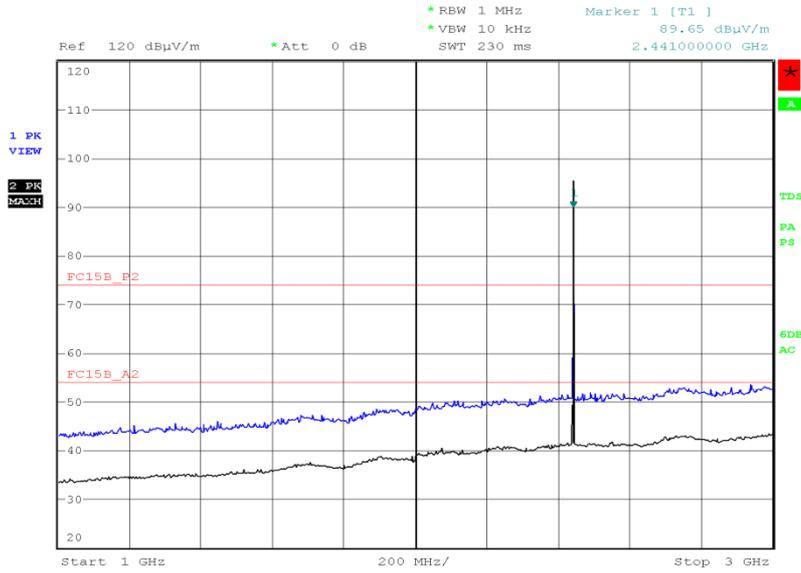

Date: 2.MAR.2013 21:45:41


3GHz to 8GHz

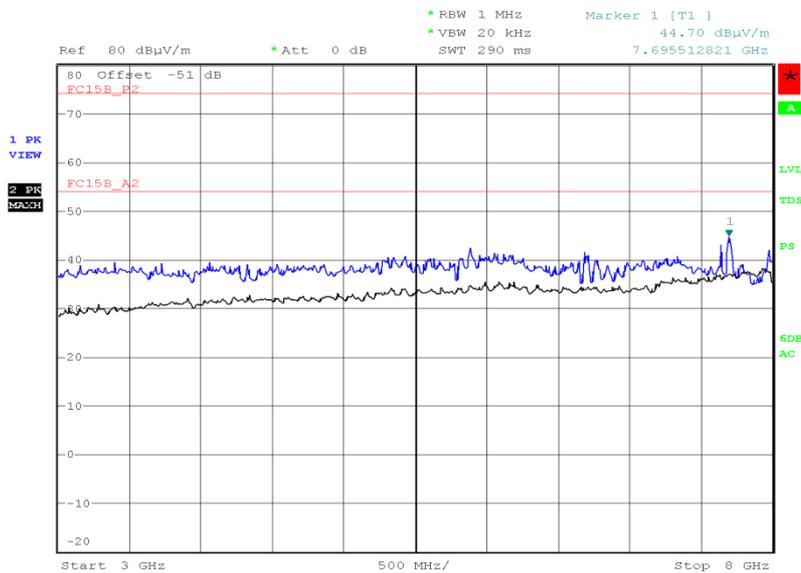

Date: 4.MAR.2013 22:17:03




8GHz to 18GHz

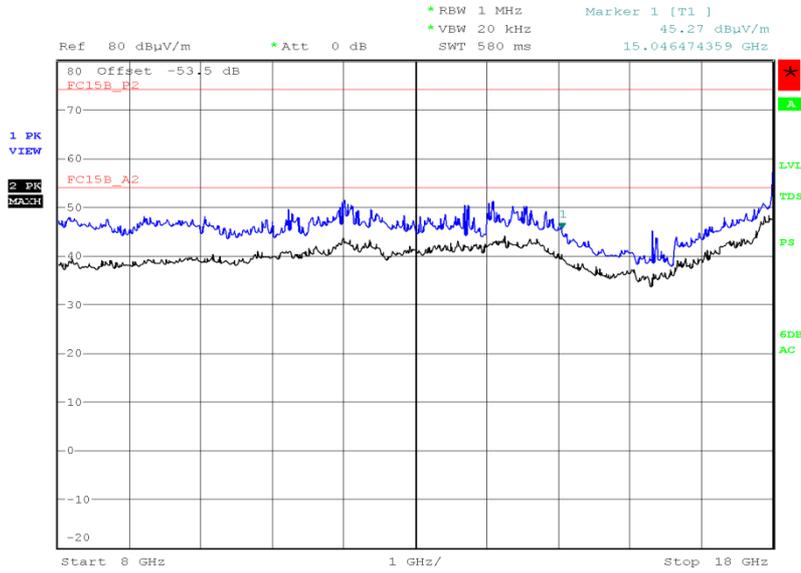

Date: 4.MAR.2013 22:58:46

18GHz to 25GHz

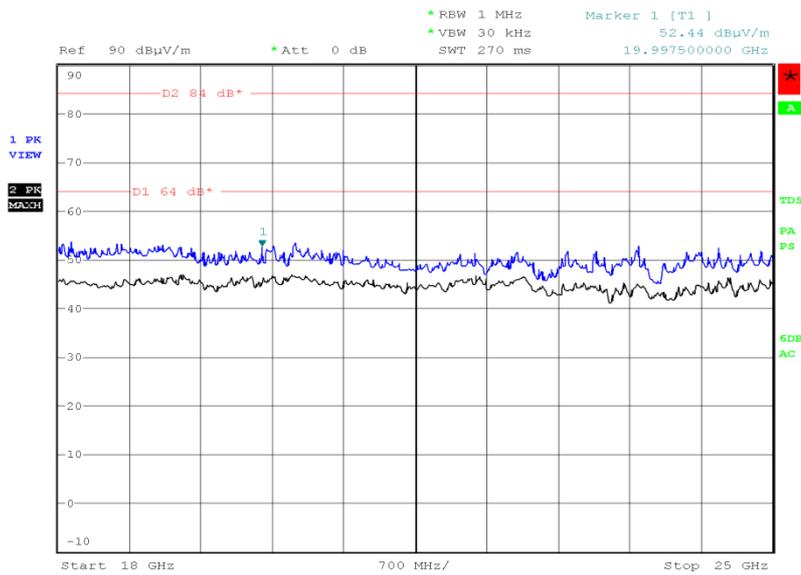


Date: 5.MAR.2013 21:08:40



2480 MHz

30 MHz to 1 GHz

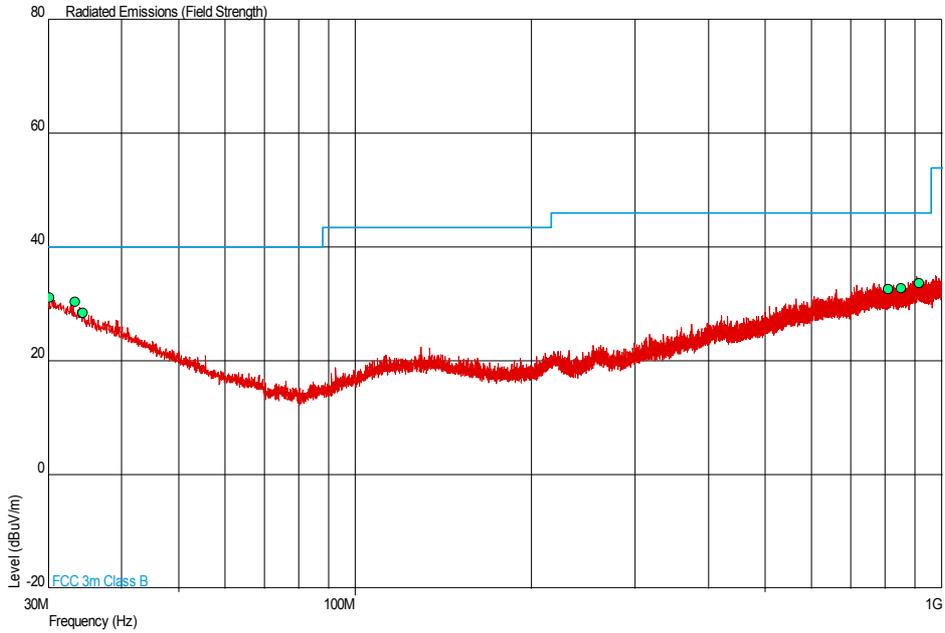


Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (Deg)	Height (m)	Polarity
30.194	31.1	35.9	40.0	100	-8.9	64.1	90	1.00	Horizontal
33.347	30.4	33.1	40.0	100	-9.6	66.9	0	1.00	Horizontal
34.365	28.4	26.3	40.0	100	-11.6	73.7	180	1.00	Horizontal
810.365	32.6	42.7	46.0	200	-13.4	157.3	180	1.00	Horizontal
852.948	32.8	43.7	46.0	200	-13.2	156.3	180	1.00	Horizontal
914.640	33.7	48.4	46.0	200	-12.3	151.6	270	1.00	Horizontal




Product Service

1GHz to 3GHz

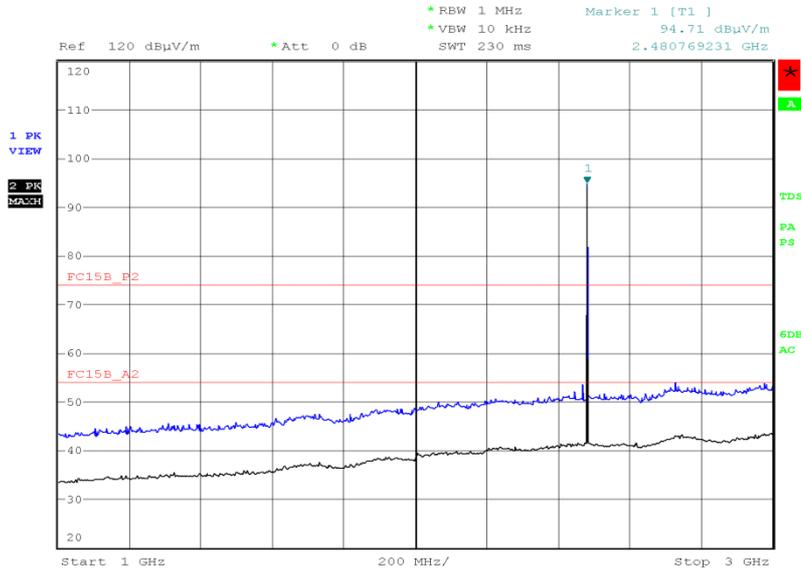

Date: 2.MAR.2013 22:18:17

3GHz to 8GHz

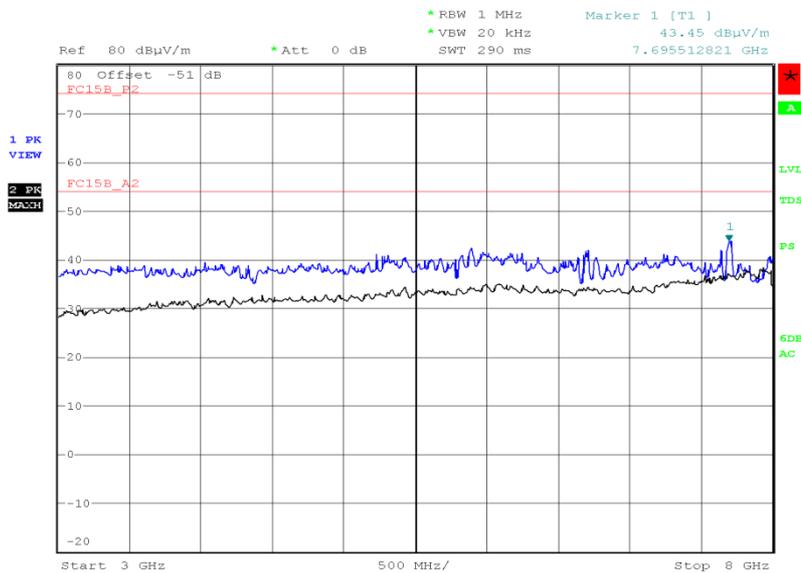


Date: 4.MAR.2013 22:27:08




Product Service

8GHz to 18GHz

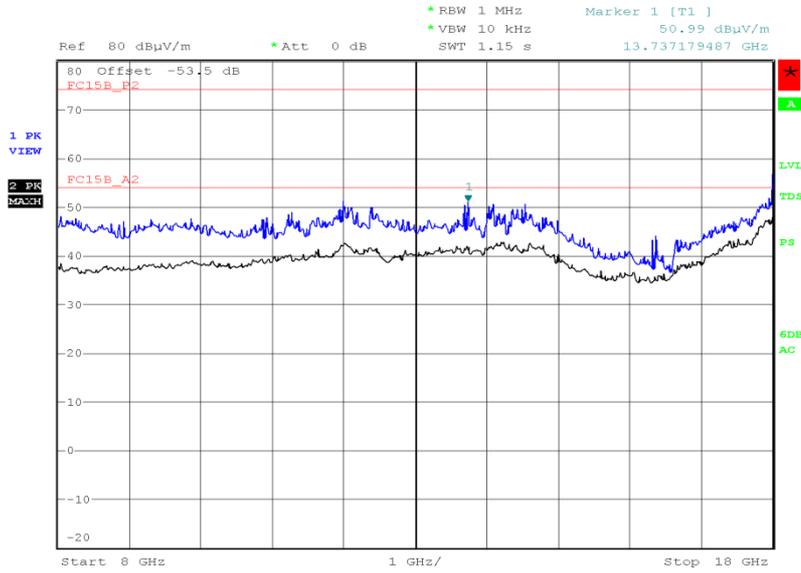

Date: 4.MAR.2013 22:51:02

18GHz to 25GHz

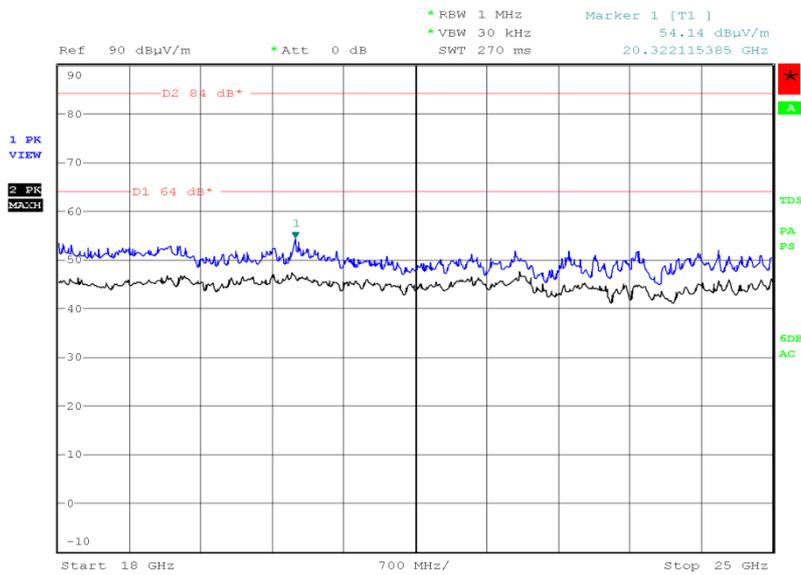

Date: 5.MAR.2013 21:12:01

Limit

Peak (dB μ V/m)	Average (dB μ V/m)
74.0	54.0




Product Service

Band Edge Emissions

2402 MHz

Polarisation	Final Peak (dBµV/m)	Final Average (dBµV/m)
Horizontal	48.55	37.51

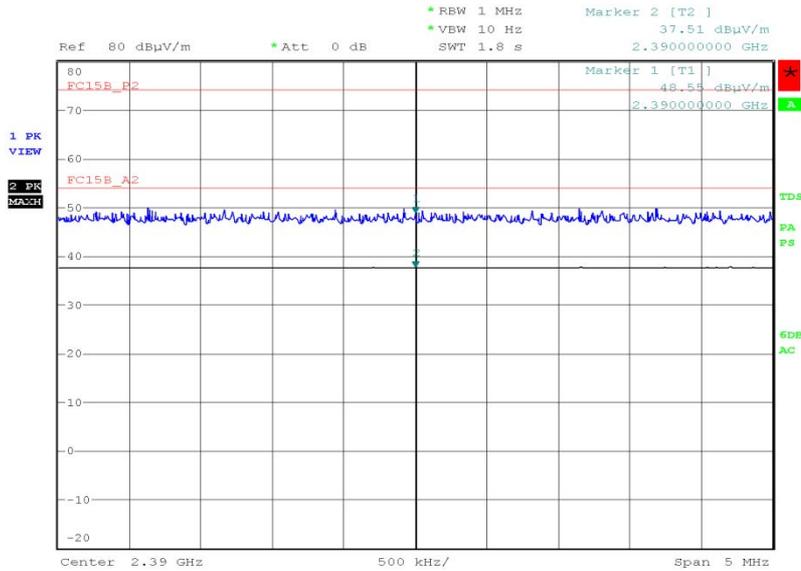


Date: 2.MAR.2013 21:24:42



2480 MHz

Polarisation	Final Peak (dBµV/m)	Final Average (dBµV/m)
Horizontal	48.70	37.80

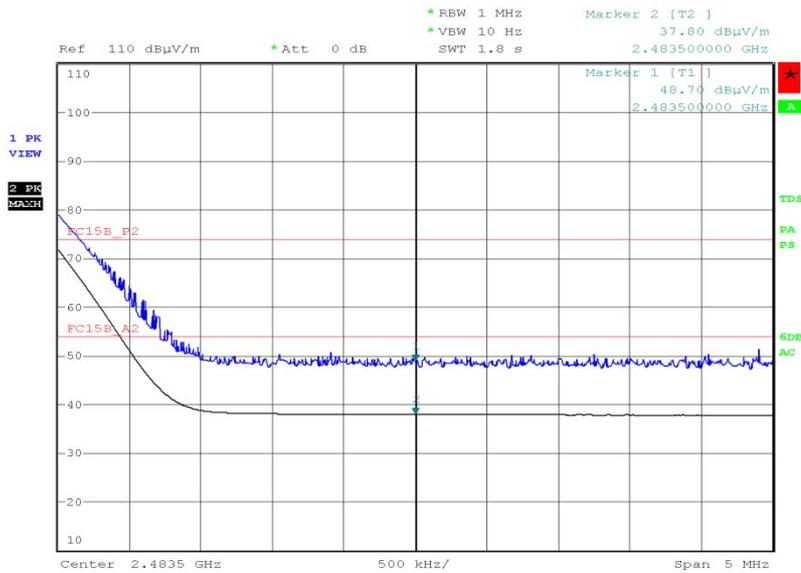

Date: 2.MAR.2013 22:05:43

Limit

Peak (dBµV/m)	Average (dBµV/m)
74.0	54.0



Product Service

SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.1- AC Line Conducted Emissions					
LISN (1 Phase)	Chase	MN 2050	336	12	23-Mar-2013
Transient Limiter	Hewlett Packard	11947A	1032	12	28-Jun-2013
Screened Room (5)	Rainford	Rainford	1545	36	25-Dec-2013
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	11-Oct-2013
7m Armoured RF Cable	SSI Cable Corp.	1501-13-13-7m WA(-)	3600	-	TU
Section 2.2 - Frequency Hopping Systems - 20dB Bandwidth and Channel Separation					
Multimeter	White Gold	WG022	190	12	30-Oct-2013
Attenuator (20dB/ 2W)	Pasternack	PE7004-20	489	12	18-Oct-2013
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	23-Jul-2013
Programmable Power Supply	Iso-tech	IPS 2010	2436	-	TU
Hygrometer	Rotronic	I-1000	3220	12	13-Jun-2013
Power Divider	Weinschel	1506A	3345	12	8-May-2013
Signal Analyser	Rohde & Schwarz	FSQ 26	3545	12	9-May-2013
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	31-Aug-2013
P-Series Power Meter	Agilent	N1911A	3980	12	17-Sep-2013
50 MHz-18 GHz Wideband Power Sensor	Agilent	N1921A	3982	12	17-Sep-2013
1 Metre K Type Cable	Rhophase	KPS-1501A-1000- KPS	4106	12	25-Oct-2013
2 Metre N Type Cable	Rhophase	NPS-1601A-2000- NPS	4110	12	1-Jun-2013
Section 2.3- Frequency Hopping Systems - Channel Dwell Time and Number of Hopping Channels					
Multimeter	White Gold	WG022	190	12	30-Oct-2013
Attenuator (20dB/ 2W)	Pasternack	PE7004-20	489	12	18-Oct-2013
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	23-Jul-2013
Programmable Power Supply	Iso-tech	IPS 2010	2436	-	TU
Hygrometer	Rotronic	I-1000	3220	12	13-Jun-2013
Power Divider	Weinschel	1506A	3345	12	8-May-2013
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	31-Aug-2013
P-Series Power Meter	Agilent	N1911A	3980	12	17-Sep-2013
50 MHz-18 GHz Wideband Power Sensor	Agilent	N1921A	3982	12	17-Sep-2013
1 Metre K Type Cable	Rhophase	KPS-1501A-1000- KPS	4106	12	25-Oct-2013
2 Metre N Type Cable	Rhophase	NPS-1601A-2000- NPS	4110	12	1-Jun-2013
Section 2.4 - Maximum Peak Conducted Output Power					
Multimeter	White Gold	WG022	190	12	30-Oct-2013
Attenuator (20dB/ 2W)	Pasternack	PE7004-20	489	12	18-Oct-2013
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	23-Jul-2013
Programmable Power Supply	Iso-tech	IPS 2010	2436	-	TU
Hygrometer	Rotronic	I-1000	3220	12	13-Jun-2013
Power Divider	Weinschel	1506A	3345	12	8-May-2013
Signal Analyser	Rohde & Schwarz	FSQ 26	3545	12	9-May-2013
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	31-Aug-2013
P-Series Power Meter	Agilent	N1911A	3980	12	17-Sep-2013
50 MHz-18 GHz Wideband Power Sensor	Agilent	N1921A	3982	12	17-Sep-2013
1 Metre K Type Cable	Rhophase	KPS-1501A-1000- KPS	4106	12	25-Oct-2013
2 Metre N Type Cable	Rhophase	NPS-1601A-2000- NPS	4110	12	1-Jun-2013



Product Service

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.5 - EIRP Peak Power					
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	235	12	9-Nov-2013
Communications Tester	Rohde & Schwarz	CMU 200	442	12	1-Nov-2013
Screened Room (5)	Rainford	Rainford	1545	36	25-Dec-2013
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Antenna (Bilog)	Chase	CBL6143	2904	24	12-May-2013
Antenna (DRG Horn)	ETS-LINDGREN	3115	3125	12	24-May-2013
Signal Generator: 10MHz to 20GHz	Rohde & Schwarz	SMR20	3475	12	1-Feb-2014
Signal Generator, 9kHz - 3GHz	Rohde & Schwarz	SMA 100A	3504	12	24-Aug-2013
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	11-Oct-2013
7m Armoured RF Cable	SSI Cable Corp.	1501-13-13-7m WA(-)	3600	-	TU
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	-	TU
Tilt Antenna Mast	matur GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	matur GmbH	NCD	3917	-	TU
Section 2.6 - Spurious and Band Edge Emissions					
Antenna (Double Ridge Guide)	Link Microtek Ltd	AM180HA-K-TU2	230	24	13-Sep-2013
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	235	12	9-Nov-2013
Communications Tester	Rohde & Schwarz	CMU 200	442	12	1-Nov-2013
Pre-Amplifier	Phase One	PSO4-0087	1534	12	28-Sep-2013
Screened Room (5)	Rainford	Rainford	1545	36	25-Dec-2013
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Antenna (Bilog)	Chase	CBL6143	2904	24	12-May-2013
Amplifier (1 - 8GHz)	Phase One	PS06-0060	3175	12	10-Jul-2013
Amplifier (8 - 18GHz)	Phase One	PS06-0061	3176	12	10-Jul-2013
High Pass Filter (3GHz)	RLC Electronics	F-100-3000-5-R	3349	12	29-May-2013
Signal Generator: 10MHz to 20GHz	Rohde & Schwarz	SMR20	3475	12	1-Feb-2014
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	11-Oct-2013
3 GHz High Pass Filter	K&L Microwave	11SH10-3000/X18000-O/O	3552	12	1-Feb-2014
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	-	TU
Tilt Antenna Mast	matur GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	matur GmbH	NCD	3917	-	TU
1 metre, SMA to SMA	Suhner	Sucoflex armoured cable	4048	-	O/P Mon

TU – Traceability Unscheduled

O/P MON – Output Monitored with Calibrated Equipment



3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU
Frequency Hopping Systems - 20dB Bandwidth and Channel Separation	± 16.74 kHz
Frequency Hopping Systems - Channel Dwell Time and Number of Hopping Channels	-
EIRP Peak Power	30MHz to 1GHz: ± 5.1 dB 1GHz to 40GHz: ± 6.3 dB
Maximum Peak Conducted Output Power	± 0.70 dB
Spurious and Band Edge Emissions	30MHz to 1GHz: ± 5.1 dB 1GHz to 40GHz: ± 6.3 dB
AC Line Conducted Emissions	± 3.2 dB



Product Service

SECTION 4

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Product Service

4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of TÜV SÜD Product Service

© 2013 TÜV SÜD Product Service