



FCC RF Test Report

APPLICANT : SHARP CORPORATION, IoT Communication BU
EQUIPMENT : Smart Phone
BRAND NAME : NTT docomo
MODEL NAME : SH-03J
FCC ID : APYHRO00248
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Apr. 01, 2017 and testing was completed on Apr. 21, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant..... 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test 5

 1.4 Modification of EUT 5

 1.5 Testing Location 6

 1.6 Applicable Standards 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 7

 2.1 Test Mode..... 7

 2.2 Connection Diagram of Test System 7

 2.3 Support Unit used in test configuration 8

 2.4 Measurement Results Explanation Example 8

 2.5 Frequency List of Low/Middle/High Channels..... 8

3 CONDUCTED TEST RESULT..... 9

 3.1 Measuring Instruments..... 9

 3.2 Test Setup 9

 3.3 Test Result of Conducted Test..... 9

 3.4 Conducted Output Power 10

 3.5 Peak-to-Average Ratio 10

 3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement..... 11

 3.7 Conducted Band Edge 12

 3.8 Conducted Spurious Emission 12

 3.9 Frequency Stability..... 13

4 RADIATED TEST ITEMS 14

 4.1 Measuring Instruments..... 14

 4.2 Test Setup 14

 4.3 Test Result of Radiated Test..... 14

 4.4 Effective Radiated Power and Effective Isotropic Radiated Power Measurement 15

 4.5 Field Strength of Spurious Radiation Measurement 16

5 LIST OF MEASURING EQUIPMENT 17

6 UNCERTAINTY OF EVALUATION 18

APPENDIX A. TEST RESULTS OF CONDUCTED TEST

APPENDIX B. TEST RESULTS OF RADIATED TEST

APPENDIX C. TEST SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG740120A	Rev. 01	Initial issue of report	Jun. 02, 2017



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.6	§2.1049 §22.917(b) §24.238(b)	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a)	Band Edge Measurement	< 43+10log ₁₀ (P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a)	Conducted Emission	< 43+10log ₁₀ (P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§2.1055 §24.235		Within Authorized Band		
4.4	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
4.5	§2.1053 §22.917(a) §24.238(a)	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 39.59 dB at 7518.000 MHz



1 General Description

1.1 Applicant

SHARP CORPORATION, IoT Communication BU

2-13-1, Hachihonmatsu-lida, Higashi-hiroshima-shi, Hiroshima, 739-0192, Japan

1.2 Manufacturer

SHARP CORPORATION, IoT Communication BU

2-13-1, Hachihonmatsu-lida, Higashi-hiroshima-shi, Hiroshima, 739-0192, Japan

1.3 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac, Wi-Fi 5GHz 802.11a/n/ac, NFC, and GPS

Product Specification subjective to this standard	
Sample 1	EUT with Memory 1
Sample 2	EUT with Memory 2
Antenna Type	WWAN: ILA Antenna WLAN: ILA Antenna Bluetooth: ILA Antenna GPS/Glonass/Beidou/Galileo: ILA Antenna NFC: Loop Antenna

Remark: All tests were performed with sample 1.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	TH03-HY

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	03CH10-HY

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E)
- ANSI / TIA / EIA-603-D-2010
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 19100 MHz for GSM1900.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GPRS class 8 Link	■ GPRS class 8 Link
GSM 1900	■ GPRS class 8 Link	■ GPRS class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

2.2 Connection Diagram of Test System

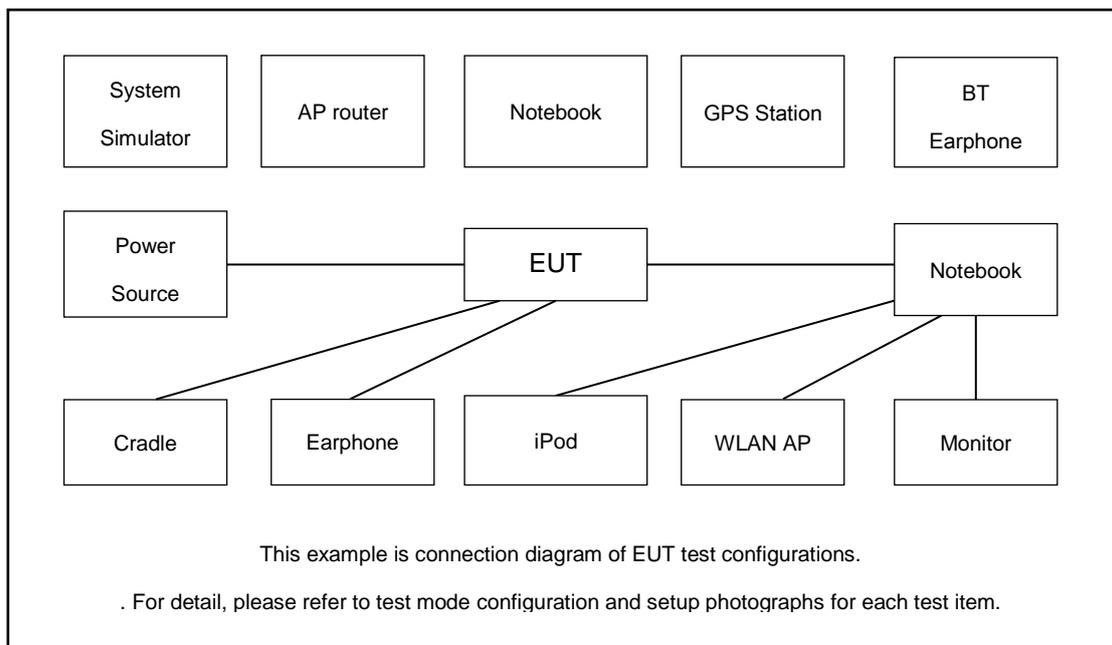



2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
GSM850	Channel	128	189	251
	Frequency	824.2	836.4	848.8
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
GSM1900	Channel	512	661	810
	Frequency	1850.2	1880.0	1909.8


3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

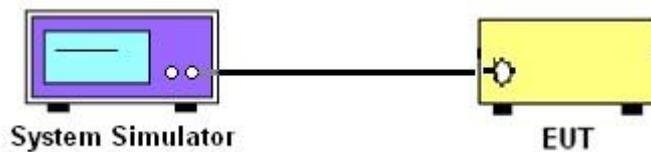

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

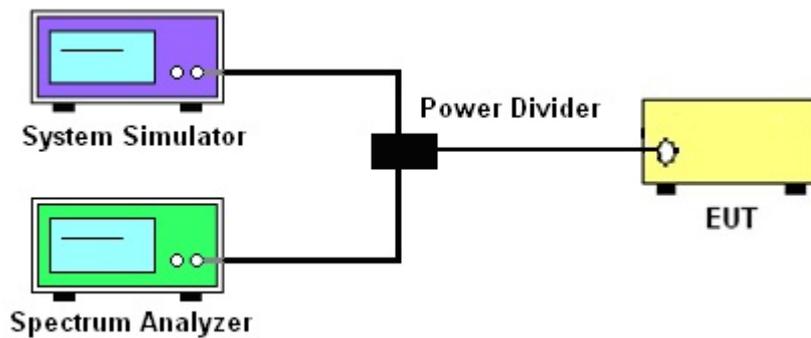

3.2.3 Frequency Stability

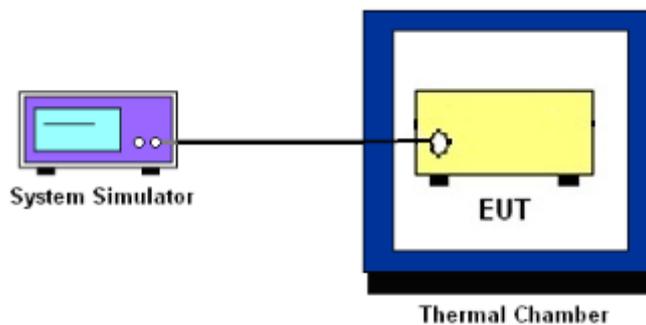

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power

3.4.1 Description of the Conducted Output Power

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. Set EUT to transmit at maximum output power.
4. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
Record the maximum PAPR level associated with a probability of 0.1%.



3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

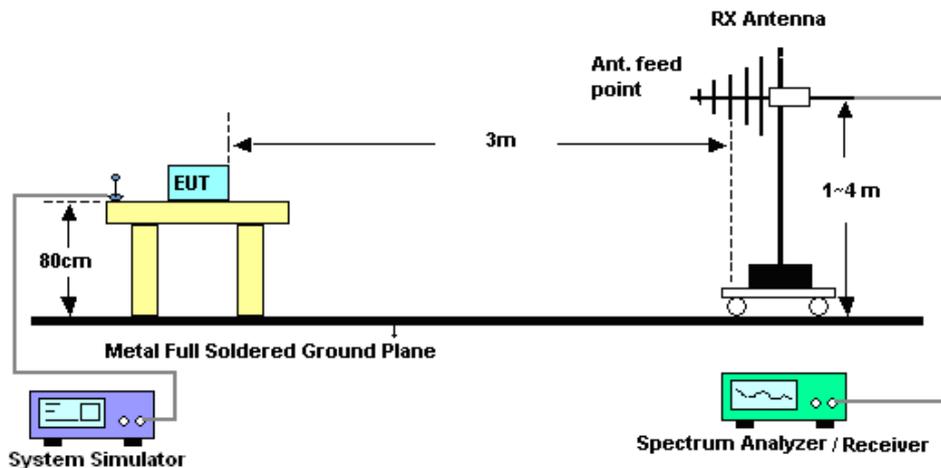

4.2.2 For radiated test above 1GHz

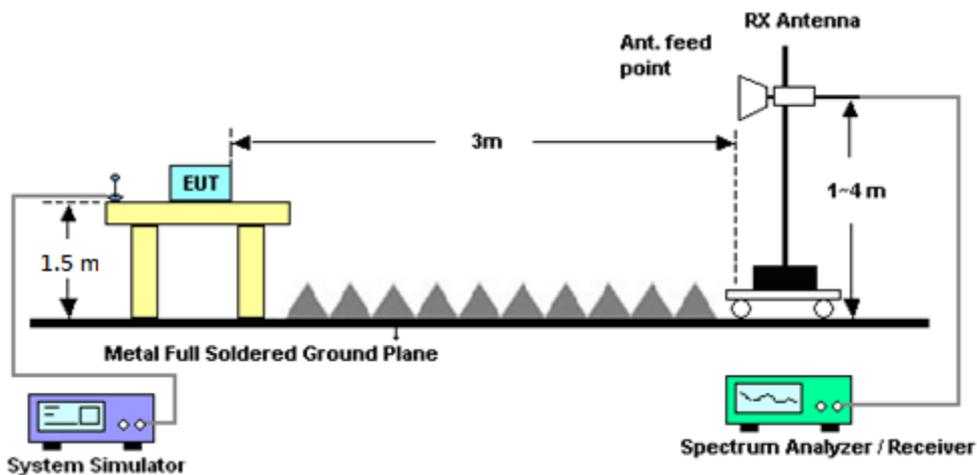

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

4.4.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-D-2010, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band).

4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-D-2010 Section 2.2.17.
2. The EUT was placed on a non-conductive rotating platform (0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz) in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$. Take the record of the output power at substitution antenna.

	GSM/GPRS/EDGE	WCDMA/HSPA
SPAN	500kHz	10MHz
RBW	10kHz	100kHz
VBW	30kHz	300kHz
Detector	RMS	RMS
Trace	Average	Average
Average Type	Power	Power
Sweep Count	100	100



4.5 Field Strength of Spurious Radiation Measurement

4.5.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.5.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
12. $ERP (dBm) = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Jun. 27, 2016	Apr. 13, 2017 ~ Apr. 18, 2017	Jun. 26, 2017	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30℃ ~70℃	Nov. 16, 2016	Apr. 13, 2017 ~ Apr. 18, 2017	Nov. 15, 2017	Conducted (TH03-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL883644	Voltage:0~20V; Current:0~5A	Nov. 22, 2016	Apr. 13, 2017 ~ Apr. 18, 2017	Nov. 21, 2017	Conducted (TH03-HY)
Base Station (Measure)	Rohde & Schwarz	CMU200	117997	GSM / GPRS / WCDMA / CDMA	Aug. 05, 2016	Apr. 13, 2017 ~ Apr. 18, 2017	Aug. 04, 2017	Conducted (TH03-HY)
Amplifier	SONOMA	310N	187311	9kHz~1GHz	Oct. 26, 2016	Apr. 21, 2017	Oct. 25, 2017	Radiation (03CH10-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	35413&02	30MHz~1GHz	Jan. 07, 2017	Apr. 21, 2017	Jan. 06, 2018	Radiation (03CH10-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-132 5	1GHz ~ 18GHz	Sep. 30, 2016	Apr. 21, 2017	Sep. 29, 2017	Radiation (03CH10-HY)
Preamplifier	Keysight	83017A	MY532700 78	1GHz~26.5GHz	Oct. 26, 2016	Apr. 21, 2017	Oct. 25, 2017	Radiation (03CH10-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 85	10Hz ~ 44GHz	Oct. 17, 2016	Apr. 21, 2017	Oct. 16, 2017	Radiation (03CH10-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Apr. 21, 2017	N/A	Radiation (03CH10-HY)
Turn Table	EMEC	TT 2200	N/A	0~360 Degree	N/A	Apr. 21, 2017	N/A	Radiation (03CH10-HY)
Preamplifier	MITEQ	JS44-180040 00-33-8P	1840917	18GHz ~ 40GHz	Jun. 14, 2016	Apr. 21, 2017	Jun. 13, 2017	Radiation (03CH10-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-162 0	1G~18GHz	Sep. 30, 2016	Apr. 21, 2017	Sep. 29, 2017	Radiation (03CH10-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 584	18GHz- 40GHz	Nov. 08, 2016	Apr. 21, 2017	Nov. 07, 2017	Radiation (03CH10-HY)
Signal Generator	Anritsu	MG3694C	163401	0.1Hz~40GHz	Jan. 04, 2017	Apr. 21, 2017	Jan. 03, 2018	Radiation (03CH10-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.6
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.9
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GSM	32.26	32.24	32.12	29.11	29.37	29.35
GPRS class 8	32.30	32.28	32.15	29.16	29.38	29.36
GPRS class 10	29.88	29.87	29.82	26.78	26.81	27.22
GPRS class 11	27.66	27.64	27.56	25.10	25.31	25.46
GPRS class 12	27.26	27.24	27.18	24.37	24.53	24.65
EGPRS class 8	-	-	-	-	-	-
EGPRS class 10	-	-	-	-	-	-
EGPRS class 11	-	-	-	-	-	-
EGPRS class 12	-	-	-	-	-	-

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
RMC 12.2K	22.59	22.62	22.55	-	-	-
HSDPA Subtest-1	21.62	21.64	21.56	-	-	-
HSDPA Subtest-2	21.64	21.61	21.55	-	-	-
HSDPA Subtest-3	21.17	21.18	21.13	-	-	-
HSDPA Subtest-4	21.18	21.17	21.15	-	-	-
HSUPA Subtest-1	21.61	21.63	21.56	-	-	-
HSUPA Subtest-2	19.62	19.65	19.51	-	-	-
HSUPA Subtest-3	20.61	20.63	20.52	-	-	-
HSUPA Subtest-4	19.66	19.64	19.53	-	-	-
HSUPA Subtest-5	21.64	21.65	21.59	-	-	-



A1. GSM

Peak-to-Average Ratio

Mode	GSM850	Limit: 13dB
Mod.	GPRS class 8	Result
Lowest CH	0.32	PASS
Middle CH	0.32	
Highest CH	0.28	

Mode	GSM1900	Limit: 13dB
Mod.	GPRS class 8	Result
Lowest CH	0.28	PASS
Middle CH	0.28	
Highest CH	0.28	




GSM850 (GPRS class 8)	GSM1900 (GPRS class 8)
<p align="center">Lowest Channel</p> <p align="center">Date: 13.APR.2017 12:54:48</p>	<p align="center">Lowest Channel</p> <p align="center">Date: 18.APR.2017 14:39:07</p>
<p align="center">Middle Channel</p> <p align="center">Date: 13.APR.2017 12:55:31</p>	<p align="center">Middle Channel</p> <p align="center">Date: 18.APR.2017 14:39:28</p>
<p align="center">Highest Channel</p> <p align="center">Date: 13.APR.2017 12:56:07</p>	<p align="center">Highest Channel</p> <p align="center">Date: 18.APR.2017 14:39:51</p>



26dB Bandwidth

Mode	GSM850
Mod.	GPRS class 8
Lowest CH	0.311
Middle CH	0.310
Highest CH	0.306

Mode	GSM1900
Mod.	GPRS class 8
Lowest CH	0.314
Middle CH	0.315
Highest CH	0.293

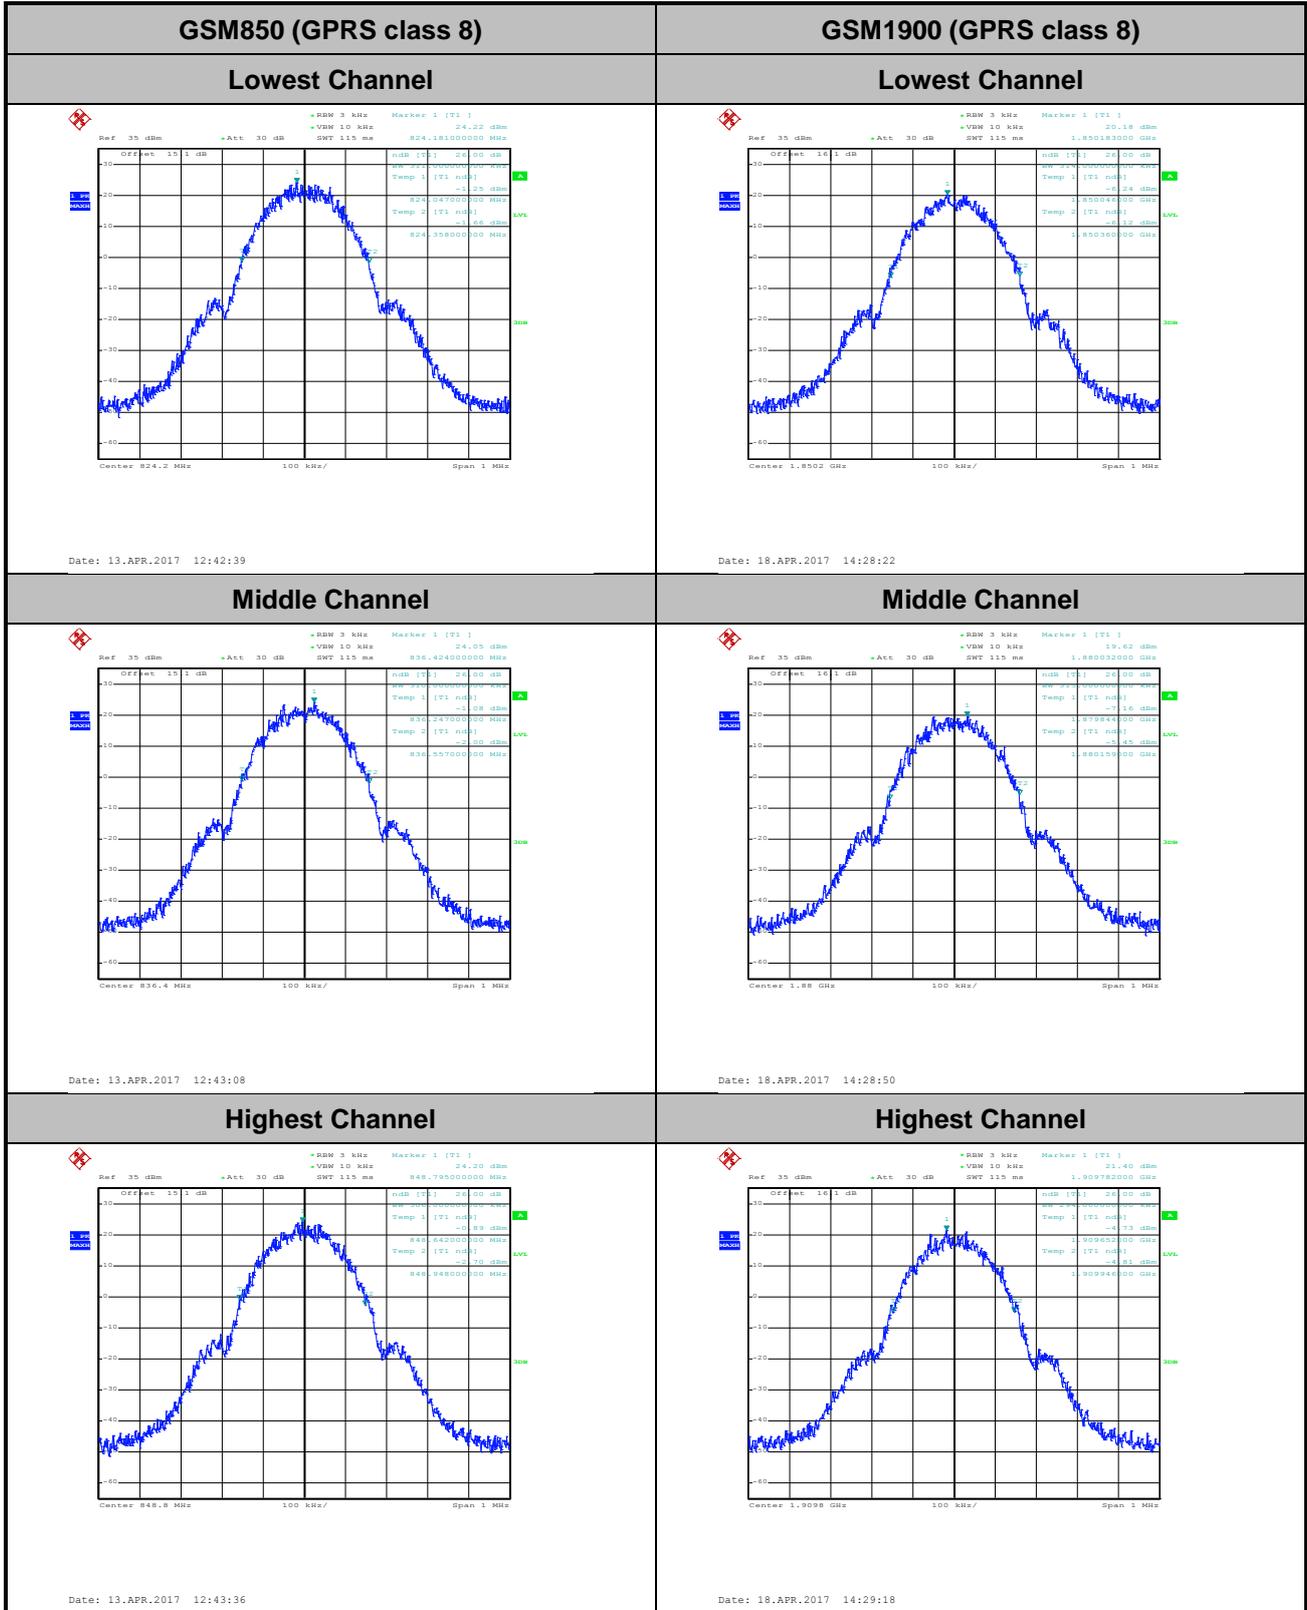




Occupied Bandwidth

Mode	GSM850
Mod.	GPRS class 8
Lowest CH	0.245
Middle CH	0.249
Highest CH	0.244

Mode	GSM1900
Mod.	GPRS class 8
Lowest CH	0.240
Middle CH	0.243
Highest CH	0.244

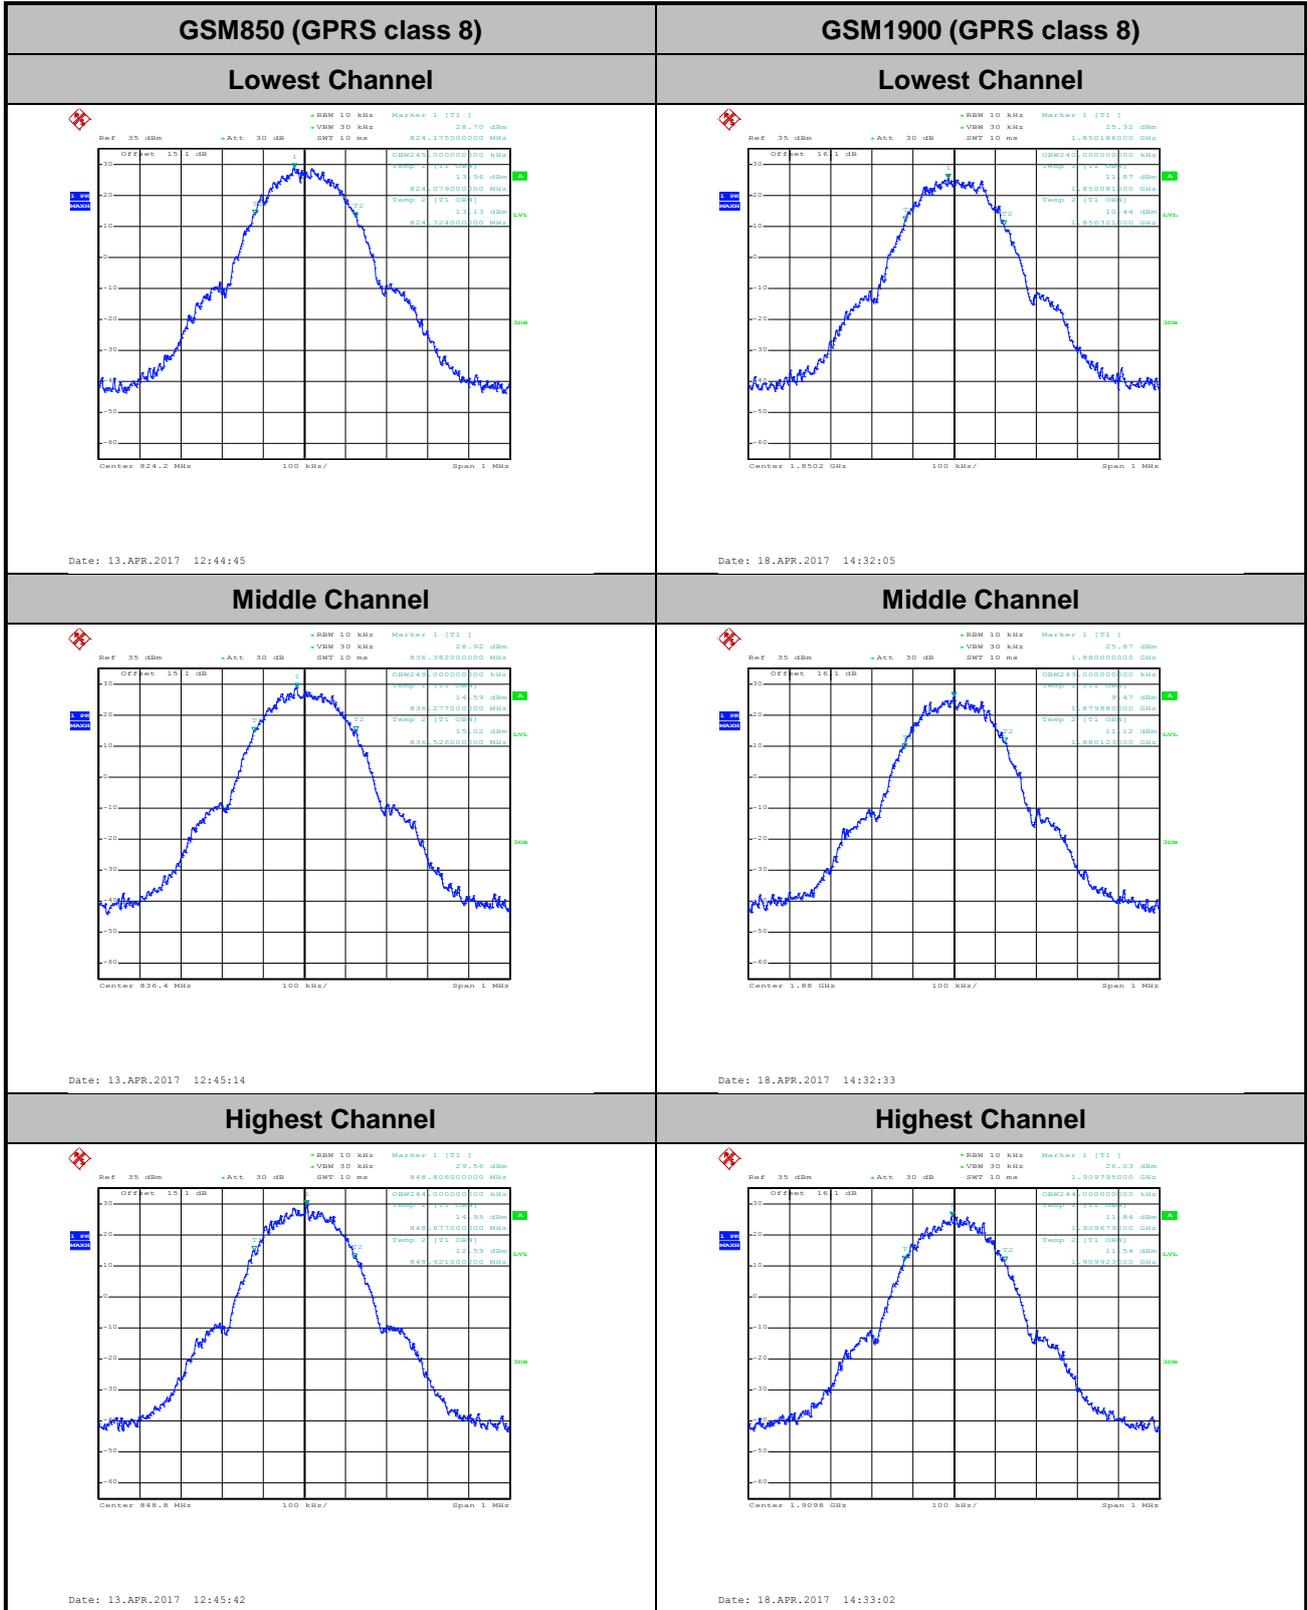




Conducted Band Edge


GSM850 (GPRS class 8)

Lowest Band Edge

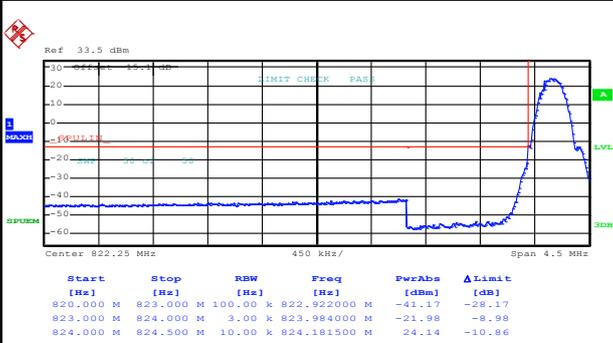

Date: 13.APR.2017 12:47:11


Highest Band Edge

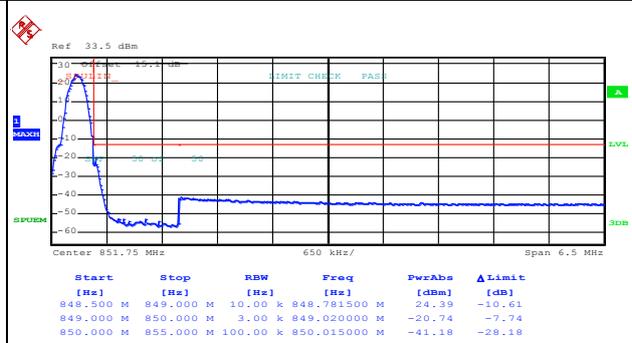

Date: 13.APR.2017 12:48:39


GSM1900 (GPRS class 8)

Lowest Band Edge

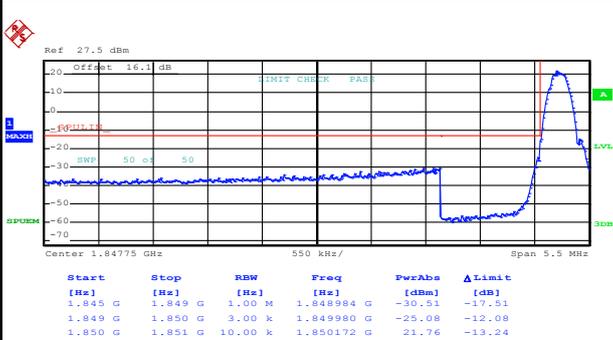

Date: 18.APR.2017 14:34:44






Highest Band Edge

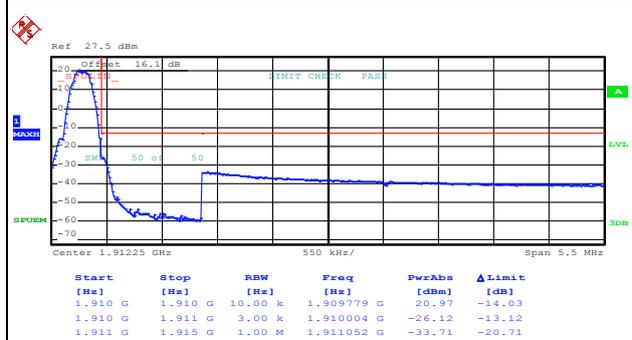

Date: 18.APR.2017 14:36:12



Conducted Spurious Emission

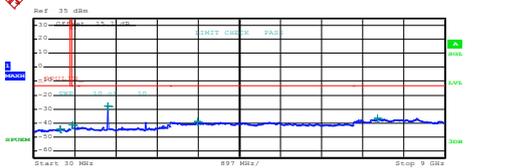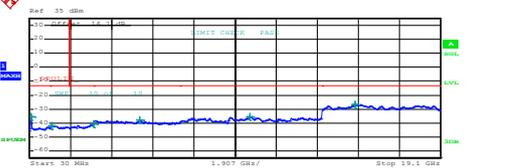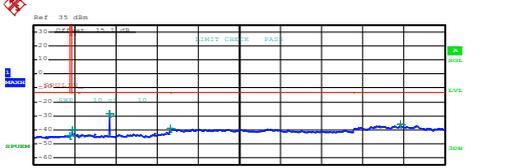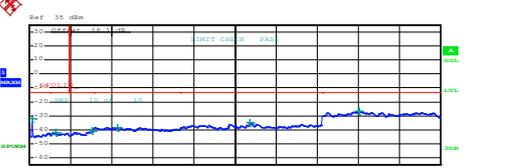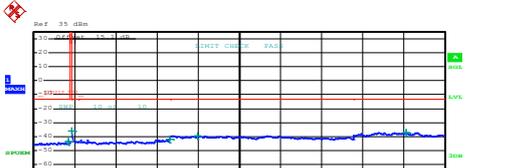GSM850 (GPRS class 8)	GSM1900 (GPRS class 8)																																																																														
Lowest Channel	Lowest Channel																																																																														
 <table border="1" data-bbox="207 660 734 739"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PeakAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30.000 M</td> <td>820.000 M</td> <td>1.00 M</td> <td>609.465000 M</td> <td>-44.17</td> <td>-21.17</td> </tr> <tr> <td>855.000 M</td> <td>1.000 G</td> <td>1.00 M</td> <td>870.916251 M</td> <td>-41.51</td> <td>-28.51</td> </tr> <tr> <td>1.000 G</td> <td>3.000 G</td> <td>1.00 M</td> <td>1.1488500 G</td> <td>-27.70</td> <td>-24.70</td> </tr> <tr> <td>3.000 G</td> <td>7.000 G</td> <td>1.00 M</td> <td>3.597000 G</td> <td>-38.75</td> <td>-25.75</td> </tr> <tr> <td>7.000 G</td> <td>9.000 G</td> <td>1.00 M</td> <td>7.526500 G</td> <td>-36.54</td> <td>-23.54</td> </tr> </tbody> </table> <p>Date: 13.APR.2017 12:52:34</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PeakAbs [dBm]	ΔLimit [dB]	30.000 M	820.000 M	1.00 M	609.465000 M	-44.17	-21.17	855.000 M	1.000 G	1.00 M	870.916251 M	-41.51	-28.51	1.000 G	3.000 G	1.00 M	1.1488500 G	-27.70	-24.70	3.000 G	7.000 G	1.00 M	3.597000 G	-38.75	-25.75	7.000 G	9.000 G	1.00 M	7.526500 G	-36.54	-23.54	 <table border="1" data-bbox="861 660 1388 739"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PeakAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30.000 M</td> <td>1.000 G</td> <td>1.00 M</td> <td>111.965000 M</td> <td>-35.28</td> <td>-22.28</td> </tr> <tr> <td>1.000 G</td> <td>3.000 G</td> <td>1.00 M</td> <td>1.071191 G</td> <td>-41.81</td> <td>-28.81</td> </tr> <tr> <td>3.000 G</td> <td>7.000 G</td> <td>1.00 M</td> <td>2.989350 G</td> <td>-40.96</td> <td>-27.96</td> </tr> <tr> <td>7.000 G</td> <td>13.000 G</td> <td>1.00 M</td> <td>5.133000 G</td> <td>-38.08</td> <td>-25.08</td> </tr> <tr> <td>13.000 G</td> <td>19.000 G</td> <td>1.00 M</td> <td>10.234000 G</td> <td>-35.24</td> <td>-22.24</td> </tr> <tr> <td>19.000 G</td> <td>19.100 G</td> <td>1.00 M</td> <td>19.147562 G</td> <td>-26.70</td> <td>-13.70</td> </tr> </tbody> </table> <p>Date: 18.APR.2017 14:37:00</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PeakAbs [dBm]	ΔLimit [dB]	30.000 M	1.000 G	1.00 M	111.965000 M	-35.28	-22.28	1.000 G	3.000 G	1.00 M	1.071191 G	-41.81	-28.81	3.000 G	7.000 G	1.00 M	2.989350 G	-40.96	-27.96	7.000 G	13.000 G	1.00 M	5.133000 G	-38.08	-25.08	13.000 G	19.000 G	1.00 M	10.234000 G	-35.24	-22.24	19.000 G	19.100 G	1.00 M	19.147562 G	-26.70	-13.70
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PeakAbs [dBm]	ΔLimit [dB]																																																																										
30.000 M	820.000 M	1.00 M	609.465000 M	-44.17	-21.17																																																																										
855.000 M	1.000 G	1.00 M	870.916251 M	-41.51	-28.51																																																																										
1.000 G	3.000 G	1.00 M	1.1488500 G	-27.70	-24.70																																																																										
3.000 G	7.000 G	1.00 M	3.597000 G	-38.75	-25.75																																																																										
7.000 G	9.000 G	1.00 M	7.526500 G	-36.54	-23.54																																																																										
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PeakAbs [dBm]	ΔLimit [dB]																																																																										
30.000 M	1.000 G	1.00 M	111.965000 M	-35.28	-22.28																																																																										
1.000 G	3.000 G	1.00 M	1.071191 G	-41.81	-28.81																																																																										
3.000 G	7.000 G	1.00 M	2.989350 G	-40.96	-27.96																																																																										
7.000 G	13.000 G	1.00 M	5.133000 G	-38.08	-25.08																																																																										
13.000 G	19.000 G	1.00 M	10.234000 G	-35.24	-22.24																																																																										
19.000 G	19.100 G	1.00 M	19.147562 G	-26.70	-13.70																																																																										
Middle Channel	Middle Channel																																																																														
 <table border="1" data-bbox="207 1173 734 1252"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PeakAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30.000 M</td> <td>820.000 M</td> <td>1.00 M</td> <td>818.017500 M</td> <td>-44.04</td> <td>-31.04</td> </tr> <tr> <td>855.000 M</td> <td>1.000 G</td> <td>1.00 M</td> <td>876.092501 M</td> <td>-40.24</td> <td>-27.24</td> </tr> <tr> <td>1.000 G</td> <td>3.000 G</td> <td>1.00 M</td> <td>1.673000 G</td> <td>-28.34</td> <td>-15.34</td> </tr> <tr> <td>3.000 G</td> <td>7.000 G</td> <td>1.00 M</td> <td>3.012000 G</td> <td>-39.26</td> <td>-26.26</td> </tr> <tr> <td>7.000 G</td> <td>9.000 G</td> <td>1.00 M</td> <td>8.023500 G</td> <td>-36.33</td> <td>-23.33</td> </tr> </tbody> </table> <p>Date: 13.APR.2017 12:53:20</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PeakAbs [dBm]	ΔLimit [dB]	30.000 M	820.000 M	1.00 M	818.017500 M	-44.04	-31.04	855.000 M	1.000 G	1.00 M	876.092501 M	-40.24	-27.24	1.000 G	3.000 G	1.00 M	1.673000 G	-28.34	-15.34	3.000 G	7.000 G	1.00 M	3.012000 G	-39.26	-26.26	7.000 G	9.000 G	1.00 M	8.023500 G	-36.33	-23.33	 <table border="1" data-bbox="861 1173 1388 1252"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PeakAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30.000 M</td> <td>1.000 G</td> <td>1.00 M</td> <td>141.792500 M</td> <td>-32.24</td> <td>-19.24</td> </tr> <tr> <td>1.000 G</td> <td>3.000 G</td> <td>1.00 M</td> <td>1.265000 G</td> <td>-42.19</td> <td>-29.19</td> </tr> <tr> <td>3.000 G</td> <td>7.000 G</td> <td>1.00 M</td> <td>2.946584 G</td> <td>-41.01</td> <td>-28.01</td> </tr> <tr> <td>7.000 G</td> <td>13.000 G</td> <td>1.00 M</td> <td>4.101000 G</td> <td>-38.37</td> <td>-25.37</td> </tr> <tr> <td>13.000 G</td> <td>19.000 G</td> <td>1.00 M</td> <td>10.252500 G</td> <td>-34.45</td> <td>-21.45</td> </tr> <tr> <td>19.000 G</td> <td>19.100 G</td> <td>1.00 M</td> <td>19.323583 G</td> <td>-26.56</td> <td>-13.56</td> </tr> </tbody> </table> <p>Date: 18.APR.2017 14:37:46</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PeakAbs [dBm]	ΔLimit [dB]	30.000 M	1.000 G	1.00 M	141.792500 M	-32.24	-19.24	1.000 G	3.000 G	1.00 M	1.265000 G	-42.19	-29.19	3.000 G	7.000 G	1.00 M	2.946584 G	-41.01	-28.01	7.000 G	13.000 G	1.00 M	4.101000 G	-38.37	-25.37	13.000 G	19.000 G	1.00 M	10.252500 G	-34.45	-21.45	19.000 G	19.100 G	1.00 M	19.323583 G	-26.56	-13.56
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PeakAbs [dBm]	ΔLimit [dB]																																																																										
30.000 M	820.000 M	1.00 M	818.017500 M	-44.04	-31.04																																																																										
855.000 M	1.000 G	1.00 M	876.092501 M	-40.24	-27.24																																																																										
1.000 G	3.000 G	1.00 M	1.673000 G	-28.34	-15.34																																																																										
3.000 G	7.000 G	1.00 M	3.012000 G	-39.26	-26.26																																																																										
7.000 G	9.000 G	1.00 M	8.023500 G	-36.33	-23.33																																																																										
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PeakAbs [dBm]	ΔLimit [dB]																																																																										
30.000 M	1.000 G	1.00 M	141.792500 M	-32.24	-19.24																																																																										
1.000 G	3.000 G	1.00 M	1.265000 G	-42.19	-29.19																																																																										
3.000 G	7.000 G	1.00 M	2.946584 G	-41.01	-28.01																																																																										
7.000 G	13.000 G	1.00 M	4.101000 G	-38.37	-25.37																																																																										
13.000 G	19.000 G	1.00 M	10.252500 G	-34.45	-21.45																																																																										
19.000 G	19.100 G	1.00 M	19.323583 G	-26.56	-13.56																																																																										
Highest Channel	Highest Channel																																																																														
 <table border="1" data-bbox="207 1686 734 1765"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PeakAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30.000 M</td> <td>820.000 M</td> <td>1.00 M</td> <td>778.920000 M</td> <td>-43.92</td> <td>-30.92</td> </tr> <tr> <td>855.000 M</td> <td>1.000 G</td> <td>1.00 M</td> <td>850.036250 M</td> <td>-36.26</td> <td>-23.26</td> </tr> <tr> <td>1.000 G</td> <td>3.000 G</td> <td>1.00 M</td> <td>2.993000 G</td> <td>-42.62</td> <td>-29.62</td> </tr> <tr> <td>3.000 G</td> <td>7.000 G</td> <td>1.00 M</td> <td>3.599000 G</td> <td>-39.32</td> <td>-26.32</td> </tr> <tr> <td>7.000 G</td> <td>9.000 G</td> <td>1.00 M</td> <td>8.164000 G</td> <td>-37.03</td> <td>-24.03</td> </tr> </tbody> </table> <p>Date: 13.APR.2017 12:54:06</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PeakAbs [dBm]	ΔLimit [dB]	30.000 M	820.000 M	1.00 M	778.920000 M	-43.92	-30.92	855.000 M	1.000 G	1.00 M	850.036250 M	-36.26	-23.26	1.000 G	3.000 G	1.00 M	2.993000 G	-42.62	-29.62	3.000 G	7.000 G	1.00 M	3.599000 G	-39.32	-26.32	7.000 G	9.000 G	1.00 M	8.164000 G	-37.03	-24.03	 <table border="1" data-bbox="861 1686 1388 1765"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PeakAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30.000 M</td> <td>1.000 G</td> <td>1.00 M</td> <td>171.620000 M</td> <td>-29.94</td> <td>-16.94</td> </tr> <tr> <td>1.000 G</td> <td>3.000 G</td> <td>1.00 M</td> <td>1.179340 G</td> <td>-42.46</td> <td>-29.46</td> </tr> <tr> <td>3.000 G</td> <td>7.000 G</td> <td>1.00 M</td> <td>1.933271 G</td> <td>-29.06</td> <td>-16.06</td> </tr> <tr> <td>7.000 G</td> <td>13.000 G</td> <td>1.00 M</td> <td>3.202000 G</td> <td>-38.47</td> <td>-25.47</td> </tr> <tr> <td>13.000 G</td> <td>19.000 G</td> <td>1.00 M</td> <td>10.215025 G</td> <td>-35.30</td> <td>-22.30</td> </tr> <tr> <td>19.000 G</td> <td>19.100 G</td> <td>1.00 M</td> <td>19.342933 G</td> <td>-26.99</td> <td>-13.99</td> </tr> </tbody> </table> <p>Date: 18.APR.2017 14:38:33</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PeakAbs [dBm]	ΔLimit [dB]	30.000 M	1.000 G	1.00 M	171.620000 M	-29.94	-16.94	1.000 G	3.000 G	1.00 M	1.179340 G	-42.46	-29.46	3.000 G	7.000 G	1.00 M	1.933271 G	-29.06	-16.06	7.000 G	13.000 G	1.00 M	3.202000 G	-38.47	-25.47	13.000 G	19.000 G	1.00 M	10.215025 G	-35.30	-22.30	19.000 G	19.100 G	1.00 M	19.342933 G	-26.99	-13.99
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PeakAbs [dBm]	ΔLimit [dB]																																																																										
30.000 M	820.000 M	1.00 M	778.920000 M	-43.92	-30.92																																																																										
855.000 M	1.000 G	1.00 M	850.036250 M	-36.26	-23.26																																																																										
1.000 G	3.000 G	1.00 M	2.993000 G	-42.62	-29.62																																																																										
3.000 G	7.000 G	1.00 M	3.599000 G	-39.32	-26.32																																																																										
7.000 G	9.000 G	1.00 M	8.164000 G	-37.03	-24.03																																																																										
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PeakAbs [dBm]	ΔLimit [dB]																																																																										
30.000 M	1.000 G	1.00 M	171.620000 M	-29.94	-16.94																																																																										
1.000 G	3.000 G	1.00 M	1.179340 G	-42.46	-29.46																																																																										
3.000 G	7.000 G	1.00 M	1.933271 G	-29.06	-16.06																																																																										
7.000 G	13.000 G	1.00 M	3.202000 G	-38.47	-25.47																																																																										
13.000 G	19.000 G	1.00 M	10.215025 G	-35.30	-22.30																																																																										
19.000 G	19.100 G	1.00 M	19.342933 G	-26.99	-13.99																																																																										



Frequency Stability

Test Conditions	Middle Channel	GSM850 (GPRS class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0096	PASS
40	Normal Voltage	0.0060	
30	Normal Voltage	0.0024	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0096	
0	Normal Voltage	0.0060	
-10	Normal Voltage	0.0036	
-20	Normal Voltage	0.0036	
-30	Normal Voltage	0.0000	
20	Maximum Voltage	0.0000	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0036	

Note:

- 1. Normal Voltage = 4.0 V. ; Battery End Point (BEP) = 3.7 V. ; Maximum Voltage =4.0 V
- 2. The frequency fundamental emissions stay within the authorized frequency block.



Test Conditions	Middle Channel	GSM1900 (GPRS class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0160	PASS
40	Normal Voltage	0.0191	
30	Normal Voltage	0.0176	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0186	
0	Normal Voltage	0.0016	
-10	Normal Voltage	0.0048	
-20	Normal Voltage	0.0043	
-30	Normal Voltage	0.0112	
20	Maximum Voltage	0.0000	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0170	

Note:

- 1. Normal Voltage = 4.0 V. ; Battery End Point (BEP) = 3.7 V. ; Maximum Voltage =4.0 V
- 2. The frequency fundamental emissions stay within the authorized frequency block.



A2. WCDMA


Peak-to-Average Ratio

Mode	WCDMA Band V	Limit: 13dB
Mod.	RMC 12.2Kbps	Result
Lowest CH	3.20	PASS
Middle CH	3.16	
Highest CH	3.16	




WCDMA Band V (RMC 12.2Kbps)

Lowest Channel

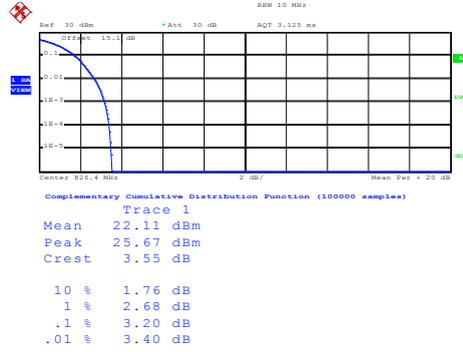


Date: 18.APR.2017 14:53:09

Middle Channel

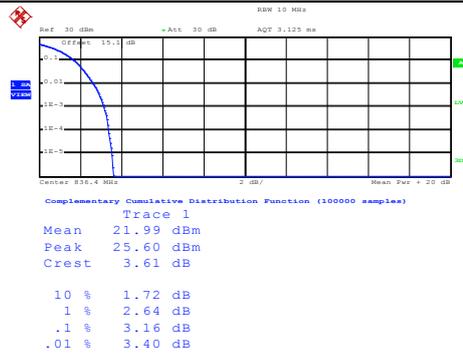

Date: 18.APR.2017 14:53:18

Highest Channel

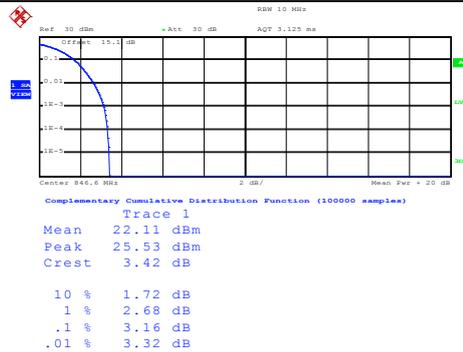

Date: 18.APR.2017 14:53:27




26dB Bandwidth

Mode	WCDMA Band V
Mod.	RMC 12.2Kbps
Lowest CH	4.70
Middle CH	4.71
Highest CH	4.69




WCDMA Band V (RMC 12.2Kbps)

Lowest Channel

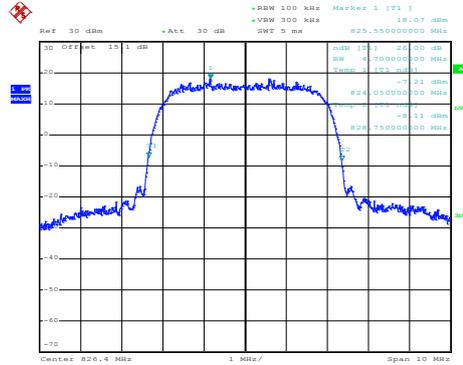


Date: 18.APR.2017 14:42:23

Middle Channel

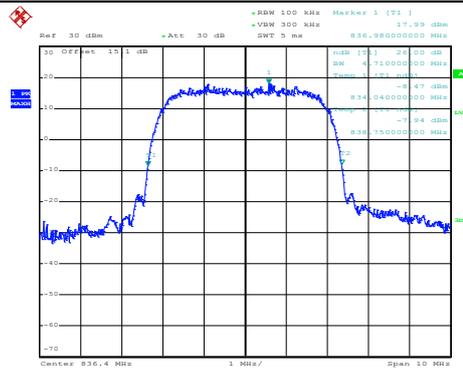

Date: 18.APR.2017 14:42:51

Highest Channel

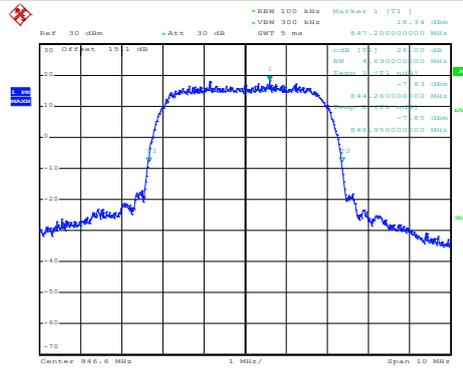

Date: 18.APR.2017 14:43:19




Occupied Bandwidth

Mode	WCDMA Band V
Mod.	RMC 12.2Kbps
Lowest CH	4.13
Middle CH	4.14
Highest CH	4.13




WCDMA Band V (RMC 12.2Kbps)

Lowest Channel

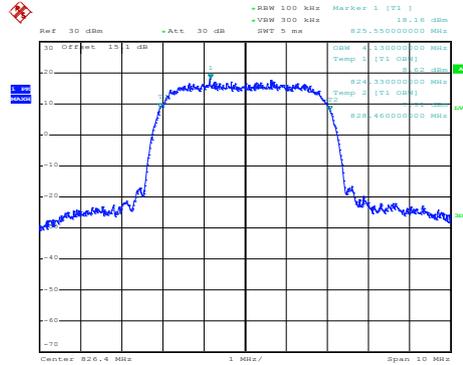


Date: 18.APR.2017 14:43:52

Middle Channel

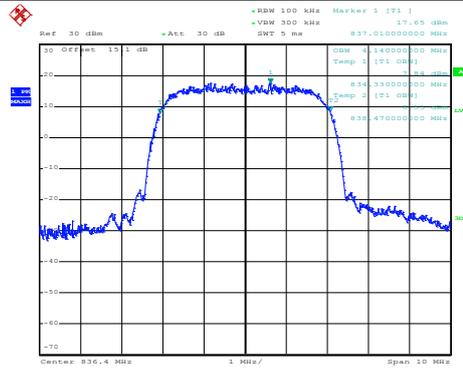

Date: 18.APR.2017 14:44:19

Highest Channel

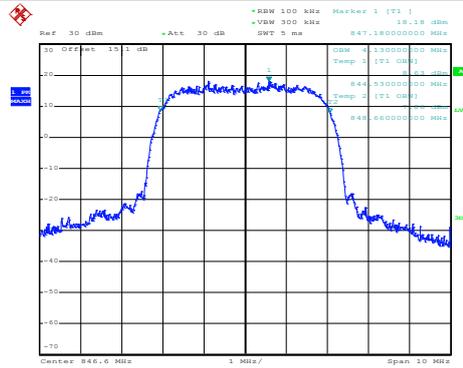


Date: 18.APR.2017 14:44:47



Conducted Band Edge


WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge

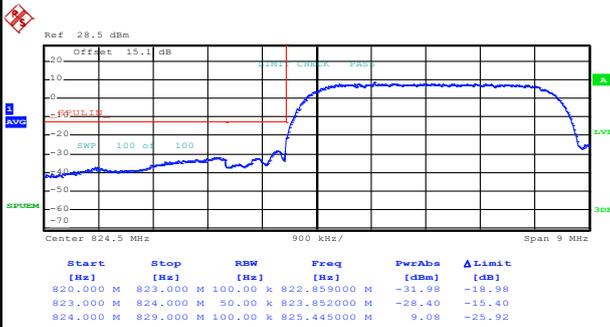

Date: 18.APR.2017 14:47:32


Highest Band Edge

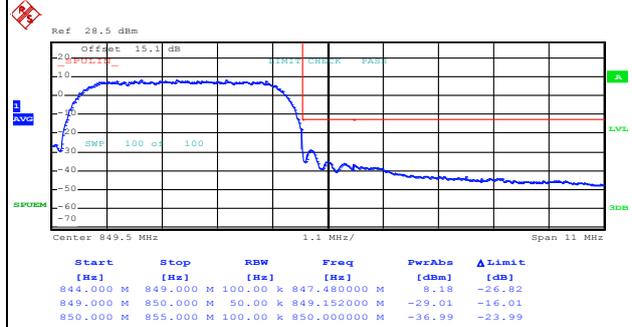

Date: 18.APR.2017 14:50:14



Conducted Spurious Emission

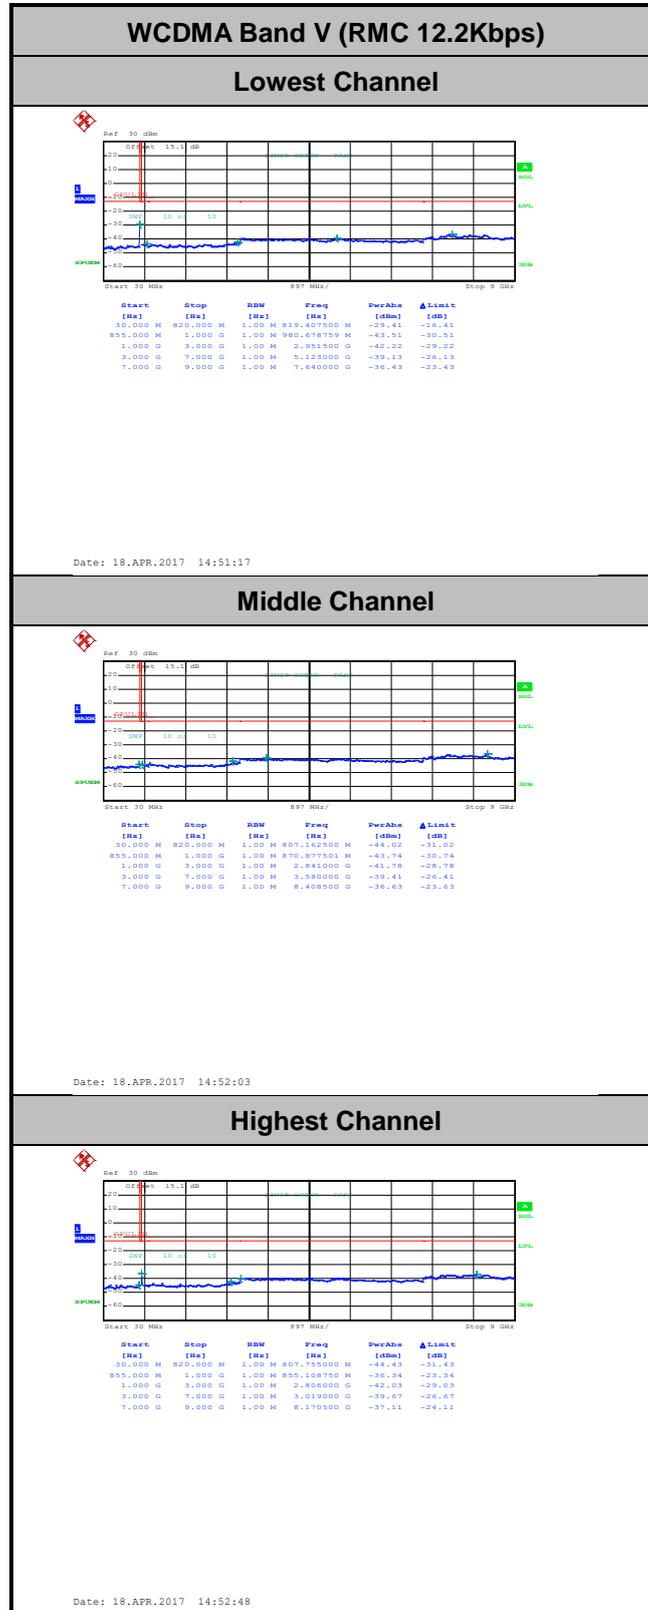



Frequency Stability

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0072	PASS
40	Normal Voltage	0.0108	
30	Normal Voltage	0.0060	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0084	
0	Normal Voltage	0.0323	
-10	Normal Voltage	0.0299	
-20	Normal Voltage	0.0251	
-30	Normal Voltage	0.0287	
20	Maximum Voltage	0.0000	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0215	

Note:

1. Normal Voltage = 4.0V. ; Battery End Point (BEP) = 3.7 V. ; Maximum Voltage =4.0 V
2. The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of ERP/EIRP and Radiated Test

ERP/EIRP

Channel	Mode	Horizontal		Vertical	
		ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	GSM850 GPRS class 8	16.53	0.0450	28.17	0.6561
Middle		17.25	0.0531	28.13	0.6501
Highest		17.79	0.0601	28.11	0.6471
Lowest	WCDMA Band V AMR 12.2Kbps	6.74	0.0047	18.20	0.0661
Middle		7.39	0.0055	18.16	0.0655
Highest		7.89	0.0062	18.20	0.0661
Limit	ERP < 7W	Result		PASS	

Channel	Mode	Horizontal		Vertical	
		EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	GSM1900 GPRS class 8	21.60	0.1445	27.38	0.5470
Middle		21.99	0.1581	28.40	0.6918
Highest		22.30	0.1698	28.77	0.7534
Limit	EIRP < 2W	Result		PASS	



Radiated Spurious Emission

GSM850 (GPRS class 8)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-54.95	-13	-41.95	-63.84	-61.9	0.53	9.63	H
	2472	-58.88	-13	-45.88	-70.82	-66.86	0.65	10.78	H
	3296	-60.55	-13	-47.55	-74.93	-69.63	0.76	11.99	H
	1648	-55.74	-13	-42.74	-64.4	-62.69	0.53	9.63	V
	2472	-58.80	-13	-45.80	-71.62	-66.78	0.65	10.78	V
	3296	-60.60	-13	-47.60	-74.99	-69.68	0.76	11.99	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM1900 (GPRS class 8)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3762	-57.09	-13	-44.09	-73.17	-68.9	0.69	12.50	H
	5640	-57.06	-13	-44.06	-76.28	-69.19	0.98	13.12	H
	7518	-52.59	-13	-39.59	-75.5	-61.86	1.18	10.45	H
	3762	-55.43	-13	-42.43	-71.78	-67.24	0.69	12.50	V
	5640	-55.59	-13	-42.59	-75.13	-67.72	0.98	13.12	V
	7518	-52.77	-13	-39.77	-75.73	-62.04	1.18	10.45	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band V (RMC 12.2Kbps)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-63.00	-13	-50.00	-71.93	-70	0.53	9.68	H
	2512	-62.12	-13	-49.12	-73.95	-70.12	0.66	10.81	H
	3344	-60.81	-13	-47.81	-74.95	-70.03	0.76	12.13	H
	1672	-62.56	-13	-49.56	-71.24	-69.56	0.53	9.68	V
	2512	-61.17	-13	-48.17	-73.89	-69.17	0.66	10.81	V
	3344	-60.99	-13	-47.99	-75.13	-70.21	0.76	12.13	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.