

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)

Report No.: RFBGTL-WTW-P22050889-2

FCC ID: APYHRO00320

Received Date: 2022/7/21

Test Date: 2022/8/6 ~ 2022/8/20

Issued Date: 2022/9/6

Applicant: SHARP Corporation Mobile Communication BU

Address: 2-13-1 Iida Hachihonmatsu Higashi-hiroshima City, Hiroshima 730-0192, Japan

Manufacturer: Sharp Corporation

Address: 1 Takumi-cho, Sakai-ku, Sakai City, Osaka 590-8522, Japan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location (1): No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kewi Shan Dist., Taoyuan City 33383, Taiwan

Test Location (2): B2F., No.215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231, Taiwan

FCC Registration / 788550 / TW0003

Designation Number: 427177 / TW0011

Approved by: _____

Jeremy Lin

, Date: _____

2022/9/6

Jeremy Lin / Project Engineer

This test report consists of 49 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Lena Wang / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description	7
3.2 Antenna Description of EUT	7
3.3 Channel List.....	8
3.4 Test Mode Applicability and Tested Channel Detail.....	9
3.5 Duty Cycle of Test Signal.....	10
3.6 Test Program Used and Operation Descriptions	11
3.7 Connection Diagram of EUT and Peripheral Devices	11
3.8 Configuration of Peripheral Devices and Cable Connections	11
4 Test Instruments	12
4.1 RF Output Power.....	12
4.2 Power Spectral Density	12
4.3 6 dB Bandwidth	12
4.4 Conducted Out of Band Emissions	12
4.5 AC Power Conducted Emissions	13
4.6 Unwanted Emissions below 1 GHz	14
4.7 Unwanted Emissions above 1 GHz.....	15
5 Limits of Test Items.....	16
5.1 RF Output Power.....	16
5.2 Power Spectral Density	16
5.3 6 dB Bandwidth	16
5.4 Conducted Out of Band Emissions	16
5.5 AC Power Conducted Emissions	16
5.6 Unwanted Emissions below 1 GHz	16
5.7 Unwanted Emissions above 1 GHz.....	17
6 Test Arrangements.....	18
6.1 RF Output Power.....	18
6.1.1 Test Setup	18
6.1.2 Test Procedure.....	18
6.2 Power Spectral Density	18
6.2.1 Test Setup	18
6.2.2 Test Procedure.....	18
6.3 6 dB Bandwidth	19
6.3.1 Test Setup	19
6.3.2 Test Procedure.....	19
6.4 Conducted Out of Band Emissions	19
6.4.1 Test Setup	19
6.4.2 Test Procedure.....	19
6.5 AC Power Conducted Emissions	20
6.5.1 Test Setup	20
6.5.2 Test Procedure.....	20
6.6 Unwanted Emissions below 1 GHz	21
6.6.1 Test Setup	21
6.6.2 Test Procedure.....	22
6.7 Unwanted Emissions above 1 GHz.....	23
6.7.1 Test Setup	23
6.7.2 Test Procedure.....	23
7 Test Results of Test Item	24



7.1	RF Output Power	24
7.2	Power Spectral Density	25
7.3	6 dB Bandwidth	27
7.4	Conducted Out of Band Emissions	29
7.5	AC Power Conducted Emissions	32
7.6	Unwanted Emissions below 1 GHz	34
7.7	Unwanted Emissions above 1 GHz	36
8	Pictures of Test Arrangements	48
9	Information of the Testing Laboratories	49



Release Control Record

Issue No.	Description	Date Issued
RFBGTL-WTW-P22050889-2	Original Release	2022/9/6

1 Certificate

Product: Cellular Phone

Brand: SHARP

Sample Status: Engineering Sample

Applicant: SHARP Corporation Mobile Communication BU

Test Date: 2022/8/6 ~ 2022/8/20

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)

Measurement ANSI C63.10-2013

procedure: KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247(b)	RF Output Power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
15.247(d)	Conducted Out of Band Emissions	Pass	Meet the requirement of limit.
15.207	AC Power Conducted Emissions	Pass	Minimum passing margin is -9.07 dB at 3.87400 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -10.4 dB at 55.80 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -3.1dB at 2390.00 MHz
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
Conducted Out of Band Emissions	9 kHz ~ 40 GHz	2.79 dB
AC Power Conducted Emissions	9 kHz ~ 30 MHz	2.79 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	2.44 dB
	30 MHz ~ 1 GHz	2.02 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	1.01 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description

Product	Cellular Phone
Brand	SHARP
Status of EUT	Engineering Sample
Power Supply Rating	5.0 Vdc (adapter) 3.8 Vdc (battery)
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: 11.0 / 5.5 / 2.0 / 1.0 Mbps 802.11g: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11n: up to 72.2 Mbps
Operating Frequency	2412 ~ 2462 MHz
Number of Channel	11 for 802.11b, 802.11g, 802.11n (HT20)
Output Power	30.62 mW (14.86 dBm)

Note:

1. The EUT uses following accessories.

Battery		
Brand	Model	Specification
N/A	N/A	3.8Vdc, 1680mAh

2. The EUT Configuration are list as below.

Config.	Description
1	Main Source (EUT with LCD 1)
2	2nd Source (EUT with LCD 2)

*From the above samples the worst cases were found in Main source. Therefore only the test of the mode was recorded in the report.

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna No.	Gain (dBi)	Antenna Type	Connector Type
	2400~2483.5 MHz		
1	0.5	Inverted-L Type Antenna	N/A

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT provides 1 completed transmitter and 1 receiver:

2.4 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11b	1TX	1RX
802.11g	1TX	1RX
802.11n (HT20)	1TX	1RX

3.3 Channel List

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	EUT can be used in the following ways: X-axis / Y-axis / Z-axis. Pre-scan in these ways and find the worst case as a representative test condition.
Worst Case:	The worst case was found when positioned on X-axis.

Following channel(s) was (were) selected for the final test as listed below:

Test Item	Mode	Tested Channel	Modulation	Data Rate Parameter
RF Output Power / Power Spectral Density	802.11b	1, 6, 11	DBPSK	1Mb/s
	802.11g	1, 6, 11	BPSK	6Mb/s
	802.11n (HT20)	1, 6, 11	BPSK	MCS0
6 dB Bandwidth / Conducted Out of Band Emissions	802.11b	1, 6, 11	DBPSK	1Mb/s
	802.11g	1, 6, 11	BPSK	6Mb/s
	802.11n (HT20)	1, 6, 11	BPSK	MCS0
AC Power Conducted Emissions	802.11n (HT20)	6	BPSK	MCS0
Unwanted Emissions below 1 GHz	802.11n (HT20)	6	BPSK	MCS0
Unwanted Emissions above 1 GHz	802.11b	1, 6, 11	DBPSK	1Mb/s
	802.11g	1, 6, 11	BPSK	6Mb/s
	802.11n (HT20)	1, 6, 11	BPSK	MCS0

3.5 Duty Cycle of Test Signal

Duty cycle of test signal is $\geq 98\%$, duty factor is not required.

802.11b: Duty cycle = $4.224 \text{ ms} / 4.244 \text{ ms} \times 100\% = 99.5\%$

802.11g: Duty cycle = $1.361 \text{ ms} / 1.383 \text{ ms} \times 100\% = 98.4\%$


802.11n (HT20): Duty cycle = $1.274 \text{ ms} / 1.294 \text{ ms} \times 100\% = 98.5\%$



3.6 Test Program Used and Operation Descriptions

Controlling software Tera Term _4.98 has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

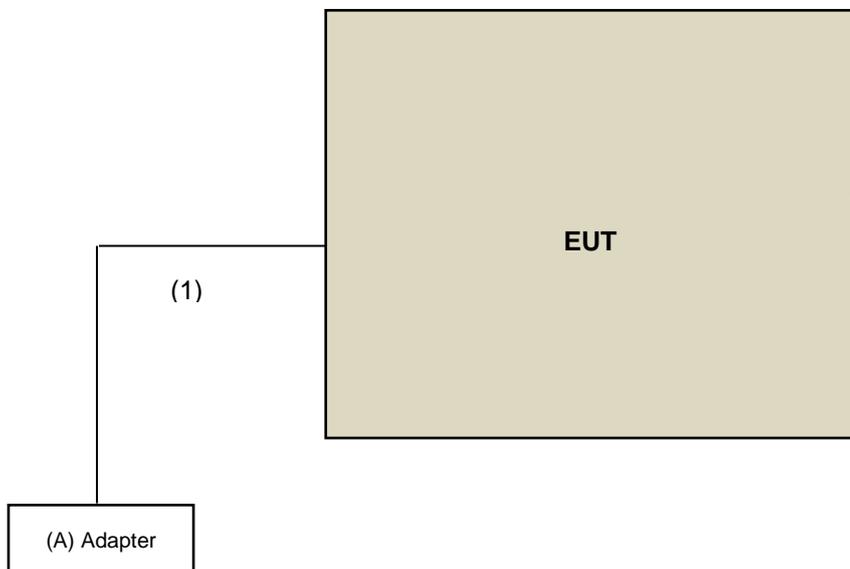

3.8 Configuration of Peripheral Devices and Cable Connections

No.	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Adapter	Salom	XN-2QC25	N/A	N/A	Supplied by applicant

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	USB Cable	1	0.95	Y	0	Supplied by applicant

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Peak Power Analyzer KEYSIGHT	8990B	MY51000485	2022/1/18	2023/1/17
Power sensor Keysight	U2021XA	MY55380009	2022/3/23	2023/3/22
Wideband Power Sensor(N1923A) KEYSIGHT	N1923A	MY58020002	2022/1/17	2023/1/16

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2022/8/16

4.2 Power Spectral Density

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Software BV	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A
Spectrum Analyzer R&S	FSV40	100979	2022/3/25	2023/3/24

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2022/8/16

4.3 6 dB Bandwidth

Refer to section 4.2 to get information of the instruments.

4.4 Conducted Out of Band Emissions

Refer to section 4.2 to get information of the instruments.

4.5 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
DC-LISN SCHWARZBECK MESS- ELETRONIK	NNBM 8126G	8126G-069	2021/11/10	2022/11/9
LISN R&S	ESH2-Z5	100100	2022/2/17	2023/2/16
	ESH3-Z5	100312	2021/9/17	2022/9/16
RF Coaxial Cable WORKEN	5D-FB	Cable-cond2-01	2021/9/4	2022/9/3
Software BVADT	BVADT_Cond_ V7.3.7.4	N/A	N/A	N/A
Test Receiver R&S	ESR3	102783	2021/12/20	2022/12/19

Notes:

1. The test was performed in HY - Conduction 2.
2. Tested Date: 2022/8/20

4.6 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	UNAT_5+	PAD-CH6-01	N/A	N/A
Antenna Tower Controller Max-Full	MF-7802	N/A	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB9168	9168-616	2021/10/27	2022/10/26
Loop Antenna EMCI	EM-6879	269	2021/9/16	2022/9/15
Loop Antenna TESEQ	HLA 6121	45745	2022/7/27	2023/7/26
Pre-amplifier EMCI	EMC001340	980201	2021/9/15	2022/9/14
Preamplifier Agilent	310N	187226	2022/6/14	2023/6/13
RF Coaxial Cable EMCI	5D-NM-BM	140903+140902	2022/1/15	2023/1/14
RF Coaxial Cable ETS-Lindgren	EMC104-SM-SM-10000	Cable-CH1-01(RFC-SMS-100-SMS-120+RFC-SMS-100-SMS-4	2022/6/14	2023/6/13
	RFC-SMS-100-SMS-24-IN	Cable-CH1-02(RFC-SMS-100-SMS-24)	2022/6/14	2023/6/13
Software BV ADT	ADT_Radiated_V7.6.15.9.5	N/A	N/A	N/A
Test Receiver Agilent	N9038A	MY52260177	2021/9/1	2022/8/31
Turn Table Max-Full	TT-1510	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802	N/A	N/A	N/A

Notes:

1. The test was performed in XD - 966 chamber 6.
2. Tested Date: 2022/8/9

4.7 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	UNAT_5+	PAD-CH6-01	N/A	N/A
Antenna Tower Controller Max-Full	MF-7802	N/A	N/A	N/A
Horn Antenna ETS-Lindgren	3117	00143293	2021/11/14	2022/11/13
Preamplifier Agilent	83017A	MY39501373	2022/6/14	2023/6/13
RF Coaxial Cable ETS-Lindgren	EMC104-SM-SM-10000	Cable-CH1-01(RFC-SMS-100-SMS-120+RFC-SMS-100-SMS-4	2022/6/14	2023/6/13
	RFC-SMS-100-SMS-24-IN	Cable-CH1-02(RFC-SMS-100-SMS-24)	2022/6/14	2023/6/13
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Test Receiver Agilent	N9038A	MY52260177	2021/9/1	2022/8/31
Turn Table Max-Full	TT-1510	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802	N/A	N/A	N/A

Notes:

1. The test was performed in XD - 966 chamber 6.
2. Tested Date: 2022/8/6

5 Limits of Test Items

5.1 RF Output Power

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

5.2 Power Spectral Density

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz.

5.3 6 dB Bandwidth

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

5.4 Conducted Out of Band Emissions

Below 30 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

5.5 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.6 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.7 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup

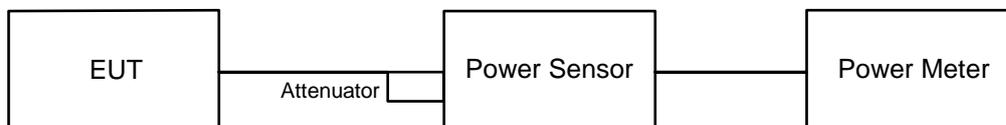


6.1.2 Test Procedure

Average Power:

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

6.2 Power Spectral Density

6.2.1 Test Setup

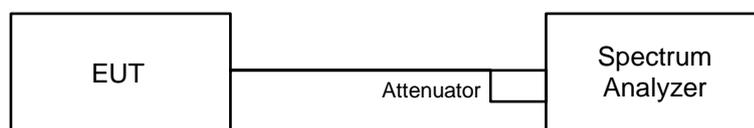


6.2.2 Test Procedure

- a. Measure the duty cycle (x).
- b. Set instrument center frequency to DTS channel center frequency.
- c. Set span to at least 1.5 times the OBW.
- d. Set RBW to: 3 kHz.
- e. Set VBW $\geq 3 \times$ RBW.
- f. Detector = power averaging (RMS) or sample detector (when RMS not available).
- g. Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
- h. Sweep time = auto couple.
- i. Do not use sweep triggering. Allow sweep to "free run".
- j. Employ trace averaging (RMS) mode over a minimum of 100 traces.
- k. Use the peak marker function to determine the maximum amplitude level.

Note: If Duty cycle < 98%, Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

6.3 6 dB Bandwidth

6.3.1 Test Setup

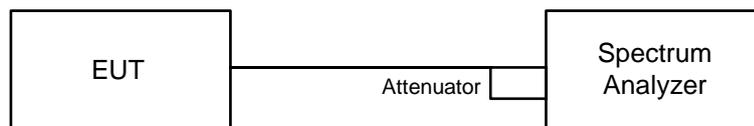


6.3.2 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.4 Conducted Out of Band Emissions

6.4.1 Test Setup

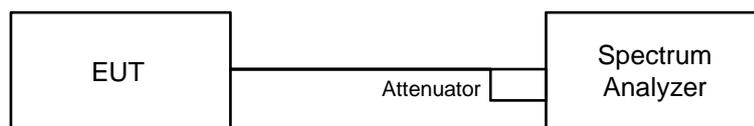

6.4.2 Test Procedure

MEASUREMENT PROCEDURE REF


- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOBE

- Set RBW = 100 kHz.
- Set VBW ≥ 300 kHz.
- Detector = peak.
- Sweep = auto couple.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.5 AC Power Conducted Emissions

6.5.1 Test Setup

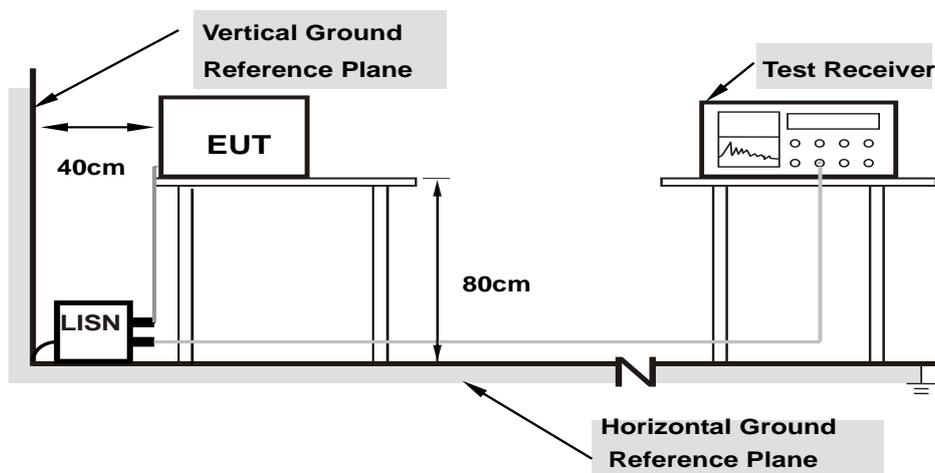

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.5.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.6 Unwanted Emissions below 1 GHz

6.6.1 Test Setup

For Radiated emission below 30 MHz

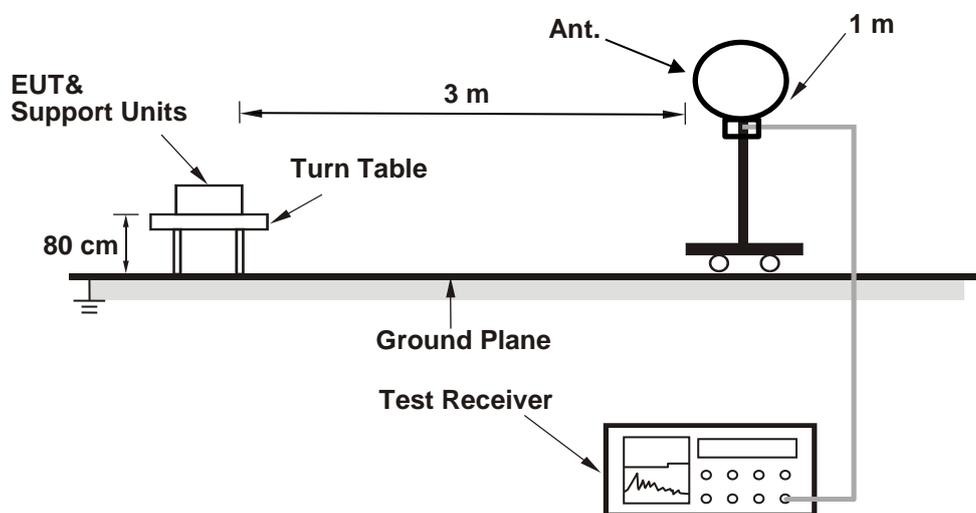

For Radiated emission above 30 MHz

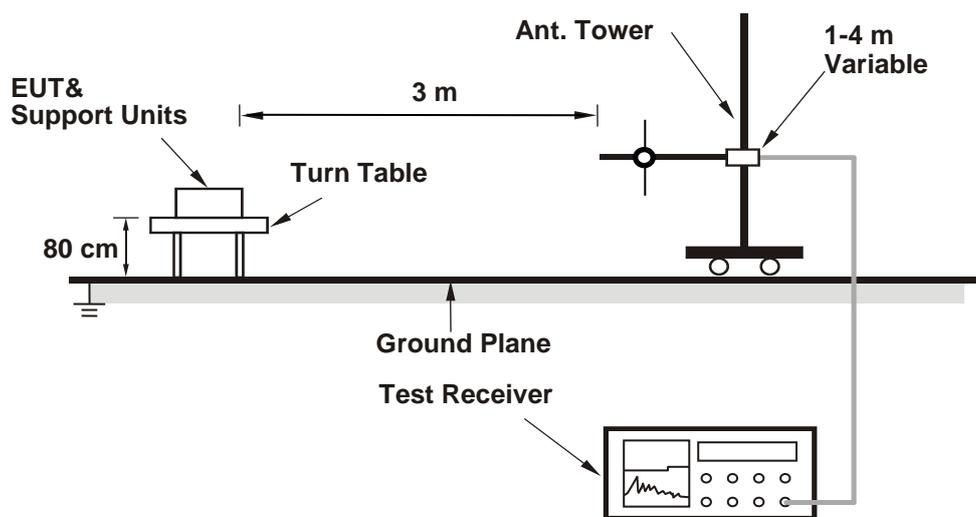

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.6.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.


Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

6.7 Unwanted Emissions above 1 GHz

6.7.1 Test Setup

For Radiated emission above 1 GHz

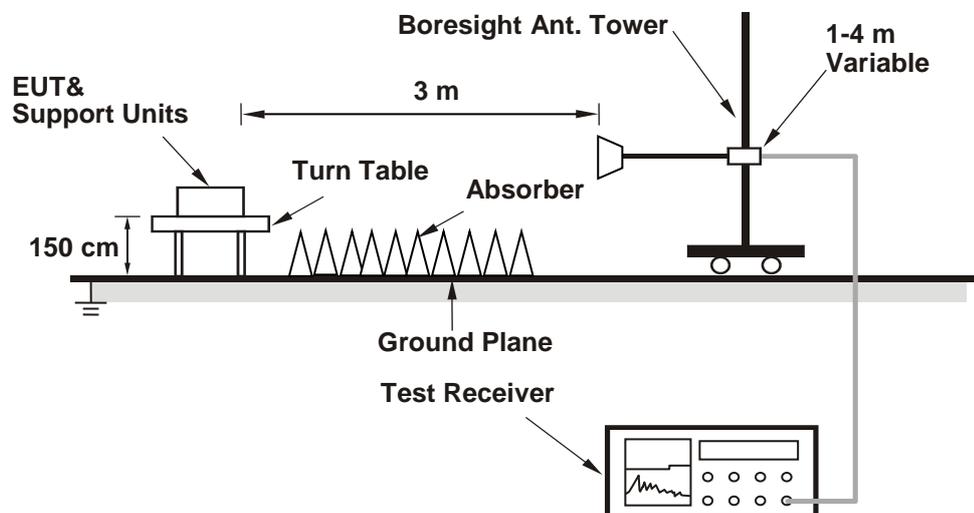

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Frank
--------------	----------------	---------------------------	--------------	------------	-------

802.11b

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
1	2412	15.668	11.95	30	Pass
6	2437	30.269	14.81	30	Pass
11	2462	15.812	11.99	30	Pass

Note: The antenna gain is 0.5 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
1	2412	15.56	11.92	30	Pass
6	2437	30.269	14.81	30	Pass
11	2462	15.56	11.92	30	Pass

Note: The antenna gain is 0.5 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
1	2412	15.74	11.97	30	Pass
6	2437	30.62	14.86	30	Pass
11	2462	15.74	11.97	30	Pass

Note: The antenna gain is 0.5 dBi < 6 dBi, so the output power limit shall not be reduced.

7.2 Power Spectral Density

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Frank
--------------	----------------	---------------------------	--------------	------------	-------

802.11b

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
1	2412	-17.48	8.00	Pass
6	2437	-14.78	8.00	Pass
11	2462	-17.25	8.00	Pass

Note: The antenna gain is 0.5 dBi < 6 dBi, so the power density limit shall not be reduced.

802.11g

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
1	2412	-20.77	8.00	Pass
6	2437	-18.78	8.00	Pass
11	2462	-20.94	8.00	Pass

Note: The antenna gain is 0.5 dBi < 6 dBi, so the power density limit shall not be reduced.


802.11n (HT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
1	2412	-21.05	8.00	Pass
6	2437	-17.87	8.00	Pass
11	2462	-21.19	8.00	Pass


Note: The antenna gain is 0.5 dBi < 6 dBi, so the power density limit shall not be reduced.




Spectrum Plot of Maximum Value

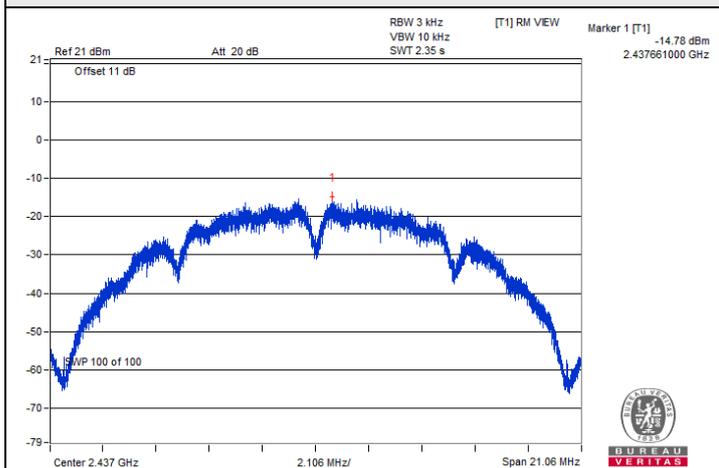

802.11b : CH 6

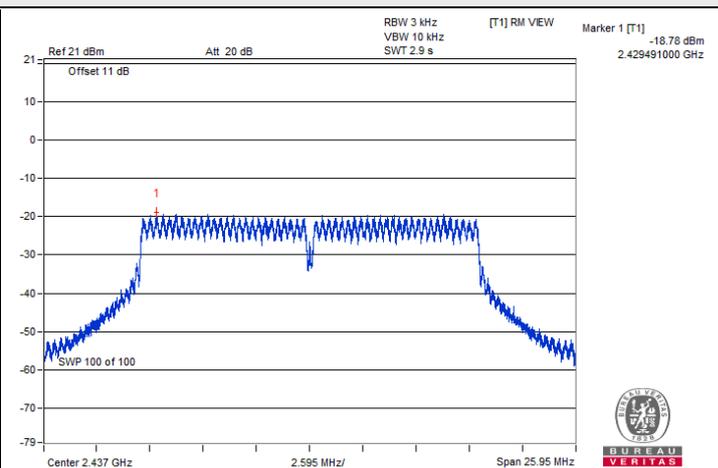

802.11g : CH 6

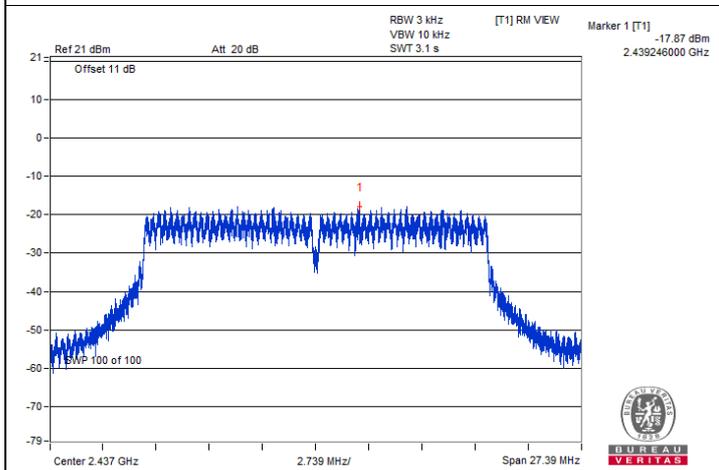

802.11n (HT20) : CH 6

7.3 6 dB Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Frank
--------------	----------------	---------------------------	--------------	------------	-------

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
1	2412	10.1	0.5	Pass
6	2437	10.09	0.5	Pass
11	2462	9.59	0.5	Pass

802.11g




Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
1	2412	16.42	0.5	Pass
6	2437	16.4	0.5	Pass
11	2462	16.44	0.5	Pass

802.11n (HT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
1	2412	17.67	0.5	Pass
6	2437	17.64	0.5	Pass
11	2462	17.63	0.5	Pass



Spectrum Plot of Minimum Value

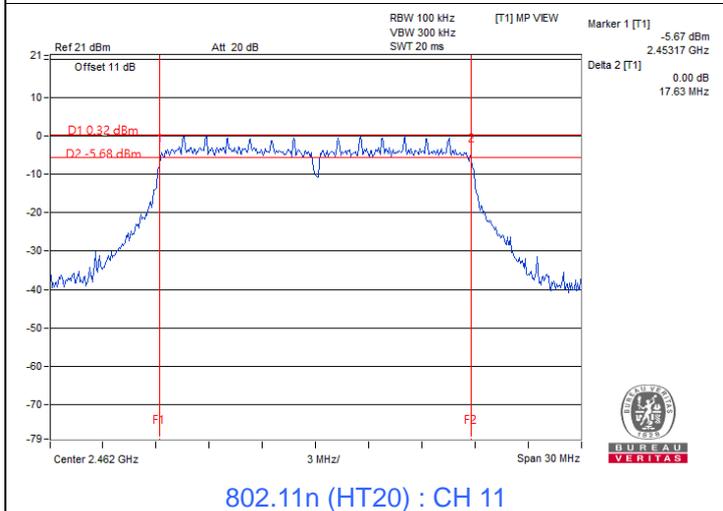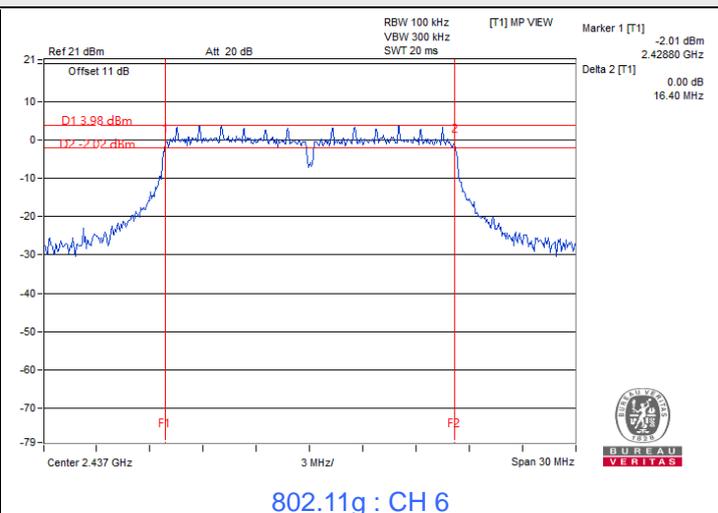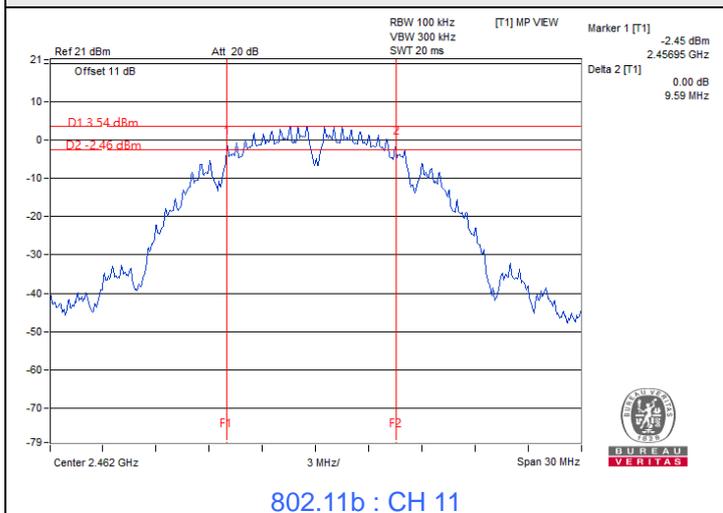



7.4 Conducted Out of Band Emissions









Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Frank
--------------	----------------	---------------------------	--------------	------------	-------

802.11b






802.11g

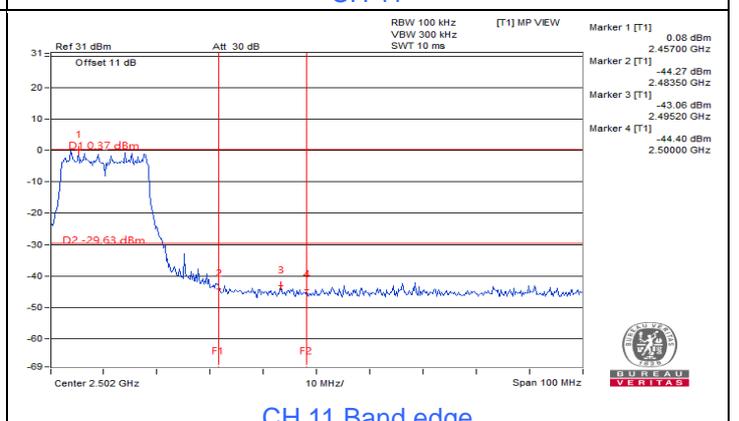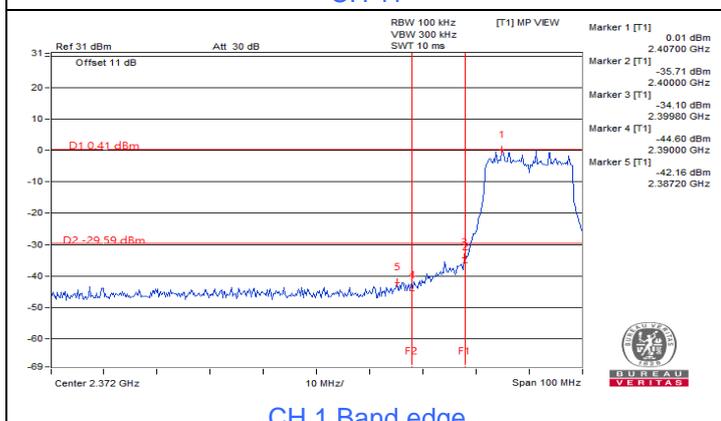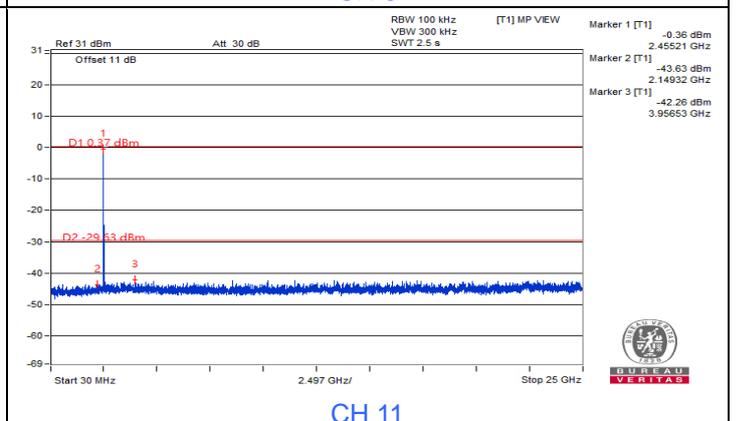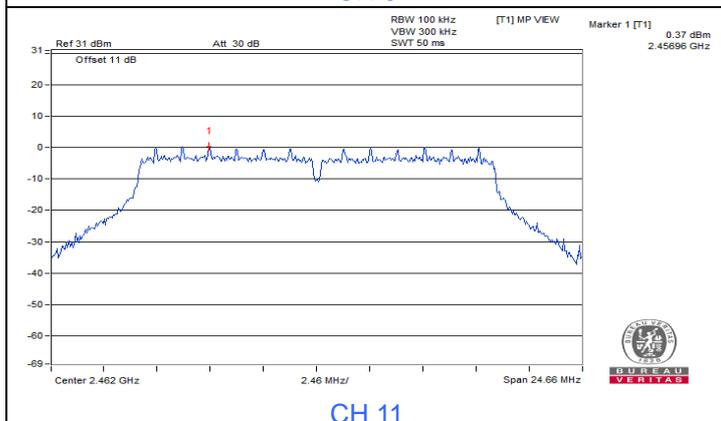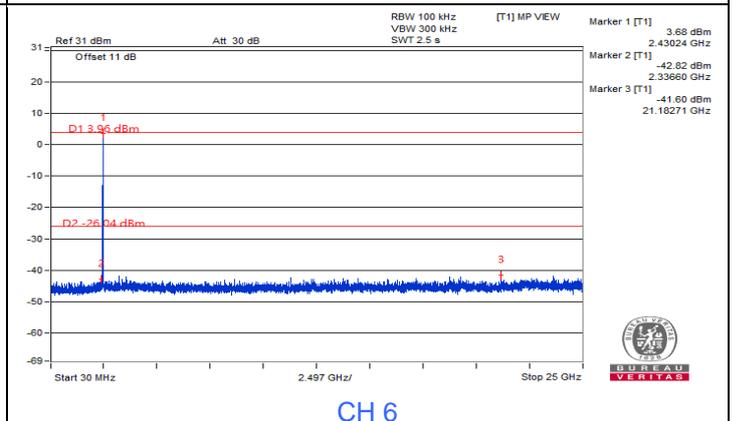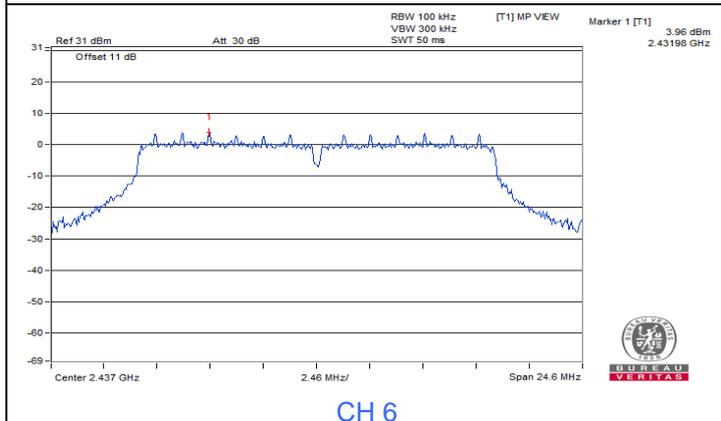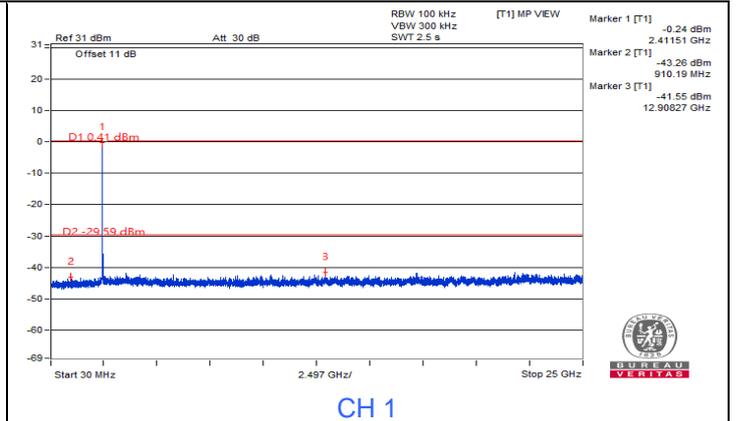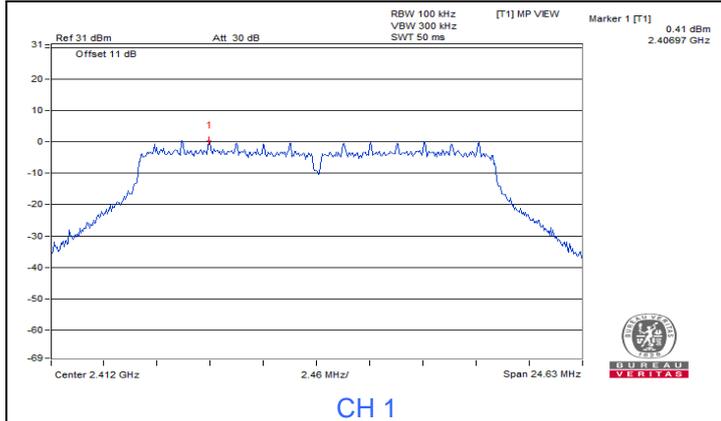





802.11n (HT20)

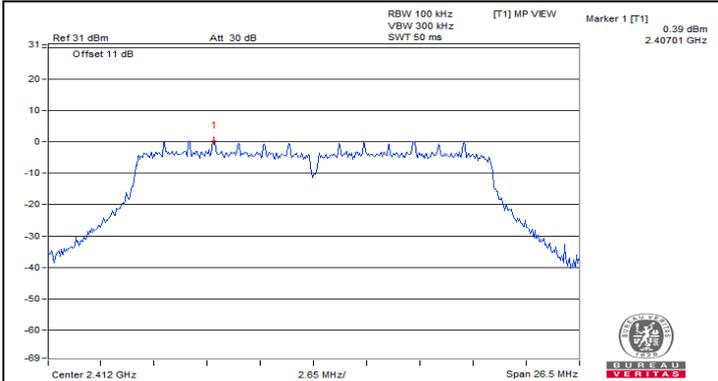


CH 1

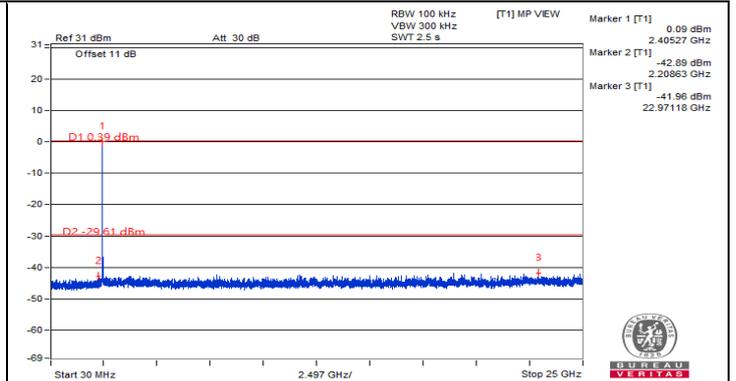


CH 1

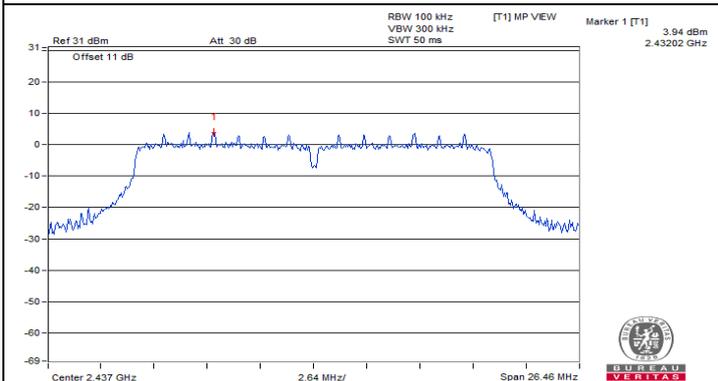


CH 6

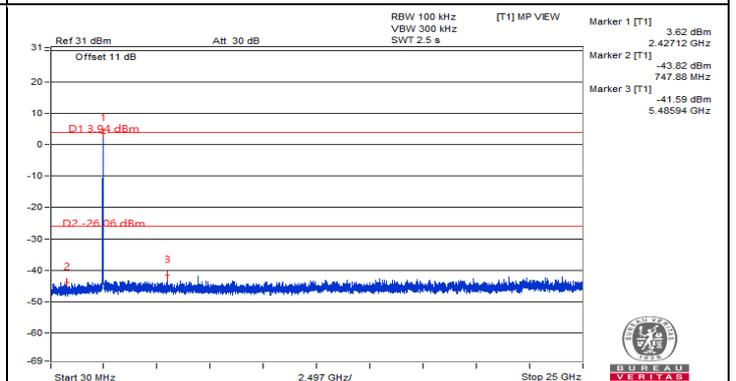


CH 6

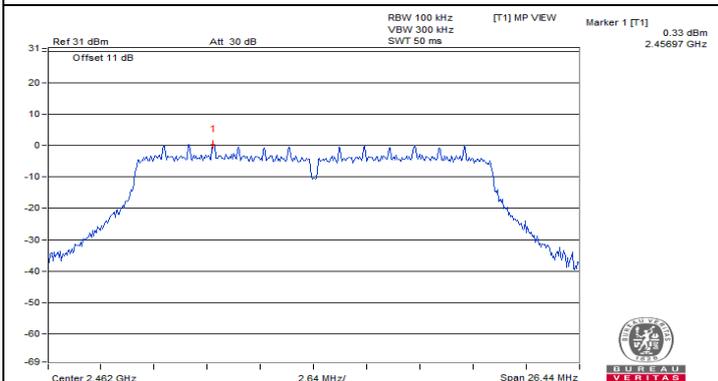


CH 11

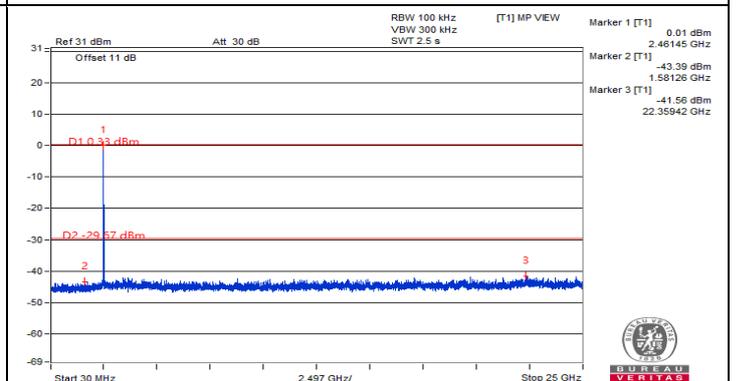

CH 11

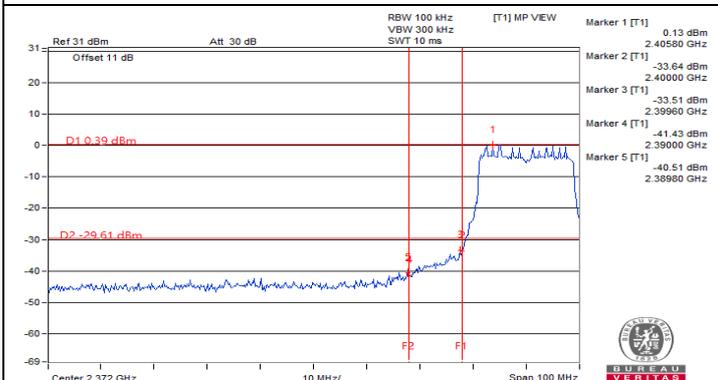

CH 11 Band edge

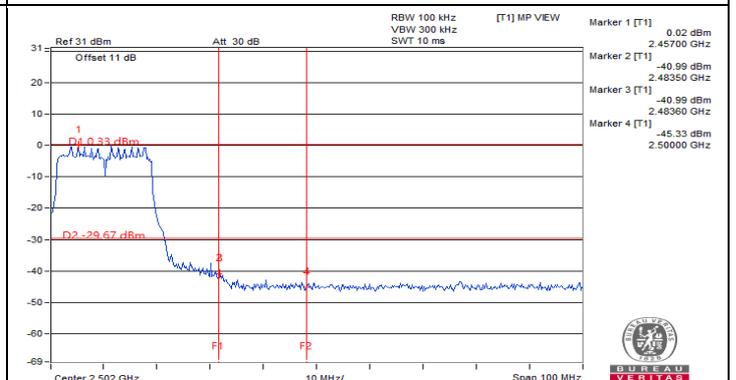

CH 11 Band edge


7.5 AC Power Conducted Emissions

RF Mode	TX 802.11n (HT20)	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	24°C, 72% RH
Tested By	Thomas Cheng		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17800	10.15	33.08	20.46	43.23	30.61	64.58	54.58	-21.35	-23.97
2	0.36200	10.22	28.25	19.67	38.47	29.89	58.68	48.68	-20.21	-18.79
3	2.58200	10.38	29.64	18.33	40.02	28.71	56.00	46.00	-15.98	-17.29
4	3.75400	10.40	30.89	19.46	41.29	29.86	56.00	46.00	-14.71	-16.14
5	5.86600	10.42	26.53	14.11	36.95	24.53	60.00	50.00	-23.05	-25.47
6	10.99400	10.47	25.03	12.27	35.50	22.74	60.00	50.00	-24.50	-27.26

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

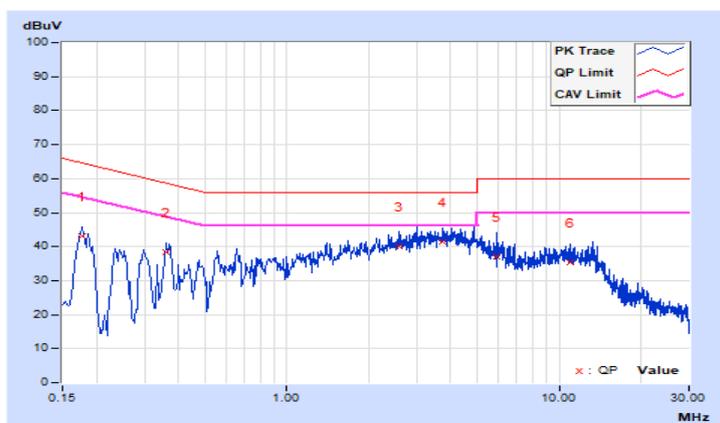


RF Mode	TX 802.11n (HT20)	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	24°C, 72% RH
Tested By	Thomas Cheng		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19000	10.18	30.57	10.50	40.75	20.68	64.04	54.04	-23.29	-33.36
2	0.35876	10.25	32.28	22.26	42.53	32.51	58.76	48.76	-16.23	-16.25
3	2.94600	10.38	35.98	24.21	46.36	34.59	56.00	46.00	-9.64	-11.41
4	3.87400	10.40	36.53	24.21	46.93	34.61	56.00	46.00	-9.07	-11.39
5	5.56200	10.43	32.60	19.51	43.03	29.94	60.00	50.00	-16.97	-20.06
6	10.50200	10.52	30.06	16.97	40.58	27.49	60.00	50.00	-19.42	-22.51

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

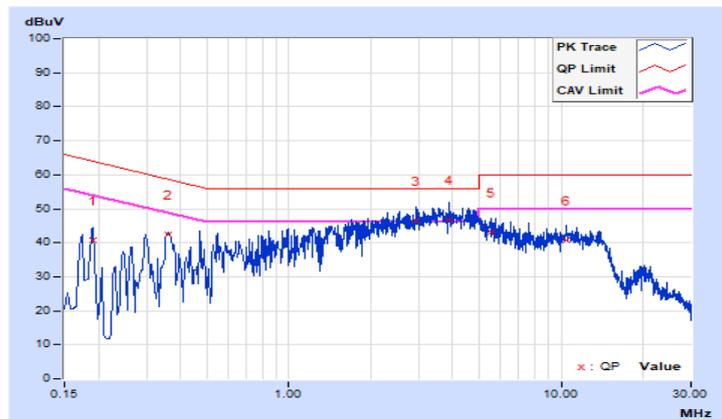


7.6 Unwanted Emissions below 1 GHz

RF Mode	TX 802.11n (HT20)	Channel	CH 6 : 2437 MHz
Frequency Range	9 kHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 61% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	54.38	27.4 QP	40.0	-12.6	1.79 H	298	45.4	-18.0
2	90.80	29.4 QP	43.5	-14.1	1.54 H	144	52.9	-23.5
3	190.54	25.7 QP	43.5	-17.8	1.53 H	266	46.2	-20.5
4	605.60	19.7 QP	46.0	-26.3	1.16 H	106	30.0	-10.3
5	810.44	22.3 QP	46.0	-23.7	1.62 H	266	29.8	-7.5
6	905.52	24.4 QP	46.0	-21.6	1.15 H	15	30.3	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

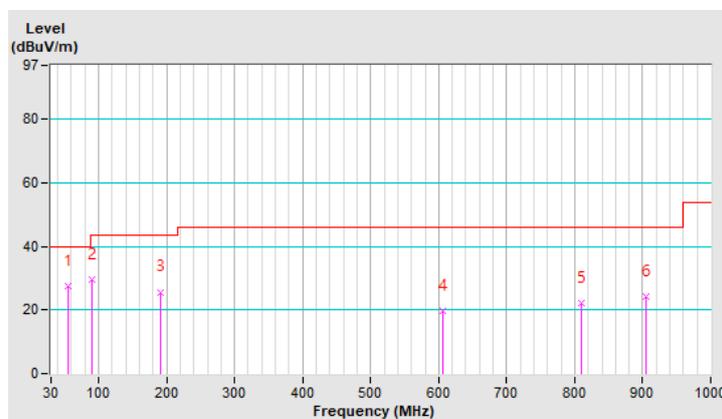


RF Mode	TX 802.11n (HT20)	Channel	CH 6 : 2437 MHz
Frequency Range	9 kHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 61% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	34.41	28.0 QP	40.0	-12.0	1.90 V	206	47.0	-19.0
2	55.80	29.6 QP	40.0	-10.4	1.79 V	137	47.5	-17.9
3	91.38	24.6 QP	43.5	-18.9	1.43 V	282	48.0	-23.4
4	611.14	19.1 QP	46.0	-26.9	1.53 V	101	29.3	-10.2
5	734.45	21.9 QP	46.0	-24.1	1.13 V	19	30.2	-8.3
6	842.60	24.3 QP	46.0	-21.7	1.65 V	18	31.3	-7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

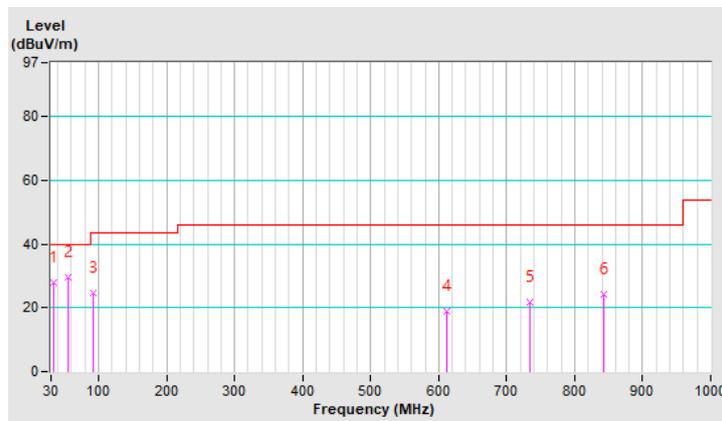

7.7 Unwanted Emissions above 1 GHz

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 61% RH
Tested By	Charles Hsiao	Test Date	2022/8/6

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.8 PK	74.0	-14.2	1.49 H	156	53.2	6.6
2	2390.00	48.1 AV	54.0	-5.9	1.49 H	156	41.5	6.6
3	*2412.00	98.6 PK			1.49 H	156	60.5	38.1
4	*2412.00	95.8 AV			1.49 H	156	57.7	38.1
5	4824.00	48.5 PK	74.0	-25.5	1.11 H	319	36.9	11.6
6	4824.00	41.4 AV	54.0	-12.6	1.11 H	319	29.8	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.7 PK	74.0	-14.3	1.03 V	333	53.1	6.6
2	2390.00	47.9 AV	54.0	-6.1	1.03 V	333	41.3	6.6
3	*2412.00	94.1 PK			1.03 V	333	56.0	38.1
4	*2412.00	91.6 AV			1.03 V	333	53.5	38.1
5	4824.00	48.4 PK	74.0	-25.6	1.17 V	7	36.8	11.6
6	4824.00	41.4 AV	54.0	-12.6	1.17 V	7	29.8	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 61% RH
Tested By	Charles Hsiao	Test Date	2022/8/6

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	100.0 PK			1.08 H	155	62.0	38.0
2	*2437.00	97.8 AV			1.08 H	155	59.8	38.0
3	4874.00	48.4 PK	74.0	-25.6	1.95 H	55	36.9	11.5
4	4874.00	41.5 AV	54.0	-12.5	1.95 H	55	30.0	11.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	95.6 PK			1.03 V	333	57.6	38.0
2	*2437.00	92.7 AV			1.03 V	333	54.7	38.0
3	4874.00	48.5 PK	74.0	-25.5	1.10 V	317	37.0	11.5
4	4874.00	41.6 AV	54.0	-12.4	1.10 V	317	30.1	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 61% RH
Tested By	Charles Hsiao	Test Date	2022/8/6

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	97.6 PK			2.47 H	151	59.7	37.9
2	*2462.00	94.9 AV			2.47 H	151	57.0	37.9
3	2483.50	58.3 PK	74.0	-15.7	2.47 H	151	51.7	6.6
4	2483.50	48.2 AV	54.0	-5.8	2.47 H	151	41.6	6.6
5	4924.00	48.6 PK	74.0	-25.4	1.05 H	222	36.9	11.7
6	4924.00	41.5 AV	54.0	-12.5	1.05 H	222	29.8	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	93.3 PK			1.03 V	333	55.4	37.9
2	*2462.00	90.8 AV			1.03 V	333	52.9	37.9
3	2483.50	58.0 PK	74.0	-16.0	1.03 V	333	51.4	6.6
4	2483.50	47.9 AV	54.0	-6.1	1.03 V	333	41.3	6.6
5	4924.00	48.4 PK	74.0	-25.6	1.05 V	2	36.7	11.7
6	4924.00	41.3 AV	54.0	-12.7	1.05 V	2	29.6	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 61% RH
Tested By	Charles Hsiao	Test Date	2022/8/6

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.3 PK	74.0	-13.7	1.49 H	156	53.7	6.6
2	2390.00	50.9 AV	54.0	-3.1	1.49 H	156	44.3	6.6
3	*2412.00	99.7 PK			1.49 H	156	61.6	38.1
4	*2412.00	92.6 AV			1.49 H	156	54.5	38.1
5	4824.00	48.6 PK	74.0	-25.4	1.17 H	29	37.0	11.6
6	4824.00	41.5 AV	54.0	-12.5	1.17 H	29	29.9	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.2 PK	74.0	-14.8	1.03 V	333	52.6	6.6
2	2390.00	49.1 AV	54.0	-4.9	1.03 V	333	42.5	6.6
3	*2412.00	95.1 PK			1.03 V	333	57.0	38.1
4	*2412.00	88.6 AV			1.03 V	333	50.5	38.1
5	4824.00	48.3 PK	74.0	-25.7	1.65 V	55	36.7	11.6
6	4824.00	41.3 AV	54.0	-12.7	1.65 V	55	29.7	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 61% RH
Tested By	Charles Hsiao	Test Date	2022/8/6

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	101.8 PK			1.08 H	155	63.8	38.0
2	*2437.00	94.7 AV			1.08 H	155	56.7	38.0
3	4874.00	48.6 PK	74.0	-25.4	1.35 H	337	37.1	11.5
4	4874.00	41.5 AV	54.0	-12.5	1.35 H	337	30.0	11.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	97.5 PK			1.03 V	333	59.5	38.0
2	*2437.00	90.7 AV			1.03 V	333	52.7	38.0
3	4874.00	48.5 PK	74.0	-25.5	1.59 V	99	37.0	11.5
4	4874.00	41.5 AV	54.0	-12.5	1.59 V	99	30.0	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 61% RH
Tested By	Charles Hsiao	Test Date	2022/8/6

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	98.8 PK			2.47 H	151	60.9	37.9
2	*2462.00	91.7 AV			2.47 H	151	53.8	37.9
3	2483.50	63.3 PK	74.0	-10.7	2.47 H	151	56.7	6.6
4	2483.50	49.2 AV	54.0	-4.8	2.47 H	151	42.6	6.6
5	4924.00	48.6 PK	74.0	-25.4	1.16 H	65	36.9	11.7
6	4924.00	41.2 AV	54.0	-12.8	1.16 H	65	29.5	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	94.8 PK			1.03 V	333	56.9	37.9
2	*2462.00	87.6 AV			1.03 V	333	49.7	37.9
3	2483.50	58.6 PK	74.0	-15.4	1.03 V	333	52.0	6.6
4	2483.50	48.0 AV	54.0	-6.0	1.03 V	333	41.4	6.6
5	4924.00	48.6 PK	74.0	-25.4	1.95 V	348	36.9	11.7
6	4924.00	41.6 AV	54.0	-12.4	1.95 V	348	29.9	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	TX 802.11n (HT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 61% RH
Tested By	Charles Hsiao	Test Date	2022/8/6

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.5 PK	74.0	-11.5	1.49 H	156	55.9	6.6
2	2390.00	49.8 AV	54.0	-4.2	1.49 H	156	43.2	6.6
3	*2412.00	99.4 PK			1.49 H	156	61.3	38.1
4	*2412.00	92.3 AV			1.49 H	156	54.2	38.1
5	4824.00	48.5 PK	74.0	-25.5	1.11 H	74	36.9	11.6
6	4824.00	41.7 AV	54.0	-12.3	1.11 H	74	30.1	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.9 PK	74.0	-15.1	1.03 V	333	52.3	6.6
2	2390.00	48.6 AV	54.0	-5.4	1.03 V	333	42.0	6.6
3	*2412.00	94.2 PK			1.03 V	333	56.1	38.1
4	*2412.00	87.4 AV			1.03 V	333	49.3	38.1
5	4824.00	48.4 PK	74.0	-25.6	1.95 V	5	36.8	11.6
6	4824.00	41.5 AV	54.0	-12.5	1.95 V	5	29.9	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	TX 802.11n (HT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 61% RH
Tested By	Charles Hsiao	Test Date	2022/8/6

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	101.4 PK			1.08 H	155	63.4	38.0
2	*2437.00	94.7 AV			1.08 H	155	56.7	38.0
3	4874.00	48.7 PK	74.0	-25.3	1.58 H	8	37.2	11.5
4	4874.00	41.7 AV	54.0	-12.3	1.58 H	8	30.2	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	96.6 PK			1.03 V	333	58.6	38.0
2	*2437.00	89.3 AV			1.03 V	333	51.3	38.0
3	4874.00	48.6 PK	74.0	-25.4	1.64 V	218	37.1	11.5
4	4874.00	41.4 AV	54.0	-12.6	1.64 V	218	29.9	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	TX 802.11n (HT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 61% RH
Tested By	Charles Hsiao	Test Date	2022/8/6

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	98.3 PK			2.47 H	151	60.4	37.9
2	*2462.00	91.7 AV			2.47 H	151	53.8	37.9
3	2483.50	65.1 PK	74.0	-8.9	2.47 H	151	58.5	6.6
4	2483.50	49.7 AV	54.0	-4.3	2.47 H	151	43.1	6.6
5	4924.00	48.6 PK	74.0	-25.4	1.15 H	255	36.9	11.7
6	4924.00	41.7 AV	54.0	-12.3	1.15 H	255	30.0	11.7


Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	94.3 PK			1.03 V	333	56.4	37.9
2	*2462.00	87.4 AV			1.03 V	333	49.5	37.9
3	2483.50	61.7 PK	74.0	-12.3	1.03 V	333	55.1	6.6
4	2483.50	48.8 AV	54.0	-5.2	1.03 V	333	42.2	6.6
5	4924.00	48.4 PK	74.0	-25.6	1.63 V	333	36.7	11.7
6	4924.00	41.3 AV	54.0	-12.7	1.63 V	333	29.6	11.7



Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



Plot of Band Edge

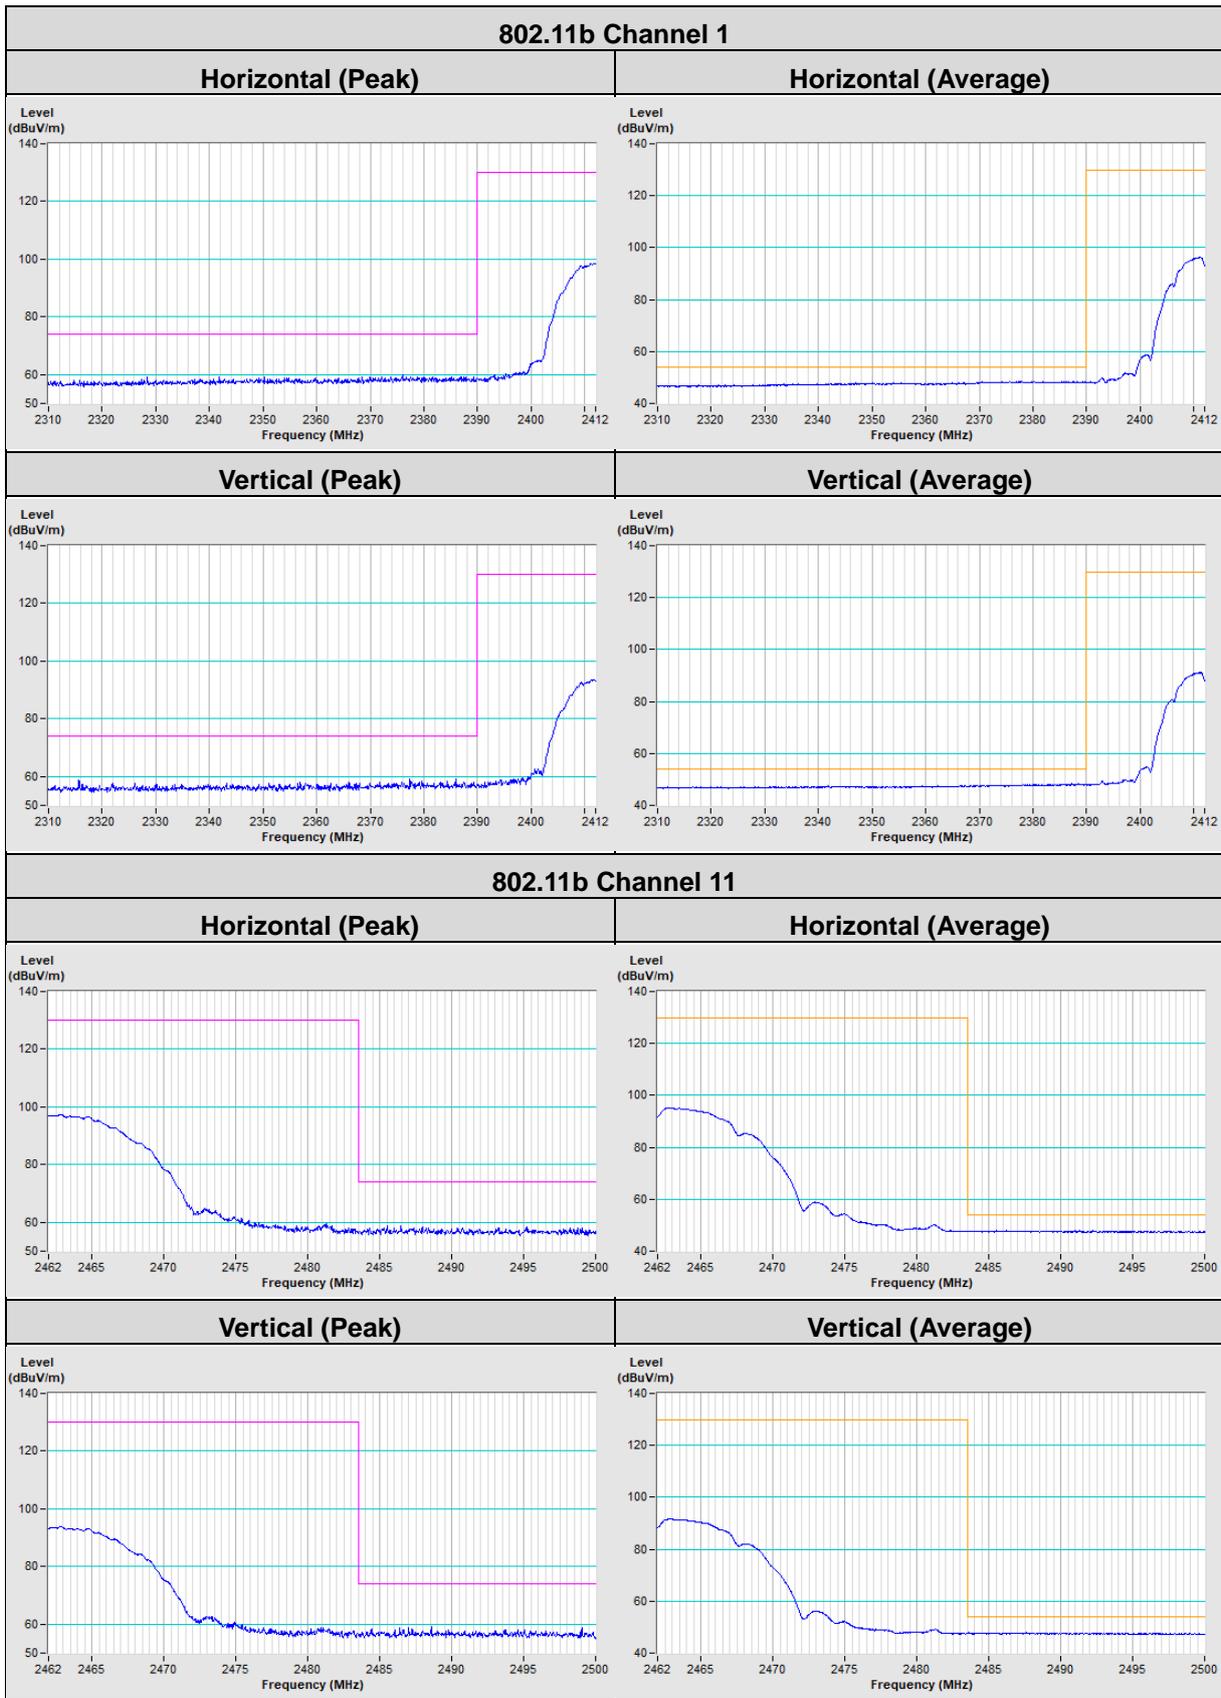

802.11g Channel 1

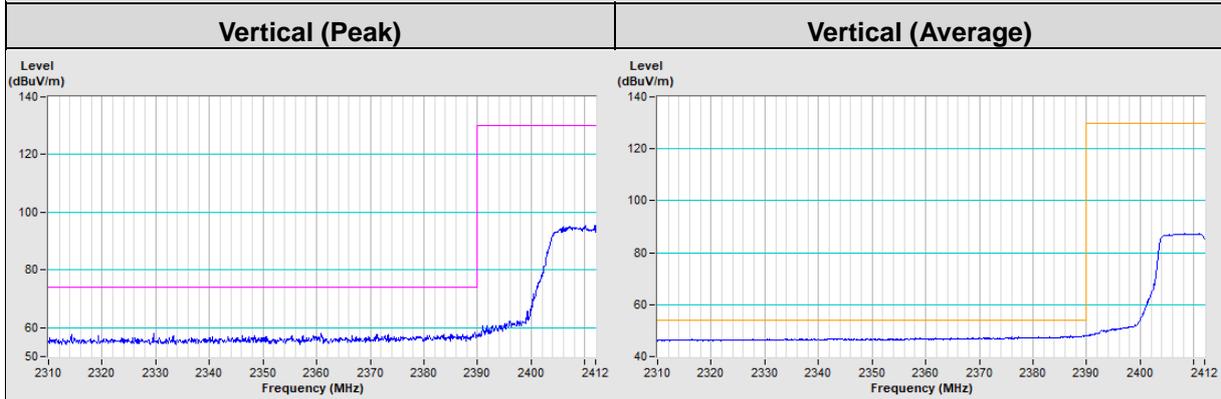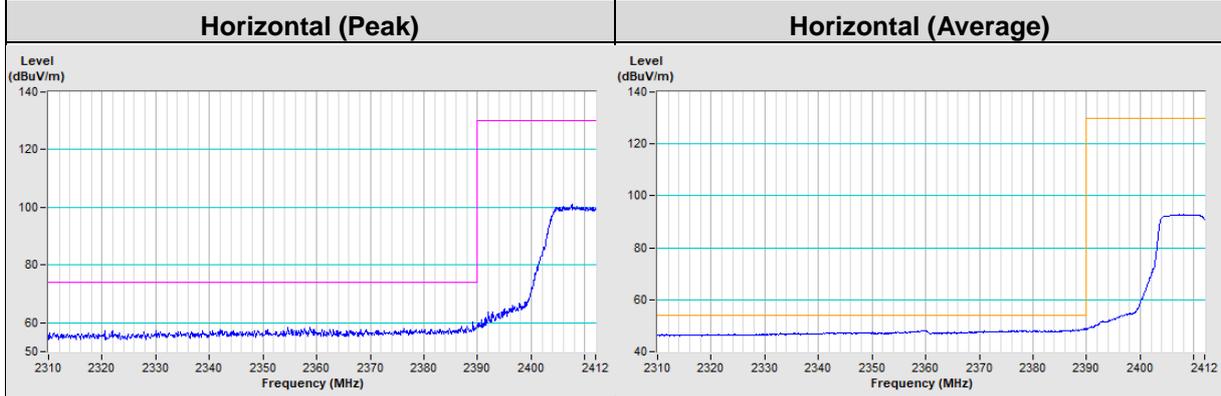

802.11g Channel 11

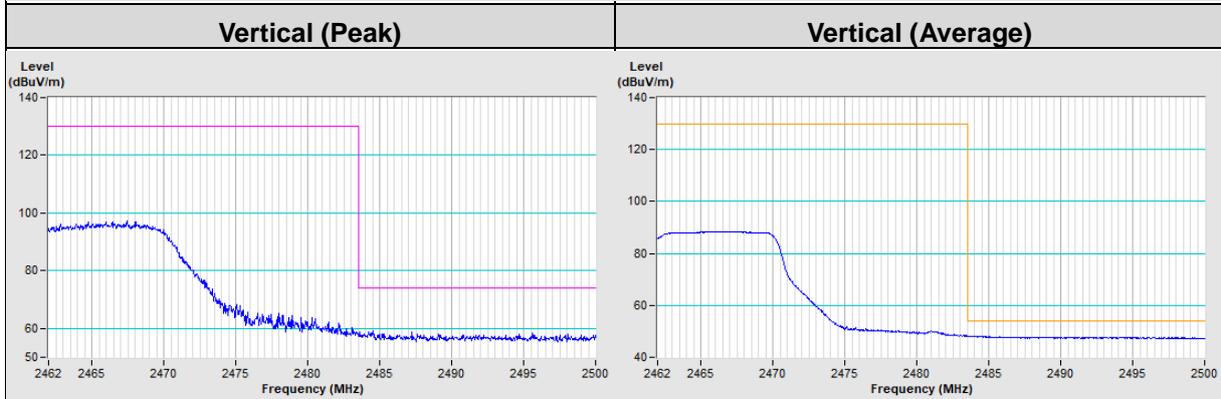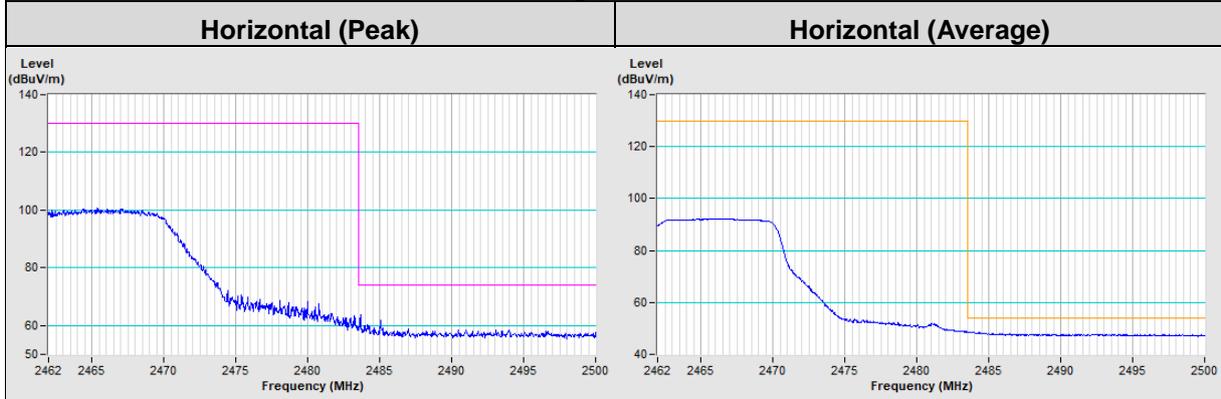

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---