



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Wi-Fi ADAPTOR

Model: SP4000***(**= 0~9, A~Z, Blank or any Character)**

Trade Name: SUNSMART™, Global Power International

Issued to

**Global Power International Group Ltd.
2F, #363, Fu-Shing S. Rd., Sec.2, Taipei, Taiwan**

Issued by

**Compliance Certification Services Inc.
No.11, Wu-Gong 6th Rd., Wugu Industrial Park,
New Taipei City 248, Taiwan (R.O.C.)
<http://www.ccsrf.com>
service@ccsrf.com
Issued Date: January 31, 2012**



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



Revision History

Rev.		Issue Date		Revisions	Effect Page	Revised By
00		January 31, 2012		Initial Issue	ALL	Jessica Ho



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	4
2. EUT DESCRIPTION	5
3. TEST METHODOLOGY	6
3.1 EUT CONFIGURATION	6
3.2 EUT EXERCISE.....	6
3.3 GENERAL TEST PROCEDURES.....	6
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	7
3.5 DESCRIPTION OF TEST MODES	8
4. INSTRUMENT CALIBRATION.....	9
4.1 MEASURING INSTRUMENT CALIBRATION	9
4.2 MEASUREMENT EQUIPMENT USED	9
4.3 MEASUREMENT UNCERTAINTY	10
5. FACILITIES AND ACCREDITATIONS	11
5.1 FACILITIES	11
5.2 EQUIPMENT.....	11
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	12
6. SETUP OF EQUIPMENT UNDER TEST	13
6.1 SETUP CONFIGURATION OF EUT.....	13
6.2 SUPPORT EQUIPMENT	13
7. FCC PART 15.247 REQUIREMENTS.....	14
7.1 6DB BANDWIDTH.....	14
7.2 PEAK POWER.....	22
7.3 BAND EDGES MEASUREMENT	24
7.4 PEAK POWER SPECTRAL DENSITY	41
7.5 SPURIOUS EMISSIONS.....	49
7.6 POWERLINE CONDUCTED EMISSIONS.....	60
APPENDIX I RADIO FREQUENCY EXPOSURE	63
APPENDIX II PHOTOGRAPHS OF TEST SETUP	65
APPENDIX 1 - PHOTOGRAPHS OF EUT	



1. TEST RESULT CERTIFICATION

Applicant: Global Power International Group Ltd.
2F, #363, Fu-Shing S. Rd., Sec.2, Taipei, Taiwan

Equipment Under Test: Wi-Fi ADAPTOR

Trade Name: SUNSMART™, Global Power International

Model: SP4000*****(**= 0~9, A~Z, Blank or any Character)

Date of Test: January 3 ~ 17, 2012

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.4: 2003** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Jason Lin
Section Manager
Compliance Certification Services Inc.

Reviewed by:

Gina Lo
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	Wi-Fi ADAPTOR
Trade Name	SUNSMART TM , Global Power International
Model Number	SP4000*****(**= 0~9, A~Z, Blank or any Character)
Model Discrepancy	All the specification and layout are identical except they come with different model numbers for marketing purposes.
Received Date	January 18, 2012
Power Supply	Powered from host device
Frequency Range	2412 ~ 2462 MHz
Transmit Power	IEEE 802.11b: 18.21 dBm IEEE 802.11g: 23.52 dBm
Modulation Technique	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (QPSK, BPSK, 16-QAM, 64-QAM)
Transmit Data Rate	IEEE 802.11b Mode: 11, 5.5, 2, 1 Mbps IEEE 802.11g Mode: 54, 48, 36, 24, 18, 12, 9, 6Mbps
Number of Channels	11 Channels
Antenna Specification	Gain: 1.45 dBi
Antenna Designation	PCB Antenna

Remark:

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **ARZAA12001** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 Part 15.207, 15.209 and 15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT (model: SP4000) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE 802.11b mode:

Channel 1(2412MHz), Channel 6(2442MHz) and Channel 11(2462MHz) with 11Mbps data rate were chosen for the final testing.

IEEE 802.11g mode:

Channel 1(2412MHz), Channel 6(2442MHz) and Channel 11(2462MHz) with 54Mbps data rate were chosen for the final testing.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	03/17/2012
Power Meter	Anritsu	ML2495A	1012009	04/27/2012
Power Sensor	Anritsu	MA2411B	0917072	04/27/2012

Wugu 966 Chamber A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510268	11/15/2012
EMI Test Receiver	R&S	ESCI	100064	02/17/2012
Pre-Amplifier	Mini-Circuits	ZFL-1000LN	SF350700823	01/13/2012
Pre-Amplifier	MITEQ	AFS44-00102650-42-10P-44	1415367	11/20/2012
Bilog Antenna	Sunol Sciences	JB3	A030105	10/03/2012
Bilog Antenna	Sunol Sciences	JB3	A030205	10/03/2012
Horn Antenna	EMCO	3117	00055165	01/12/2012
Horn Antenna	EMCO	3117	00055167	01/05/2012
Horn Antenna	EMCO	3116	00026370	10/12/2012
Loop Antenna	EMCO	6502	8905/2356	06/10/2013
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Site NSA	CCS	N/A	N/A	12/25/2012
Test S/W	EZ-EMC (CCS-3A1RE)			

Conducted Emission room # B				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI	101073	07/28/2012
LISN	R&S	ENV216	101054	05/25/2012
LISN	EMCO	3825/2	9106-1809	05/25/2012
Test S/W	CCS-3A1-CE			



4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.2575
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☐ No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

☒ No.11, Wu-Gong 6th Rd., Wugu Industrial Park, New Taipei City 248, Taiwan (R.O.C.)

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

☐ No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C.

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	 Testing Laboratory 1309
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC	HP	dv6-1332TX	CNF9491GPS	PD9112BNHU	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2.	Control Panel	SUNSMART™	6600-854	NA	NA	Flat cable 10 pin 1980 mm x1 1520 mm x1	NA
3.	Wi-Fi Adaptor	Global Power	SP4000	NA	ARZAA12001	Flat cable 10 pin 690 mm x2 1600 mm x2	NA
4.	DCU	Rosstech	6560-134	NA	NA	Unshielded, 2C 250 mm x1 (power in)	NA
5.	Transformer	Global Power	GP0023	NA	NA	Connector 4-wire 300 mm x1 2-wire 300 mm x1	NA
6.	Main Controller	Global Power	770-001	NA	NA	Unshielded, 6C 100 mm x1	Unshielded, 1.5 m x1

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




7. FCC PART 15.247 REQUIREMENTS

7.1 6DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Configuration

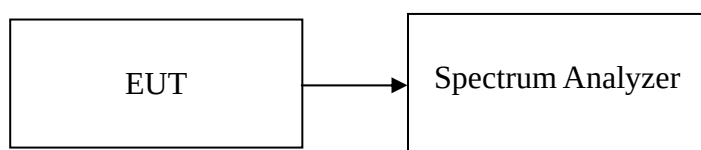

TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Span = 50MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted.

**Test mode: IEEE 802.11b**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.0833	>500	PASS
Mid	2442	10.0833		PASS
High	2462	10.0833		PASS

Test mode: IEEE 802.11g


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.5833	>500	PASS
Mid	2442	16.5833		PASS
High	2462	16.5833		PASS



Test Plot

IEEE 802.11b

6dB Bandwidth (CH Low)

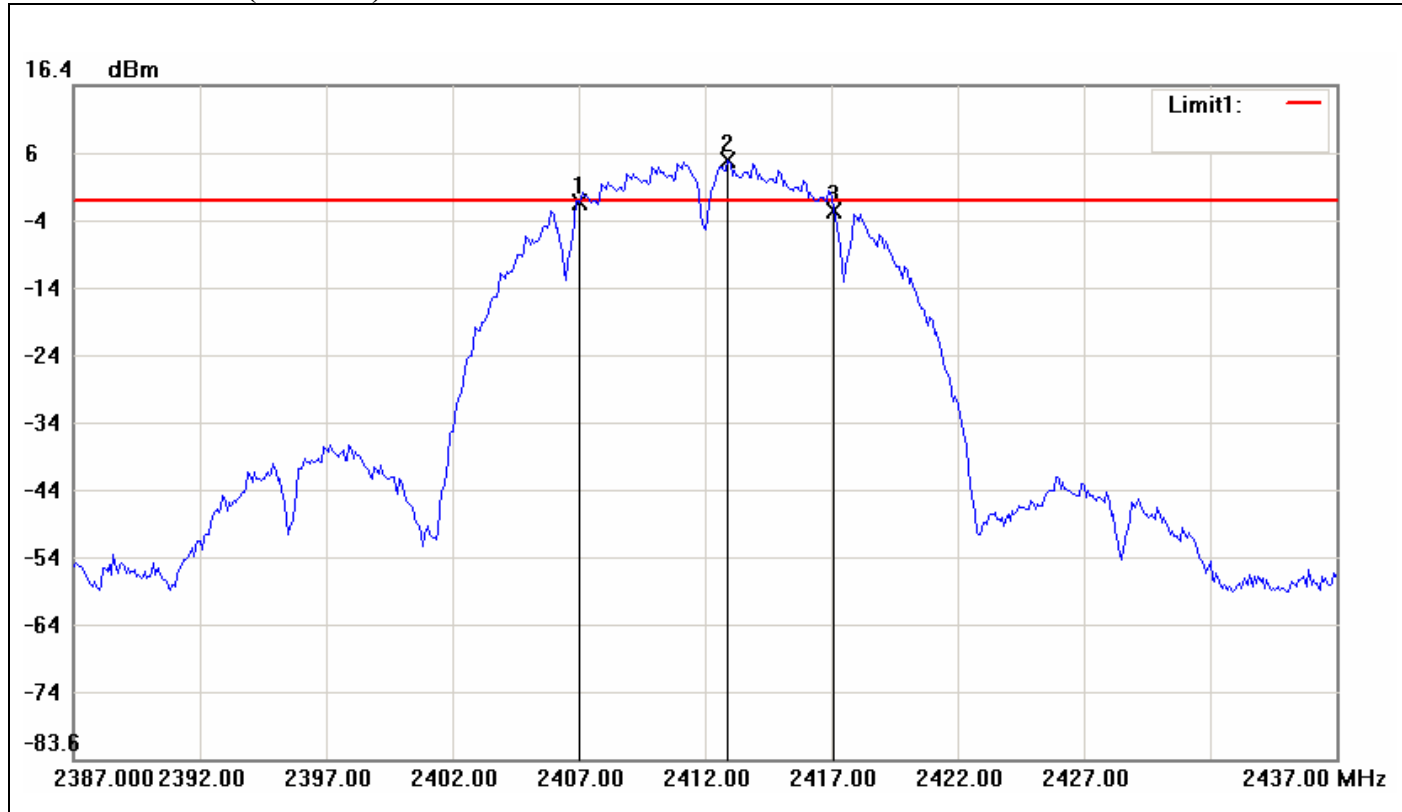


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2407.0000	-0.95	-0.59	-0.36
2	2412.9167	5.41	-0.59	6.00
3	2417.0833	-2.25	-0.59	-1.66

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk3-mk1	10.0833	-1.3



6dB Bandwidth (CH Mid)

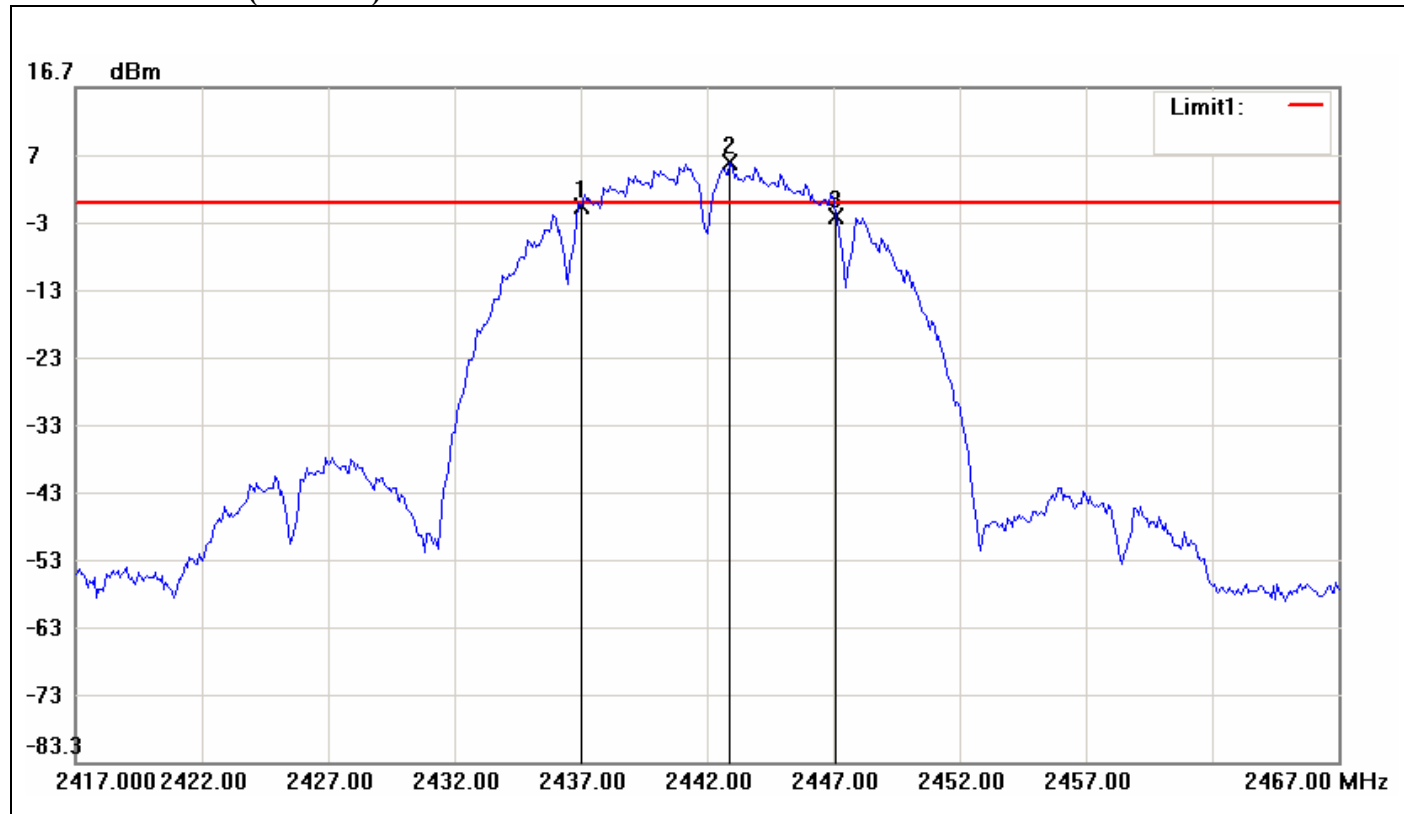


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2442.0000	-0.95	-0.57	-0.38
2	2442.9167	5.43	-0.57	6.00
3	2447.0833	-2.49	-0.57	-1.92

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk3-mk1	10.0833	-1.54



6dB Bandwidth (CH High)

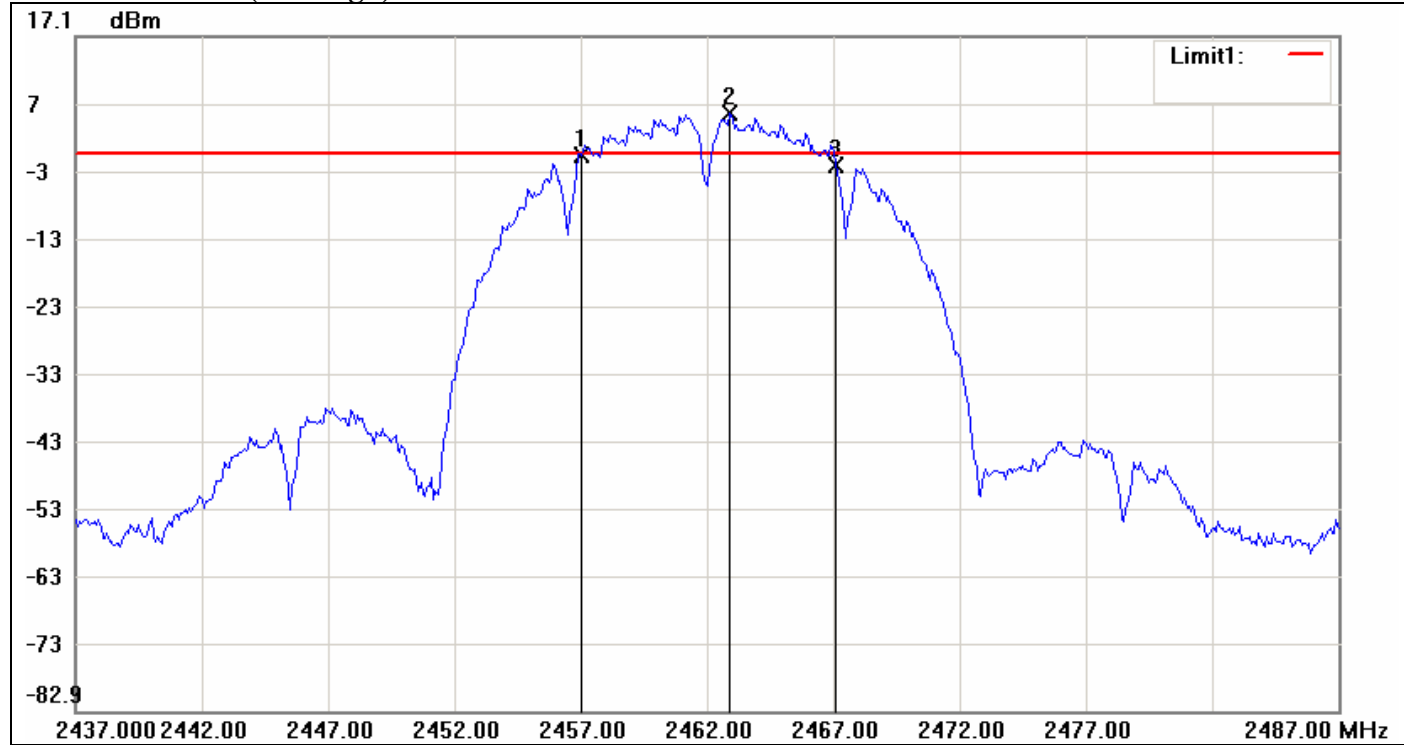


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2457.0000	-0.57	-0.24	-0.33
2	2462.9167	5.76	-0.24	6.00
3	2467.0833	-2.02	-0.24	-1.78

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk3-mk1	10.0833	-1.45



IEEE 802.11g

6dB Bandwidth (CH Low)

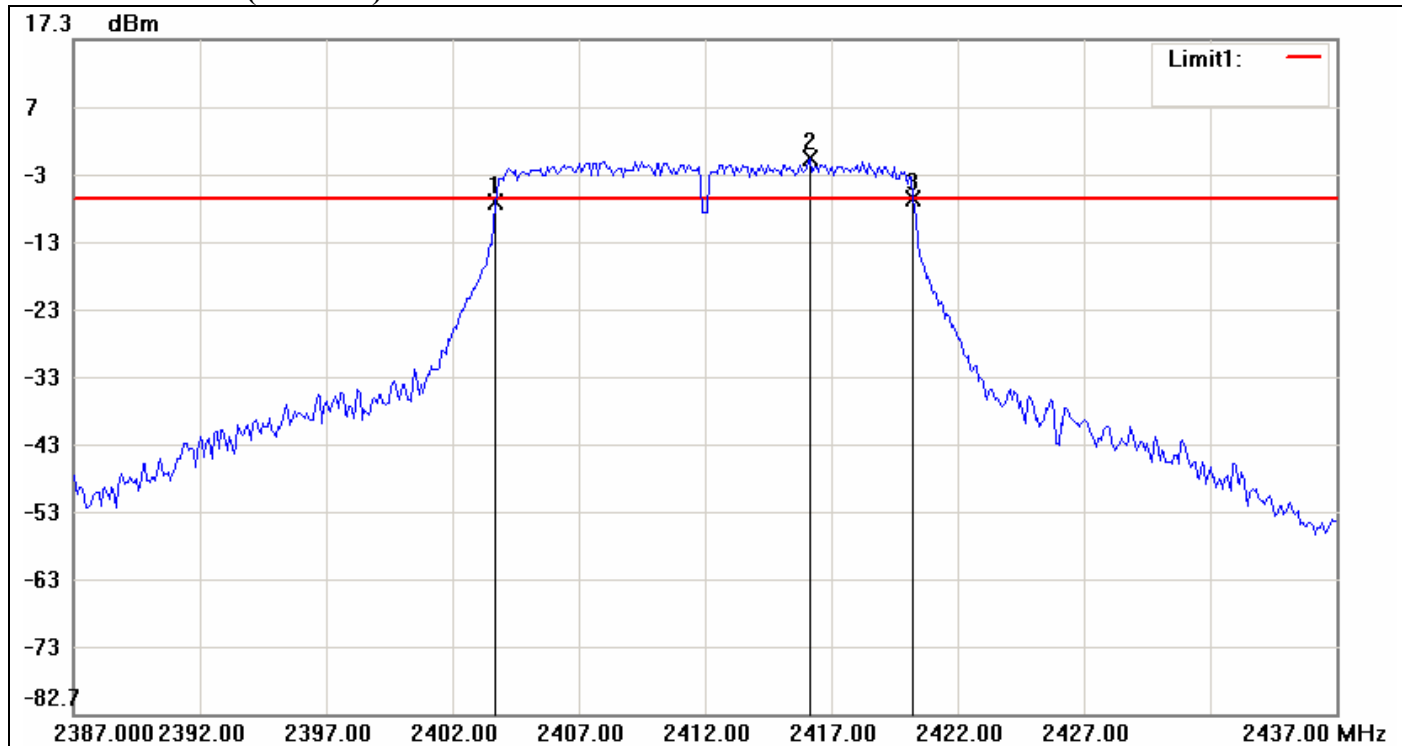


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2403.6667	-6.88	-6.40	-0.48
2	2416.1667	-0.40	-6.40	6.00
3	2420.2500	-6.44	-6.40	-0.04

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk3-mk1	16.5833	0.44



6dB Bandwidth (CH Mid)

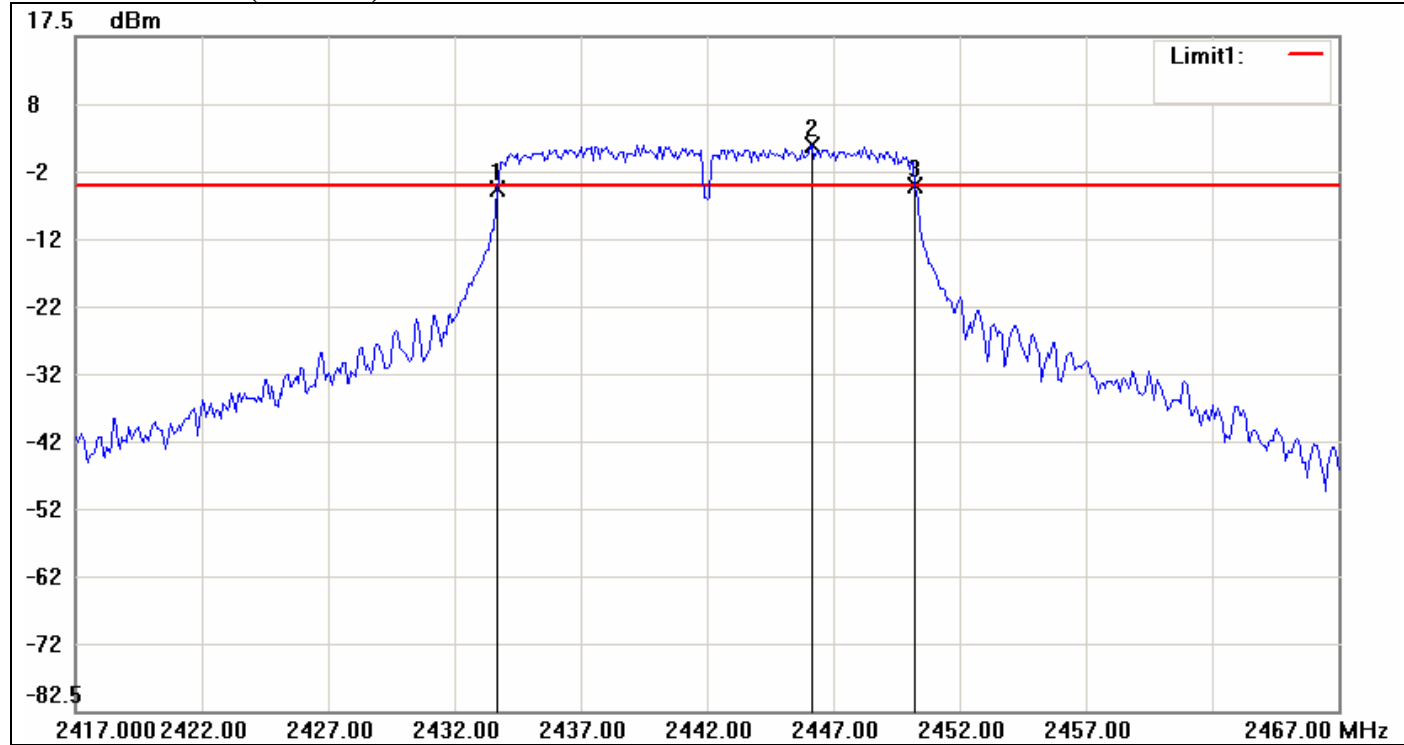


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2433.6667	-5.01	-4.51	-0.50
2	2446.1667	1.49	-4.51	6.00
3	2450.2500	-4.66	-4.51	-0.15

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk3-mk1	16.5833	0.35



6dB Bandwidth (CH High)

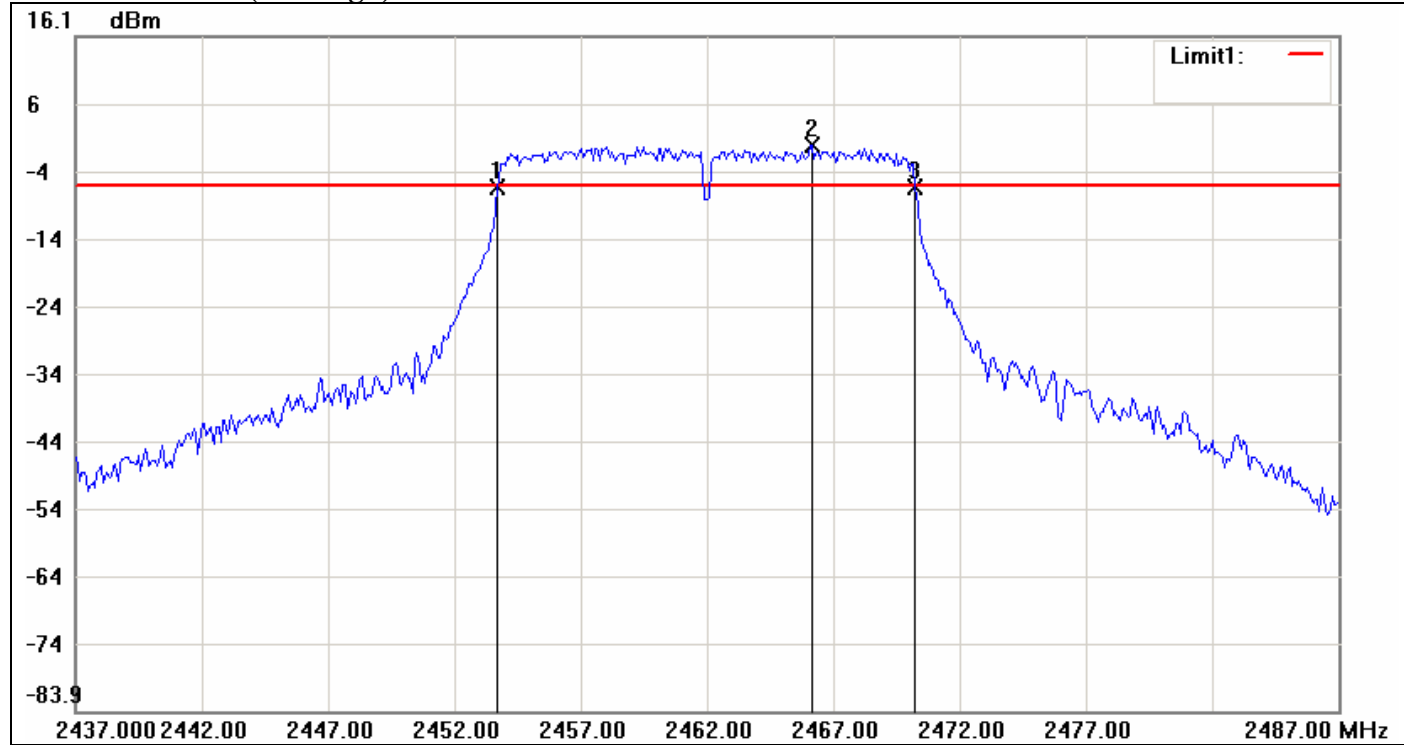

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2453.6667	-6.38	-6.05	-0.33
2	2466.1667	-0.05	-6.05	6.00
3	2470.2500	-6.25	-6.05	-0.20

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk3-mk1	16.5833	0.13




7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted.

**Test Data****Test mode: IEEE 802.11b**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	17.97	0.0627	1.00	PASS
Mid	2442	18.21	0.0662		PASS
High	2462	17.97	0.0627		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	22.9	0.1950	1.00	PASS
Mid	2442	23.52	0.2249		PASS
High	2462	22.79	0.1901		PASS



7.3 BAND EDGES MEASUREMENT

LIMIT


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to RSS-210 §A8.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.




Test Configuration

For Radiated

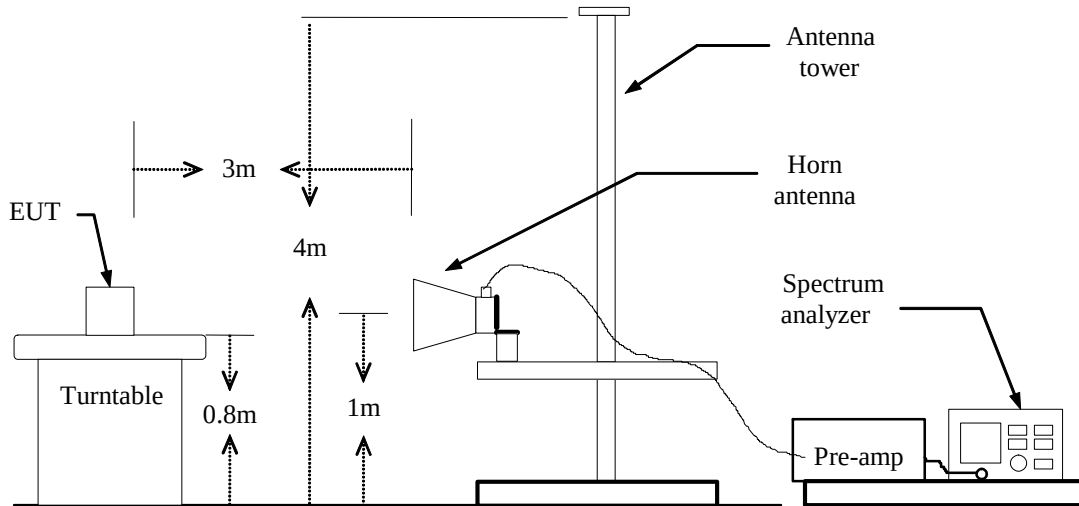

For Conducted





TEST PROCEDURE

For Radiated

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW = 1MHz, VBW = 3MHz, / Sweep= AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep= AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

For Conducted

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.


TEST RESULTS

Refer to attach spectrum analyzer data chart.

**Band Edges (IEEE 802.11b / CH Low)****Detector mode: Peak****Polarity: Vertical**


* Agilent 21:56:00 16 Jan 2012

T

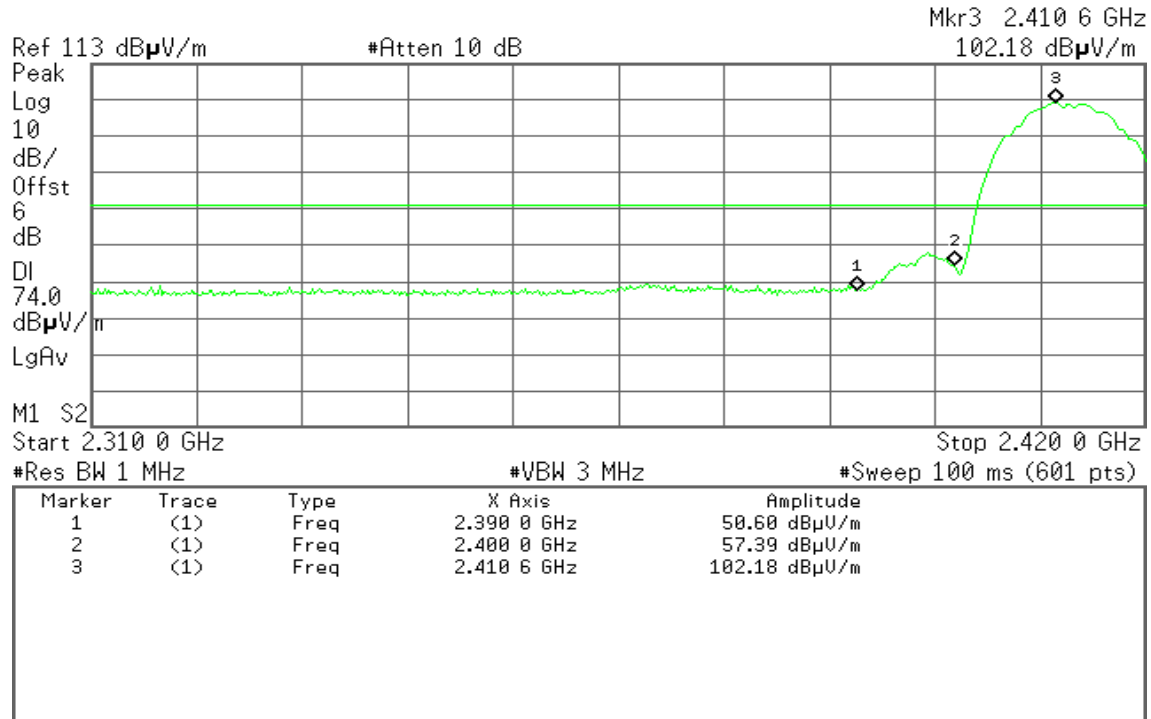**Detector mode: Average****Polarity: Vertical**

* Agilent 21:56:34 16 Jan 2012

T

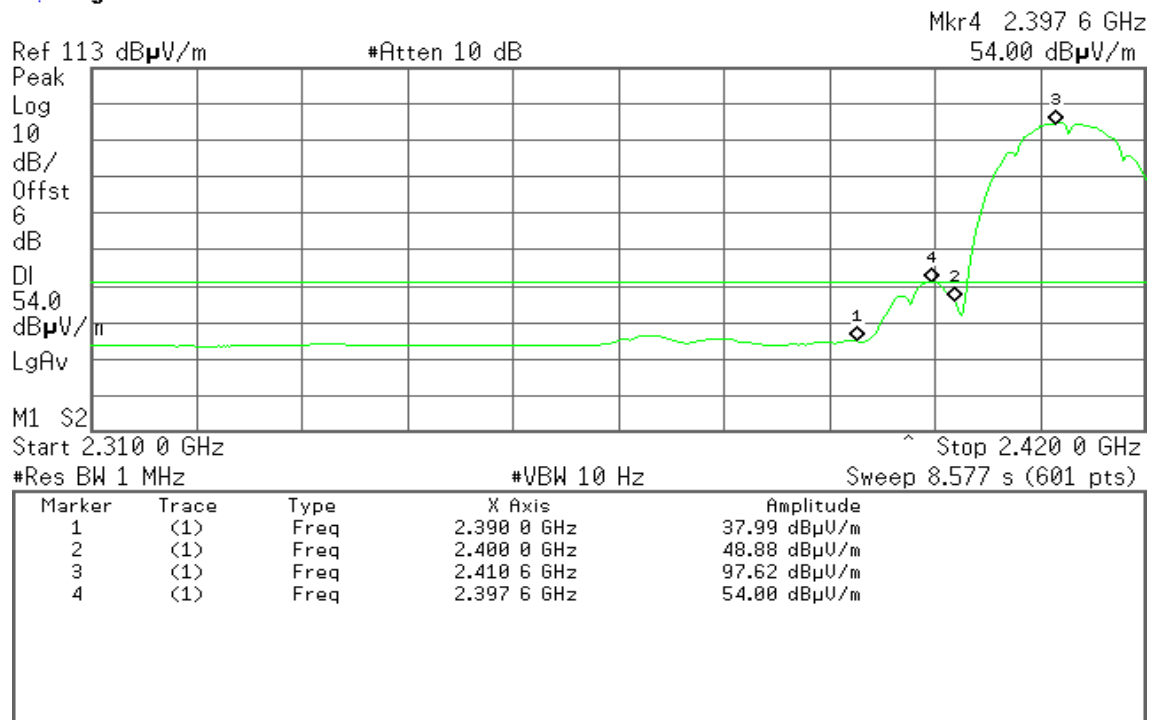




Detector mode: Peak

Polarity: Horizontal

* Agilent 22:01:07 16 Jan 2012

T

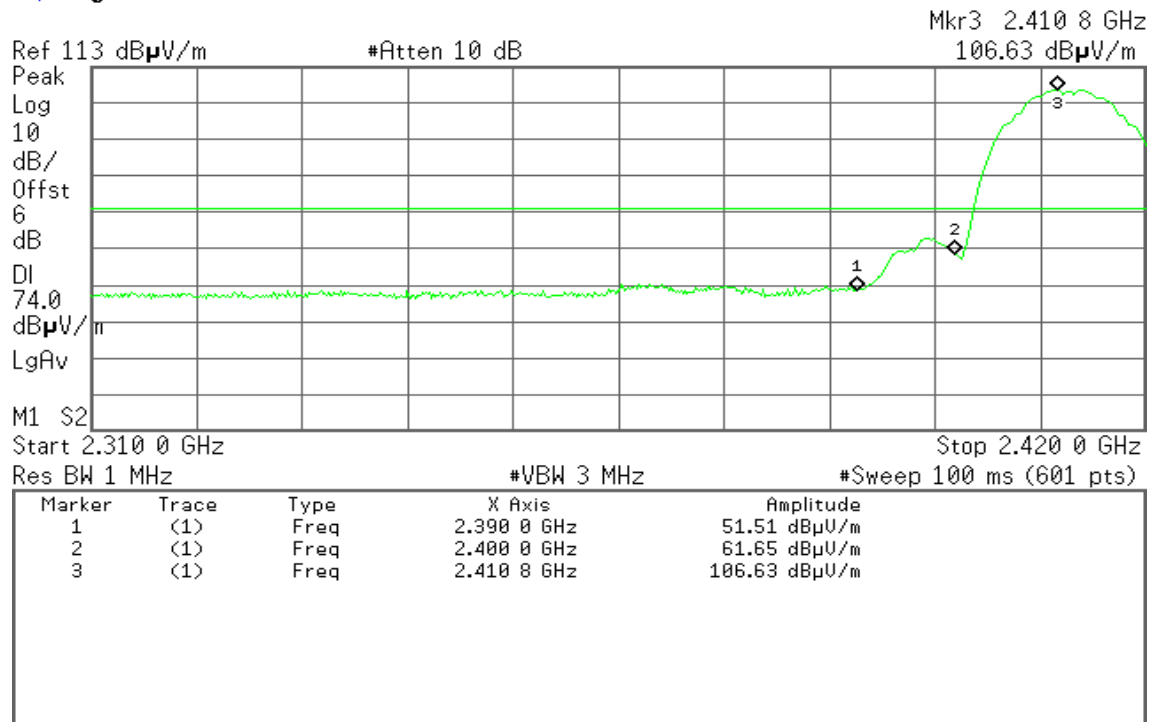


Detector mode: Average

Polarity: Horizontal

* Agilent 22:01:34 16 Jan 2012


T

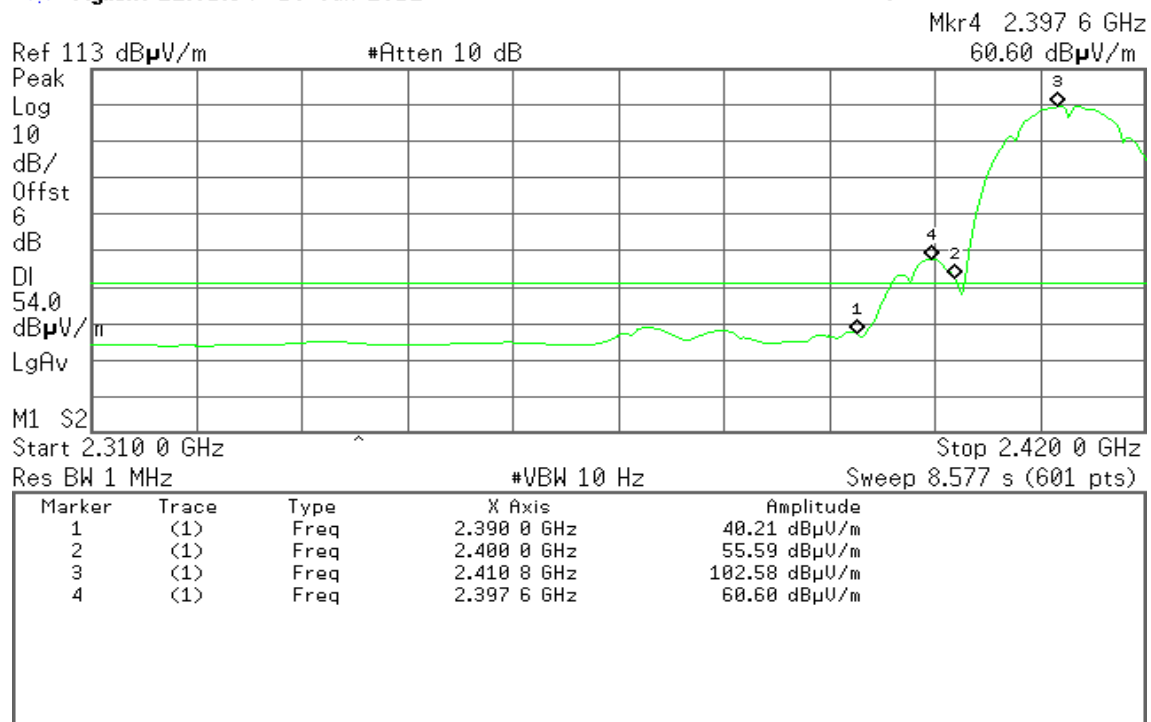

**Band Edges (IEEE 802.11b / CH High)****Detector mode: Peak****Polarity: Vertical**


* Agilent 22:17:57 16 Jan 2012

T

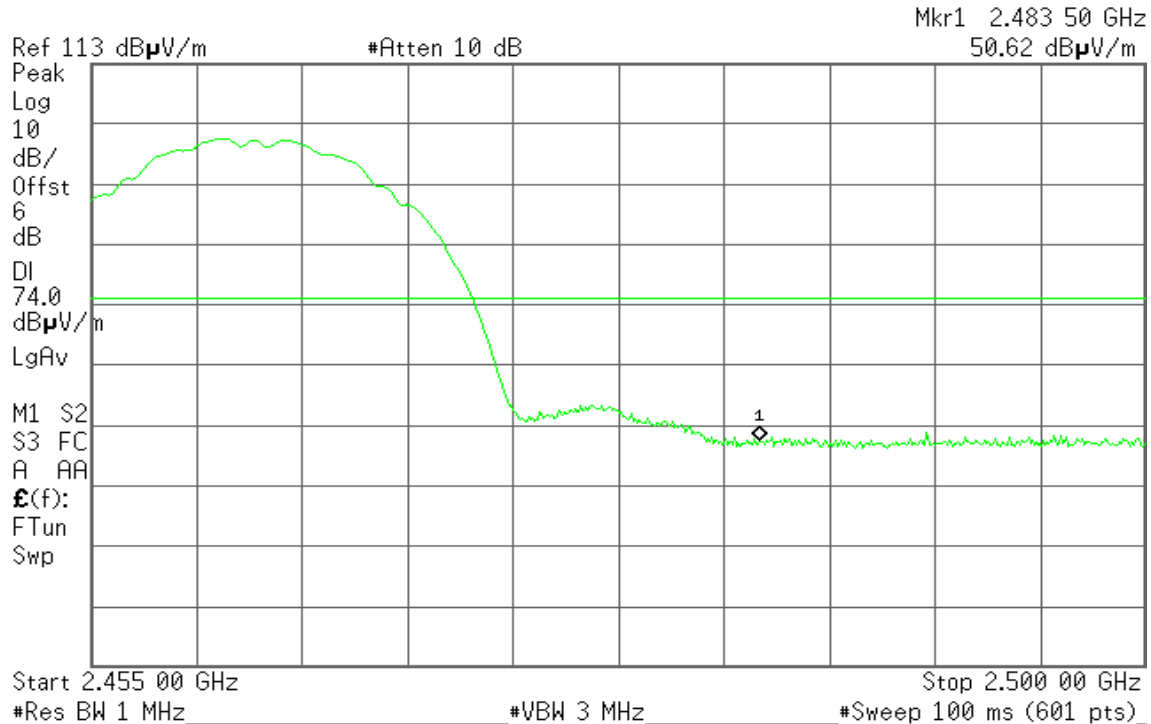**Detector mode: Average****Polarity: Vertical**

* Agilent 22:18:13 16 Jan 2012

T

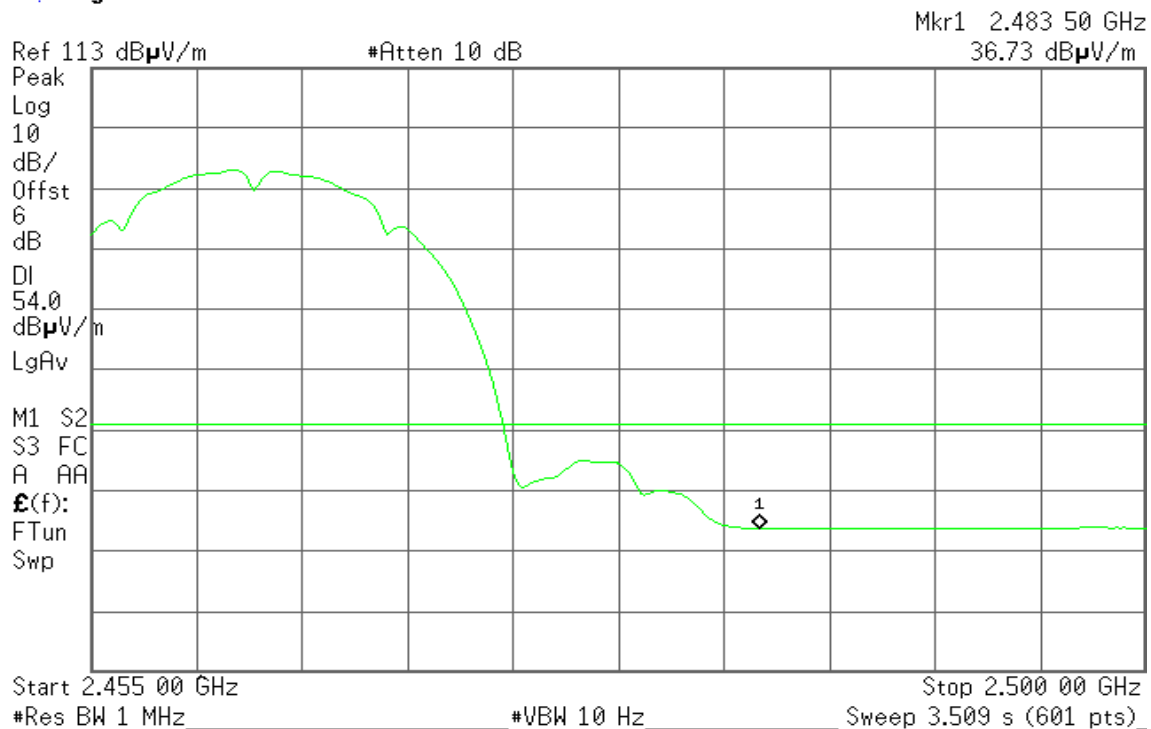



Detector mode: Peak

Polarity: Horizontal

* Agilent 22:22:16 16 Jan 2012

R T

Mkr1 2.483 50 GHz

51.41 dB μ V/mRef 113 dB μ V/m

#Atten 10 dB

Peak

Log

10

dB/

Offst

6

dB

DI

74.0

dB μ V/m

LgAv

M1 S2


S3 FC

A AA

E(f):

FTun

Swp

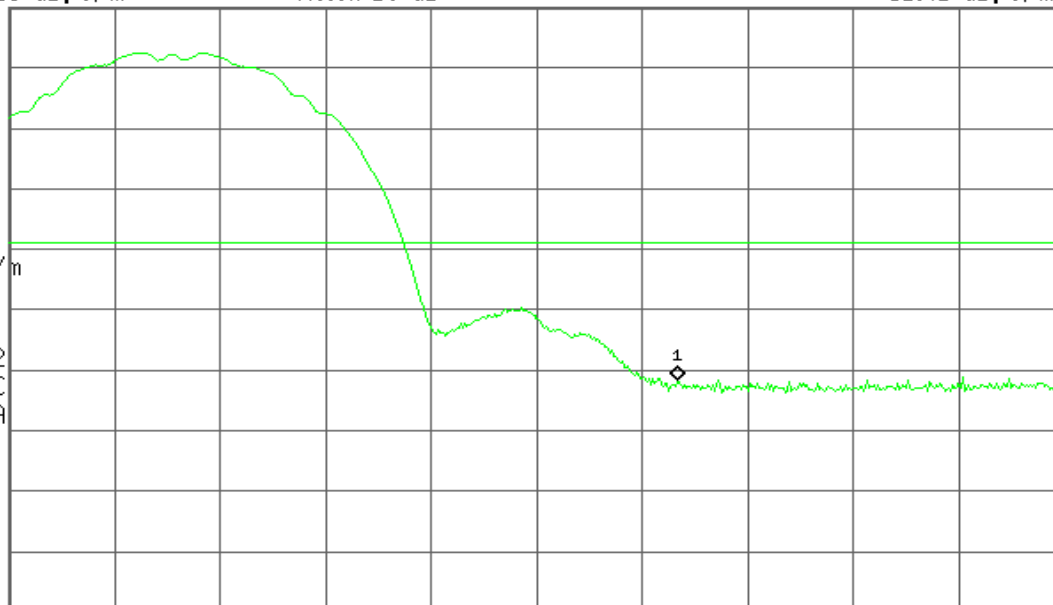

Start 2.455 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

* Agilent 22:22:33 16 Jan 2012

R T

Mkr1 2.483 50 GHz

37.45 dB μ V/mRef 113 dB μ V/m

#Atten 10 dB

Peak

Log

10

dB/

Offst

6

dB

DI

54.0

dB μ V/m

LgAv

M1 S2


S3 FC

A AA

E(f):

FTun

Swp

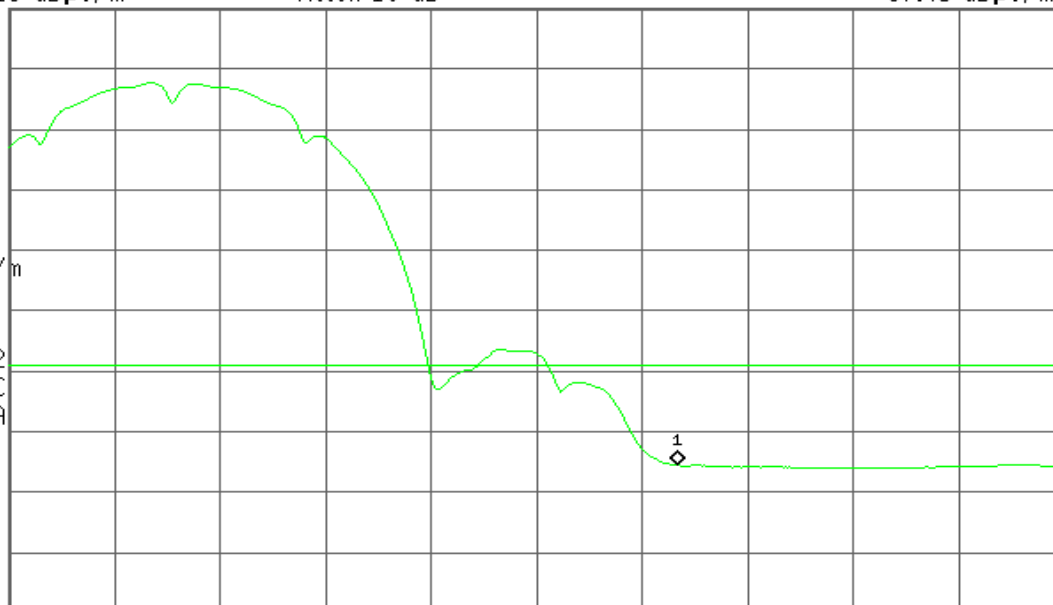

Start 2.455 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz


#VBW 10 Hz

Sweep 3.509 s (601 pts)

**Band Edges (IEEE 802.11g / CH Low)****Detector mode: Peak****Polarity: Vertical**


* Agilent 22:31:34 16 Jan 2012

R T

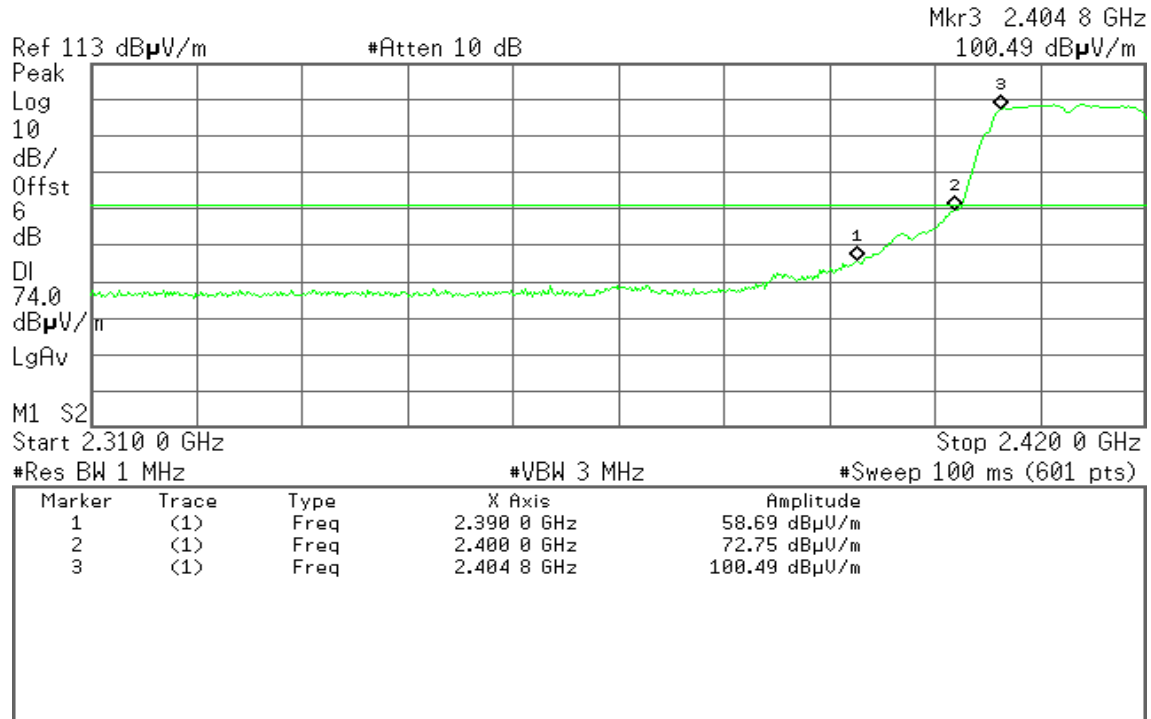**Detector mode: Average****Polarity: Vertical**

* Agilent 22:31:59 16 Jan 2012

R T

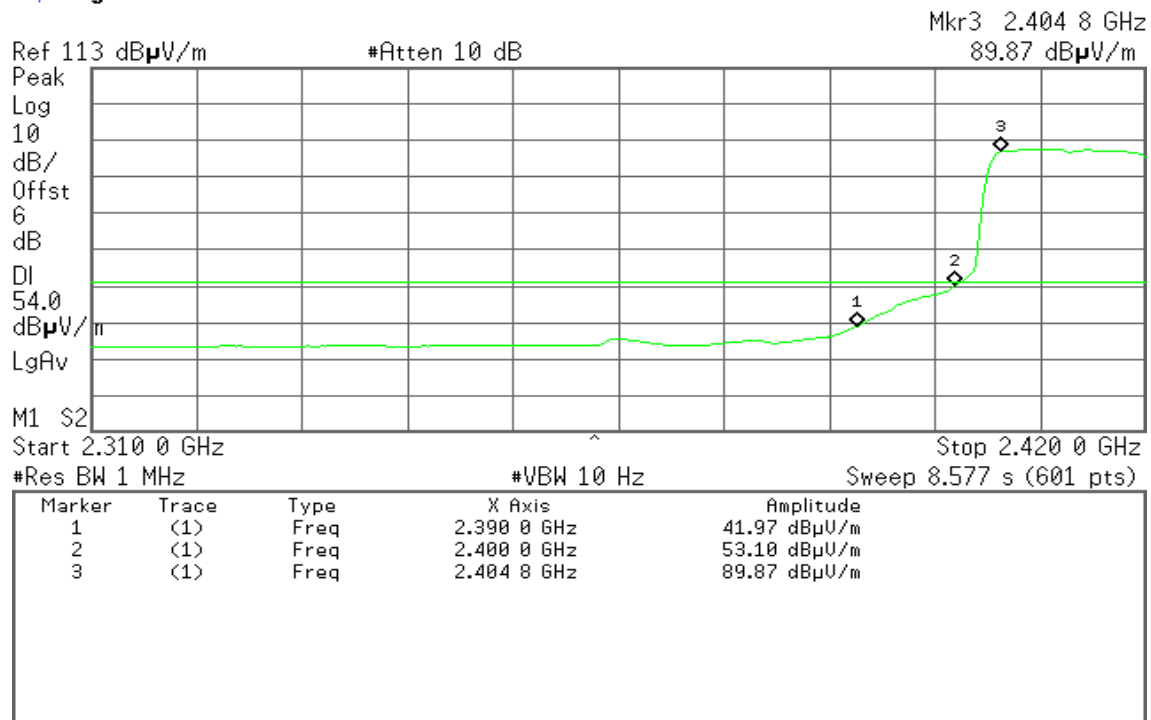




Detector mode: Peak

Polarity: Horizontal

* Agilent 22:27:23 16 Jan 2012

R T

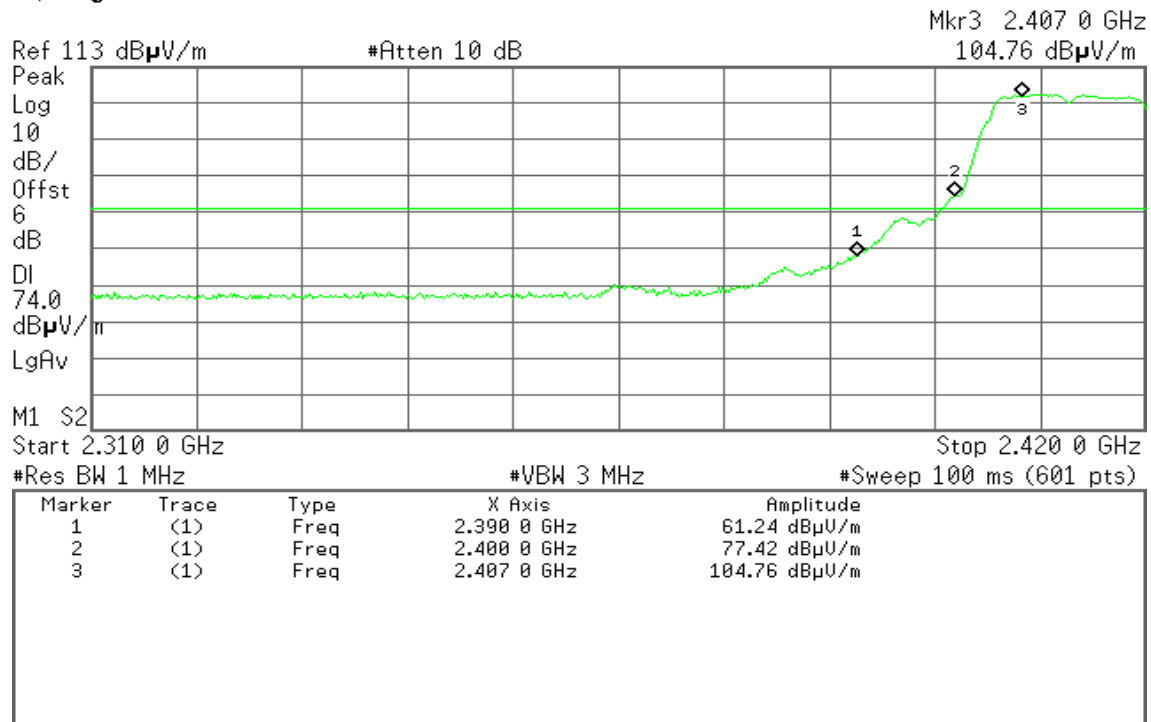


Detector mode: Average

Polarity: Horizontal

* Agilent 22:27:47 16 Jan 2012


R T

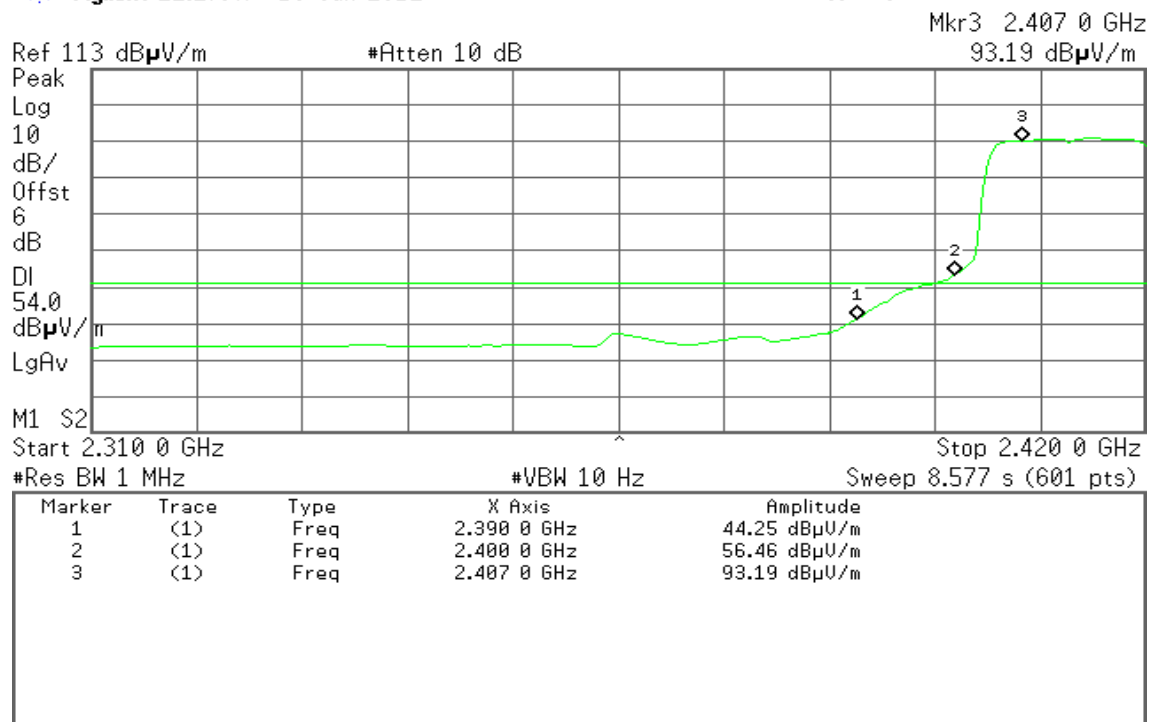

**Band Edges (IEEE 802.11g / CH High)****Detector mode: Peak****Polarity: Vertical**


* Agilent 22:47:39 16 Jan 2012

T

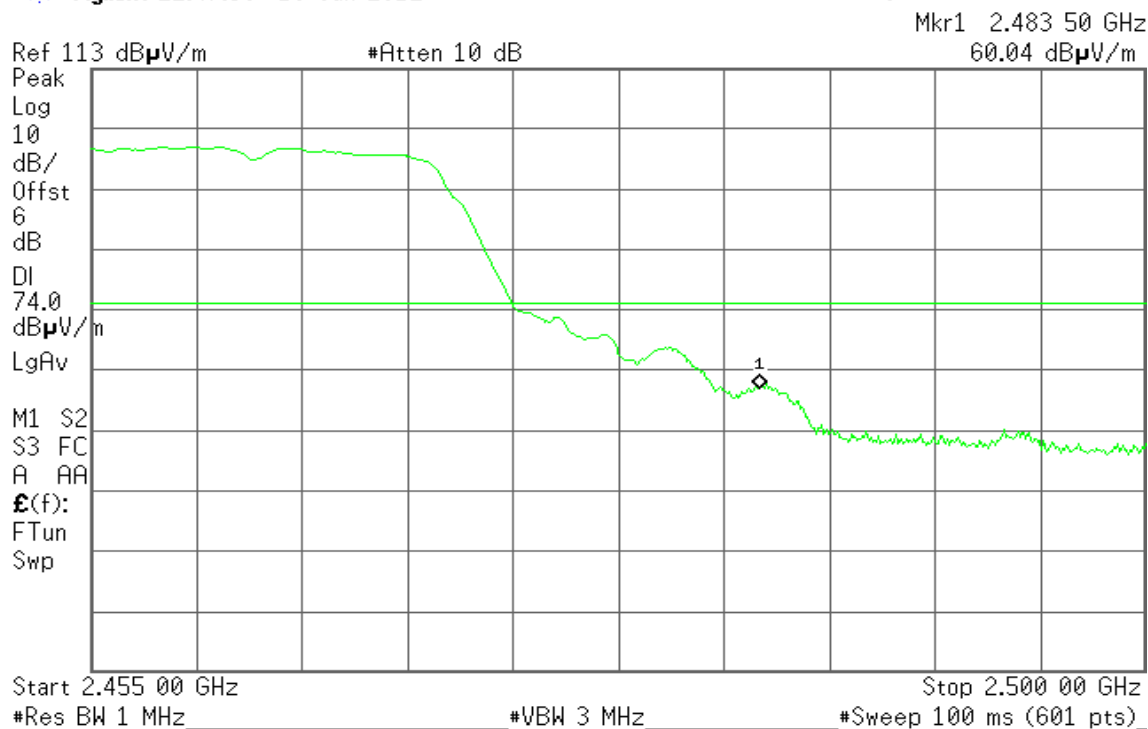**Detector mode: Average****Polarity: Vertical**

* Agilent 22:47:54 16 Jan 2012

T

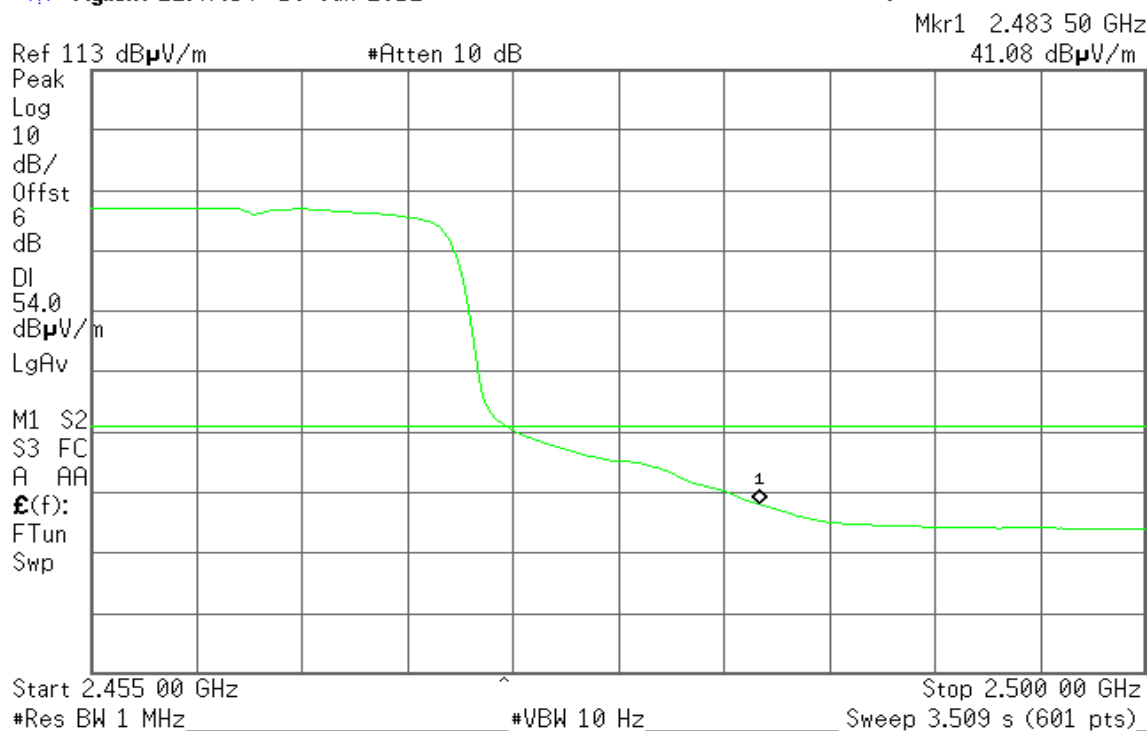



Detector mode: Peak

Polarity: Horizontal

* Agilent 22:40:48 16 Jan 2012

R T

Mkr1 2.483 50 GHz

67.61 dB μ V/mRef 113 dB μ V/m

#Atten 10 dB

Peak

Log

10

dB/

Offst

6

dB

DI

74.0

dB μ V/m

LgAv

M1 S2

S3 FC

A AA

E(f):

FTun

Swp

Start 2.455 00 GHz

#Res BW 1 MHz

#VBW 3 MHz

Stop 2.500 00 GHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

* Agilent 22:41:04 16 Jan 2012

R T

Mkr1 2.483 50 GHz

46.25 dB μ V/mRef 113 dB μ V/m

#Atten 10 dB

Peak

Log

10

dB/

Offst

6

dB

DI

54.0

dB μ V/m

LgAv

M1 S2

S3 FC

A AA

E(f):

FTun

Swp

Start 2.455 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.500 00 GHz


Sweep 3.509 s (601 pts)



Spurious Emissions

Test Plot


IEEE 802.11b mode

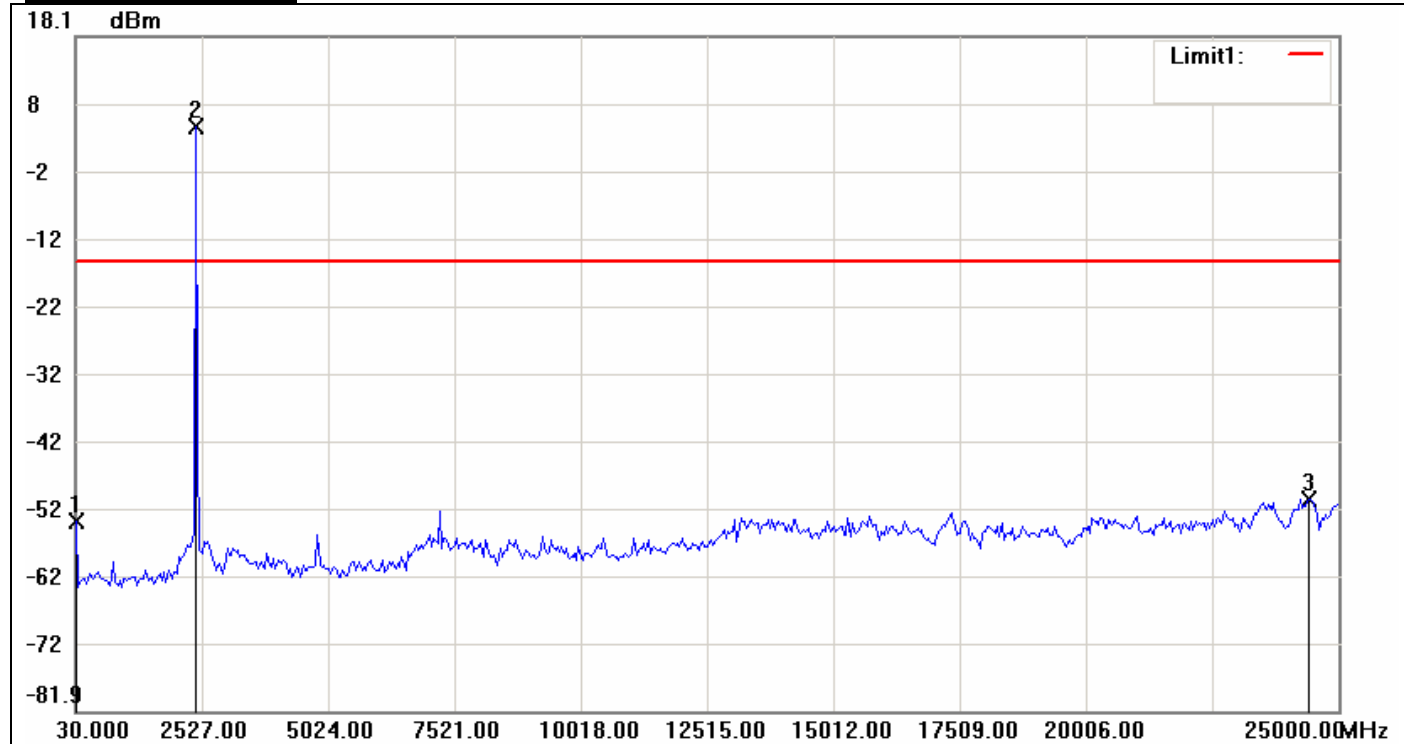

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	30.0000	-53.93	-15.31	-38.62
2	2402.1500	4.69	-15.31	20.00
3	24417.3667	-50.47	-15.31	-35.16




CH Mid

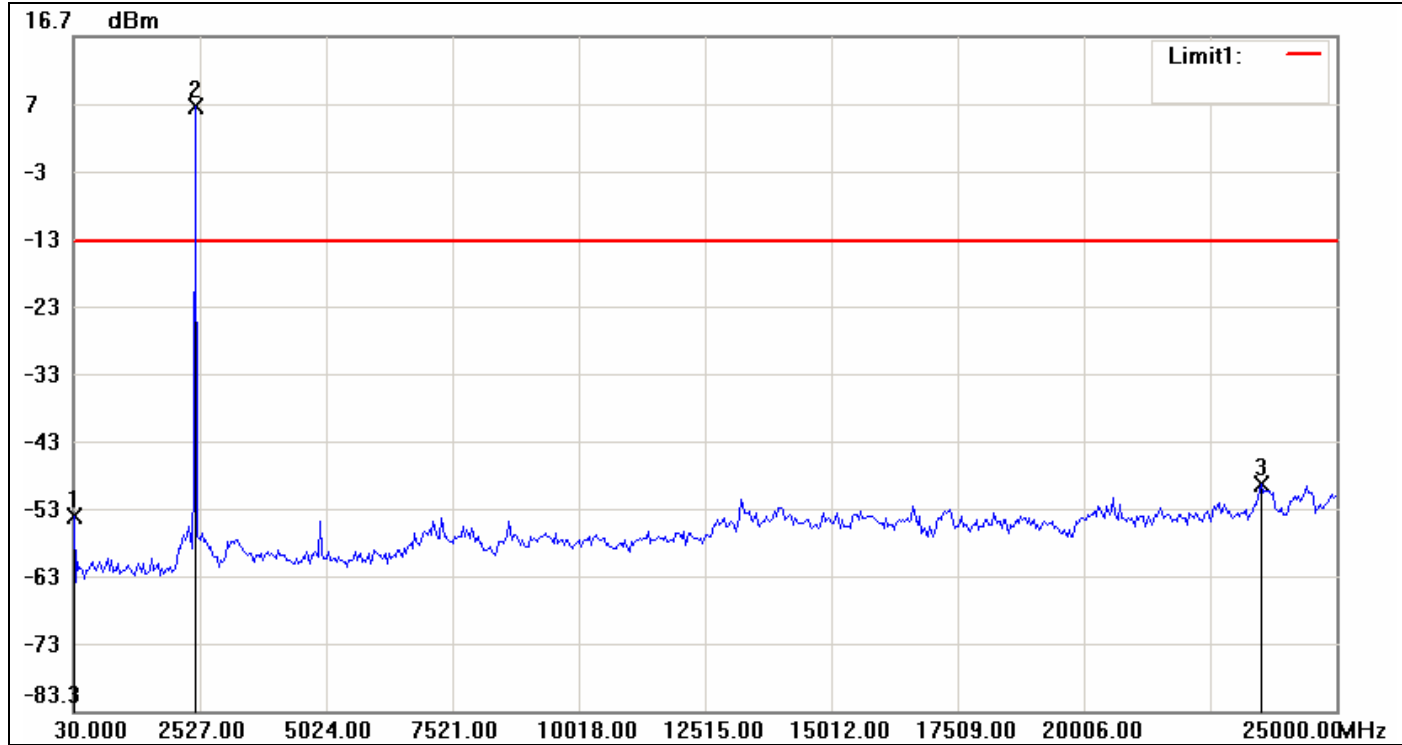

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	30.0000	-54.40	-13.72	-40.68
2	2443.7667	6.28	-13.72	20.00
3	23501.8000	-49.70	-13.72	-35.98



CH High

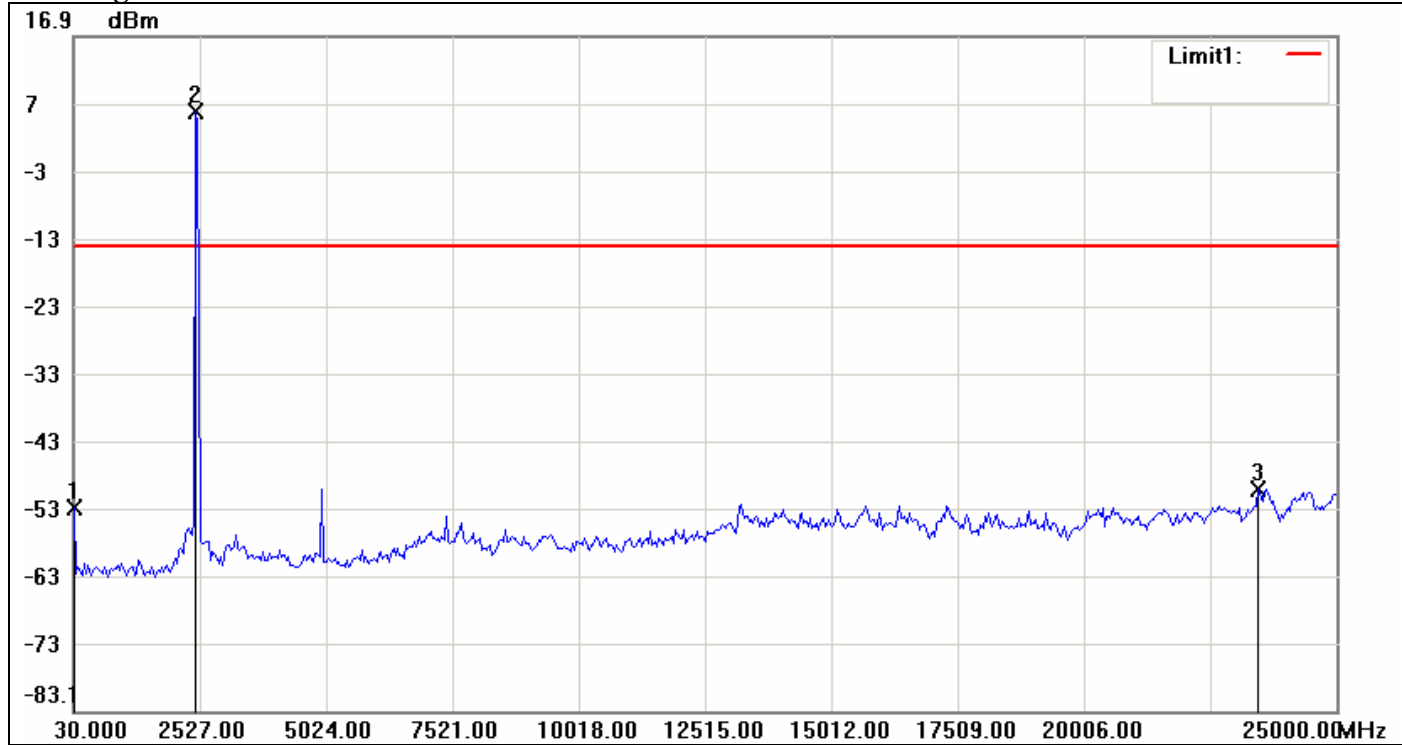


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	30.0000	-53.00	-14.25	-38.75
2	2443.7667	5.75	-14.25	20.00
3	23460.1833	-50.14	-14.25	-35.89



IEEE 802.11g mode


CH Low

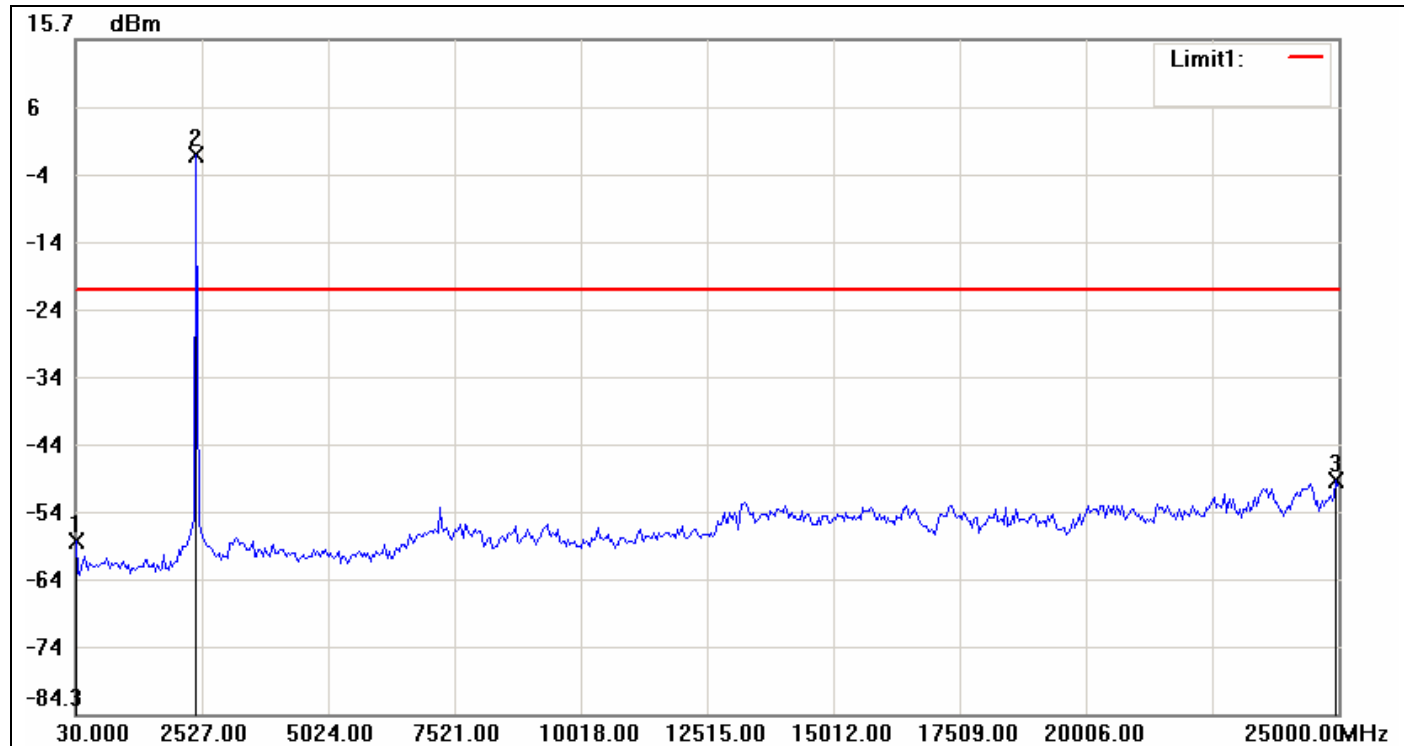

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	30.0000	-58.64	-21.34	-37.30
2	2402.1500	-1.34	-21.34	20.00
3	24958.3833	-49.72	-21.34	-28.38




CH Mid

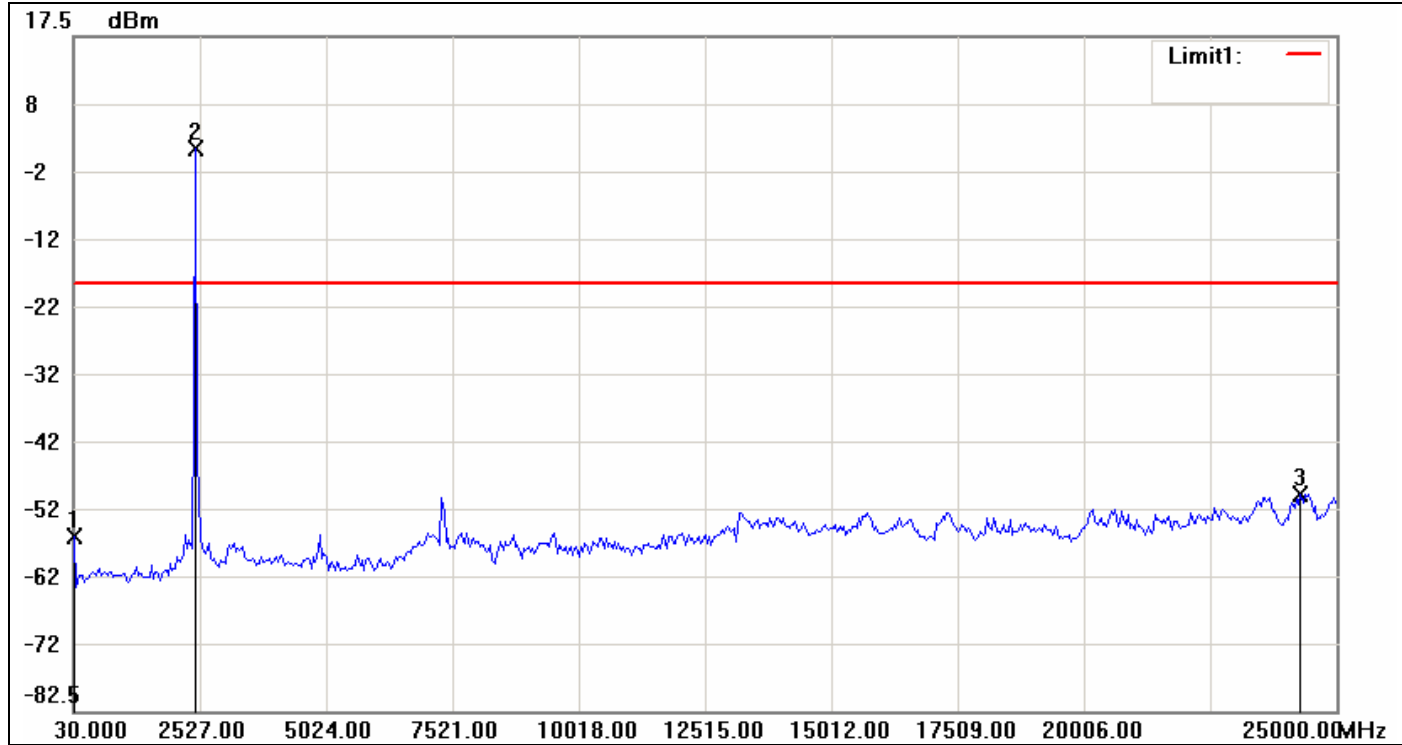

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	30.0000	-56.55	-19.16	-37.39
2	2443.7667	0.84	-19.16	20.00
3	24292.5167	-50.30	-19.16	-31.14



CH High

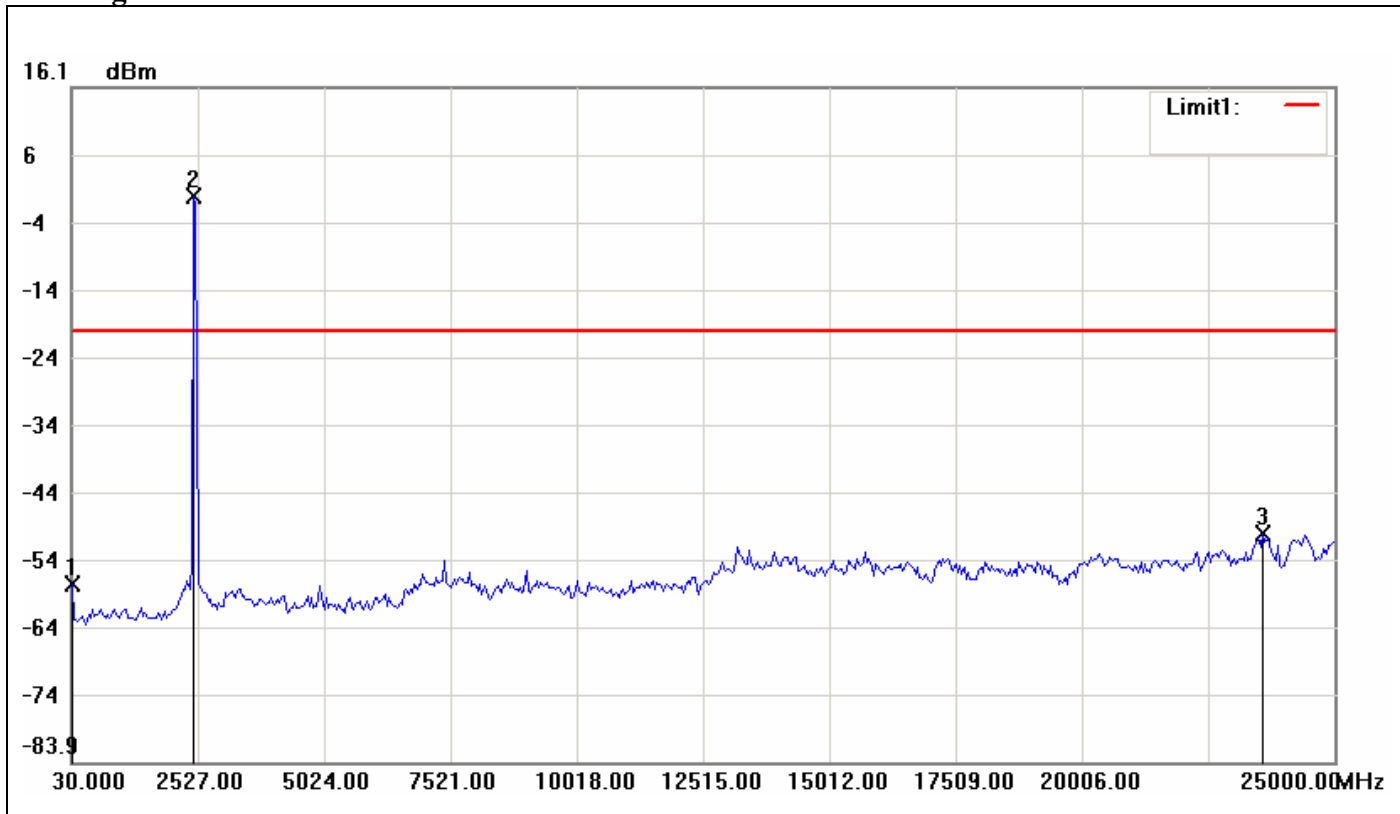

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	30.0000	-57.42	-20.06	-37.36
2	2443.7667	-0.06	-20.06	20.00
3	23585.0333	-50.13	-20.06	-30.07




7.4 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted.

**Test Data****Test mode: IEEE 802.11b**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-6.28	8.00	PASS
Mid	2442	-7.77		PASS
High	2462	-6.72		PASS

Test mode: IEEE 802.11g


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-15.55	8.00	PASS
Mid	2442	-13.49		PASS
High	2462	-15.36		PASS



Test Plot

IEEE 802.11b


PPSD (CH Low)

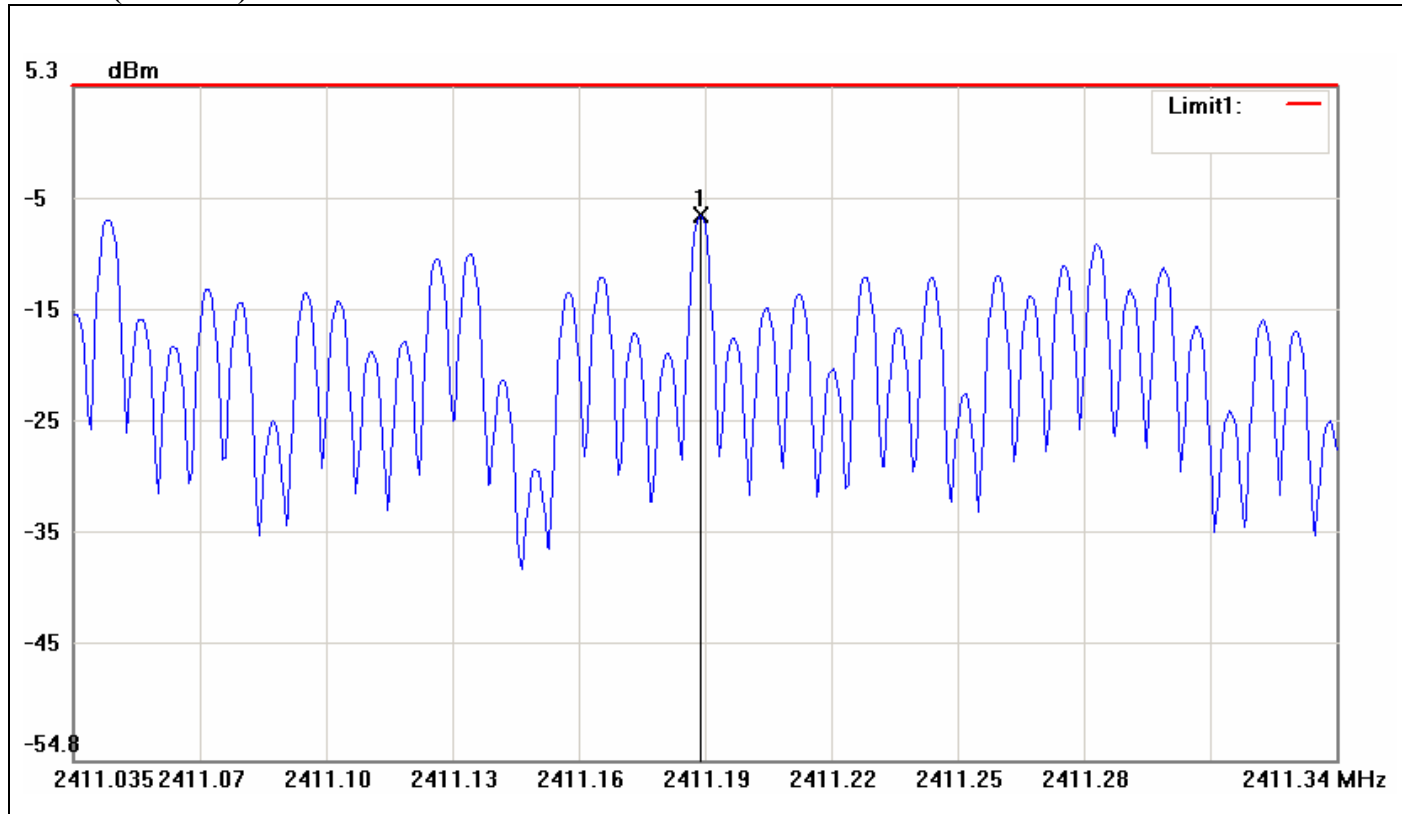

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2411.1840	-6.28	8.00	-14.28




PPSD (CH Mid)

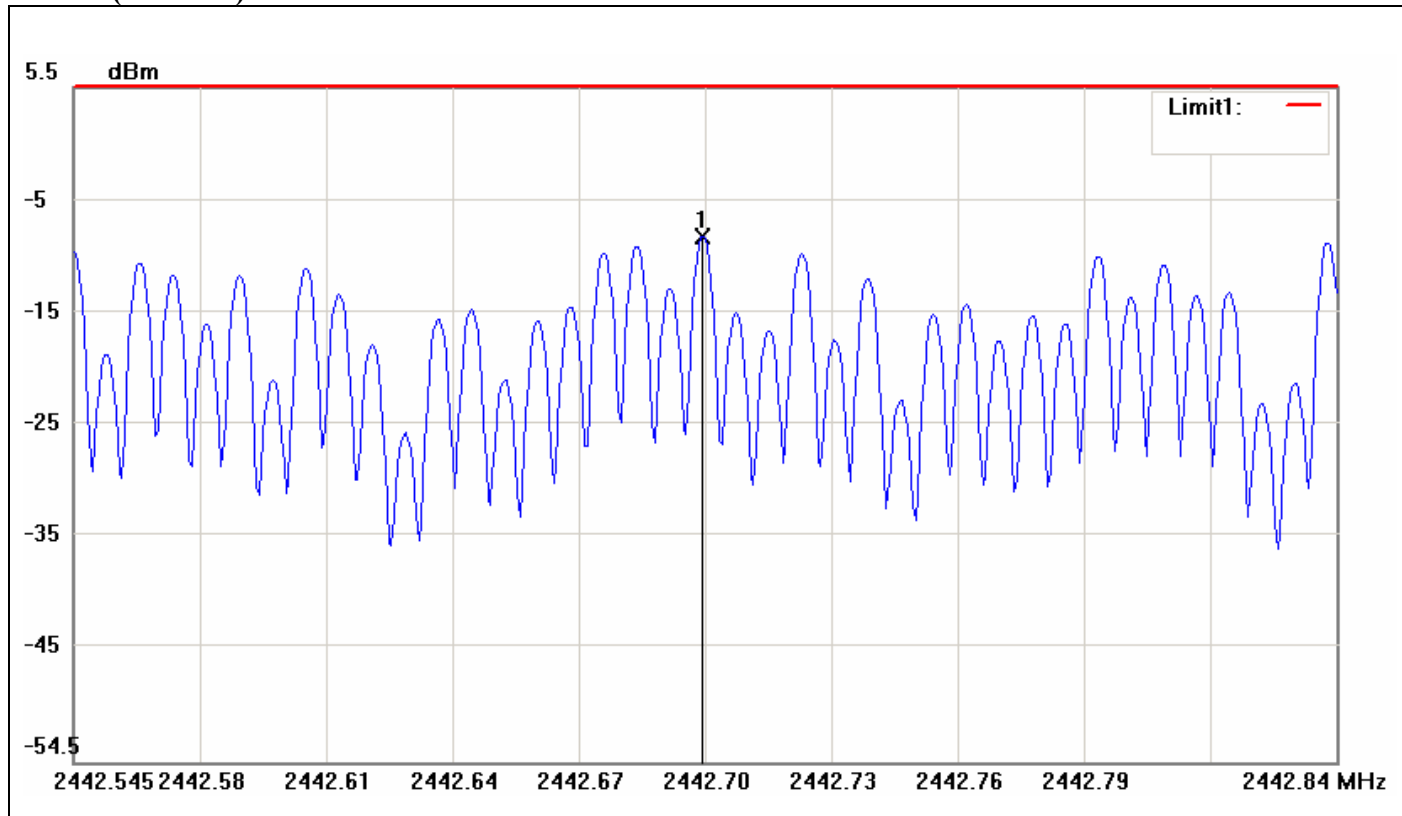

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2442.6947	-7.77	8.00	-15.77



PPSD (CH High)

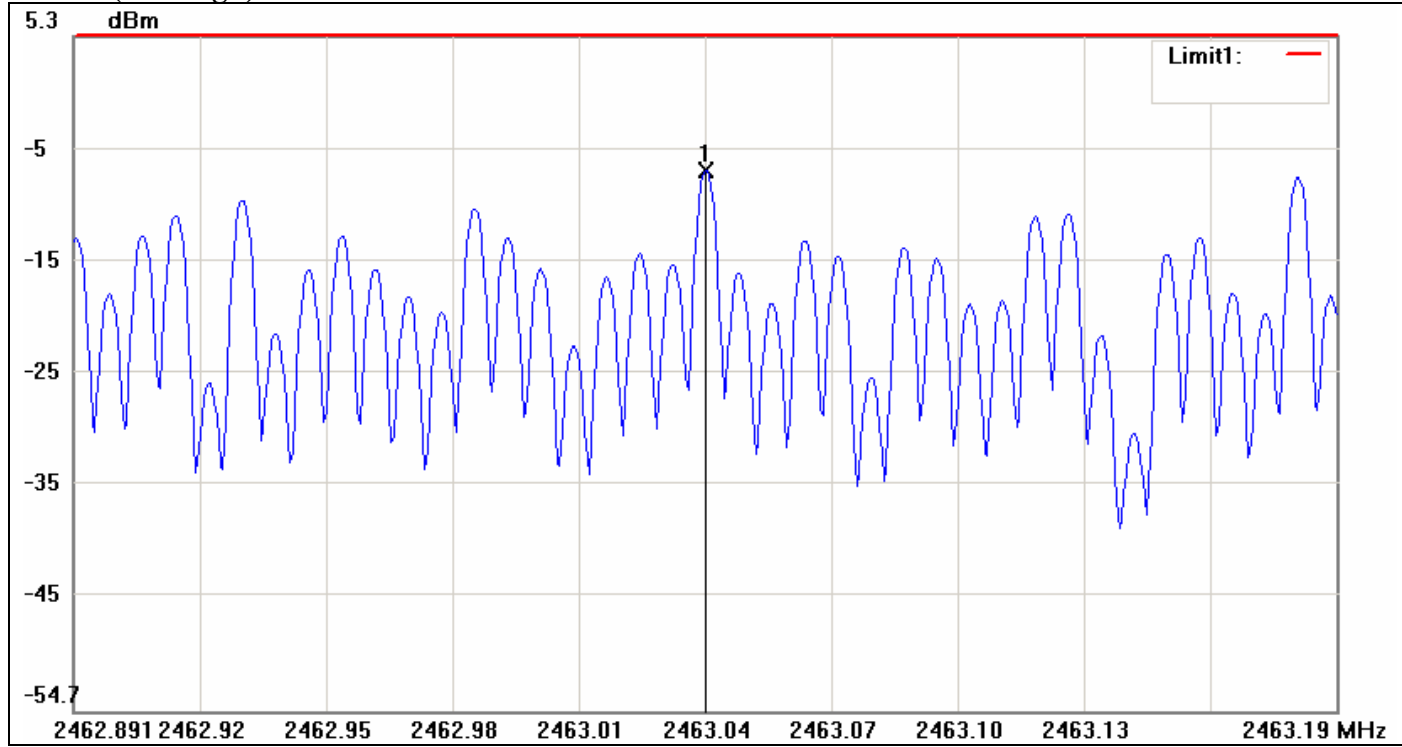


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2463.0409	-6.72	8.00	-14.72



IEEE 802.11g


PPSD (CH Low)

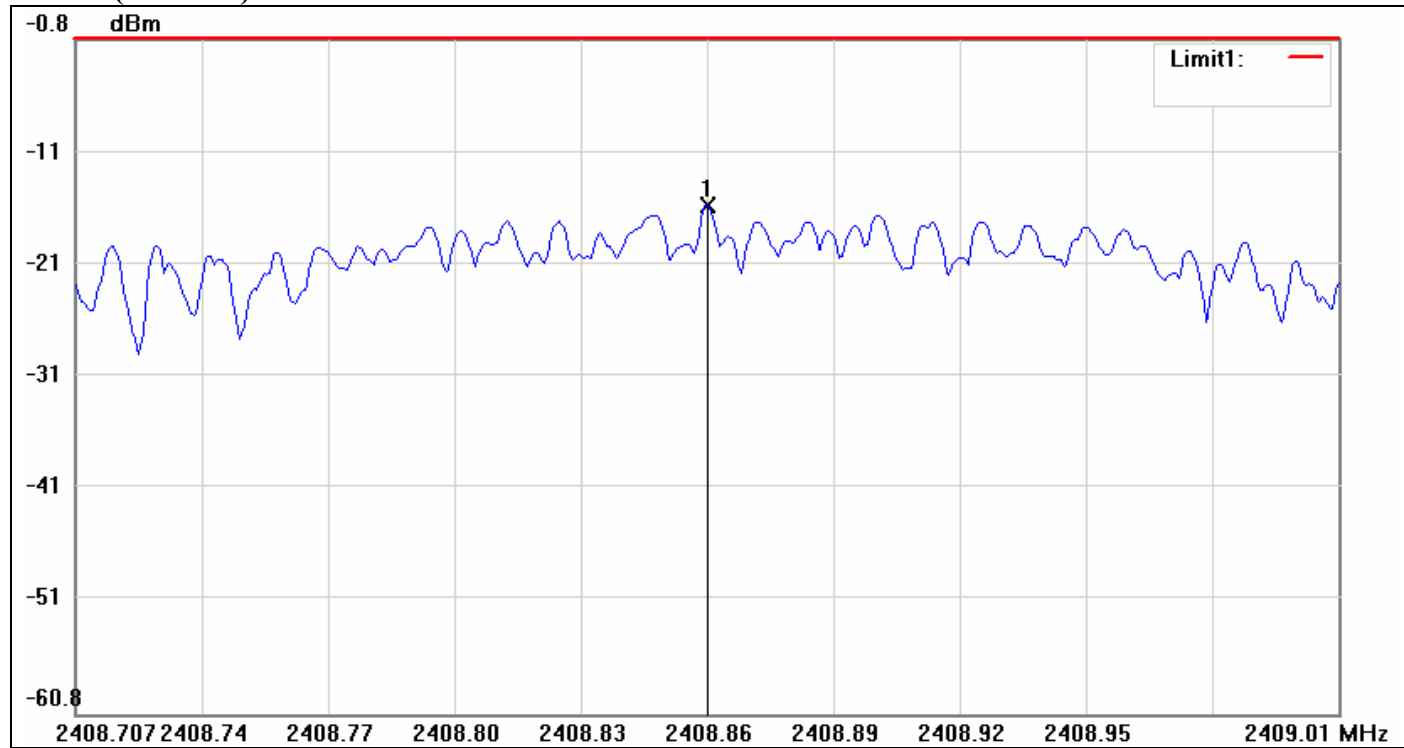

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2408.8566	-15.55	8.00	-23.55




PPSD (CH Mid)

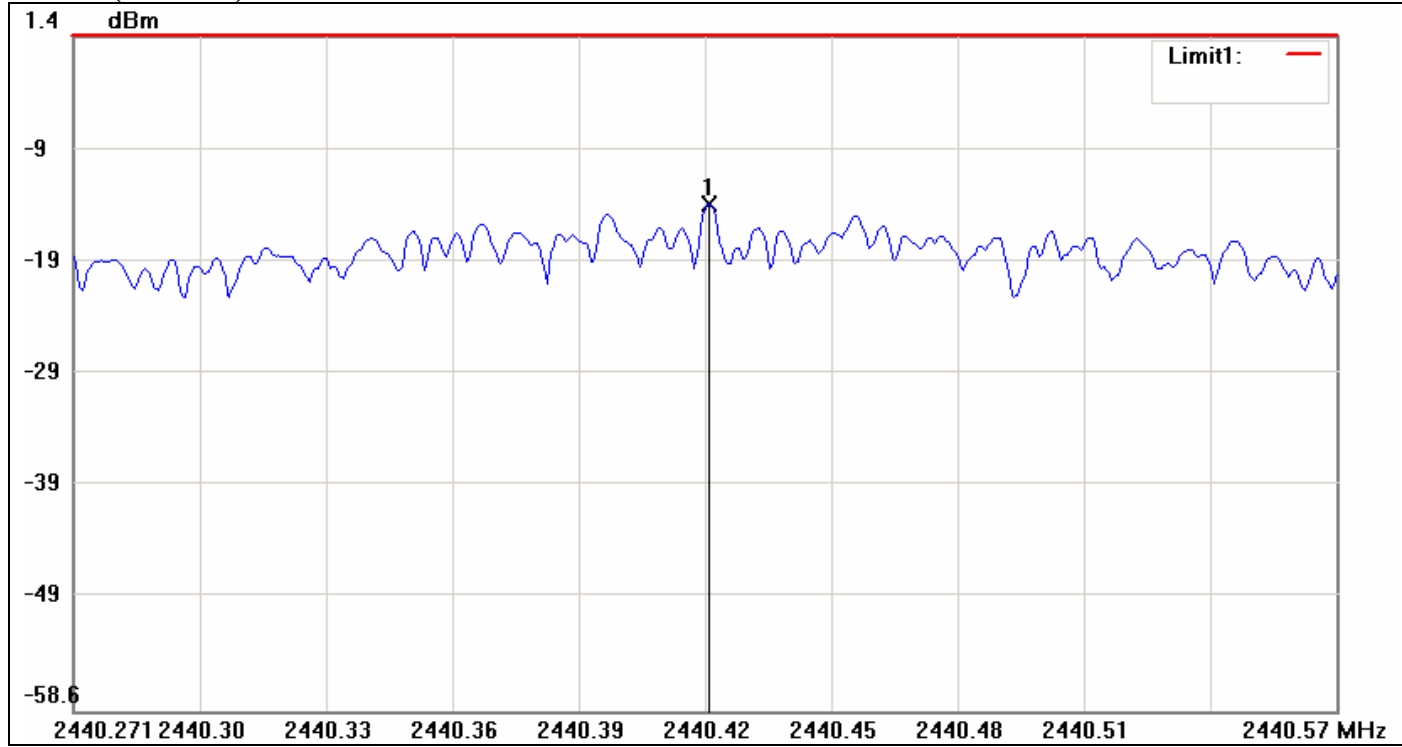

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2440.4219	-13.49	8.00	-21.49



PPSD (CH High)

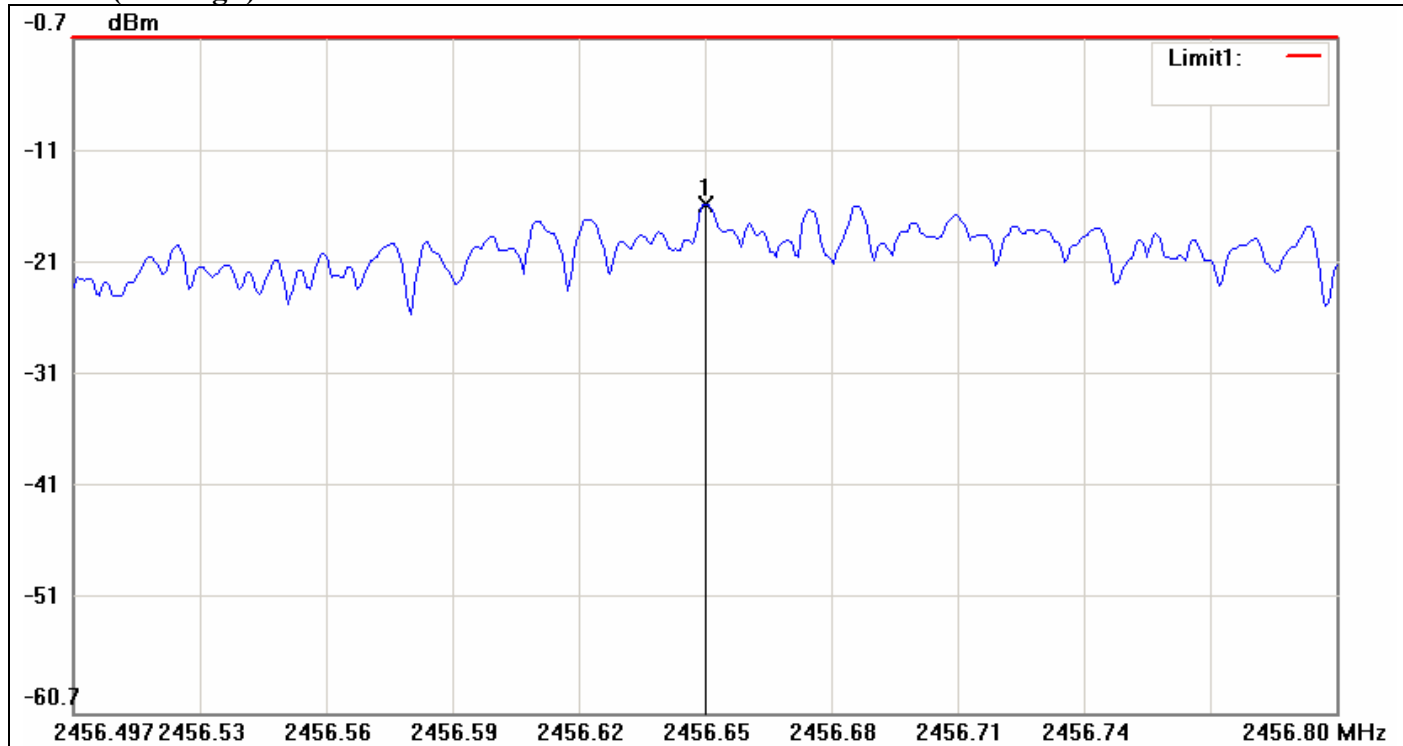

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2456.6467	-15.36	8.00	-23.36



7.5 SPURIOUS EMISSIONS

7.5.1 Radiated Emissions

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54




Test Configuration

9kHz ~ 30MHz

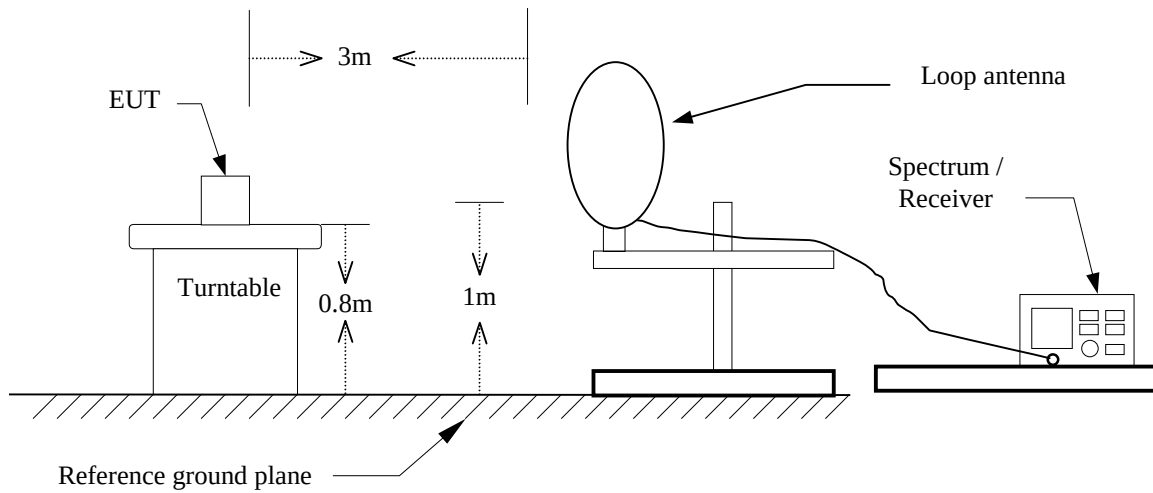


30MHz ~ 1GHz

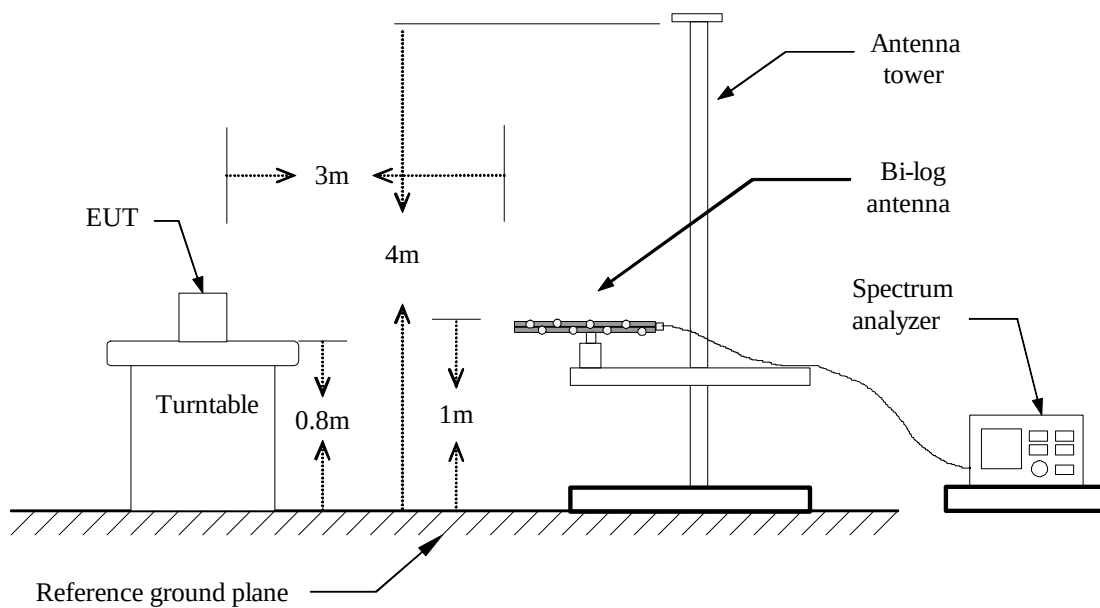



Above 1 GHz

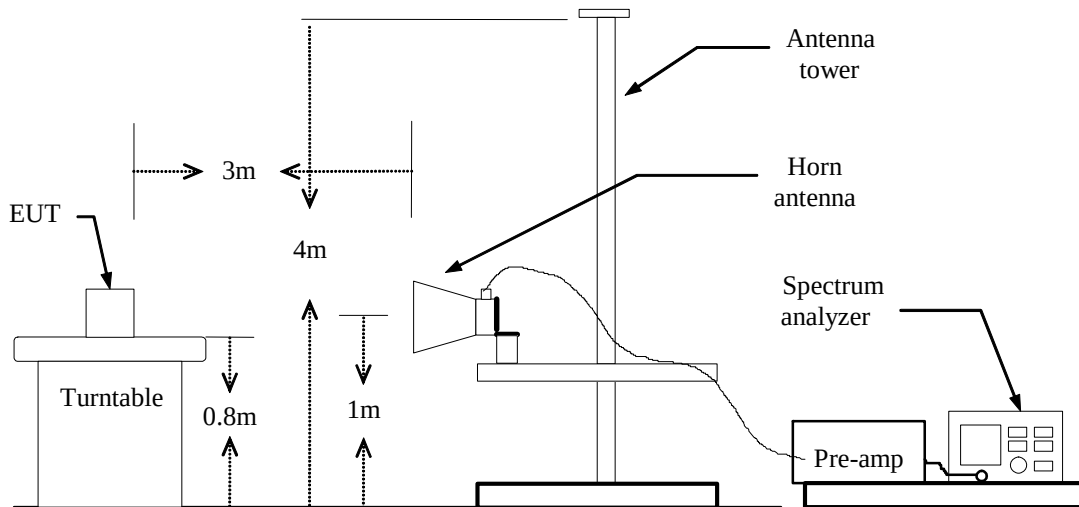



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

**Below 1 GHz****Operation Mode:** Normal Link**Test Date:** January 3, 2012**Temperature:** 25°C**Tested by:** Moore Cheng**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
32.9910	57.76	-22.79	34.97	40.00	-5.03	QP	V
41.0020	61.60	-28.69	32.91	40.00	-7.09	QP	V
52.9975	67.50	-34.70	32.80	40.00	-7.20	QP	V
121.1800	61.47	-29.01	32.46	43.50	-11.04	QP	V
188.1100	66.72	-30.39	36.33	43.50	-7.17	QP	V
209.4500	65.81	-29.97	35.84	43.50	-7.66	QP	V
42.6100	58.55	-29.86	28.69	40.00	-11.31	QP	H
52.3100	64.77	-34.66	30.11	40.00	-9.89	QP	H
65.8900	66.72	-34.76	31.96	40.00	-8.04	QP	H
107.6000	63.85	-31.26	32.59	43.50	-10.91	QP	H
131.8500	64.42	-29.08	35.34	43.50	-8.16	QP	H
209.4500	63.63	-29.97	33.66	43.50	-9.84	QP	H

Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

**Above 1 GHz****Operation Mode:** IEEE 802.11b / TX / CH Low**Test Date:** January 17, 2012**Temperature:** 25°C**Tested by:** Sehni Hu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1053.33	64.23	42.53	-11.01	53.21	31.52	74.00	54.00	-22.48	AVG	V
2000.00	58.57	43.56	-5.47	53.10	38.09	74.00	54.00	-15.91	AVG	V
N/A										
1053.33	63.17	42.44	-11.01	52.15	31.43	74.00	54.00	-22.57	AVG	H
1303.33	60.61	---	-10.75	49.86	---	74.00	54.00	-4.14	Peak	H
4825.00	50.46	40.49	2.61	53.07	43.10	74.00	54.00	-10.9	AVG	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** IEEE 802.11b / TX / CH Mid**Test Date:** January 17, 2012**Temperature:** 25°C**Tested by:** Sehni Hu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1040.00	62.89	---	-11.03	51.86	---	74.00	54.00	-2.14	Peak	V
N/A										
1060.00	61.79	---	-11.01	50.78	---	74.00	54.00	-3.22	Peak	H
4875.00	49.22	---	2.71	51.93	---	74.00	54.00	-2.07	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** IEEE 802.11b / TX / CH High**Test Date:** January 17, 2012**Temperature:** 25°C**Tested by:** Sehni Hu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1043.33	63.00	---	-11.02	51.98	---	74.00	54.00	-2.02	Peak	V
1993.33	58.75	42.12	-5.54	53.21	36.58	74.00	54.00	-17.42	AVG	V
N/A										
1113.33	62.52	---	-10.95	51.57	---	74.00	54.00	-2.43	Peak	H
4925.00	49.49	40.09	2.81	52.30	42.90	74.00	54.00	-11.1	AVG	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** IEEE 802.11g / TX / CH Low**Test Date:** January 17, 2012**Temperature:** 25°C**Tested by:** Sehni Hu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1053.33	59.54	---	-11.01	48.53	---	74.00	54.00	-5.47	Peak	V
1993.33	57.43	---	-5.54	51.89	---	74.00	54.00	-2.11	Peak	V
4933.33	48.13	---	2.83	50.95	---	74.00	54.00	-3.05	Peak	V
N/A										
1023.33	60.54	---	-11.05	49.49	---	74.00	54.00	-4.51	Peak	H
4941.67	47.69	---	2.84	50.53	---	74.00	54.00	-3.47	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** IEEE 802.11g / TX / CH Mid**Test Date:** January 17, 2012**Temperature:** 25°C**Tested by:** Sehni Hu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1053.33	61.76	---	-11.01	50.74	---	74.00	54.00	-3.26	Peak	V
1333.33	60.05	---	-10.72	49.33	---	74.00	54.00	-4.67	Peak	V
1993.33	57.37	---	-5.54	51.83	---	74.00	54.00	-2.17	Peak	V
N/A										
1040.00	61.25	---	-11.03	50.22	---	74.00	54.00	-3.78	Peak	H
4875.00	47.65	---	2.71	50.36	---	74.00	54.00	-3.64	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** IEEE 802.11g / TX / CH High**Test Date:** January 17, 2012**Temperature:** 25°C**Tested by:** Sehni Hu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1043.33	65.31	43.55	-11.02	54.29	32.53	74.00	54.00	-21.47	AVG	V
1326.67	59.58	---	-10.73	48.85	---	74.00	54.00	-5.15	Peak	V
1996.67	57.26	---	-5.50	51.76	---	74.00	54.00	-2.24	Peak	V
N/A										
1046.67	61.76	---	-11.02	50.74	---	74.00	54.00	-3.26	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.6 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link **Test Date:** January 4, 2012
Temperature: 26°C **Tested by:** Moore Cheng
Humidity: 60% RH

Frequency (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB)	QP Result (dBuV)	AV Result (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
5.0555	38.11	18.50	9.79	47.90	28.29	60.00	50.00	-12.10	-21.71	L1
8.9992	28.26	15.67	9.90	38.16	25.57	60.00	50.00	-21.84	-24.43	L1
13.0009	36.26	18.22	9.96	46.22	28.18	60.00	50.00	-13.78	-21.82	L1
14.9991	38.54	19.32	9.97	48.51	29.29	60.00	50.00	-11.49	-20.71	L1
17.0374	38.88	19.14	9.99	48.87	29.13	60.00	50.00	-11.13	-20.87	L1
20.9999	34.17	16.01	10.04	44.21	26.05	60.00	50.00	-15.79	-23.95	L1
5.0532	33.49	14.51	9.79	43.28	24.30	60.00	50.00	-16.72	-25.70	L2
10.0758	30.56	20.09	9.93	40.49	30.02	60.00	50.00	-19.51	-19.98	L2
13.0001	35.22	15.27	9.96	45.18	25.23	60.00	50.00	-14.82	-24.77	L2
14.9997	37.29	17.22	9.97	47.26	27.19	60.00	50.00	-12.74	-22.81	L2
16.9995	39.16	16.90	9.99	49.15	26.89	60.00	50.00	-10.85	-23.11	L2
20.9635	31.86	13.44	10.04	41.90	23.48	60.00	50.00	-18.10	-26.52	L2


Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)
5. "-" means Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.




Test Plots

Conducted emissions (Line 1)

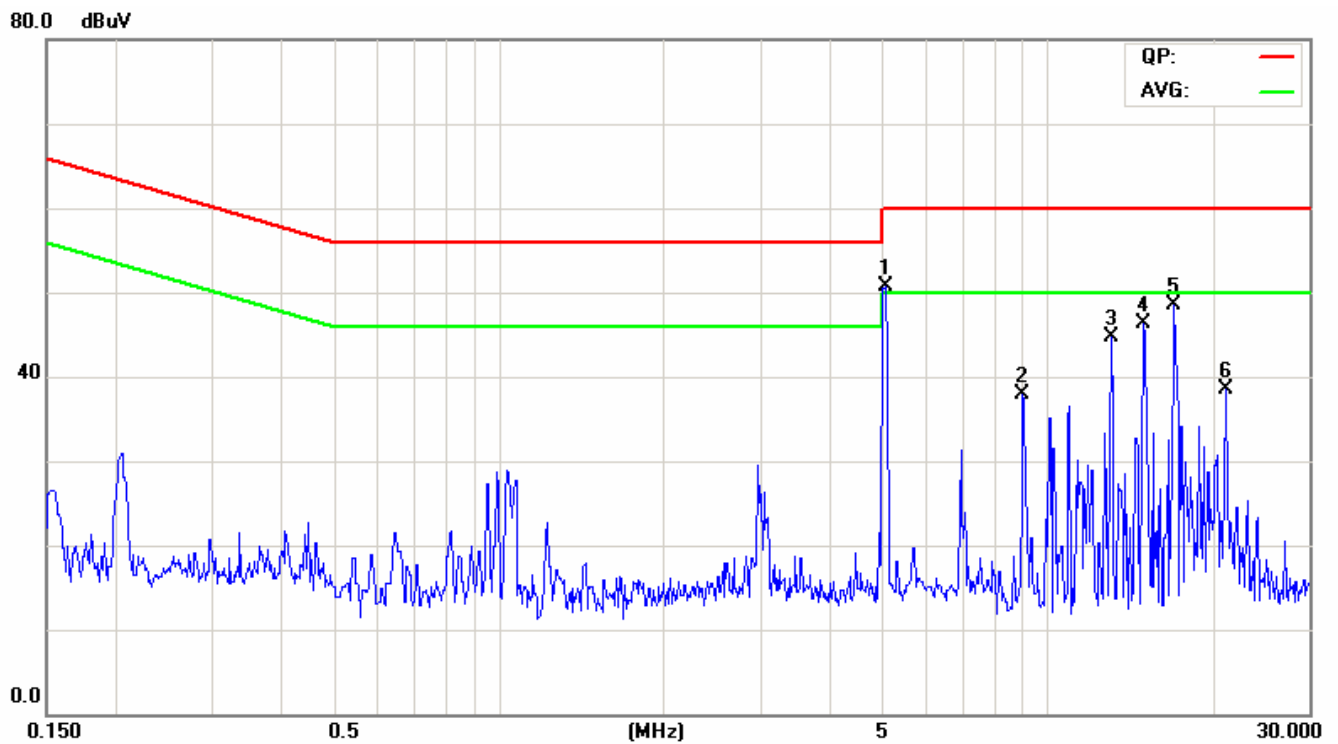

Conducted emissions (Line 2)

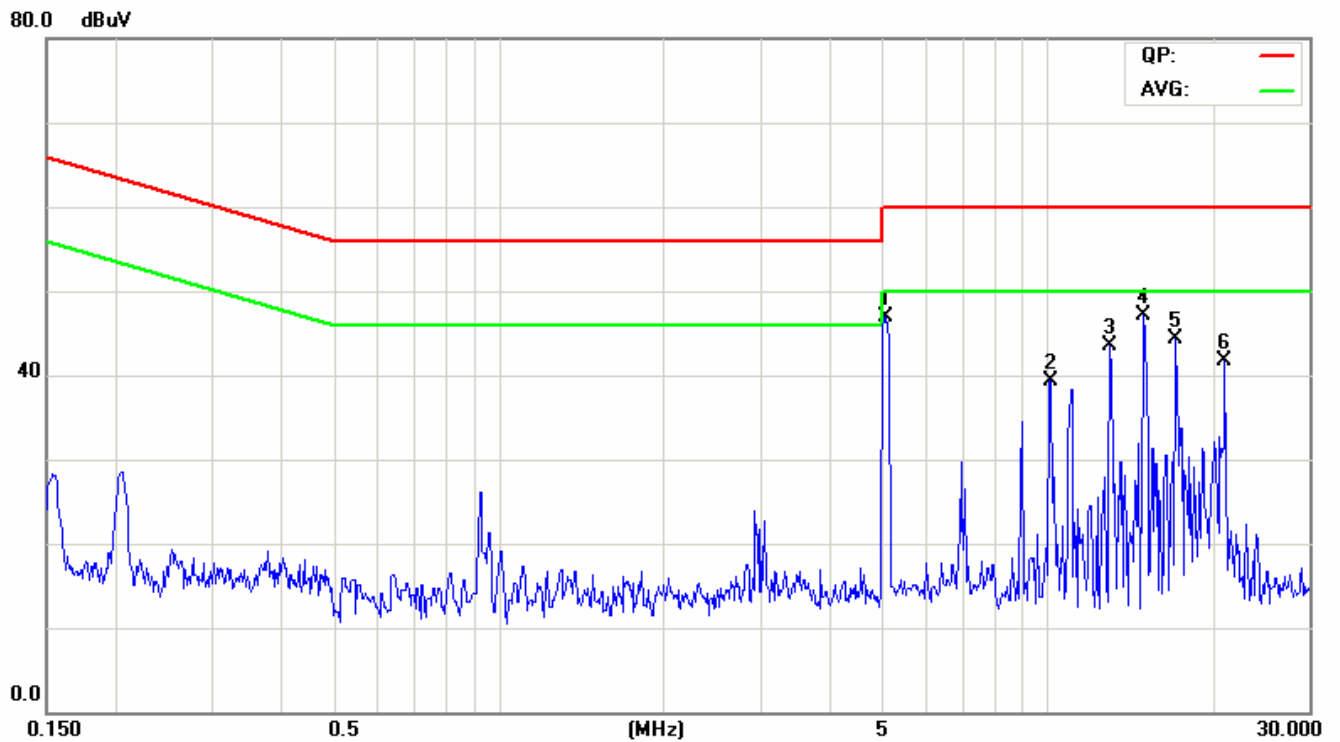



APPENDIX I

RADIO FREQUENCY EXPOSURE

LIMIT

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §15.247(i) and §1.1307(b)(1) of this chapter.

EUT Specification

EUT	Wi-Fi ADAPTOR
Frequency band (Operating)	☒ WLAN: 2.412GHz ~ 2.462GHz ☐ WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz ☐ WLAN: 5.745GHz ~ 5.825GHz ☐ Bluetooth: <u>2.402GHz ~ 2.480 GHz</u>
Device category	☐ Portable (<20cm separation) ☒ Mobile (>20cm separation)
Exposure classification	☐ Occupational/Controlled exposure (S = 5mW/cm ²) ☒ General Population/Uncontrolled exposure (S=1mW/cm ²)
Antenna diversity	☒ Single antenna ☐ Multiple antennas ☐ Tx diversity ☐ Rx diversity ☐ Tx/Rx diversity
Max. output power	IEEE 802.11b: 18.21 dBm (66.22mW) IEEE 802.11g: 23.52 dBm (224.9mW)
Antenna gain (Max)	1.45 dBi (Numeric gain: 1.39)
Evaluation applied	☒ MPE Evaluation* ☐ SAR Evaluation ☐ N/A
Remark: <i>The maximum output power is <u>23.52 dBm (224.9mW)</u> at <u>2442MHz</u> (with <u>1.39 numeric antenna gain.</u>)</i>	

TEST RESULTS

No non-compliance noted.

**Calculation**

Given $E = \frac{\sqrt{30 \times P \times G}}{d}$ & $S = \frac{E^2}{3770}$

Where E = Field strength in Volts / meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power density in milliwatts / square centimeter

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$S = \frac{30 \times P \times G}{3770 d^2}$$

Changing to units of mW and cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = d \text{ (m)} / 100$$

Yields

$$S = \frac{30 \times (P/1000) \times G}{3770 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2} \quad \text{Equation 1}$$

Where d = Distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power density in mW / cm²

Maximum Permissible Exposure

EUT output power = 224.9 mW

Numeric Antenna gain = 1.39

Substituting the MPE safe distance using $d = 20$ cm into Equation 1:

Yields

$$S = 0.000199 \times P \times G$$

Where P = Power in mW

G = Numeric antenna gain

S = Power density in mW / cm²

$$\rightarrow \text{Power density} = 0.0622 \text{ mW} / \text{cm}^2$$

(For mobile or fixed location transmitters, the maximum power density is 1.0 mW/cm² even if the calculation indicates that the power density would be larger.)