



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR 352.472.5500
FAX: 352.472.2030
EMAIL: INFO@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

FCC PART 90 TEST REPORT

APPLICANT	VERTEX STANDARD USA, INC.
	8000 WEST SUNRISE BLVD. FT. LAUDERDALE FL 33322
FCC ID	AXI11134620
MODEL NUMBER	EVX-531-G6-5
PRODUCT DESCRIPTION	HANDHELD TRANSCEIVER
DATE SAMPLE RECEIVED	1/2/2013
DATE TESTED	1/4/2013
TESTED BY	NAM NGUYEN
APPROVED BY	NAM NGUYEN
TIMCO REPORT NO.	7AUT13TestReport.doc
TEST RESULTS	☒ PASS ☐ FAIL

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



Certificate # 0955-01

TABLE OF CONTENTS

GENERAL REMARKS	3
GENERAL INFORMATION	4
TEST PROCEDURES.....	5
RF POWER OUTPUT	6
MODULATION CHARACTERISTICS.....	7
AUDIO FREQUENCY RESPONSE.....	8
AUDIO LOW PASS FILTER.....	9
AUDIO INPUT VERSUS MODULATION.....	10
OCCUPIED BANDWIDTH	11
Analog: 406.1 – 430 MHz	13
Digital: 406.1 – 430 MHz	16
Analog: 450 – 470 MHz	19
Digital: 450 – 470 MHz.....	22
SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED).....	25
Test Data: 406.1-430.0 MHz	25
Test Data: 450.0-470.0 MHz	26
FIELD STRENGTH OF SPURIOUS EMISSIONS	28
Test Data: 406.1 – 430.0 MHz	29
Test Data: 450.0 – 470.0 MHz	30
FREQUENCY STABILITY	32
TRANSIENT FREQUENCY BEHAVIOR.....	33
EMC EQUIPMENT LIST.....	36

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

The test results relate only to the items tested.

Summary

The device under test does:

- ☒ fulfill the general approval requirements as identified in this test report
☐ not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025: 2005 requirements.



Testing Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669



Authorized Signatory Name:

Nam Nguyen
Test Technician

Date: January 18, 2013

Applicant: VERTEX STANDARD USA, INC.
FCC ID: AXI11134620
Report: V\VERTEX STANDARD USA\7AUT13\7AUT13TestReport.doc

GENERAL INFORMATION
DUT Specification

DUT Description	HANDHELD TRANSCEIVER
FCC ID	AXI11134620
Model Number	EVX-531-G6-5
Serial Number	N/A
Operating Frequency	(403 – 470) MHz
Test Frequencies	406.12, 418.00, and 429.97 MHz 450.00, 460.00, and 470.00 MHz
No. of Channels	32
Type of Emission	11K2F3E, 7K60F1D, 7K60F1E 7K60F1W, 7K60FXE, 7K60FXD
Modulation	FM, 4FSK
DUT Power Source	☐ 110–120Vac/50– 60Hz
	☐ DC Power 12V
	☒ Battery Operated Exclusively
Test Item	☐ Prototype
	☒ Pre-Production
	☐ Production
Type of Equipment	☐ Fixed
	☐ Mobile
	☒ Portable
Test Conditions	The temperature was 26°C Relative humidity of 50%.
Modification to the DUT	None
Test Exercise	The DUT was placed in continuous transmit mode.
Applicable Standards	ANSI/TIA 603-C:2004, FCC CFR 47 Part 90
Test Facility	Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA.

Applicant: VERTEX STANDARD USA, INC.
FCC ID: AXI11134620
Report: V\VERTEX STANDARD USA\7AUT13\7AUT13TestReport.doc

TEST PROCEDURES

Power Line Conducted Interference: The procedure used was ANSI/TIA 603-C: 2004 using a 50uH LISN. Both lines were observed with the DUT transmitting. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

Bandwidth 20 dB: The measurements were made with the spectrum analyzer's resolution bandwidth (RBW) = 1 MHz and the video bandwidth (VBW) = 3 MHz and the span set as shown on plot.

Power Output: The RF power output was measured at the antenna feed point using a peak power meter.

Antenna Conducted Emissions: The RBW = 100 kHz, VBW = 300 kHz and the span set to 10 MHz and the spectrum was scanned from 30 MHz to the 10th harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

Radiation Interference: The test procedure used was ANSI/TIA 603-C: 2004 using an Agilent spectrum receiver with pre-selector. The bandwidth (RBW) of the spectrum receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a micro volt at the output of the antenna.


RF POWER OUTPUT

Rule Part No.: FCC Part 2.1046(a), IC RSS-119 4.1 and 5.4, RSS-GEN 4.8

Test Requirements:

Method of Measurement: RF power is measured by connecting a 50-ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage, and the transmitter properly adjusted the RF output measures:

Test Setup Diagram:



Test Data: The RF power of the EUT can be set at 5W, 2W, 1W, or 0.25W.

OUTPUT POWER: For the highest and lowest power setting.

Tuned Frequency (MHz)	RF POWER (W)	
	HI	LOW
406.13	4.85	0.32
418.00	5.00	0.36
429.98	4.60	0.33
450.00	4.54	0.33
460.00	4.60	0.33
470.00	4.65	0.30

Part 2.1033 (C)(8) DC Input into the final amplifier

FOR LOW POWER SETTING INPUT POWER: $(7.4V)(0.47A) = 3.48$ Watts

FOR HIGH POWER SETTING INPUT POWER: $(7.4V)(1.51A) = 11.17$ Watts

MODULATION CHARACTERISTICS

Part 2.1033(c)

Part 2.1033(c) (4) Type of Emission:

FCC Part 90.209

FCC Part 90.207

Type of Emission: 11K2F3E

$B_n = 2M + 2DK$

$M = 3000$

$D = 2100$

$K=1$

$B_n = 2(3000)+2(2100) = 10.2k$

The EVX-531-G6-5 Digital functions comply with DMR (Digital Mobile Radio).

Format: 2-slot TDMA

Modulation: 4FSK

Bandwidth: 12.5 kHz

Data rate: 9,600bps (bit per second)

Voice: AMBE+2 Vocoder (digitized) 3,600bps

Using the 99% bandwidth method yields a emission designator of:

7K60F1D, 7K60F1E 7K60F1W, 7K60FXE, 7K60FXD

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11134620

Report: V\VERTEX STANDARD USA\7AUT13\7AUT13TestReport.doc

AUDIO FREQUENCY RESPONSE


Rule Part No.: FCC Part 2.1047(a)(b)

Test Requirements:

Method of Measurement:

The audio frequency response was measured in accordance with ANSI/TIA 603-C: 2004. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 – 5000Hz shall be submitted. The audio frequency response curve is shown below.

AUDIO FREQUENCY RESPONSE PLOT

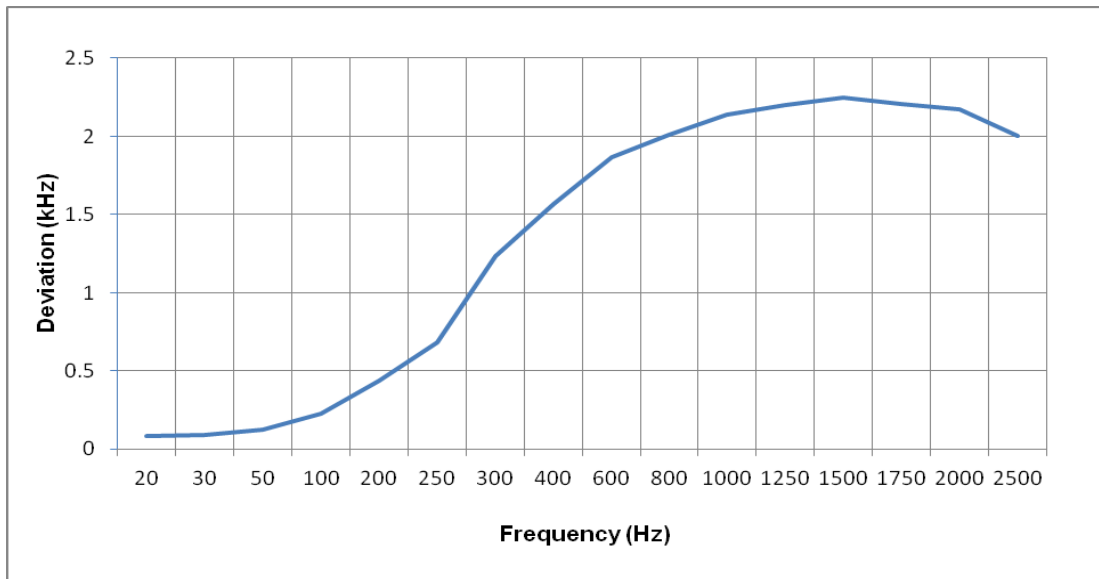


AUDIO LOW PASS FILTER

VOICE MODULATED COMMUNICATION EQUIPMENT

Part 2.1047(a) Voice modulated communication equipment: For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all the circuitry installed between the modulation limiter and the modulated stage shall be submitted.

AUDIO LOW PASS FILTER

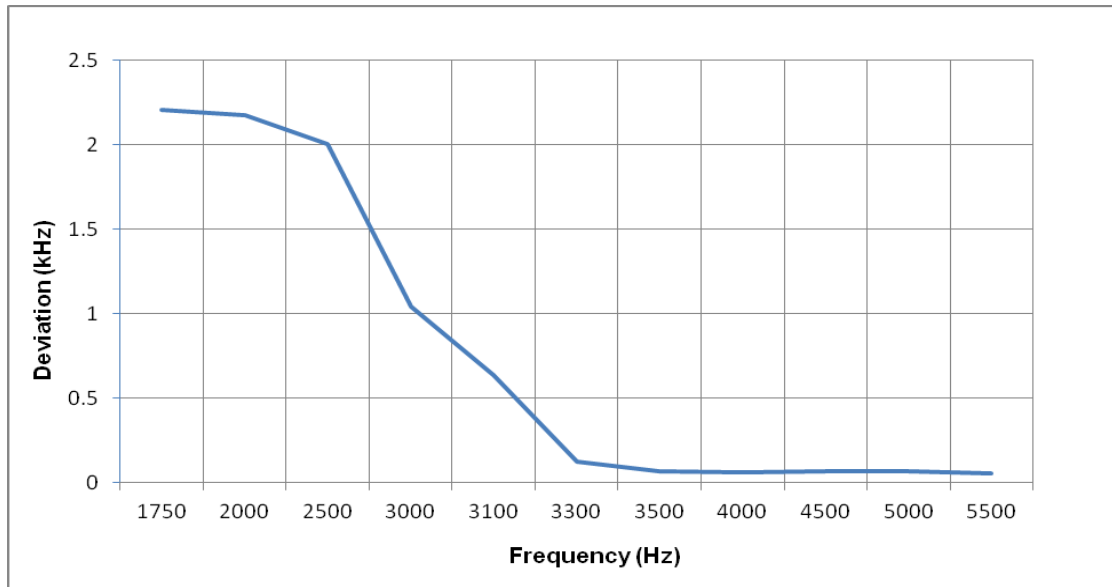

AUDIO INPUT VERSUS MODULATION


Rule Part No.: FCC Part 2.1047(b) & 90

Test Requirements:

Method of Measurement: **Modulation cannot exceed 100%**, The audio input level needed for a particular percentage of modulation was measured in accordance with ANSI/TIA 603-C:2004. The audio input curves versus modulation are shown below. Curves are provided for audio input frequencies of 300, 1000, and 2500 Hz.

Test data:

MODULATION LIMITING PLOT

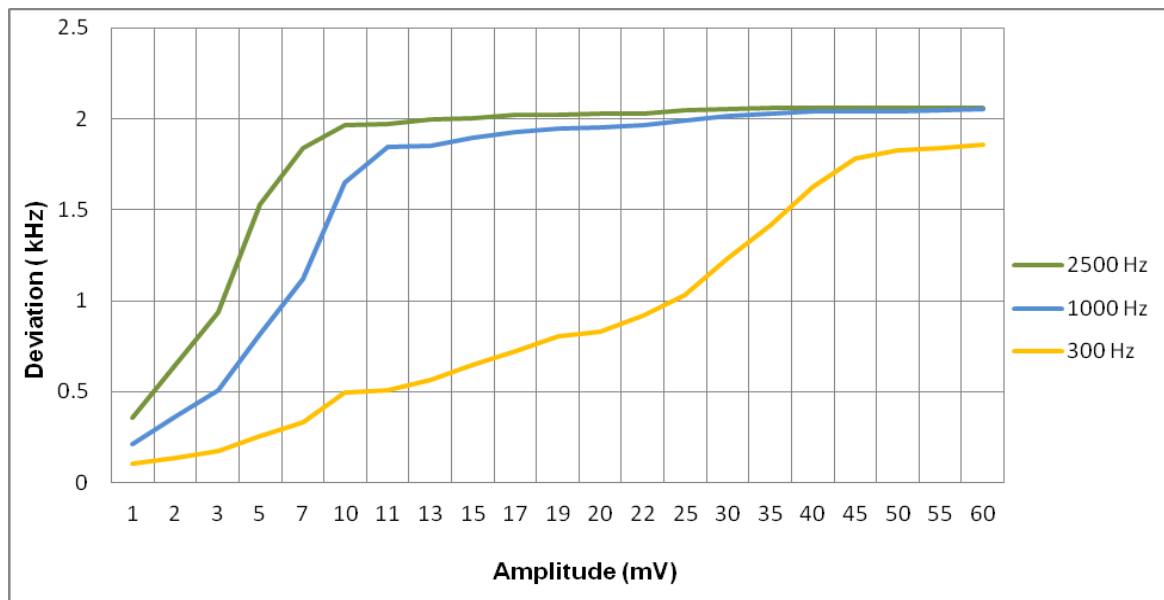

OCCUPIED BANDWIDTH

FCC Part 2.1049(c), EMISSION BANDWIDTH

Part 90.210(d) Emission Mask D - 12.5 kHz channel BW equipment.

For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10\log(P)$ dB or 70 dB, whichever is the lesser attenuation.

Part 90.210(e) Emission Mask E - 6.25 kHz channel BW equipment.

For transmitters designed to operate with a 6.25 kHz bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:


- (1) On any frequency from the center of the authorized bandwidth f_0 to 3.0 kHz removed from f_0 : Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least $30 + 16.67(f_d - 3.0 \text{ kHz})$ or $55 + 10 \log(P)$ or 65, whichever is the lesser attenuation.
- (3) On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least $55 + 10\log(P)$ dB or 65 dB, whichever is the lesser attenuation.

OCCUPIED BANDWIDTH MEASUREMENT

Test procedure: ANSI/TIA-603-C:2004 para 2.2.11.

Test Setup Diagram:

OCCUPIED BANDWIDTH MEASUREMENT

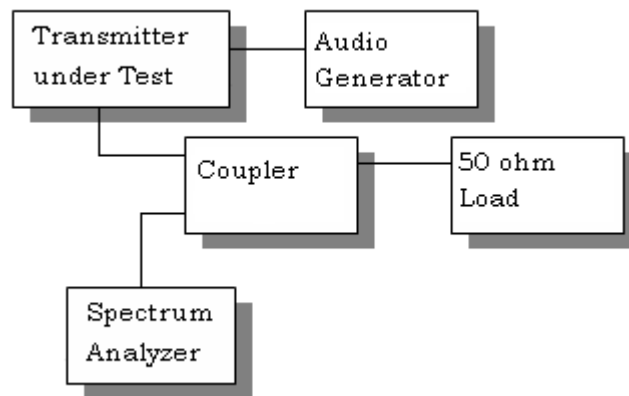


Test Data: See the plots below

Analog: 406.1 – 430 MHz

NOTES:

VERTEX STANDARD USA, INC. - HANDHELD TRANSCEIVER
OCCUPIED BANDWIDTH PLOT - NARROW BAND

FCC 90.210 Mask D

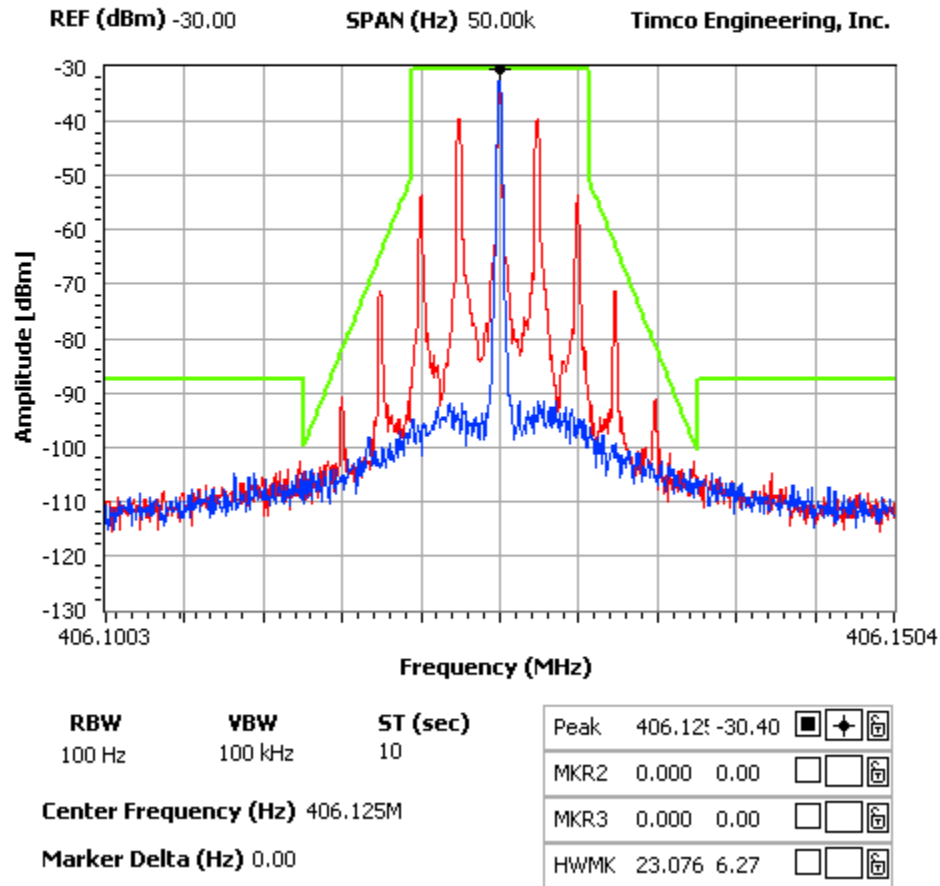


Applicant: VERTEX STANDARD USA, INC.
FCC ID: AXI11134620
Report: V\VERTEX STANDARD USA\7AUT13\7AUT13TestReport.doc

NOTES:

VERTEX STANDARD USA, INC. - HANDHELD TRANSCEIVER
OCCUPIED BANDWIDTH PLOT - NARROW BAND

FCC 90.210 Mask D

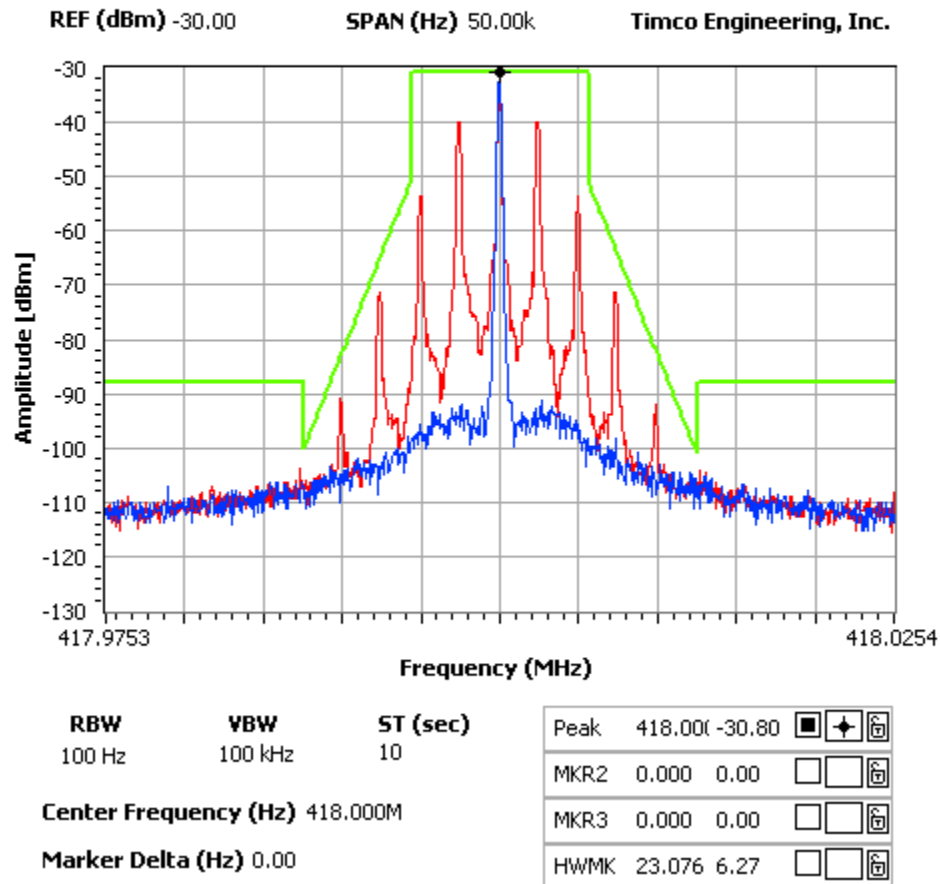


Applicant: VERTEX STANDARD USA, INC.
FCC ID: AXI11134620
Report: V\VERTEX STANDARD USA\7AUT13\7AUT13TestReport.doc

NOTES:

VERTEX STANDARD USA, INC. - HANDHELD TRANSCEIVER
OCCUPIED BANDWIDTH PLOT - NARROW BAND

FCC 90.210 Mask D

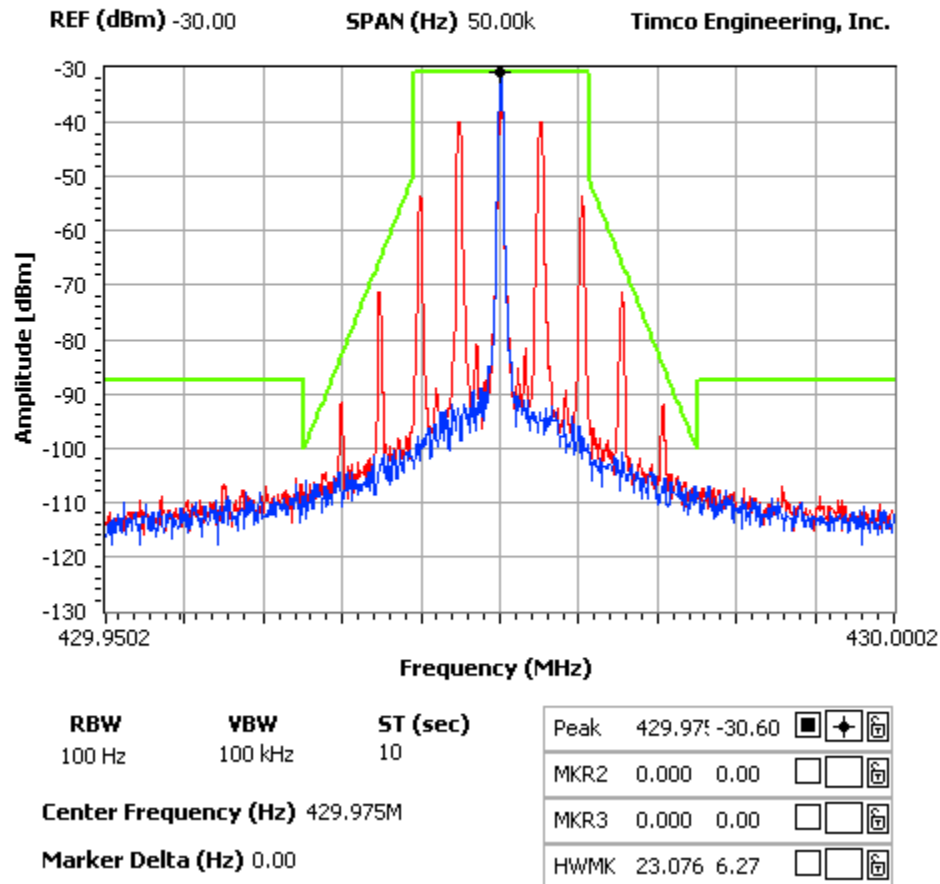


Applicant: VERTEX STANDARD USA, INC.
FCC ID: AXI11134620
Report: V\VERTEX STANDARD USA\7AUT13\7AUT13TestReport.doc

Digital: 406.1 – 430 MHz

NOTES:

VERTEX STANDARD USA, INC. - HANDHELD TRANSCEIVER
OCCUPIED BANDWIDTH PLOT - NARROW BAND (DIGITAL)

FCC 90.210 Mask D

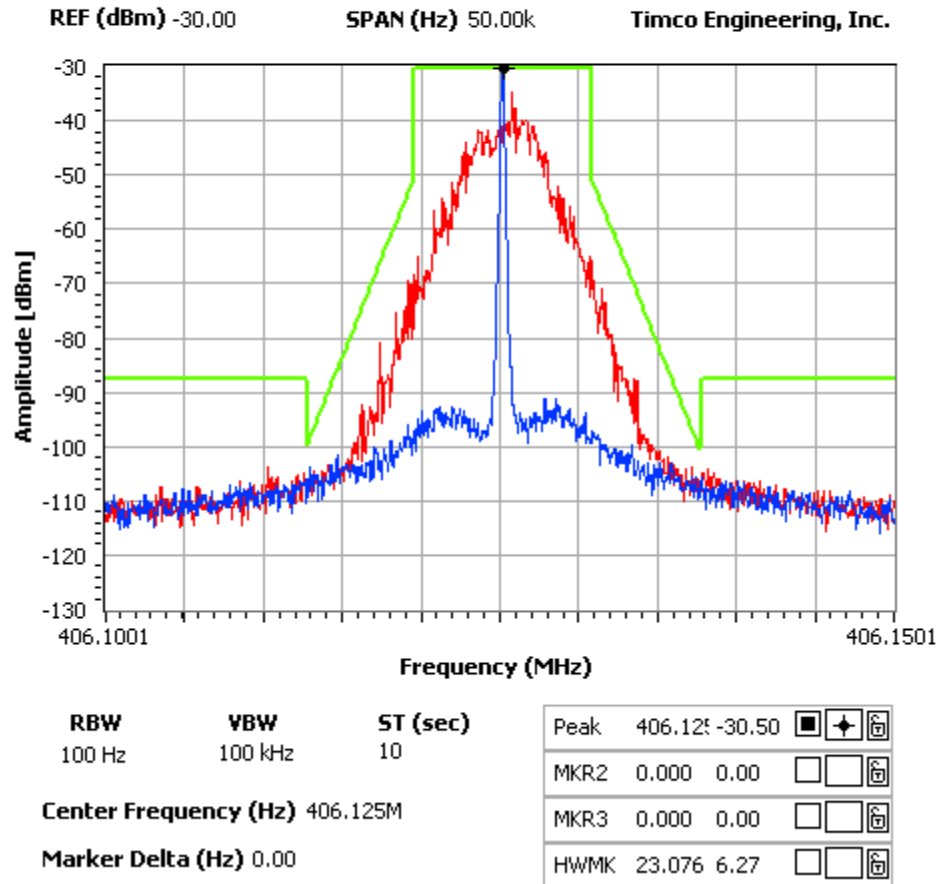


Applicant: VERTEX STANDARD USA, INC.
FCC ID: AXI11134620
Report: V\VERTEX STANDARD USA\7AUT13\7AUT13TestReport.doc

NOTES:

VERTEX STANDARD USA, INC. - HANDHELD TRANSCEIVER
OCCUPIED BANDWIDTH PLOT - NARROW BAND (DIGITAL)

FCC 90.210 Mask D

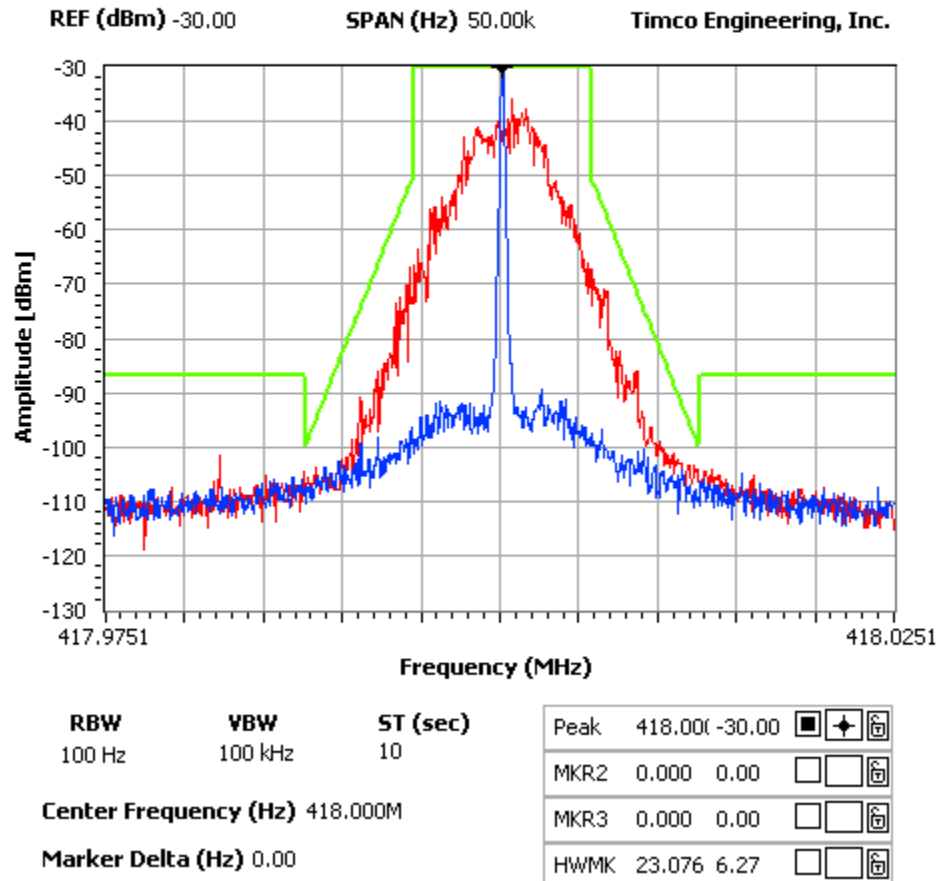


Applicant: VERTEX STANDARD USA, INC.
FCC ID: AXI11134620
Report: V\VERTEX STANDARD USA\7AUT13\7AUT13TestReport.doc

NOTES:

VERTEX STANDARD USA, INC. - HANDHELD TRANSCEIVER
OCCUPIED BANDWIDTH PLOT - NARROW BAND (DIGITAL)

FCC 90.210 Mask D

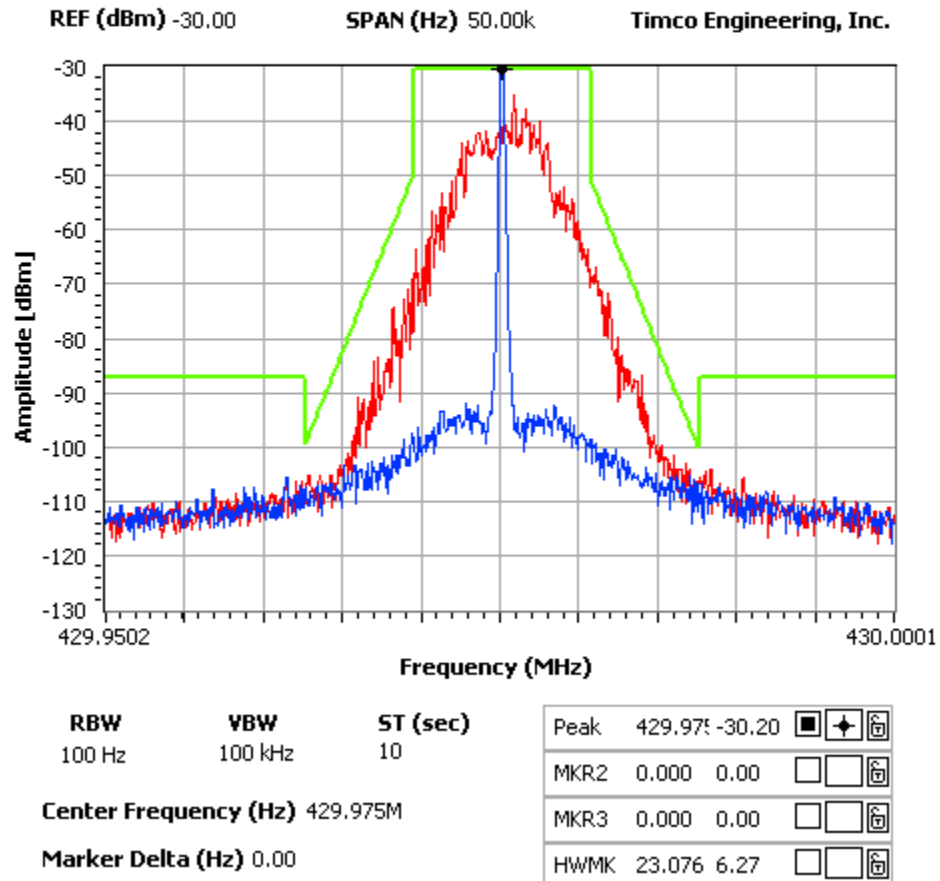


Analog: 450 – 470 MHz

NOTES:

VERTEX STANDARD USA, INC. - HANDHELD TRANSCEIVER
OCCUPIED BANDWIDTH PLOT - NARROW BAND

FCC 90.210 Mask D

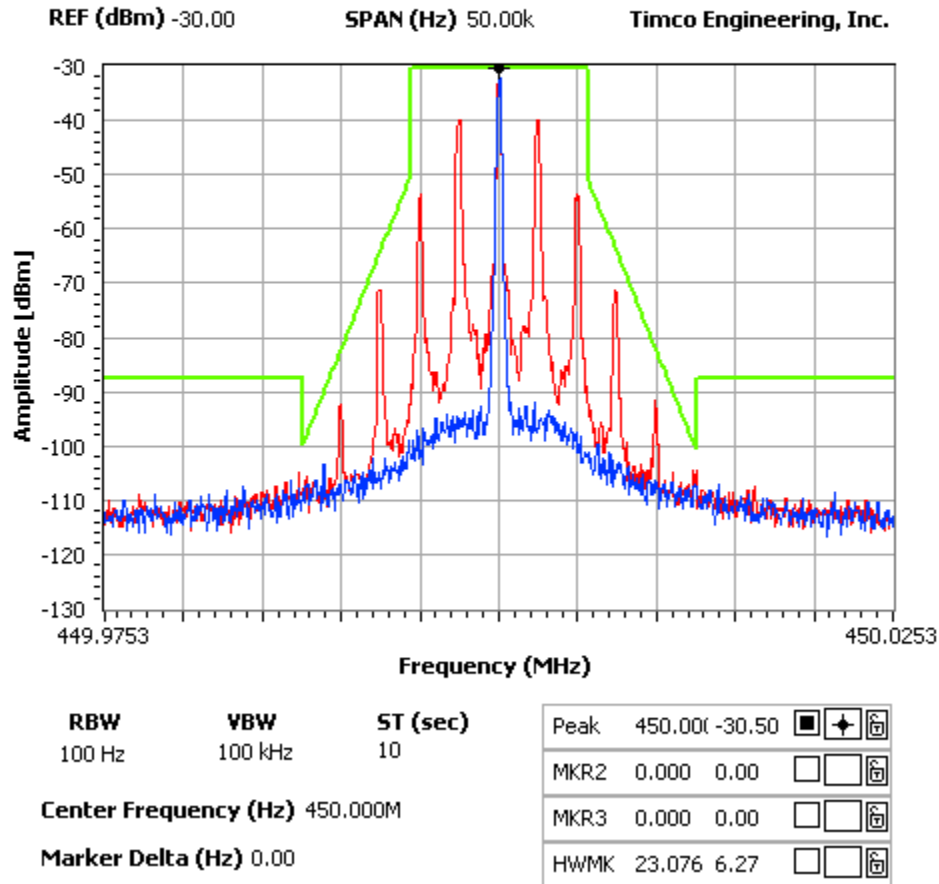


Applicant: VERTEX STANDARD USA, INC.
FCC ID: AXI11134620
Report: V\VERTEX STANDARD USA\7AUT13\7AUT13TestReport.doc

NOTES:

VERTEX STANDARD USA, INC. - HANDHELD TRANSCEIVER
OCCUPIED BANDWIDTH PLOT - NARROW BAND

FCC 90.210 Mask D

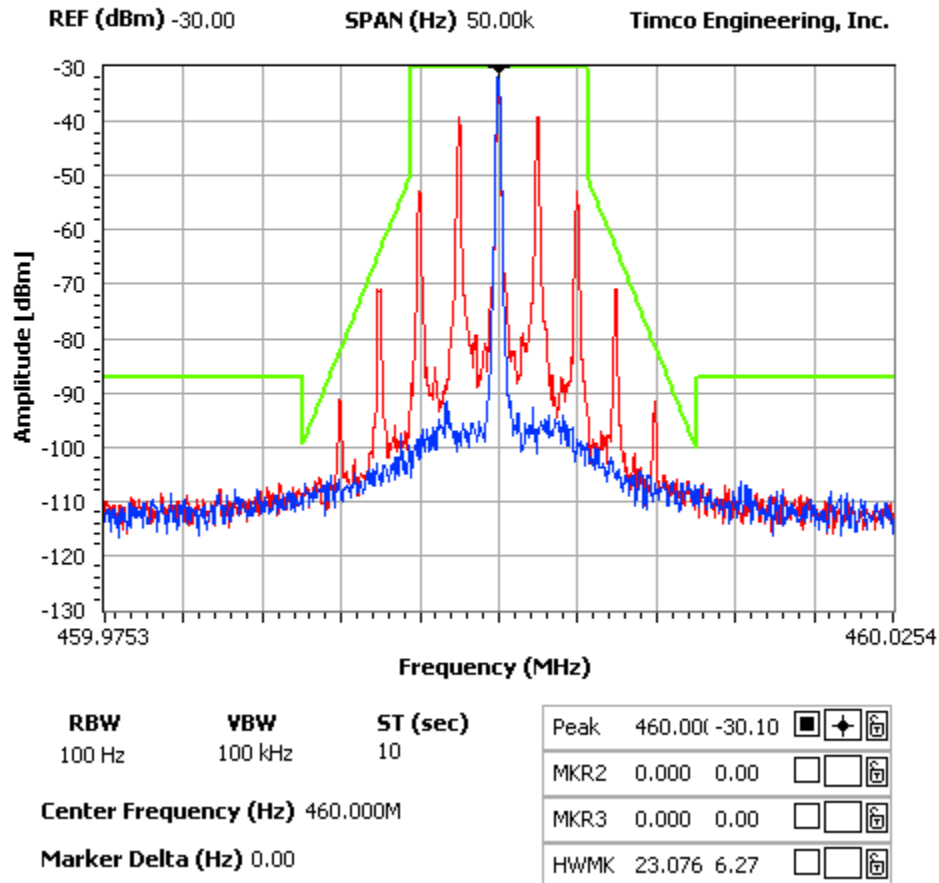


Applicant: VERTEX STANDARD USA, INC.
FCC ID: AXI11134620
Report: V\VERTEX STANDARD USA\7AUT13\7AUT13TestReport.doc

NOTES:

VERTEX STANDARD USA, INC. - HANDHELD TRANSCEIVER
OCCUPIED BANDWIDTH PLOT - NARROW BAND

FCC 90.210 Mask D

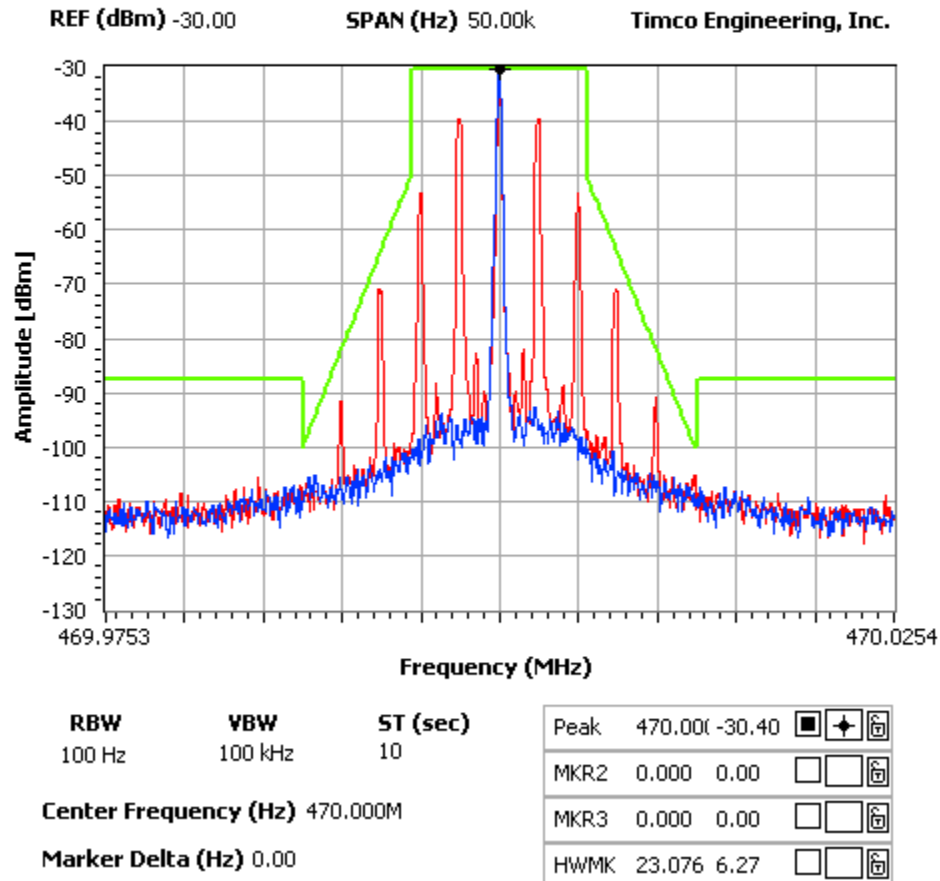


Applicant: VERTEX STANDARD USA, INC.
FCC ID: AXI11134620
Report: V\VERTEX STANDARD USA\7AUT13\7AUT13TestReport.doc

Digital: 450 – 470 MHz

NOTES:

VERTEX STANDARD USA, INC. - HANDHELD TRANSCEIVER
OCCUPIED BANDWIDTH PLOT - NARROW BAND (DIGITAL)

FCC 90.210 Mask D

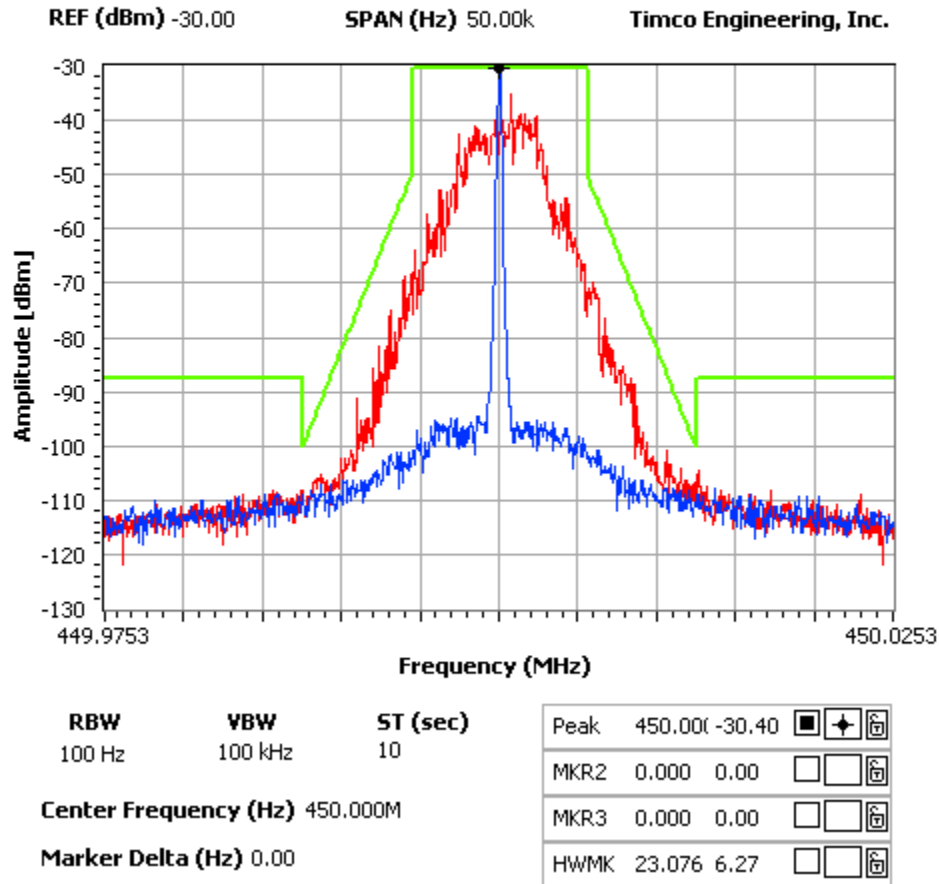


Applicant: VERTEX STANDARD USA, INC.
FCC ID: AXI11134620
Report: V\VERTEX STANDARD USA\7AUT13\7AUT13TestReport.doc

NOTES:

VERTEX STANDARD USA, INC. - HANDHELD TRANSCEIVER
OCCUPIED BANDWIDTH PLOT - NARROW BAND (DIGITAL)

FCC 90.210 Mask D

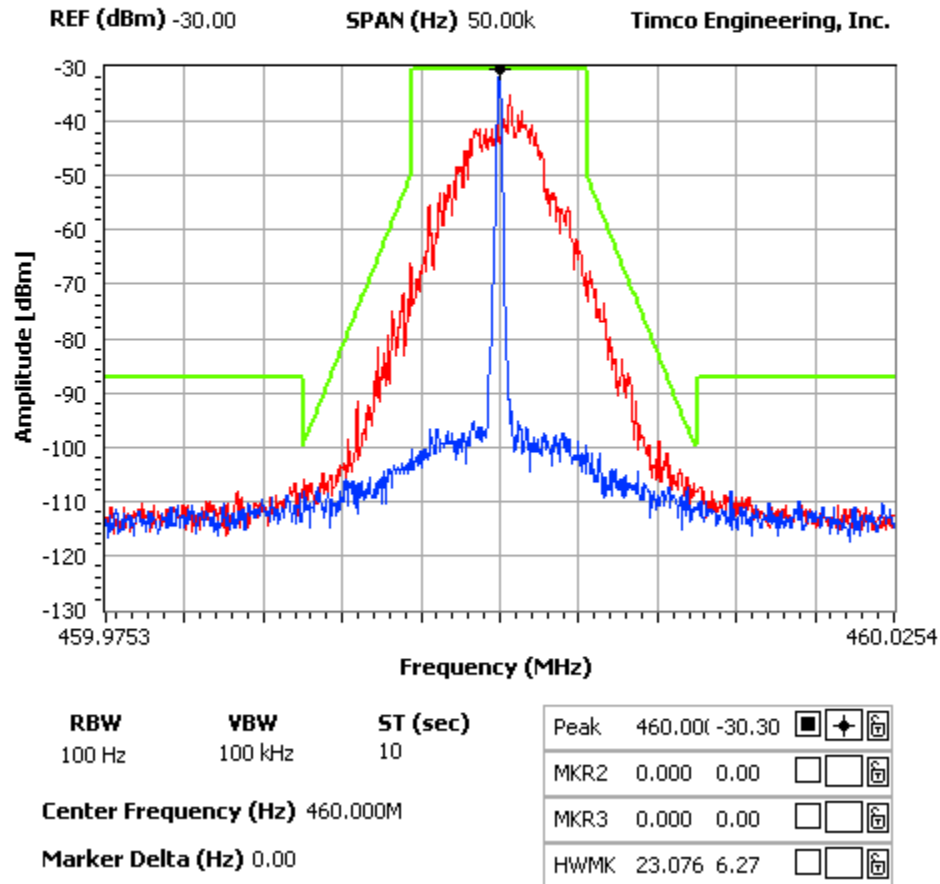


Applicant: VERTEX STANDARD USA, INC.
FCC ID: AXI11134620
Report: V\VERTEX STANDARD USA\7AUT13\7AUT13TestReport.doc

NOTES:

VERTEX STANDARD USA, INC. - HANDHELD TRANSCEIVER
OCCUPIED BANDWIDTH PLOT - NARROW BAND (DIGITAL)

FCC 90.210 Mask D

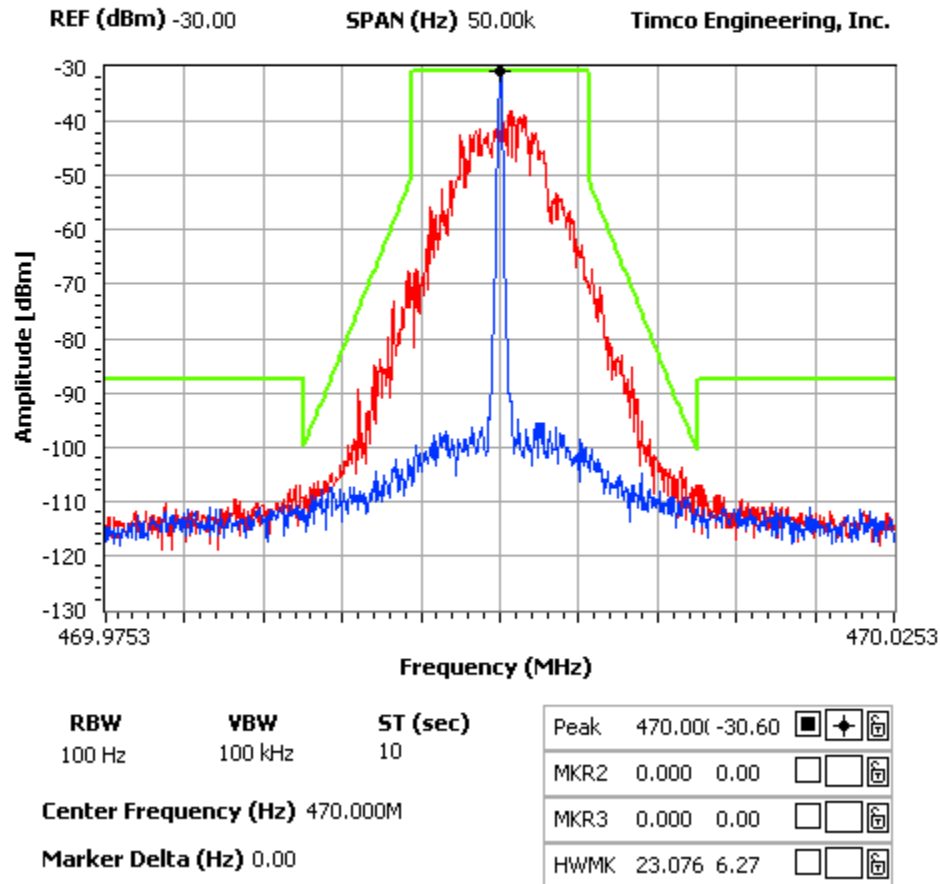

Applicant: VERTEX STANDARD USA, INC.
FCC ID: AXI11134620
Report: V\VERTEX STANDARD USA\7AUT13\7AUT13TestReport.doc

SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)

Rule Part No.: FCC Part 2.1051(a)

Requirements: 12.5 kHz Channel Spacing = 57 dBc (for 5 Watts)

Method of Measurement: The carrier was modulated 100% using a 2500 Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard ANSI/TIA 603-C: 2004.

FCC Limit for:

12.5 kHz Spacing = 57

6.25 kHz Channel Spacing = N/A

Test Data: 406.1-430.0 MHz

TF HIGH POWER	EF	dB below carrier		TF LOW POWER	EF	dB below carrier
406.13	812.25	78.1		406.13	812.25	70.3
	1218.38	70.7			1218.38	79.5
	1624.50	93.1			1624.50	83.3
	2030.63	76.5			2030.63	86.2
	2436.75	90.2			2436.75	86
	2842.88	85			2842.88	85.6
	3249.00	93.2			3249.00	91.9
	3655.13	91.7			3655.13	91.5
	4061.25	93.6			4061.25	89.2

TF HIGH POWER	EF	dB below carrier		TF LOW POWER	EF	dB below carrier
418.00	836.00	81.3		418.00	836.00	69.1
	1254.00	72.5			1254.00	79.9
	1672.00	89.9			1672.00	82.2
	2090.00	78			2090.00	89
	2508.00	88.4			2508.00	86.9
	2926.00	88			2926.00	87.1
	3344.00	95.3			3344.00	93.5
	3762.00	90.9			3762.00	90.7
	4180.00	92.8			4180.00	92.1

Applicant: VERTEX STANDARD USA, INC.
 FCC ID: AXI11134620
 Report: V\VERTEX STANDARD USA\7AUT13\7AUT13TestReport.doc

TF HIGH POWER	EF	dB below carrier		TF LOW POWER	EF	dB below carrier
429.98	859.95	81.8		429.98	859.95	69.5
	1289.93	69.9			1289.93	78.6
	1719.90	91.9			1719.90	82.1
	2149.88	79.9			2149.88	89.3
	2579.85	89.2			2579.85	90.2
	3009.83	85.2			3009.83	87.4
	3439.80	93.4			3439.80	88.7
	3869.78	90.4			3869.78	89.8
	4299.75	90.5			4299.75	90.1


Test Data: 450.0-470.0 MHz

TF HIGH POWER	EF	dB below carrier		TF LOW POWER	EF	dB below carrier
450.00	900.00	79.9		450.00	900.00	67.5
	1350.00	69.6			1350.00	79.9
	1800.00	87.5			1800.00	83.2
	2250.00	77.1			2250.00	87.2
	2700.00	91.6			2700.00	88
	3150.00	84.4			3150.00	89.9
	3600.00	93.3			3600.00	92.3
	4050.00	89.5			4050.00	89.2
	4500.00	87.8			4500.00	87

TF HIGH POWER	EF	dB below carrier		TF LOW POWER	EF	dB below carrier
460.00	920.00	78.8		460.00	920.00	67.7
	1380.00	68.2			1380.00	80.7
	1840.00	85.5			1840.00	81.9
	2300.00	77.2			2300.00	89.7
	2760.00	90.9			2760.00	86.3
	3220.00	85.8			3220.00	89.2
	3680.00	93.2			3680.00	89.2
	4140.00	90.7			4140.00	88
	4600.00	86			4600.00	88.3

TF HIGH POWER	EF	dB below carrier		TF LOW POWER	EF	dB below carrier
470.00	940.00	77.8		470.00	940.00	68.3
	1410.00	67.5			1410.00	77.5
	1880.00	85.5			1880.00	81.7
	2350.00	78.9			2350.00	86.5
	2820.00	91.5			2820.00	87.3
	3290.00	85.7			3290.00	88.2
	3760.00	91.9			3760.00	89.5
	4230.00	88.3			4230.00	86.9
	4700.00	84.6			4700.00	88

Method of Measuring Conducted Spurious Emissions

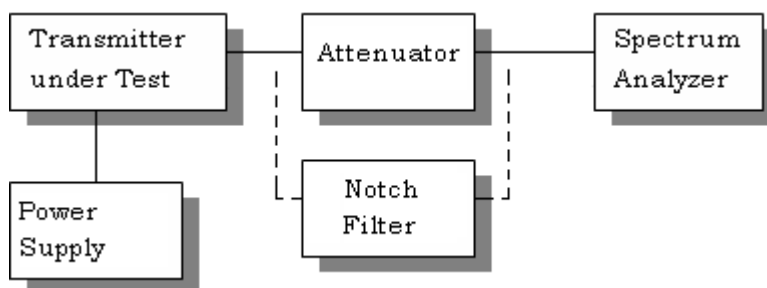

METHOD OF MEASUREMENT: The procedure used was ANSI/TIA 603-C:2004. The measurements were made at TIMCO ENGINEERING INC. 849 N.W. State Road 45, Newberry, Florida 32669.


FIELD STRENGTH OF SPURIOUS EMISSIONS

Rule Parts. No.: FCC Part 2.1053

Requirements: The FCC limits for radiated emissions are the same as previously stated for the conducted emissions.

METHOD OF MEASUREMENT: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-C:2004 using the substitution method. Measurements were made at the test site of TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669.

Test Setup Diagram:

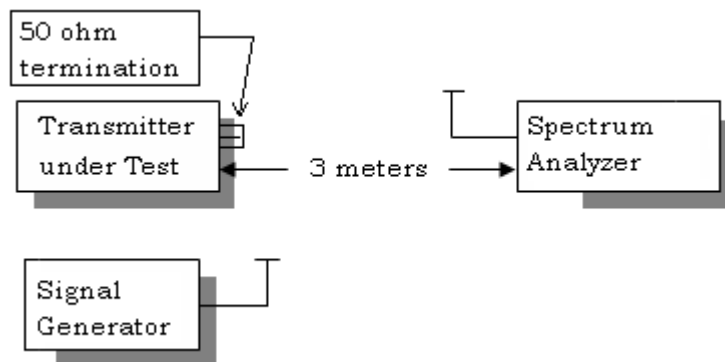

Test Data: 406.1 – 430.0 MHz

HIGH POWER

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
406.13	0	0
812.25	V	66.9
1218.38	V	81.2
1624.50	H	84.8
2030.63	V	79.7
2436.75	H	84.9
2842.88	H	84.5
3249.00	V	86.9
3655.13	H	90.8
4061.25	H	89.9

LOW POWER

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
406.13	0	0
812.25	V	57.4
1218.38	H	73.4
1624.50	H	70.4
2030.63	H	78.9
2436.75	H	76.3
2842.88	H	77.2
3249.00	V	79.3
3655.13	H	78.3
4061.25	H	77.6

HIGH POWER

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
418.00	0	0
836.00	V	68.8
1254.00	V	83.4
1672.00	V	84.4
2090.00	V	81.7
2508.00	H	84.0
2926.00	V	84.3
3344.00	V	91.2
3762.00	V	88.2
4180.00	V	91.8

LOW POWER

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
418.00	0	0
836.00	V	58.2
1254.00	H	77.1
1672.00	H	66.1
2090.00	H	79.3
2508.00	H	77.3
2926.00	V	76.7
3344.00	H	81.0
3762.00	H	77.0
4180.00	H	78.4

HIGH POWER

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
429.98	0	0
859.95	V	71.6
1289.93	H	86.0
1719.90	V	80.5
2149.88	V	75.2
2579.85	H	76.0
3009.83	V	86.9
3439.80	H	92.6
3869.78	H	87.8
4299.75	H	89.1

LOW POWER

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
429.98	0	0
859.95	V	59.4
1289.93	H	76.0
1719.90	H	65.4
2149.88	V	74.1
2579.85	H	75.2
3009.83	V	74.8
3439.80	H	81.7
3869.78	H	75.6
4299.75	H	77.2

Test Data: 450.0 – 470.0 MHz

HIGH POWER

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
450.00	0	0
900.00	H	75.0
1350.00	H	80.4
1800.00	V	69.9
2250.00	V	72.1
2700.00	H	82.9
3150.00	V	86.7
3600.00	V	91.5
4050.00	H	87.7
4500.00	V	90.4

LOW POWER

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
450.00	0	0
900.00	H	65.3
1350.00	H	68.5
1800.00	H	62.5
2250.00	V	69.4
2700.00	H	70.4
3150.00	H	76.7
3600.00	V	78.4
4050.00	H	75.8
4500.00	V	77.0

HIGH POWER

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
460.00	0	0
920.00	H	72.8
1380.00	H	84.1
1840.00	V	72.5
2300.00	V	82.6
2760.00	H	83.6
3220.00	V	85.4
3680.00	H	92.1
4140.00	H	89.3
4600.00	H	88.4

LOW POWER

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
460.00	0	0
920.00	H	64.7
1380.00	V	69.6
1840.00	H	66.7
2300.00	V	77.8
2760.00	H	76.0
3220.00	V	77.9
3680.00	H	80.1
4140.00	H	77.3
4600.00	H	77.5

HIGH POWER

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
470.00	0	0
940.00	H	72.1
1410.00	H	80.7
1880.00	V	70.4
2350.00	V	83.1
2820.00	V	84.4
3290.00	V	85.8
3760.00	V	88.0
4230.00	H	89.6
4700.00	H	90.3

LOW POWER

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
470.00	0	0
940.00	H	68.9
1410.00	V	68.8
1880.00	H	65.6
2350.00	H	79.2
2820.00	V	75.4
3290.00	V	76.8
3760.00	H	76.5
4230.00	H	78.5
4700.00	V	78.9

FREQUENCY STABILITY

Rule Parts. No.: FCC Part 2.1055, Part 90.213

Requirements: Temperature range requirements: -30 to +50° C.
Voltage Variation +, -15%
±1.5 PPM

Method of Measurements: ANSI/TIA 603-C:2004

Test Data:

Assigned Frequency (Ref. Frequency) (MHz)		429.975114
Temperature (°C)	Frequency (MHz)	Frequency Stability (PPM)
-30	429.974945	-0.39
-20	429.975032	-0.19
-10	429.975162	0.11
0	429.975152	0.09
+10	429.975116	0.00
+20	429.975109	-0.01
+30	429.975109	-0.01
+40	429.975074	-0.09
+50	429.974991	-0.29

Assigned Frequency (Ref. Frequency) (MHz)		
% Battery (%)	Frequency (MHz)	Frequency Stability (PPM)
-15%	429.975108	-0.01
	429.975114	0.00
+15%	429.975117	0.01

TRANSIENT FREQUENCY BEHAVIOR

FCC Part 2.1055(a)(1)

FCC Part 90.214

REQUIREMENTS: Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time Intervals	Maximum frequency difference	All Equipment	
		150-174 MHz	421-512 MHz

Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels

t_1^4	± 25.0 kHz	5.0 ms	10.0 ms
t_2	± 12.5 kHz	20.0 ms	25.0 ms
t_3^4	± 25.0 kHz	5.0 ms	10.0 ms



Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels

t_1^4	± 12.5 kHz	5.0 ms	10.0 ms
t_2	± 6.25 kHz	20.0 ms	25.0 ms
t_3^4	± 12.5 kHz	5.0 ms	10.0 ms

Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels

t_1^4	± 6.25 kHz	5.0 ms	10.0 ms
t_2	± 3.125 kHz	20.0 ms	25.0 ms
t_3^4	± 6.25 kHz	5.0 ms	10.0 ms


Test Data:

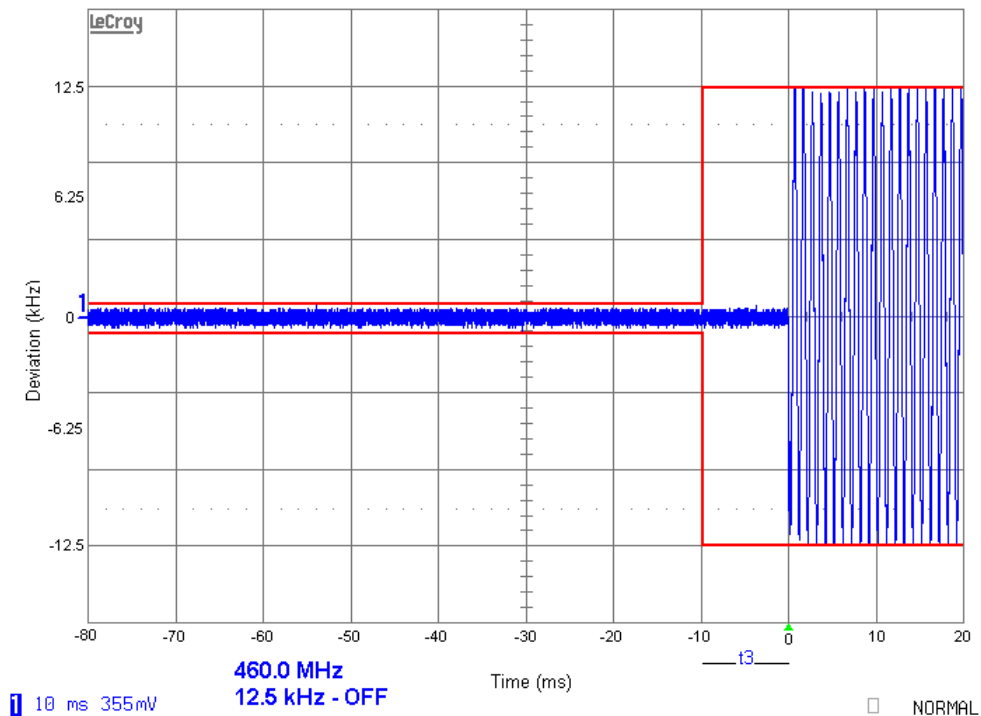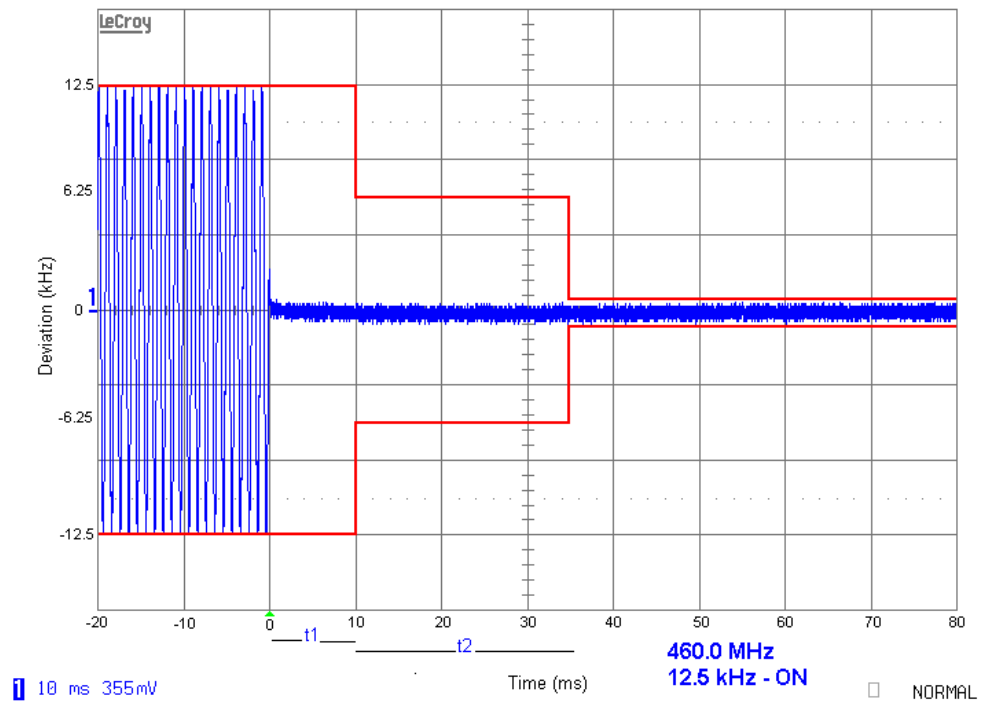

Applicant: VERTEX STANDARD USA, INC.
FCC ID: AXI11134620
Report: V\VERTEX STANDARD USA\7AUT13\7AUT13TestReport.doc

TEST PROCEDURE: ANSI/TIA 603-C: 2004 PARA 2.2.19

1. Using the variable attenuator the transmitter level was set to 40 dB below the test receivers maximum input level, then the transmitter was turned off.
2. With the transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30 dB. With the levels set as above the transient frequency behavior was observed & recorded.

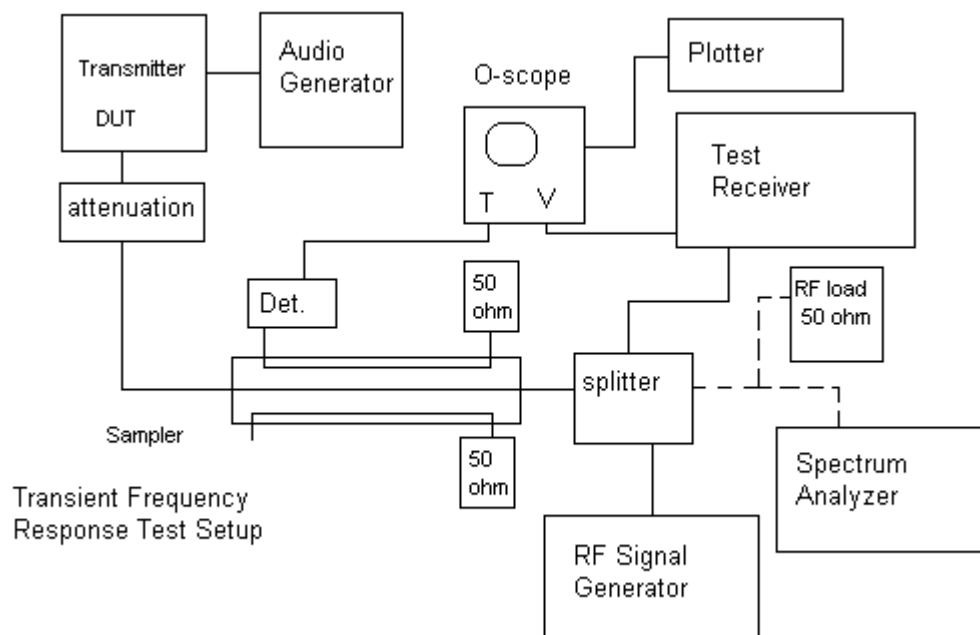

EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	10/28/11	10/28/13
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	10/28/11	10/28/13
Antenna: Biconnical	Electro-Metrics	BIA-25	1171	06/13/12	06/13/14
Antenna: Biconnical	Eaton	94455-1	1096	05/04/11	05/04/13
Antenna: Log-Periodic	Electro-Metrics	LPA-25	1122	05/04/11	05/04/13
Frequency Counter	HP	5352B	2632A00165	06/22/11	06/22/13
Frequency Counter	HP	5385A	2730A03025	08/17/11	08/17/13
Signal Generator	HP	8640B	2308A21464	02/23/12	02/23/14
Hygro-Thermometer	Extech	445703	0602	06/15/11	06/15/13
Digital Multimeter	Fluke	77	35053830	09/09/11	09/09/13
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	10/28/11	10/28/13
Antenna: Passive Loop	EMC Test Systems	EMCO 6512	9706-1211	06/14/12	06/14/14
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	10/28/11	10/28/13
Temperature Chamber	Tenney Engineering	TTRC	11717-7	07/03/12	07/03/14
Frequency Counter	HP	5385A	3242A07460	06/22/11	06/22/13
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	12/31/11	12/31/13