

																											
MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia Sdn Bhd, Innoplex Plot 2A, Medan Bayan Lepas, Mukim 12 S.W.D, 11900 Bayan Lepas, Penang, Malaysia.	FCC/ IC TEST REPORT Report Revision : Rev.D																										
<table><tr><td>Date/s Tested</td><td>: 22-AUG-2016 - 11-SEP-2016</td></tr><tr><td>Report Issue Date</td><td>: 13-JAN-2017</td></tr><tr><td>Manufacturer/Location</td><td>: Motorola Solutions Malaysia Sdn Bhd</td></tr><tr><td>Requestor</td><td>: AARON ISAACS</td></tr><tr><td>Product Type</td><td>: Portable</td></tr><tr><td>Model Number</td><td>: H51SDH9PW7AN</td></tr><tr><td>Frequency Band</td><td>: 450 - 520 MHz</td></tr><tr><td>Low / Max RF Output Power</td><td>: 1 Watt / 5.6 Watts</td></tr><tr><td>Applicant Name</td><td>: Motorola Solutions Malaysia Sdn Bhd</td></tr><tr><td>Applicant Address</td><td>: Innoplex Plot 2A, Medan Bayan Lepas, Mukim 12 S.W.D, 11900 Bayan Lepas, Penang, Malaysia.</td></tr><tr><td>FCC Registrations</td><td>: 772092</td></tr><tr><td>IC Registrations</td><td>: 109AK</td></tr></table> The equipment was tested accordance to the requirement listed below: <table><tr><td>(LMR) FCC 47 CFR Part 22 /74/80</td><td>PASS</td></tr></table> 		Date/s Tested	: 22-AUG-2016 - 11-SEP-2016	Report Issue Date	: 13-JAN-2017	Manufacturer/Location	: Motorola Solutions Malaysia Sdn Bhd	Requestor	: AARON ISAACS	Product Type	: Portable	Model Number	: H51SDH9PW7AN	Frequency Band	: 450 - 520 MHz	Low / Max RF Output Power	: 1 Watt / 5.6 Watts	Applicant Name	: Motorola Solutions Malaysia Sdn Bhd	Applicant Address	: Innoplex Plot 2A, Medan Bayan Lepas, Mukim 12 S.W.D, 11900 Bayan Lepas, Penang, Malaysia.	FCC Registrations	: 772092	IC Registrations	: 109AK	(LMR) FCC 47 CFR Part 22 /74/80	PASS
Date/s Tested	: 22-AUG-2016 - 11-SEP-2016																										
Report Issue Date	: 13-JAN-2017																										
Manufacturer/Location	: Motorola Solutions Malaysia Sdn Bhd																										
Requestor	: AARON ISAACS																										
Product Type	: Portable																										
Model Number	: H51SDH9PW7AN																										
Frequency Band	: 450 - 520 MHz																										
Low / Max RF Output Power	: 1 Watt / 5.6 Watts																										
Applicant Name	: Motorola Solutions Malaysia Sdn Bhd																										
Applicant Address	: Innoplex Plot 2A, Medan Bayan Lepas, Mukim 12 S.W.D, 11900 Bayan Lepas, Penang, Malaysia.																										
FCC Registrations	: 772092																										
IC Registrations	: 109AK																										
(LMR) FCC 47 CFR Part 22 /74/80	PASS																										
This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.																											
Prepared By: _____ Tan Chee Eu Test Personnel	Approved By: _____ Goh Aik Hong Responsible Engineer																										

Table of Contents

Report Revision History	3
1.0. General Information	4
2.0. Summary of Test Results	5
3.0. Measurement Uncertainty	5
4.0. Equipment List	6
5.0. Test Condition	8
5.1. Transmitter Test Conditions	8
6.0. Transmitter Test Parameters	9
6.1. RF Output Power	9
6.1.1. Test Setup	9
6.1.2. Test Result	9
6.2. Frequency Stability	10
6.2.1. Test Setup	10
6.2.2. Test Result	11
6.2.3. Test Limit	12
6.3. Audio Frequency Response	13
6.3.1. Test Setup	13
6.3.2. Test Result	13
6.3.3. Test Limit	13
6.4. Audio Low Pass Filter Response	14
6.4.1. Test Setup	14
6.4.2. Test Result	14
6.4.3. Test Limit	15
6.5. Modulation Limiting	16
6.5.1. Test Setup	16
6.5.2. Test Result	16
6.5.3. Test Limit	16
6.6. Occupied Bandwidth	17
6.6.1. Test Setup (Analog)	17
6.6.2. Test Result (Analog)	18
6.6.3. Test Result (Digital)	21
6.6.4. Test Result (Digital)	22
6.6.5. Test Limit	23
6.7. Band Edge Conducted Spurious Emission (Part 22)	24
6.7.1. Test Setup (Analog)	24
6.7.2. Test Result (Analog)	25
6.7.3. Test Setup (Digital)	26
6.7.4. Test Result (Digital)	27
6.7.5. Test Limit	27
6.8. Transient Frequency Behavior	28
6.8.1. Test Setup	28
6.8.2. Test Result	28
6.8.3. Test Limit	29

6.9. Adjacent Channel Power.....	30
6.9.1. Test Setup (Analog).....	30
6.9.2. Test Result (Analog).....	30
6.9.3. Test Setup (Digital).....	31
6.9.4. Test Result (Digital)	31
6.9.5. Test limit.....	32
6.10. Conducted Spurious Emission	34
6.10.1. Test Setup	34
6.10.2. Test Result (Analog).....	34
6.10.3. Test Result (Digital)	34
6.10.4. Test Limit.....	34
6.11. Radiated Spurious Emission	35
6.11.1. Test Setup	35
6.11.2. Test Result (Analog).....	36
6.11.3. Test Result (Digital)	46
6.11.4. Test Limit.....	60
6.12. Effective Radiated Power (ERP) / GNSS (EIRP for 1559 - 1610MHz).....	61
6.12.1. Test Setup	61
6.12.2. Test Result	61
6.12.3. Test Limit.....	61
6.13. AC Power Line Conducted Spur Emissions	62
6.13.1. Test Setup	62
6.13.2. Test Results.....	62
6.13.3. Test Limits	63

Report Revision History

Revision History	Description	Date	Originator
Rev. A	Initial report	13-Oct-2016	Tan Chee Eu
Rev. B	Updated on the emission mask measurement.	14-Dec-2016	Tan Chee Eu
Rev. C	Updated on band edge emission measurement.	13-Jan-2017	Tan Chee Eu
Rev. D	Conducted Emission for both FCC and ISSED shall reference to ANSI C63.26: 2015. Data is removed as justified by TCB(ACS)	16-Jan-2017	Tan Chee Eu

1.0. General Information

EUT Description:

Technologies	Land Mobile Radio (LMR)
Modulation Type	Analog, C4FM, Phase II

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

ANSI/TIA/-603-D
ANSI C63.4.2014
TIA-102 CCAA-A
TIA-102 CAAB-D
TIA-102 CAAA-D
ANSI C63.26-2015

2.0. Summary of Test Results

FCC General Rules Part (47CFR)	IC General Rules Part	Test Item	Result
2.1046, 22.565(f), 74.461, 80.215	-	RF Power Output	Pass
2.1055, 22.355, 74.464, 80.209(a)(5)	-	Frequency Stability	Pass
-	-	Audio Frequency Response	NA
-	-	Audio Low Pass Filter Response	NA
-	-	Modulation limiting	NA
2.1049, 22.359, 74.462(b), 80.211(c), (f)	-	Occupied Bandwidth	Pass
22.359(a),(b)	-	Band Edge Conducted Spurious Emission	Pass
-	-	Transient Frequency Behavior	NA
-	-	Adjacent Channel Power	NA
-	-	Conducted Spurious Emissions	NA
2.1053, 22.359, 74.462(c), 80.211(c)	-	Radiated Spurious Emission	Pass
-	-	GNSS (EIRP for 1559 – 1610MHz)	NA
-	-	Effective Radiated Power (ERP)	NA
-	-	AC Power Line Conducted Spurious Emission	NA

NA → Not Applicable

3.0. Measurement Uncertainty

Measurement	Frequency	Expanded Uncertainty (k=1.96) (±)
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	5.01
	200MHz ~ 1000MHz	5.01
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.01
	18GHz ~ 25GHz	5.01

4.0. Equipment List

FCC Analog ATE#1:

Description	Model	Serial Number	Calibration Date	Calibration Due Date
AUDIO ANALYZER	8903B	3011A10475	13-Apr-16	13-Apr-17
SIGNAL GENERATOR	2042	203002/745	14-Apr-16	14-Apr-17
MODULATION ANALYZER	8901B	3216A03889	13-Apr-16	13-Apr-17
TRANSCEIVER INTERFACE	8954A	2234A00398	12-Apr-16	12-Apr-17
DYNAMIC SIGNAL ANALYZER	36570A	MY42506781	15-Apr-16	15-Apr-17
SIGNAL GENERATOR	E4425B	US39260201	14-Apr-16	14-Apr-17
SIGNAL GENERATOR	2042	203002/747	14-Apr-16	14-Apr-17
POWER SENSOR	E4412A	MY41502652	21-Apr-16	21-Apr-17
POWER METER	E4416A	GB41293855	22-Apr-16	22-Apr-17
POWER SUPPLY	6031A	3325A02771	19-Apr-16	19-Apr-17
CHAMBER	SHH-641	92014678	6-Apr-16	5-Apr-17
RF TRANSCEIVER CONTROLLER	AZ2007AI	AZ2007AI007	CNR	CNR

FCC TRANSIENT ATE#1:

Description	Model	Serial Number	Calibration Date	Calibration Due Date
Audio Analyzer	8903B	3729A17409	14-Apr-16	14-Apr-17
Audio Analyzer	8903B	3011A08952	13-Apr-16	13-Apr-17
MODULATION ANALYZER	8901B	3019A02766	13-Apr-16	13-Apr-17
POWER METER	E4416A	GB41293866	21-Apr-16	21-Apr-17
POWER SENSOR	E4412A	MY41498918	21-Jun-16	21-Jun-17
PSA	E4440A	MY46185415	22-Apr-16	22-Apr-17
POWER SUPPLY	6032A	2723A02219	19-Apr-16	19-Apr-17
OSCILLOSCOPE	MSO8064A	MY48240107	26-Apr-16	26-Apr-17
SIGNAL GENERATOR	8657A	3323A05725	13-Apr-16	13-Apr-17
ATTENUATOR/11dB	8494G	MY52300223	16-Jun-16	16-Jun-17
ATTENUATOR/110dB	8496G	MY52300176	15-Jun-16	15-Jun-17
SWITCH CONTROL UNIT	3488A	2719A36210	CNR	CNR
ATTENUATOR/SWITCH DRIVER	11713A	2508A10141	CNR	CNR

FCC CONDUCTED SPUR ATE # 1

Description	Model	Serial Number	Calibration Date	Calibration Due Date
PSA	E4440A	US45303111	14-Apr-16	14-Apr-17
MODULATION ANALYZER	8901B	3438A05278	12-Apr-16	12-Apr-17
SIGNAL GENERATOR	E4432B	GB39340588	14-Apr-16	14-Apr-17
POWER SUPPLY	6032A	3319A08920	19-Apr-16	19-Apr-17
SWITCH CONTROL UNIT	3488A	2719A32735	CNR	CNR
INTERFACE BOX - FILTER	CNR	CS001	CNR	CNR

Radiated Emission Station

EMC Chamber 1				
DESCRIPTION	MODEL	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
DRG HORN FREQ.	SAS-571	1143	10-Nov-14	10-Nov-16
DRG HORN FREQ.	SAS-571	719	28-Apr-15	28-Apr-17
BILOG ANTENNA	CBL6112B	2964	23-Jan-15	23-Jan-17
POWER SUPPLY	6674A	3126A00133	12-Nov-15	12-Nov-17
MICROWAVE SIGNAL GENERATOR	SMP04	100131	4-Jul-16	4-Jul-17
TEST RECEIVER	ESIB40	100264	1-Jul-16	1-Jul-17
SIGNAL ANALYZER	FSV40	101103	25-Jun-16	25-Jun-17
5m Semi-anechoic Chamber	S800-HX	J2308	29-Jul-16	29-Jul-17
BILOG ANTENNA	CBL6112D	25516	23-Jan-16	23-Jan-17
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170143	24-Nov-14	24-Nov-16
DATA LOGGER	TM320	12249289	27-Apr-16	27-Apr-17
SYSTEM CONTROLLER	SC104V	050806-1	CNR	CNR
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	CNR	CNR
ANTENNA POSITIONING TOWER	TLT2	NA	CNR	CNR
18 - 40GHz PREAMPLIFIER	BBV9721	9721-007	CNR	CNR
PREAMPLIFIER	PAM-0118	427	CNR	CNR

CNR → Calibration Not Required

5.0. Test Condition

5.1. Transmitter Test Conditions

Test Item, (Channel Spacing)	Temperature (°C)	Voltage Supply (V)	Power (W)	Modulation	Test Frequency (MHz)
RF Output Power	25°C	Nominal	Low / Max	Analog	450.65, 459.125, 467.775, 511.9875
Frequency Stability	-30°C ~ 60°C	80% ~ 120% of Nominal Volt	Max	Analog	467.775
Audio Frequency Response (12.5kHz / 25kHz)	25°C	Nominal	Max	Analog	NA
Audio Low Pass Filter Response (12.5kHz / 25kHz)	25°C	Nominal	Max	Analog	NA
Modulation limiting (12.5kHz / 25kHz)	25°C	Nominal	Max	Analog	NA
Occupied Bandwidth (12.5kHz / 25kHz)	25°C	Nominal	Max	Analog, Digital	450.65, 459.125, 467.775, 511.9875
Band Edge Conducted Spurious Emission (12.5kHz / 20kHz / 25kHz)	25°C	Nominal	Max	Analog, Digital	459.025 459.650
Transient Frequency Behavior (UHF & VHF Band) (12.5kHz / 25kHz)	25°C	Nominal	Max	Analog, APCO Mode	NA
Adjacent Channel Power (700MHz Band) (12.5kHz / 25kHz)	25°C	Nominal	Max	Analog, Digital	NA
Conducted Spurious Emissions (12.5kHz / 25kHz)	25°C	Nominal	Low / Max	Analog, Digital	NA
Radiated Spurious Emission (12.5kHz / 25kHz)	25°C	Nominal	Low / Max	Analog, Digital	450.65, 459.125 467.775, 511.9875
GNSS (700MHz Band) (EIRP for 1559-1610MHz) (12.5kHz / 25kHz)	25°C	Nominal	Max	Analog	NA
Effective Radiated Power (ERP) (700MHz & 900MHz Band) (12.5kHz / 25kHz)	25°C	Nominal	Max	Analog	NA
AC Power Line Conducted Spurious Emissions* (12.5kHz)	25°C	Nominal	Max	Analog	NA


* – ONLY tested if portables can be operated during charging OR mobiles can be used in desktop operation connected to a power supply

NA → Not Applicable

6.0. Transmitter Test Parameters

6.1. RF Output Power

6.1.1. Test Setup

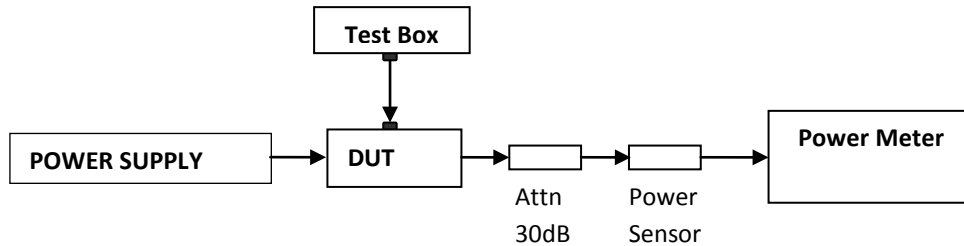


1. The DUT transmitter connected to Power Meter using the 30dB attenuator and power sensor with above setup.
2. Path loss for the measurement included.
3. All the measurement was done at low, mid, high frequency for each band.
4. Record the power into the test report.

6.1.2. Test Result

Temperature	25°C			
Voltage (V)	7.5V			
Frequency (MHz)	Low Power (W)	Current (A)	Max Power (W)	Current (A)
450.65000	0.97	0.95	5.43	1.94
459.12500	0.96	0.96	5.43	1.97
467.77500	0.96	0.98	5.44	2.00
511.98750	0.96	0.97	5.42	1.94

6.2. Frequency Stability

6.2.1. Test Setup

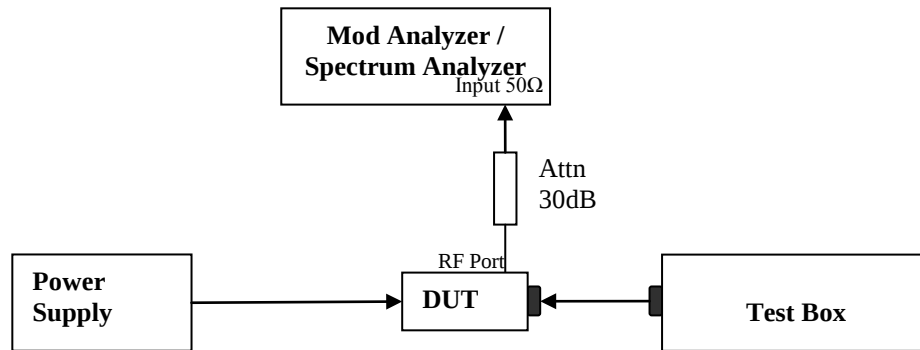


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Transmit the DUT and record the freq in MCF_{MHz} .
- 4) Test in 2 conditions: Different Temperature & Supply Voltage input.
 - Temperature: Vary voltage per test condition in Clause 5.1
 - Supply Voltage: Vary temperature per test condition in Clause 5.1
- 5) Calculate the ppm frequency error by the following:


$$ppm\ error = \left(\frac{MCF_{MHz}}{ACF_{MHz}} - 1 \right) * 10^6$$

Where: MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz

6.2.2. Test Result

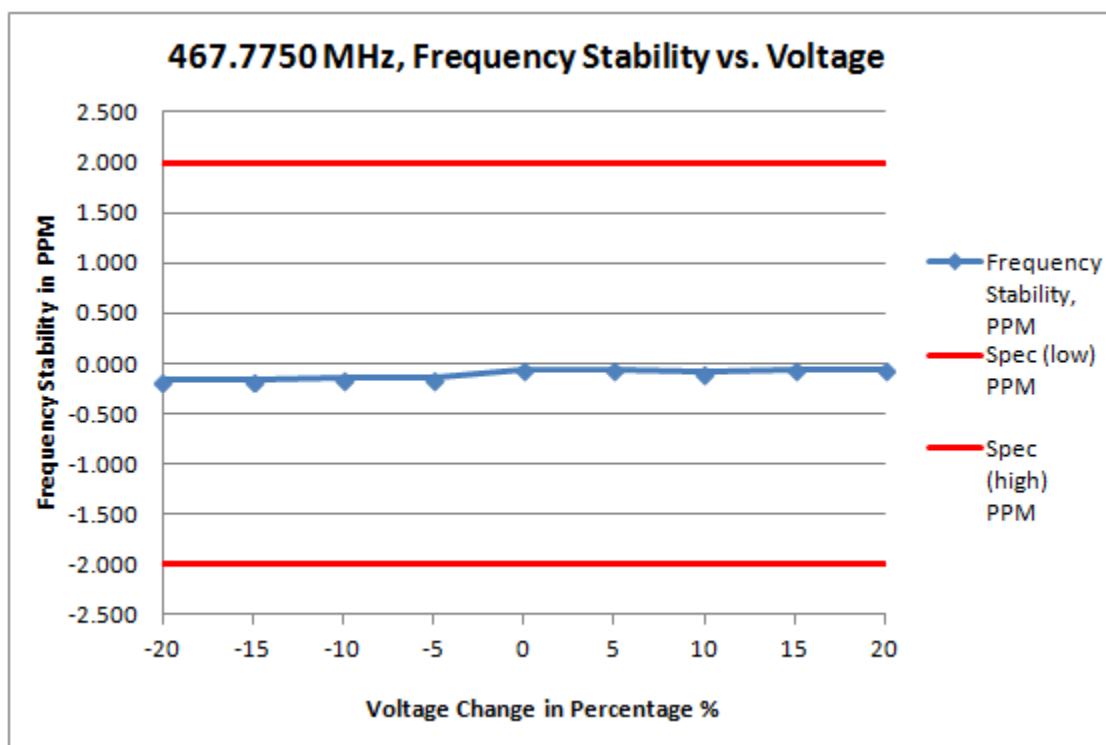

Frequency / Channel Spacing	467.7750 MHz / 12.5 kHz				
Temperature, °C	25				
Voltage %	Voltage, V	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-20	6.000	467.774920	-0.171	-2.000	2.000
-15	6.375	467.774920	-0.171	-2.000	2.000
-10	6.750	467.774930	-0.150	-2.000	2.000
-5	7.125	467.774930	-0.150	-2.000	2.000
0	7.500	467.774970	-0.064	-2.000	2.000
5	7.875	467.774970	-0.064	-2.000	2.000
10	8.250	467.774960	-0.086	-2.000	2.000
15	8.625	467.774970	-0.064	-2.000	2.000
20	9.000	467.774970	-0.064	-2.000	2.000

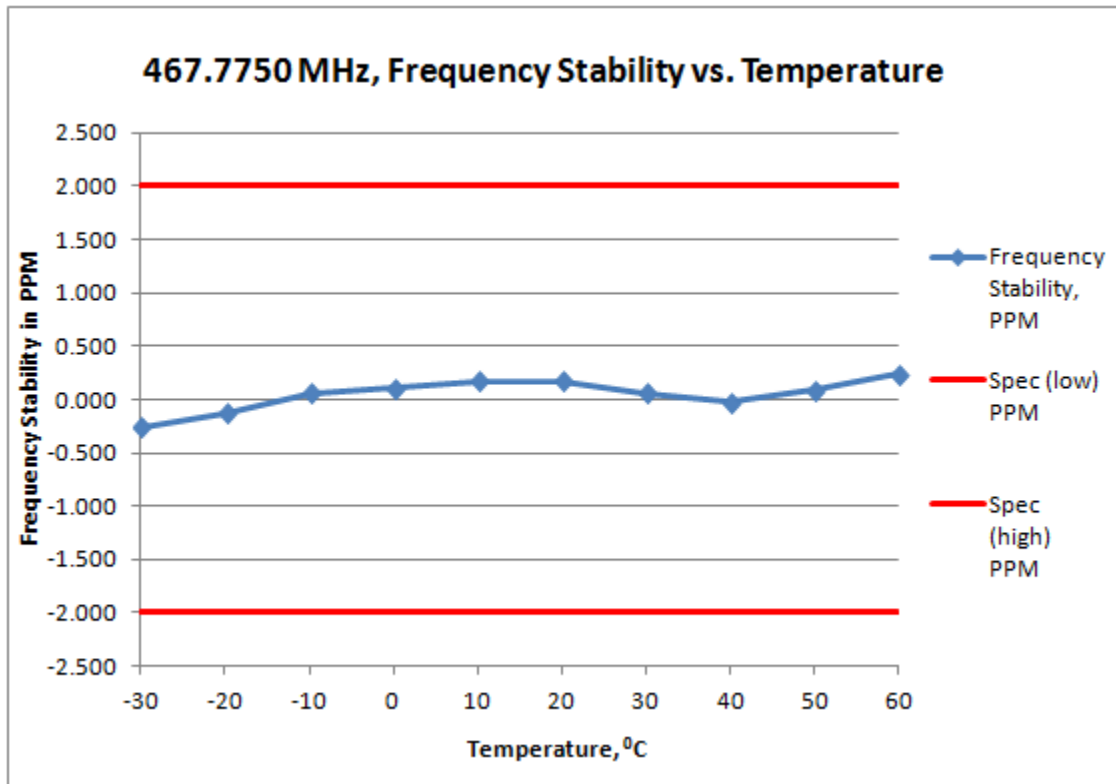


Frequency / Channel Spacing	467.7750 MHz / 12.5 kHz			
Voltage, V	7.5			
Temperature, °C	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-30	467.774880	-0.257	-2.000	2.000
-20	467.774940	-0.128	-2.000	2.000
-10	467.775030	0.064	-2.000	2.000
0	467.775050	0.107	-2.000	2.000
10	467.775080	0.171	-2.000	2.000
20	467.775080	0.171	-2.000	2.000
30	467.775030	0.064	-2.000	2.000
40	467.774990	-0.021	-2.000	2.000
50	467.775040	0.086	-2.000	2.000
60	467.775110	0.235	-2.000	2.000

6.2.3. Test Limit

As per manufacturer declared spec +/- 2ppm

6.3. Audio Frequency Response

6.3.1. Test Setup

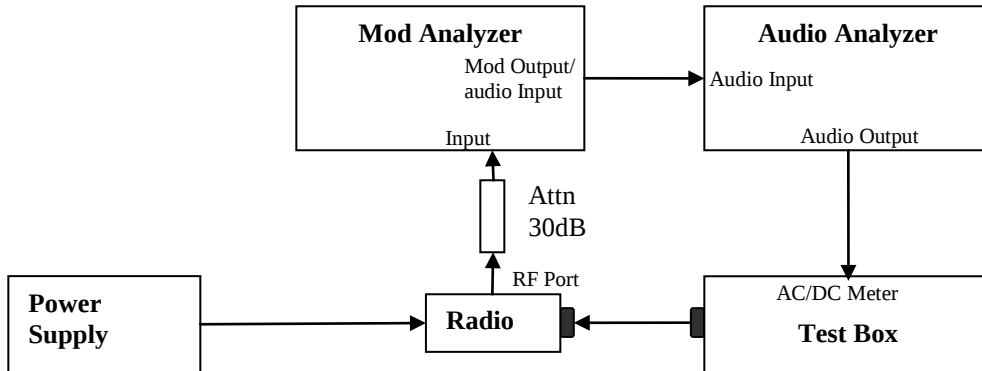


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz and 50kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 20% of the maximum deviation.
- 5) On audio analyzer, set the rated level as reference to zero.
- 6) Vary the audio frequency from 300Hz to 3 kHz. Record the change in dB on the audio analyzer.

6.3.2. Test Result

Not Applicable

6.3.3. Test Limit

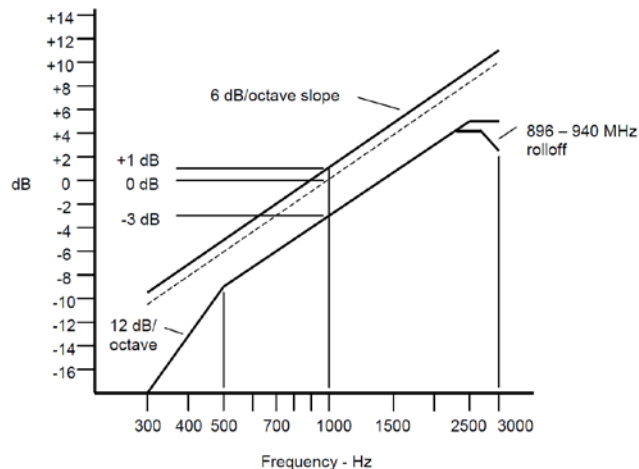


Note:

- o There are additional 6 dB per octave attenuation is allowed from 2.5KHz to 3KHz in equipment 25MHz to 869MHz radio.
- o Additional 6 dB per octave attenuation is allowed from 2.3KHz to 2.7KHz & additional 12 dB per octave attenuation is allowed from 2.7KHz to 3KHz in equipment 896MHz to 940MHz radio.

6.4. Audio Low Pass Filter Response

6.4.1. Test Setup

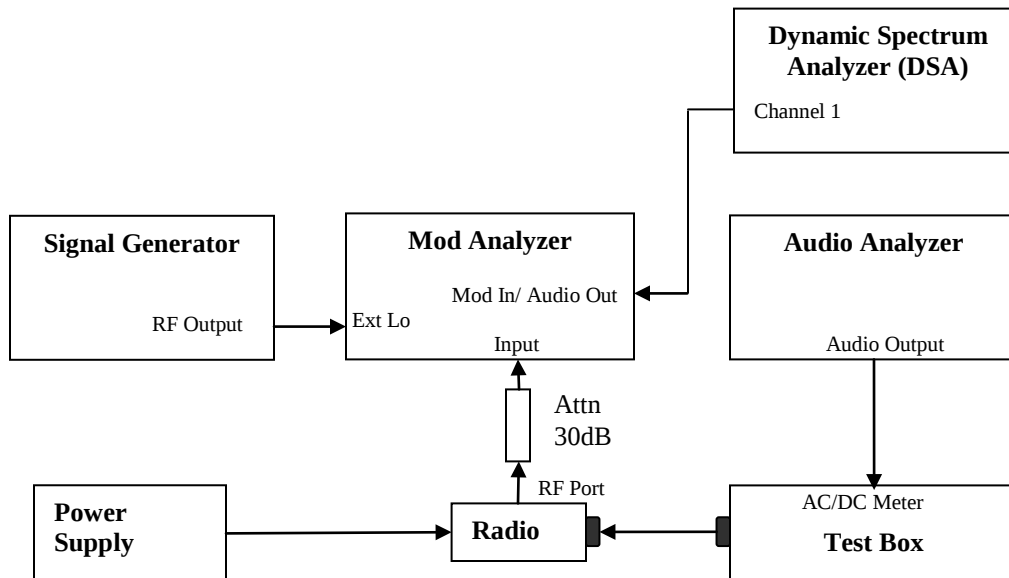


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Press 23.1SPCL on modulation analyzer to enable the external LO from Sigen.
- 4) Set the Sigen frequency to $F_c + 1.5\text{MHz}$, RF output level to 0dBm without modulation.
- 5) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the maximum deviation.
- 6) Up the amplitude by 20dB.
- 7) On DSA, get the reference point to 0dB.
- 8) Vary the frequency on audio analyzer from 3kHz to 20kHz, record the audio tone from DSA.

6.4.2. Test Result

Not Applicable

6.4.3. Test Limit

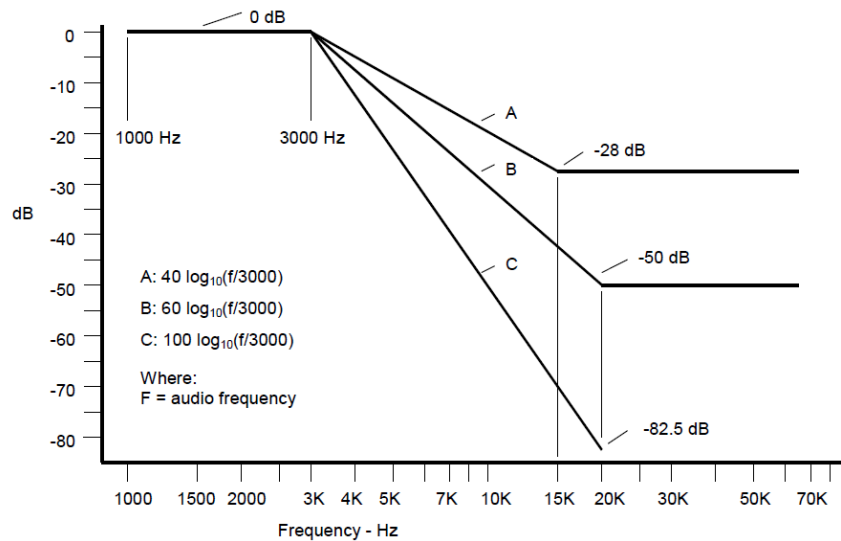

For audio frequencies above 3000 Hz, the audio response of the post limiter low-pass filter shall meet or exceed the following requirements:

- a) For equipment operating on 20, 25 or 30 kHz channel bandwidth in the 25 MHz to 174 MHz range:

At frequencies from 3000 Hz through 15,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: $40 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

At frequencies above 15,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz, by at least: 28 dB.

- b) For equipment operating with 25 kHz bandwidth channels between 406 and 512 MHz through 896 MHz, and between 929 MHz through 930 MHz:

At frequencies from 3000 Hz through 20,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz by at least: $60 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

At frequencies above 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: 50 dB.


- c) For equipment operating on channels between 896 MHz through 901 MHz, between 935 MHz through 940 MHz, and 12.5 or 15 kHz spaced channels in the frequency range 138-174 MHz and 406-512 MHz.

At frequencies from 3000 Hz through 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: $100 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

6.5. Modulation Limiting

6.5.1. Test Setup

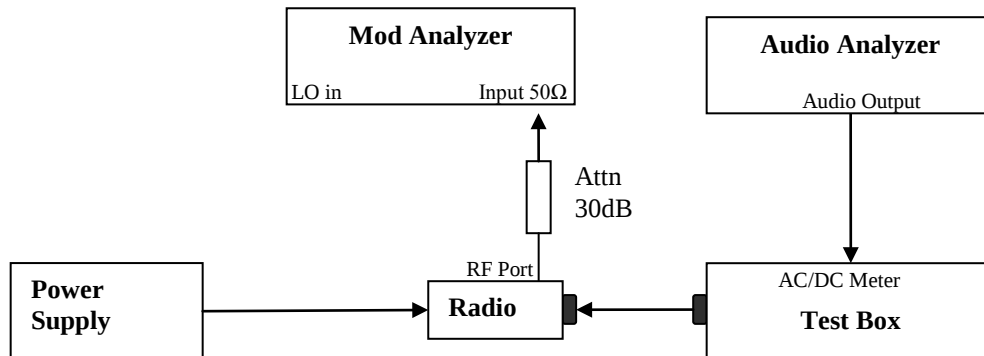

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the maximum deviation.
- 5) Record the frequency deviation as 0dB input level at 1kHz audio frequency.
- 6) Repeat the step and record the frequency deviation from -20dB to 20dB by 5dB increments and different audio freq 300Hz, 2.5 KHz and 3 KHz.

6.5.2. Test Result


Not Applicable

6.5.3. Test Limit

Modulation shall not exceed 100 percent if amplitude modulation is employed.

6.6. Occupied Bandwidth



6.6.1. Test Setup (Analog)


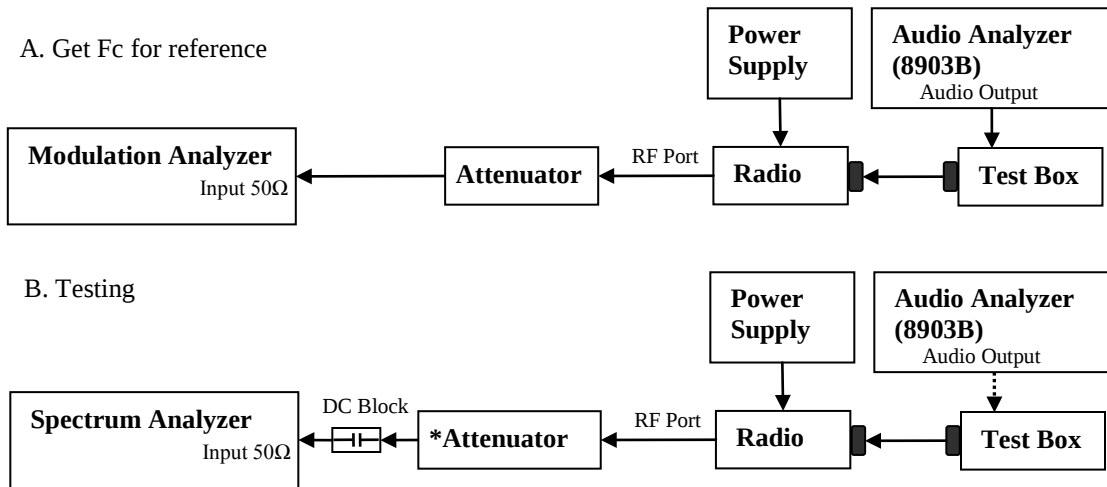



- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 7) Transmit the DUT and record the occupied Bandwidth frequency.
- 8) Preset the spectrum analyzer for sideband spectrum measurement.
- 9) Set the span to 100 KHz and Resolution Bandwidth (according to FCC/ ISED standard).
- 10) Save the screen shot as modulated signal
- 11) Remove the audio tone from audio analyzer to capture unmodulated signal.

* Only HPF added for Mask 80.211 measurement with attenuator.


6.6.2. Test Result (Analog)

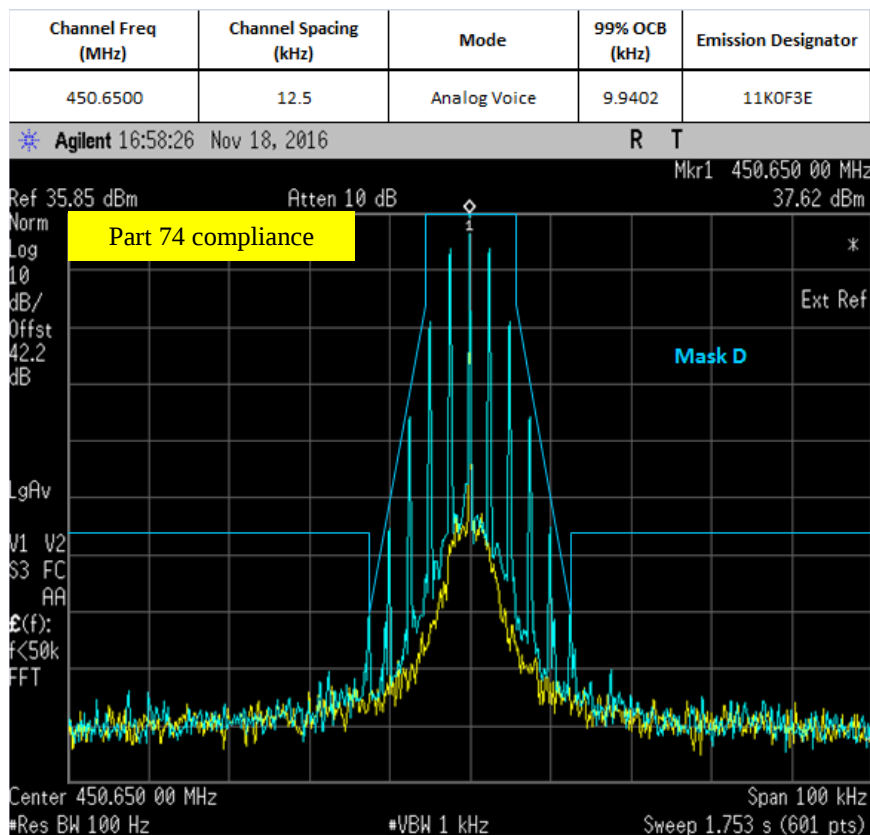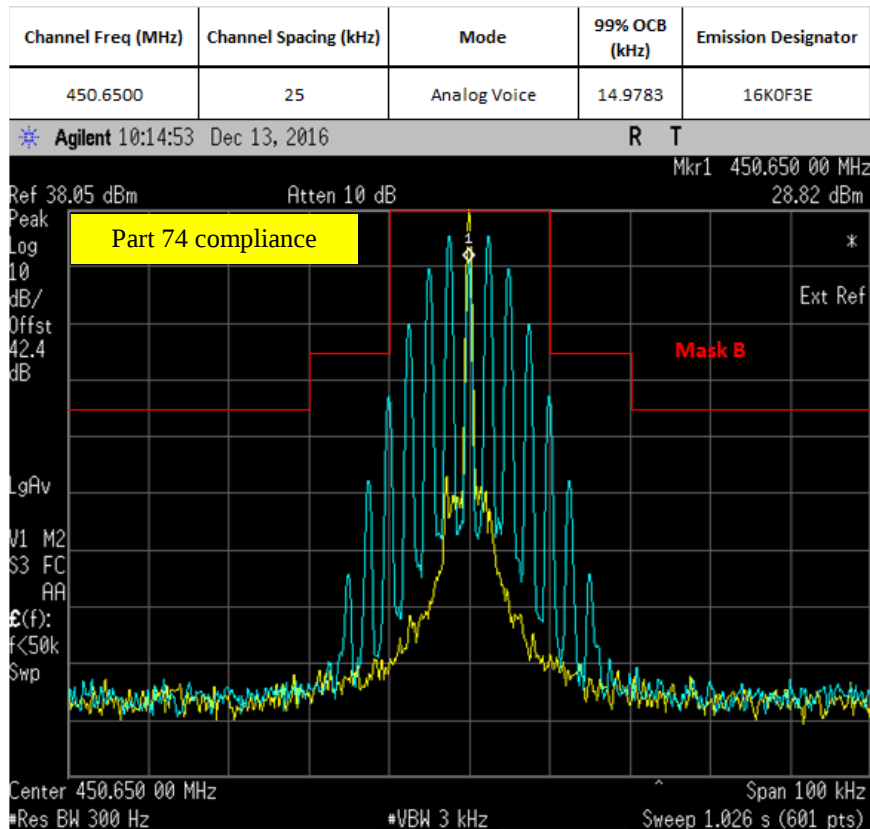

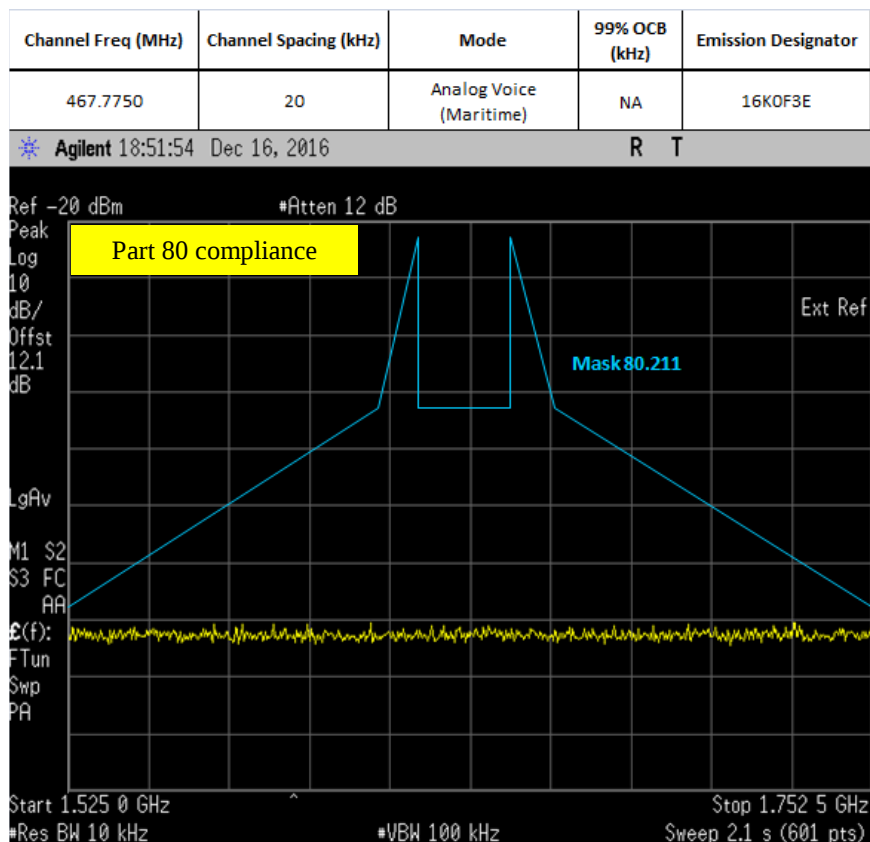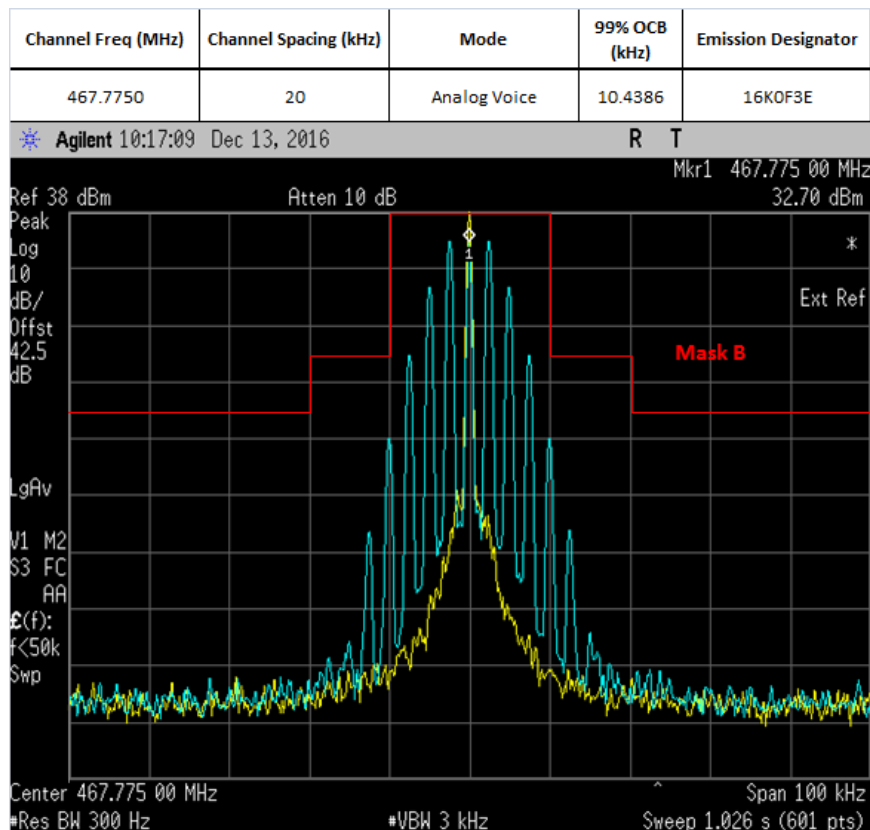


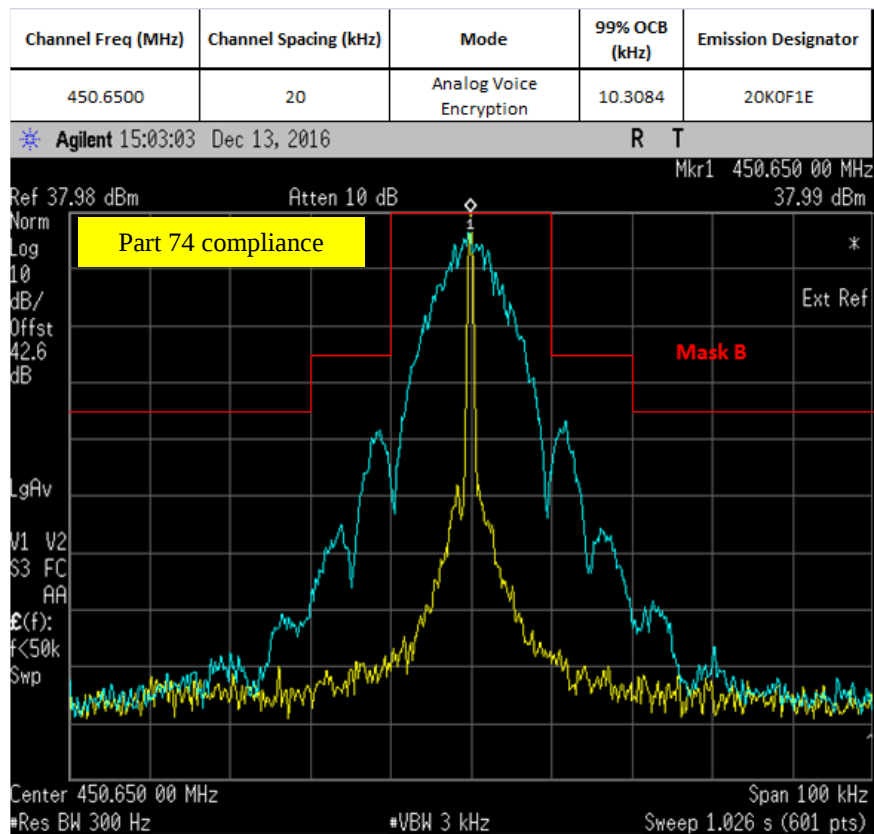



6.6.3. Test Result (Digital)

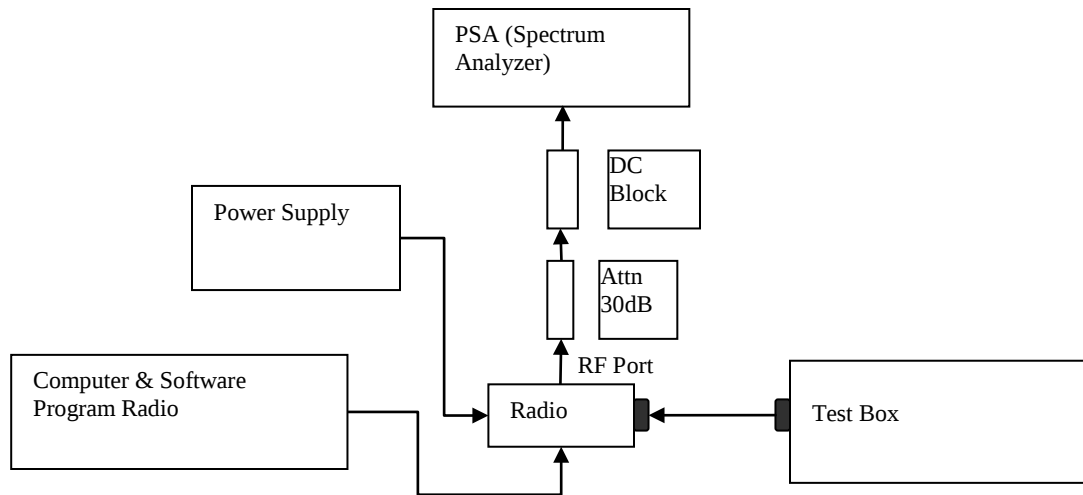

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (4FSK, C4FM, CQPSK or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 4) Key in the Fc and RBandwidth (1 ~ 5 % of emission designator).
- 5) Transmit the DUT and record the occupied Bandwidth frequency.
- 6) Preset the spectrum analyzer for modulation emission spectrum measurement.
- 7) Set the span to 100 KHz and Resolution Bandwidth (according to FCC/ ISED standard).
- 8) Capture the screen shot as modulated signal.

6.6.4. Test Result (Digital)

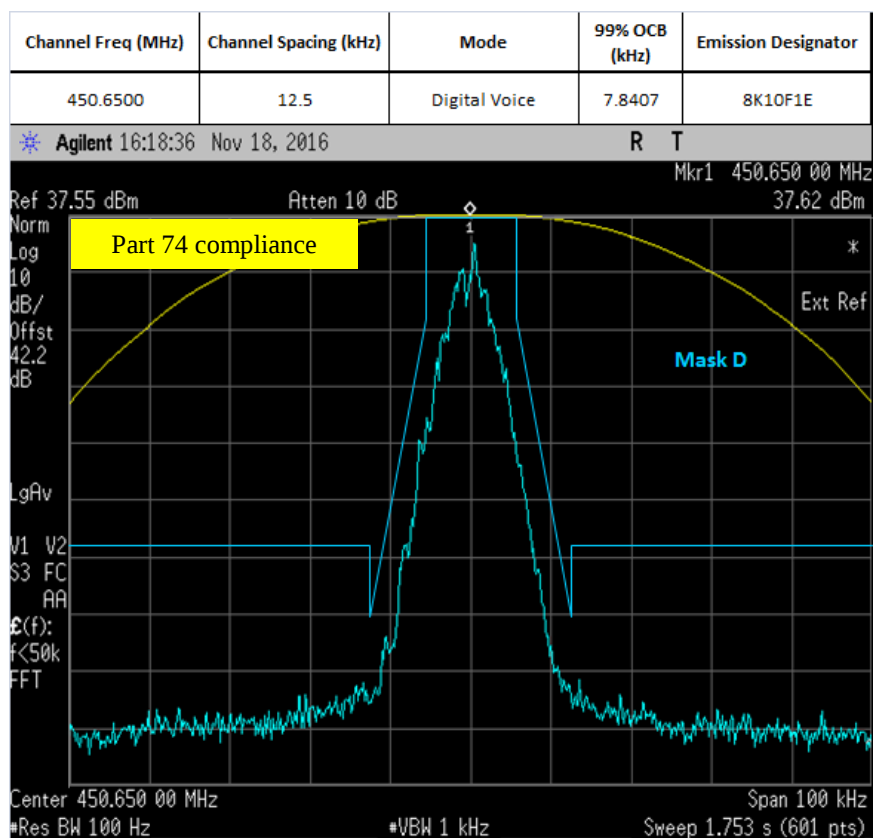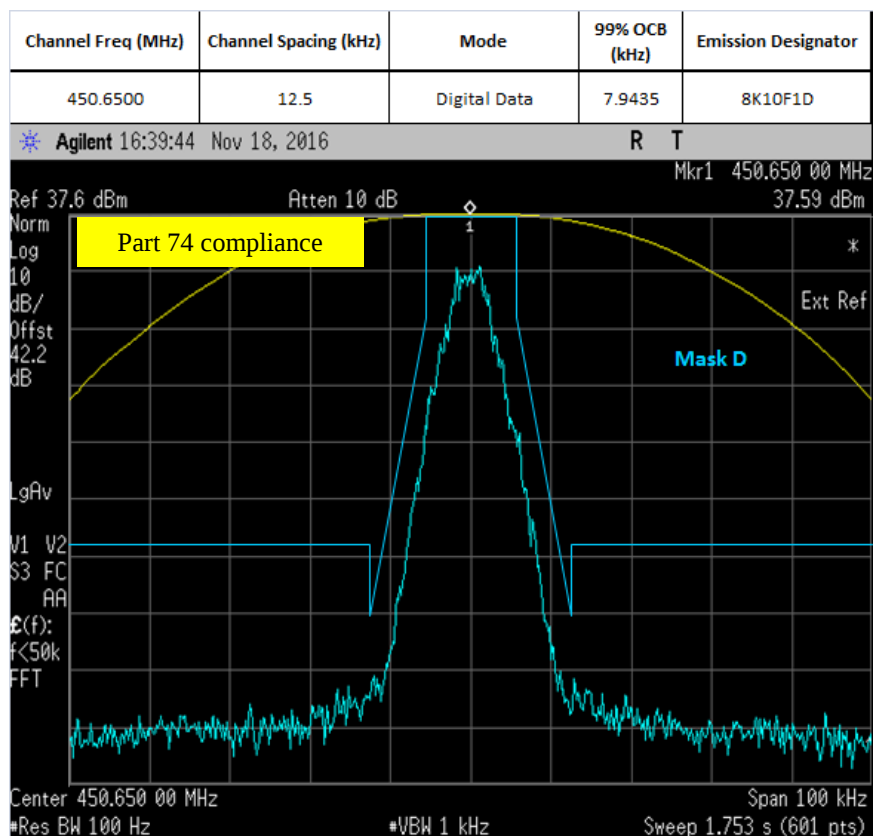

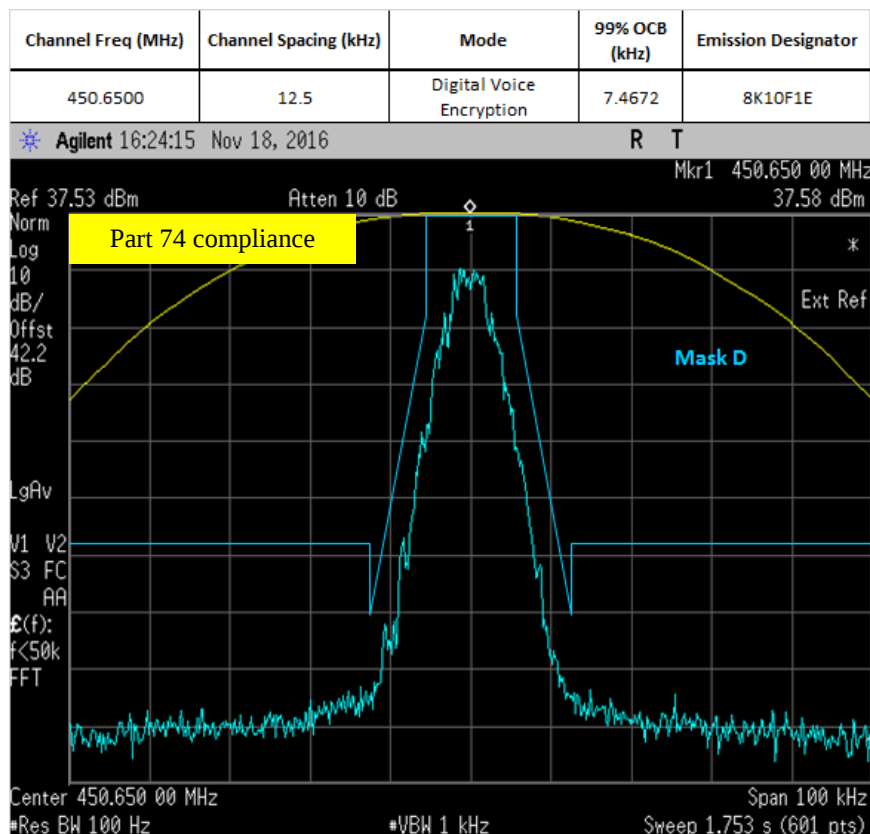


6.6.5. Test Limit

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.


6.7. Band Edge Conducted Spurious Emission (Part 22)

6.7.1. Test Setup (Analog)

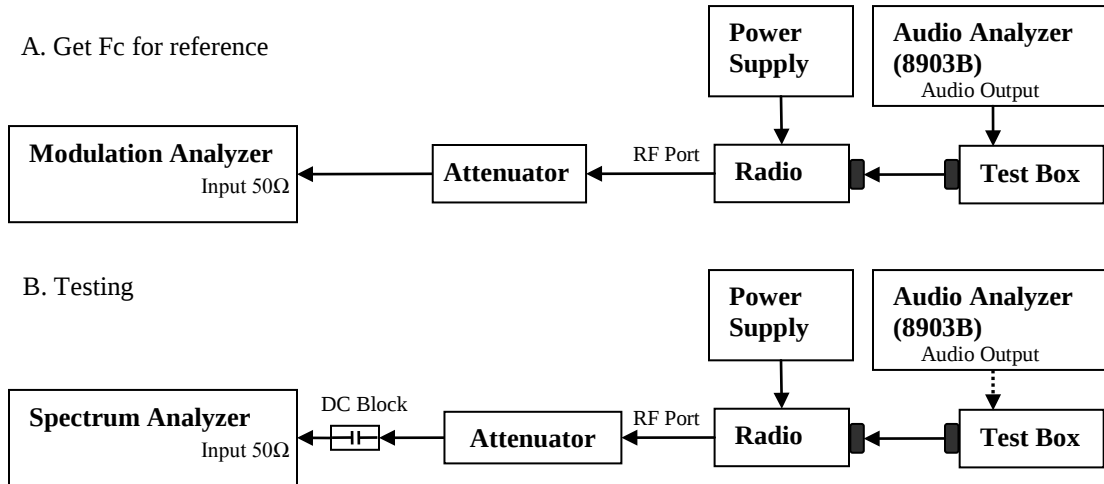


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Path loss for the measurement included.
- 4) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 5) Key in the Fc and RBandwidth= 100Hz.
- 6) Transmit the DUT and record the occupied Bandwidth frequencies.
- 7) Preset the spectrum analyzer for band edge measurement.
- 8) The band edges of lowest and highest channels were measured.
- 9) The center frequency of spectrum is the band edge frequency, span is 60 kHz and RBW is at least 1% of Emission Bandwidth.
- 10) Save the screen shot as modulated signal.
- 11) Remove the audio tone from audio analyzer to capture unmodulated signal.

6.7.2. Test Result (Analog)

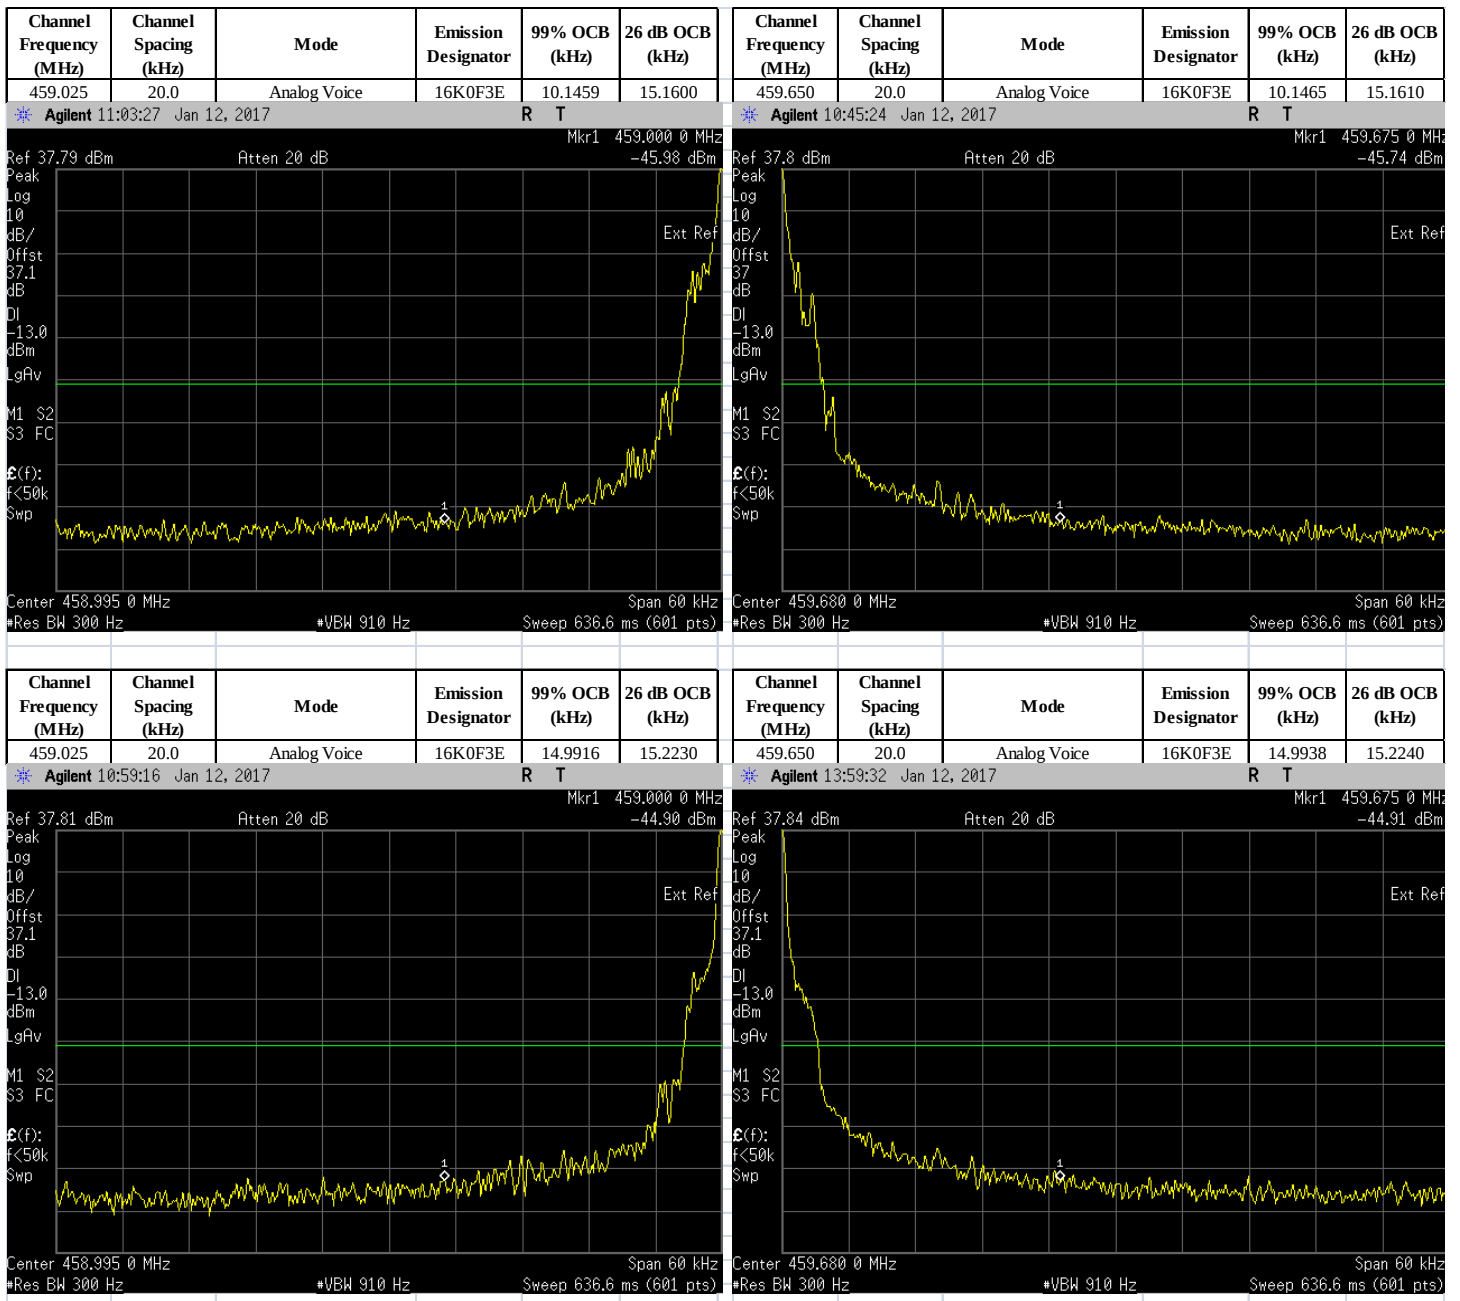

6.7.3. Test Setup (Digital)

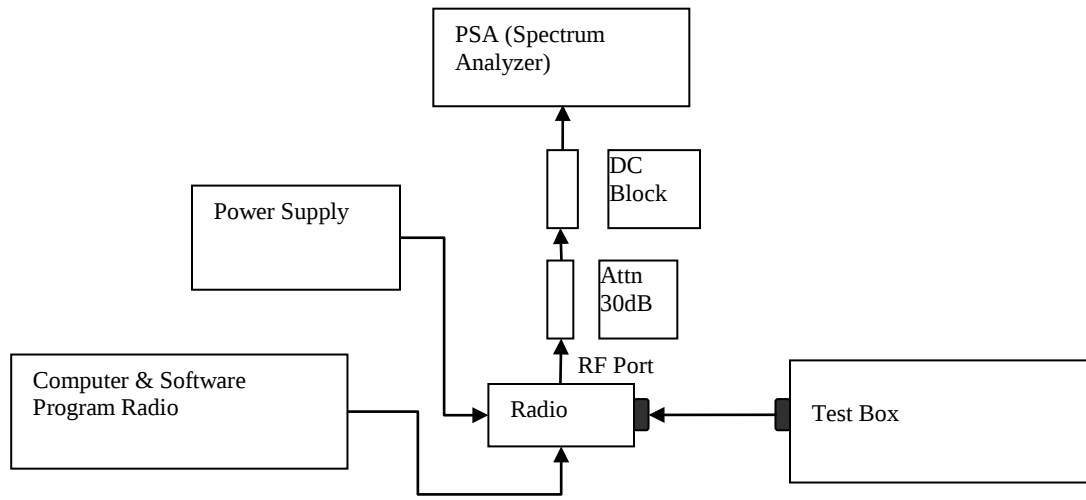


- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 4) Key in the Fc and RBandwidth= 100Hz.
- 5) Transmit radio record the occupied Bandwidth frequencies.
- 6) Preset the spectrum analyzer for band edge measurement.
- 7) The band edges of lowest and highest channels were measured.
- 8) The center frequency of spectrum is the band edge frequency, span is 60 kHz and RBW is at least 1% of Emission Bandwidth.
- 9) Save the screen shot.

****Note:**

- For Digital Modulation for 12.5 kHz Voice (F1E) and 12.5 kHz Data (F1D) would be the same. Therefore only measurements with F1E modulation shown below.

6.7.4. Test Result (Digital)

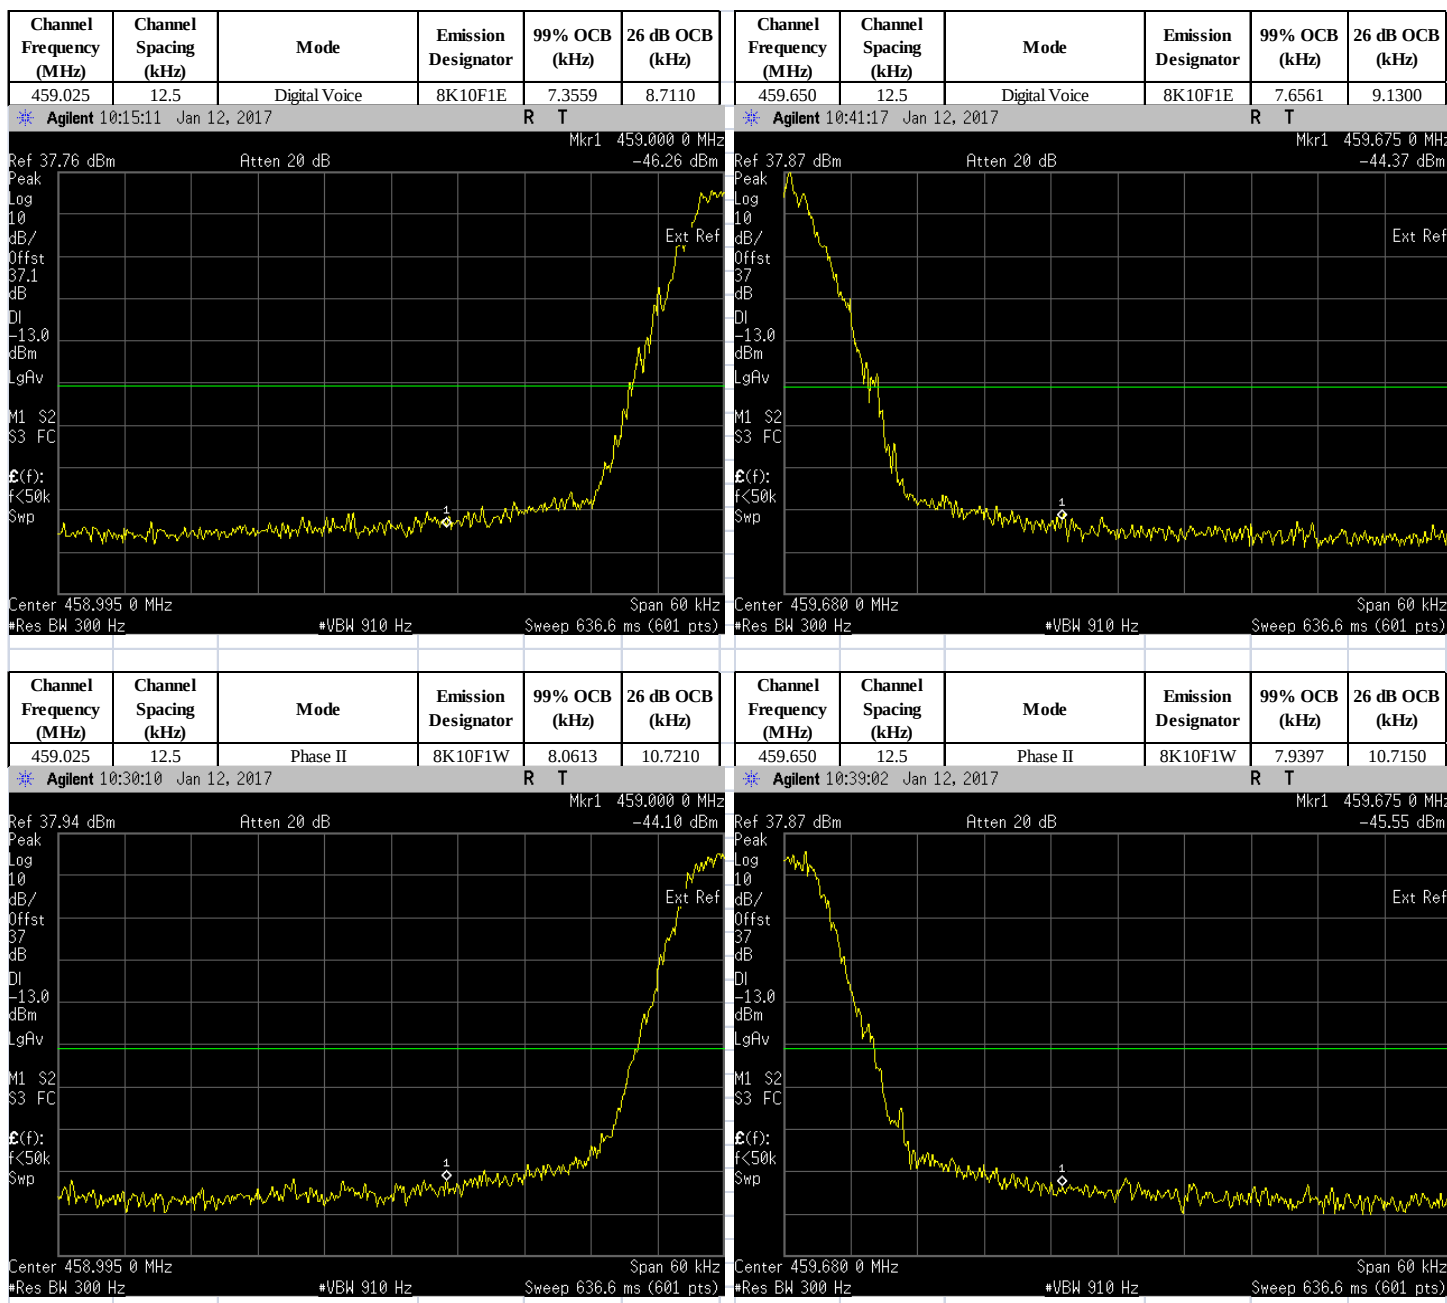


6.7.5. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

6.8. Transient Frequency Behavior

6.8.1. Test Setup

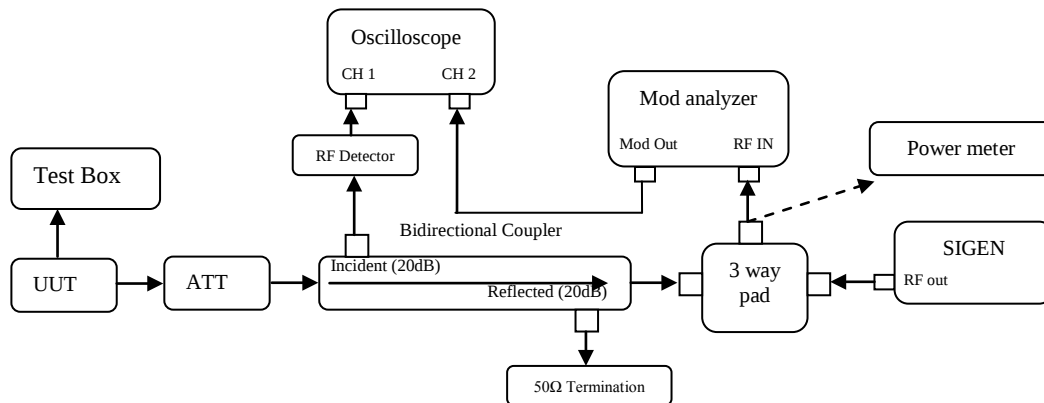

- 1) Connect the setup as figure above.
- 2) Path loss for the measurement included.
- 3) Set on Sigen with the assigned center frequency, internal 1kHz FM tone.
FM Deviation: Analog 25kHz Channel Spacing = 25kHz
Analog 12.5kHz Channel Spacing = 12.5kHz
C4FM = 12.5kHz
- 4) Turn on 50 kHz high pass filter and 15 kHz low pass filter on modulation analyzer.
- 5) Supply sufficient attenuation ATT to provide the output power of $\leq -11\text{dBm}$ into power meter when UUT is keying up.
- 6) Note the power level on power meter and dekey the UUT.
- 7) Adjust the amplitude of the signal generator to the level power meter, maintained the amplitude throughout the rest of the measurement.
- 8) Connect the output to modulation analyzer.
- 9) Set the horizontal sweep rate on the storage oscilloscope to 10 milliseconds per division and adjust the display to continuously view the 1000 Hz. Adjust the vertical amplitude control of the oscilloscope to display the 1000 Hz at ± 4 divisions vertically centered on the display.
- 10) Reduce 30dB attenuation and transmit the radio to get the trigger line.
- 11) Capture the screen shot for key-up (rising edge) and de-key (falling edge) mode.

6.8.2. Test Result

Not Applicable

6.8.3. Test Limit

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t ₁ ⁴	±25.0 kHz	5.0 ms	10.0 ms
t ₂	±12.5 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t ₁ ⁴	±12.5 kHz	5.0 ms	10.0 ms
t ₂	±6.25 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t ₁ ⁴	±6.25 kHz	5.0 ms	10.0 ms
t ₂	±3.125 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±6.25 kHz	5.0 ms	10.0 ms

¹_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t_1 is the time period immediately following t_{on} .

t_2 is the time period immediately following t_1 .

t_3 is the time period from the instant when the transmitter is turned off until t_{off} .

t_{off} is the instant when the 1 kHz test signal starts to rise.


² During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in §90.213.

³ Difference between the actual transmitter frequency and the assigned transmitter frequency.

⁴ If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

6.9. Adjacent Channel Power

6.9.1. Test Setup (Analog)

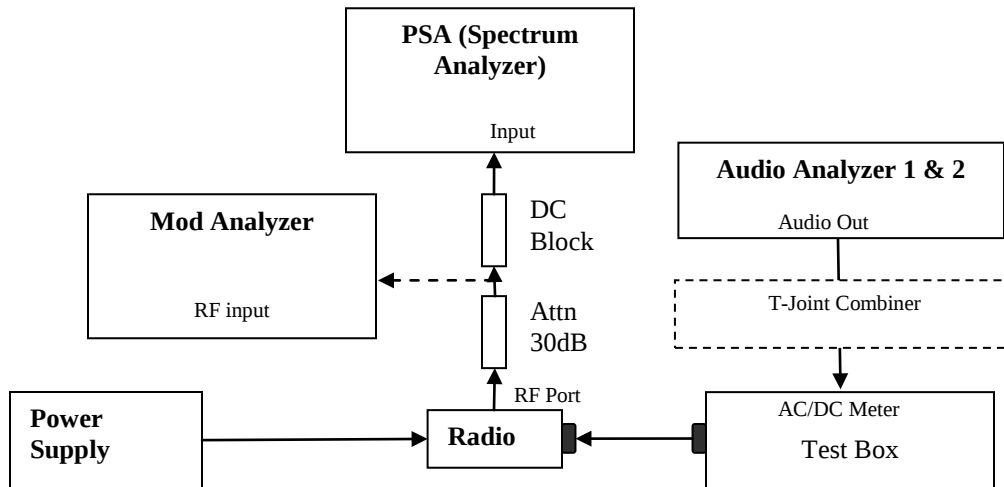


- 1) The DUT transmitter output port was connected to modulation analyzer.
- 2) Path loss for the measurement included.
- 3) Transmit the radio and turn on 1st audio analyzer with audio frequency 650Hz, 50% rated deviation, and record the amplitude value as AmpT1.
- 4) Turn off Audio analyzer 1 and turn on audio analyzer 2, set the audio frequency to 2.2 kHz and 50% deviation. Record the amplitude as AmpT2.
- 5) Turn both audio analyzers ON and up 10dB amplitude level.
- 6) Connect the output to PSA and set to assigned center frequency.
- 7) Set Span, RBW and VBW as shown in FCC rules part 90.534.
- 8) Transmit the radio and record the ACP value in dBc.

6.9.2. Test Result (Analog)

Not Applicable

6.9.3. Test Setup (Digital)

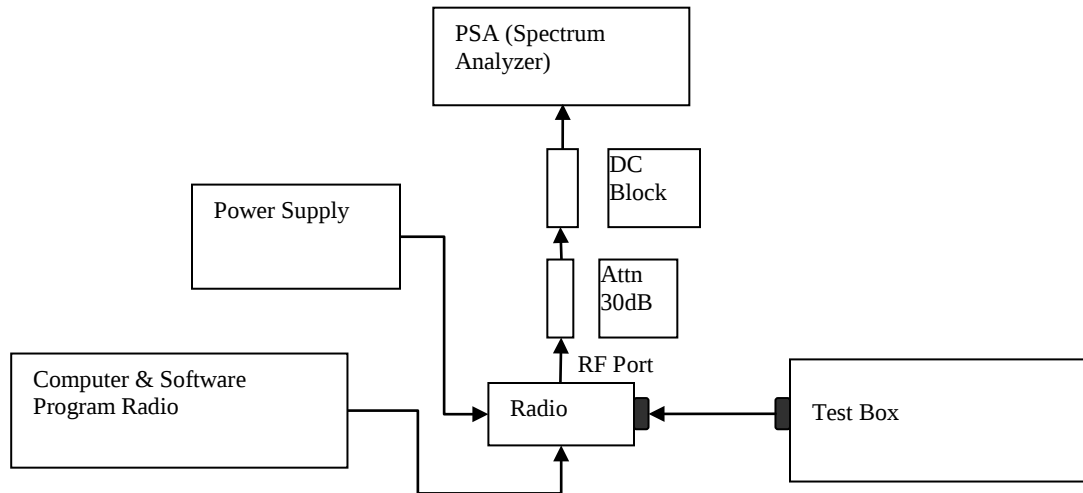

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (4FSK, C4FM, CQPSK or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Prepare setup as per picture.
- 4) Turn on the ACP Measurement – Press Measure, ACP.
- 5) Set Span, RBW and VBW as shown in FCC rules part 90.534.
- 6) Transmit the radio and record the ACP value in dBc.

6.9.4. Test Result (Digital)

Not Applicable

6.9.5. Test limit

12.5 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.50	25.00	-60
62.50	25.00	-65
87.50	25.00	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

25 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.50	25	-60
62.50	25	-65
87.50	25	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

12.5 kHz BASE TRANSMITTER ACP REQUIREMENTS


Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	-85

25 kHz BASE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350	100.00	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	-85

6.10. Conducted Spurious Emission

6.10.1. Test Setup

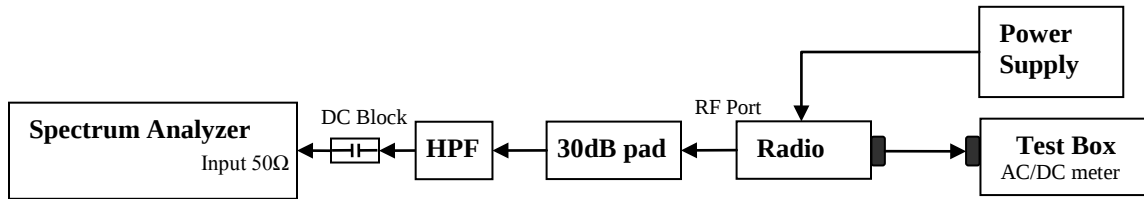

- 1) The DUT transmitter output port was connected to Spectrum Analyzer with above setup.
- 2) Program and set radio to operate in desire test frequency and mode. (Analog / digital modulation form).
- 3) Adjust the PSA RBW = 100kHz for spur emission below 1GHz, and 1MHz for spur emission above 1GHz.
- 4) Set the Ref offset from the pathloss offset calibration file.
- 5) Adjust the center frequency of the spectrum analyzer for incremental coverage of the range from:
- 6) (a) The lowest radio frequency to $F_c - \text{Test BW}$
- 7) (b) $F_c + \text{Test BW}$ to $\text{Freq} < 2F_c$.
- 8) Record the levels of spurious emissions and dekey the UUT.
- 9) Turn On HPF path and Key up the UUT.
- 10) Adjust the PSA Freq for incremental coverage of range from $2F_c$ to $10F_c$.
- 11) The levels recorded are the absolute levels of conducted spurious emissions in dBm.

6.10.2. Test Result (Analog)

Not Applicable

6.10.3. Test Result (Digital)

Not Applicable


6.10.4. Test Limit

Table below summarized the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)
25kHz		Not Applicable		43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

6.11. Radiated Spurious Emission

6.11.1. Test Setup

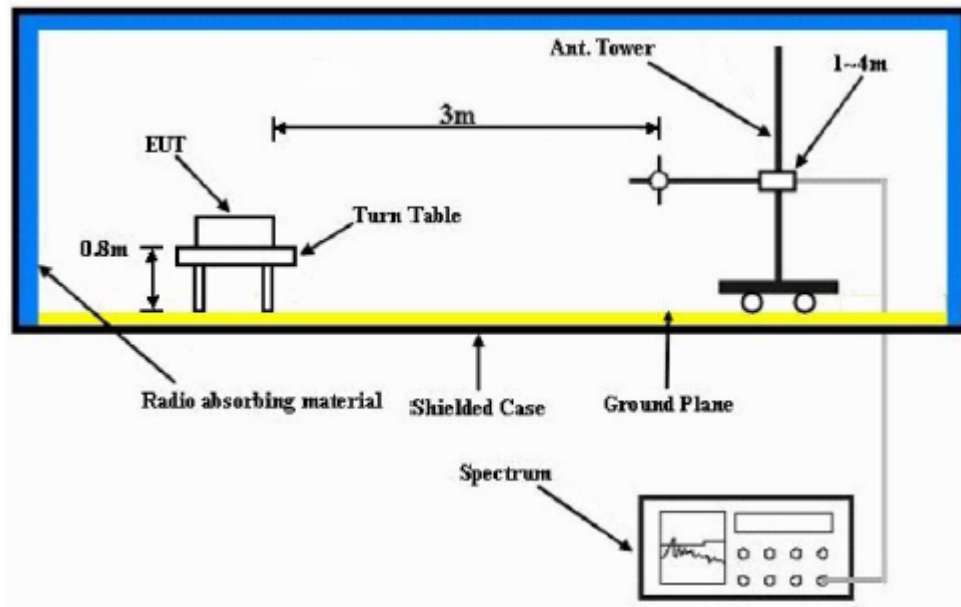

- 1) The spectrum setting for scanning Radiated Emission below 1 GHz is RBW = 100 kHz, VBW = 300 kHz and above 1 GHz is RBW = 1MHz, VBW = 3MHz. Detector mode is positive peak.
- 2) In the semi-anechoic chamber, setup as illustrated above the EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- 3) The substitution antenna is substituted for EUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 4) Final Radiated Spurious Emission = "Read Value" + Measured substitution value.

6.11.2. Test Result (Analog)

SAC Transmitter Radiated Emission:

Model #: H51SDH9PW7AN

S/N: 426CSP2993

Battery Part No: NNTN8128BR

Accy Part No: NA

Test Mode: TX Analog


450.650000 MHz

25 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
901.3000	-13.0000	-90.0400 **	-89.1948 **
1351.9500	-13.0000	-59.5197 **	-60.3934 **
1802.6000	-13.0000	-60.8049 **	-59.9895 **
2253.2500	-13.0000	-57.4709 **	-56.9965 **
2703.9000	-13.0000	-55.1857 **	-55.5891 **
3154.5500	-13.0000	-53.5136 **	-54.0166 **
3605.2000	-13.0000	-55.2210 **	-53.9934 **
4055.8500	-13.0000	-53.2336 **	-53.2673 **
4506.5000	-13.0000	-51.0395 **	-51.3762 **

RADIATED SPURIOUS EMISSIONS

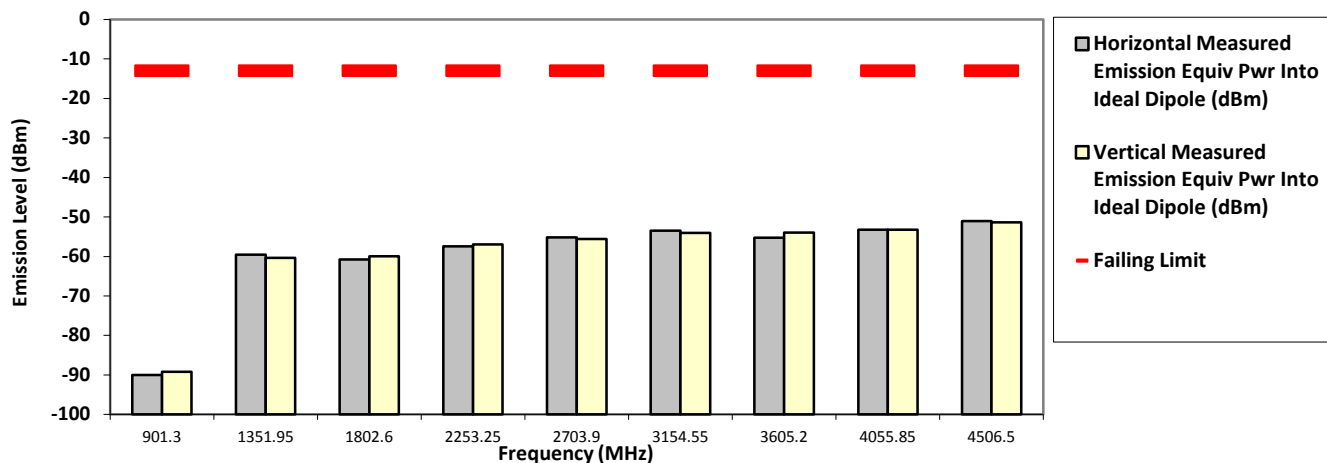

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Sep 11, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.7 Hum(%RH): 73.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: H51SDH9PW7AN
 Battery Part No: NNTN8128BR
 Test Mode: TX Analog
 450.650000 MHz


SAC Transmitter Radiated Emission:
 S/N: 426CSP2993
 Accy Part No: NA

25 kHz

5.600 Watt(s) /Max Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
901.3000	-13.0000	-89.4992 **	-89.7180 **
1351.9500	-13.0000	-48.1600 *	-39.4500 *
1802.6000	-13.0000	-64.6752 **	-57.5366 **
2253.2500	-13.0000	-60.1926 **	-57.0277 **
2703.9000	-13.0000	-60.4250 **	-55.2021 **
3154.5500	-13.0000	-56.6806 **	-53.5164 **
3605.2000	-13.0000	-59.1284 **	-54.6236 **
4055.8500	-13.0000	-57.4569 **	-50.9311 **
4506.5000	-13.0000	-52.8971 **	-50.9802 **

RADIATED SPURIOUS EMISSIONS

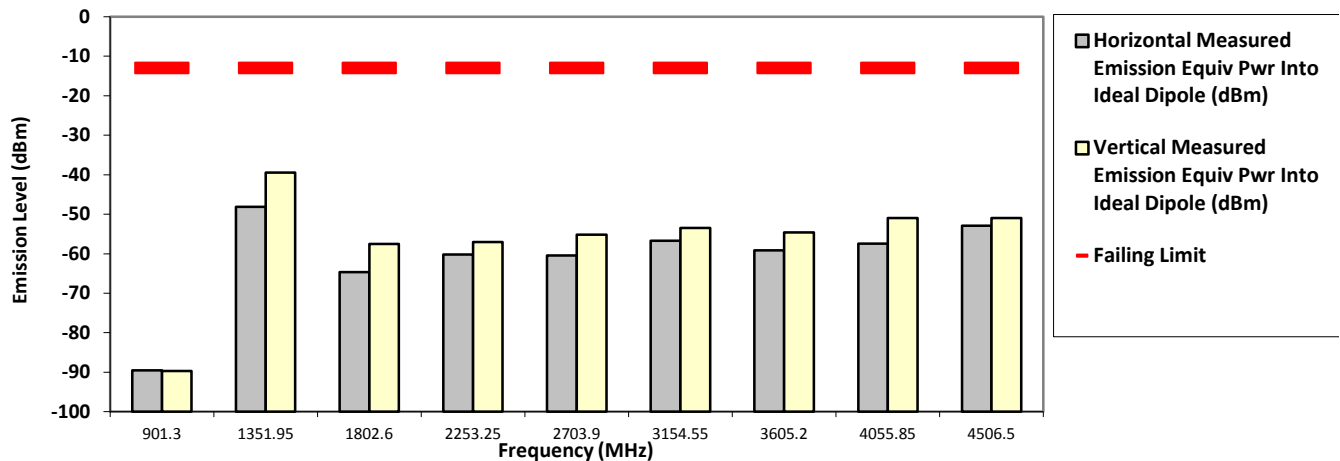

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Sep 11, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.7 Hum(%RH): 73.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: H51SDH9PW7AN
 Battery Part No: NNTN8128BR
 Test Mode: TX Analog
 459.125000 MHz


SAC Transmitter Radiated Emission:
 S/N: 426CSP2993
 Accy Part No: NA

20 kHz

5.600 Watt(s) /Max Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
918.2500	-13.0000	-89.7210 **	-88.0016 **
1377.3750	-13.0000	-49.9000 *	-41.6200 *
1836.5000	-13.0000	-59.0119 **	-56.2353 **
2295.6250	-13.0000	-57.3429 **	-56.2995 **
2754.7500	-13.0000	-56.8996 **	-54.5484 **
3213.8750	-13.0000	-53.4855 **	-53.5207 **
3673.0000	-13.0000	-56.5557 **	-55.1418 **
4132.1250	-13.0000	-51.7001 **	-49.0056 **
4591.2500	-13.0000	-48.8516 **	-50.1154 **

RADIATED SPURIOUS EMISSIONS

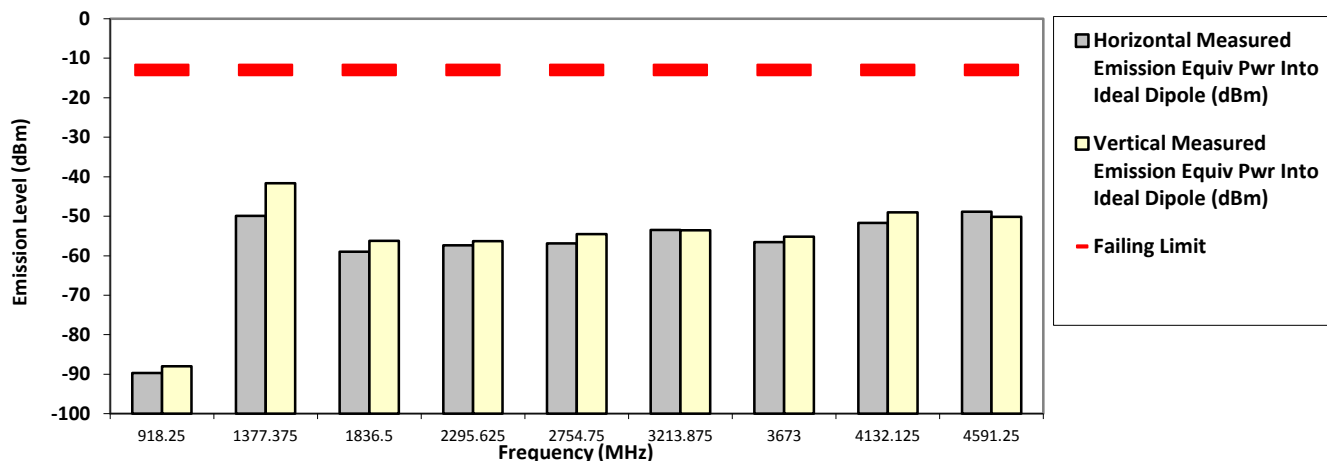

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Sep 11, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.7 Hum(%RH): 73.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: H51SDH9PW7AN
 Battery Part No: NNTN8128BR
 Test Mode: TX Analog
 459.125000 MHz


SAC Transmitter Radiated Emission:
 S/N: 426CSP2993
 Accy Part No: NA

25 kHz

5.600 Watt(s) /Max Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
918.2500	-13.0000	-89.9796 **	-89.4387 **
1377.3750	-13.0000	-49.5800 *	-41.4600 *
1836.5000	-13.0000	-58.9706 **	-57.0677 **
2295.6250	-13.0000	-57.4455 **	-56.5258 **
2754.7500	-13.0000	-56.4622 **	-56.0464 **
3213.8750	-13.0000	-53.9855 **	-54.1648 **
3673.0000	-13.0000	-54.8551 **	-54.2260 **
4132.1250	-13.0000	-52.1930 **	-48.2202 **
4591.2500	-13.0000	-47.9690 **	-49.4249 **

RADIATED SPURIOUS EMISSIONS

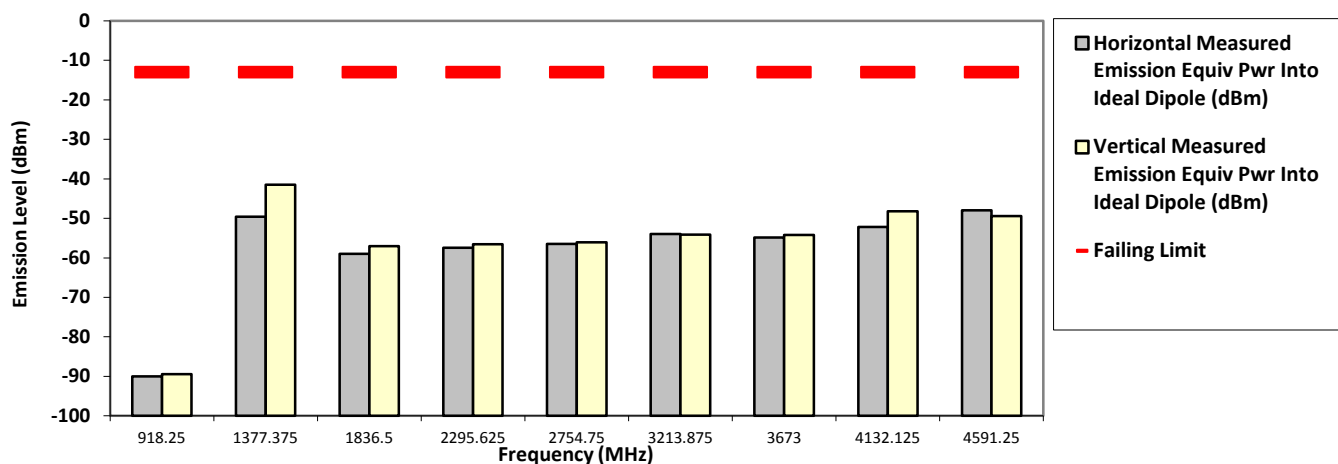

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Sep 11, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.7 Hum(%RH): 73.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: H51SDH9PW7AN
 Battery Part No: NNTN8128BR
 Test Mode: TX Analog
 467.775000 MHz


SAC Transmitter Radiated Emission:
 S/N: 426CSP2993
 Accy Part No: NA

25 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-13.0000	-87.8588 **	-89.0281 **
1403.3250	-13.0000	-62.0835 **	-65.4632 **
1871.1000	-13.0000	-58.8122 **	-60.5308 **
2338.8750	-13.0000	-56.0964 **	-59.2644 **
2806.6500	-13.0000	-56.4484 **	-58.5407 **
3274.4250	-13.0000	-53.6037 **	-56.5497 **
3742.2000	-13.0000	-54.9305 **	-54.6351 **
4209.9750	-13.0000	-52.7565 **	-56.0645 **
4677.7500	-13.0000	-51.2710 **	-51.5148 **

RADIATED SPURIOUS EMISSIONS

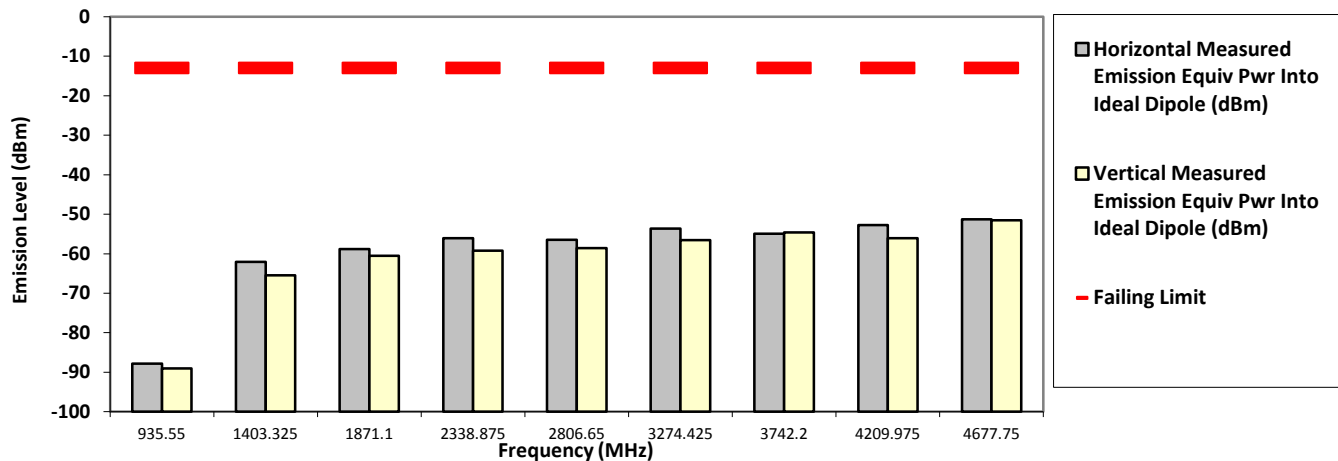

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Sep 11, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.7 Hum(%RH): 73.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: H51SDH9PW7AN
 Battery Part No: NNTN8128BR
 Test Mode: TX Analog
 467.775000 MHz


SAC Transmitter Radiated Emission:
 S/N: 426CSP2993
 Accy Part No: NA

25 kHz

5.600 Watt(s) /Max Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-13.0000	-89.4742 **	-88.3091 **
1403.3250	-13.0000	-50.1300 *	-43.0800 *
1871.1000	-13.0000	-57.8649 **	-56.8638 **
2338.8750	-13.0000	-56.7273 **	-56.3882 **
2806.6500	-13.0000	-56.2589 **	-56.0290 **
3274.4250	-13.0000	-53.5196 **	-53.2401 **
3742.2000	-13.0000	-55.0074 **	-54.1622 **
4209.9750	-13.0000	-48.0200 *	-46.9400 *
4677.7500	-13.0000	-45.1800 *	-47.0100 *

RADIATED SPURIOUS EMISSIONS

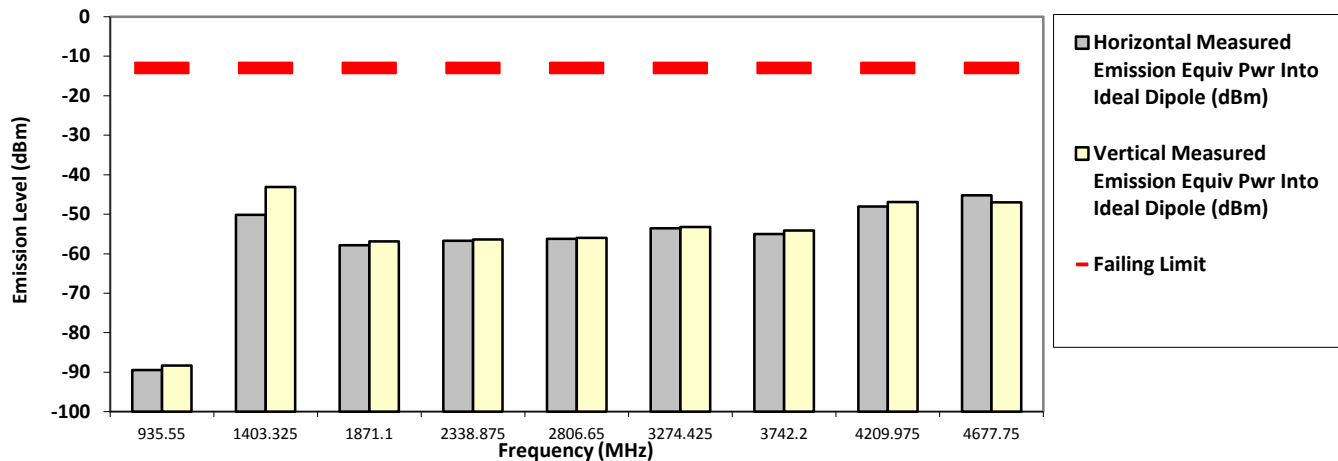

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Sep 11, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.7 Hum(%RH): 73.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: H51SDH9PW7AN
 Battery Part No: NNTN8128BR
 Test Mode: TX Analog
 511.987500 MHz


SAC Transmitter Radiated Emission:
 S/N: 426CSP2993
 Accy Part No: NA

20 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1023.9750	-13.0000	-54.5100 *	-48.3400 *
1535.9625	-13.0000	-62.1000 **	-59.8694 **
2047.9500	-13.0000	-55.7340 **	-57.6131 **
2559.9375	-13.0000	-54.2969 **	-54.8780 **
3071.9250	-13.0000	-53.7062 **	-53.5280 **
3583.9125	-13.0000	-54.2914 **	-54.1404 **
4095.9000	-13.0000	-52.3332 **	-52.8870 **
4607.8875	-13.0000	-51.1454 **	-51.7244 **
5119.8750	-13.0000	-49.3161 **	-50.7456 **

RADIATED SPURIOUS EMISSIONS

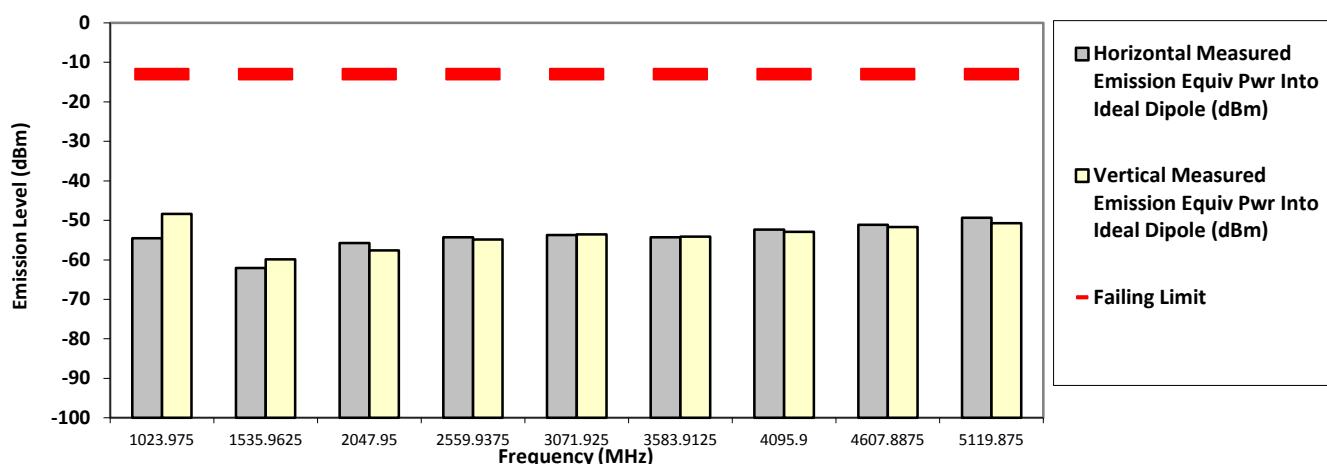

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Sep 11, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.7 Hum(%RH): 73.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: H51SDH9PW7AN
 Battery Part No: NNTN8128BR
 Test Mode: TX Analog
 511.987500 MHz


SAC Transmitter Radiated Emission:
 S/N: 426CSP2993
 Accy Part No: NA

20 kHz

5.600 Watt(s) /Max Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1023.9750	-13.0000	-45.8600 *	-47.2100 *
1535.9625	-13.0000	-53.5400 *	-49.4200 *
2047.9500	-13.0000	-57.9829 **	-56.8856 **
2559.9375	-13.0000	-54.3322 **	-54.7755 **
3071.9250	-13.0000	-53.4634 **	-53.2987 **
3583.9125	-13.0000	-53.9159 **	-53.8579 **
4095.9000	-13.0000	-51.2736 **	-49.3890 **
4607.8875	-13.0000	-49.4153 **	-50.8157 **
5119.8750	-13.0000	-50.6155 **	-49.6043 **

RADIATED SPURIOUS EMISSIONS

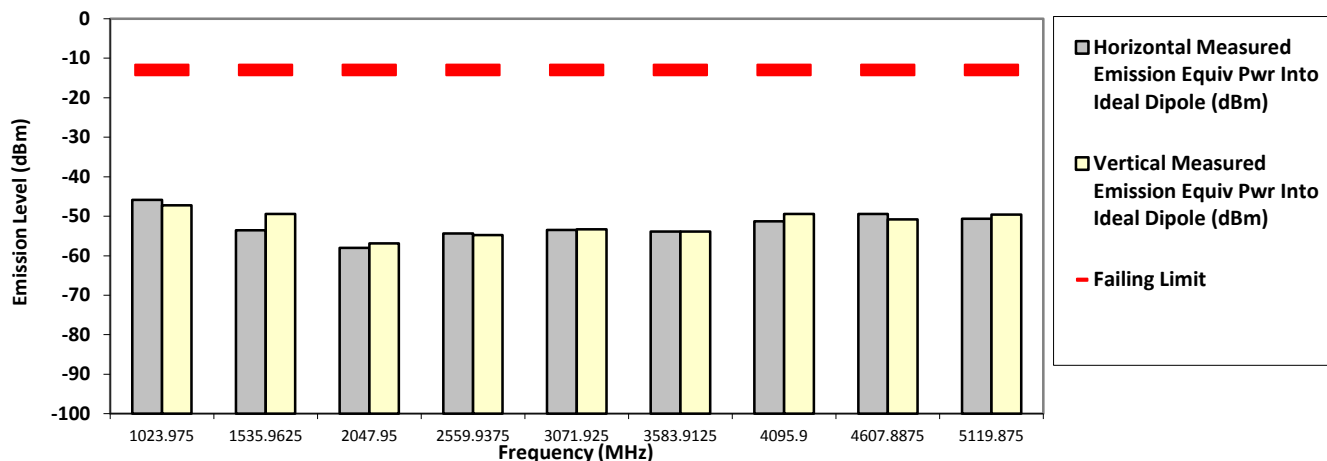

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Sep 11, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.7 Hum(%RH): 73.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: H51SDH9PW7AN
 Battery Part No: NNTN8128BR
 Test Mode: TX Analog
 511.987500 MHz


SAC Transmitter Radiated Emission:
 S/N: 426CSP2993
 Accy Part No: NA

25 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1023.9750	-13.0000	-56.7100 *	-47.6200 *
1535.9625	-13.0000	-60.9879 **	-59.7057 **
2047.9500	-13.0000	-55.7276 **	-57.3911 **
2559.9375	-13.0000	-54.8781 **	-53.6730 **
3071.9250	-13.0000	-52.5134 **	-53.4959 **
3583.9125	-13.0000	-53.5102 **	-53.7853 **
4095.9000	-13.0000	-53.4735 **	-52.9508 **
4607.8875	-13.0000	-51.2740 **	-50.4437 **
5119.8750	-13.0000	-48.1150 **	-48.6999 **

RADIATED SPURIOUS EMISSIONS

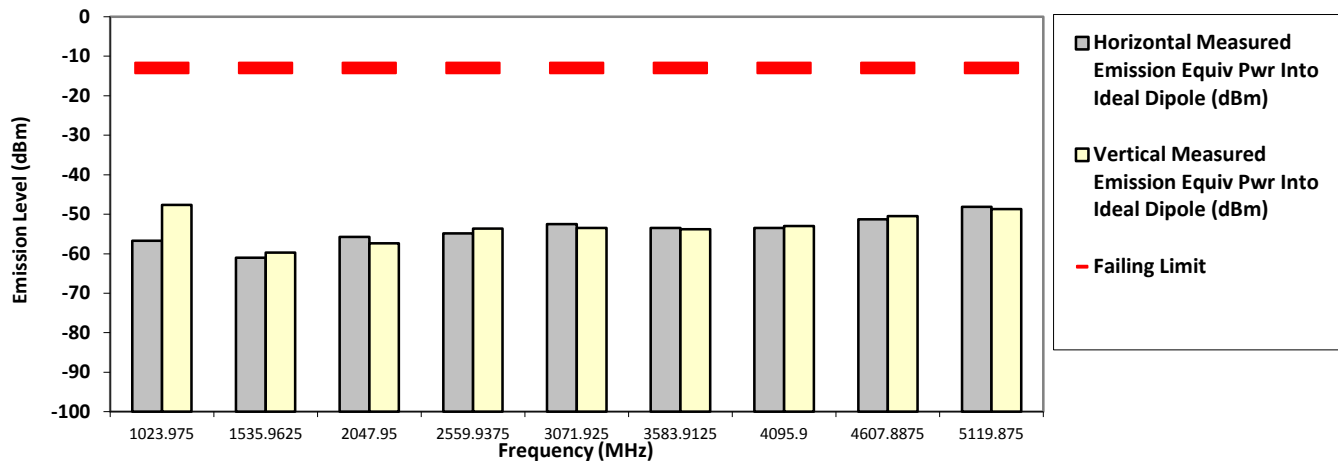

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Sep 11, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.7 Hum(%RH): 73.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: H51SDH9PW7AN
 Battery Part No: NNTN8128BR
 Test Mode: TX Analog
 511.987500 MHz


SAC Transmitter Radiated Emission:
 S/N: 426CSP2993
 Accy Part No: NA

25 kHz

5.600 Watt(s) /Max Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1023.9750	-13.0000	-46.0700 *	-45.3900 *
1535.9625	-13.0000	-54.0400 *	-48.8600 *
2047.9500	-13.0000	-56.1423 **	-57.6423 **
2559.9375	-13.0000	-53.9512 **	-53.7945 **
3071.9250	-13.0000	-52.9502 **	-52.8811 **
3583.9125	-13.0000	-54.6377 **	-52.0609 **
4095.9000	-13.0000	-48.9900 *	-49.2600 *
4607.8875	-13.0000	-49.0108 **	-50.3037 **
5119.8750	-13.0000	-50.3577 **	-48.7254 **

RADIATED SPURIOUS EMISSIONS

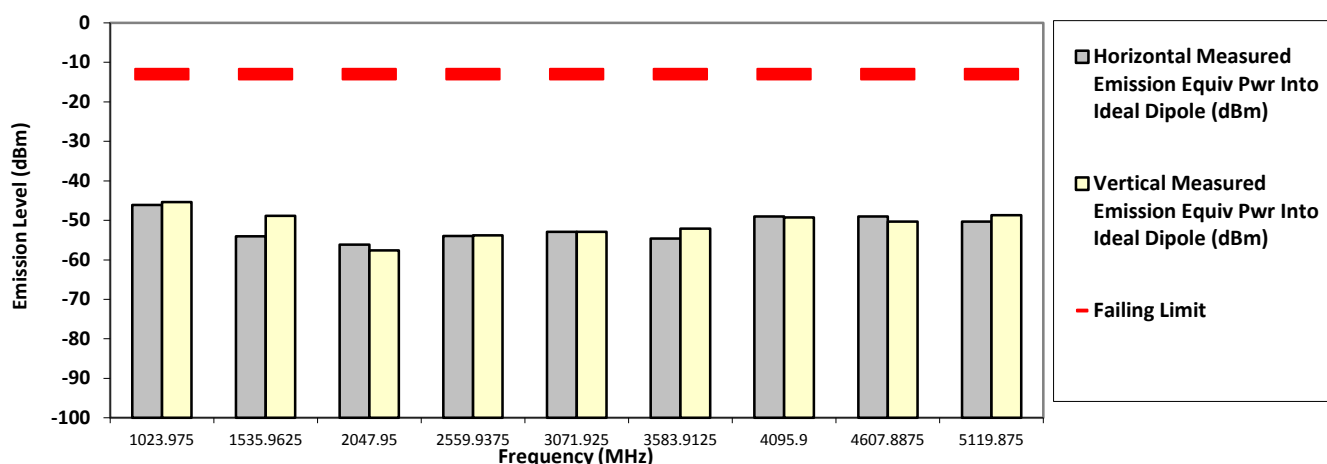

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Sep 11, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.7 Hum(%RH): 73.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

6.11.3. Test Result (Digital)

Model #: H51SDH9PW7AN
 Battery Part No: NNTN8128BR
 Test Mode: TX C4FM
 450.650000 MHz


SAC Transmitter Radiated Emission:
 S/N: 426CSP2993
 Accy Part No: NA

12.5 kHz

5.600 Watt(s) /Max Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
901.3000	-20.0000	-88.9530 **	-89.1540 **
1351.9500	-20.0000	-49.7200 **	-38.0400 **
1802.6000	-20.0000	-59.4247 **	-57.4361 **
2253.2500	-20.0000	-58.2802 **	-57.5025 **
2703.9000	-20.0000	-55.1168 **	-55.3710 **
3154.5500	-20.0000	-54.2330 **	-54.4592 **
3605.2000	-20.0000	-53.9020 **	-54.1579 **
4055.8500	-20.0000	-53.2777 **	-49.8104 **
4506.5000	-20.0000	-49.4343 **	-50.3510 **

RADIATED SPURIOUS EMISSIONS

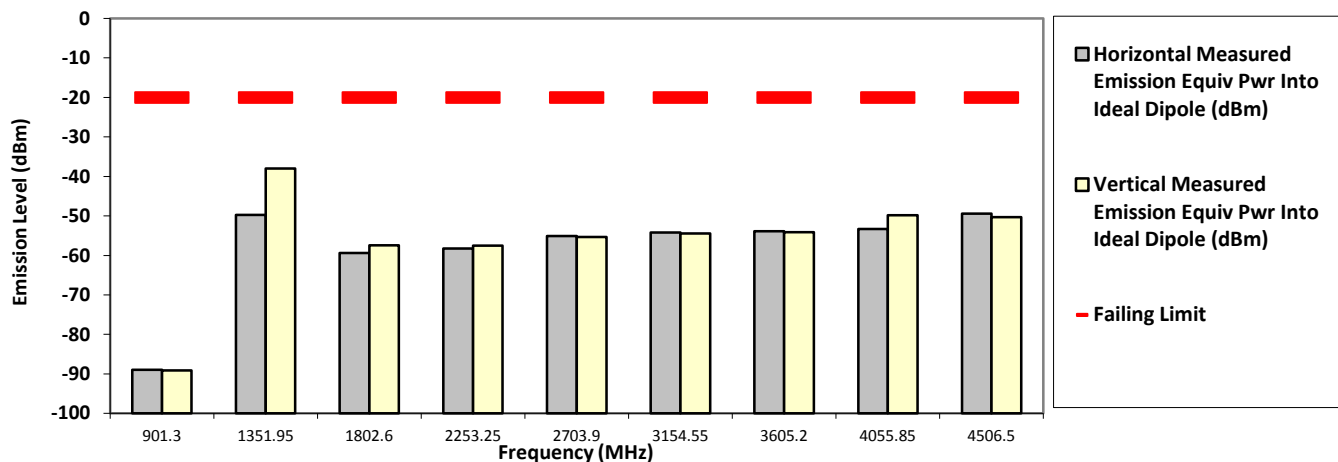

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Sep 11, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.7 Hum(%RH): 73.3

System MU: 5.01 dB

Remarks:

Passed Results

Marginal Results

Failed Results

Model #: H51SDH9PW7AN
 Battery Part No: NNTN8128BR
 Test Mode: TX C4FM
 459.125000 MHz


SAC Transmitter Radiated Emission:
 S/N: 426CSP2993
 Accy Part No: NA

12.5 kHz

5.600 Watt(s) /Max Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
918.2500	-20.0000	-89.1869 **	-87.8123 **
1377.3750	-20.0000	-49.7500 **	-41.7000 **
1836.5000	-20.0000	-58.3699 **	-56.9041 **
2295.6250	-20.0000	-57.2334 **	-56.5831 **
2754.7500	-20.0000	-55.4998 **	-55.5274 **
3213.8750	-20.0000	-52.5893 **	-53.4512 **
3673.0000	-20.0000	-55.1599 **	-53.9017 **
4132.1250	-20.0000	-52.1403 **	-49.1228 **
4591.2500	-20.0000	-44.3600 **	-45.7000 **

RADIATED SPURIOUS EMISSIONS

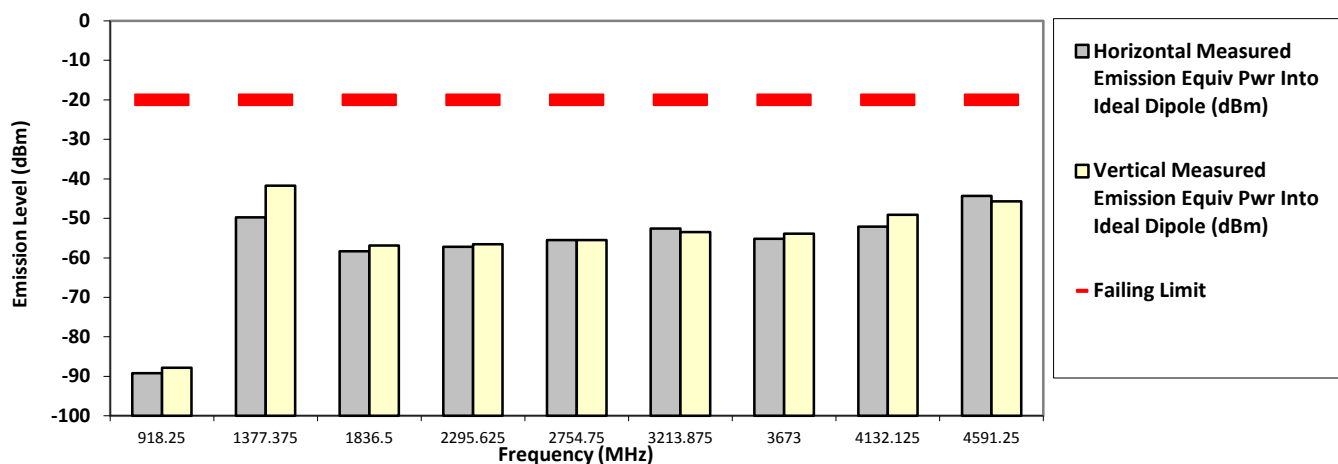

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Sep 11, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.7 Hum(%RH): 73.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: H51SDH9PW7AN
 Battery Part No: NNTN8128BR
 Test Mode: TX C4FM
 467.775000 MHz


SAC Transmitter Radiated Emission:
 S/N: 426CSP2993
 Accy Part No: NA

12.5 kHz

5.600 Watt(s) /Max Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-20.0000	-89.0410 **	-87.7568 **
1403.3250	-20.0000	-50.0900 **	-43.2600 **
1871.1000	-20.0000	-48.9000 **	-46.5600 **
2338.8750	-20.0000	-56.5992 **	-57.6988 **
2806.6500	-20.0000	-55.0101 **	-56.1393 **
3274.4250	-20.0000	-54.1010 **	-53.5652 **
3742.2000	-20.0000	-54.8690 **	-53.4532 **
4209.9750	-20.0000	-48.2100 **	-46.7600 **
4677.7500	-20.0000	-49.2344 **	-51.4202 **

RADIATED SPURIOUS EMISSIONS

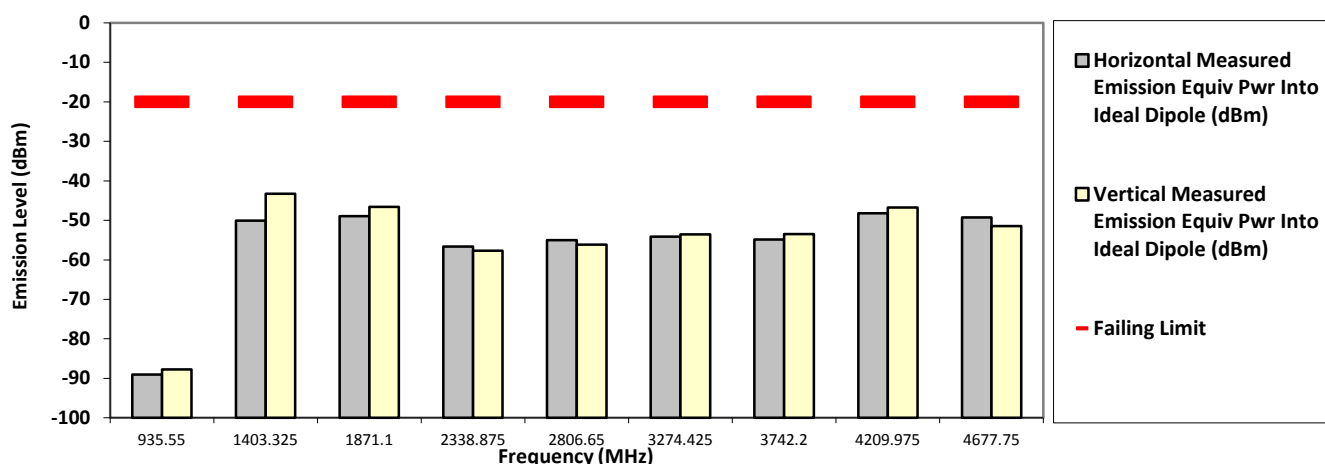

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Sep 11, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.7 Hum(%RH): 73.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: H51SDH9PW7AN
 Battery Part No: NNTN8128BR
 Test Mode: TX C4FM
 511.987500 MHz


SAC Transmitter Radiated Emission:
 S/N: 426CSP2993
 Accy Part No: NA

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1023.9750	-20.0000	-49.2200 **	-48.3600 **
1535.9625	-20.0000	-61.1750 **	-58.6094 **
2047.9500	-20.0000	-57.6236 **	-56.4856 **
2559.9375	-20.0000	-53.2333 **	-54.8693 **
3071.9250	-20.0000	-52.9678 **	-53.6399 **
3583.9125	-20.0000	-53.2011 **	-53.7331 **
4095.9000	-20.0000	-53.8027 **	-52.9646 **
4607.8875	-20.0000	-50.9325 **	-50.4816 **
5119.8750	-20.0000	-49.9802 **	-50.7014 **

RADIATED SPURIOUS EMISSIONS

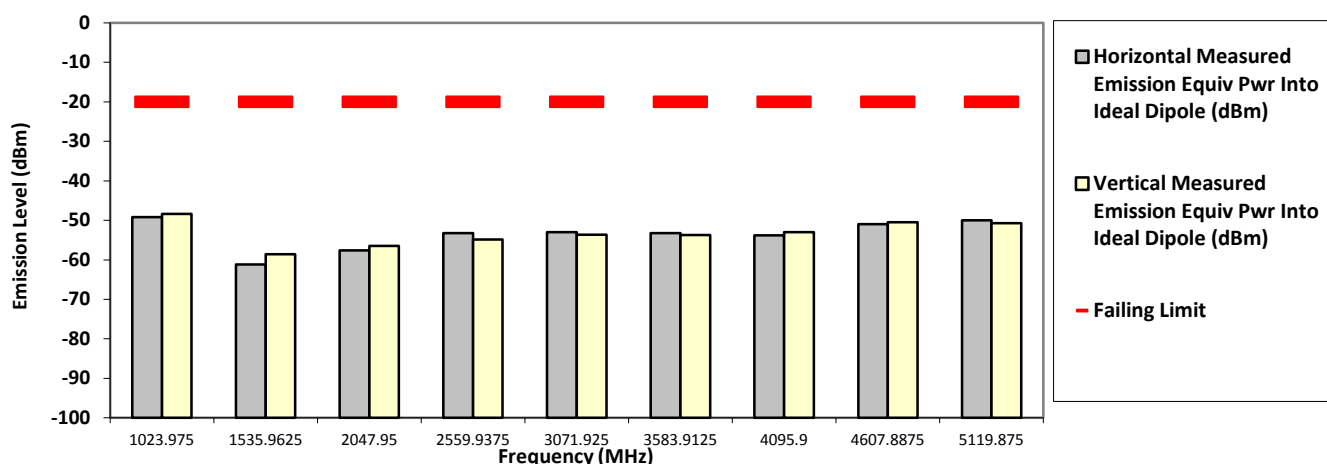

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Sep 11, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.7 Hum(%RH): 73.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: H51SDH9PW7AN
 Battery Part No: NNTN8128BR
 Test Mode: TX C4FM
 511.987500 MHz


SAC Transmitter Radiated Emission:
 S/N: 426CSP2993
 Accy Part No: NA

12.5 kHz

5.600 Watt(s) /Max Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1023.9750	-20.0000	-50.6100 **	-48.2000 **
1535.9625	-20.0000	-53.3500 **	-49.5500 **
2047.9500	-20.0000	-57.1829 **	-57.1937 **
2559.9375	-20.0000	-54.7331 **	-54.1957 **
3071.9250	-20.0000	-52.6227 **	-52.2372 **
3583.9125	-20.0000	-54.3643 **	-53.8058 **
4095.9000	-20.0000	-51.7539 **	-49.9940 **
4607.8875	-20.0000	-48.5093 **	-49.6703 **
5119.8750	-20.0000	-50.6431 **	-49.0886 **

RADIATED SPURIOUS EMISSIONS

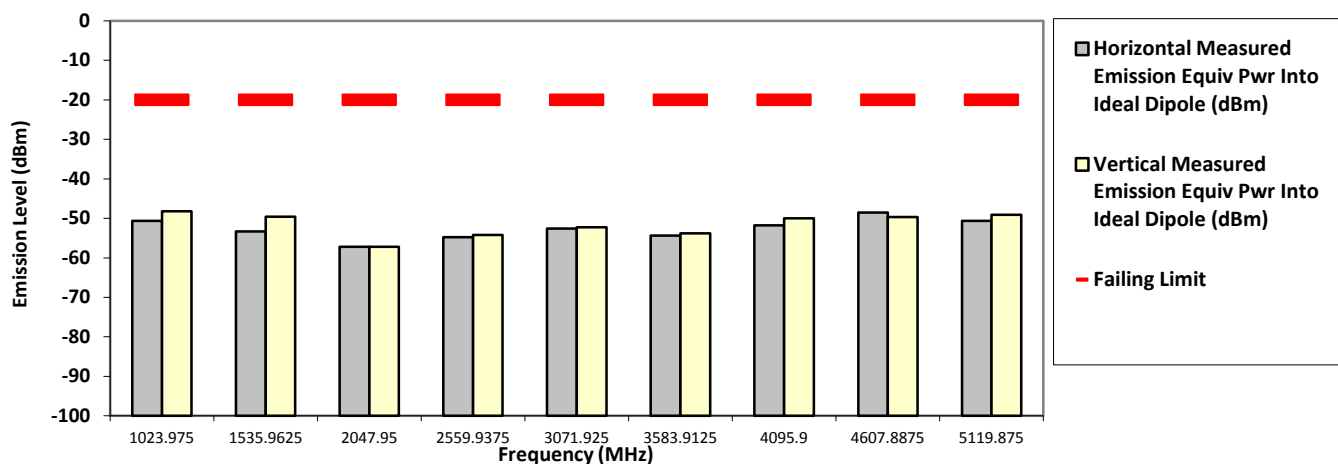

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Sep 11, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.7 Hum(%RH): 73.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: H51SDH9PW7AN
Battery Part No: NNTN8128BR
Test Mode: TX C4FM
450.650000 MHz


SAC Transmitter Radiated Emission:
S/N: 426CSP2993
Accy Part No: NA

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
901.3000	-20.0000	-90.1387 **	-93.7933 **
1351.9500	-20.0000	-60.7614 **	-59.6267 **
1802.6000	-20.0000	-60.0914 **	-60.7286 **
2253.2500	-20.0000	-57.3270 **	-57.5502 **
2703.9000	-20.0000	-54.0156 **	-55.6539 **
3154.5500	-20.0000	-53.0617 **	-54.3747 **
3605.2000	-20.0000	-54.9912 **	-54.9160 **
4055.8500	-20.0000	-53.6386 **	-52.8619 **
4506.5000	-20.0000	-49.8016 **	-51.7202 **

RADIATED SPURIOUS EMISSIONS

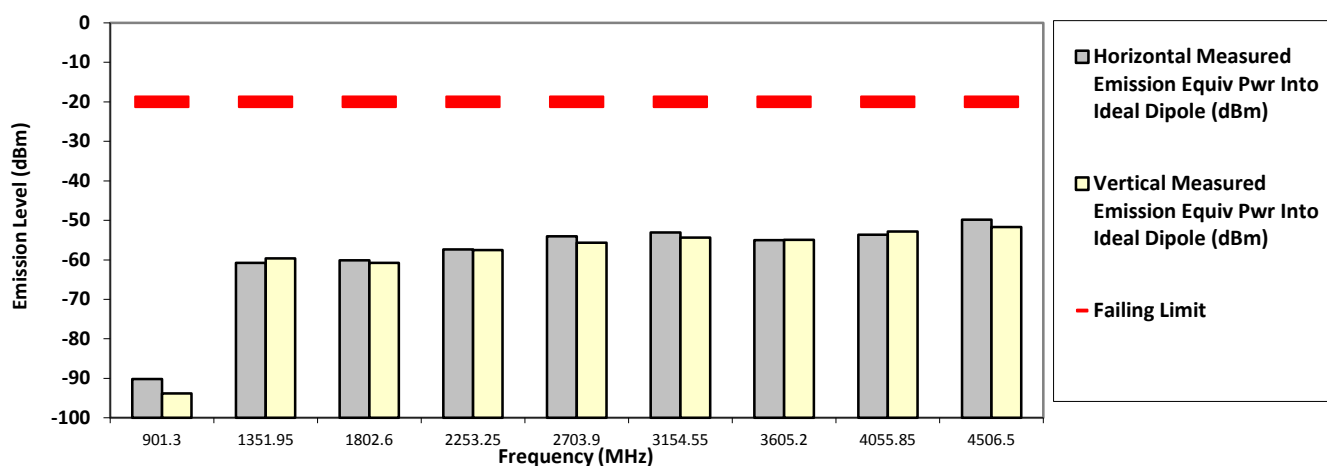

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Sep 11, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.7 Hum(%RH): 73.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: H51SDH9PW7AN
 Battery Part No: NNTN8128BR
 Test Mode: TX C4FM
 467.775000 MHz


SAC Transmitter Radiated Emission:
 S/N: 426CSP2993
 Accy Part No: NA

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-20.0000	-89.1462 **	-95.1118 **
1403.3250	-20.0000	-65.1472 **	-61.5670 **
1871.1000	-20.0000	-60.7020 **	-57.0313 **
2338.8750	-20.0000	-58.9195 **	-56.6906 **
2806.6500	-20.0000	-59.4609 **	-56.8404 **
3274.4250	-20.0000	-55.5579 **	-52.3910 **
3742.2000	-20.0000	-55.7658 **	-52.4001 **
4209.9750	-20.0000	-56.6034 **	-53.3837 **
4677.7500	-20.0000	-53.8326 **	-50.2465 **

RADIATED SPURIOUS EMISSIONS

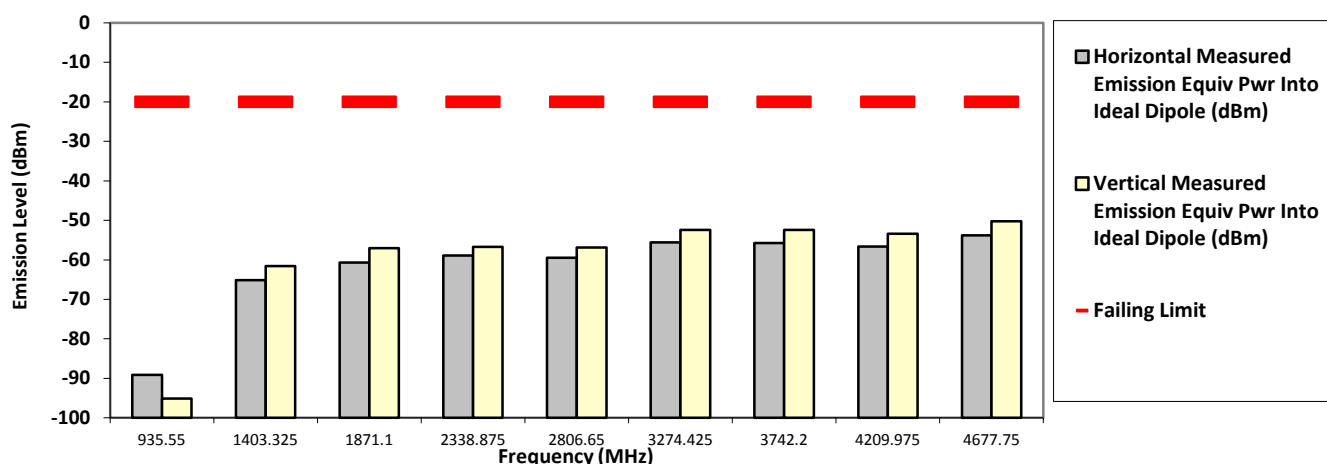

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Sep 11, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.7 Hum(%RH): 73.3

System MU: 5.01 dB

Remarks:


Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: H51SDH9PW7AN
 Battery Part No: NNTN8128BR
 Test Mode: TX Phase II
 450.650000 MHz

SAC Transmitter Radiated Emission:
 S/N: 426CSP2993
 Accy Part No: NA
 12.5 kHz 5.600 Watt(s) /Max Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
901.3000	-20.0000	-90.2813 **	-89.5037 **
1351.9500	-20.0000	-50.1000 **	-37.9500 **
1802.6000	-20.0000	-60.3535 **	-57.9058 **
2253.2500	-20.0000	-56.9545 **	-57.0309 **
2703.9000	-20.0000	-52.9122 **	-56.4032 **
3154.5500	-20.0000	-54.0688 **	-53.7041 **
3605.2000	-20.0000	-54.4877 **	-54.9127 **
4055.8500	-20.0000	-52.4026 **	-51.0697 **
4506.5000	-20.0000	-48.7576 **	-50.8121 **

RADIATED SPURIOUS EMISSIONS

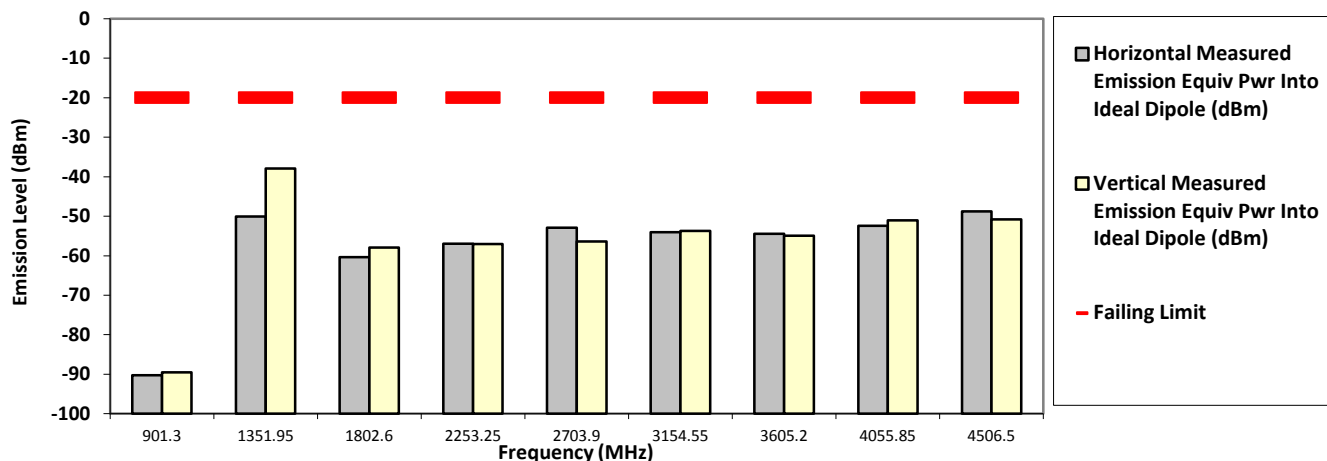

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Sep 11, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.7 Hum(%RH): 73.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: H51SDH9PW7AN
 Battery Part No: NNTN8128BR
 Test Mode: TX Phase II
 459.125000 MHz


SAC Transmitter Radiated Emission:
 S/N: 426CSP2993
 Accy Part No: NA

12.5 kHz

5.600 Watt(s) /Max Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
918.2500	-20.0000	-90.0494 **	-89.0793 **
1377.3750	-20.0000	-51.4500 **	-40.9600 **
1836.5000	-20.0000	-59.0039 **	-56.0482 **
2295.6250	-20.0000	-57.2793 **	-56.6380 **
2754.7500	-20.0000	-55.0082 **	-55.6140 **
3213.8750	-20.0000	-51.3317 **	-53.1380 **
3673.0000	-20.0000	-54.3766 **	-54.5462 **
4132.1250	-20.0000	-48.2700 **	-46.1300 **
4591.2500	-20.0000	-44.6900 **	-44.5300 **

RADIATED SPURIOUS EMISSIONS

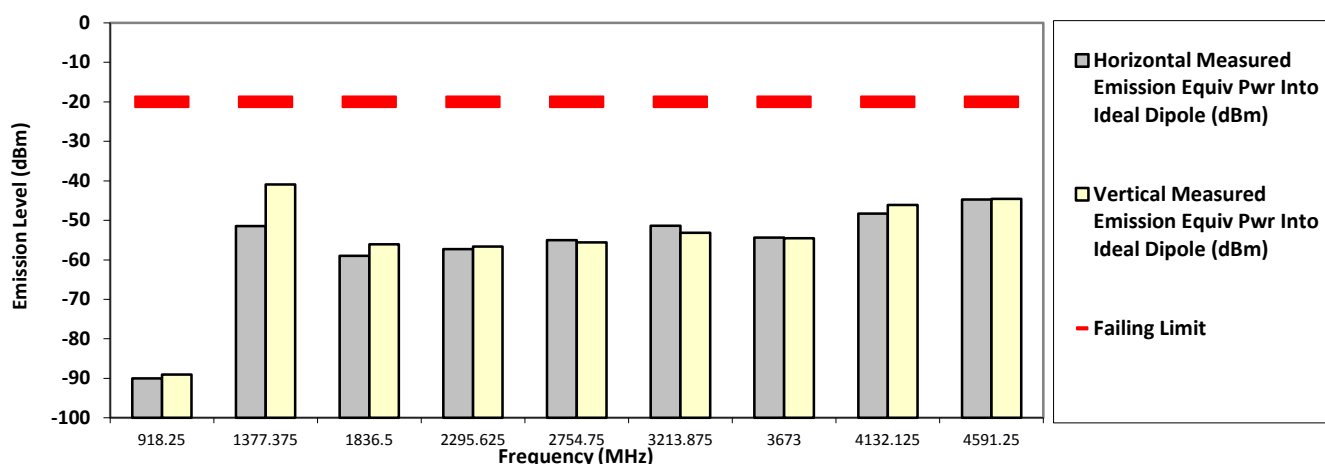

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Sep 11, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.7 Hum(%RH): 73.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: H51SDH9PW7AN
 Battery Part No: NNTN8128BR
 Test Mode: TX Phase II
 467.775000 MHz


SAC Transmitter Radiated Emission:
 S/N: 426CSP2993
 Accy Part No: NA

12.5 kHz

5.600 Watt(s) /Max Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-20.0000	-89.6845 **	-87.5312 **
1403.3250	-20.0000	-51.7000 **	-43.3900 **
1871.1000	-20.0000	-50.1300 **	-53.0600 **
2338.8750	-20.0000	-56.8773 **	-56.0356 **
2806.6500	-20.0000	-55.0397 **	-55.5873 **
3274.4250	-20.0000	-53.2743 **	-53.2884 **
3742.2000	-20.0000	-54.7522 **	-54.4863 **
4209.9750	-20.0000	-48.3100 **	-47.2600 **
4677.7500	-20.0000	-42.2900 **	-47.2000 **

RADIATED SPURIOUS EMISSIONS

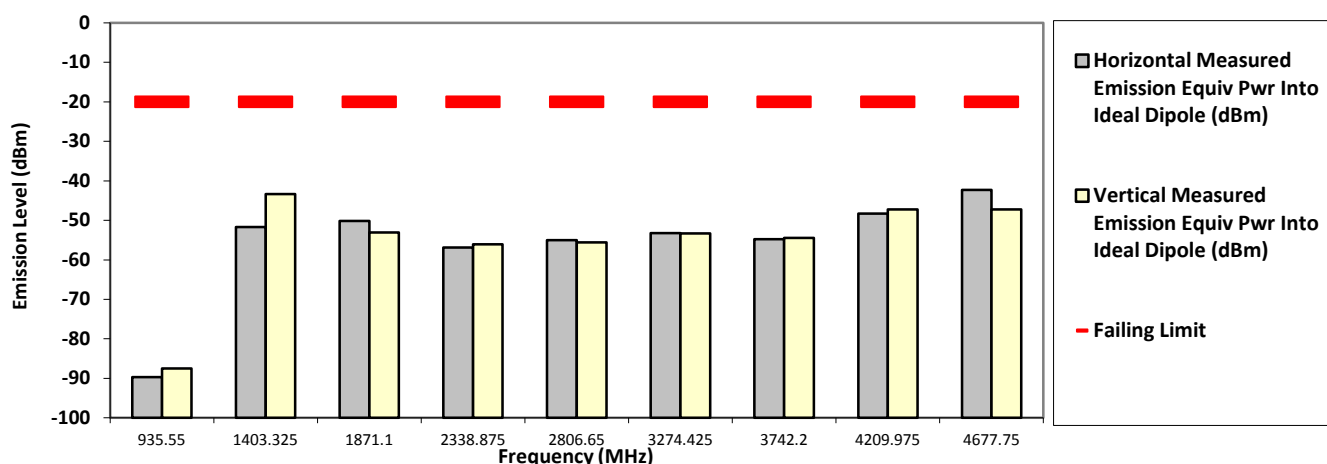

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Sep 11, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.7 Hum(%RH): 73.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: H51SDH9PW7AN
 Battery Part No: NNTN8128BR
 Test Mode: TX Phase II
 511.987500 MHz


SAC Transmitter Radiated Emission:
 S/N: 426CSP2993
 Accy Part No: NA

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1023.9750	-20.0000	-48.1400 **	-39.3500 **
1535.9625	-20.0000	-61.1300 **	-64.7834 **
2047.9500	-20.0000	-57.7695 **	-62.0269 **
2559.9375	-20.0000	-53.3373 **	-57.8024 **
3071.9250	-20.0000	-52.4912 **	-56.7729 **
3583.9125	-20.0000	-54.1774 **	-58.6981 **
4095.9000	-20.0000	-52.8748 **	-59.1402 **
4607.8875	-20.0000	-51.6023 **	-53.1182 **
5119.8750	-20.0000	-50.2787 **	-52.6916 **

RADIATED SPURIOUS EMISSIONS

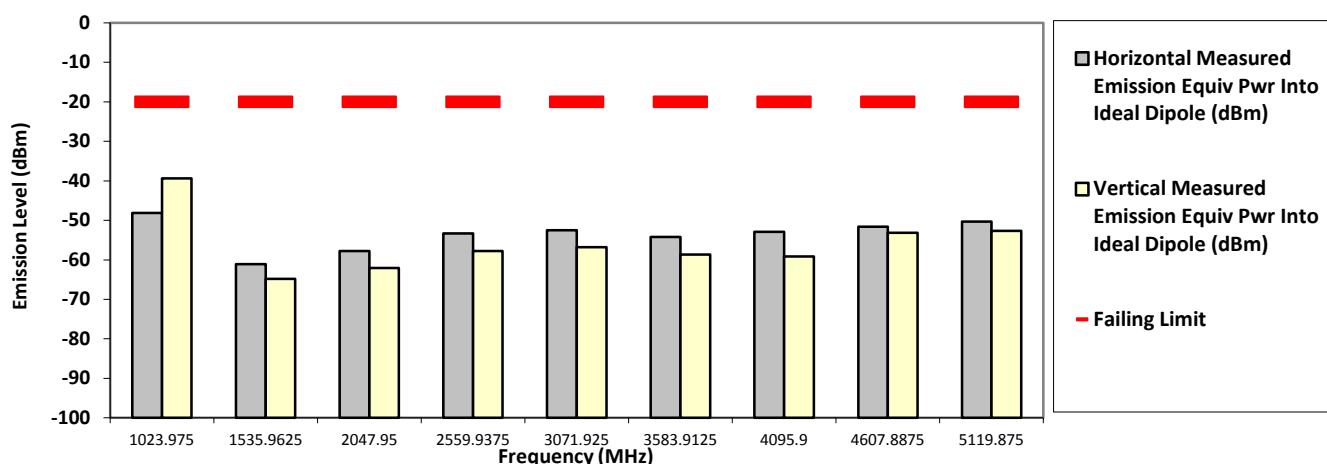

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Sep 11, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.7 Hum(%RH): 73.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: H51SDH9PW7AN
 Battery Part No: NNTN8128BR
 Test Mode: TX Phase II
 511.987500 MHz


SAC Transmitter Radiated Emission:
 S/N: 426CSP2993
 Accy Part No: NA

12.5 kHz

5.600 Watt(s) /Max Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1023.9750	-20.0000	-45.8200 **	-43.1200 **
1535.9625	-20.0000	-54.2000 **	-50.4800 **
2047.9500	-20.0000	-57.7618 **	-57.2088 **
2559.9375	-20.0000	-52.8606 **	-54.0757 **
3071.9250	-20.0000	-52.3894 **	-52.4875 **
3583.9125	-20.0000	-54.4548 **	-54.3945 **
4095.9000	-20.0000	-52.3090 **	-51.9262 **
4607.8875	-20.0000	-49.9156 **	-50.4488 **
5119.8750	-20.0000	-49.1592 **	-49.8635 **

RADIATED SPURIOUS EMISSIONS

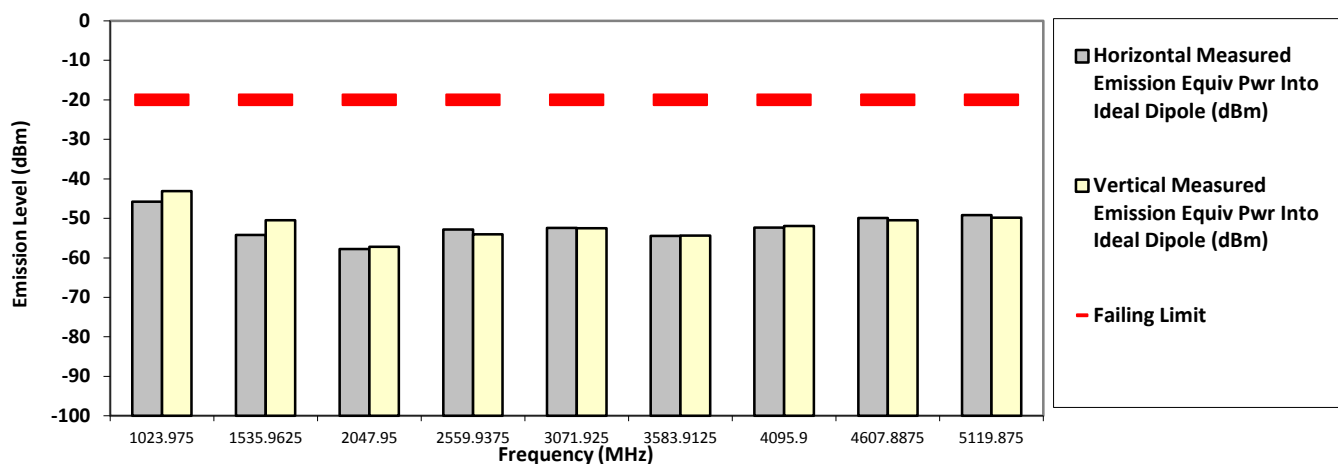

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Sep 11, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.7 Hum(%RH): 73.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: H51SDH9PW7AN
 Battery Part No: NNTN8128BR
 Test Mode: TX Phase II
 450.650000 MHz


SAC Transmitter Radiated Emission:
 S/N: 426CSP2993
 Accy Part No: NA

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
901.3000	-20.0000	-89.9472 **	-89.9839 **
1351.9500	-20.0000	-60.9546 **	-62.4662 **
1802.6000	-20.0000	-60.3051 **	-61.1484 **
2253.2500	-20.0000	-57.8604 **	-59.6357 **
2703.9000	-20.0000	-54.1243 **	-57.2243 **
3154.5500	-20.0000	-54.2638 **	-58.1070 **
3605.2000	-20.0000	-55.0714 **	-55.6073 **
4055.8500	-20.0000	-52.8947 **	-56.4886 **
4506.5000	-20.0000	-50.1137 **	-54.1067 **

RADIATED SPURIOUS EMISSIONS

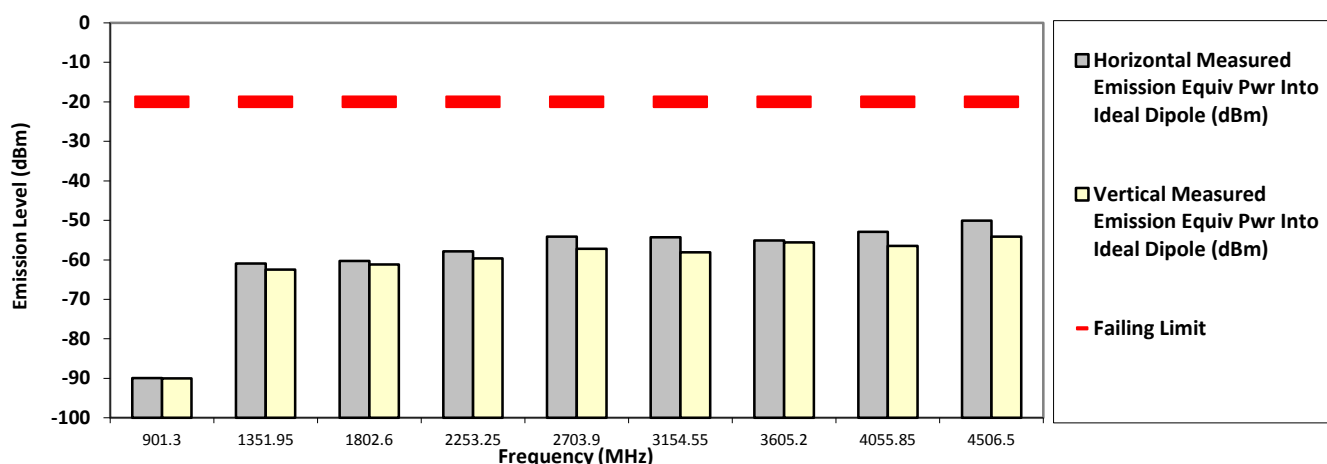

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Sep 11, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.7 Hum(%RH): 73.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: H51SDH9PW7AN
 Battery Part No: NNTN8128BR
 Test Mode: TX Phase II
 467.775000 MHz


SAC Transmitter Radiated Emission:
 S/N: 426CSP2993
 Accy Part No: NA

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-20.0000	-89.8780 **	-89.6537 **
1403.3250	-20.0000	-62.3105 **	-60.1190 **
1871.1000	-20.0000	-60.3429 **	-57.6082 **
2338.8750	-20.0000	-56.8344 **	-57.5815 **
2806.6500	-20.0000	-55.0497 **	-55.4236 **
3274.4250	-20.0000	-53.3265 **	-53.1301 **
3742.2000	-20.0000	-53.8932 **	-53.9925 **
4209.9750	-20.0000	-52.4392 **	-51.3978 **
4677.7500	-20.0000	-51.4314 **	-51.4040 **

RADIATED SPURIOUS EMISSIONS

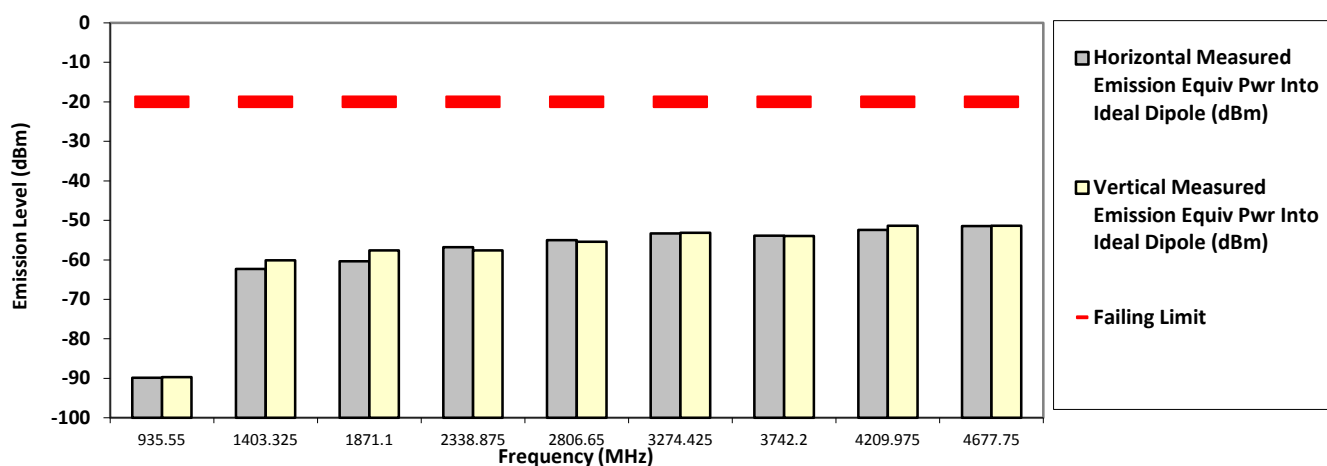

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Sep 11, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.7 Hum(%RH): 73.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------


6.11.4. Test Limit

Table below summarized the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)
25kHz		Not Applicable		43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

6.12. Effective Radiated Power (ERP) / GNSS (EIRP for 1559 - 1610MHz)

6.12.1. Test Setup

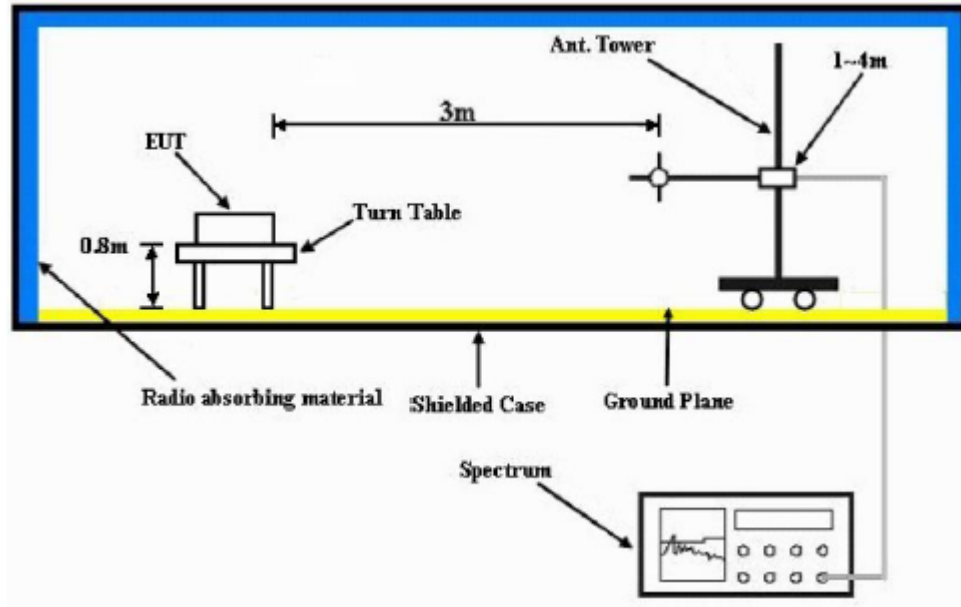

- 1) The spectrum setting for Equivalent Isotropically Radiated Power (EIRP) is RBW = 100 kHz, VBW = 300 kHz. Detector Mode is RMS.
- 2) In the semi-anechoic chamber, setup as illustrated above the EUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The “Read Value” is the spectrum reading of maximum power value.
- 3) The substitution antenna is substituted for EUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 4) $EIRP = \text{“Read Value”} + \text{Measured substitution value} + 2.15$.

6.12.2. Test Result


Not Applicable

6.12.3. Test Limit

The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw). Power is given in terms of effective radiated power (ERP).

6.13. AC Power Line Conducted Spur Emissions

6.13.1. Test Setup

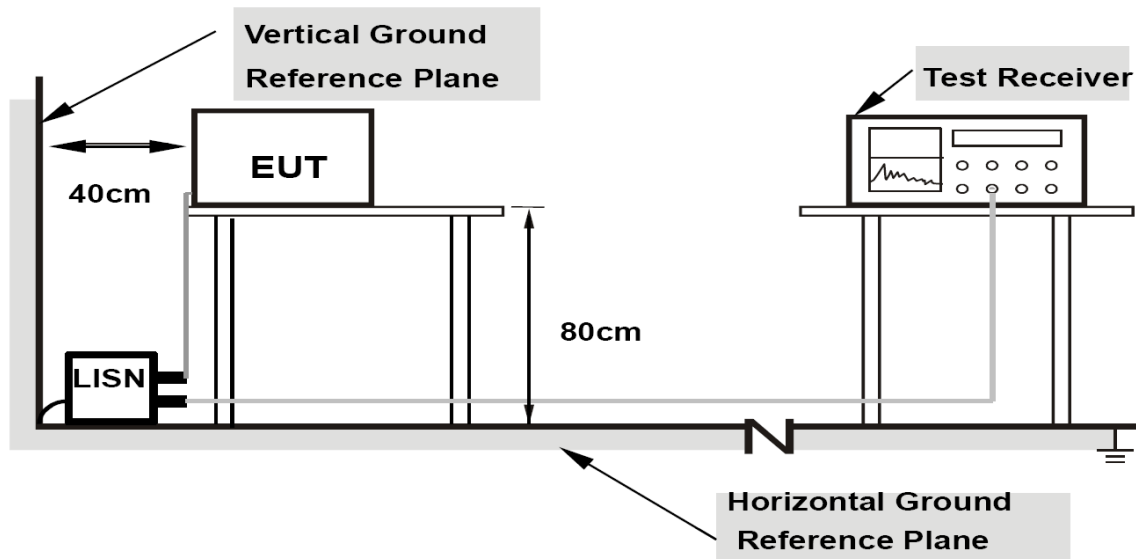

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30MHz was measured.

6.13.2. Test Results

Not Applicable

6.13.3. Test Limits

For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.

Limits for conducted disturbance at the mains ports of class A ITE

Frequency range MHz	Limits dB(μV)	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60
NOTE The lower limit shall apply at the transition frequency.		

Limits for conducted disturbance at the mains ports of class B ITE

Frequency range MHz	Limits dB(μV)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50
NOTE 1 The lower limit shall apply at the transition frequencies.		
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.		