



Test Report No.: RF170103W004-8



FCC TEST REPORT (PART 90R)

Product: LTE mission critical hand held

Model No.: LEX F10

FCC ID: AZ489FT7101

Applicant: Motorola Solutions, Inc.

Address: 8000 West Sunrise Blvd Ft Lauderdale, FL 33322

Manufacturer: Motorola Solutions, Inc.

Address: 8000 West Sunrise Blvd Ft Lauderdale, FL 33322

Prepared by: Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch

Lab Location: No. 34, Chenwulu Section, Guantai Rd., Houjie Town,
Dongguan City, Guangdong 523942, China

TEL: +86 769 8593 5656

FAX: +86 769 8593 1080

E-MAIL: customerservice.dg@cn.bureauveritas.com

Report No.: RF170103W004-8

Received Date: Jan. 03, 2017

Test Date: Feb. 02, 2017 ~ Feb. 24, 2017

Issued Date: Feb. 27, 2017

This report should not be used by the client to claim product certification, approval, or endorsement by A2LA or any government agencies.

Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



TABLE OF CONTENTS

- RELEASE CONTROL RECORD 4**
- 1 CERTIFICATION..... 5**
- 2 SUMMARY OF TEST RESULTS..... 6**
 - 2.1 MEASUREMENT UNCERTAINTY 6
- 3 GENERAL INFORMATION 8**
 - 3.1 GENERAL DESCRIPTION OF EUT 8
 - 3.2 CONFIGURATION OF SYSTEM UNDER TEST 10
 - 3.3 DESCRIPTION OF SUPPORT UNITS 11
 - 3.4 TEST ITEM AND TEST CONFIGURATION..... 11
 - 3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS 13
- 4 TEST TYPES AND RESULTS..... 14**
 - 4.1 OUTPUT POWER MEASUREMENT 14
 - 4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT 14
 - 4.1.2 TEST PROCEDURES 15
 - 4.1.3 TEST SETUP 16
 - 4.1.4 EUT OPERATING CONDITIONS..... 16
 - 4.1.5 TEST RESULTS 17
 - 4.2 FREQUENCY STABILITY MEASUREMENT 19
 - 4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT 19
 - 4.2.2 TEST PROCEDURE 19
 - 4.2.3 TEST SETUP 20
 - 4.2.4 EUT OPERATING CONDITIONS..... 20
 - 4.2.5 TEST RESULTS 21
 - 4.3 OCCUPIED BANDWIDTH MEASUREMENT 23
 - 4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT 23
 - 4.3.2 TEST SETUP 23
 - 4.3.3 TEST PROCEDURES 23
 - 4.3.4 EUT OPERATING CONDITIONS 23
 - 4.4 EMISSION MASK MEASUREMENT 25
 - 4.4.1 LIMITS OF EMISSION MASK MEASUREMENT 25
 - 4.4.2 TEST PROCEDURES 25
 - 4.4.3 TEST SETUP 25
 - 4.4.4 EUT OPERATING CONDITIONS..... 25
 - 4.4.5 TEST RESULTS 26
 - 4.5 CONDUCTED SPURIOUS EMISSIONS..... 28
 - 4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT 28
 - 4.5.2 TEST PROCEDURE 28
 - 4.5.3 TEST SETUP 28
 - 4.5.4 EUT OPERATING CONDITIONS 29
 - 4.5.5 TEST RESULTS 29
 - 4.6 RADIATED EMISSION MEASUREMENT 32
 - 4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT 32
 - 4.6.2 TEST INSTRUMENTS..... 32
 - 4.6.3 TEST PROCEDURES 33
 - 4.6.4 DEVIATION FROM TEST STANDARD 33
 - 4.6.5 TEST SETUP..... 34



**BUREAU
VERITAS**

Test Report No.: RF170103W004-8

4.6.6	EUT OPERATING CONDITIONS	34
4.6.7	TEST RESULTS	35
5	INFORMATION ON THE TESTING LABORATORIES	37
6	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	42



BUREAU
VERITAS

Test Report No.: RF170103W004-8

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF170103W004-8	Original release	Feb. 27, 2017

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
2.1046 90.542(a)(7)	Maximum Peak Output Power Limit	PASS	Meet the requirement of limit.
2.1055 90.539	Frequency Stability	PASS	Meet the requirement of limit.
2.1049	Occupied Bandwidth	PASS	Meet the requirement of limit.
90.210(b)	Emission Mask	PASS	Meet the requirement of limit.
2.1051 90.543(e)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1051 90.543(e)(2)	Emission in the 769–775 MHz and 799–805 MHz band	PASS	Meet the requirement of limit.
2.1053 90.543(e)	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -14.53dB at 30.00MHz.
2.1053 90.543(f)	Emissions in the band 1559–1610 MHz	PASS	Meet the requirement of limit. Minimum passing margin is -30.81dB at 1572MHz.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.70dB
Radiated emissions	9KHz ~ 30MHz	2.90dB
	30MHz ~ 1GMHz	4.06dB
	1GHz ~ 18GHz	4.58dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



2.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Apr. 05,16	Apr. 04,17
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	Nov. 04,16	Nov. 03,17
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Apr. 05,16	Apr. 04,17
Bilog Antenna 1	Teseq	CBL 6111D	30643	Jul. 14, 16	Jul. 13, 17
Bilog Antenna 2	Teseq	CBL 6111D	27089	Jul. 14, 16	Jul. 13, 17
Loop antenna	Daze	ZN30900A	0708	Nov. 28, 16	Nov. 27, 17
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	May 18,16	May 17,17
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062557	May 18,16	May 17,17
10m Semi-anechoic Chamber	CHANGLING	21.4m*12.1m*8.8m	NSEMC006	Mar. 12,16	Mar. 11,18
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SM A	1505	Jul. 27, 16	Jul. 26, 17
Horn Antenna (15GHz-40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	Mar. 12,16	Mar. 11,17
Horn Antenna (15GHz-40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170242	Mar. 12,16	Mar. 11,17
Amplifier	Burgeon	BPA-530	100220	Apr. 05,16	Apr. 04,17
Amplifier (9kHz-1GHz)	SONOMA	310D	186955	Mar. 04,16	Mar. 03, 17
Pre-Amplifier(1-18G)	HP	8449B	3008A00409	Apr. 25,16	Apr. 24,17
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 04,16	Nov. 03,17
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.05,16	Sep. 04,17
Signal Generator	Agilent	N5183A	MY50140980	Nov. 04,16	Nov. 03,17

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GREGT/CHINA and NIM/CHINA.
 2. The test was performed in 10m Semi-anechoic Chamber and RF Oven Room.
 3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 502831.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	LTE mission critical hand held	
MODEL NO.	LEX F10	
TYPE NUMBER	NA	
POWER SUPPLY	5.0Vdc (adapter or host equipment) 3.8Vdc (Li-ion battery)	
MODULATION TECHNOLOGY	LTE Band 14, QPSK, 16QAM	
FREQUENCY RANGE	LTE Band 14 (Channel Bandwidth: 5MHz)	790.5MHz ~ 795.5MHz
	LTE Band 14 (Channel Bandwidth: 10MHz)	793MHz
EMISSION DESIGNATOR	LTE Band 14 (Channel Bandwidth: 5MHz)	4M52G7D
	LTE Band 14 (Channel Bandwidth: 10MHz)	8M90G7D
MAX. ERP POWER	LTE Band 14 (Channel Bandwidth: 5MHz)	182mW
	LTE Band 14 (Channel Bandwidth: 10MHz)	164mW
ANTENNA TYPE	Fixed Internal antenna with -3.5dBi gain	
HW VERSION	C	
SW VERSION	7A.0.0-07-5.1.1-21.00.15	
DATA CABLE	USB Cable: Shielded, Detachable, 1.1m	
I/O PORTS	Refer to user's manual	
ACCESSORY DEVICES	Refer to NOTE as below	

NOTE:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT was powered by the following adapter:

ADAPTER	
BRAND:	Motorola Solutions, Inc.
MODEL:	S24A02
INPUT:	AC 100-240V, 450mA
OUTPUT:	DC 5V, 2100mA



3. The EUT matched the following USB cable:


USB CABLE	
BRAND:	Sunway
MODEL:	TBD
SIGNAL LINE:	1.1 METER

4. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.




3.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION TEST

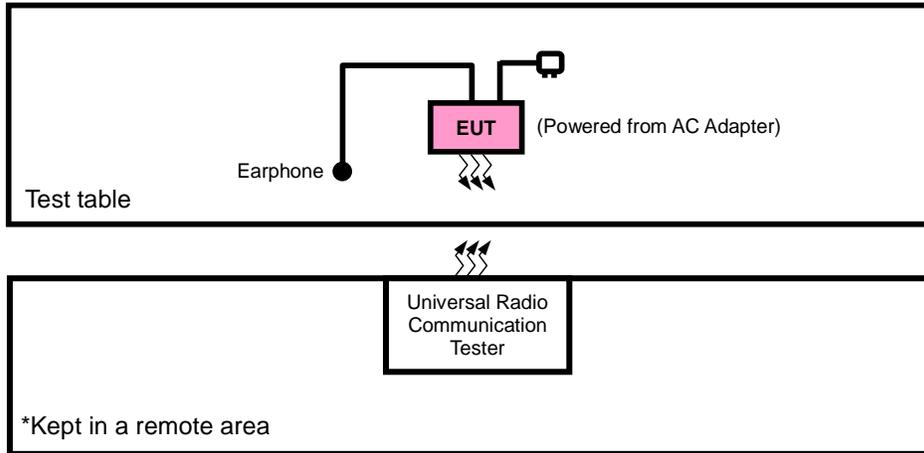

FOR CONDUCTED & E.I.R.P TEST

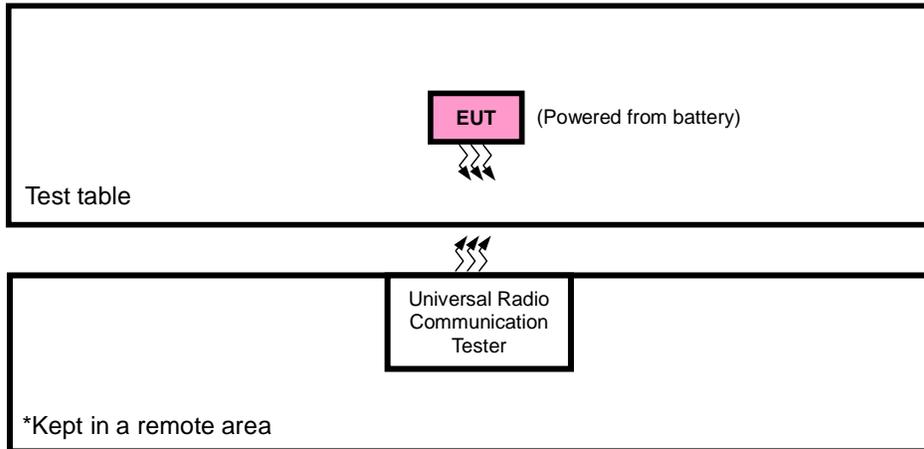



3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A
2	PC	HP	A6608CN	3CR83825X3	N/A
3	Earphone	Minami	ME-816B5-E	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m
2	AC Line: Unshielded, Detachable 1.5m
3	Earphone Cable: Shielded, Detachable, 1.2m

NOTE: All power cords of the above support units are non shielded (1.8m).

3.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane for EIRP and X-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter + Earphone with LTE link
B	EUT + Battery + Earphone with LTE link



LTE BAND 14 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
-	OUTPUT POWER	23305 to 23355	23305, 23330, 23355	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23330	23330	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	E.R.P.	23305 to 23355	23305, 23330, 23355	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23330	23330	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	FREQUENCY STABILITY	23305 to 23355	23305, 23355	5MHz	QPSK	1 RB / 12 RB Offset
		23330	23330	10MHZ	QPSK	1 RB / 49 RB Offset
-	OCCUPIED BANDWIDTH	23305 to 23355	23305, 23330, 23355	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		23330	23330	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	MASK	23305 to 23355	23305, 23330, 23355	5MHz	QPSK, 16QAM	25 RB / 0 RB offset
		23330	23330	10MHZ	QPSK, 16QAM	50 RB / 0 RB offset
-	OUT-OF-BAND EMISSION	23305 to 23355	23305	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
			23330	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset
			23355	5MHz	QPSK, 16QAM	1 RB / 24 RB Offset
		23330	23330	10MHz	QPSK, 16QAM	25 RB / 0 RB Offset
			23330	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
			23330	10MHz	QPSK, 16QAM	1 RB / 49 RB Offset
-	CONDCUETED EMISSION	23305 to 23355	23330	5MHz	QPSK	50 RB / 0 RB Offset
		23330	23330	10MHZ	QPSK	1 RB / 0 RB Offset
-	RADIATED EMISSION	23305 to 23355	23330	5MHz	QPSK	1 RB / 0 RB Offset
		23330	23330	10MHZ	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	24deg. C, 60%RH	3.8Vdc from Battery	Wenliang Wu
FREQUENCY STABILITY	24deg. C, 61%RH	3.8Vdc from Battery	Wenliang Wu
OCCUPIED BANDWIDTH	24deg. C, 61%RH	3.8Vdc from Battery	Wenliang Wu
PEAK TO AVERAGE RATIO	24deg. C, 61%RH	3.8Vdc from Battery	Wenliang Wu
BAND EDGE	24deg. C, 61%RH	3.8Vdc from Battery	Moon Xiong
CONDCUETED EMISSION	24deg. C, 61%RH	3.8Vdc from Battery	Moon Xiong
RADIATED EMISSION	24deg. C, 60%RH	5Vdc from adapter	Tony Zou



**BUREAU
VERITAS**

Test Report No.: RF170103W004-8

3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 90 Subpart R

ANSI/TIA/EIA-603-D

NOTE: All test items have been performed and recorded as per the above standards.



4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Per FCC Part 90.542(a)(6)(7),

Control stations and mobile stations transmitting in the 793–798 MHz band are limited to 30 watts E.R.P.

Portable stations (hand-held devices) transmitting in the 793–798 MHz band are limited to 3 watts E.R.P.

4.1.2 TEST PROCEDURES

ERP MEASUREMENT:

- a. The EUT was set up for the maximum power with LTE link data modulation. The power was measured with Agilent Spectrum Analyzer. All measurements were done at 1 channel. RWB and VBW is 5MHz for LTE
- b. E.I.R.P power measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step a. Record the power level of S.G
- d. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn
- e. E.R.P = E.I.R.P- 2.15 dB


CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with CDMA & LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.




4.1.3 TEST SETUP

ERP MEASUREMENT:

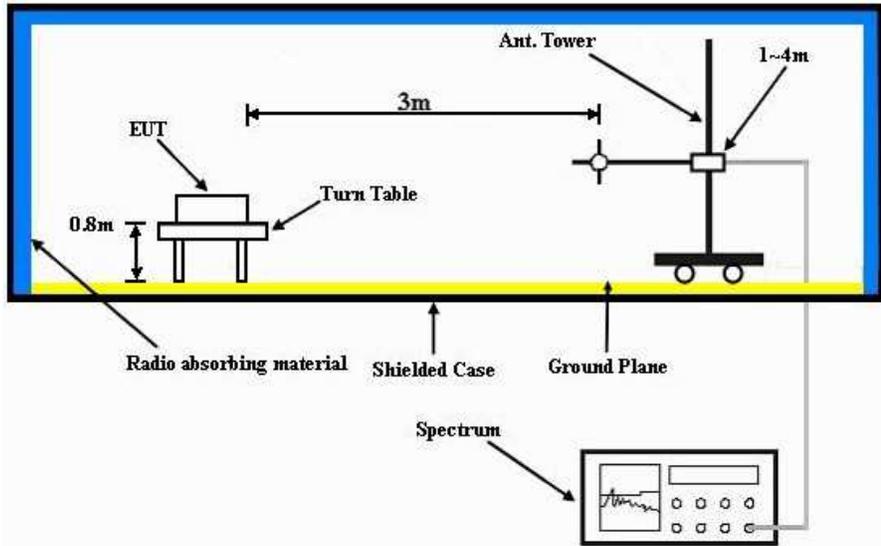

For the actual test configuration, please refer to the attached file (Test Setup Photo).

CONDUCTED POWER MEASUREMENT:

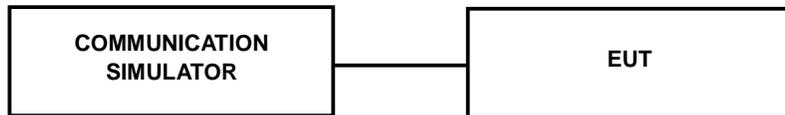

4.1.4 EUT OPERATING CONDITIONS

- 1) Upload test waveform to signal generator and produce test signal to link up with EUT.
- 2) Execute test tool to control EUT transmit at specific modulation, RB size, frequency and output power level continuously.

Note: Test waveform and tool are provided by client.



4.1.5 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

Band / BW	Modulation	RB Size	RB Offset	Low CHG 23305	Mid CH 23330	High CH 23355	3GPP MPR (dB)
				Frequency 790.5 MHz	Frequency 793 MHz	Frequency 795.5 MHz	
14/5	QPSK	1	0	23.21	23.28	23.19	0
		1	12	23.16	23.16	23.14	0
		1	24	23.13	23.10	23.11	0
		12	0	22.24	22.17	22.21	1
		12	6	22.19	22.13	22.16	1
		12	13	22.16	22.06	22.13	1
		25	0	22.21	22.20	22.18	1
	16QAM	1	0	22.13	22.15	22.11	1
		1	12	22.11	22.13	22.11	1
		1	24	22.08	22.10	22.08	1
		12	0	21.19	21.30	21.18	2
		12	6	21.14	21.25	21.13	2
		12	13	21.11	21.22	21.10	2
		25	0	21.16	21.19	21.15	2

Band / BW	Modulation	RB Size	RB Offset	Mid CH 23330	3GPP MPR (dB)
				Frequency 793 MHz	
14/10	QPSK	1	0	23.33	0
		1	12	23.21	0
		1	24	23.15	0
		12	0	22.22	1
		12	6	22.18	1
		12	13	22.11	1
		25	0	22.25	1
	16QAM	1	0	22.20	1
		1	12	22.18	1
		1	24	22.15	1
		12	0	21.35	2
		12	6	21.30	2
		12	13	21.27	2
		25	0	21.24	2



ERP POWER (dBm)

LTE Band 14							
Channel Bandwidth: 5MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
Z	23305	790.5	-8.87	33.18	22.16	164.44	H
	23330	793.0	-8.51	33.26	22.60	182.10	H
	23355	795.5	-9.21	33.28	21.92	155.42	H
	23305	790.5	-15.97	32.25	14.13	25.90	V
	23330	793.0	-15.75	32.34	14.44	27.80	V
	23355	795.5	-16.24	32.41	14.02	25.26	V

LTE Band 14							
Channel Bandwidth: 5MHz / 16QAM							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
Z	23305	790.5	-9.59	33.18	21.44	139.32	H
	23330	793.0	-9.38	33.26	21.73	149.04	H
	23355	795.5	-9.86	33.28	21.27	133.81	H
	23305	790.5	-16.47	32.25	13.63	23.08	V
	23330	793.0	-16.62	32.34	13.57	22.75	V
	23355	795.5	-16.15	32.41	14.11	25.79	V

LTE Band 14							
Channel Bandwidth: 10MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
Z	23330	793.0	-8.96	33.26	22.15	164.17	H
	23330	793.0	-16.20	32.34	13.99	25.05	V

LTE Band 14							
Channel Bandwidth: 10MHz / 16QAM							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
Z	23330	793.0	-10.03	33.26	21.08	128.32	H
	23330	793.0	-17.27	32.34	12.92	19.58	V

4.2 FREQUENCY STABILITY MEASUREMENT

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability of mobile, portable and control transmitters operating in the wideband segment must be 1.25 parts per million or better when AFC is locked to a base station, and 5 parts per million or better when AFC is not locked.

4.2.2 TEST PROCEDURE

- a. The oven room could control the temperatures and humidity.
- b. Power must be removed when changing from one temperature to another or one voltage to another voltage. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- c. Laptop pc is connected the external power supply to control the DC input power. The various Volts from the minimum to maximum working voltage. Each step shall be record the frequency error rate.
- d. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing.
- e. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.3 TEST SETUP

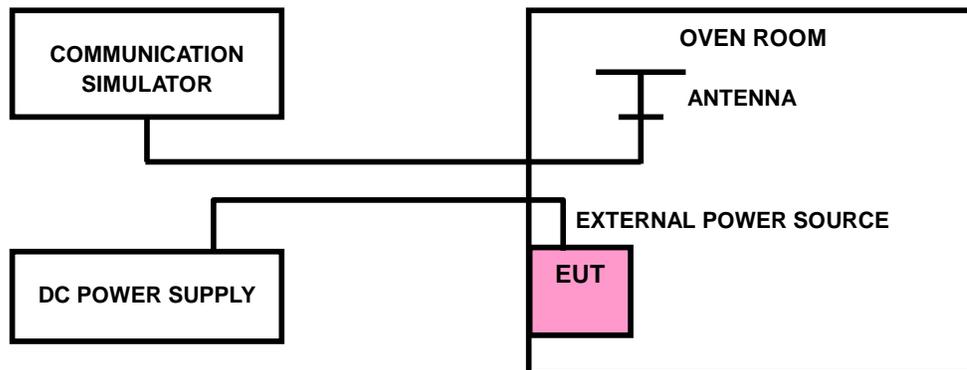

4.2.4 EUT OPERATING CONDITIONS

Same as 4.1.4.

4.2.5 TEST RESULTS

LTE BAND 14

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.8	0.0011	0.0012	2.5
3.5	-0.0014	-0.0016	2.5
4.4	0.0013	0.0014	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.5Vdc to 4.35Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0055	-0.0056	2.5
-20	-0.0047	-0.0049	2.5
-10	-0.0041	-0.0043	2.5
0	-0.0035	-0.0036	2.5
10	-0.0028	-0.0029	2.5
20	-0.0022	-0.0022	2.5
30	-0.0015	-0.0015	2.5
40	-0.0008	-0.0008	2.5
50	-0.0002	-0.0002	2.5
60	0.0004	0.0004	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	10MHz	LIMIT (ppm)
	FREQUENCY ERROR (ppm)	
	Channel	
3.8	0.0012	2.5
3.5	-0.0016	2.5
4.4	0.0013	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.5Vdc to 4.35Vdc.

FREQUENCY ERROR vs. TEMPERATURE.


TEMP. (°C)	10MHz	LIMIT (ppm)
	FREQUENCY ERROR (ppm)	
	Channel	
-30	-0.0059	2.5
-20	-0.0055	2.5
-10	-0.0047	2.5
0	-0.0040	2.5
10	-0.0033	2.5
20	-0.0026	2.5
30	-0.0018	2.5
40	-0.0011	2.5
50	-0.0005	2.5
60	0.0002	2.5

4.3 OCCUPIED BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.3.2 TEST SETUP

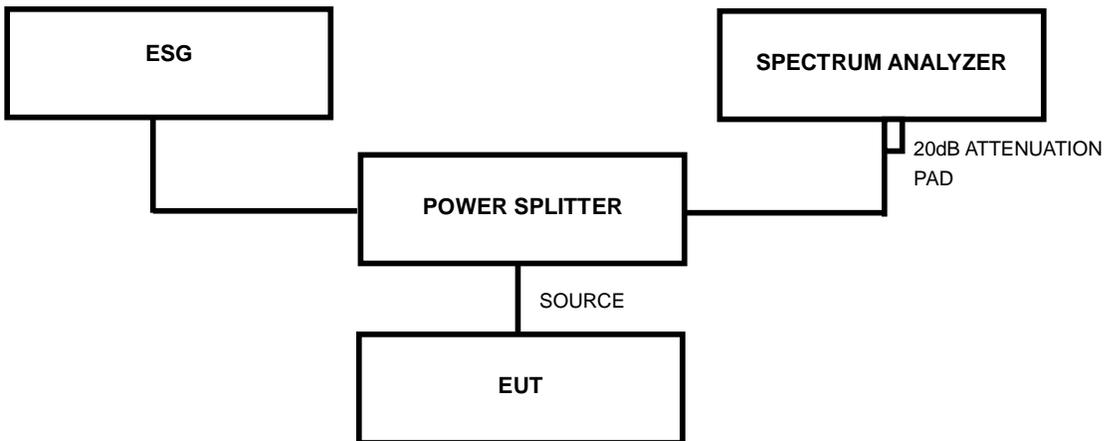

4.3.3 TEST PROCEDURES

- a. The conducted occupied bandwidth used the power splitter via EUT RF power connector between signal generator and spectrum analyzer.
- b. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.


4.3.4 EUT OPERATING CONDITIONS

Same as 4.1.4.



4.3.5 TEST RESULTS

LTE BAND 14							
CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)	
		QPSK	16QAM			QPSK	16QAM
23305	790.5	4.52	4.51	23330	793	8.9	8.9
23330	793	4.49	4.47				
23355	795.5	4.47	4.46				

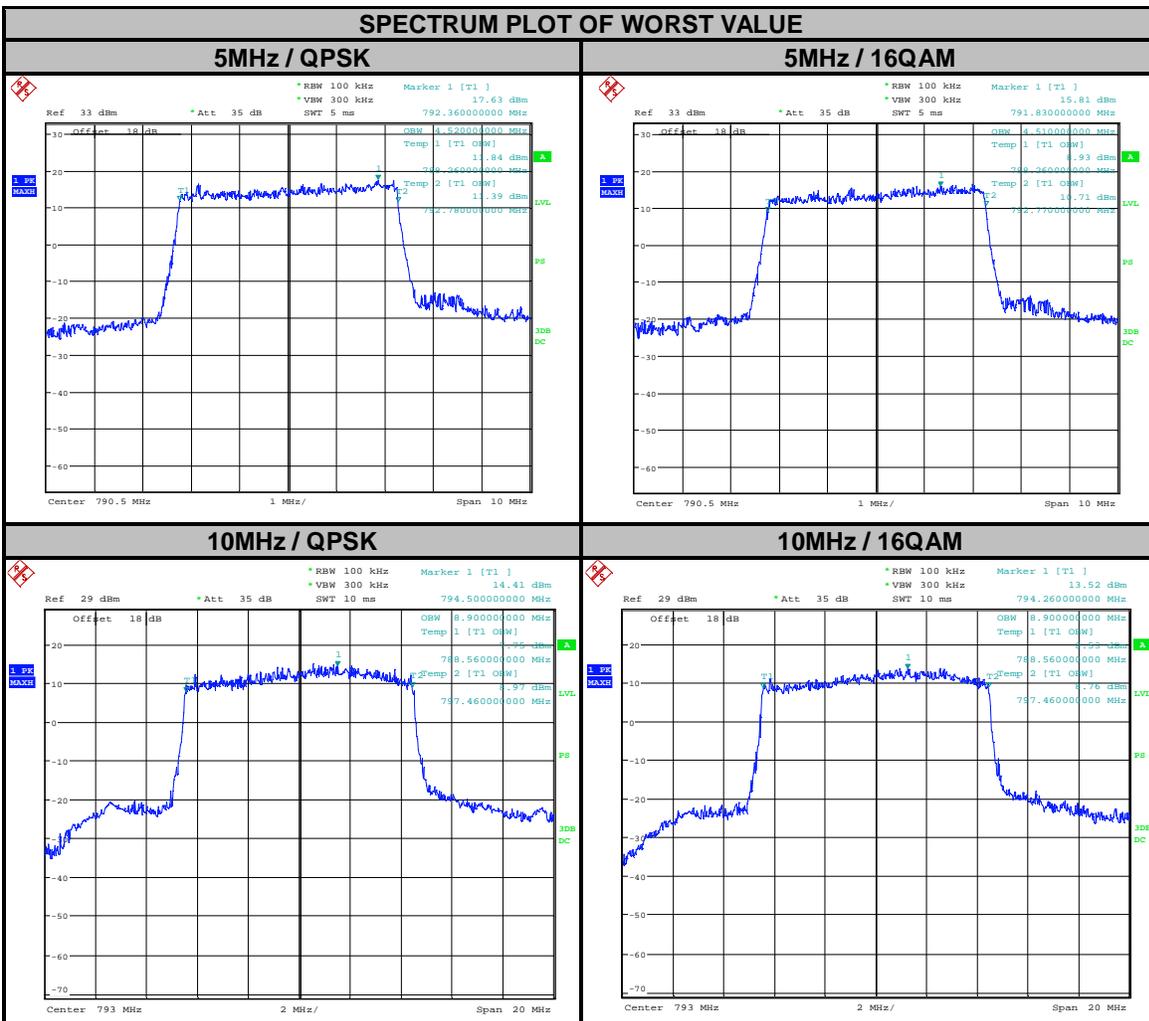

4.4 EMISSION MASK MEASUREMENT

4.4.1 LIMITS OF EMISSION MASK MEASUREMENT

Per 90.210(n), Emission mask shall comply with 90.210(b)

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB

4.4.2 TEST PROCEDURES

1. The power was measured with Agilent Spectrum Analyzer. All measurements were done at 1 channel.
2. The measurement used the power splitter via EUT RF power connector between signal generator and spectrum analyzer.
3. Record the test plot.

4.4.3 TEST SETUP

Same as Item 4.3.3

4.4.4 EUT OPERATING CONDITIONS


Same as 4.1.4.



BUREAU VERITAS

Test Report No.: RF170103W004-8

4.4.5 TEST RESULTS

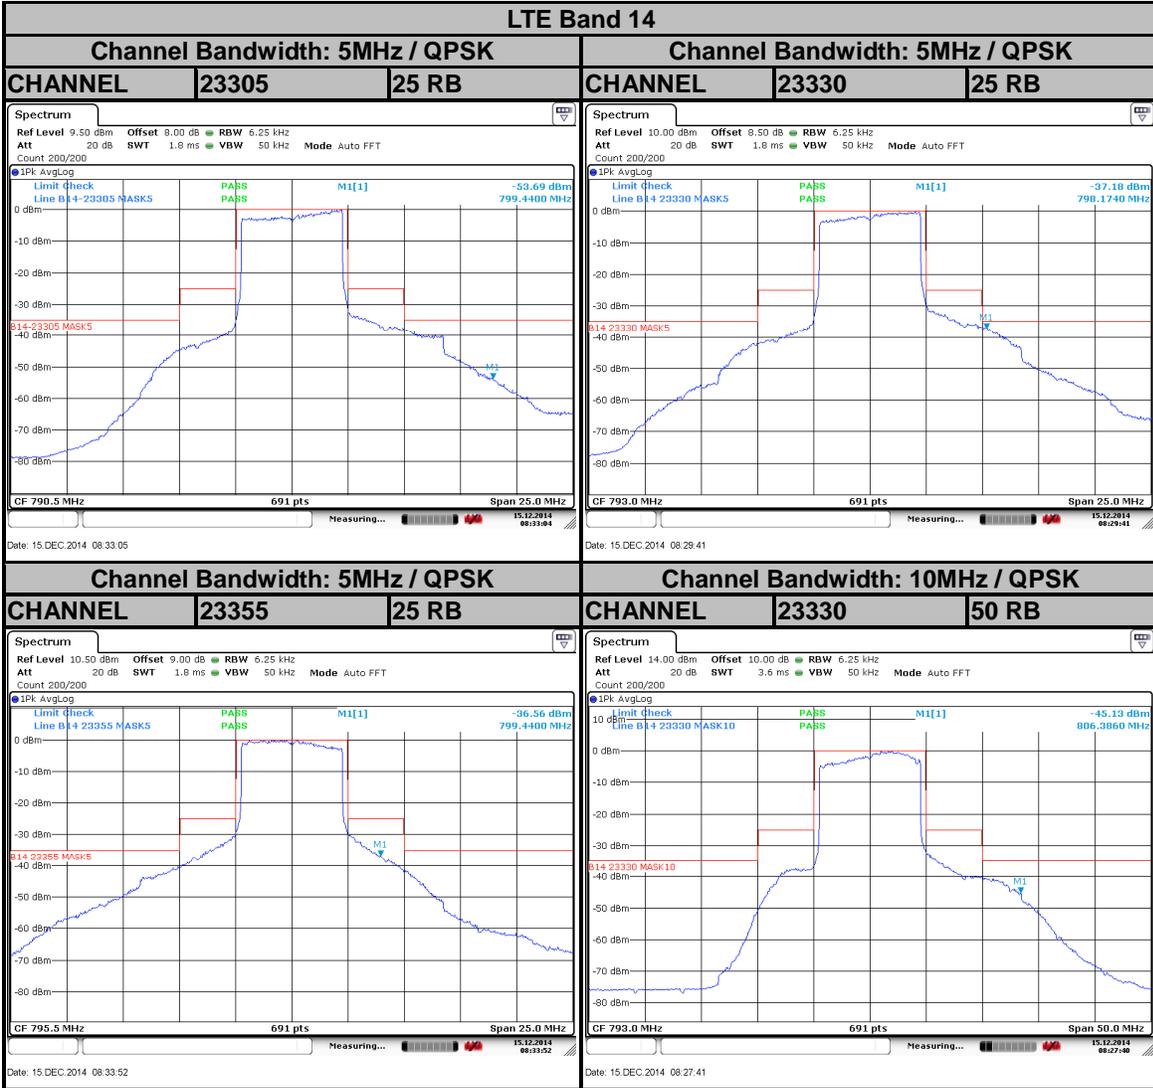

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch


No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU VERITAS

Test Report No.: RF170103W004-8

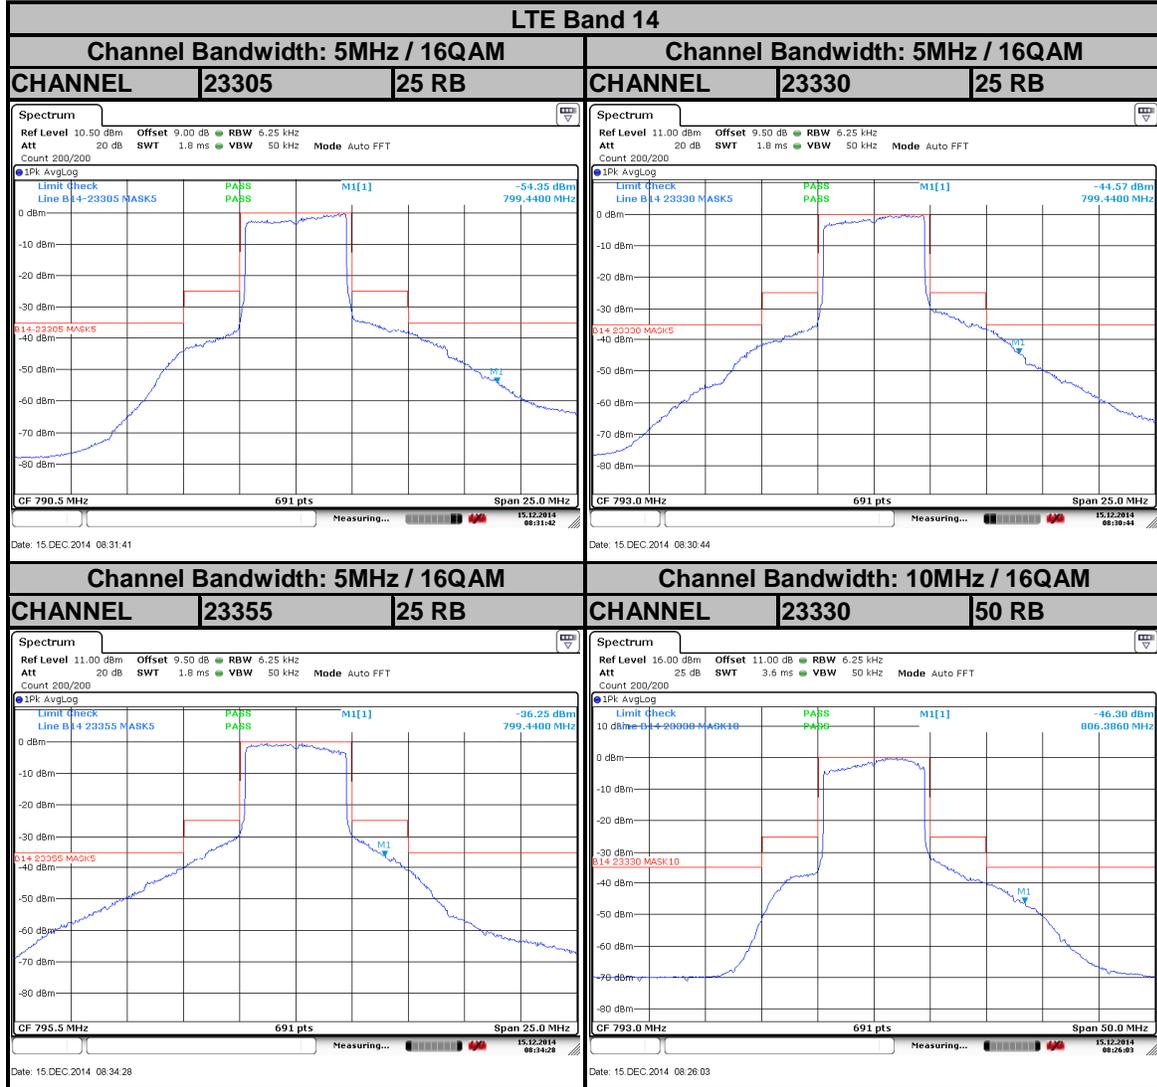

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com

4.5 CONDUCTED SPURIOUS EMISSIONS

4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

Transmitters operating in 758-768 MHz and 788-798 MHz bands must meet the emission limitations in 90.543 (e) of this section.

For operations in the 758–768 MHz and the 793–798 MHz bands, the power of any emission outside the licensee’s frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.
- (2) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB

4.5.2 TEST PROCEDURE

- a. The EUT was set up for the maximum peak power with LTE link data modulation. The power was measured with Agilent Spectrum Analyzer. All measurements were done at 1 channel.
- b. The conducted spurious emission used the power splitter via EUT RF power connector between signal generator and spectrum analyzer.
- c. When the spectrum scanned from 769MHz to 805MHz, The spectrum set RB=6.25kHz, VB=50kHz.
- d. When the spectrum scanned from 30MHz to 8GHz, The spectrum set RB=1MHz, VB=3MHz.

4.5.3 TEST SETUP

Same as 4.3.3




4.5.4 EUT OPERATING CONDITIONS

Same as 4.1.4.

4.5.5 TEST RESULTS


Out-Of-Band Emission Measurement

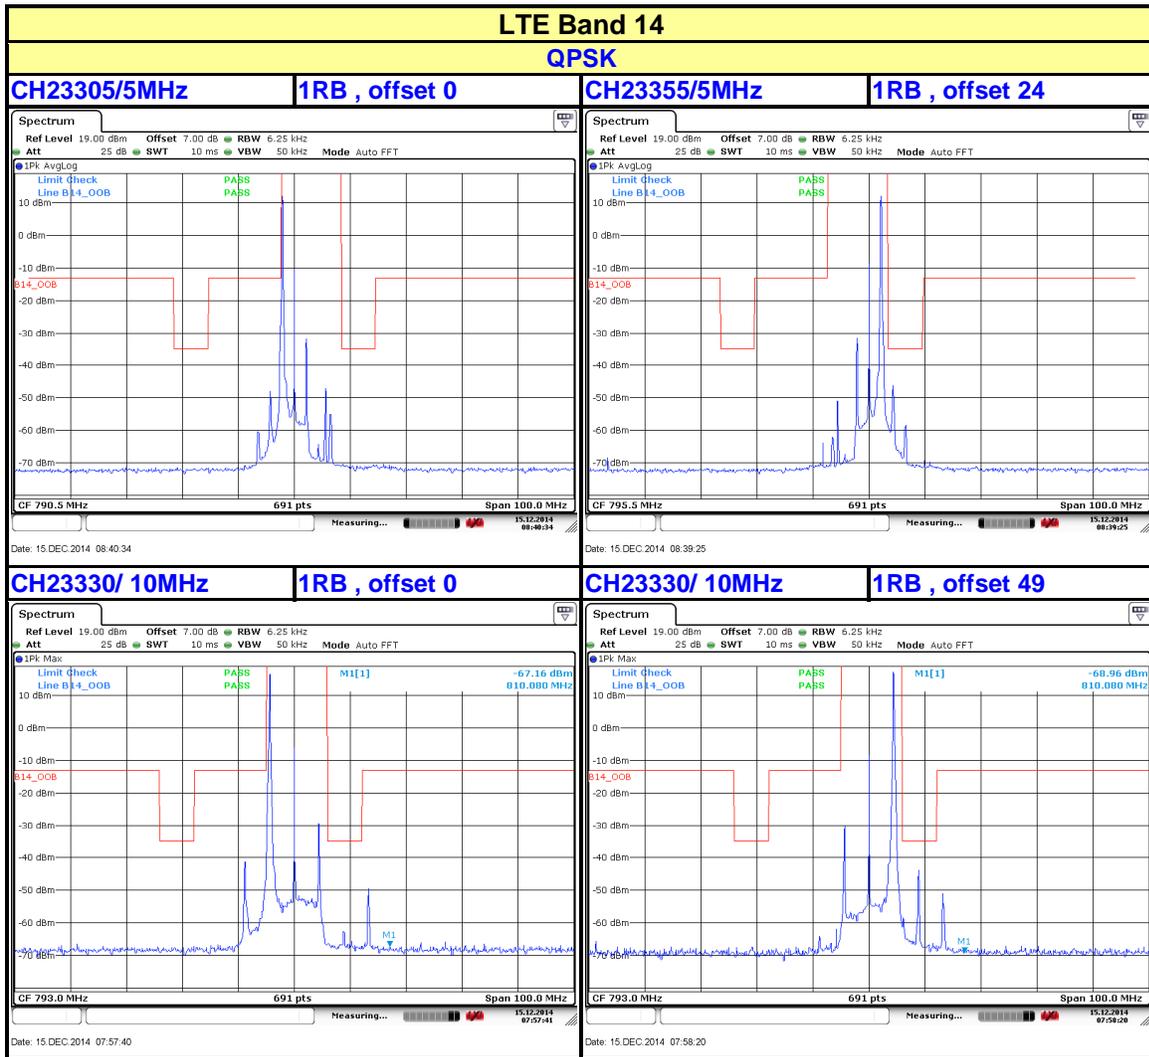



BUREAU VERITAS

Test Report No.: RF170103W004-8

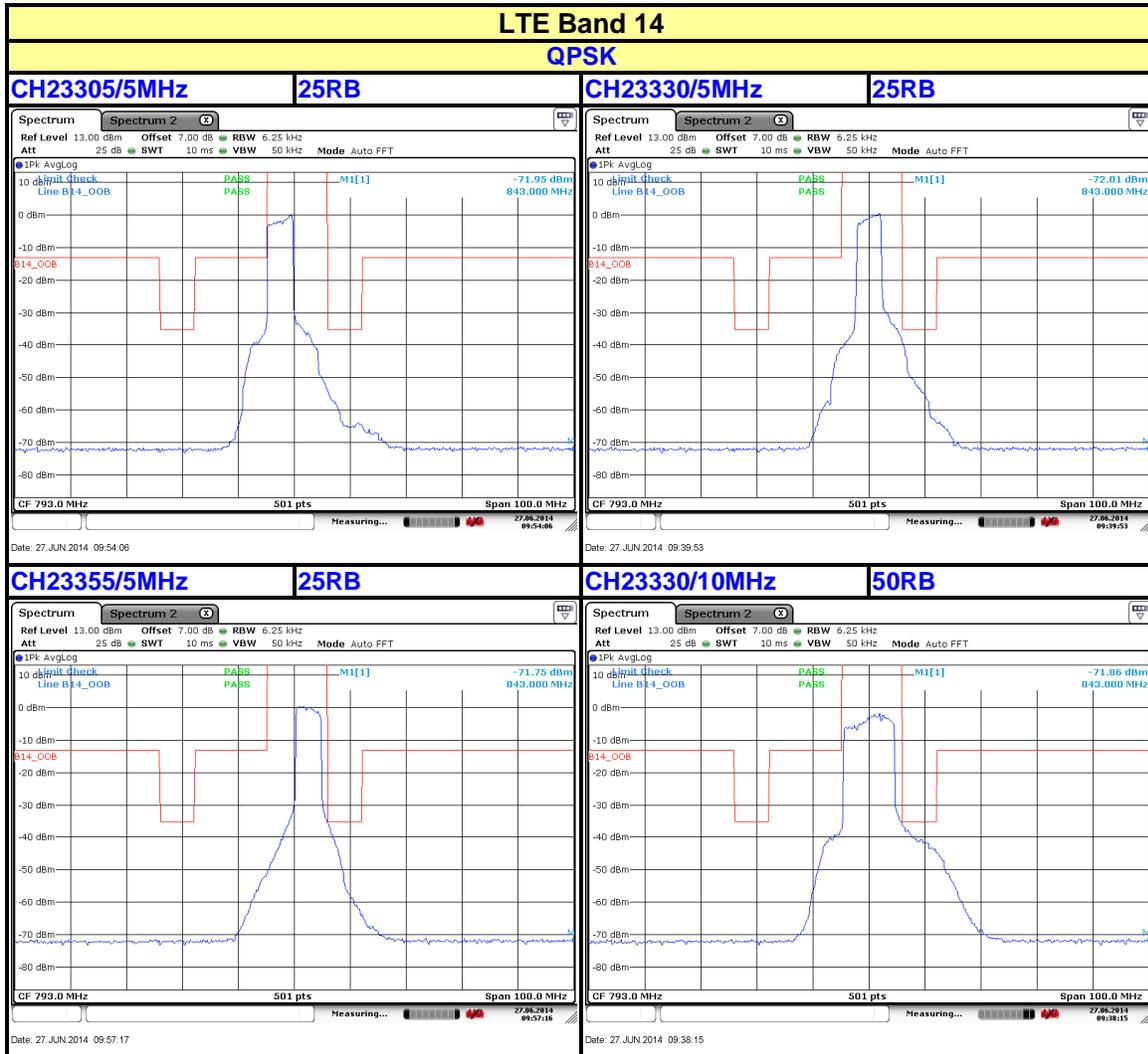

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China


Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU VERITAS

Test Report No.: RF170103W004-8

SPURIOUS EMISSION MEASUREMENT

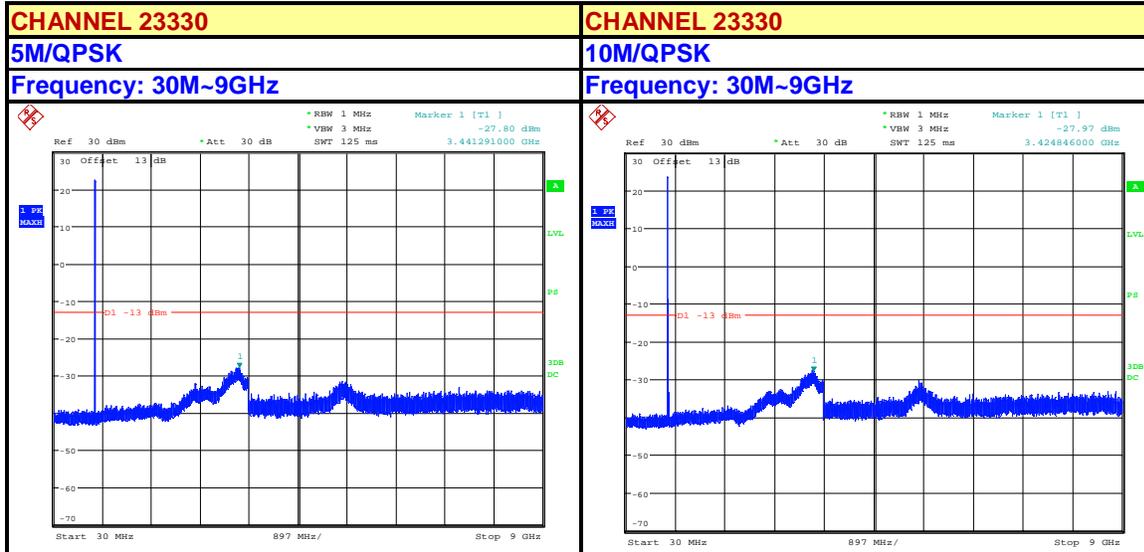

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



4.6 RADIATED EMISSION MEASUREMENT

4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

(1) The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission equal to -13dBm

(2) For operations in the 763–775 MHz and 793–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

4.6.2 TEST INSTRUMENTS

Same as 4.1.2.

4.6.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the receiving antenna, which was mounted on antenna tower and its position at 0.8 m above the ground.
- c. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading and recorded the value.
- d. Repeat step a ~ c for horizontal polarization.

NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.


4.6.4 DEVIATION FROM TEST STANDARD

No deviation




4.6.5 TEST SETUP

<Below 30MHz>

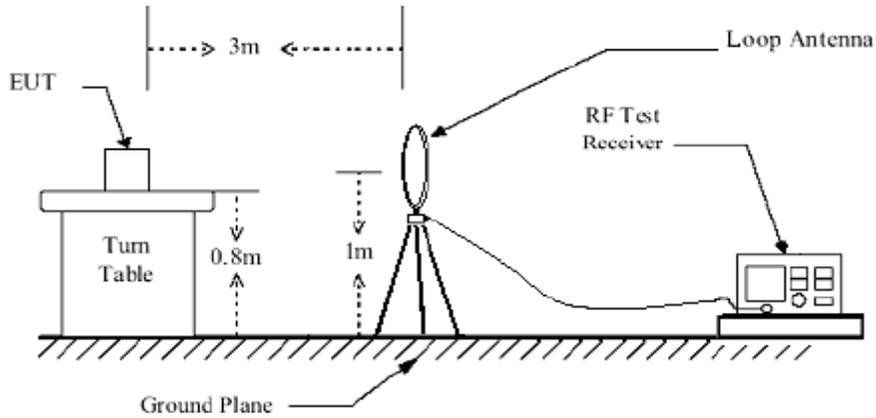

<Above 30MHz>

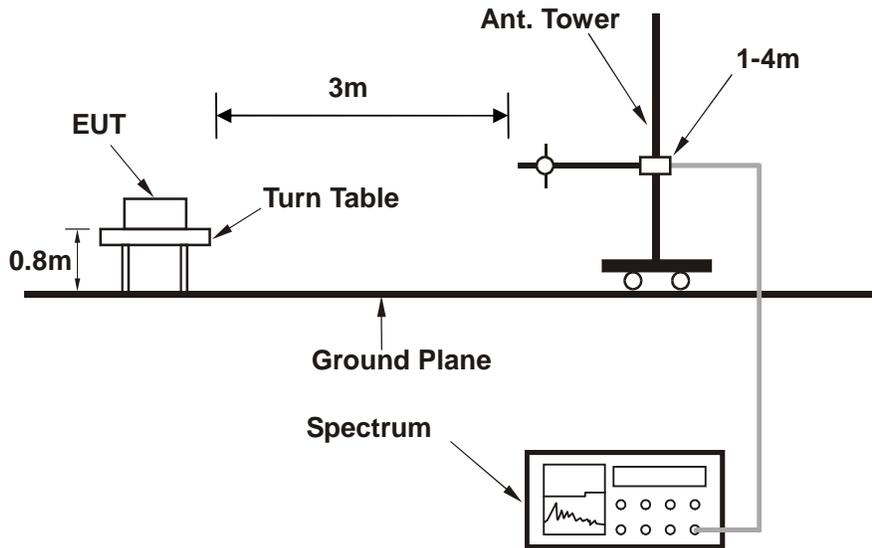

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.6.6 EUT OPERATING CONDITIONS

Same as 4.1.4.



4.6.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA : LTE BAND 14


9 KHz – 30 KHz data: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

30 MHz – 1GHz data:

LTE Band 14:

MODE	TX channel 23330	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Zou		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	30.000	-27.53	-46.87	-13.00	-14.53	19.34	Peak	Horizontal
2	43.580	-33.98	-42.92	-13.00	-20.98	8.94	Peak	Horizontal
3	93.050	-43.15	-33.46	-13.00	-30.15	-9.69	Peak	Horizontal
4	131.850	-52.83	-36.00	-13.00	-39.83	-16.83	Peak	Horizontal
5	204.600	-51.28	-34.13	-13.00	-38.28	-17.15	Peak	Horizontal
6	294.810	-54.66	-40.60	-13.00	-41.66	-14.06	Peak	Horizontal

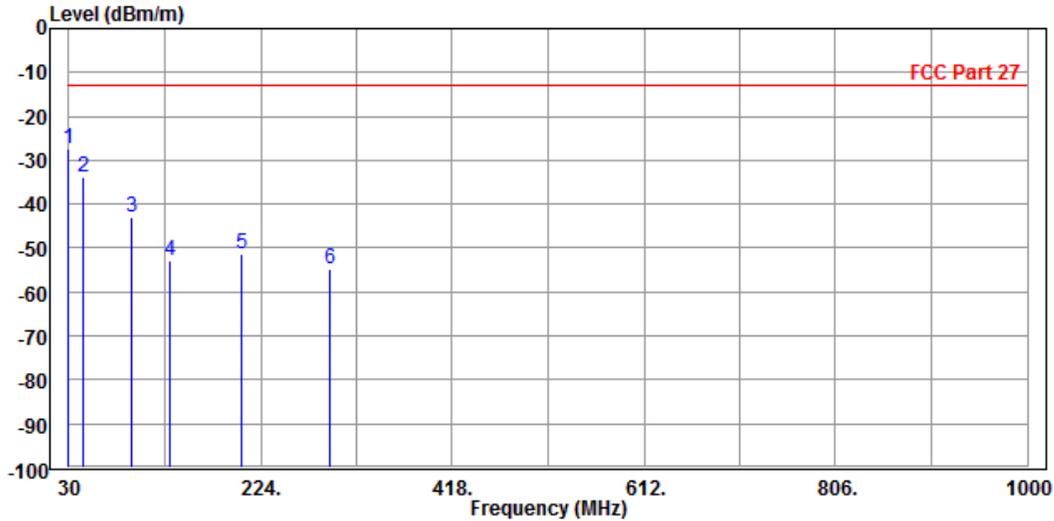




**BUREAU
VERITAS**

Test Report No.: RF170103W004-8

MODE	TX channel 23330	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Zou		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	47.460	-36.84	-32.90	-13.00	-23.84	-3.94	Peak	Vertical
2	92.080	-42.50	-31.93	-13.00	-29.50	-10.57	Peak	Vertical
3	129.910	-56.74	-45.59	-13.00	-43.74	-11.15	Peak	Vertical
4	204.600	-51.16	-40.44	-13.00	-38.16	-10.72	Peak	Vertical
5	252.130	-55.82	-44.31	-13.00	-42.82	-11.51	Peak	Vertical
6	297.720	-58.25	-46.95	-13.00	-45.25	-11.30	Peak	Vertical

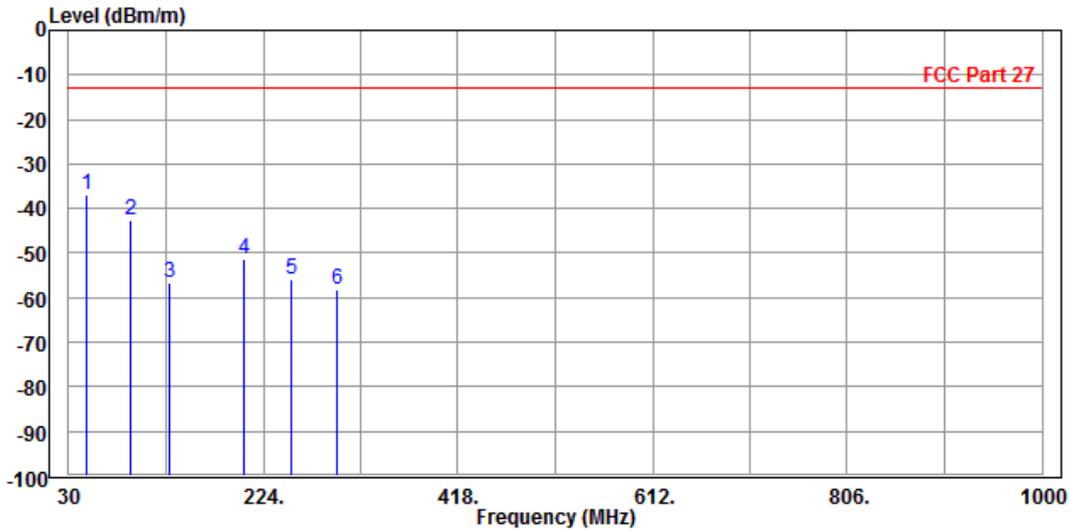



BUREAU VERITAS

Test Report No.: RF170103W004-8


ABOVE 1GHz

Note: For higher frequency, the emission is too low to be detected.

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 23330	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Zou		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1572.000	-43.81	-38.21	-13.00	-30.81	-5.60	Peak	Horizontal
2	2378.000	-57.35	-55.62	-13.00	-44.35	-1.73	Peak	Horizontal

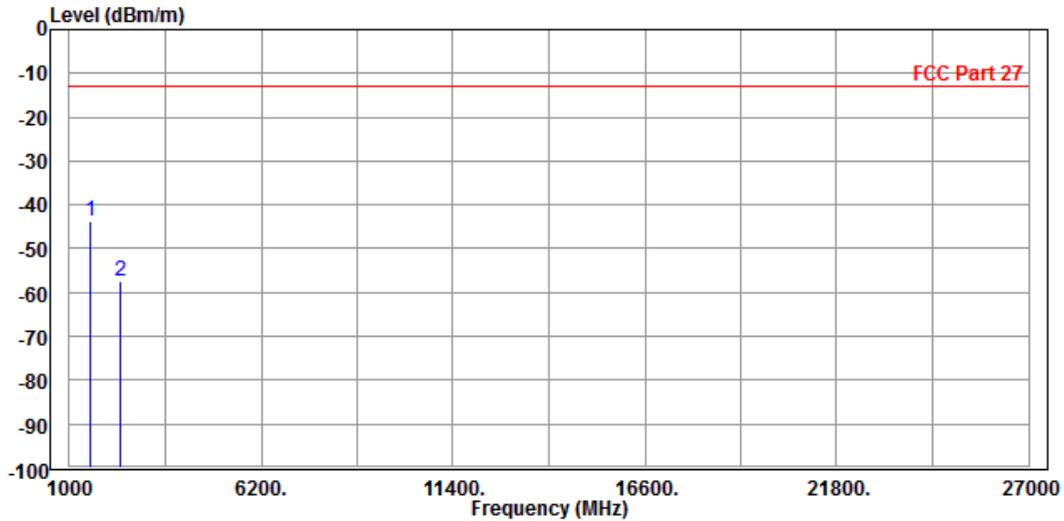




BUREAU VERITAS

Test Report No.: RF170103W004-8

MODE	TX channel 23330	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Zou		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1572.000	-47.47	-43.21	-13.00	-34.47	-4.26	Peak	Vertical
2	2378.000	-55.01	-54.82	-13.00	-42.01	-0.19	Peak	Vertical

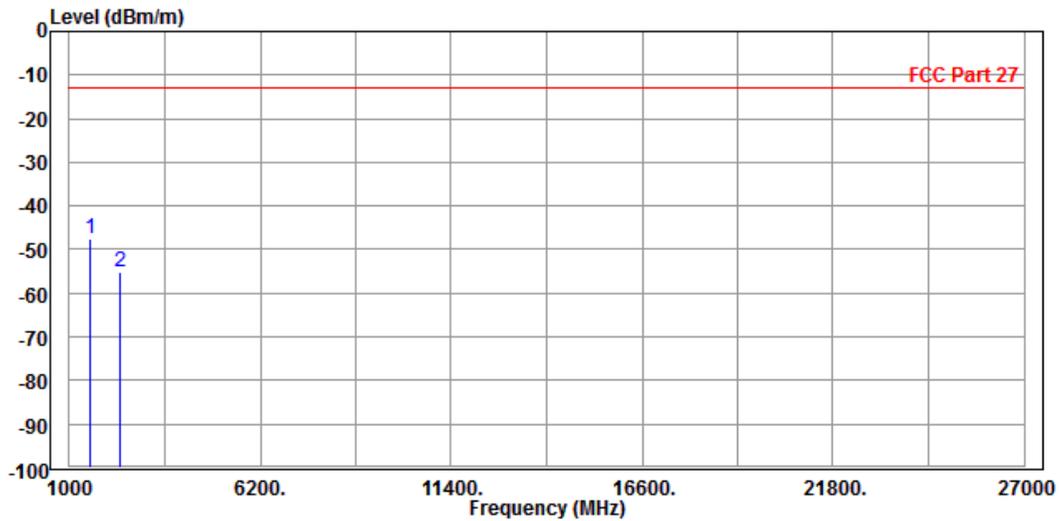




BUREAU VERITAS

Test Report No.: RF170103W004-8

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 23330	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Zou		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1572.000	-47.38	-41.78	-13.00	-34.38	-5.60	Peak	Horizontal
2	2378.000	-57.14	-55.41	-13.00	-44.14	-1.73	Peak	Horizontal

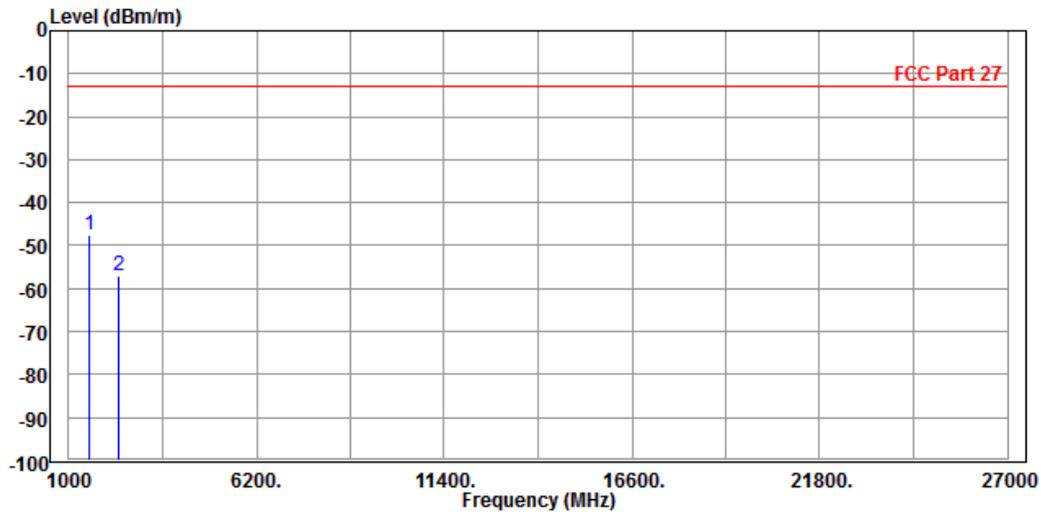




**BUREAU
VERITAS**

Test Report No.: RF170103W004-8

MODE	TX channel 23330	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Zou		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1572.000	-47.06	-42.80	-13.00	-34.06	-4.26	Peak	Vertical
2	2378.000	-55.52	-55.33	-13.00	-42.52	-0.19	Peak	Vertical

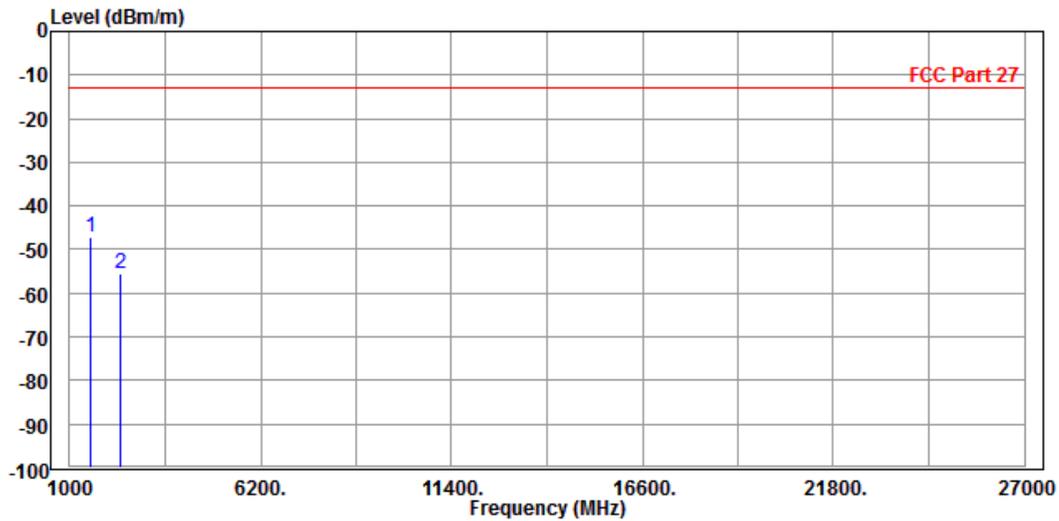



**BUREAU
VERITAS**

Test Report No.: RF170103W004-8

5 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch, were founded in 2002 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Dongguan EMC/RF Lab:

Tel: +86-769-85935656

Fax: +86-769-85931080

Email: customerservice.dg@cn.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



BUREAU
VERITAS

Test Report No.: RF170103W004-8

6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---