



FCC RF Test Report

APPLICANT : Motorola Solutions Inc
EQUIPMENT : WAVE TWO-WAY RADIO
BRAND NAME : Motorola Solutions
MODEL NAME : TLK 100i
MODEL NUMBER : HK2123A
FCC ID : AZ489FT7136
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was completed on Apr. 15, 2019. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

***No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China***



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Testing Location	7
1.7 Test Software.....	7
1.8 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	10
2.3 Connection Diagram of Test System.....	12
2.4 Support Unit used in test configuration and system	12
2.5 EUT Operation Test Setup	13
2.6 Measurement Results Explanation Example.....	13
3 TEST RESULT	14
3.1 26dB & 99% Occupied Bandwidth Measurement	14
3.2 Maximum Conducted Output Power Measurement	16
3.3 Power Spectral Density Measurement	18
3.4 Unwanted Emissions Measurement.....	21
3.5 AC Conducted Emission Measurement.....	26
3.6 Automatically Discontinue Transmission	28
3.7 Antenna Requirements	29
4 LIST OF MEASURING EQUIPMENT	30
5 UNCERTAINTY OF EVALUATION	31
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR8D1903-04D	Rev. 01	Initial issue of report	Oct. 07, 2020

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 & 15.403(i)	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	Pass	Under limit 4.08 dB at 10995.000 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 10.05 dB at 0.479 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Solutions Inc

8000 W. Sunrise Blvd. Ft. Lauderdale FL 33322 United States Of America

1.2 Manufacturer

Motorola Solutions Malaysia Sdn. Bhd.

No. 2A, Medan Bayan Lepas, Mukim 12, S.W.D., 11900 Bayan Lepas, Penang, Malaysia

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	WAVE TWO-WAY RADIO
Brand Name	Motorola Solutions
Model Name	TLK 100i
Model Number	HK2123A
FCC ID	AZ489FT7136
EUT supports Radios application	WCDMA/LTE/GNSS WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 Bluetooth BR / EDR/ LE
IMEI Code	Radiation: N/A Conducted: 354124100003656 Conduction: 354124100003615
HW Version	P2.0
SW Version	BLUE_BASE_ENG_R03.01.03_APPS_R03.01.03
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz
Maximum Output Power to Antenna	<5180 MHz ~ 5240 MHz> 802.11a : 15.27 dBm / 0.0337 W 802.11n HT20 : 12.93 dBm / 0.0196 W 802.11n HT40 : 11.99 dBm / 0.0158 W <5260 MHz ~ 5320 MHz> 802.11a : 15.30 dBm / 0.0339 W 802.11n HT20 : 13.07 dBm / 0.0203 W 802.11n HT40 : 12.02 dBm / 0.0159 W <5500 MHz ~ 5720 MHz > 802.11a : 14.99 dBm / 0.0316 W 802.11n HT20 : 12.96 dBm / 0.0198 W 802.11n HT40 : 12.02 dBm / 0.0159 W
99% Occupied Bandwidth	<5180 MHz ~ 5240 MHz> 802.11a : 16.83 MHz 802.11n HT20 : 17.83 MHz 802.11n HT40 : 36.06 MHz <5260 MHz ~ 5320 MHz> 802.11a : 17.78 MHz 802.11n HT20 : 17.78 MHz 802.11n HT40 : 36.06 MHz <5500 MHz ~ 5720 MHz > 802.11a : 17.03 MHz 802.11n HT20 : 17.88 MHz 802.11n HT40 : 36.06 MHz
Antenna Type / Gain	<5180 MHz ~ 5240 MHz > Internal FPC Antenna with gain 1.49 dBi <5260 MHz ~ 5320 MHz > Internal FPC Antenna with gain 1.31 dBi <5500 MHz ~ 5720 MHz > Internal FPC Antenna with gain 0.22 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5180-5240 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	-	-		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5260-5320 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	-	-		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5500-5720 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	-	-	134*	5670
	108	5540	136	5680
	110*	5550	140	5700



Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	-	-	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	-	-	144	5720
	142*	5710		

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link (5G) + Earphone 1 + USB Cable(Charging from adapter 1)
Remark: For Radiated Test Cases, The tests were performed with Adapter 1, Earphone 1.,.	




Ch. #		Band I : 5180-5240 MHz	Band II : 5260-5320 MHz	Band III : 5500-5720MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144

Ch. #		Band I : 5180-5240 MHz	Band II : 5260-5320 MHz	Band III : 5500-5720MHz
		802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144

Ch. #		Band I : 5180-5240 MHz	Band II : 5260-5320 MHz	Band III : 5500-5720MHz
		802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134
Straddle		-	-	142

2.3 Connection Diagram of Test System

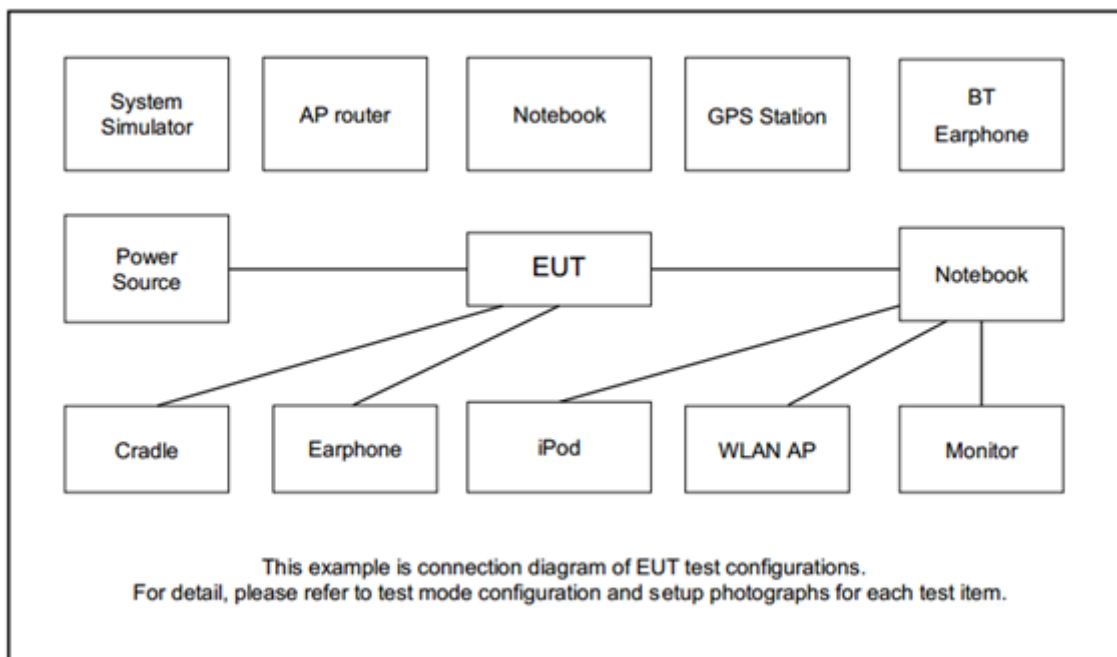

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	R&S	CMU 200	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	shielded cable DC O/P1.8m Unshielded AC I/P1.8m
3.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8m DC O/P: Shielded, 1.8 m



2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss

Following shows an offset computation example with cable loss 6.6 dB

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 6.6 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW) $\geq 3 * \text{RBW}$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

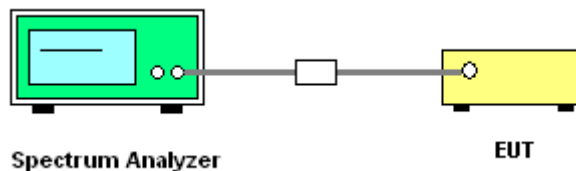

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

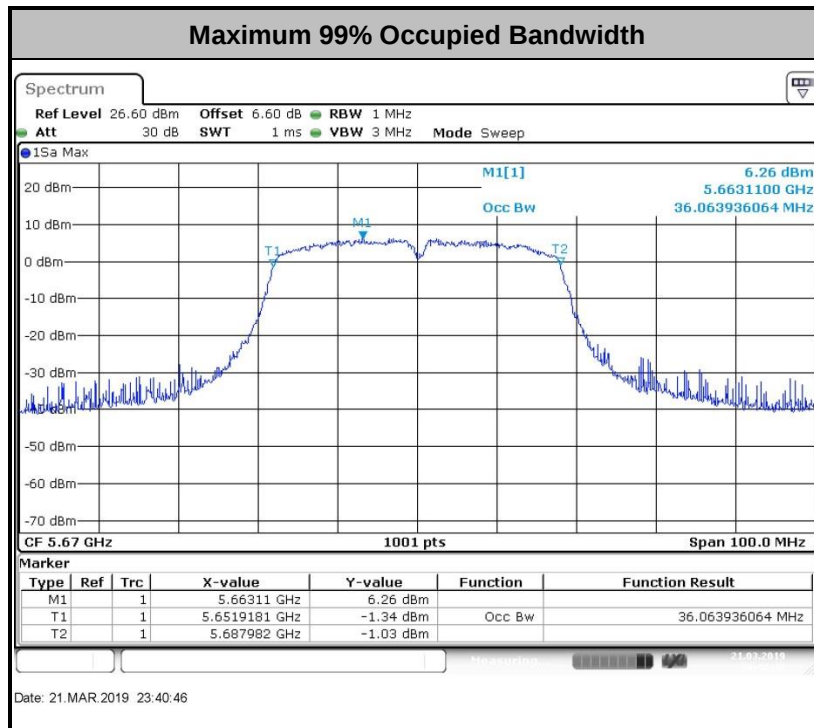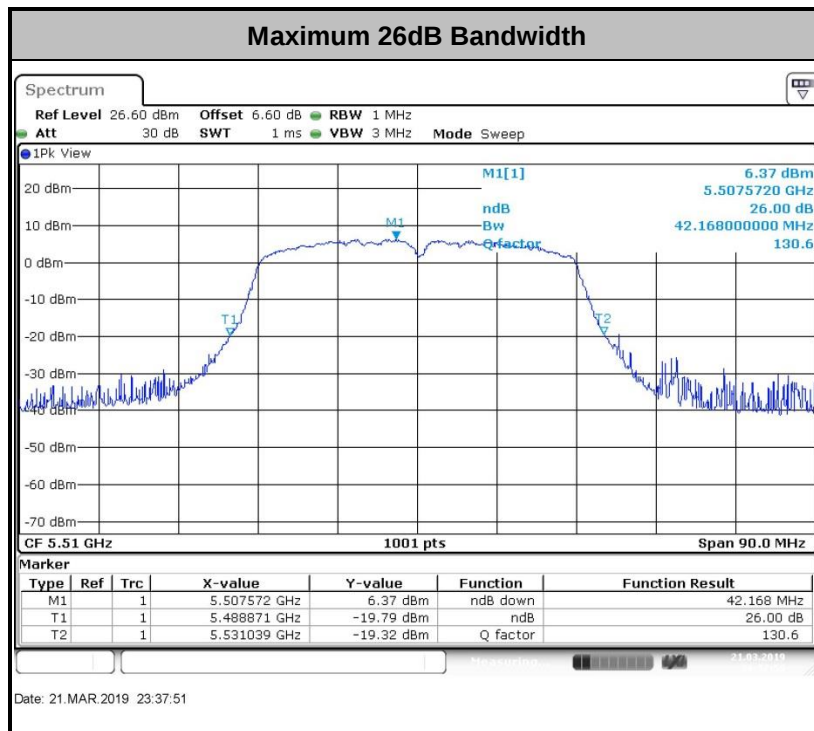

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

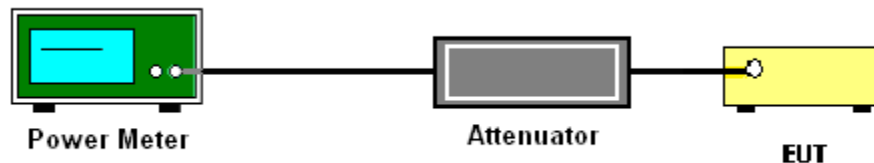

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.


Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

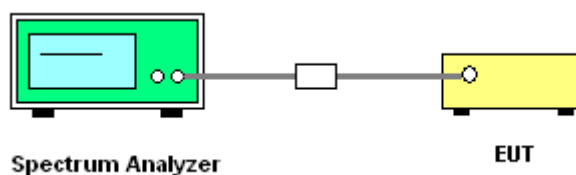

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

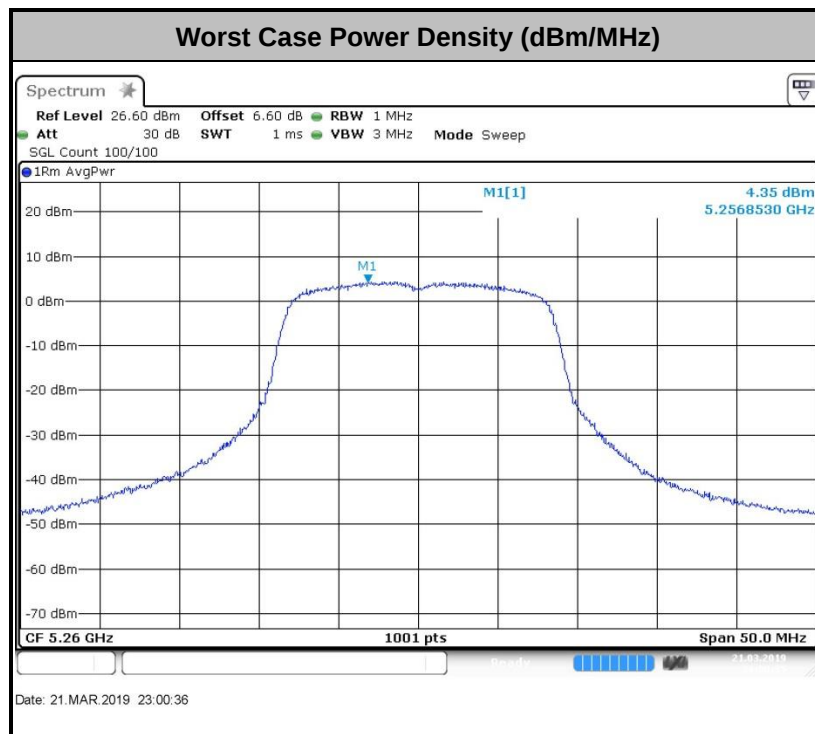

Note: Average Power Density (dB) = Measured value+ Duty Factor

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3



EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

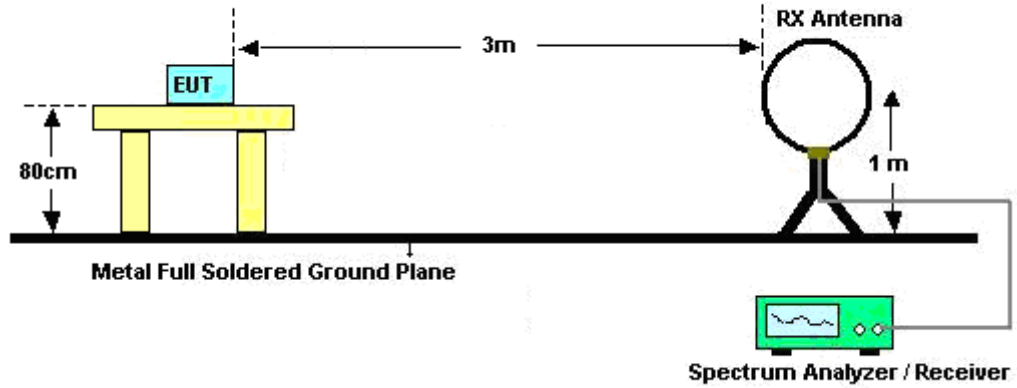

For radiated emissions from 30MHz to 1GHz

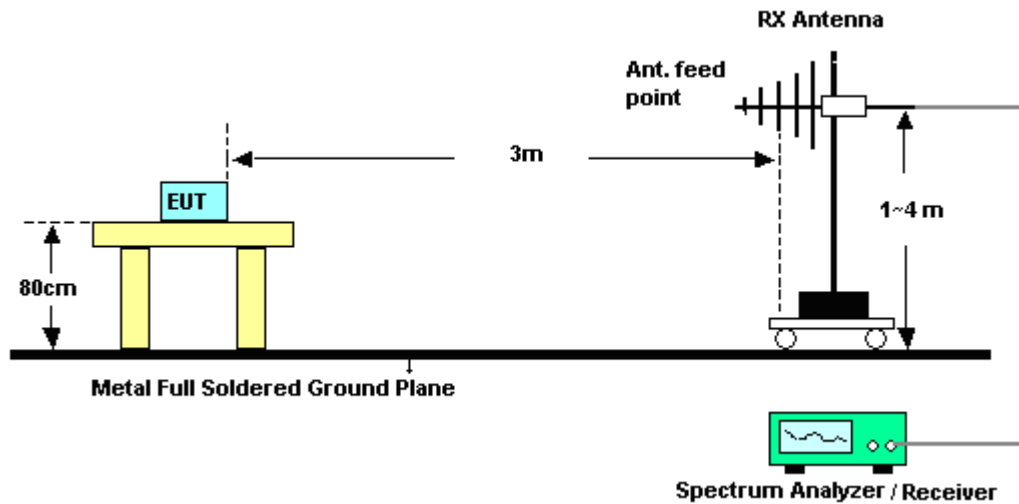

For radiated emissions above 1GHz

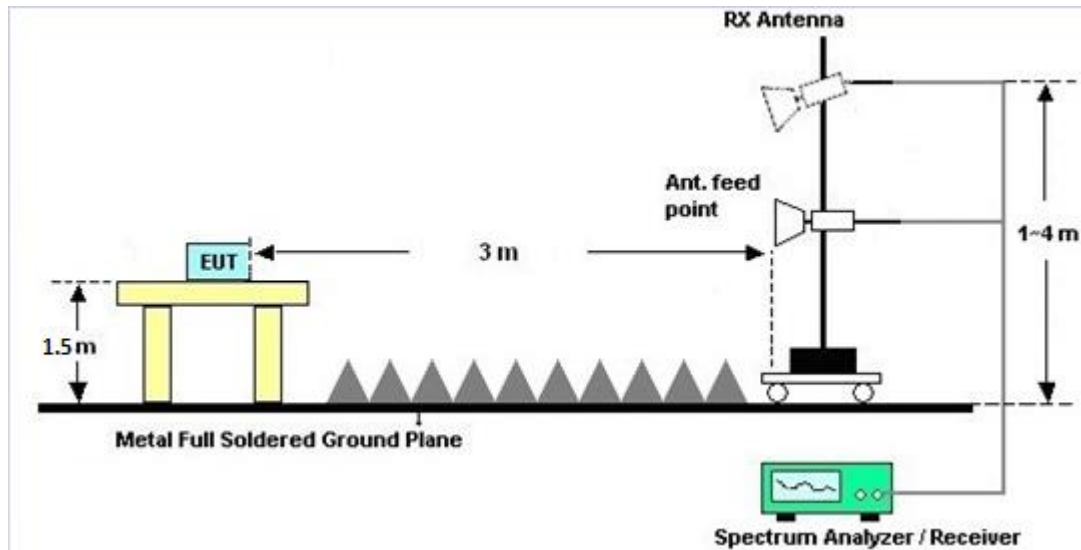

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

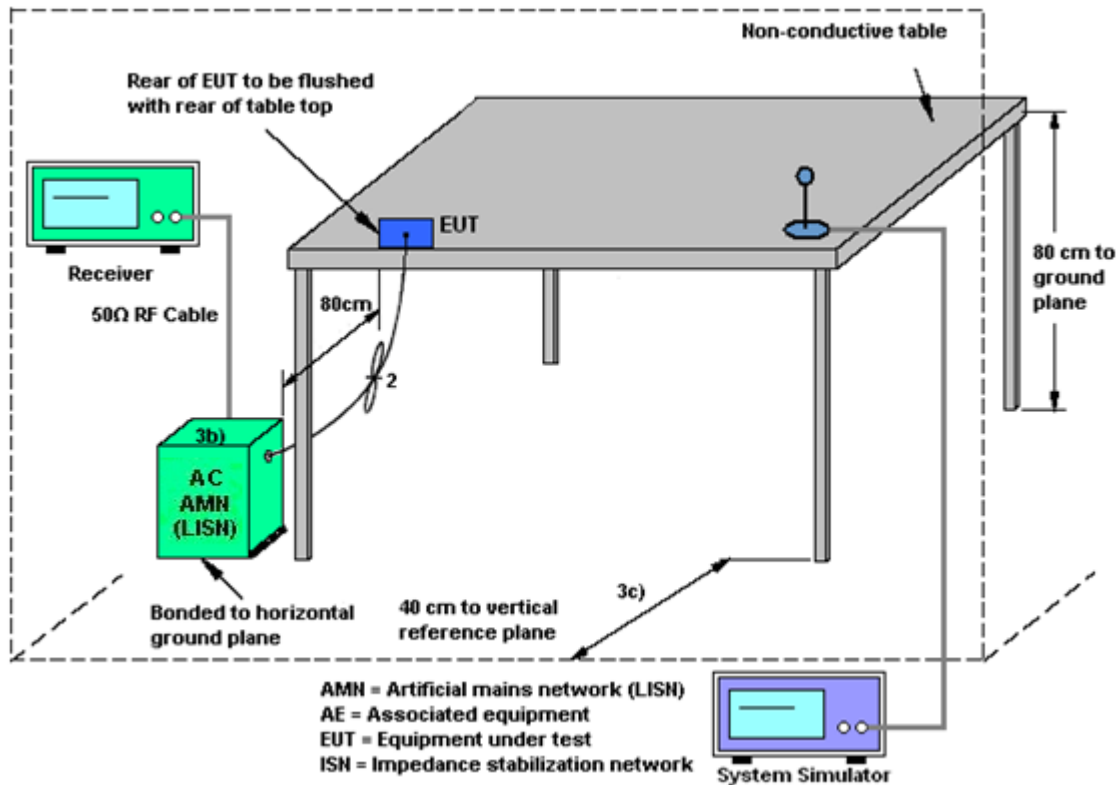

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 07, 2018	Mar. 21, 2019	Aug. 06, 2019	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 14, 2019	Mar. 21, 2019	Jan. 13, 2020	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 14, 2019	Mar. 21, 2019	Jan. 13, 2020	Conducted (TH01-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX 104	TH01KS001	30MHz~40GHz	Jun. 20, 2018	Mar. 21, 2019	Jun. 19, 2019	Conducted (TH01-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX 104	TH01KS002	30MHz~40GHz	Jun. 20, 2018	Mar. 21, 2019	Jun. 19, 2019	Conducted (TH01-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX 104	TH01KS003	30MHz~40GHz	Jun. 20, 2018	Mar. 21, 2019	Jun. 19, 2019	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz; Max 30dBm	Jun. 25, 2018	Apr. 15, 2019	Jun. 24, 2019	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 17, 2018	Apr. 15, 2019	Apr. 16, 2019	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 19, 2018	Apr. 15, 2019	Oct. 18, 2019	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	Jun. 12, 2018	Apr. 15, 2019	Jun. 11, 2019	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Jan. 27, 2019	Apr. 15, 2019	Jan. 26, 2020	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2019	Apr. 15, 2019	Jan. 04, 2020	Radiation (03CH05-KS)
Amplifier	com-power	PA-103A	161069	1MHz~1000MHz / 32 dB	Apr 17, 2018	Apr. 15, 2019	Apr. 16, 2019	Radiation (03CH05-KS)
Amplifier	MITEQ	TTA1840-35-HG	2014749	18~40GHz	Jan. 14, 2019	Apr. 15, 2019	Jan. 13, 2020	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Apr. 17, 2018	Apr. 15, 2019	Apr. 16, 2019	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5GHz	Apr. 18, 2018	Apr. 15, 2019	Apr. 17, 2019	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Apr. 15, 2019	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Apr. 15, 2019	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Apr. 15, 2019	NCR	Radiation (03CH05-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX104	03CH05KS001	30Mhz-18Ghz	Sep. 12, 2018	Apr. 15, 2019	Sep. 11, 2019	Radiation (03CH05-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX104	03CH05KS002	30Mhz-18Ghz	Sep. 12, 2018	Apr. 15, 2019	Sep. 11, 2019	Radiation (03CH05-KS)
Low Pass Filter	Wainwright Instruments GmbH	WLK4-1000-1530-8000-40S	2	1G Low Pass	Jun. 19, 2018	Apr. 15, 2019	Jun. 18, 2019	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 19, 2018	Apr. 01, 2019	Apr. 18, 2019	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 12, 2018	Apr. 01, 2019	Oct. 11, 2019	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Nov. 19, 2018	Apr. 01, 2019	Nov. 18, 2019	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2018	Apr. 01, 2019	Oct. 11, 2019	Conduction (CO01-KS)
RF Cable	WOKEN	Y5T	00100N1Q3N1	150kHz~30MHz	Aug. 24, 2018	Apr. 01, 2019	Aug. 23, 2019	Conduction (CO01-KS)
Transient limiter	COM-POWER	LIT-153	531040	150kHz~30MHz	Aug. 24, 2018	Apr. 01, 2019	Aug. 23, 2019	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.9dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------



Appendix A. Conducted Test Results

Test Engineer:	Lion Ran	Temperature:	21~25	°C
Test Date:	2019/3/21	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

Band I										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)		
11a	6Mbps	1	36	5180	16.68	20.43	-	22.22		
11a	6Mbps	1	44	5220	16.78	21.23	-	22.25		
11a	6Mbps	1	48	5240	16.83	21.38	-	22.26		
HT20	MCS0	1	36	5180	17.78	21.43	-	22.50		
HT20	MCS0	1	44	5220	17.83	21.83	-	22.51		
HT20	MCS0	1	48	5240	17.73	21.73	-	22.49		
HT40	MCS0	1	38	5190	36.06	41.63	-	23.01		
HT40	MCS0	1	46	5230	35.96	41.99	-	23.01		

TEST RESULTS DATA
Average Power Table

FCC Band I										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6Mbps	1	36	5180	95.00	15.15	24.00	1.49		Pass
11a	6Mbps	1	44	5220	95.00	15.27	24.00	1.49		Pass
11a	6Mbps	1	48	5240	95.00	14.72	24.00	1.49		Pass
HT20	MCS0	1	36	5180	94.66	12.75	24.00	1.49		Pass
HT20	MCS0	1	44	5220	94.66	12.93	24.00	1.49		Pass
HT20	MCS0	1	48	5240	94.66	12.77	24.00	1.49		Pass
HT40	MCS0	1	38	5190	90.97	11.84	24.00	1.49		Pass
HT40	MCS0	1	46	5230	90.97	11.99	24.00	1.49		Pass

TEST RESULTS DATA
Power Spectral Density

FCC Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	0.22	4.56	11.00	1.49		Pass
11a	6Mbps	1	44	5220	0.22	4.44	11.00	1.49		Pass
11a	6Mbps	1	48	5240	0.22	4.39	11.00	1.49		Pass
HT20	MCS0	1	36	5180	0.24	1.99	11.00	1.49		Pass
HT20	MCS0	1	44	5220	0.24	2.30	11.00	1.49		Pass
HT20	MCS0	1	48	5240	0.24	2.20	11.00	1.49		Pass
HT40	MCS0	1	38	5190	0.41	-2.19	11.00	1.49		Pass
HT40	MCS0	1	46	5230	0.41	-2.15	11.00	1.49		Pass

TEST RESULTS DATA
26dB and 99% OBW

Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	52	5260	16.73	21.08	23.24	29.24	23.98	
11a	6M bps	1	60	5300	17.78	21.33	23.50	29.50	23.98	
11a	6M bps	1	64	5320	16.78	20.88	23.25	29.25	23.98	
HT20	MCS 0	1	52	5260	17.78	21.93	23.50	29.50	23.98	
HT20	MCS 0	1	60	5300	17.78	21.73	23.50	29.50	23.98	
HT20	MCS 0	1	64	5320	17.78	21.63	23.50	29.50	23.98	
HT40	MCS 0	1	54	5270	35.96	41.99	23.98	30.00	23.98	
HT40	MCS 0	1	62	5310	36.06	41.99	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table

FCC Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	52	5260	95.00	15.30	23.98	1.31	26.99	Pass
11a	6M bps	1	60	5300	95.00	15.13	23.98	1.31	26.99	Pass
11a	6M bps	1	64	5320	95.00	15.11	23.98	1.31	26.99	Pass
HT20	MCS 0	1	52	5260	94.66	13.07	23.98	1.31	26.99	Pass
HT20	MCS 0	1	60	5300	94.66	12.96	23.98	1.31	26.99	Pass
HT20	MCS 0	1	64	5320	94.66	12.93	23.98	1.31	26.99	Pass
HT40	MCS 0	1	54	5270	90.97	11.85	23.98	1.31	26.99	Pass
HT40	MCS 0	1	62	5310	90.97	12.02	23.98	1.31	26.99	Pass

TEST RESULTS DATA
Power Spectral Density

Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	52	5260	0.22	4.57	11.00	1.31		Pass
11a	6M bps	1	60	5300	0.22	4.36	11.00	1.31		Pass
11a	6M bps	1	64	5320	0.22	4.20	11.00	1.31		Pass
HT20	MCS0	1	52	5260	0.22	2.27	11.00	1.31		Pass
HT20	MCS0	1	60	5300	0.22	2.17	11.00	1.31		Pass
HT20	MCS0	1	64	5320	0.22	2.16	11.00	1.31		Pass
HT40	MCS0	1	54	5270	0.22	-2.06	11.00	1.31		Pass
HT40	MCS0	1	62	5310	0.22	-2.12	11.00	1.31		Pass

TEST RESULTS DATA
26dB and 99% OBW

Band III										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	100	5500	16.78	21.48	23.25	29.25	23.98	
11a	6M bps	1	116	5580	16.78	21.33	23.25	29.25	23.98	
11a	6M bps	1	140	5700	17.03	21.98	23.31	29.31	23.98	
11a	6Mbps	1	144	5720	16.98	21.03	23.30	29.30	23.98	
HT20	MCS 0	1	100	5500	17.78	21.58	23.50	29.50	23.98	
HT20	MCS 0	1	116	5580	17.73	21.63	23.49	29.49	23.98	
HT20	MCS 0	1	140	5700	17.88	21.83	23.52	29.52	23.98	
HT20	MCS 0	1	144	5720	17.83	21.78	23.51	29.51	23.98	
HT40	MCS 0	1	102	5510	36.06	42.17	23.98	30.00	23.98	
HT40	MCS 0	1	110	5550	35.96	41.99	23.98	30.00	23.98	
HT40	MCS 0	1	134	5670	36.06	41.81	23.98	30.00	23.98	
HT40	MCS0	1	142	5710	35.96	41.90	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table


FCC Band III										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	100	5500	95.00	14.83	23.98	0.22	26.99	Pass
11a	6M bps	1	116	5580	95.00	14.99	23.98	0.22	26.99	Pass
11a	6M bps	1	140	5700	95.00	14.94	23.98	0.22	26.99	Pass
11a	6Mbps	1	144	5720	95.00	14.46	23.98	0.22	26.99	Pass
HT20	MCS 0	1	100	5500	94.66	12.68	23.98	0.22	26.99	Pass
HT20	MCS 0	1	116	5580	94.66	12.85	23.98	0.22	26.99	Pass
HT20	MCS 0	1	140	5700	94.66	12.96	23.98	0.22	26.99	Pass
HT20	MCS0	1	144	5720	94.66	12.05	23.98	0.22	26.99	Pass
HT40	MCS 0	1	102	5510	90.97	11.65	23.98	0.22	26.99	Pass
HT40	MCS 0	1	110	5550	90.97	11.73	23.98	0.22	26.99	Pass
HT40	MCS 0	1	134	5670	90.97	12.02	23.98	0.22	26.99	Pass
HT40	MCS0	1	142	5710	90.97	12.00	23.98	0.22	26.99	Pass

TEST RESULTS DATA
Power Spectral Density

Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	100	5500	0.22	3.92	11.00	0.22		Pass
11a	6M bps	1	116	5580	0.22	4.11	11.00	0.22		Pass
11a	6M bps	1	140	5700	0.22	4.06	11.00	0.22		Pass
11a	6Mbps	1	144	5720	0.22	3.59	11.00	0.22		Pass
HT20	MCS 0	1	100	5500	0.24	1.92	11.00	0.22		Pass
HT20	MCS 0	1	116	5580	0.24	2.25	11.00	0.22		Pass
HT20	MCS 0	1	140	5700	0.24	1.77	11.00	0.22		Pass
HT20	MCS0	1	144	5720	0.24	0.21	11.00	0.22		Pass
HT40	MCS 0	1	102	5510	0.41	-2.09	11.00	0.22		Pass
HT40	MCS 0	1	110	5550	0.41	-2.29	11.00	0.22		Pass
HT40	MCS 0	1	134	5670	0.41	-2.21	11.00	0.22		Pass
HT40	MCS0	1	142	5710	0.41	-2.67	11.00	0.22		Pass




Appendix B. AC Conducted Emission Test Results

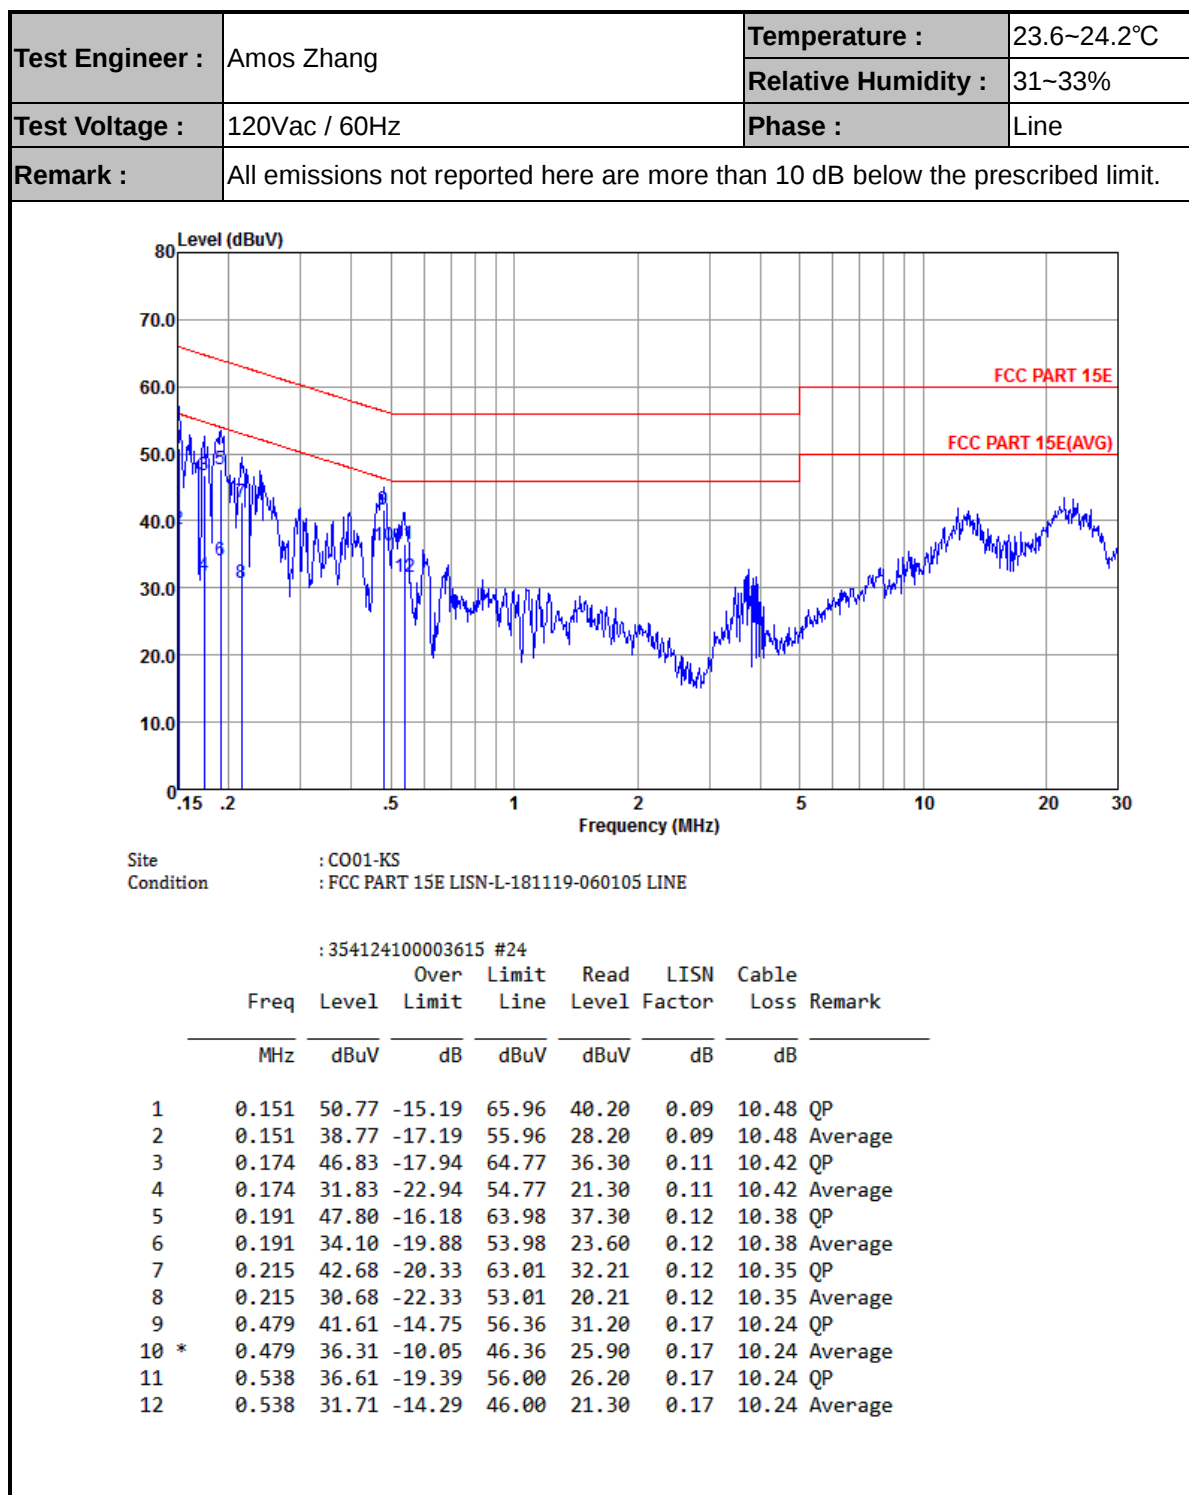



Test Engineer :	Amos Zhang	Temperature :	23.6~24.2°C
		Relative Humidity :	31~33%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

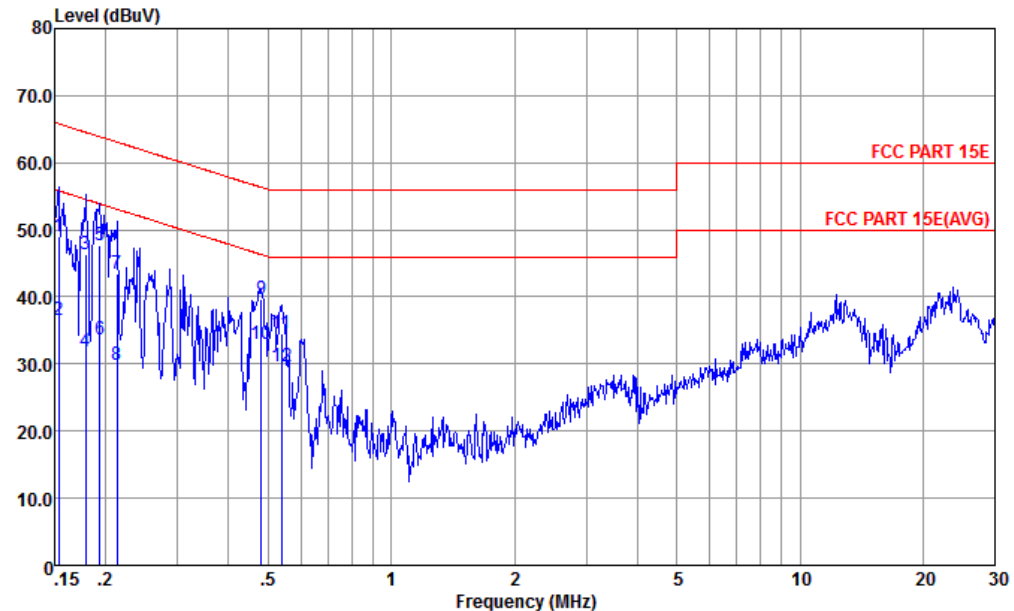

Site : CO01-KS
Condition : FCC PART 15E LISN-N-181119-060105 NEUTRAL

: 354124100003615 #24

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.153	48.95	-16.87	65.82	38.30	0.18	10.47	QP
2	0.153	36.55	-19.27	55.82	25.90	0.18	10.47	Average
3	0.179	46.39	-18.16	64.55	35.80	0.18	10.41	QP
4	0.179	31.79	-22.76	54.55	21.20	0.18	10.41	Average
5	0.193	47.65	-16.24	63.89	37.10	0.17	10.38	QP
6	0.193	33.75	-20.14	53.89	23.20	0.17	10.38	Average
7	0.213	43.43	-19.67	63.10	32.90	0.17	10.36	QP
8	0.213	29.83	-23.27	53.10	19.30	0.17	10.36	Average
9	0.481	39.59	-16.73	56.32	29.20	0.15	10.24	QP
10 *	0.481	32.99	-13.33	46.32	22.60	0.15	10.24	Average
11	0.538	34.58	-21.42	56.00	24.19	0.15	10.24	QP
12	0.538	29.68	-16.32	46.00	19.29	0.15	10.24	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5149.76	56.07	-17.93	74	46.56	34.3	8.14	32.93	294	142	P	H
		5149.76	46.26	-7.74	54	36.75	34.3	8.14	32.93	294	142	A	H
	*	5178	107.32	-	-	97.7	34.37	8.17	32.92	294	142	P	H
		5178	100.03	-	-	90.41	34.37	8.17	32.92	294	142	A	H
		5149.12	55.26	-18.74	74	45.75	34.3	8.14	32.93	327	271	P	V
		5149.98	44.91	-9.09	54	35.4	34.3	8.14	32.93	327	271	A	V
	*	5178	105.23	-	-	95.61	34.37	8.17	32.92	327	271	P	V
		5178	97.52	-	-	87.9	34.37	8.17	32.92	327	271	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36 5180MHz		10360	49.13	-19.17	68.3	62.65	37.67	11.87	63.06	100	360	P	H
		10360	53.96	-14.34	68.3	67.48	37.67	11.87	63.06	100	56	P	V
802.11a CH 44 5220MHz		10440	50.84	-17.46	68.3	64.22	37.73	11.93	63.04	100	0	P	H
		10440	51.84	-16.46	68.3	65.22	37.73	11.93	63.04	100	65	P	V
802.11a CH 48 5240MHz		10485	50.7	-17.6	68.3	63.98	37.78	11.97	63.03	100	0	P	H
		10480	55.04	-13.26	68.3	68.32	37.78	11.97	63.03	100	164	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		5130.08	55.78	-18.22	74	46.32	34.27	8.14	32.95	348	141	P	H
		5149.98	45.74	-8.26	54	36.23	34.3	8.14	32.93	348	141	A	H
	*	5184	104.96	-	-	95.34	34.37	8.17	32.92	348	141	P	H
		5184	97.47	-	-	87.85	34.37	8.17	32.92	348	141	A	H
		5149.28	55.28	-18.72	74	45.77	34.3	8.14	32.93	281	268	P	V
		5149.98	44.77	-9.23	54	35.26	34.3	8.14	32.93	281	268	A	V
	*	5178	102.49	-	-	92.87	34.37	8.17	32.92	281	268	P	V
		5178	94.92	-	-	85.3	34.37	8.17	32.92	281	268	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		10360	47.33	-20.97	68.3	60.85	37.67	11.87	63.06	100	360	P	H
		10360	49.1	-19.2	68.3	62.62	37.67	11.87	63.06	100	0	P	V
802.11n HT20 CH 44 5220MHz		10440	48.15	-20.15	68.3	61.53	37.73	11.93	63.04	100	0	P	H
		10440	53.43	-14.87	68.3	66.81	37.73	11.93	63.04	100	0	P	V
802.11n HT20 CH 48 5240MHz		10480	46.87	-21.43	68.3	60.15	37.78	11.97	63.03	100	0	P	H
		10480	49.96	-18.34	68.3	63.24	37.78	11.97	63.03	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		5149.98	60.01	-13.99	74	54.07	34.3	8.14	36.5	100	243	P	H
		5149.98	49.31	-4.69	54	43.37	34.3	8.14	36.5	100	243	A	H
	*	5192	101.83	-	-	95.75	34.4	8.17	36.49	100	243	P	H
		5192	94.29	-	-	88.21	34.4	8.17	36.49	100	243	A	H
		5363.82	50.64	-23.36	74	44.09	34.7	8.3	36.45	100	243	P	H
		5387.22	39.72	-14.28	54	33.17	34.7	8.3	36.45	100	243	A	H
		5147.2	59.82	-14.18	74	53.88	34.3	8.14	36.5	350	292	P	V
		5149.98	46.54	-7.46	54	40.6	34.3	8.14	36.5	350	292	A	V
	*	5178	98.07	-	-	92.02	34.37	8.17	36.49	350	292	P	V
		5178	90.21	-	-	84.16	34.37	8.17	36.49	350	292	A	V
		5351.94	48.96	-25.04	74	42.41	34.7	8.3	36.45	350	292	P	V
		5357.52	39.13	-14.87	54	32.58	34.7	8.3	36.45	350	292	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		10385	45.37	-22.93	68.3	58.84	37.68	11.9	63.05	100	360	P	H
		10385	46.23	-22.07	68.3	59.7	37.68	11.9	63.05	100	0	P	V
802.11n HT40 CH 46 5230MHz		10460	45.1	-23.2	68.3	58.42	37.75	11.97	63.04	100	360	P	H
		10460	48.96	-19.34	68.3	62.28	37.75	11.97	63.04	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

Band 2 - 5250~5350MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 64 5320MHz	*	5322	107.23	-	-	97.17	34.63	8.27	32.84	100	115	P	H
		5322	99.99	-	-	89.93	34.63	8.27	32.84	100	115	A	H
		5353.7	54.34	-19.66	74	44.14	34.7	8.3	32.8	100	115	P	H
		5350.6	45.38	-8.62	54	35.18	34.7	8.3	32.8	100	115	A	H
	*	5322	104.79	-	-	94.73	34.63	8.27	32.84	349	271	P	V
		5322	97.1	-	-	87.04	34.63	8.27	32.84	349	271	A	V
		5351.2	52.66	-21.34	74	42.46	34.7	8.3	32.8	349	271	P	V
		5350	43.02	-10.98	54	32.82	34.7	8.3	32.8	349	271	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 52 5260MHz		10520	51.69	-16.61	68.3	64.9	37.82	12	63.03	100	0	P	H
		10520	58.15	-10.15	68.3	71.36	37.82	12	63.03	100	291	P	V
802.11a CH 60 5300MHz		10600.01	49.06	-24.94	74	62.11	37.9	12.06	63.01	100	360	P	H
		10600.01	57.74	-16.26	74	70.79	37.9	12.06	63.01	100	117	P	V
		10600.01	48.85	-5.15	54	61.9	37.9	12.06	63.01	100	117	A	V
802.11a CH 64 5320MHz		10640	50.25	-23.75	74	63.26	37.9	12.09	63	100	343	P	H
		10640	56.63	-17.37	74	69.64	37.9	12.09	63	100	113	P	V
		10640	48.29	-5.71	54	61.3	37.9	12.09	63	100	113	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 64 5320MHz	*	5322	105.22	-	-	95.16	34.63	8.27	32.84	100	118	P	H
		5322	97.39	-	-	87.33	34.63	8.27	32.84	100	118	A	H
		5360.3	54.39	-19.61	74	44.19	34.7	8.3	32.8	100	118	P	H
		5350	44.4	-9.6	54	34.2	34.7	8.3	32.8	100	118	A	H
	*	5320	102.18	-	-	92.12	34.63	8.27	32.84	327	268	P	V
		5320	94.41	-	-	84.35	34.63	8.27	32.84	327	268	A	V
		5372.8	52.52	-21.48	74	42.32	34.7	8.3	32.8	327	268	P	V
		5350.6	43.07	-10.93	54	32.87	34.7	8.3	32.8	327	268	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 52 5260MHz		10520	48.19	-20.11	68.3	61.4	37.82	12	63.03	100	360	P	H
		10515	55.16	-13.14	68.3	68.37	37.82	12	63.03	100	360	P	V
802.11n HT20 CH 60 5300MHz		10600	47.99	-26.01	74	61.04	37.9	12.06	63.01	100	360	P	H
		10600	53.92	-20.08	74	66.97	37.9	12.06	63.01	100	118	P	V
		10600	45.59	-8.41	54	58.64	37.9	12.06	63.01	100	118	A	V
802.11n HT20 CH 64 5320MHz		10640	46.63	-27.37	74	59.64	37.9	12.09	63	100	0	P	H
		10640	56.92	-17.08	74	69.93	37.9	12.09	63	100	116	P	V
		10640	46.01	-7.99	54	59.02	37.9	12.09	63	100	116	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 62 5310MHz		5115.2	53.64	-20.36	74	44.23	34.23	8.14	32.96	100	120	P	H
		5124.8	43.16	-10.84	54	33.7	34.27	8.14	32.95	100	120	A	H
	*	5314	100.74	-	-	90.68	34.63	8.27	32.84	100	120	P	H
		5314	93.21	-	-	83.15	34.63	8.27	32.84	100	120	A	H
		5363.6	57.62	-16.38	74	47.42	34.7	8.3	32.8	100	120	P	H
		5350.1	46.86	-7.14	54	36.66	34.7	8.3	32.8	100	120	A	H
		5141.28	53.3	-20.7	74	43.81	34.3	8.14	32.95	316	277	P	V
		5127.04	43.16	-10.84	54	33.7	34.27	8.14	32.95	316	277	A	V
	*	5302	97.54	-	-	87.53	34.6	8.25	32.84	316	277	P	V
		5302	89.94	-	-	79.93	34.6	8.25	32.84	316	277	A	V
		5360.5	54.89	-19.11	74	44.69	34.7	8.3	32.8	316	277	P	V
		5350	43.7	-10.3	54	33.5	34.7	8.3	32.8	316	277	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 54 5270MHz		10545	45.86	-22.44	68.3	59.02	37.83	12.03	63.02	100	360	P	H
		10545	49.31	-18.99	68.3	62.47	37.83	12.03	63.02	100	1	P	V
802.11n HT40 CH 62 5310MHz		10620	44.97	-29.03	74	57.99	37.9	12.09	63.01	100	360	P	H
		10620	49.71	-24.29	74	62.73	37.9	12.09	63.01	100	0	P	V
		10620	42.58	-11.42	54	55.6	37.9	12.09	63.01	100	117	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 100 5500MHz		5421.36	53.28	-20.72	74	43.03	34.7	8.32	32.77	100	121	P	H
		5467.76	54.97	-13.33	68.3	44.61	34.7	8.4	32.74	100	121	P	H
		5459.44	45.58	-8.42	54	35.26	34.7	8.36	32.74	100	121	A	H
	*	5496	108.39	-	-	98.01	34.7	8.4	32.72	100	121	P	H
		5496	101.1	-	-	90.72	34.7	8.4	32.72	100	121	A	H
		5440.72	51.66	-22.34	74	41.36	34.7	8.36	32.76	336	241	P	V
		5468.72	52.63	-15.67	68.3	42.27	34.7	8.4	32.74	336	241	P	V
		5458.64	43.11	-10.89	54	32.79	34.7	8.36	32.74	336	241	A	V
	*	5500	103.38	-	-	93	34.7	8.4	32.72	336	241	P	V
		5500	96.08	-	-	85.7	34.7	8.4	32.72	336	241	A	V
802.11a CH 140 5700MHz	*	5700	107	-	-	96.43	34.7	8.61	32.74	100	257	P	H
		5700	99.81	-	-	89.24	34.7	8.61	32.74	100	257	A	H
		5731.88	55.72	-12.58	68.3	45.2	34.77	8.61	32.86	100	257	P	H
	*	5698	103.54	-	-	93	34.7	8.58	32.74	295	242	P	V
		5698	96.47	-	-	85.93	34.7	8.58	32.74	295	242	A	V
		5727.8	54.5	-13.8	68.3	43.92	34.77	8.61	32.8	295	242	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a		11005	50.92	-23.08	74	63.55	37.9	12.4	62.93	100	0	P	H
CH 100		10995	58.36	-15.64	74	71.02	37.9	12.37	62.93	100	117	P	V
5500MHz		10995	49.92	-4.08	54	62.58	37.9	12.37	62.93	100	117	A	V
802.11a		11160	47.71	-26.29	74	60.2	37.9	12.51	62.9	100	360	P	H
CH 116		11160	53.66	-20.34	74	66.15	37.9	12.51	62.9	100	0	P	V
5580MHz		11160	47.98	-6.02	54	60.47	37.9	12.51	62.9	100	0	A	V
802.11a		11400	45.59	-28.41	74	57.76	38	12.68	62.85	100	252	P	H
CH 140		11400	53.22	-20.78	74	65.39	38	12.68	62.85	100	117	P	V
5700MHz		11400	42.95	-11.05	54	55.12	38	12.68	62.85	100	117	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz		5459.28	51.63	-22.37	74	45	34.7	8.36	36.43	106	140	P	H
		5468.72	52.96	-15.34	68.3	46.29	34.7	8.4	36.43	106	140	P	H
		5459.76	42.8	-11.2	54	36.17	34.7	8.36	36.43	106	140	A	H
	*	5496	106.62	-	-	99.94	34.7	8.4	36.42	106	140	P	H
		5496	99.49	-	-	92.81	34.7	8.4	36.42	106	140	A	H
		5425.36	49.4	-24.6	74	42.82	34.7	8.32	36.44	375	216	P	V
		5467.28	49.66	-18.64	68.3	42.99	34.7	8.4	36.43	375	216	P	V
		5459.98	40.07	-13.93	54	33.44	34.7	8.36	36.43	375	216	A	V
	*	5498	102.22	-	-	95.54	34.7	8.4	36.42	375	216	P	V
802.11n HT20 CH 140 5700MHz		5498	94.36	-	-	87.68	34.7	8.4	36.42	375	216	A	V
	*	5698	105.14	-	-	94.6	34.7	8.58	32.74	102	116	P	H
		5698	97.64	-	-	87.1	34.7	8.58	32.74	102	116	A	H
		5734.6	55.52	-12.78	68.3	44.97	34.8	8.61	32.86	102	116	P	H
	*	5696	100.97	-	-	90.43	34.7	8.58	32.74	347	245	P	V
		5696	93.62	-	-	83.08	34.7	8.58	32.74	347	245	A	V
Remark		5761.24	54.07	-14.23	68.3	43.52	34.83	8.64	32.92	347	245	P	V
	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz		11000	46.97	-27.03	74	59.63	37.9	12.37	62.93	100	360	P	H
		11000	55.41	-18.59	74	68.07	37.9	12.37	62.93	100	116	P	V
		11000	46.89	-7.11	54	59.55	37.9	12.37	62.93	100	116	A	V
802.11n HT20 CH 116 5580MHz		11160	47.57	-26.43	74	60.06	37.9	12.51	62.9	100	360	P	H
		11160	56.23	-17.77	74	68.72	37.9	12.51	62.9	100	117	P	V
		11160	45.22	-8.78	54	57.71	37.9	12.51	62.9	100	117	A	V
802.11n HT20 CH 140 5700MHz		11400	46.17	-27.83	74	58.34	38	12.68	62.85	100	360	P	H
		11400	49.83	-24.17	74	62	38	12.68	62.85	100	117	P	V
		11400	40.13	-13.87	54	52.3	38	12.68	62.85	100	117	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		5446.48	56.36	-17.64	74	49.73	34.7	8.36	36.43	100	129	P	H
		5465.2	62.23	-6.07	68.3	55.6	34.7	8.36	36.43	100	129	P	H
		5458.16	43.28	-10.72	54	36.65	34.7	8.36	36.43	100	129	A	H
	*	5516	101.45	-	-	94.73	34.7	8.44	36.42	100	129	P	H
		5516	93.99	-	-	87.27	34.7	8.44	36.42	100	129	A	H
		5734.28	50.53	-17.77	68.3	43.58	34.77	8.61	36.43	100	129	P	H
		5459.76	52.09	-21.91	74	41.77	34.7	8.36	32.74	289	240	P	V
		5461.68	55.75	-12.55	68.3	45.43	34.7	8.36	32.74	289	240	P	V
		5458.48	43.77	-10.23	54	33.45	34.7	8.36	32.74	289	240	A	V
	*	5504	97.82	-	-	87.43	34.7	8.4	32.71	289	240	P	V
		5504	90.08	-	-	79.69	34.7	8.4	32.71	289	240	A	V
		5751.56	53.84	-14.46	68.3	43.23	34.83	8.64	32.86	289	240	P	V
802.11n HT40 CH 134 5670MHz		5373.04	52.1	-21.9	74	41.9	34.7	8.3	32.8	100	130	P	H
		5467.12	51.1	-17.2	68.3	40.74	34.7	8.4	32.74	100	130	P	H
		5451.28	42.78	-11.22	54	32.46	34.7	8.36	32.74	100	130	A	H
	*	5666	100.71	-	-	90.11	34.7	8.58	32.68	100	130	P	H
		5666	93.43	-	-	82.83	34.7	8.58	32.68	100	130	A	H
		5731.56	58	-10.3	68.3	47.48	34.77	8.61	32.86	100	130	P	H
		5351.92	52.54	-21.46	74	42.34	34.7	8.3	32.8	300	241	P	V
		5466.48	50.52	-17.78	68.3	40.16	34.7	8.4	32.74	300	241	P	V
		5450.64	42.68	-11.32	54	32.36	34.7	8.36	32.74	300	241	A	V
	*	5672	97.16	-	-	86.56	34.7	8.58	32.68	300	241	P	V
		5672	89.68	-	-	79.08	34.7	8.58	32.68	300	241	A	V
		5731	54.28	-14.02	68.3	43.76	34.77	8.61	32.86	300	241	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		11020	48.51	-25.49	74	61.13	37.9	12.4	62.92	100	360	P	H
		11020	49.57	-24.43	74	62.2	37.9	12.4	62.93	100	0	P	V
		11020	43.56	-10.44	54	56.19	37.9	12.4	62.93	100	118	A	V
802.11n HT40 CH 110 5550MHz		11100	46.35	-27.65	74	58.91	37.9	12.45	62.91	100	360	P	H
		11100	44.43	-29.57	74	56.99	37.9	12.45	62.91	100	0	P	V
802.11n HT40 CH 134 5670MHz		11338	42.24	-31.76	74	54.55	37.93	12.62	62.86	100	360	P	H
		11338	46.37	-27.63	74	58.68	37.93	12.62	62.86	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

Band 3 - Straddle Channel

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 144 5720MHz	*	5720	105.53	-	-	94.95	34.77	8.61	32.8	300	0	P	H
		5720	97.96	-	-	87.38	34.77	8.61	32.8	300	0	A	H
	*	5718	102.99	-	-	92.41	34.77	8.61	32.8	363	244	P	V
		5718	95.63	-	-	85.05	34.77	8.61	32.8	363	244	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a		11440	42.99	-31.01	74	55.09	38.03	12.71	62.84	100	360	P	H
CH 144 5720MHz		11440	44.42	-29.58	74	56.52	38.03	12.71	62.84	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n	*	5720	104.25	-	-	93.67	34.77	8.61	32.8	300	0	P	H
HT20		5720	96.69	-	-	86.11	34.77	8.61	32.8	300	0	A	H
CH 144	*	5718	100.33	-	-	89.75	34.77	8.61	32.8	100	0	P	V
5720MHz		5718	93.2	-	-	82.62	34.77	8.61	32.8	100	0	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		11440	44.64	-29.36	74	56.74	38.03	12.71	62.84	100	360	P	H
CH 144 5720MHz		11440	43.2	-30.8	74	55.3	38.03	12.71	62.84	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n	*	5712	101	-	-	90.46	34.73	8.61	32.8	300	0	P	H
HT40		5712	93.75	-	-	83.21	34.73	8.61	32.8	300	0	A	H
CH 142	*	5712	96.54	-	-	86	34.73	8.61	32.8	100	0	P	V
5710MHz		5712	89.13	-	-	78.59	34.73	8.61	32.8	100	0	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40		11420	42.33	-31.67	74	54.48	38.02	12.68	62.85	100	360	P	H
CH 142 5710MHz		11420	43.98	-30.02	74	56.13	38.02	12.68	62.85	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel

Emission below 1GHz

WIFI 802.11n HT40 (LF @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 LF		32.91	16.95	-23.05	40	26.57	21.66	0.69	31.97	-	-	P	H
		70.74	16.37	-23.63	40	35.62	11.7	0.97	31.92	-	-	P	H
		353.01	17.38	-28.62	46	26.97	20.38	2.11	32.08	-	-	P	H
		536.34	21.72	-24.28	46	26.9	24.53	2.61	32.32	-	-	P	H
		697.36	23.47	-22.53	46	27.78	25.01	3.02	32.34	-	-	P	H
		891.36	25.18	-20.82	46	26.52	26.75	3.43	31.52	100	0	P	H
		40.67	25.45	-14.55	40	39.12	17.58	0.71	31.96	100	0	P	V
		61.04	23.61	-16.39	40	42.87	11.76	0.9	31.92	-	-	P	V
		76.56	21.59	-18.41	40	40.1	12.37	1.03	31.91	-	-	P	V
		94.99	17.54	-25.96	43.5	32.54	15.8	1.13	31.93	-	-	P	V
		176.47	14.02	-29.48	43.5	28.59	15.82	1.53	31.92	-	-	P	V
		290.93	15.98	-30.02	46	27.06	19.02	1.96	32.06	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	95.00	2.065	0.484	0.51KHz
802.11n HT20	94.66	1.928	0.519	0.56KHz
802.11n HT40	90.97	0.949	1.053	1.10KHz

802.11a

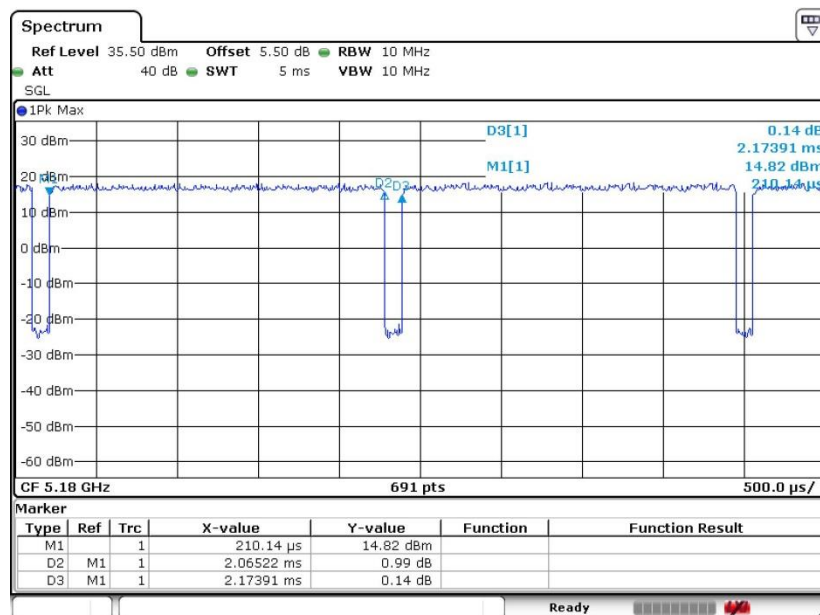

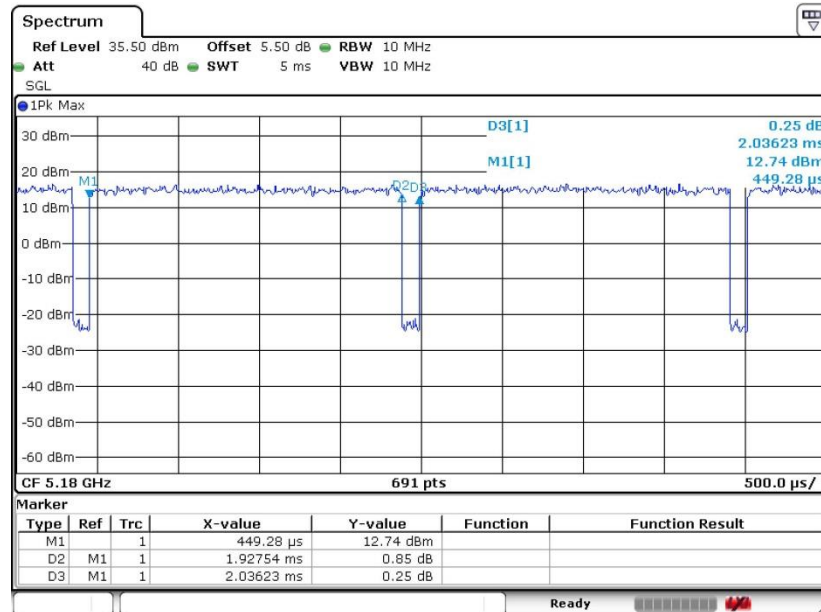802.11n HT20

802.11n HT40
