

<p><b>MOTOROLA PENANG ADV. COMM. LABORATORY</b>                  Motorola Solutions Malaysia Sdn Bhd,                  Plot 2A Medan Bayan Lepas,                  Mukim 12 S.W.D, 11900 Bayan Lepas,                  Penang, Malaysia.</p>	<p><b>FCC Part 15 Subpart E, 15.407</b></p> <p><b>Report Revision</b> : Rev.B  <b>Report ID</b> : 0549N01-RF-00006  <b>Service Request ID</b> : 0549N01</p>
<p><b>Date/s Tested</b> : 27-August-2024 – 28-August-2024  <b>Manufacturer/Location</b> : Motorola Solutions Malaysia Sdn Bhd  <b>Manufacturer Address</b> : Plot 2A Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia  <b>Requestor</b> : DANESHKUMAR A/L R THAYAPARAN  <b>Product Type</b> : Portable  <b>Tested Basic Function</b> : Transmit / Receive  <b>Product Marketing Name (PMN)</b> : RF  <b>Hardware Version Identification Number (HVIN)</b> : AAH07RDH9SA1AN  <b>Frequency Band</b> : 5180-5320MHz; 5500-5825MHz  <b>Max RF Output Power</b> : 63.1mW  <b>Applicant Name</b> : Motorola Solutions Inc  <b>Applicant Address</b> : Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia  <b>FCC Registrations</b> : 461337  <b>ISED Registrations</b> : MY0001  <b>Firmware Version Identification Number (FVIN)</b> : D02.25.01.0010</p> <p><b>The equipment was tested to the standard(s) listed below with the following result :</b></p> <ul style="list-style-type: none"> <li>- <b>FCC Part 15 Subpart E</b> <span style="float: right;"><b>PASS</b></span></li> <li>- <b>ISED RSS-247, Issue 2</b></li> </ul>	
<p>This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.</p>	
<p>Prepared By:                    _____                  Siti Nurhidayati Binti Abdul Halim                  Technician</p>	<p>Approved Signatory:                  _____                  Vincent Foong Chuen Kit                  Responsible Engineer</p>

**TABLE OF CONTENTS**

1. Introduction and Overview .....3

2. Test Laboratory Status .....3

3. Test Environmental Conditions .....3

    3.1. Temperature and Humidity .....3

    3.2. Tolerance .....3

    3.3. Measurement Uncertainty .....3

4. Test Results Summary .....3

5. Technical Data of Device Under Test .....4

    5.1. Operating Frequency Bands and Mode of EUT .....4

    5.2. List of antennas and their corresponding gains .....4

    5.3. Modifications and deviation from standard .....4

    5.4. EUT Maximum Output Power .....4

    5.5. Channel loading messages or sequences .....5

    5.6. Transmit Power Control (TPC) .....5

    5.7. Time required for master or client device to complete power cycle .....5

    5.8. System Architecture .....5

    5.9. Master device identification .....5

6. Test setup and list of equipment .....6

    6.1. Setup block diagram .....6

    6.2. List of Equipment .....6

    6.3. Test Setup Photos .....7

7. Test Requirements .....8

    7.1. DFS Requirements / Limits .....8

    7.2. DFS Detection Threshold .....8

8. Test Procedure and Test Data .....9

    8.1. Test Method .....9

    8.2. Test Data .....9

REVISION HISTORY

Revision History	Description	Date	Originator
Rev. A	Initial report	24-September-2024	Hidayati
Rev. B	Updated ant gain & EIRP	4-October-2024	Vincent

## 1. Introduction and Overview

This report details the utilization, technical data of device under test, test equipment, and test results of the measurements performed at the Motorola Penang Advanced Communication Laboratory in accordance to the standards specified on page 1.

This test report is only valid in its original form.

The test results herein refer only to the tested sample. Motorola Penang Advanced Communication Laboratory is not responsible for any generalizations or conclusions drawn from these test results and concerning further samples.

## 2. Test Laboratory Status

Motorola Penang Advanced Communication Laboratory is an ISO/IEC17025:2005 accredited laboratory. The laboratory was accredited by SAMM, with SAMM Cert No #0825

## 3. Test Environmental Conditions

### 3.1. Temperature and Humidity

Ambient Temperature	Rel. Air Humidity
15 °C to 35 °C	20 %RH to 75%RH

### 3.2. Tolerance

Chamber Temperature Tolerance	Chamber Humidity Tolerance
± 0.3 °c	± 3 %

### 3.3. Measurement Uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96

## 4. Test Results Summary

The table below summarizes the test results for the test completed. For detailed test data, refer to section 7.

Section	Test Parameters	Results	Serial number
7.1.1	FCC Part 15.407 / RSS-247 Non Occupancy Period	PASS	651EAP0008
7.1.2	FCC Part 15.407 / RSS-247 Channel Move Time	PASS	651EAP0008
7.1.3	FCC Part 15.407 / RSS-247 Channel Closing Transmission Time	PASS	651EAP0008

NOTE:  
NA → Not Applicable

## 5. Technical Data of Device Under Test

### 5.1. Operating Frequency Bands and Mode of EUT

Operational Mode	Operating Frequency Range	
	5250-5350MHz	5470-5725MHz
Client without radar detection and ad hoc function	Yes	Yes

### 5.2. List of antennas and their corresponding gains

Antenna #	Type	Frequency Range	Max Gain (dBi)
1	PIFA	5250-5350MHz	5.0
		5470-5725MHz	

### 5.3. Modifications and deviation from standard

There is no deviation between the test carried out compared to the standard test method

### 5.4. EUT Maximum Output Power

#### 802.11a

Antenna #	Frequency Range	Output Power (dBm)	Max EIRP including duty cycle correction
1	5250-5350MHz	17.681	22.681
1	5470-5725MHz	14.710	19.710

#### 802.11n (20MHz)

Antenna #	Frequency Range	Output Power (dBm)	Max EIRP including duty cycle correction
1	5250-5350MHz	17.865	22.865
1	5470-5725MHz	14.811	19.811

### **5.5. Channel loading messages or sequences**

Channel loading was achieved by using iPerf software to control throughput.

### **5.6. Transmit Power Control (TPC)**

U-NII devices operating in the 5.25-5.35GHz band and the 5.47-5.725GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6dB below the EIRP value of 30dBm. A TPC mechanism is not required for systems with an EIRP of less than 500mW.

Maximum EIRP for this device is 22.865 dBm which is 193.42 mW, therefore TPC is not required.

### **5.7. Time required for master or client device to complete power cycle**

The master device took 1 minute and 15 seconds to complete its power cycle. The client device does not have radar detection and therefore its power on time is not applicable.

### **5.8. System Architecture**


The EUT utilizes IP based system architecture

### **5.9. Master device identification**

The DFS compliant master device used for testing was a Linksys WRT3200ACM with serial number 19810625700081, and FCC ID Q87-WRT3200ACM and IC ID 3839A-WRT3200ACM

## 6. Test setup and list of equipment


### 6.1. Setup block diagram

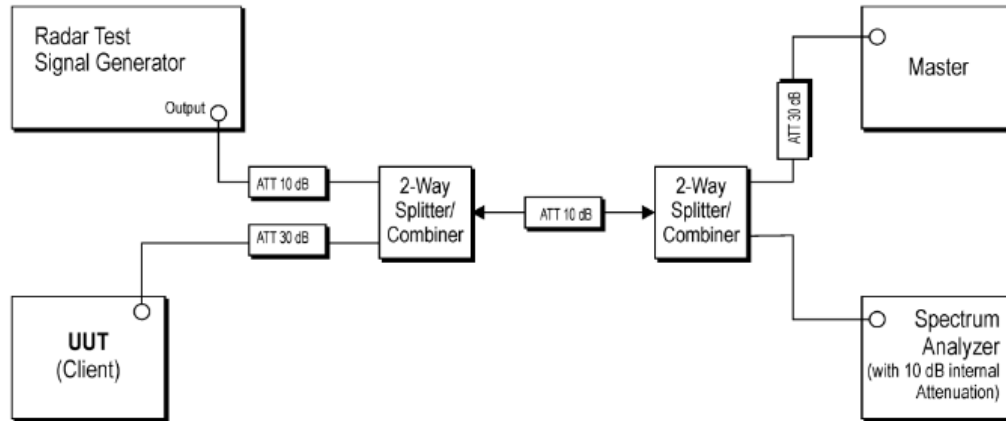

### 6.2. List of Equipment

Description	Model #	Serial Number	Calibration Date	Calibration Due Date
SIGNAL ANALYZER	FSV	101515	12-Aug-24	12-Aug-25
BASIC 8-CHANNEL SWITCH MODULE	OSP-B157W8	101073	15-Aug-24	15-Aug-25
VECTOR SIGNAL GENERATOR	SMBV100A	261962	21-Nov-21	21-Nov-24
CHAMBER	SH-641	92002651	13-Feb-24	13-Feb-25
SIGNAL GENERATOR	SMB100A	177677	4-Nov-21	4-Nov-24
WIDEBAND RADIO COMMUNICATION TESTER	CMW500	154549	16-Aug-24	16-Aug-25
OPEN SWITCH & CONTROL UNIT	OSP120	101256		
POWER SUPPLY ( 0-20V / 0-30A, 200W )	6033A	3506A08076	5-Jan-24	5-Jan-25

### 6.3. Test Setup Photos

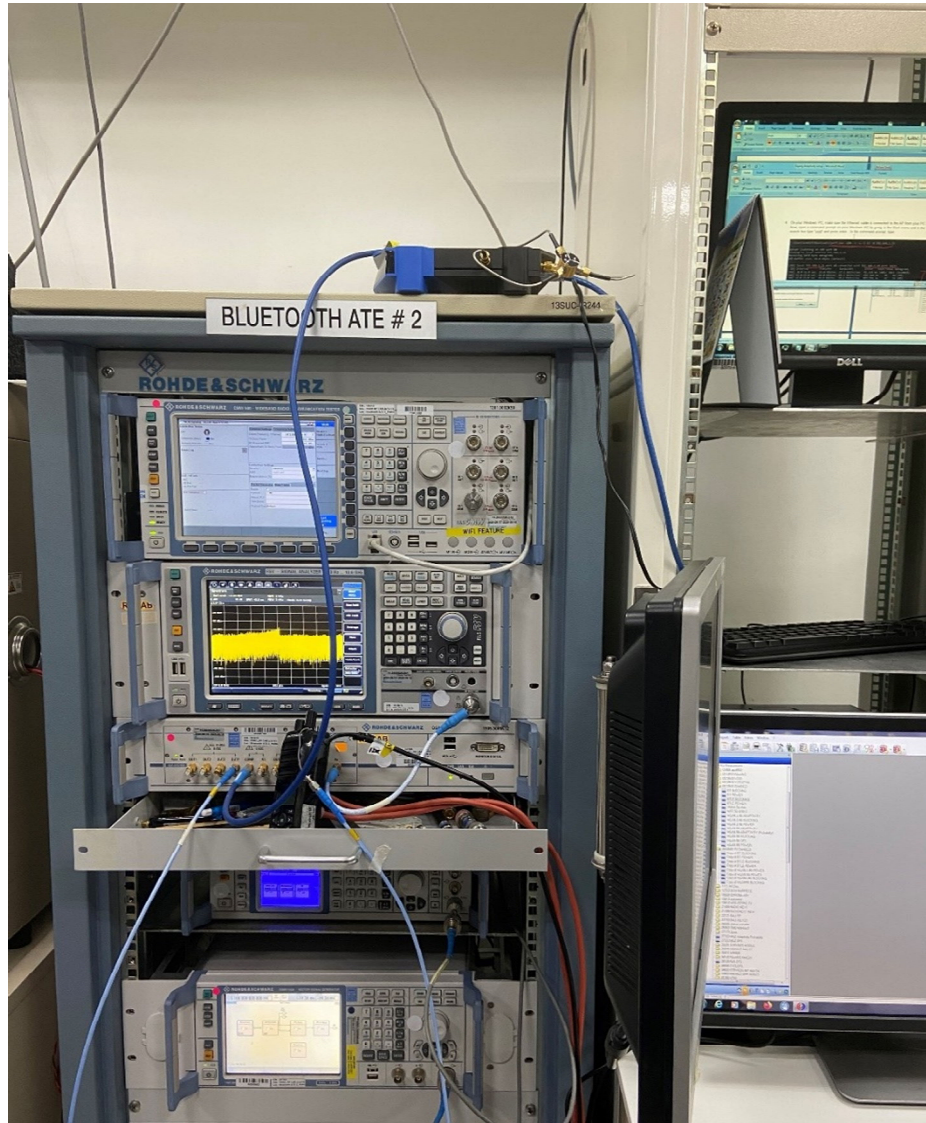

## 7. Test Requirements

### 7.1. DFS Requirements / Limits

Requirement	Limit
Channel Move Time	10 seconds
Channel Closing Transmission Time	200ms + an aggregate 60ms over following 10 seconds
Non-Occupancy Period	30 minutes

### 7.2. DFS Detection Threshold

The calibrated conducted DFS detection threshold level was set at -63 dBm. This level exceeds the specification for the stipulated detection level of -64dBm and ensures there is margin to the limit to ensure successful detection.



## 8. Test Procedure and Test Data


### 8.1. Test Method

DFS testing was performed using the conducted test methods defined in 905462 D02 UNII DFS Compliance Procedures New Rules v02. The device was a client only device without radar detection capability. The Rohde & Schwarz TS8997 test system in conjunction with WMS32 software was used for the automation of the testing.

### 8.2. Test Notes


DFS test data is inherited from FCC ID AZ492FT7124 as the subsection is identical to that of this filing.

### 8.3. Test Data

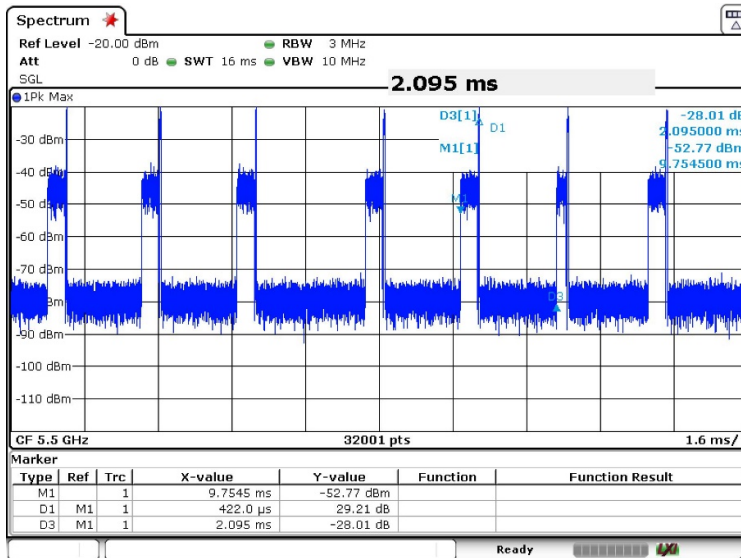


The resulting plot data was extracted and post processed, giving a duty cycle of 20.14%.

**DFS Detection Threshold**

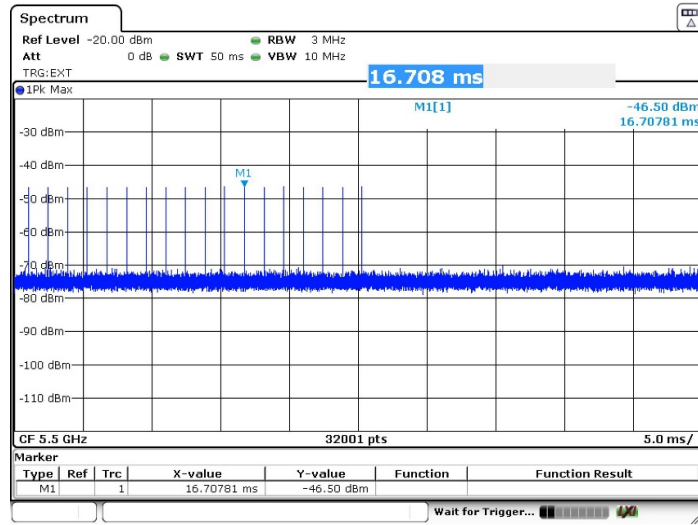

Peak of -46.50dBm, with losses at combiners factoring antenna gain to be 15.81dB, therefore level going into antenna port is -62.31dBm which exceeds threshold level of -64dBm for successful detection.

**Channel Move and Closing Time**

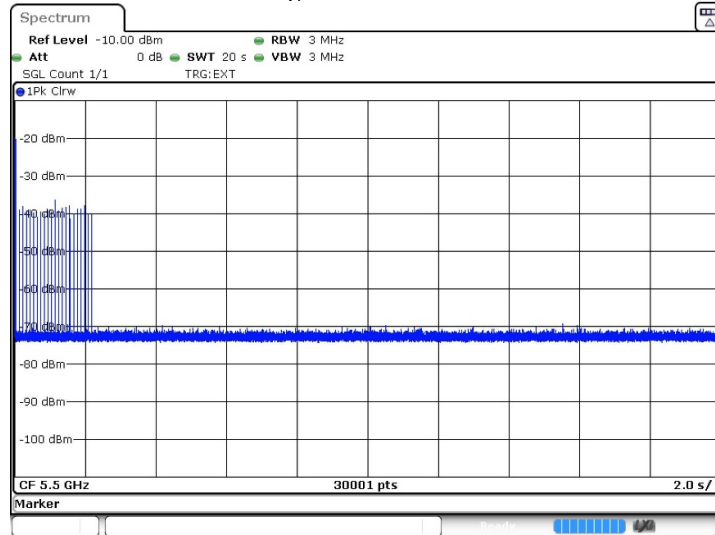


**Channel Closing and Channel Move Time  
 Detailed Results**

DUT Frequency (MHz)	Radar Type No.	Time duration	No of pulses found	Tx time (ms)	Tx Time Limit (ms)
5550	0	200ms	2	0.636	200
5550	0	remaining 10s period	19	6.140	60

Last transmission after injection of radar is 2.049 seconds, therefore meeting channel closing time 10s requirement.

### Non-Occupancy Period

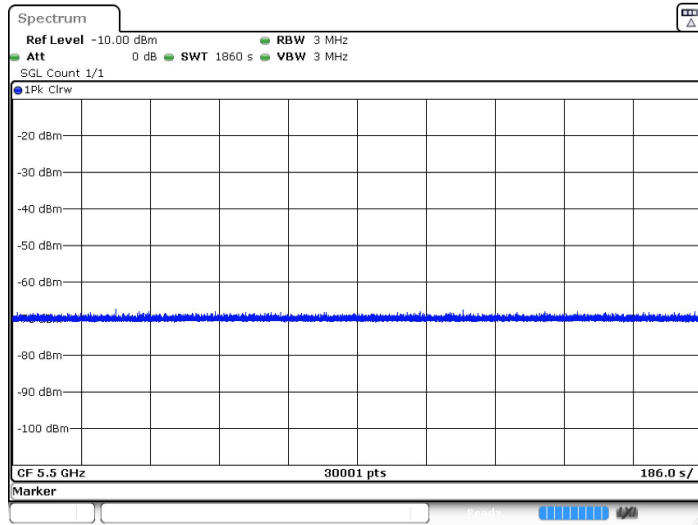

No pulses were detected in the 30 minutes that followed after channel move time, meeting non-occupancy 30 minute requirement.

## END OF TEST REPORT