

 MOTOROLA SOLUTIONS	 ACCREDITED TESTING CERT # 2518.01
---	--

DECLARATION OF COMPLIANCE: MPE ASSESSMENT

EME Test Laboratory 8000 West Sunrise Blvd Fort Lauderdale, FL. 33322	Date of Report: September 12, 2013 Report Revision: 0 Report ID: SR11610 MPE Auto Rpt APX 4500 900 MHz Rev 0 130912
--	--

Responsible Engineer: William Elliott (Principal Staff EME Test Engineer)
Report author: William Elliott (Principal Staff EME Test Engineer)
Date(s) Tested: 08/30/2013
Manufacturer/Location: Motorola Solutions, Penang, Malaysia
Date submitted for test: 08/13/2013
DUT Description: APX4500 900 MHz 30 Watt, 896-901 MHz & 935-940 MHz
 4 Watt, 901-902 MHz & 940-941 MHz
Test TX mode(s): CW
Max. Power output: 36W
TX Frequency Bands: 896-901MHz; 901-902 MHz; 935-940MHz; 940-941 MHz
Signaling type: Analog, APCO 25, and TDMA 1:2 (F2)
Model(s) Tested: M22WRS9PW1AN
Model(s) Certified: M22WRS9PW1AN
Serial Number(s): 471TPP0900
Classification: Occupational/Controlled Environment
FCC ID: AZ492FT5865
 Part 90 (896-901 MHz & 935-940 MHz) Part 24 (901-902 MHz & 940 – 941 MHz)
 Results outside FCC bands are not applicable for FCC compliance demonstration.

IC: 109U-92FT5865
 IC bands; (896-901 MHz & 935-940 MHz) & (901-902 MHz & 940 – 941 MHz)
 Results outside IC bands are not applicable for IC compliance demonstration.

Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 3.0 of this report. This report shall not be reproduced without written approval from an officially designated representative of the Motorola Solutions Inc. EME Laboratory.

I attest to the accuracy of the data and assume full responsibility for the completeness of these measurements.

This reporting format is consistent with the suggested guidelines of the TIA TSB-159 April 2006

The results and statements contained in this report pertain only to the device(s) evaluated herein.

 Deanna Zakharia EME Lab Senior Resource Manager and Laboratory Director Approval Date: 9/13/2013	Certification Date: 9/13/2013 Certification No.: L1130919P
---	---

Document Revision History

Date	Revision	Comments
09/12/2013	O	Initial release

Table of Contents

1.0 Introduction..... 4

2.0 Abbreviations / Definitions..... 4

3.0 Referenced Standards and Guidelines..... 4

4.0 Power Density Limits..... 5

5.0 N_c Test Channels..... 6

6.0 Measurement Equipment 6

7.0 Measurement System Uncertainty Levels..... 6

8.0 Product and System Description 7

9.0 Additional Options and Accessories 7

10.0 Test Set-Up Description..... 7

11.0 Method of Measurement with trunk mounted antenna(s)..... 8

 11.1 External/Bystander vehicle MPE measurements..... 8

 11.2 Internal/Passenger vehicle MPE measurements 8

12.0 Method of Measurement with roof mounted antenna(s)..... 9

 12.1 External/Bystander vehicle MPE measurements..... 9

 12.2 Internal/Passenger vehicle MPE measurements 9

13.0 MPE Calculations 10

14.0 Antenna Summary..... 11

15.0 Test Results Summary 11

16.0 Conclusion 16

 Appendix A - Illustration of Antenna Locations and Test Distances 17

 Appendix B - Probe Calibration Certificates 20

 Appendix C - Photos of Assessed Antennas..... 25

 Appendix D – MPE Measurement Results 26

1.0 Introduction

This report details the test setup, test equipment and test results of Maximum Permissible Exposure (MPE) performed at Motorola Solutions' outside test site for product model M22WRS9PW1AN.

2.0 Abbreviations / Definitions

APCO: Association of Public-Safety Communications Officials
BS: Bystander
C4FM: Compatible 4-Level Frequency Modulation
CNR: Calibration Not Required
CQPSK: Compatible Quadrature Phase Shift Keying
CW: Continuous Wave
DUT: Device Under Test
EME: Electromagnetic Energy
F2: 2 slot Time Division Multiple Access
FM: Frequency Modulation
MPE: Maximum Permissible Exposure
NA: Not Applicable
PB: Passenger Backseat
PF: Passenger Front seat
PTT: Push to Talk
TDMA: Time Division Multiple Access

3.0 Referenced Standards and Guidelines

This product is designed to comply with the following applicable national and international standards and guidelines.

- United States Federal Communications Commission, Code of Federal Regulations; Rule Part 47CFR § 1.1310, § 2.1091 (d) and § 2.1093 for RF Exposure, where applicable.
- Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- American National Standards Institute (ANSI) / Institute of Electrical and Electronics Engineers (IEEE) C95. 1-1999
- American National Standards Institute (ANSI) / Institute of Electrical and Electronics Engineers (IEEE) C95. 1-1992. Specific to FCC rules and regulations.
- Institute of Electrical and Electronics Engineers (IEEE) C95.3-2002
- International Commission on Non-Ionizing Radiation Protection (ICNIRP) 1998
- Ministry of Health (Canada) Safety Code 6 (2009), Limits of Human Exposure to Radio frequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz

4.0 Power Density Limits

Table 1 – Occupational / Controlled Exposure Limits

Frequency Range (MHz)	FCC OET Bulletin 65 Supplement C	ICNIRP	IEEE C95.1 1992/1999	IEEE C95.1 2005	RSS 102 issue 4 - 2010
	mW/cm ²	W/m ²	mW/cm ²	W/m ²	W/m ²
30 - 300	1.0				*10.0
10 - 400		10.0			
100 - 300			1.0	10.0	
300 - 1,500	f/300				f/30
300 - 3,000			f/300	f/30	
400 - 2,000		f/40			
1,500 - 15,000					50.0
1,500 - 100,000	5.0				
2,000 - 300,000		50.0			
3,000 - 300,000			10.0	100.0	

*Power density limit is applicable at frequencies greater than 100MHz

Table 2 – General Population / Uncontrolled Exposure Limits

Frequency Range (MHz)	FCC OET Bulletin 65 Supplement C	ICNIRP	IEEE C95.1 1992/1999	IEEE C95.1 2005	RSS 102 issue 4 – 2010
	mW/cm ²	W/m ²	mW/cm ²	W/m ²	W/m ²
30 – 300	0.2				*2.0
10 – 400		2.0			
100 – 300			0.2		
100 – 400				2.0	
300 – 1,500	f/1,500				f/150
400 – 2,000		f/200		f/200	
300 – 15,000			f/1,500		
1,500 – 15,000					10.0
1,500 – 100,000	1.0				
2,000 – 100,000				10.0	
2,000 – 300,000		10.0			

*Power density limit is applicable at frequencies greater than 100MHz

5.0 N_c Test Channels

The number of test channels are determined by using Equation 1 below. This equation is available in FCC’s KDB 447498. The test channels are appropriately spaced across the antenna’s frequency range.

Equation 1 – Number of test channels

$$N_c = \text{Round} \{ [100(f_{\text{high}} - f_{\text{low}})/f_c]^{0.5} \times (f_c / 100)^{0.2} \}$$

where N_c is the number of test channels, f_{high} and f_{low} are the highest and lowest frequencies within the transmission band, f_c is the mid-band frequency, and frequencies are in MHz.

6.0 Measurement Equipment

Table 3 - Equipment

Equipment Type	Model #	SN	Calibration Date	Calibration Due Date
Automobile	2003 Ford Crown Victoria, 4-Door	NA	NA	NA
Survey Meter Probe – E-Field	ETS Model HI-2200 ETS Model E100	00086887 00126277	07/2/2013	07/2/2014

Power density measurements made with E-Field meter are in mW/cm².

7.0 Measurement System Uncertainty Levels

Table 4 - Uncertainty Budget for Near Field Probe Measurements

	Tol. (± %)	Prob. Dist.	Divisor	u_i (±%)	v_i
Measurement System					
Probe Calibration	6.0	N	1.00	6.0	∞
Survey Meter Calibration	3.0	N	1.00	3.0	∞
Hemispherical Isotropy	8.0	R	1.73	4.6	∞
Linearity	5.0	R	1.73	2.9	∞
Pulse Response	1.0	R	1.73	0.6	∞
RF Ambient Noise	3.0	R	1.73	1.7	∞
RF Reflections	8.0	R	1.73	4.6	∞
Probe Positioning	10.0	R	1.73	5.8	∞
Test sample Related					
Antenna Positioning	3.0	N	1.00	3.0	∞
Power drift	5.0	R	1.73	2.9	∞
Combined Standard Uncertainty		RSS		12.2	∞
Expanded Uncertainty (95% CONFIDENCE LEVEL)		$k=2$		24	

8.0 Product and System Description

Model M22WRS9PW1AN is a mobile transceiver that utilizes analog, APCO 25 & F2 digital two-way radio communications. The analog modulation scheme uses Frequency Modulation (FM). APCO 25 & F2 digital modes use C4FM of CQPSK family of modulation (Compatible 4-Level Frequency Modulation of Compatible Quadrature Phase Shift Keying). F2 is a TDMA 1:2 protocol that allocates portions of the RF signal by dividing time into two slots (2 slots TDMA). Transmission from a unit or base station is accommodated in time-slot lengths of 30 milliseconds and frame lengths of 60 milliseconds. This product supports voice in analog mode, and both voice and data modes in digital mode.

The maximum duty cycle for TDMA is 1:2 (50%) and is controlled by software. The FM signal is continuous. However, because of hand shaking or Push-To-Talk (PTT) between users and/or base stations a conservative 50% duty cycle is applied. The TDMA mode was not tested because its duty cycle is inherently 50% and would include an additional 50% duty cycle for PTT.

The intended use of the radio is PTT while the device is properly installed in a vehicle with an external antenna mounted at the roof or trunk.

This device will be marketed to and used by employees solely for work-related operations, such as public safety agencies, e.g. police, fire and emergency medical. User training is the responsibility of these agencies which can be expected to employ the usage instructions, safety information and operational cautions set forth in the user's manual, instructional sessions or other means.

Accordingly this product is classified as Occupational/Controlled Exposure. However, in accordance with FCC requirements, the passengers inside the vehicle and the bystanders external to the vehicle are evaluated to the General Population/Uncontrolled Exposure Limits.

(Note that "Bystanders" as used herein are people other than operator)

9.0 Additional Options and Accessories

Refer to Table 5 for complete list of tested antennas.

10.0 Test Set-Up Description

Assessments were performed with mobile radio installed in the test vehicle while engine was at idle, at the specified distances and test locations indicated in sections 11.0, 12.0 and Appendix A.

All antennas described in Table 5 were considered in order to develop the test plan for this product. Antennas were installed and tested per their appropriate mount locations (Roof / Trunk) and defined test channels.

11.0 Method of Measurement with trunk mounted antenna(s)

11.1 External/Bystander vehicle MPE measurements

Antenna is located at the center of the trunk. Refer to Appendix A for antenna location and distance.

MPE measurements for bystander (BS) conditions are determined by taking the average of (10) measurements in a 2 m vertical line for each of the (3) bystander test locations indicated in Appendix A with 20 cm height increments, with antenna to probe sensor separation distances of 60 cm directly behind vehicle, 104 cm (45 degree radial) and 110.5 cm (90 degree radial). The separation distance used for testing is defined from the antenna where as the RF safety booklet defines the same distance from the vehicle body to ensure that the assessment is applicable to other vehicles. The measurement probe is positioned orthogonal to antenna (typically parallel to ground with a vertically mounted antenna) and aimed directly at the antenna's axis. These measurements are representative of persons other than the operator standing next to the vehicle.

Each of the offered antennas mounted at the center of the trunk were assessed at the rear of the vehicle while maintaining a minimum of twenty (20) centimeter separation distance between the probe sensor and vehicle body. The worst case antenna was then tested at a 45° radial at the corner of the trunk, and 90° radial at the side of the trunk.

Note: The distance from the centered trunk-mounted antenna to the rear edge of the vehicle is 42cm and the distance from the rear edge of the vehicle to the survey probe sensor is 18cm.

11.2 Internal/Passenger vehicle MPE measurements

Antenna is located toward the center of the trunk at a minimum 85cm from backseat passenger. Users are instructed, per installation manual, to mount antennas on the roof only if a minimum 85cm cannot be achieved. Refer to Appendix A for antenna location and distance.

MPE measurements for passenger front seat (PF) and backseat (PB) conditions are determined by taking the average of the (3) measurements (Head, Chest, and Lower Trunk) inside the vehicle for both the front and back seats.

The backseat is a bench seat and therefore each position (Head, Chest & Lower Trunk) were scanned across (horizontally) the seat starting from the middle of the seat to the edge of the seat stopping 20 cm from the vehicle door. Similar process was used in the front bucket seat.

The probe handle is oriented parallel (horizontal) to the ground and pointed towards the back of the vehicle. The probe handle is not oriented normal to the seat surface. The probe head (incorporating the field sensors) is scanned continuously (using the max-hold function available in the meter) along three test axes which are parallel to the seat angle (intended as the line determined by the intersection of the plane of the seat and the plane of the backrest) and are 20 cm from the seat surface. One test axis is at the Head height, another is at the Chest height, and another is at the Lower Trunk height. The maximum field level value recorded for each test axis is logged. The MPE is determined by averaging these three maximum values regardless of the geometrical location where they were observed. For instance, the locations of the three maxima may lie on different vertical (relative to

ground) lines.

This approach leads to results that are representative of the exposure of vehicle occupants since it is based on an average across the body portions closest to the antenna for both trunk and roof mount positions, and is conservatively biased because the highest results for each test axis are combined, e.g. the highest head exposure could be in the middle of the seat while the highest lower trunk exposure could be closer to the door.

12.0 Method of Measurement with roof mounted antenna(s)

12.1 External/Bystander vehicle MPE measurements

Antenna is located at the center of the roof. Refer to Appendix A for antenna location and distance.

MPE measurements for bystander (BS) conditions are determined by taking the average of (10) measurements in a 2m vertical line for the test location indicated in Appendix A with 20cm increments at the test distance of 117cm from the antenna under test. The measurement probe is positioned orthogonal to antenna (typically parallel to ground with a vertically mounted antenna) and aimed directly at the antenna's axis. These measurements are representative of persons other than the operator standing next to the vehicle.

Note: Actual test distance was approximately 117cm from centered roof-mounted antenna to the probe element (97cm from antenna to edge of car door and 20cm from the edge of the car door to the survey probe sensor); this is the closest distance that can be achieved to a centered roof-mounted antenna used for MPE compliance assessment herein.

12.2 Internal/Passenger vehicle MPE measurements

Antenna is located at the center of the roof. Refer to Appendix A for antenna location and distance.

MPE measurements for passenger front seat (PF) and backseat (PB) conditions are determined by taking the average of the (3) measurements (Head, Chest, and Lower Trunk) inside the vehicle for both the front and back seats.

The backseat is a bench seat and therefore each position (Head, Chest & Lower Trunk) were scanned across (horizontally) the seat starting from the middle of the seat to the edge of the seat stopping 20 cm from the vehicle door. Similar process was used in the front bucket seat.

The probe handle is oriented parallel (horizontal) to the ground and pointed towards the back of the vehicle. The probe handle is not oriented normal to the seat surface. The probe head (incorporating the field sensors) is scanned continuously (using the max-hold function available in the meter) along three test axes which are parallel to the seat angle (intended as the line determined by the intersection of the plane of the seat and the plane of the backrest) and are 20 cm from the seat surface. One test axis is at the Head height, another is at the Chest height, and another is at the Lower Trunk height. The maximum field level value recorded for each test axis is logged. The MPE is determined by averaging these three maximum values regardless of the geometrical location where they were observed. For instance, the locations of the three maxima may lie on different vertical (relative to ground) lines.

This approach leads to results that are representative of the exposure of vehicle occupants since it is based on an average across the body portions closest to the antenna for both trunk and roof mount positions, and is conservatively biased because the highest results for each test axis are combined, e.g. the highest head exposure could be in the middle of the seat while the highest lower trunk exposure could be closer to the door.

13.0 MPE Calculations

The final MPE results for this mobile radio are presented in section 15.0 Tables 6 - 9. These results are based on 50% duty cycle for PTT.

Below is an explanation of how the MPE results are calculated. Refer to Appendix D for MPE measurement results and calculations.

External to vehicle (Bystander) - 10 measurements are averaged over the body (*Avg_over_body*).
Internal to vehicle (Passengers) - 3 measurements are averaged over the body (*Avg_over_body*).

The Average over Body test methodology is consistent with IEEE/ANSI C95.3-2002 guidelines.

Therefore;

Equation 2 – Power Density Calculation (*Calc._P.D.*)

$$\text{Calc.}_P.D. = (\text{Avg_over_body}) * (\text{probe_frequency_cal_factor}) * (\text{duty_cycle})$$

Note 1: The highest “average” cal factors from the calibration certificates were selected for the applicable frequency range. Linear interpretation was used to determine “probe_frequency_cal_factor” for the specific test frequencies.

Note 2: The E-field probe calibration certificate’s frequency cal factors were determined by measuring V/m. The survey meter’s results were measured in power density (mW/cm²) and therefore the “probe_frequency_cal_factor” was squared in equation 2 to account for these results.

Note 3: The H-field probe calibration certificate’s frequency cal factors were determined by measuring A/m. The survey meter’s results were measured in A/m and therefore the “Avg_over_body” A/m results were converted to power density (mW/cm²) using the equation 3. H-field measurements are only applicable to frequencies below 300MHz.

Equation 3 – Converting A/m to mW/cm²

$$mW / cm^2 = (A / m)^2 * 37.699$$

Equation 4 – Power Density Maximum Calculation

$$\text{Max_Calc.}_P.D. = P.D._calc * \frac{\text{max_output_power}}{\text{initial_output_power}}$$

Note 4: For initial output power > max_output_power; max_output_power / initial output power = 1

14.0 Antenna Summary

Table 5 below summarizes the tested antennas and their descriptions, mount location (roof/trunk), overlap of FCC bands, number of test channels per FCC KDB 447498 (FCC N_c) and actual number of tested channels (Actual N_c). This information was used to determine the test configurations presented in this report.

Table 5

#	Antenna Model	Frequency Range (MHz)	Physical Length (cm)	Gain (dBi)	Remarks	Mount Location (Roof/Trunk)	Overlap FCC Bands	FCC N _c	Actual N _c
1	RRA4935B	890-960	27	3	Full wave, wire	R/T	896-902 935-941	6	6
2	RAF4003ARM*	890-960	27	3	Full wave, wire	R/T	896-902 935-941	6	6

* NOTE – During test plan development it was determined that antenna RAF4003ARM is electrically and mechanically identical to antenna RRA4935B. As a result, only antenna RRA4935B was tested and the results for antenna RAF4003ARM are expected to be identical by similarity. The only difference between the two is the cable length that comes with the antenna kit. The kit with the shorter cable was chosen to represent the worst case.

15.0 Test Results Summary

The following tables below summarize the MPE results for each test configuration: antenna location, test positions (BS-Bystander, PB-Passenger Backseat, PF-Passenger Front seat), E/H field measurements, angle, antenna model & freq. range, maximum output power, initial power, TX frequency, max calculated power density results, applicable FCC/IEEE/ICNIRP specification limits and % of the applicable specification limits.

Table 6
Bystander MPE assessment for trunk mounted antennas

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC Limit	% To FCC Spec Limit	ICNIRP Limit	% To ICNIRP Spec Limit
Trunk	BS	E	0	RRA4935B (890-960 MHz)	36	34.9	896.0125	0.11	0.60	19	0.45	25
						35.1	898.5125	0.11	0.60	19	0.45	25
						34.8	900.9875	0.11	0.60	19	0.45	25
						35	935.0125	0.04	0.62	6	0.47	8
						35.2	937.5125	0.07	0.63	12	0.47	15
						35.3	939.9875	0.06	0.63	10	0.47	13
WC 45												
Trunk	BS	E	45	RRA4935B (890-960 MHz)	36	34.9	896.0125	0.06	0.60	9	0.45	12
WC 90												
Trunk	BS	E	90	RRA4935B (890-960 MHz)	36	34.9	896.0125	0.05	0.60	8	0.45	10

Table 7

Passenger MPE assessment for trunk mounted antennas

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC Limit	% To FCC Spec Limit	ICNIRP Limit	% To ICNIRP Spec Limit
Trunk	PB	E	NA	RRA4935B (890-960 MHz)	36	34.9	896.0125	0.15	0.60	26	0.45	34
						35.1	898.5125	0.16	0.60	26	0.45	35
						34.8	900.9875	0.15	0.60	26	0.45	34
						35	935.0125	0.05	0.62	7	0.47	10
						35.2	937.5125	0.09	0.63	15	0.47	20
						35.3	939.9875	0.09	0.63	14	0.47	18
	PF	E	NA	RRA4935B (890-960 MHz)	36	34.9	896.0125	0.07	0.60	11	0.45	15
						35.1	898.5125	0.07	0.60	12	0.45	16
						34.8	900.9875	0.06	0.60	10	0.45	13
						35	935.0125	0.02	0.62	4	0.47	5
						35.2	937.5125	0.04	0.63	6	0.47	8
						35.3	939.9875	0.03	0.63	4	0.47	6

Table 8
Bystander MPE assessment for roofmounted antennas

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC Limit	% To FCC Spec Limit	ICNIRP Limit	% To ICNIRP Spec Limit
Roof	BS	E	0	RRA4935B (890-960 MHz)	36	34.9	896.0125	0.04	0.60	6	0.45	9
						35.1	898.5125	0.04	0.60	7	0.45	9
						34.8	900.9875	0.04	0.60	6	0.45	9
						35	935.0125	0.02	0.62	2	0.47	3
						35.2	937.5125	0.03	0.63	4	0.47	6
						35.3	939.9875	0.02	0.63	4	0.47	5

Table 9
Passenger MPE assessment for roof mounted antennas

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC Limit	% To FCC Spec Limit	ICNIRP Limit	% To ICNIRP Spec Limit
Roof	PB	E	NA	RRA4935B (890-960 MHz)	36	34.9	896.0125	0.01	0.60	2	0.45	3
						35.1	898.5125	0.01	0.60	2	0.45	3
						34.8	900.9875	0.02	0.60	3	0.45	4
						35	935.0125	0.01	0.62	1	0.47	1
						35.2	937.5125	0.01	0.63	1	0.47	2
						35.3	939.9875	0.01	0.63	1	0.47	2
	PF	E	NA	RRA4935B (890-960 MHz)	36	34.9	896.0125	0.01	0.60	1	0.45	1
						35.1	898.5125	0.01	0.60	1	0.45	1
						34.8	900.9875	0.01	0.60	1	0.45	2
						35	935.0125	0.00	0.62	0	0.47	1
						35.2	937.5125	0.00	0.63	1	0.47	1
						35.3	939.9875	0.00	0.63	1	0.47	1

16.0 Conclusion

The assessments for this device were performed with an output power range as indicated in section 15.0 Tables 6 - 9. The maximum allowable output power is equal to the upper limit of the final test factory transmit power specification of 36 W. The highest power density results for the mobile device scaled to the maximum allowable power output are indicated in Table 10 for internal/passenger to the vehicle, and external/bystander to the vehicle.


Table 10: Maximum MPE RF Exposure Summary

Designator	Frequency (MHz)	Passenger (mW/cm²)	Bystander (mW/cm²)
Overall	896-902 935-941	0.16	0.11
FCC	896-902 935-941	0.16	0.11
IC	896-902 935-941	0.16	0.11


These MPE results herein demonstrate compliance to the FCC/IEEE Occupational/Controlled Exposure limit. FCC rules require compliance for Passengers and Bystanders to the FCC General Population/Uncontrolled limits.

Appendix A - Illustration of Antenna Locations and Test Distances

62cm Trunk Distance

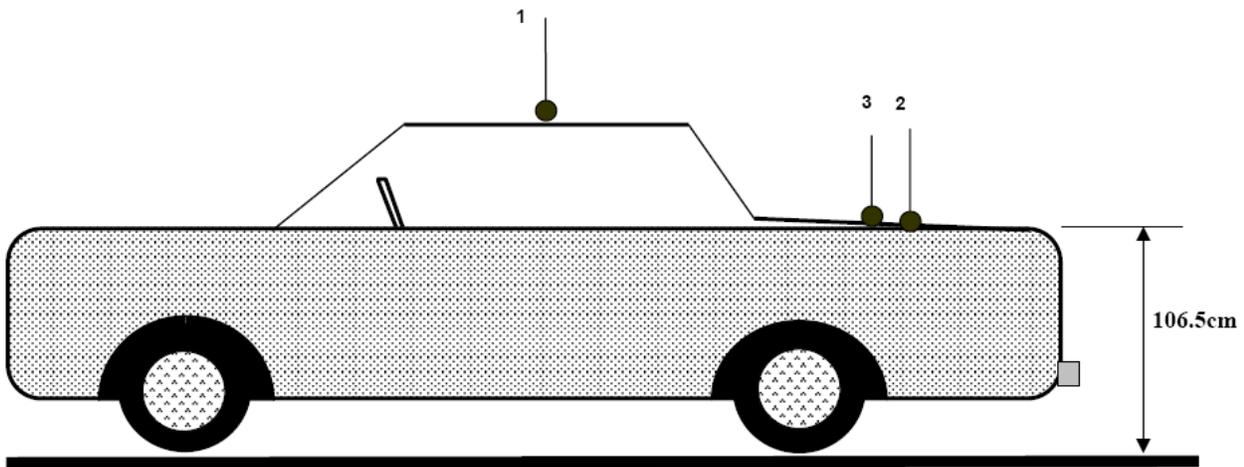

- 1 - Roof (center)
- 2 - Trunk (center)
- 3 - Trunk (85cm from back of the back seat)

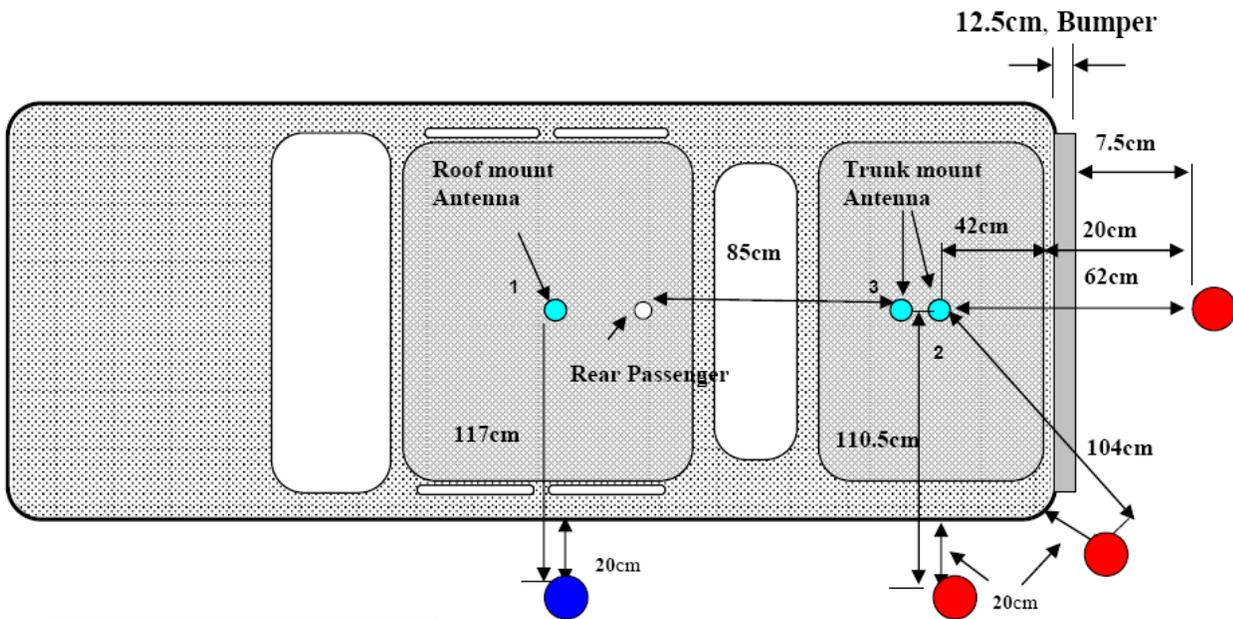

By-Stander Test Locations


- Roof Mount
- Trunk Mount

Note: The distance from the centered trunk-mounted antenna to the edge of the vehicle is 42cm and the distance from the edge of the vehicle to the survey probe sensor is 20cm.

Seat scan areas
(Applicable to both front and back seats)

Meter - Probe

 Probe diameter is 5.5cm

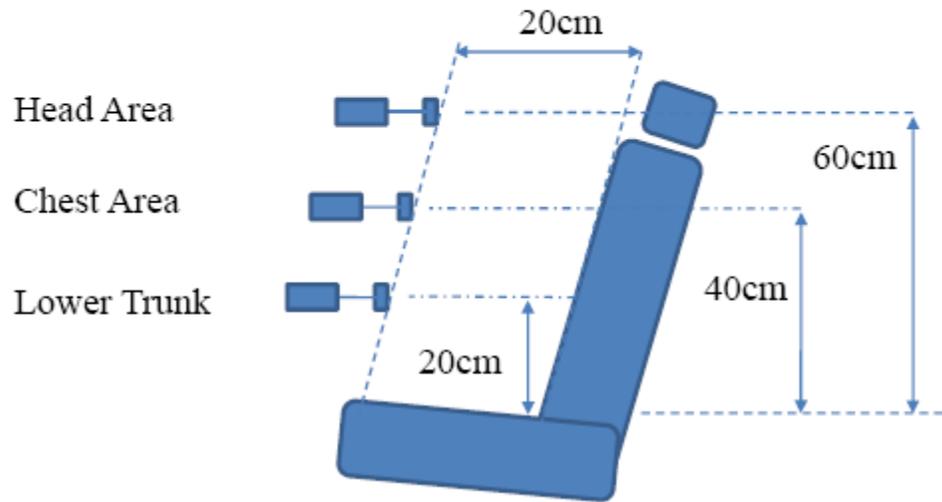

Appendix B - Probe Calibration Certificates

Service Test Report
QAF 1126, 03/11
Report ID: 97870



Certificate of Test Conformance
Page 1 of 1

Reference: S 000028173
Customer: AGILENT/MOTOROLA (FL)

The instrument listed below has been tested and verified to Internal Quality Standards. Test data is Not Applicable. Equipment used during instrument testing is controlled by laboratory compliance with ISO/IEC 17025-2005 and ANSI/NCSL Z540-1-1994 using ETS-Lindgren Quality Management System internal procedures.

<u>Manufacturer</u>	ETS-Lindgren	<u>Status In</u>	In Tolerance
<u>Instrument Type</u>	RF Survey Meter	<u>Date Completed</u>	02-Jul-13
<u>Model</u>	HI-2200	<u>Status Out</u>	Compliant with Internal Quality Standards
<u>Serial Number/ID</u>	00086887		

Remarks
Functional test performed with customer's probes.

I would like to take this opportunity to express our appreciation for using ETS-Lindgren for your EMI test equipment services and I am looking forward to continued business with your organization. Please feel free to contact our offices at (512) 531-6400, if you have any questions regarding this report.

Sincerely,

Doug Kramer
EMC/Wireless Lab Manager

Date Attested: 02-Jul-13



Cert I.D.: 97868

Certificate of Calibration Conformance
Page 1 of 3

The instrument identified below has been individually calibrated in compliance with the following standard(s):

IEEE 1309 - 2005, Institute of Electrical and Electronics Engineers, Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas from 9 kHz to 40 GHz

Environment: Laboratory MTE is maintained in a temperature controlled environment with ambient conditions from 18 to 28 C, relative humidity less than 90%. The instrument under test has been calibrated in a suitable environment using an EMCO TEM Cell 5101C, GTEM! 5305 and an RF Shielded EMC Chamber which is conducive to maintaining accurate and reliable measurement quality.

Manufacturer:	ETS-Lindgren	Operating Range:	100kHz - 5GHz
Model Number:	E100	Instrument Type:	Isotropic Probe > 1 GHz
Serial Number/ ID:	00126277	Date Code:	
Tracking Number:	S 000028173	Alternate ID:	
Date Completed:	02-Jul-13	Customer:	AGILENT/MOTOROLA (FL)
Test Type:	Standard Field, Field Strength		
Calibration Uncertainty:	Std Field Method	10kHz - 18000 MHz, +/-0.7 dB, 26.5GHz - 40GHz, +/- 0.95 dB, Isotropy +/- 0.86	
	k=2, (95% Confidence Level)		

Test Remarks: Special Calibration: Additional data provided per customer request. Probe calibrated with HI-2200 s/n 00086887.

Calibration Traceability: All Measuring and Test Equipment (MTE) identified below are traceable to the SI units through the National Institute for Standards and Technology (NIST) or other recognized National Metrology Institute. Calibration Laboratory and Quality System controls are compliant with ISO/IEC 17025-2005 and ANSI/NCCL Z540-1-1994.

Standards and Equipment Used:				Condition of Instrument	
Make / Model / Name / S/N / Recall Date				Upon Receipt:	
Agilent/HP	8648C	Signal Generator	3623A03573	23-Jan-14	In Tolerance to Internal Quality Standards
Agilent	E4419B	Power Meter	MY45104171	04-Oct-13	
Agilent/HP	8648C	Signal Generator	3847A04406	23-Jan-14	On Release: In Tolerance to Internal Quality Standards
Agilent	E4419B	Power Meter	MY45103242	23-Jan-14	
Rohde & Schwarz	857.8008.02	Power Meter NRVD	100451	03-May-14	
Hewlett Packard	83650L	Synthesized Sweep Gen	3844A00422	03-May-14	
Rohde & Schwarz	SMB 100A	Signal Generator	101558	10-Apr-14	

Calibration Completed By
 George Cisneros, Calibration Supervisor

Attested and Issued on 02-Jul-13
 Doug Kramer, EMC/Wireless Lab Manager

CALIBRATION REPORT

Electric Field Sensor

<i>Model</i>	<i>S/N</i>
E100	00126277
HI-2200	00086887

Date: 01 July 2013

- New Instrument
- Other
- Out of Tolerance
- Within Tolerance

Frequency Response

Frequency Response	Nominal		Cal Factor*	Deviation
	MHz	Field V/m		
1	1	20	1.04	-0.34
2	15	20	1.00	0.02
3	30	20	1.00	0.00
4	75	20	1.01	-0.07
5	100	20	1.02	-0.15
6	150	20	0.96	0.35
7	200	20	0.93	0.60
8	250	20	0.95	0.46
9	300	20	0.94	0.52
10	400	20	0.95	0.47
11	500	20	0.98	0.22
12	600	20	1.01	-0.07
13	700	20	1.02	-0.15
14	800	20	1.00	-0.03
15	900	20	0.99	0.13
16	1000	20	0.94	0.50
17	2000	20	0.95	0.47
18	2450	20	1.01	-0.09
19	3000	20	1.02	-0.17
20	3500	20	0.97	0.30
21	4000	20	1.01	-0.11
22	5000	20	1.37	-2.76
23	5500	20	1.41	-2.96
24	6000	20	1.43	-3.12

* Corrected electric field values (V/m) can be obtained by multiplying the Cal Factor with the indicated E field readings.

Linearity

maximum linearity deviation is 0.2 dB
 (measurements taken from 0.3 V/m to 800 V/m at 27.12 MHz)

Test Conditions

Calibration performed at ambient room temperature: 23 ±3°C



PROBE ROTATIONAL RESPONSE

Model E100
S/N 00126277
Date Date of Calibration 01 July 2013
Time 08:21:33 AM
Isotropy * + 0.373 dB/ -0.373 dB

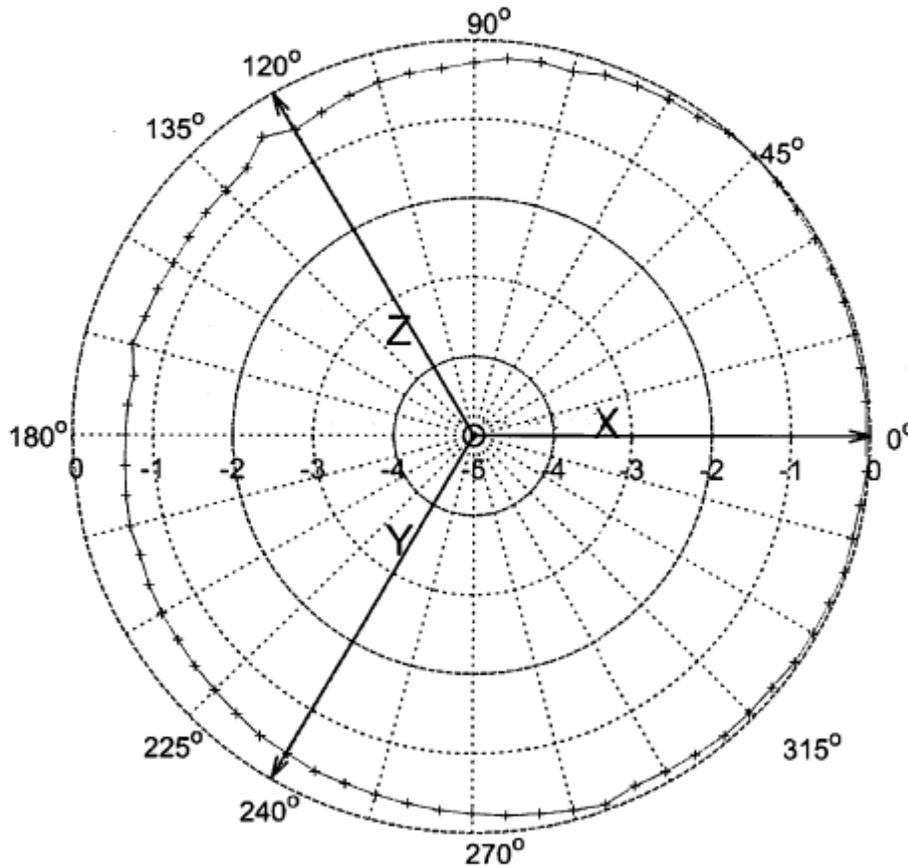


Figure 1: Probe Isotropic Response Chart.

Isotropic response is measured in a 20 V/m field at 400 MHz
*Isotropy is the maximum deviation from the geometric mean as defined by IEEE 1309-2005.

Appendix C - Photos of Assessed Antennas
(Refer to Exhibit 7B)

Appendix D – MPE Measurement Results

MPE measurement data for Bystander

D.U.T. Info.							Probe Info.		Test Pos.	Bystander (BS) Positions										DUT Max. TX Factor	Avg. over Body (mW/cm ²)	Calc. P.D. (mW/cm ²)	Max Calc. P.D. (mW/cm ²)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		20 cm	40 cm	60 cm	80 cm	100 cm	120 cm	140 cm	160 cm	180 cm	200 cm				
Trunk	RRA4935B (890-960 MHz)	3	896.0125	36	34.9	CW	E	0.98	BS	0.004	0.017	0.061	0.143	0.614	0.737	0.380	0.091	0.083	0.108	0.5	0.224	0.110	0.11
Trunk	RRA4935B (890-960 MHz)	3	898.5125	36	35.1	CW	E	0.98	BS	0.002	0.016	0.061	0.140	0.606	0.721	0.380	0.100	0.080	0.099	0.5	0.221	0.108	0.11
Trunk	RRA4935B (890-960 MHz)	3	900.9875	36	34.8	CW	E	0.98	BS	0.003	0.015	0.059	0.134	0.611	0.724	0.383	0.115	0.083	0.088	0.5	0.222	0.108	0.11
Trunk	RRA4935B (890-960 MHz)	3	935.0125	36	35	CW	E	0.95	BS	0.001	0.009	0.025	0.042	0.193	0.260	0.120	0.072	0.050	0.024	0.5	0.080	0.038	0.04
Trunk	RRA4935B (890-960 MHz)	3	937.5125	36	35.2	CW	E	0.94	BS	0.002	0.018	0.045	0.076	0.362	0.496	0.227	0.125	0.094	0.046	0.5	0.149	0.070	0.07
Trunk	RRA4935B (890-960 MHz)	3	939.9875	36	35.3	CW	E	0.94	BS	0.003	0.016	0.046	0.068	0.316	0.427	0.197	0.113	0.085	0.042	0.5	0.131	0.062	0.06
WC 45																							
Trunk	RRA4935B (890-960 MHz)	3	896.0125	36	34.9	CW	E	0.98	BS	0.002	0.014	0.027	0.067	0.183	0.346	0.178	0.051	0.202	0.022	0.5	0.109	0.054	0.06
WC 90																							
Trunk	RRA4935B (890-960 MHz)	3	896.0125	36	34.9	CW	E	0.98	BS	0.010	0.008	0.016	0.047	0.146	0.318	0.244	0.083	0.029	0.022	0.5	0.092	0.045	0.05

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.		Test Pos.	Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/cm2)	Calc. P.D. (mW/cm2)	Max Calc. P.D. (mW/cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Trunk	RRA4935B (890-960 MHz)	3	896.0125	36	34.9	CW	E	0.98	PB	0.430	0.263	0.213	0.5	0.302	0.148	0.15
Trunk	RRA4935B (890-960 MHz)	3	898.5125	36	35.1	CW	E	0.98	PB	0.335	0.430	0.169	0.5	0.311	0.153	0.16
Trunk	RRA4935B (890-960 MHz)	3	900.9875	36	34.8	CW	E	0.98	PB	0.376	0.431	0.108	0.5	0.305	0.149	0.15
Trunk	RRA4935B (890-960 MHz)	3	935.0125	36	35	CW	E	0.95	PB	0.136	0.066	0.084	0.5	0.095	0.045	0.05
Trunk	RRA4935B (890-960 MHz)	3	937.5125	36	35.2	CW	E	0.94	PB	0.289	0.127	0.158	0.5	0.191	0.090	0.09
Trunk	RRA4935B (890-960 MHz)	3	939.9875	36	35.3	CW	E	0.94	PB	0.271	0.139	0.128	0.5	0.179	0.084	0.09
Trunk	RRA4935B (890-960 MHz)	3	896.0125	36	34.9	CW	E	0.98	PF	0.090	0.198	0.113	0.5	0.134	0.066	0.07
Trunk	RRA4935B (890-960 MHz)	3	898.5125	36	35.1	CW	E	0.98	PF	0.092	0.171	0.154	0.5	0.139	0.068	0.07
Trunk	RRA4935B (890-960 MHz)	3	900.9875	36	34.8	CW	E	0.98	PF	0.108	0.126	0.118	0.5	0.117	0.057	0.06
Trunk	RRA4935B (890-960 MHz)	3	935.0125	36	35	CW	E	0.95	PF	0.062	0.045	0.029	0.5	0.045	0.021	0.02
Trunk	RRA4935B (890-960 MHz)	3	937.5125	36	35.2	CW	E	0.94	PF	0.101	0.071	0.053	0.5	0.075	0.035	0.04
Trunk	RRA4935B (890-960 MHz)	3	939.9875	36	35.3	CW	E	0.94	PF	0.078	0.049	0.040	0.5	0.056	0.026	0.03

MPE calculations are defined in section 13.0.

MPE measurement data for Bystander

D.U.T. Info.							Probe Info.		Test Pos.	Bystander (BS) Positions										DUT Max. TX Factor	Avg. over Body (mW/cm2)	Calc. P.D. (mW/cm2)	Max Calc. P.D. (mW/cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		20 cm	40 cm	60 cm	80 cm	100 cm	120 cm	140 cm	160 cm	180 cm	200 cm				
Roof	RRA4935B (890-960 MHz)	3	896.0125	36	34.9	CW	E	0.98	BS	0.004	0.004	0.003	0.019	0.038	0.054	0.103	0.204	0.228	0.108	0.5	0.077	0.038	0.04
Roof	RRA4935B (890-960 MHz)	3	898.5125	36	35.1	CW	E	0.98	BS	0.004	0.004	0.004	0.021	0.040	0.055	0.105	0.222	0.228	0.099	0.5	0.078	0.038	0.04
Roof	RRA4935B (890-960 MHz)	3	900.9875	36	34.8	CW	E	0.98	BS	0.004	0.004	0.004	0.023	0.037	0.054	0.101	0.214	0.217	0.100	0.5	0.076	0.037	0.04
Roof	RRA4935B (890-960 MHz)	3	935.0125	36	35	CW	E	0.95	BS	0.001	0.004	0.002	0.011	0.007	0.023	0.046	0.088	0.085	0.046	0.5	0.031	0.015	0.02
Roof	RRA4935B (890-960 MHz)	3	937.5125	36	35.2	CW	E	0.94	BS	0.002	0.002	0.004	0.018	0.012	0.043	0.083	0.165	0.153	0.083	0.5	0.057	0.027	0.03
Roof	RRA4935B (890-960 MHz)	3	939.9875	36	35.3	CW	E	0.94	BS	0.002	0.002	0.003	0.015	0.010	0.041	0.077	0.154	0.141	0.074	0.5	0.052	0.024	0.02

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.		Test Pos.	Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/cm2)	Calc. P.D. (mW/cm2)	Max Calc. P.D. (mW/cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	RRA4935B (890-960 MHz)	3	896.0125	36	34.9	CW	E	0.98	PB	0.025	0.031	0.028	0.5	0.028	0.014	0.01
Roof	RRA4935B (890-960 MHz)	3	898.5125	36	35.1	CW	E	0.98	PB	0.031	0.020	0.027	0.5	0.026	0.013	0.01
Roof	RRA4935B (890-960 MHz)	3	900.9875	36	34.8	CW	E	0.98	PB	0.029	0.026	0.039	0.5	0.031	0.015	0.02
Roof	RRA4935B (890-960 MHz)	3	935.0125	36	35	CW	E	0.95	PB	0.010	0.012	0.011	0.5	0.011	0.005	0.01
Roof	RRA4935B (890-960 MHz)	3	937.5125	36	35.2	CW	E	0.94	PB	0.015	0.018	0.022	0.5	0.018	0.009	0.01
Roof	RRA4935B (890-960 MHz)	3	939.9875	36	35.3	CW	E	0.94	PB	0.016	0.016	0.019	0.5	0.017	0.008	0.01
Roof	RRA4935B (890-960 MHz)	3	896.0125	36	34.9	CW	E	0.98	PF	0.013	0.008	0.016	0.5	0.012	0.006	0.01
Roof	RRA4935B (890-960 MHz)	3	898.5125	36	35.1	CW	E	0.98	PF	0.014	0.017	0.006	0.5	0.012	0.006	0.01
Roof	RRA4935B (890-960 MHz)	3	900.9875	36	34.8	CW	E	0.98	PF	0.020	0.014	0.015	0.5	0.016	0.008	0.01
Roof	RRA4935B (890-960 MHz)	3	935.0125	36	35	CW	E	0.95	PF	0.004	0.006	0.007	0.5	0.006	0.003	0.00
Roof	RRA4935B (890-960 MHz)	3	937.5125	36	35.2	CW	E	0.94	PF	0.004	0.015	0.007	0.5	0.009	0.004	0.00
Roof	RRA4935B (890-960 MHz)	3	939.9875	36	35.3	CW	E	0.94	PF	0.003	0.014	0.010	0.5	0.009	0.004	0.00

MPE calculations are defined in section 13.0.