

FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart C § 15.225

Equipment : Point of Sales Terminal
Model No. : VX680
Brand Name : VeriFone
Filing Type : New Application
Applicant : VeriFone, Inc.
1400 West Stanford Ranch Road Suit 200 Rocklin
CA 95765 USA
FCC ID : B32VX680GPRSCTL
Manufacturer : Inventec Appliances (Pudong) Co.,Ltd.
No.789 Pu Xing Road, Shanghai, PRC
Received Date : Feb. 08, 2010
Final Test Date : Feb. 12, 2010

Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



SPORTON International Inc.

6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

1 SUMMARY OF THE TEST RESULT	2
2 GENERAL INFORMATION	3
2.1 Product Details	3
2.2 Accessories	3
2.3 Table for Test Modes	3
2.4 Table for Testing Locations	4
2.5 Table for Supporting Units	4
2.6 Test Configurations	4
3 TEST RESULT	6
3.1 AC Power Line Conducted Emissions Measurement	6
3.2 Field Strength of Fundamental Emissions and Mask Measurement	10
3.3 20dB Spectrum Bandwidth Measurement	13
3.4 Radiated Emissions Measurement	15
3.5 Frequency Stability Measurement	26
3.6 Antenna Requirements	28
4 LIST OF MEASURING EQUIPMENTS	29
5 TEST LOCATION	31
6 TAF CERTIFICATE OF ACCREDITATION	32
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. PHOTOGRAPHS OF EUT	B1 ~ B22

History of This Test Report

Original Issue Date: Feb. 22, 2010

Report No.: FR020118

- No additional attachment.
- Additional attachment were issued as following record:

CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart C § 15.225

Equipment : Point of Sales Terminal

Model No. : VX680

Brand Name : VeriFone

Applicant : VeriFone, Inc.

1400 West Stanford Ranch Road Suit 200
Rocklin CA 95765 USA

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Feb. 08, 2010 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Wayne Hsu

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1 SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	11.84 dB
3.2	15.225(a)	Field Strength of Fundamental Emissions	Complies	44.06 dB
3.3	15.215(c)	20dB Spectrum Bandwidth	Complies	-
3.4	15.225(d)	Radiated Emissions	Complies	13.44 dB
3.5	15.225(e)	Frequency Stability	Complies	-
3.6	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Field Strength of Fundamental Emissions	±0.8dB	Confidence levels of 95%
20dB Spectrum Bandwidth / Frequency Stability	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated / Band Edge Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

2 GENERAL INFORMATION

2.1 Product Details

Items	Description
Power Type	12Vdc from AC Adapter ; 7.2Vdc from Li-ion Battery
Modulation	ASK
Channel Number	1
Channel Band Width (99%)	2.66 kHz
Max. Field Strength	58.94 dBuV/m at 10m (QP)
Test Freq. Range	13.553 ~ 13.567MHz
Carrier Frequencies	13.56 MHz (CH 1)
Antenna	Integrate Antenna (Without any antenna connector)

2.2 Accessories

Accessories Information					
Accessories or 2nd Source or Key Part	AC Adapter 1	Brand Name	VeriFone	Model Name	Au-79A0n
		Power Rating	I/P: 100-240Vac, 600mA, O/P:12Vdc, 2A		
	Battery 1 (Palladium Energy)	Brand Name	VeriFone	Model Name	24016-01-R
		Power Rating	7.2 Vdc, 1800mAh	Type	Li-ion
	Battery 2 (SANYO)	Brand Name	VeriFone	Model Name	24016-01-R
		Power Rating	7.2 Vdc, 1800mAh	Type	Li-ion
	2G Module	Brand Name	Cinterion	Model Name	mc55i
	RFID Module	Brand Name	NXP	Model Name	PN512

2.3 Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel	Antenna
AC Power Line Conducted Emissions	Normal Mode	-	-
Field Strength of Fundamental Emissions	CTX	1	1
20dB Spectrum Bandwidth	CTX	1	NA
Radiated Emissions 9kHz~30MHz	CTX	1	1
Radiated Emissions 9kHz~10 th Harmonic			
Band Edge Emissions	CTX	1	1
Frequency Stability	Un-modulation	1	NA

Note: CTX=continuously transmitting.

2.4 Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
CO01-HY	Conduction	Hwa Ya	643075	IC 4086B-1
TH01-HY	OVEN Room	Hwa Ya	-	-
10CH02-HY	SAC	Hwa Ya	643075	IC 4086B-1
03CH02-HY	SAC	Hwa Ya	643075	IC 4086B-1

Semi Anechoic Chamber (SAC).


2.5 Table for Supporting Units


The EUT was tested alone.

2.6 Test Configurations

2.6.1 Radiation Emissions Test Configuration

For radiated emissions 9kHz~30MHz

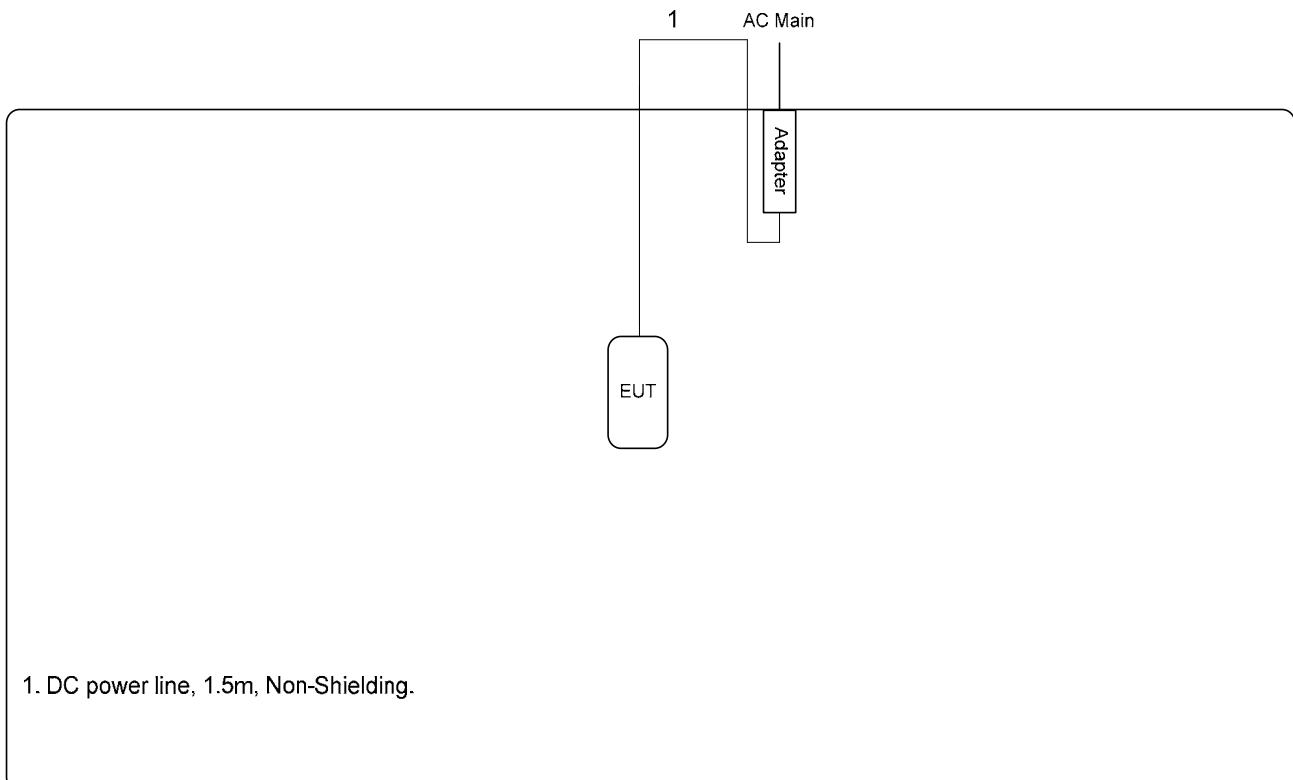

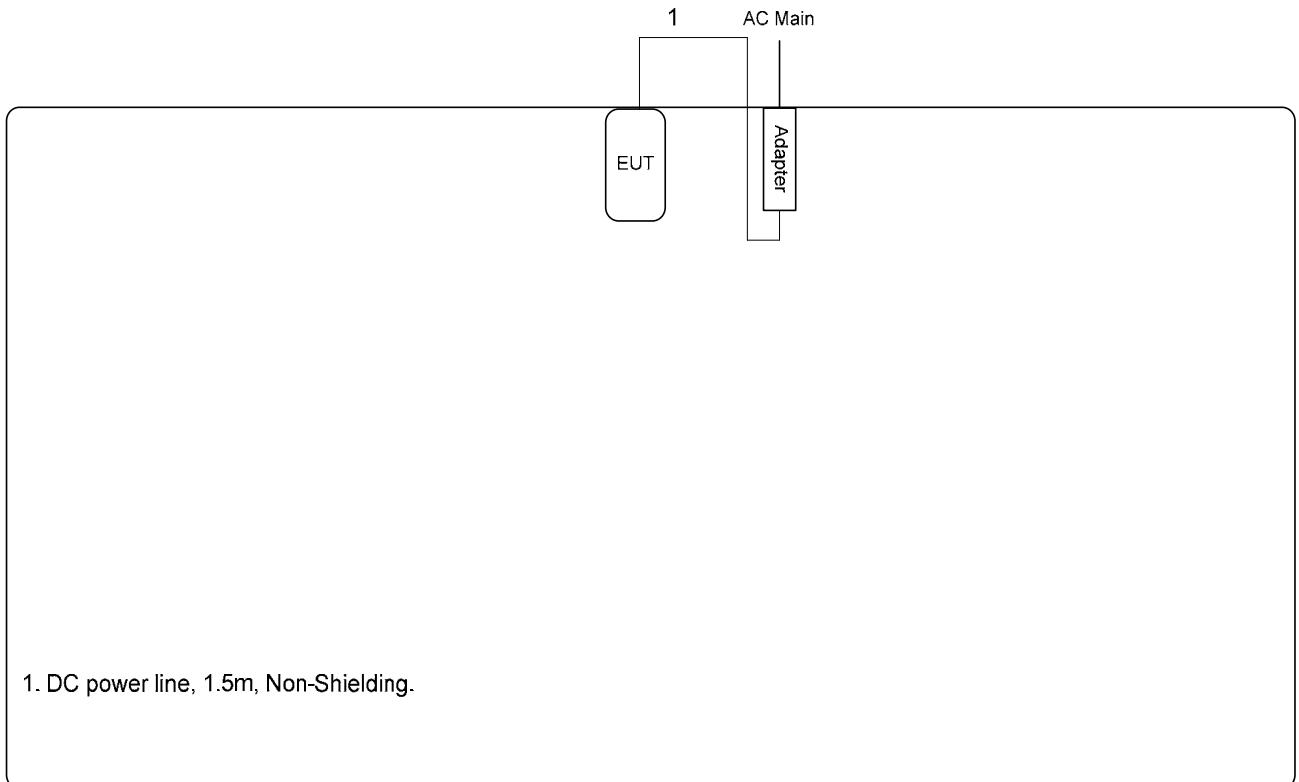For radiated emissions 30MHz~1GHz

3 TEST RESULT

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit

For a Low-power Radio-frequency device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

3.1.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.1.3 Test Procedures

1. The EUT warm up about 15 minutes then start test.
2. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. The measurement has to be done between each power line and ground at the power terminal.

3.1.4 Test Setup Layout

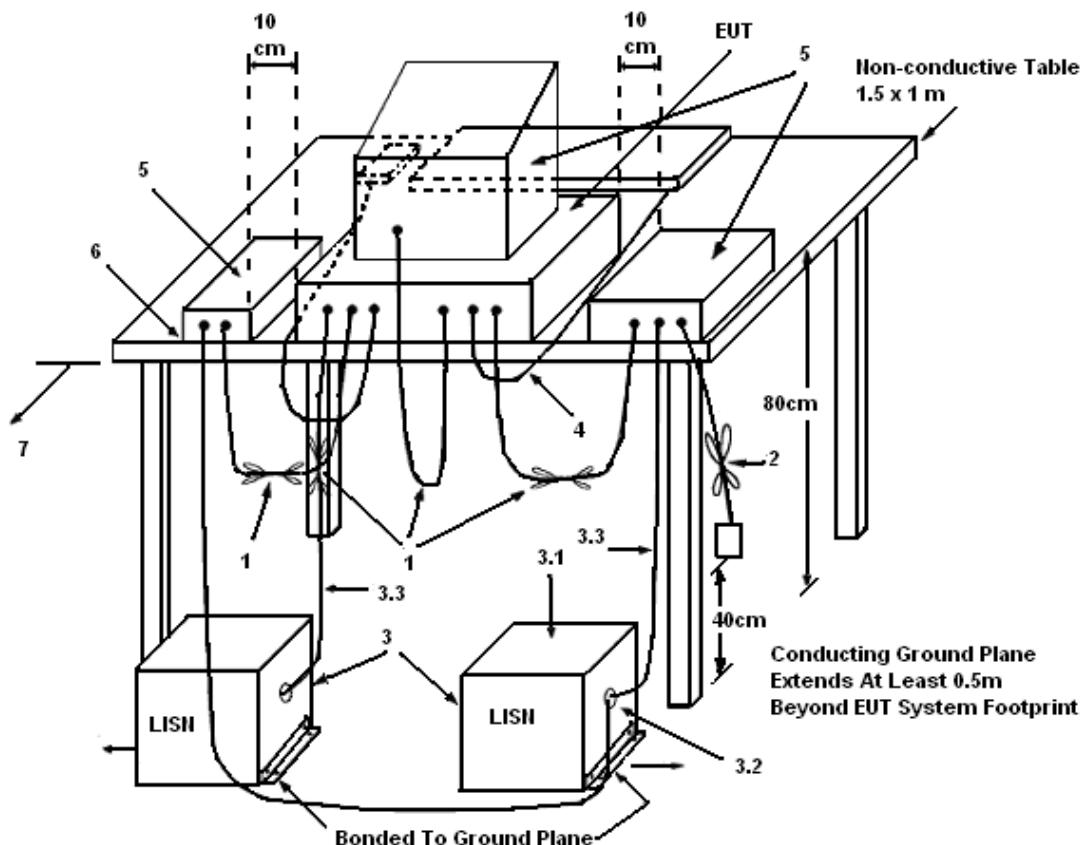

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in $50\ \Omega$. LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

3.1.5 Test Deviation

There is no deviation with the original standard.


3.1.6 EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


3.1.7 Results of AC Power Line Conducted Emissions Measurement

Final Test Date	Feb. 12, 2010	Test Site No.	CO01-HY
Temperature	23°C	Humidity	55%
Test Engineer	Steven	Configuration	Normal Mode

Line

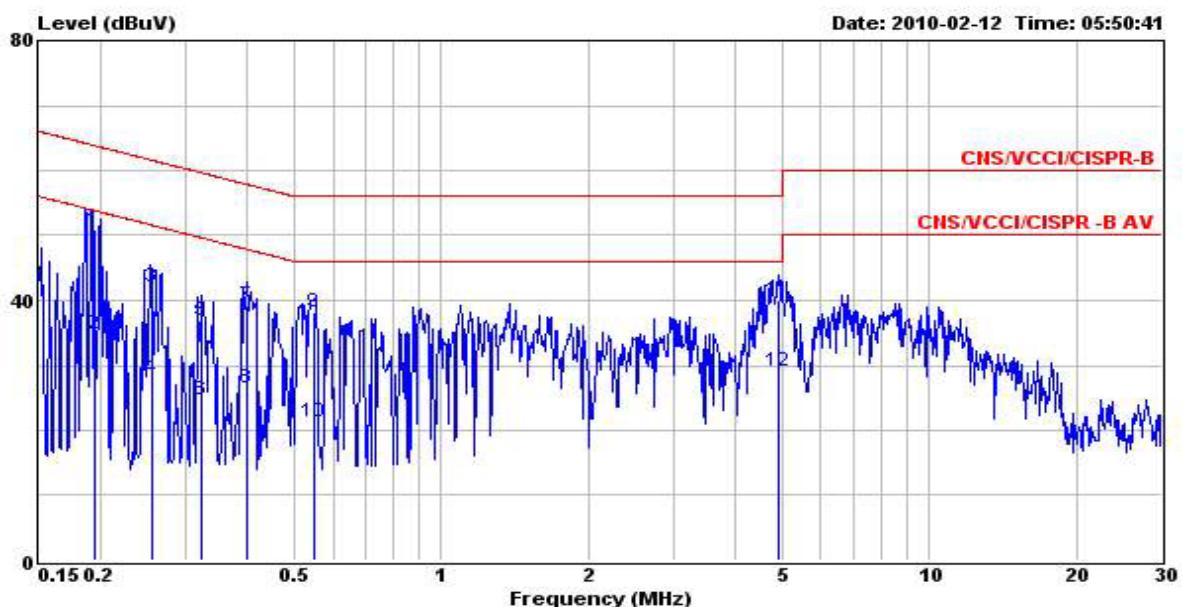

Freq	Level	Over Limit	Limit Line	Read	Probe Factor	Cable Loss	Remark
				dBuV			
1	0.195	51.02	-12.79	63.81	50.88	0.08	0.06 QP
2	0.195	34.70	-19.11	53.81	34.56	0.08	0.06 Average
3	0.256	42.03	-19.54	61.57	41.89	0.08	0.06 QP
4	0.256	27.95	-23.62	51.57	27.81	0.08	0.06 Average
5	0.323	36.89	-22.74	59.63	36.73	0.09	0.07 QP
6	0.323	24.72	-24.91	49.63	24.56	0.09	0.07 Average
7	0.400	39.12	-18.73	57.85	38.96	0.09	0.07 QP
8	0.400	26.58	-21.27	47.85	26.42	0.09	0.07 Average
9	0.551	38.06	-17.94	56.00	37.87	0.10	0.09 QP
10	0.551	21.36	-24.64	46.00	21.17	0.10	0.09 Average
11	4.900	39.99	-16.01	56.00	39.63	0.19	0.17 QP
12	4.900	29.08	-16.92	46.00	28.72	0.19	0.17 Average

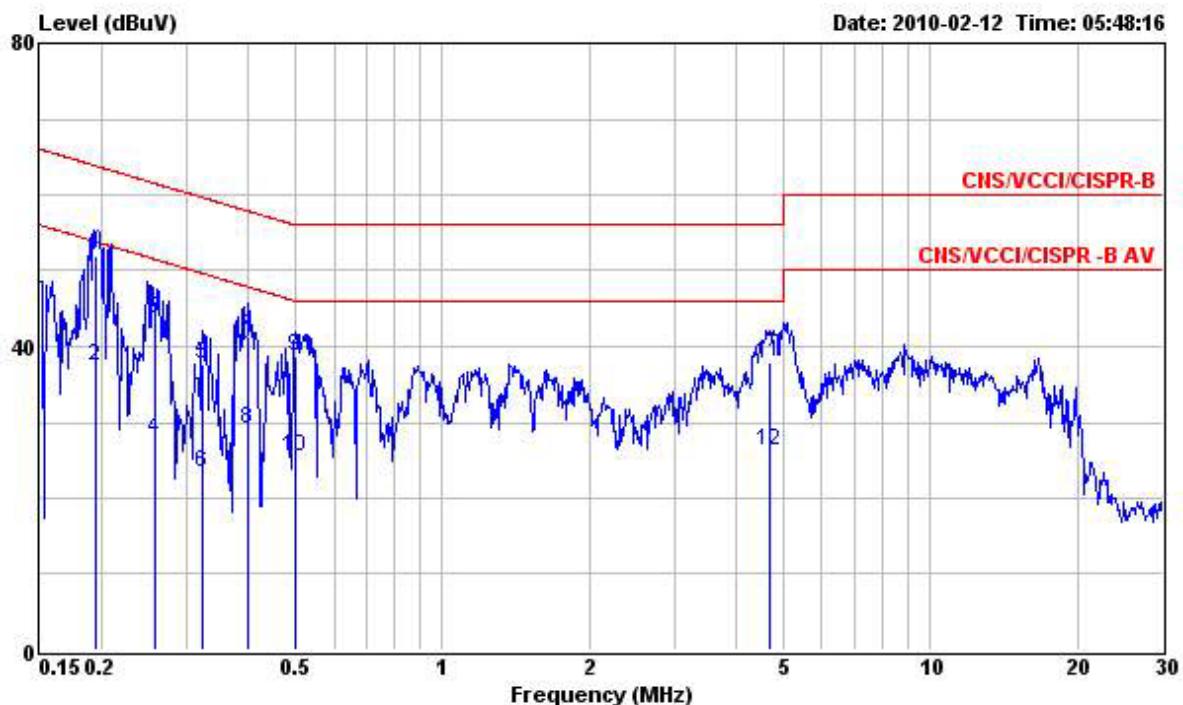Neutral

Freq	Level	Over	Limit	Read	Probe	Cable	Remark
		Limit	Line	Level	Factor	Loss	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.194	52.00	-11.84	63.84	51.88	0.06	0.06 QP
2	0.194	37.51	-16.33	53.84	37.39	0.06	0.06 Average
3	0.257	43.66	-17.87	61.53	43.54	0.06	0.06 QP
4	0.257	27.70	-23.83	51.53	27.58	0.06	0.06 Average
5	0.323	37.74	-21.89	59.63	37.60	0.07	0.07 QP
6	0.323	23.47	-26.16	49.63	23.33	0.07	0.07 Average
7	0.400	41.39	-16.46	57.85	41.25	0.07	0.07 QP
8	0.400	29.15	-18.70	47.85	29.01	0.07	0.07 Average
9	0.502	38.76	-17.24	56.00	38.60	0.07	0.09 QP
10	0.502	25.43	-20.57	46.00	25.27	0.07	0.09 Average
11	4.700	37.85	-18.15	56.00	37.53	0.16	0.16 QP
12	4.700	26.14	-19.86	46.00	25.82	0.16	0.16 Average

Note:

Level = Read Level + LISN Factor + Cable Loss.

3.2 Field Strength of Fundamental Emissions and Mask Measurement

3.2.1 Limit

Field strength of fundamental emissions limit:

The field strength of fundamental emissions shall not exceed 15848 micorvolts/meter at 30 meters. The emissions limit in this paragraph is based on measurement instrumentation employing a QP detector.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Field Strength (dB μ V/m) at 10m	Field Strength (dB μ V/m) at 3m
13.553 ~ 13.567MHz	15848 at 30m	103 (QP)	124 (QP)

Mask limit:

Rules and specifications	CFR 47 Part 15 section 15.225(a)-(d)				
Description	Compliance with the spectrum mask is tested using a spectrum analyzer with RB set to a 1kHz for the band 13.553~13.567MHz				
Limit	Freq. of Emission (MHz)	Field Strength (uV/m) at 30m	Field Strength (dB μ V/m) at 30m	Field Strength (dB μ V/m) at 10m	Field Strength (dB μ V/m) at 3m
1.705~13.110	30	29.5	48.58	69.5	
13.110~13.410	106	40.5	59.58	80.5	
13.410~13.553	334	50.5	69.58	90.5	
13.553~13.567	15848	84.0	103.08	124.0	
13.567~13.710	334	50.5	69.58	90.5	
13.710~14.010	106	40.5	59.58	80.5	
14.010~30.000	30	29.5	48.58	69.5	

3.2.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	Auto
Center Frequency	Fundamental Frequency
RB	9 kHz
Detector	QP


3.2.3 Test Procedures

- Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
- Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine

the position of the highest radiation.

3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested using a spectrum analyzer with RB set to a 1kHz for the band 13.553~13.567MHz.

3.2.4 Test Setup Layout

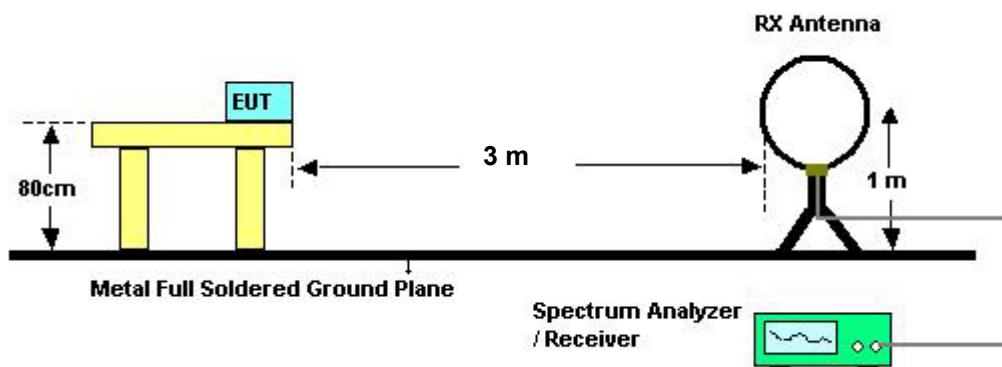

3.2.5 Test Deviation

There is no deviation with the original standard.


3.2.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.2.7 Test Result of Field Strength of Fundamental Emissions

Final Test Date	Feb. 08, 2010	Test Site No.	10CH02-HY
Temperature	23°C	Humidity	55%
Test Engineer	Billy	Configurations	Channel 1

Freq. (MHz)	Level (dB _u V/m)	Over Limit (dB)	Limit Line (dB _u V/m) at 10m	Remark
13.56 MHz	58.94	-44.06	103	QP

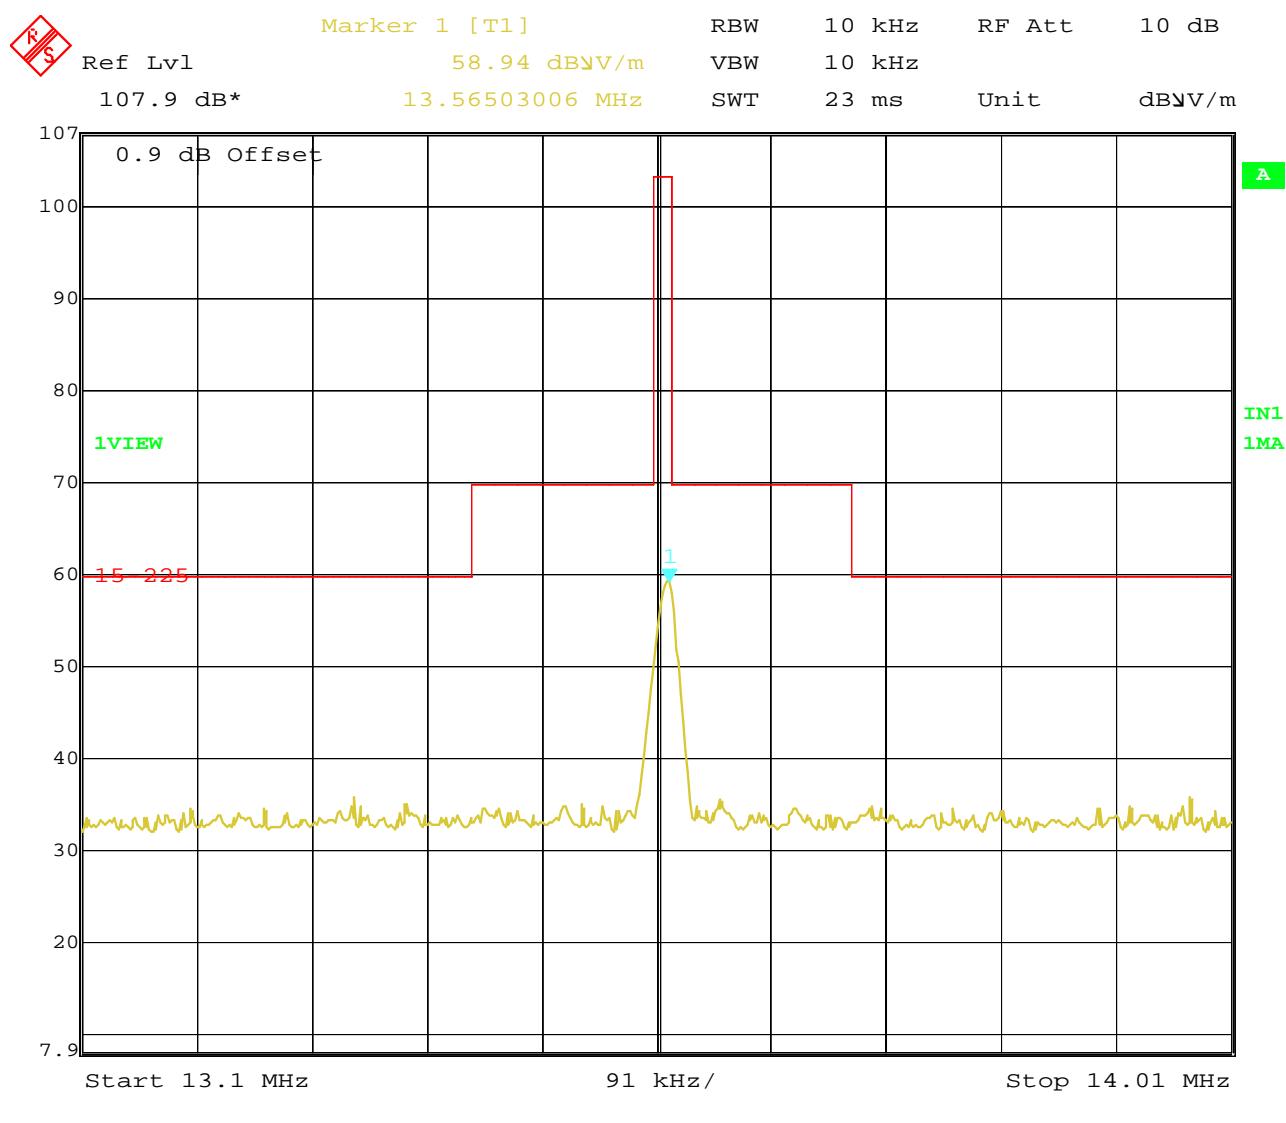

Note:

Emission level (dB_uV/m) = 20 log Emission level (uV/m).

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dB_uV) + distance extrapolation factor.

3.3 20dB Spectrum Bandwidth Measurement

3.3.1 Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (13.553 ~ 13.567MHz).

3.3.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 20dB Bandwidth
RB	1 kHz
VB	1 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.3.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 1 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.

3.3.4 Test Setup Layout

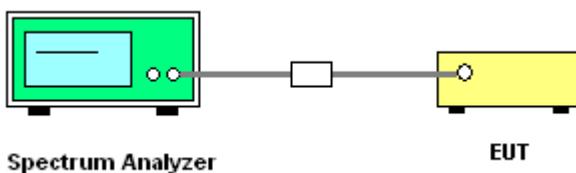

3.3.5 Test Deviation

There is no deviation with the original standard.

3.3.6 EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.3.7 Test Result of 20dB Spectrum Bandwidth

Final Test Date	Feb. 09, 2010	Test Site No.	TH01-HY
Temperature	28°C	Humidity	58%
Test Engineer	Duncan	Configurations	Ch 1

Frequency	20dB BW (kHz)	99% OBW (kHz)	Frequency range (MHz) $f_L > 13.553\text{MHz}$	Frequency range (MHz) $f_H < 13.567\text{MHz}$	Test Result
13.56 MHz	2.95	2.66	13.5593	13.5622	Complies

20 dB/99% Bandwidth Plot on 13.56 MHz

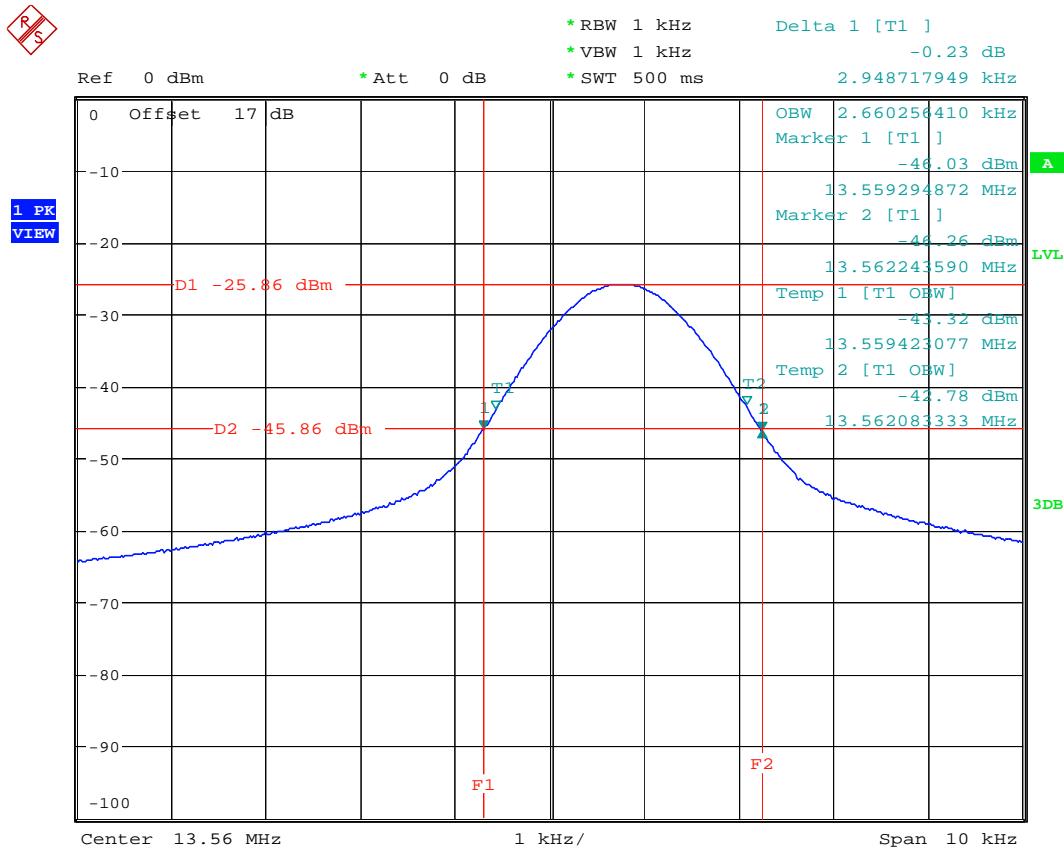

Date: 9.FEB.2010 17:11:19

3.4 Radiated Emissions Measurement

3.4.1 Limit

The field strength of any emissions which appear outside of 13.553 ~ 13.567MHz band shall not exceed the general radiated emissions limits in Section 15.209(a)

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.4.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of receiver.

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.4.3 Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1

seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.


7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.4.4 Test Setup Layout

For radiated emissions below 30MHz

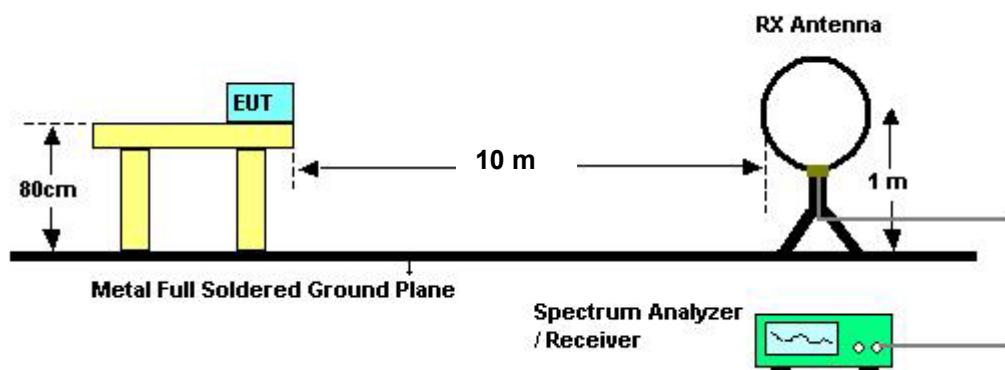

For radiated emissions above 30MHz

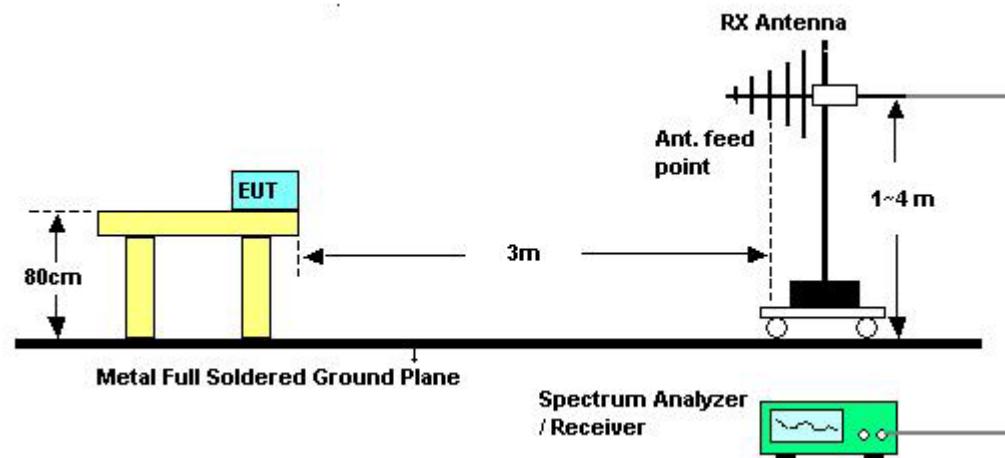

3.4.5 Test Deviation

There is no deviation with the original standard.


3.4.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


3.4.7 Results of Radiated Emissions (9kHz~30MHz)

Final Test Date	Feb. 08, 2010	Test Site No.	10CH02-HY
Temperature	23°C	Humidity	55%
Test Engineer	Billy	Configurations	Channel 1


9KHz~150KHz

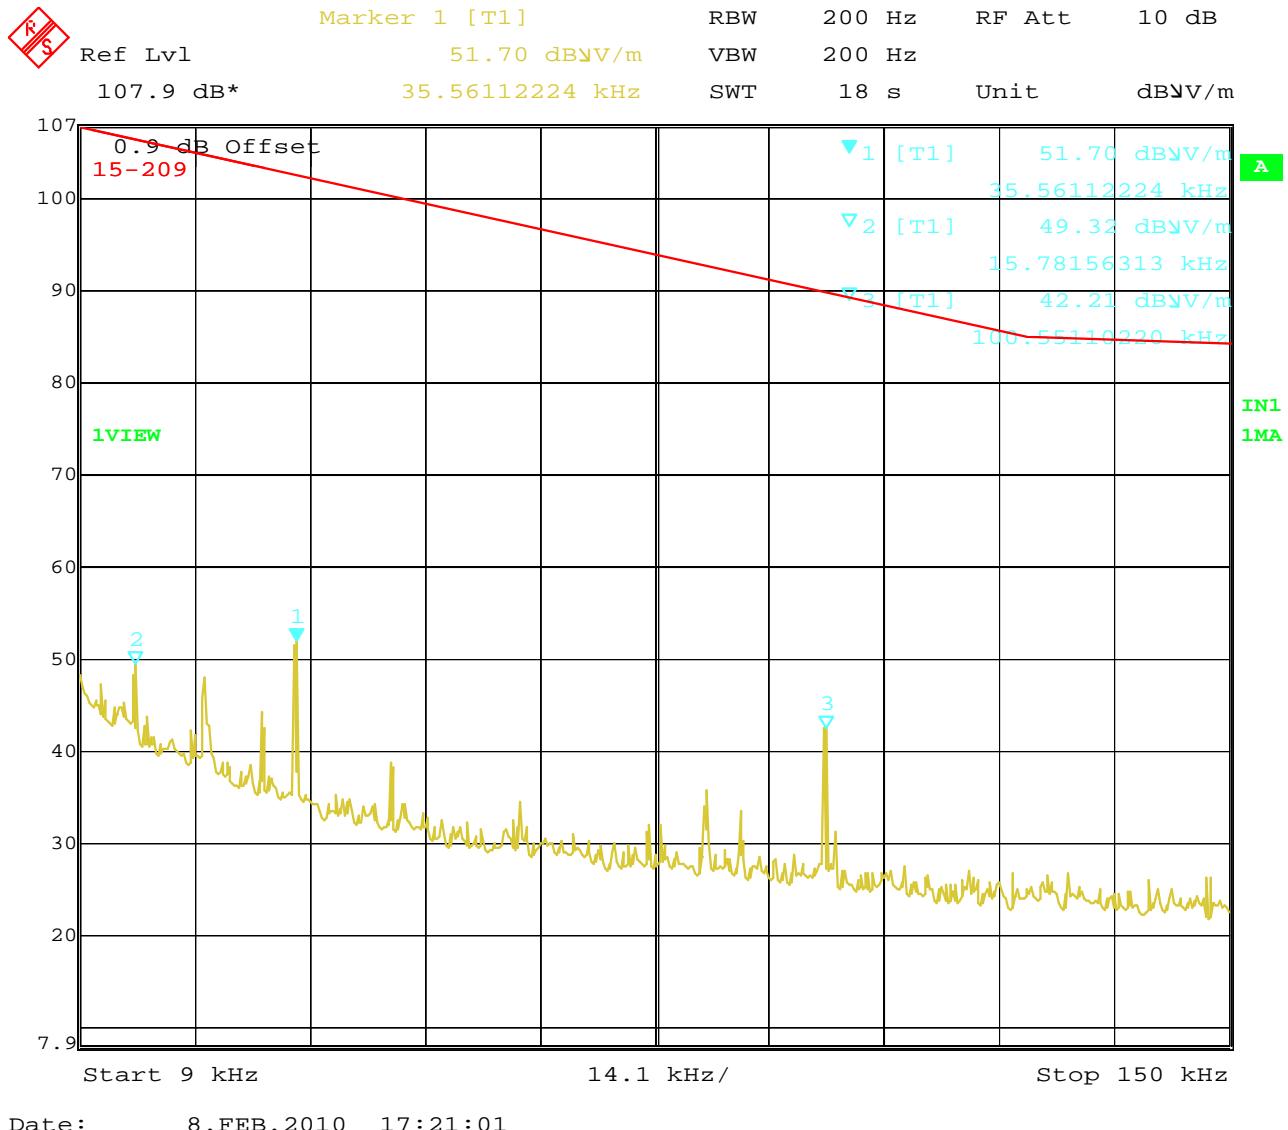


150KHz~2MHz

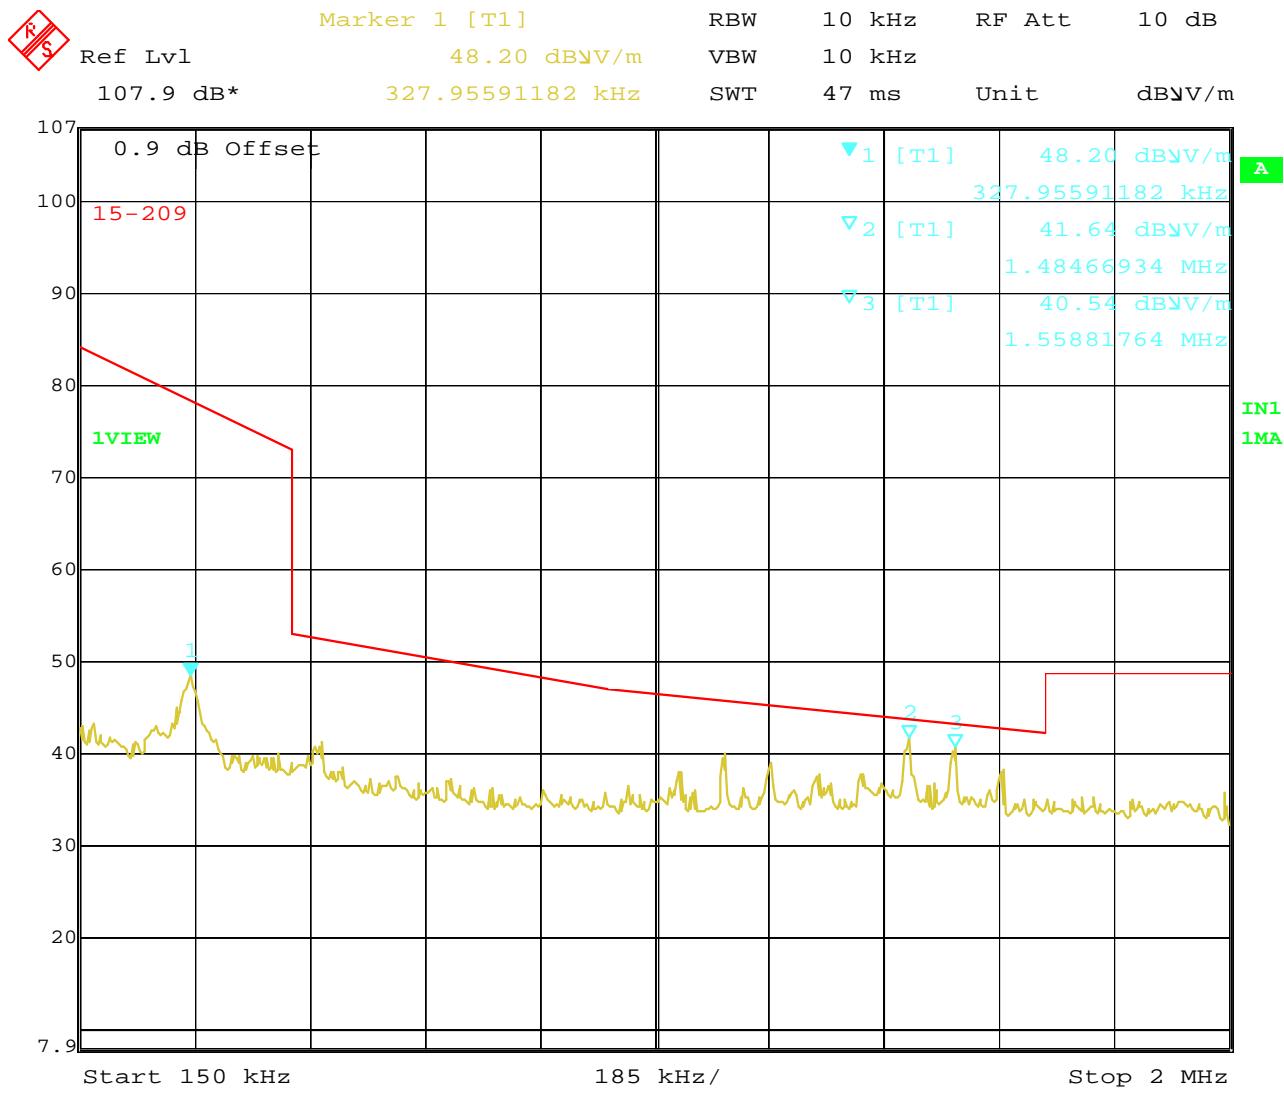

2MHz~8MHz

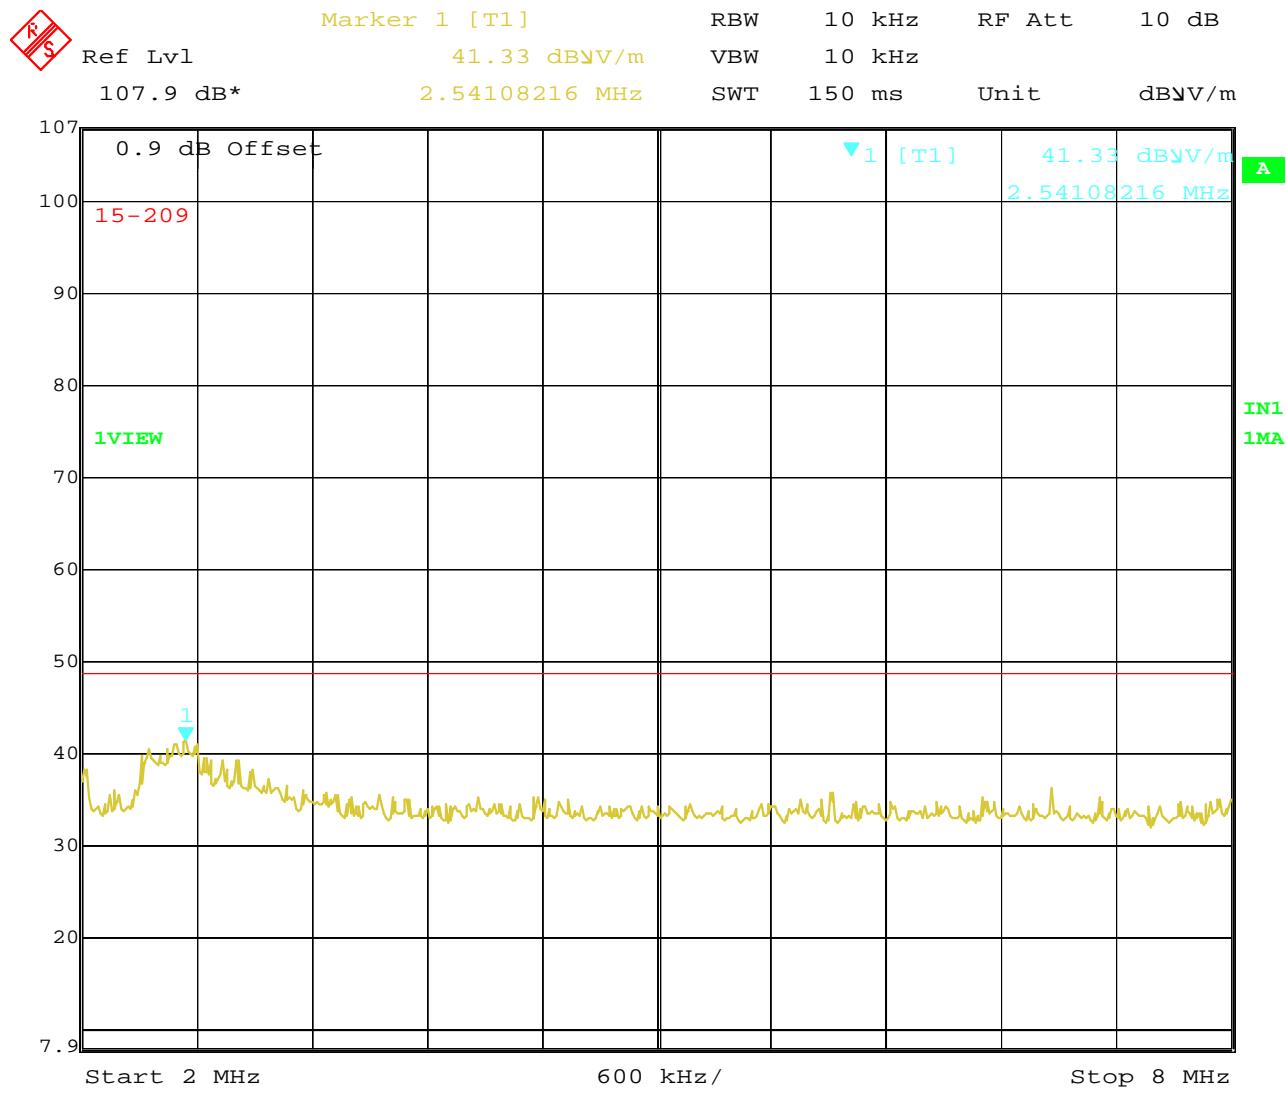


8MHz~25MHz

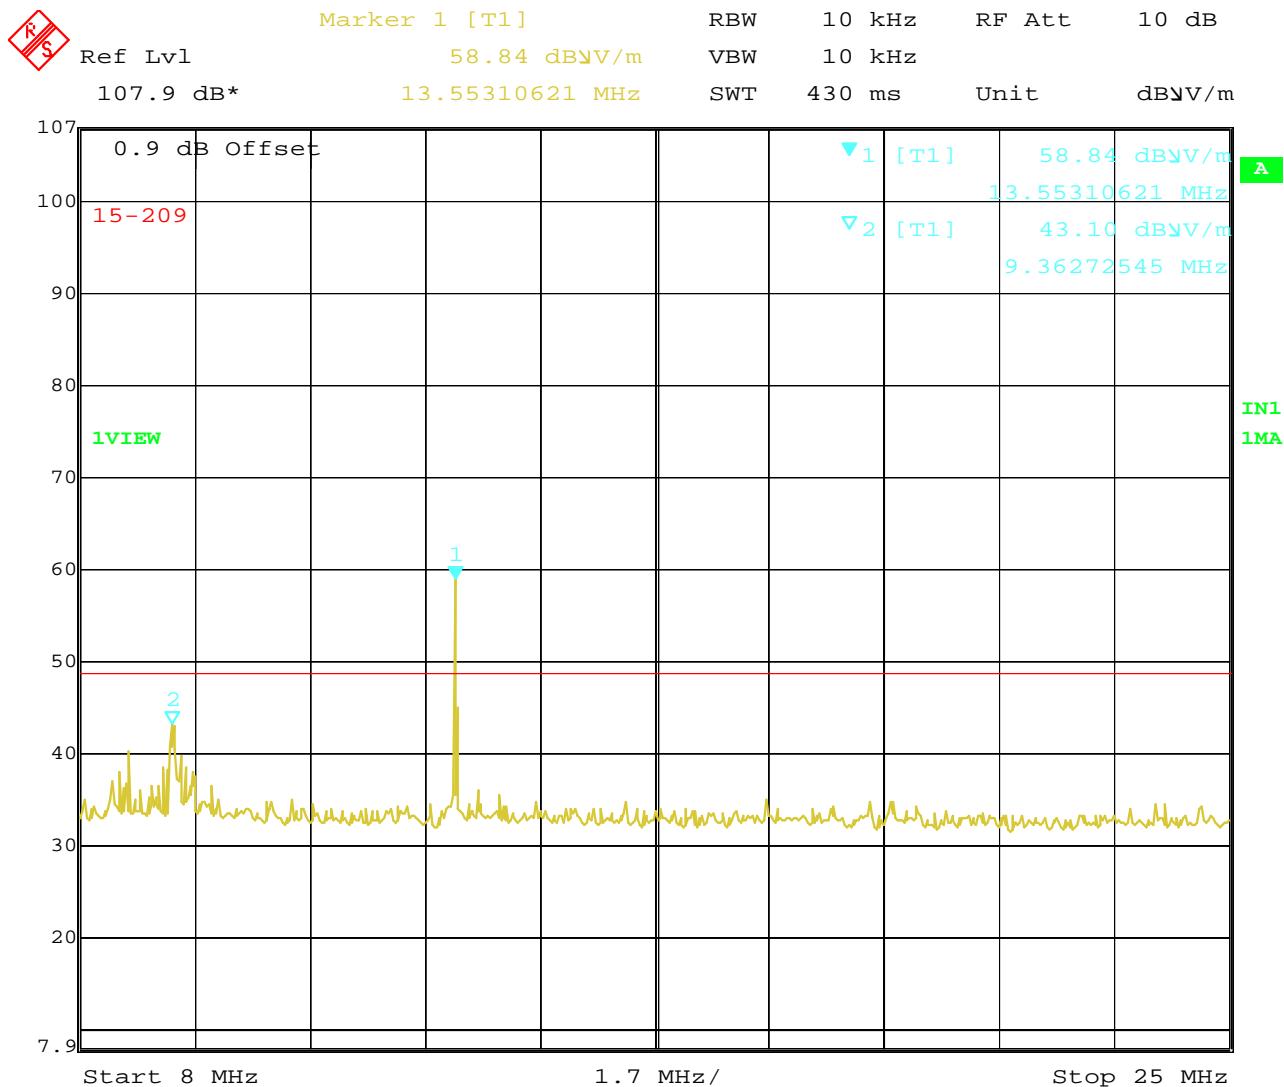

Date: 8.FEB.2010 17:40:02

Note: A mark 1 is Fundamental Emissions.

25MHz~30MHz

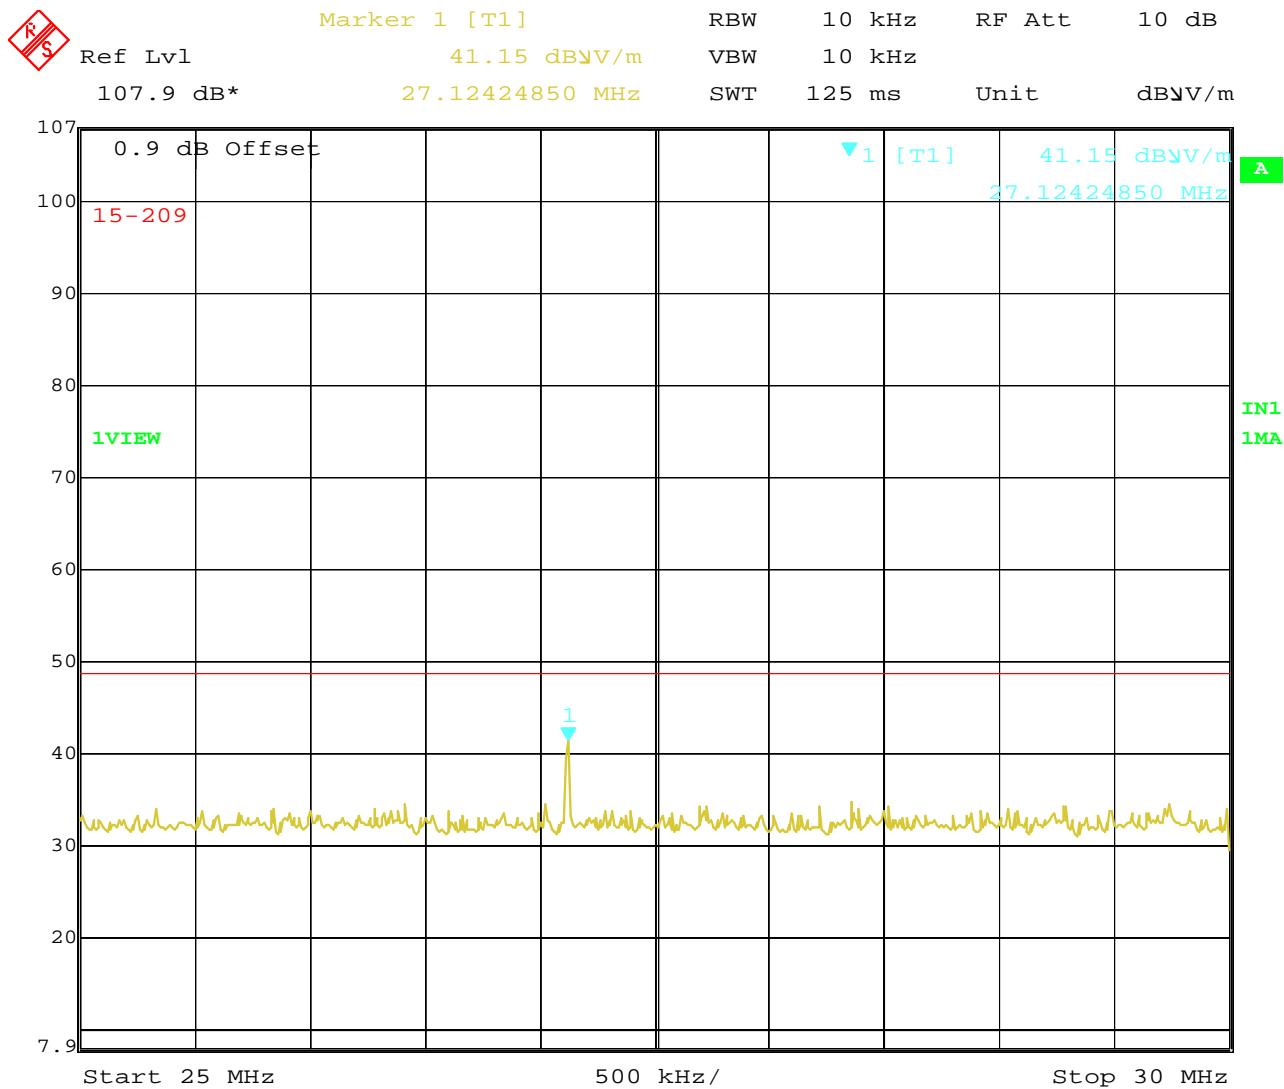

Date: 8.FEB.2010 17:42:39

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dB_{UV}) + distance extrapolation factor.

3.4.8 Results for Radiated Emissions (30MHz~1GHz)


Final Test Date	Feb. 09, 2010	Test Site No.	03CH02-HY
Temperature	23°C	Humidity	55%
Test Engineer	Billy	Configurations	Channel 1 Battery 1 (Palladium Energy)

Horizontal

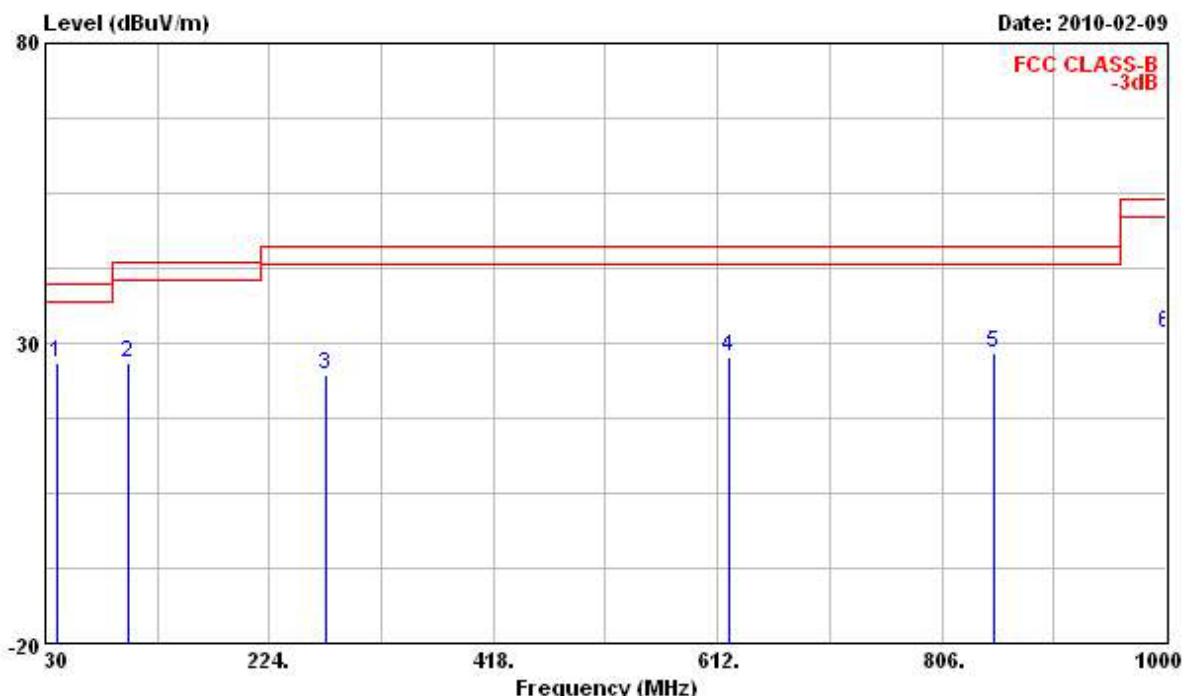

Freq	Level	Over Limit	Limit Line	ReadAntenna		Cable Preamp		Remark
				Level	Factor	Loss	Factor	
MHz	dBuV/m		dB	dBuV/m	dBuV	dB/m	dB	dB
1 39.700	26.56	-13.44	40.00	39.80	13.25	1.31	27.80	Peak
2 101.780	26.73	-16.77	43.50	40.76	11.41	2.15	27.59	Peak
3 272.500	24.88	-21.12	46.00	35.00	13.32	3.36	26.80	Peak
4 622.670	27.58	-18.42	46.00	30.71	19.88	5.13	28.14	Peak
5 851.590	28.47	-17.53	46.00	29.98	20.15	5.85	27.51	Peak
6 1000.000	31.58	-42.42	74.00	29.97	22.50	6.15	27.04	Peak

Vertical

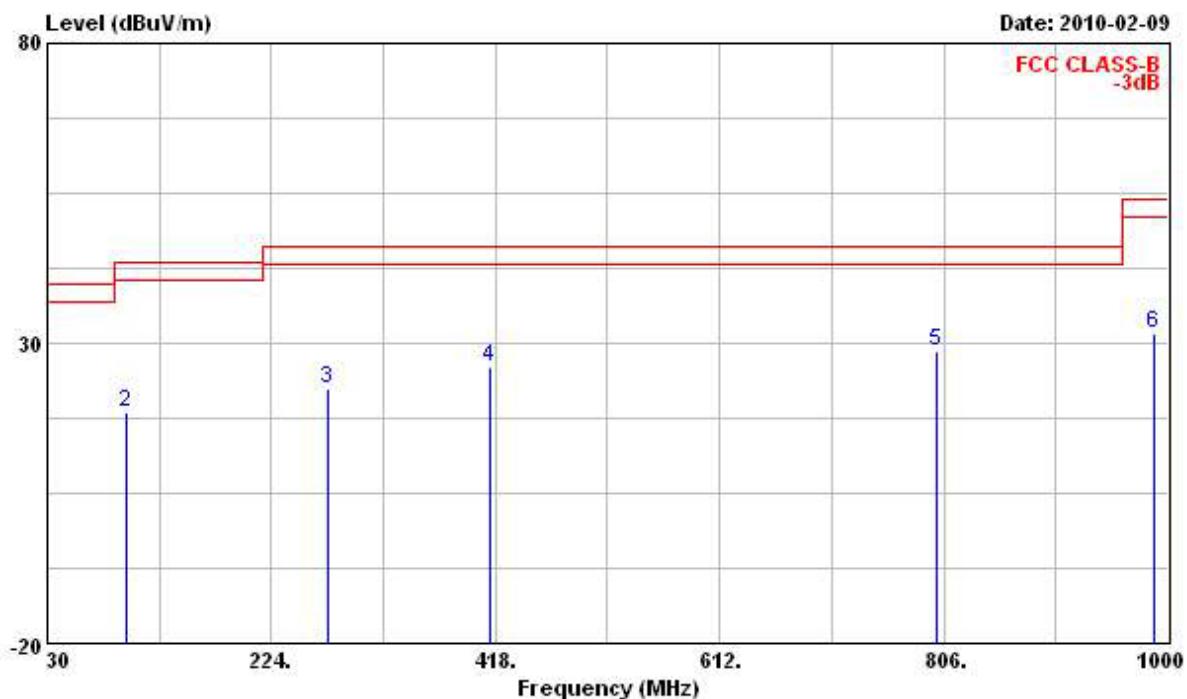

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	Loss	Factor	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 30.000	18.81	-21.19	40.00	29.32	16.22	1.15	27.88	Peak
2 97.900	18.39	-25.11	43.50	33.07	10.84	2.09	27.61	Peak
3 273.470	22.57	-23.43	46.00	32.68	13.33	3.36	26.80	Peak
4 413.150	26.06	-19.94	46.00	34.21	15.53	4.05	27.73	Peak
5 800.180	28.54	-17.46	46.00	30.37	20.27	5.62	27.72	Peak
6 987.390	31.64	-22.36	54.00	30.34	22.19	6.19	27.08	Peak


Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Final Test Date	Feb. 09, 2010	Test Site No.	03CH02-HY
Temperature	23°C	Humidity	55%
Test Engineer	Billy	Configurations	Channel 1 Battery 2 (SANYO)

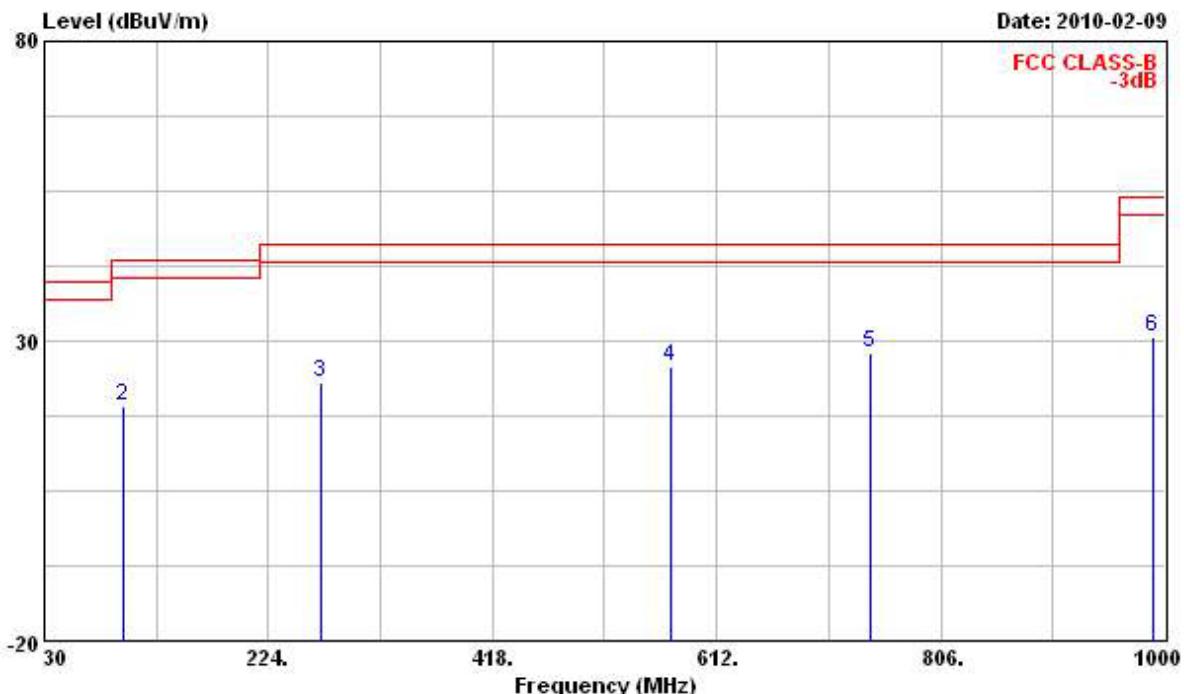Horizontal

Freq	Level	Over Limit		Read	Antenna	Cable	Preamp	Remark
		MHz	dBuV/m	dB	dBuV/m			
1	30.000	19.37	-20.63	40.00	29.88	16.22	1.15	27.88 Peak
2	97.900	19.11	-24.39	43.50	33.79	10.84	2.09	27.61 Peak
3	269.590	23.23	-22.77	46.00	33.41	13.27	3.35	26.80 Peak
4	572.230	25.89	-20.11	46.00	29.96	19.36	4.73	28.16 Peak
5	745.860	28.16	-17.84	46.00	31.12	19.50	5.43	27.89 Peak
6	990.300	30.65	-23.35	54.00	29.28	22.26	6.18	27.07 Peak

Vertical

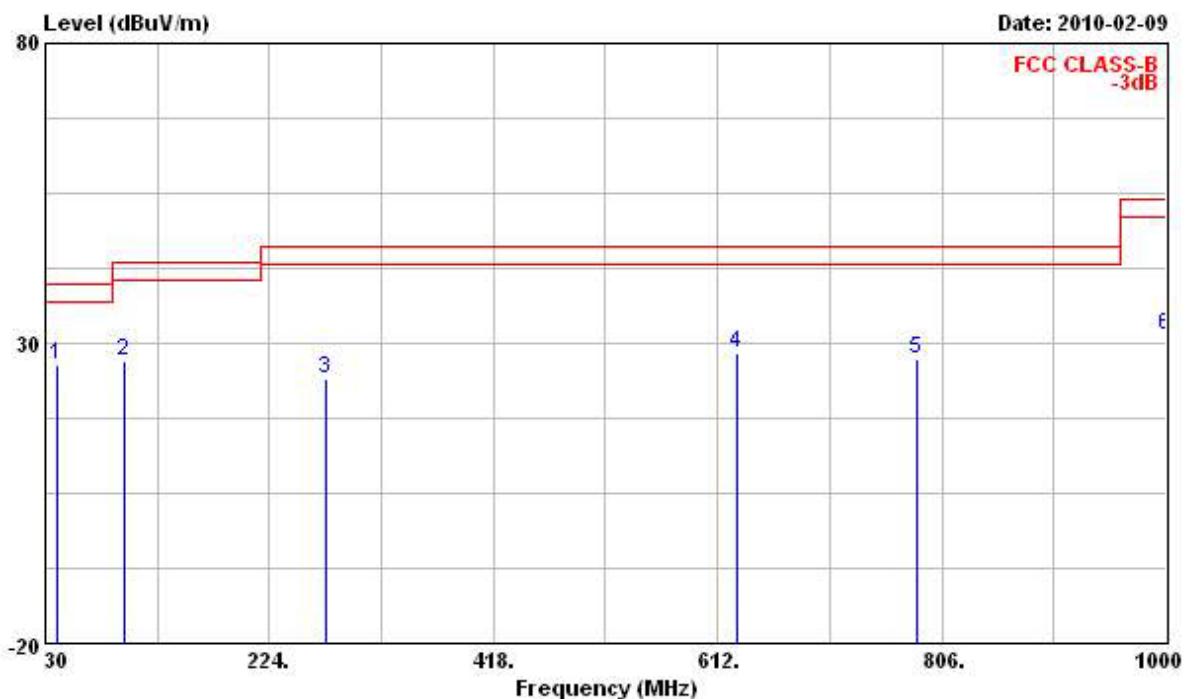

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	Loss	Factor	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 39.700	26.46	-13.54	40.00	39.70	13.25	1.31	27.80	Peak
2 97.900	26.97	-16.53	43.50	41.65	10.84	2.09	27.61	Peak
3 273.470	24.00	-22.00	46.00	34.11	13.33	3.36	26.80	Peak
4 629.460	28.42	-17.58	46.00	31.58	19.79	5.18	28.13	Peak
5 784.660	27.24	-18.76	46.00	29.39	20.05	5.57	27.77	Peak
6 1000.000	31.32	-42.68	74.00	35.86	22.50	0.00	27.04	Peak

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.5 Frequency Stability Measurement

3.5.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

3.5.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	1 kHz
VB	1 kHz
Sweep Time	Auto

3.5.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 1 kHz with peak detector and maxhold settings.
5. fc is declaring of channel frequency. Then the frequency error formula is $(fc-f)/fc \times 10^6$ ppm and the limit is less than ± 100 ppm.
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is -20°C~50°C.

3.5.4 Test Setup Layout

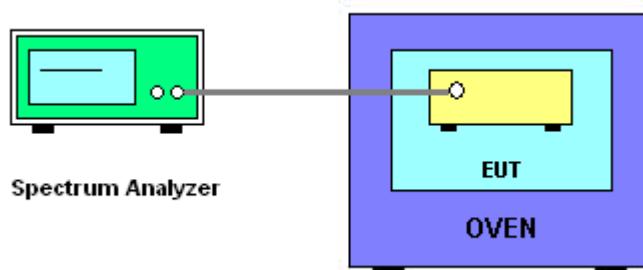

3.5.5 Test Deviation

There is no deviation with the original standard.

3.5.6 EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

3.5.7 Test Result of Frequency Stability

Final Test Date	Feb. 09, 2010	Test Site No.	TH01-HY
Temperature	28	Humidity	58%
Test Engineer	Duncan	Configurations	Channel 1

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	13.56 MHz
126.5	13.560769
110	13.560769
93.5	13.560769
Max. Deviation (MHz)	0.000769
Max. Deviation (ppm)	56.73

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	13.56 MHz
-20	13.560218
-10	13.560817
0	13.560833
10	13.560769
20	13.559290
30	13.560785
40	13.560769
50	13.560817
Max. Deviation (MHz)	0.000833
Max. Deviation (ppm)	61.46

3.6 Antenna Requirements

3.6.1 Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

3.6.2 Antenna Connector Construction

Please refer to section 2.1 in this test report; antenna connector complied with the requirements.

4 LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9kHz – 2.75GHz	Sep. 01, 2009	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001/004	9kHz – 30MHz	Jan. 19, 2010	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001/009	9kHz – 30MHz	Feb. 24, 2009	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450Hz	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 – 60Hz	N/A	Conduction (CO01-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832010001	9kHz – 30MHz	May 05, 2009	Conduction (CO01-HY)
Isolation Transformer	Erika Fiedler OHG	D-65396 Walluf	58	45MHz-2.15GHz	N/A	Conduction (CO01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSU26.5	100015	20Hz ~ 26.5GHz	Oct. 29, 2009	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 31, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 30GHz	Aug. 05, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 31, 2009	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2009	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Aug. 06, 2009	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 02, 2009	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 02, 2009	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jul. 12, 2009*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

For Radiated emissions 9kHz~30MHz

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
10m Semi Anechoic Chamber	TDK	SAC-10M	10CH02-HY	30MHz~1GHz 10m,3m	Nov. 29, 2009	Radiation (10CH02-HY)
Amplifier	AGILENT	8447D	2944A10827	100KHz – 1.3GHz	Jun. 04, 2009	Radiation (10CH02-HY)
Receiver	R&S	ESI	838496/008	20Hz - 7GHz	Apr. 27, 2009	Radiation (10CH02-HY)
Spectrum Analyzer	R&S	FSP7	100645	9KHz – 7GHz	Aug. 26, 2009	Radiation (10CH02-HY)
Turn Table	HD	DS 430	430/360	0 ~ 360 degree	N/A	Radiation (10CH02-HY)
RF Cable-R10m	Jye Bao	RG142	CB027-INSIDE	9kHz~1GHz	Feb. 13, 2009	Radiation (10CH02-HY)
RF Cable-R10m	Suhner Switzerland + BELDEN	RG223/U + RG8/U	CB026-DOOR	9kHz~1GHz	Feb. 13, 2009	Radiation (10CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

For Radiated emissions 30MHz~1GHz

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Sep. 26, 2009	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Jan. 05, 2010	Radiation (03CH02-HY)
Spectrum Analyzer	R&S	FSP40	100305/040	9 kHz - 40GHz	Feb. 04, 2009	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30 MHz - 1 GHz 3m	May 11, 2009	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11146	100 kHz – 1.3 GHz	Jul. 07, 2009	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0 - 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 m - 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul 28, 2008*	Radiation (10CH02-HY) (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.

5 TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

6 TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-100107

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.**EMC & Wireless Communications Laboratory**No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria : ISO/IEC 17025:2005
Accreditation Number : 1190
Originally Accredited : December 15, 2003
Effective Period : January 10, 2010 to January 09, 2013
Accredited Scope : Testing Field, see described in the Appendix
Specific Accreditation Program : Accreditation Program for Designated Testing Laboratory
for Commodities Inspection
Accreditation Program for Telecommunication Equipment
Testing Laboratory
Accreditation Program for BSMI Mutual Recognition
Arrangement with Foreign Authorities

Jay-San Chen
President, Taiwan Accreditation Foundation
Date : January 07, 2010

P1, total 21 pages