

# FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart C § 15.225

**Equipment** : Point of Sales Terminal  
**Brand Name** : VeriFone  
**Model No.** : VX680 BT-WiFi  
**Filing Type** : New Application  
**Applicant** : VeriFone, Inc.  
1400 West Stanford Ranch Road Suit 200  
Rocklin CA 95765 USA  
**FCC ID** : B32VX680WIFICTLS  
**Manufacturer** : Inventec Appliances (Pudong) Co.,Ltd.  
No.789 Pu Xing Road, Shanghai, PRC  
**Received Date** : Jul. 08, 2011  
**Final Test Date** : Aug. 15, 2011

## Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



**SPORTON International Inc.**

No. 52 Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

## Table of Contents

<b>1. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>2. GENERAL INFORMATION.....</b>	<b>3</b>
2.1    Product Details.....	3
2.2    Accessories.....	3
2.3    Table for Test Modes .....	3
2.4    Table for Testing Locations.....	3
2.5    Table for Supporting Units .....	4
2.6    Test Configurations .....	4
<b>3. TEST RESULT .....</b>	<b>6</b>
3.1    AC Power Line Conducted Emissions Measurement .....	6
3.2    Field Strength of Fundamental Emissions and Mask Measurement.....	12
3.3    20dB Spectrum Bandwidth Measurement .....	15
3.4    Radiated Emissions Measurement .....	17
3.5    Frequency Stability Measurement .....	28
3.6    Antenna Requirements .....	30
<b>4. LIST OF MEASURING EQUIPMENTS.....</b>	<b>31</b>
<b>5. TEST LOCATION.....</b>	<b>34</b>
<b>6. TAF CERTIFICATE OF ACCREDITATION.....</b>	<b>35</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A8</b>
<b>APPENDIX B. PHOTOGRAPHS OF EUT .....</b>	<b>B1 ~ B13</b>

## History of This Test Report

Original Issue Date: Sep. 08, 2011

Report No.: FR170108-06

- No additional attachment.
- Additional attachment were issued as following record:

# **CERTIFICATE OF COMPLIANCE**

according to

47 CFR FCC Part 15 Subpart C § 15.225

**Equipment** : **Point of Sales Terminal**

**Brand Name** : **VeriFone**

**Model No.** : **VX680 BT-WiFi**

**Applicant** : **VeriFone, Inc.**

1400 West Stanford Ranch Road Suit 200  
Rocklin CA 95765 USA

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jul. 08, 2011 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Wayne Hsu / Vice Manager

***SPORTON International Inc.***

No. 52 Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

## 1. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	1.10 dB
3.2	15.225(a)	Field Strength of Fundamental Emissions	Complies	46.80 dB
3.3	15.215(c)	20dB Spectrum Bandwidth	Complies	-
3.4	15.225(d)	Radiated Emissions	Complies	-
3.5	15.225(e)	Frequency Stability	Complies	-
3.6	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Field Strength of Fundamental Emissions	±0.8dB	Confidence levels of 95%
20dB Spectrum Bandwidth / Frequency Stability	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated / Band Edge Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

## 2. GENERAL INFORMATION

### 2.1 Product Details

Items	Description
Power Type	12Vdc from AC Adapter ; 7.2Vdc from Li-ion Battery
Modulation	ASK
Channel Number	1
Channel Band Width (99%)	2.26 kHz
Max. Field Strength	59.23 dBuV/m at 10m (QP)
Test Freq. Range	13.553 ~ 13.567MHz
Carrier Frequencies	13.56 MHz (Ch. 1)
Antenna	Integrate Antenna (Without any antenna connector)

\*\* The specifications of the product WLAN+BT+RFID was tested without BT base.

### 2.2 Accessories

Accessories Information					
Accessories or 2nd Source or Key Part	AC Adapter 1	Brand Name	VeriFone	Model Name	Au-79A0n
		Power Rating	I/P: 100-240Vac, 600mA, O/P:12Vdc, 2A		
	AC Adapter 2	Brand Name	VeriFone	Model Name	SM03001A
		Power Rating	I/P: 100-240Vac, 600mA, O/P:12Vdc, 2A		
	Battery 1 (Palladium Energy)_L	Brand Name	VeriFone	Model Name	24016-01-R
		Power Rating	7.2 Vdc, 1800mAh	Type	Li-ion
	Battery 2 (SANYO)_F	Brand Name	VeriFone	Model Name	24016-01-R
		Power Rating	7.2 Vdc, 1800mAh	Type	Li-ion
	BT Base	Brand Name	VeriFone	Model Name	VX680-B-BTC
	WLAN Module	Brand Name	AMPAK Technology Inc.	Model Name	GB86321D
	RFID Module	Brand Name	NXP	Model Name	PN512

### 2.3 Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel
AC Power Line Conducted Emissions	Docking Mode / Adapter Mode	-
Field Strength of Fundamental Emissions	CTX	1
20dB Spectrum Bandwidth	CTX	1
Radiated Emissions 9kHz~30MHz	CTX	1
Radiated Emissions 9kHz~10 <sup>th</sup> Harmonic Band Edge Emissions	CTX	1
Frequency Stability	Un-modulation	1

Note: CTX=continuously transmitting.

### 2.4 Table for Testing Locations

Test Site No.	Site Category	Location
CO04-HY	Conduction	Hwa Ya
CO05-HY		
TH01-HY	OVEN Room	Hwa Ya
10CH02-HY	SAC	Hwa Ya
03CH03-HY		
03CH06-HY	SAC	Hwa Ya


Semi Anechoic Chamber (SAC).

## 2.5 Table for Supporting Units


The EUT was tested alone.

## 2.6 Test Configurations


**For radiated emissions 9kHz~30MHz**

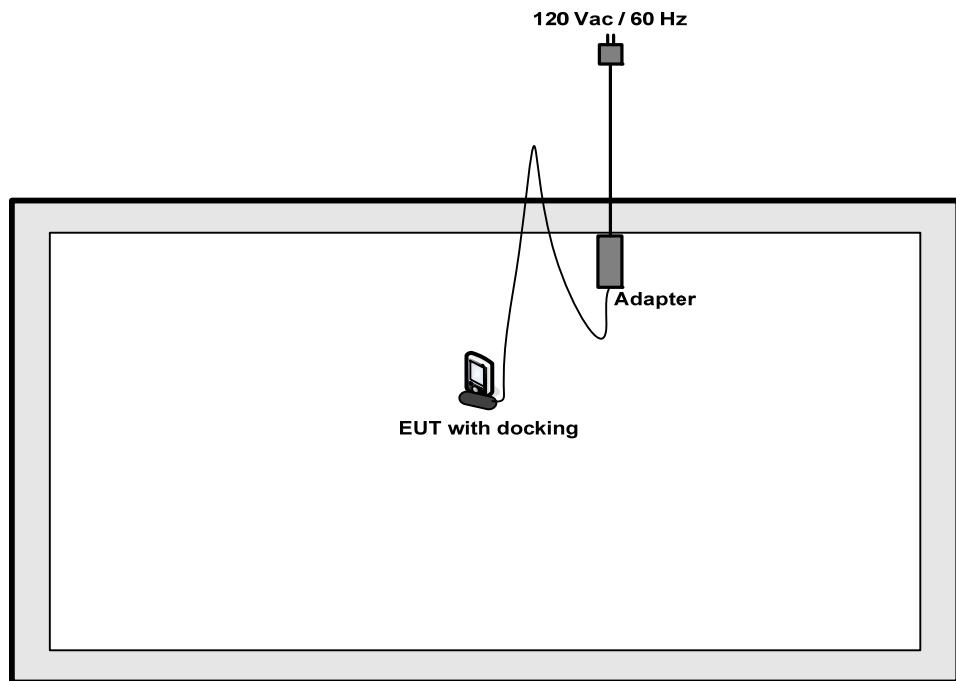

For radiated emissions 30MHz~1GHz  
Docking Mode

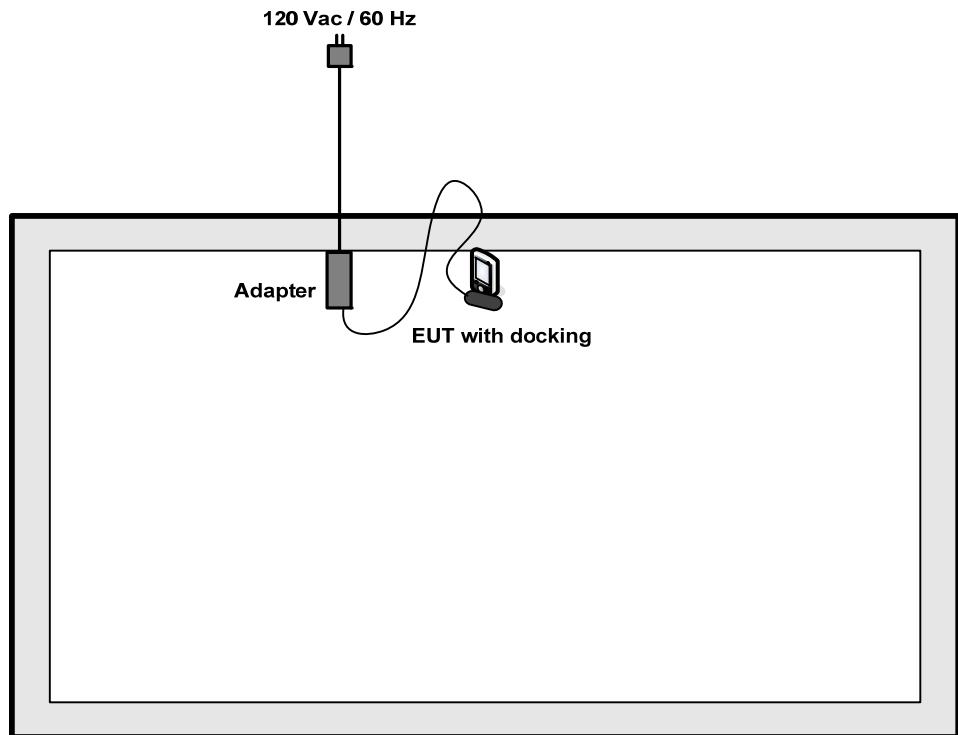

Adapter Mode

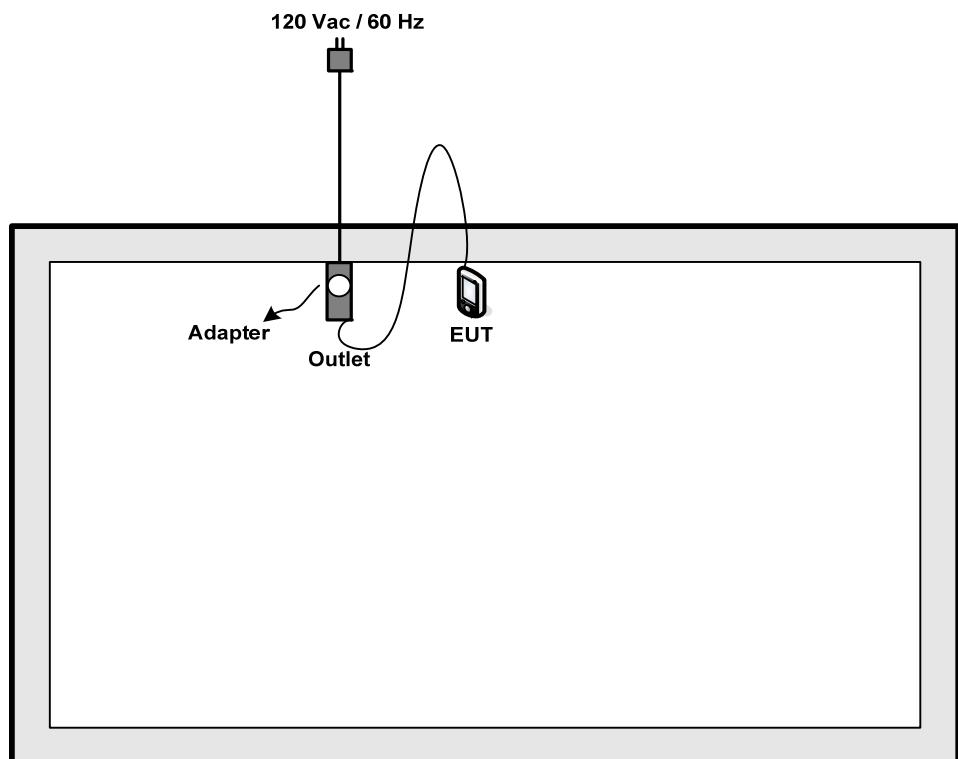

### 3. TEST RESULT

#### 3.1 AC Power Line Conducted Emissions Measurement

##### 3.1.1 Limit

For a Low-power Radio-frequency device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

##### 3.1.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

##### 3.1.3 Test Procedures

1. The EUT warm up about 15 minutes then start test.
2. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. The measurement has to be done between each power line and ground at the power terminal.

### 3.1.4 Test Setup Layout

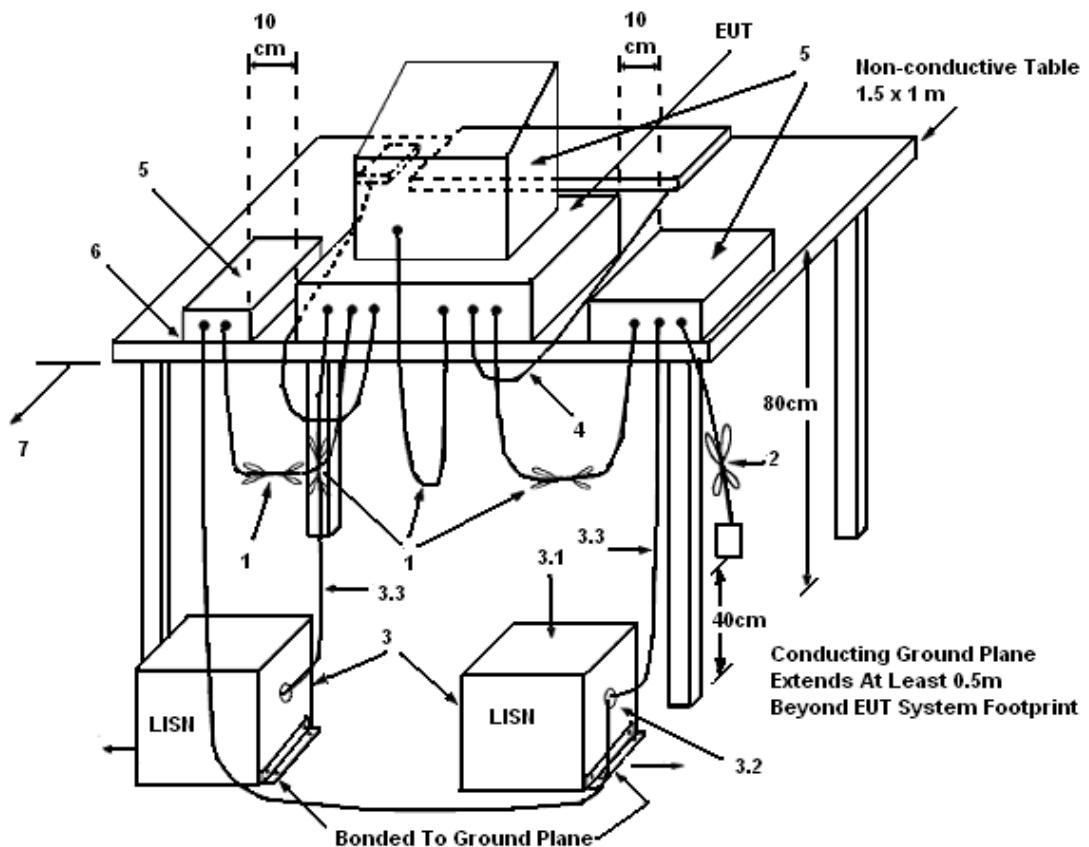

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

### 3.1.5 Test Deviation

There is no deviation with the original standard.


### 3.1.6 EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


## 3.1.7 Results of AC Power Line Conducted Emissions Measurement

Final Test Date	Aug. 03, 2011	Test Site No.	CO04-HY
Temperature	26.2°C	Humidity	55.8%
Test Engineer	Jason	Configuration	Docking Mode

Line

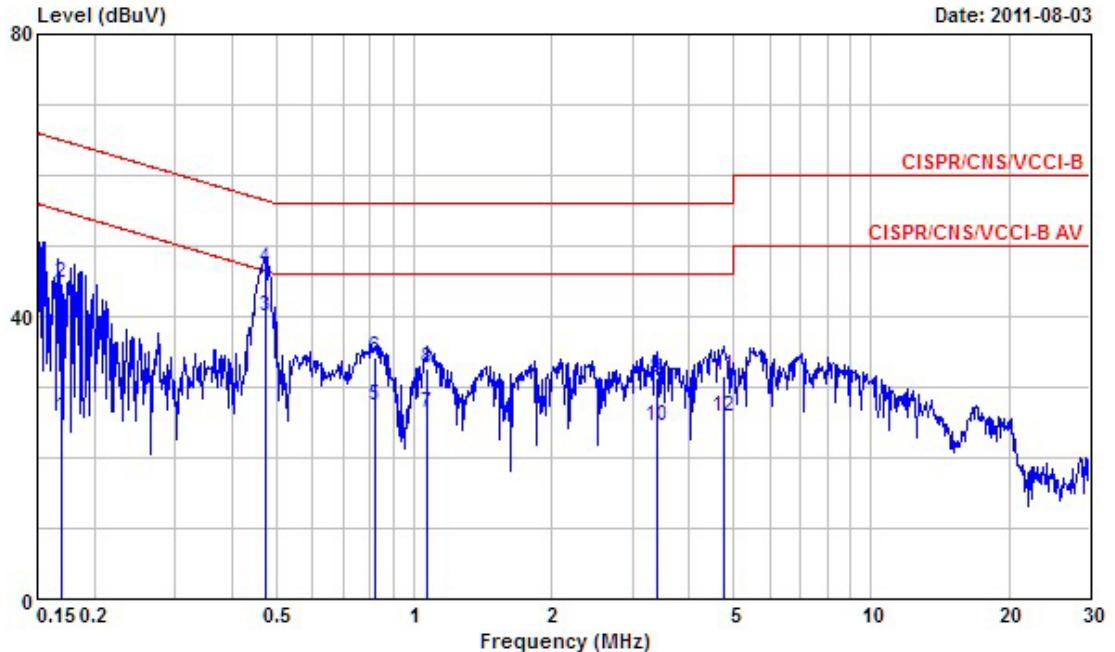

Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		Line	Line	Level	Factor	Loss	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1700270	25.68	-29.28	54.96	25.52	0.08	0.08 Average
2	0.1700270	44.68	-20.28	64.96	44.52	0.08	0.08 QP
3	0.4736030	40.03	-6.42	46.45	39.60	0.09	0.34 Average
4	0.4736030	46.77	-9.68	56.45	46.34	0.09	0.34 QP
5	0.8204700	27.39	-18.61	46.00	26.82	0.11	0.46 Average
6	0.8204700	34.31	-21.69	56.00	33.74	0.11	0.46 QP
7	1.070	26.27	-19.73	46.00	25.66	0.11	0.50 Average
8	1.070	32.61	-23.39	56.00	32.00	0.11	0.50 QP
9	3.400	31.42	-24.58	56.00	30.77	0.15	0.50 QP
10	3.400	24.43	-21.57	46.00	23.78	0.15	0.50 Average
11	4.770	31.67	-24.33	56.00	30.99	0.18	0.50 QP
12	4.770	25.85	-20.15	46.00	25.17	0.18	0.50 Average

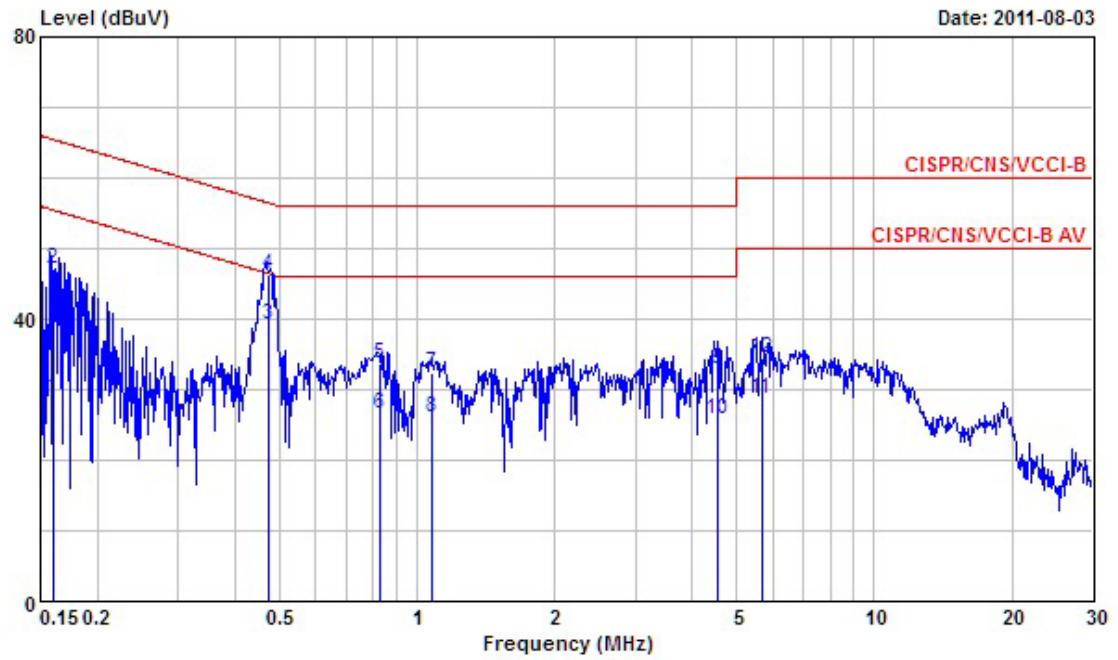**Neutral**

Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss		Remark
						MHz	dBuV	
1	0.1596950	29.04	-26.44	55.48	28.89	0.08	0.07	Average
2	0.1596950	47.14	-18.34	65.48	46.99	0.08	0.07	QP
3	0.4718610	39.12	-7.36	46.48	38.70	0.08	0.34	Average
4	0.4718610	46.40	-10.08	56.48	45.98	0.08	0.34	QP
5	0.8302950	33.82	-22.18	56.00	33.26	0.10	0.46	QP
6	0.8302950	26.63	-19.37	46.00	26.07	0.10	0.46	Average
7	1.080	32.46	-23.54	56.00	31.86	0.10	0.50	QP
8	1.080	25.96	-20.04	46.00	25.36	0.10	0.50	Average
9	4.530	32.90	-23.10	56.00	32.23	0.17	0.50	QP
10	4.530	25.71	-20.29	46.00	25.04	0.17	0.50	Average
11	5.680	28.81	-21.19	50.00	28.12	0.19	0.50	Average
12	5.680	34.44	-25.56	60.00	33.75	0.19	0.50	QP


Note:

Level = Read Level + LISN Factor + Cable Loss.

<b>Final Test Date</b>	Jul. 27, 2011	<b>Test Site No.</b>	CO05-HY
<b>Temperature</b>	21~23°C	<b>Humidity</b>	41~43%
<b>Test Engineer</b>	Novic	<b>Configuration</b>	Adapter Mode

**Line**

ENV216 Auto Test

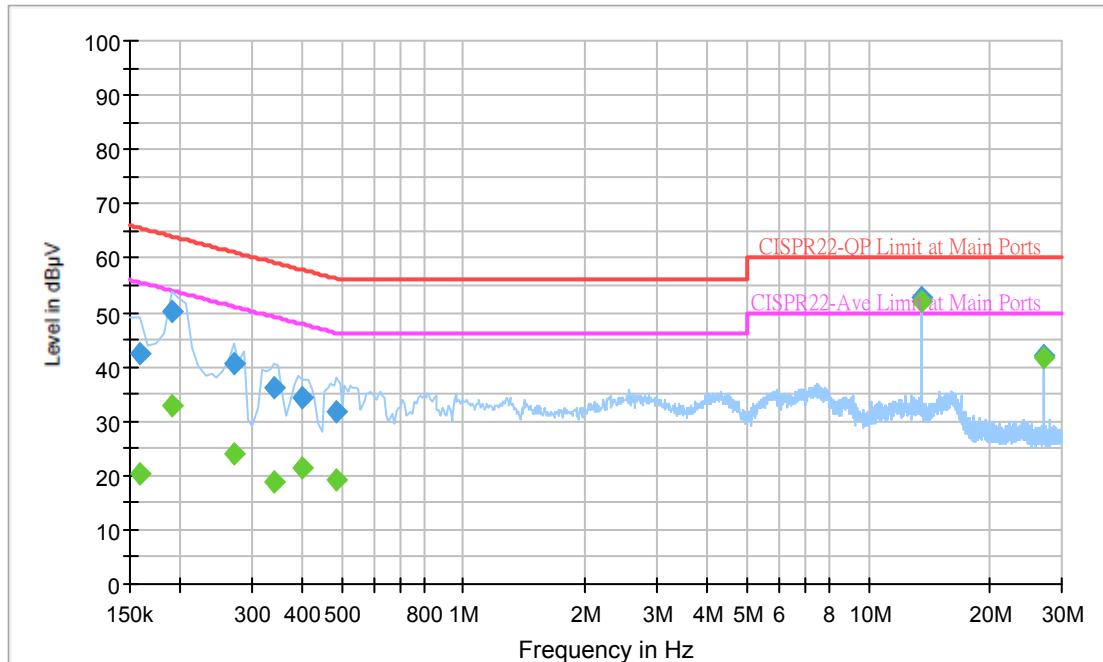**Final Result 1**

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158000	42.3	Off	L1	19.3	23.3	65.6
0.190000	50.2	Off	L1	19.4	13.8	64.0
0.270000	40.4	Off	L1	19.3	20.7	61.1
0.342000	36.2	Off	L1	19.3	23.0	59.2
0.398000	34.3	Off	L1	19.4	23.6	57.9
0.486000	31.6	Off	L1	19.4	24.6	56.2
13.558000	52.9	Off	L1	19.7	7.1	60.0
27.118000	42.0	Off	L1	19.8	18.0	60.0


**Final Result 2**

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158000	20.4	Off	L1	19.3	35.2	55.6
0.190000	32.7	Off	L1	19.4	21.3	54.0
0.270000	24.0	Off	L1	19.3	27.1	51.1
0.342000	18.9	Off	L1	19.3	30.3	49.2
0.398000	21.4	Off	L1	19.4	26.5	47.9
0.486000	19.1	Off	L1	19.4	27.1	46.2
13.558000	52.1	Off	L1	19.7	-2.1	50.0
27.118000	41.6	Off	L1	19.8	8.4	50.0

Note: This frequency is RF signal.

**Neutral**

ENV216 Auto Test

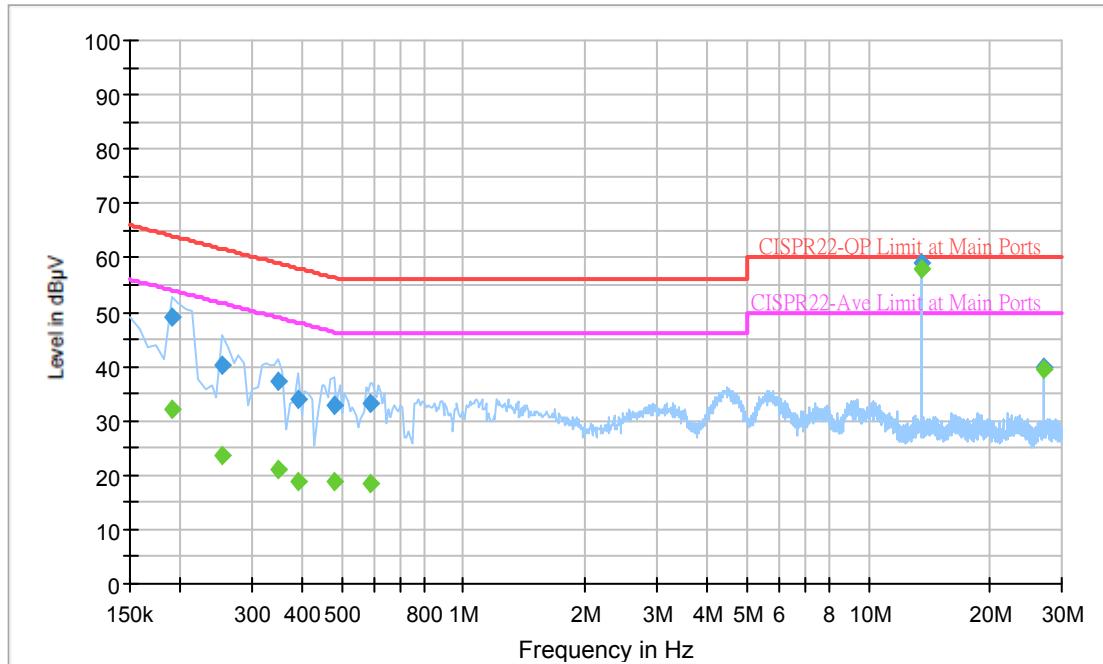**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190000	49.0	Off	N	19.4	15.0	64.0
0.254000	40.1	Off	N	19.4	21.5	61.6
0.350000	37.3	Off	N	19.3	21.7	59.0
0.390000	34.1	Off	N	19.4	24.0	58.1
0.478000	32.7	Off	N	19.4	23.7	56.4
0.590000	33.2	Off	N	19.3	22.8	56.0
13.558000	58.9	Off	N	19.8	1.1	60.0
27.126000	40.0	Off	N	20.0	20.0	60.0

**Final Result 2**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190000	32.2	Off	N	19.4	21.8	54.0
0.254000	23.7	Off	N	19.4	27.9	51.6
0.350000	21.0	Off	N	19.3	28.0	49.0
0.390000	18.7	Off	N	19.4	29.4	48.1
0.478000	19.0	Off	N	19.4	27.4	46.4
0.590000	18.4	Off	N	19.3	27.6	46.0
13.558000	58.1	Off	N	19.8	-8.1	50.0
27.126000	39.4	Off	N	20.0	10.6	50.0

Note: This frequency is RF signal.

### 3.2 Field Strength of Fundamental Emissions and Mask Measurement

#### 3.2.1 Limit

Field strength of fundamental emissions limit:

The field strength of fundamental emissions shall not exceed 15848 micorvolts/meter at 30 meters.

The emissions limit in this paragraph is based on measurement instrumentation employing a QP detector.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Field Strength (dB $\mu$ V/m) at 10m	Field Strength (dB $\mu$ V/m) at 3m
13.553 ~ 13.567MHz	15848 at 30m	103 (QP)	124 (QP)

Mask limit:

Rules and specifications	CFR 47 Part 15 section 15.225(a)-(d)				
Description	Compliance with the spectrum mask is tested using a spectrum analyzer with RB set to a 1kHz for the band 13.553~13.567MHz				
Limit	Freq. of Emission (MHz)	Field Strength (uV/m) at 30m	Field Strength (dB $\mu$ V/m) at 30m	Field Strength (dB $\mu$ V/m) at 10m	Field Strength (dB $\mu$ V/m) at 3m
	1.705~13.110	30	29.5	48.58	69.5
	13.110~13.410	106	40.5	59.58	80.5
	13.410~13.553	334	50.5	69.58	90.5
	13.553~13.567	15848	84.0	103.08	124.0
	13.567~13.710	334	50.5	69.58	90.5
	13.710~14.010	106	40.5	59.58	80.5
	14.010~30.000	30	29.5	48.58	69.5

#### 3.2.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	Auto
Center Frequency	Fundamental Frequency
RB	9 kHz
Detector	QP

#### 3.2.3 Test Procedures

- Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
- Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
- For Fundamental emissions, use the receiver to measure QP reading.
- When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- Compliance with the spectrum mask is tested using a spectrum analyzer with RB set to a 1kHz for the band 13.553~13.567MHz.

### 3.2.4 Test Setup Layout

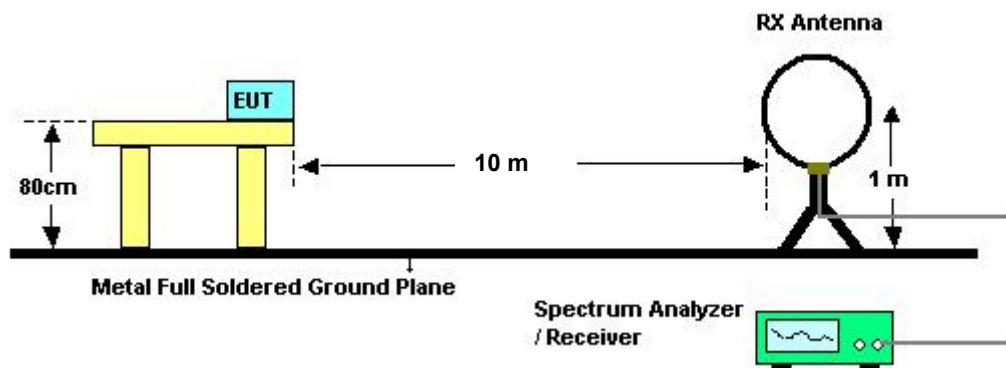

### 3.2.5 Test Deviation

There is no deviation with the original standard.


### 3.2.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 3.2.7 Test Result of Field Strength of Fundamental Emissions

Final Test Date	Jul. 08, 2011	Test Site No.	10CH02-HY
Temperature	25°C	Humidity	57%
Test Engineer	Daniel	Configurations	Ch 1

Freq. (MHz)	Level (dB <sub>u</sub> V/m)	Over Limit (dB)	Limit Line (dB <sub>u</sub> V/m) at 10m	Remark
13.56 MHz	56.20	-46.80	103	QP

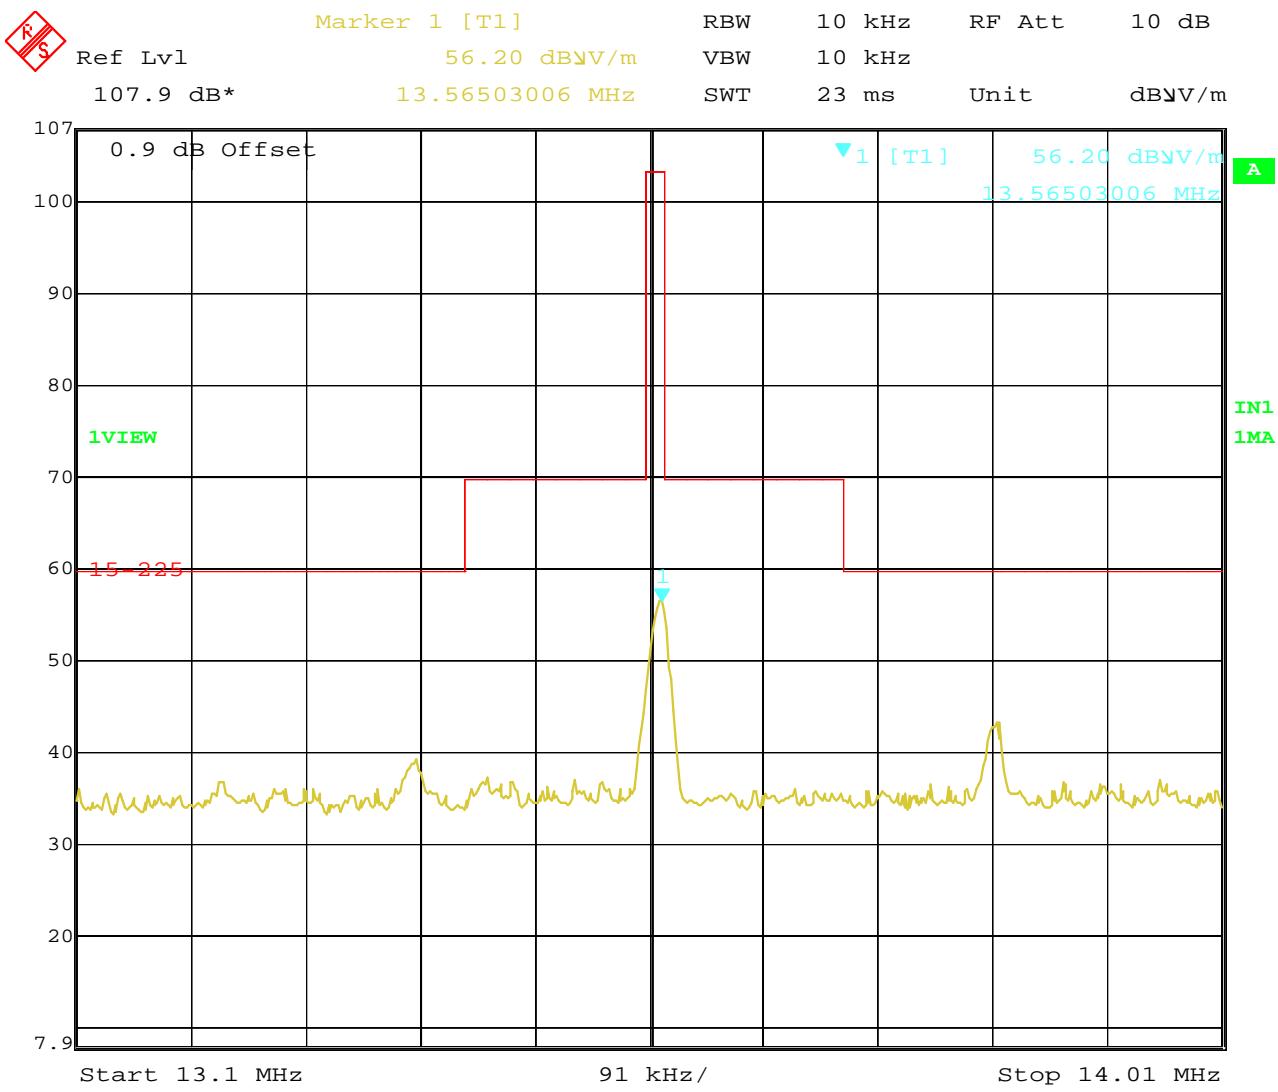

Date: 8.JUL.2011 17:38:15

## Note:

Emission level (dB<sub>u</sub>V/m) = 20 log Emission level (uV/m).

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dB<sub>u</sub>V) + distance extrapolation factor.

### 3.3 20dB Spectrum Bandwidth Measurement

#### 3.3.1 Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (13.553 ~ 13.567MHz).

#### 3.3.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 20dB Bandwidth
RB	1 kHz
VB	1 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 3.3.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 1 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.

#### 3.3.4 Test Setup Layout

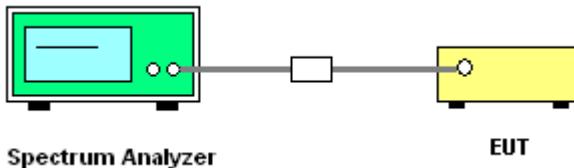

#### 3.3.5 Test Deviation

There is no deviation with the original standard.

#### 3.3.6 EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

## 3.3.7 Test Result of 20dB Spectrum Bandwidth

Final Test Date	Jul. 13, 2011	Test Site No.	TH01-HY
Temperature	28.2°C	Humidity	62%
Test Engineer	Ian	Configurations	Ch. 1

Frequency	20dB BW (kHz)	99% OBW (kHz)	Frequency range (MHz) $f_L > 13.553\text{MHz}$	Frequency range (MHz) $f_H < 13.567\text{MHz}$	Test Result
13.56 MHz	2.68	2.26	13.5598	13.5625	Complies

## 20 dB/99% Bandwidth Plot on 13.56 MHz

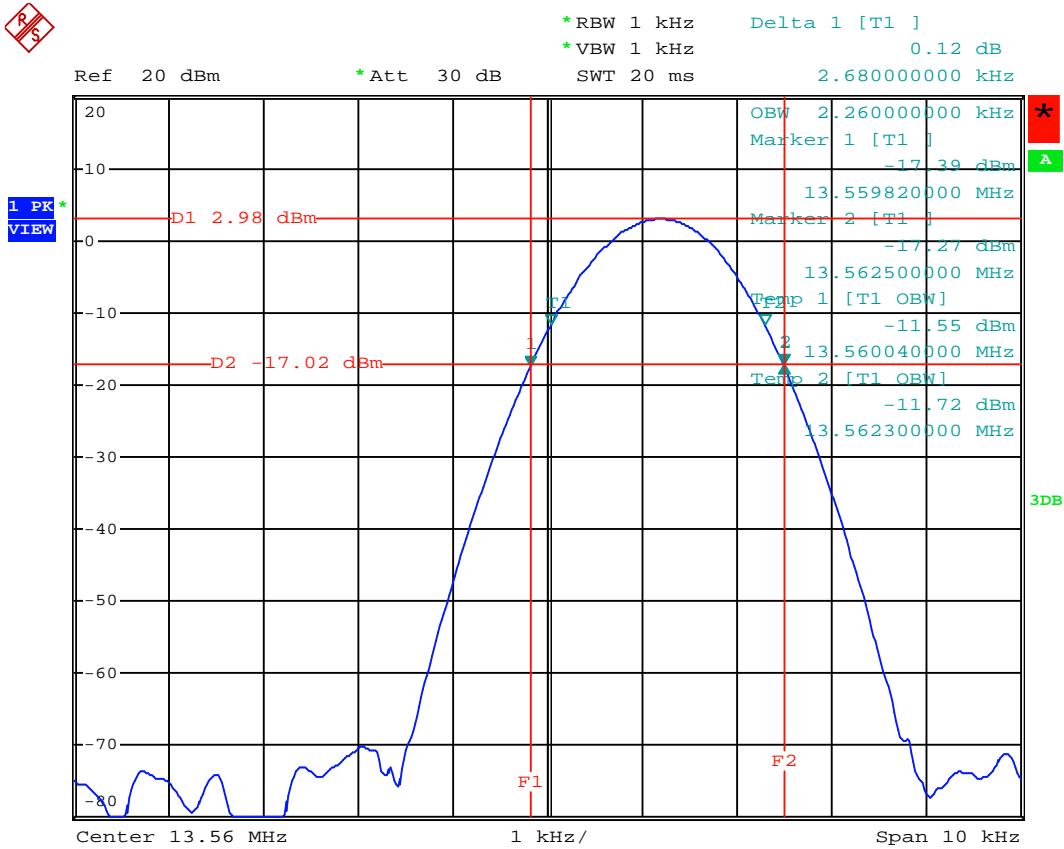

Date: 13.JUL.2011 16:58:26

### 3.4 Radiated Emissions Measurement

#### 3.4.1 Limit

The field strength of any emissions which appear outside of 13.553 ~ 13.567MHz band shall not exceed the general radiated emissions limits in Section 15.209(a)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 3.4.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of receiver.


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

#### 3.4.3 Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

### 3.4.4 Test Setup Layout

For radiated emissions below 30MHz

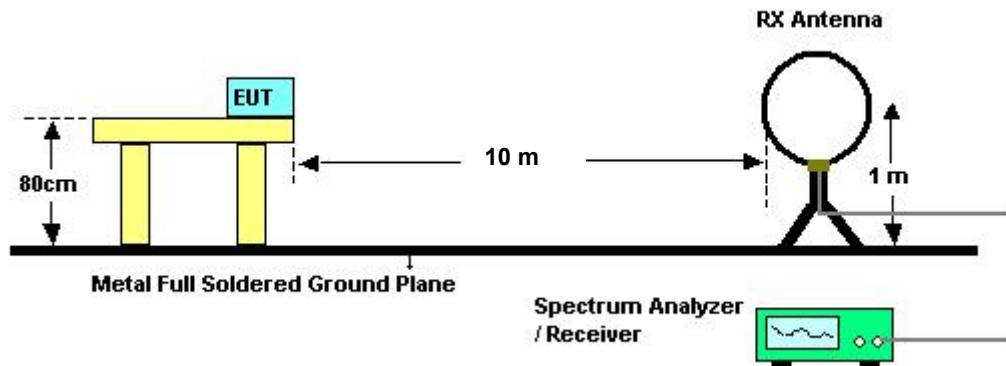

For radiated emissions above 30MHz

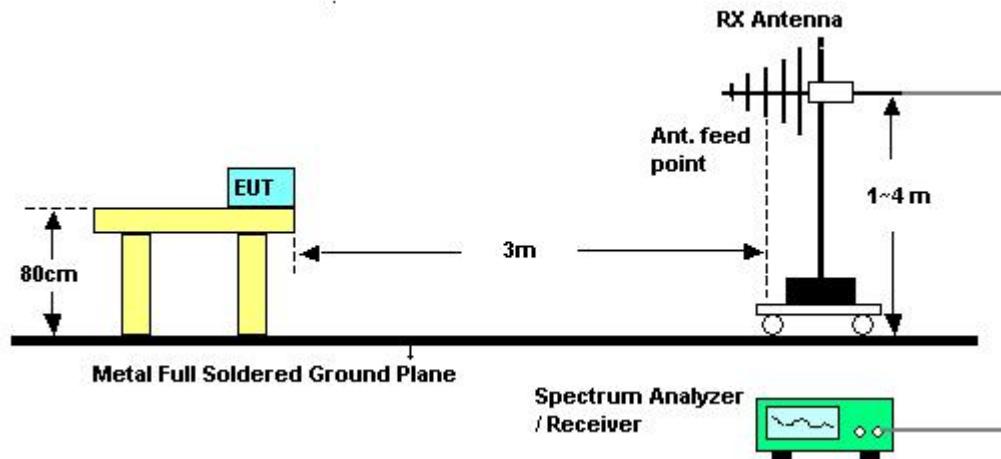

### 3.4.5 Test Deviation

There is no deviation with the original standard.


### 3.4.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 3.4.7 Results of Radiated Emissions (9kHz~30MHz)

<b>Final Test Date</b>	Jul. 08, 2011	<b>Test Site No.</b>	10CH02-HY
<b>Temperature</b>	24.6°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Daniel	<b>Configurations</b>	Ch. 1

9KHz~150KHz

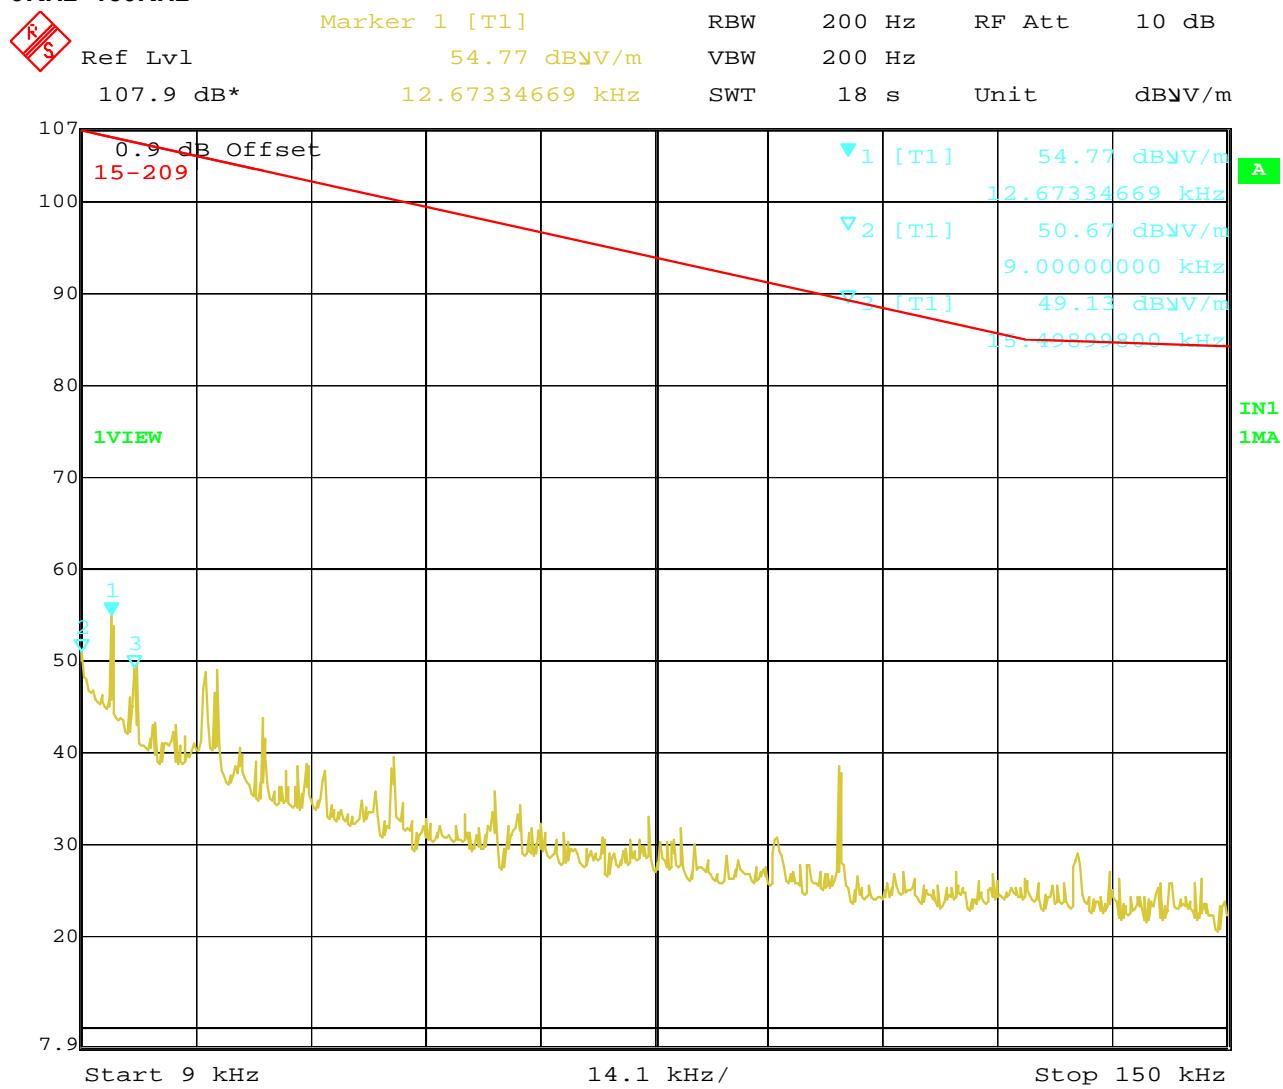

Date: 8.JUL.2011 17:34:32

## 150KHz~2MHz



Ref Lvl

107.9 dB\*

Marker 1 [T1]

50.43 dB $\mu$ V/m

350.20040080 kHz

RBW

10 kHz

RF Att

10 dB


VBW

10 kHz

SWT


47 ms

Unit

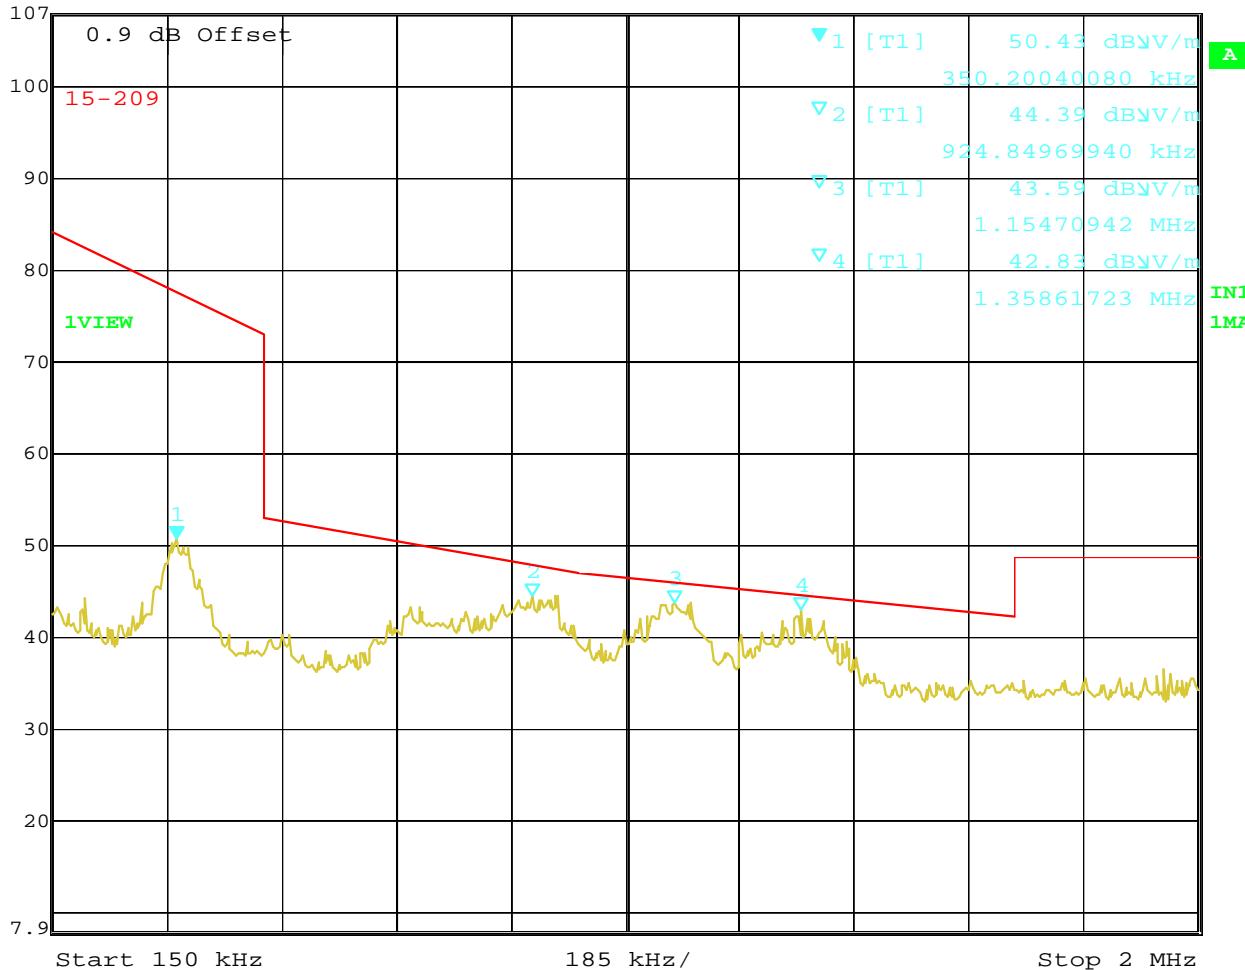dB $\mu$ V/m

Date: 8.JUL.2011 17:42:39

## 2MHz~8MHz

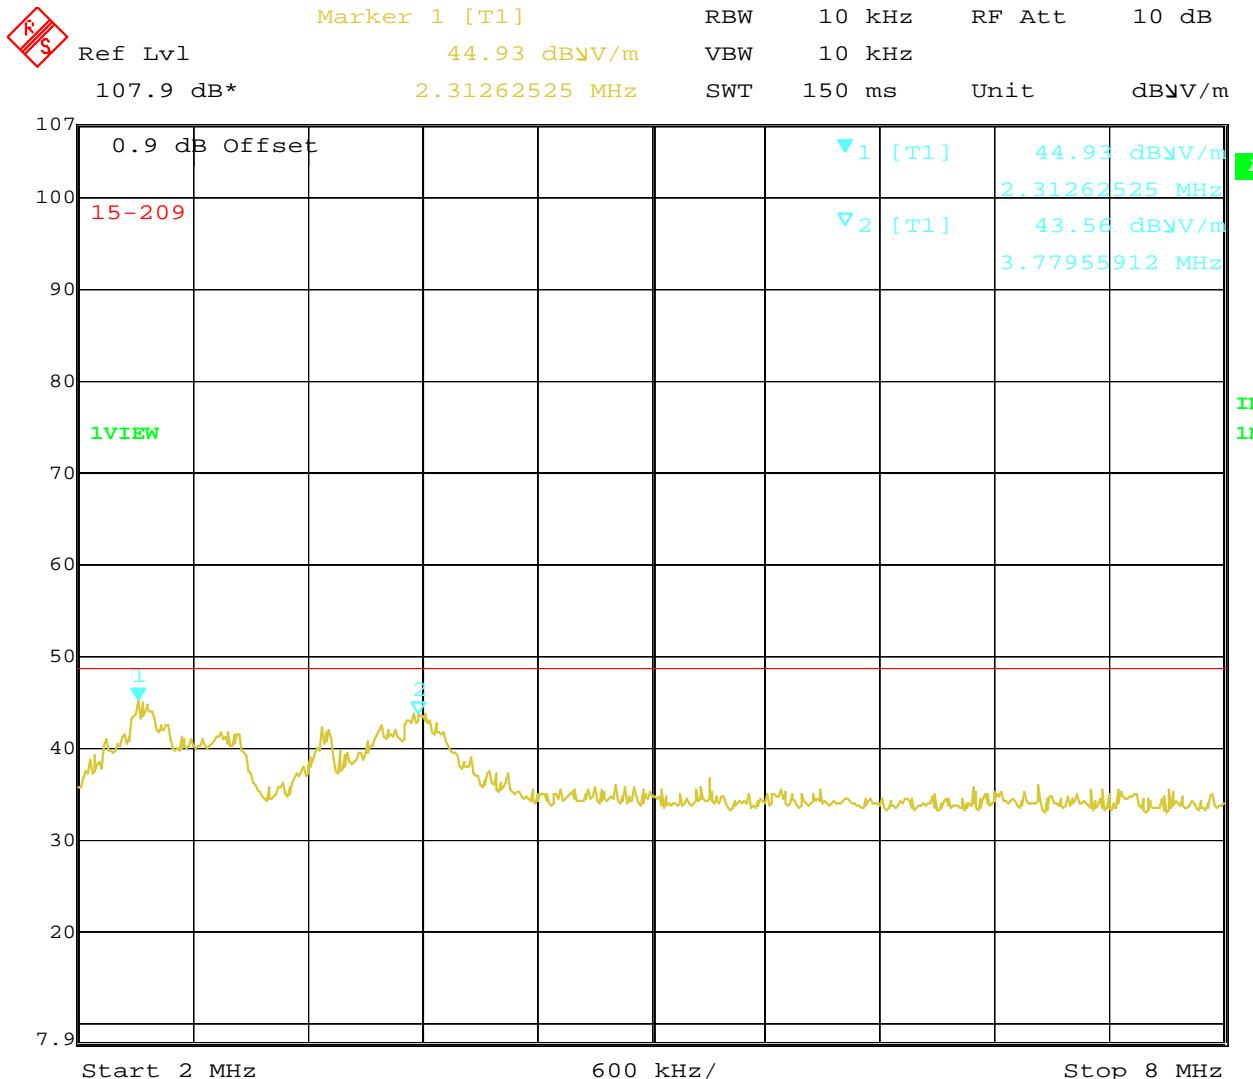

Date: 8.JUL.2011 17:50:12

## 8MHz~25MHz



Ref Lvl

107.9 dB\*

Marker 1 [T1]

56.30 dB $\mu$ V/m

13.55310621 MHz

RBW

10 kHz

RF Att

10 dB


VBW

10 kHz

SWT

430 ms


Unit

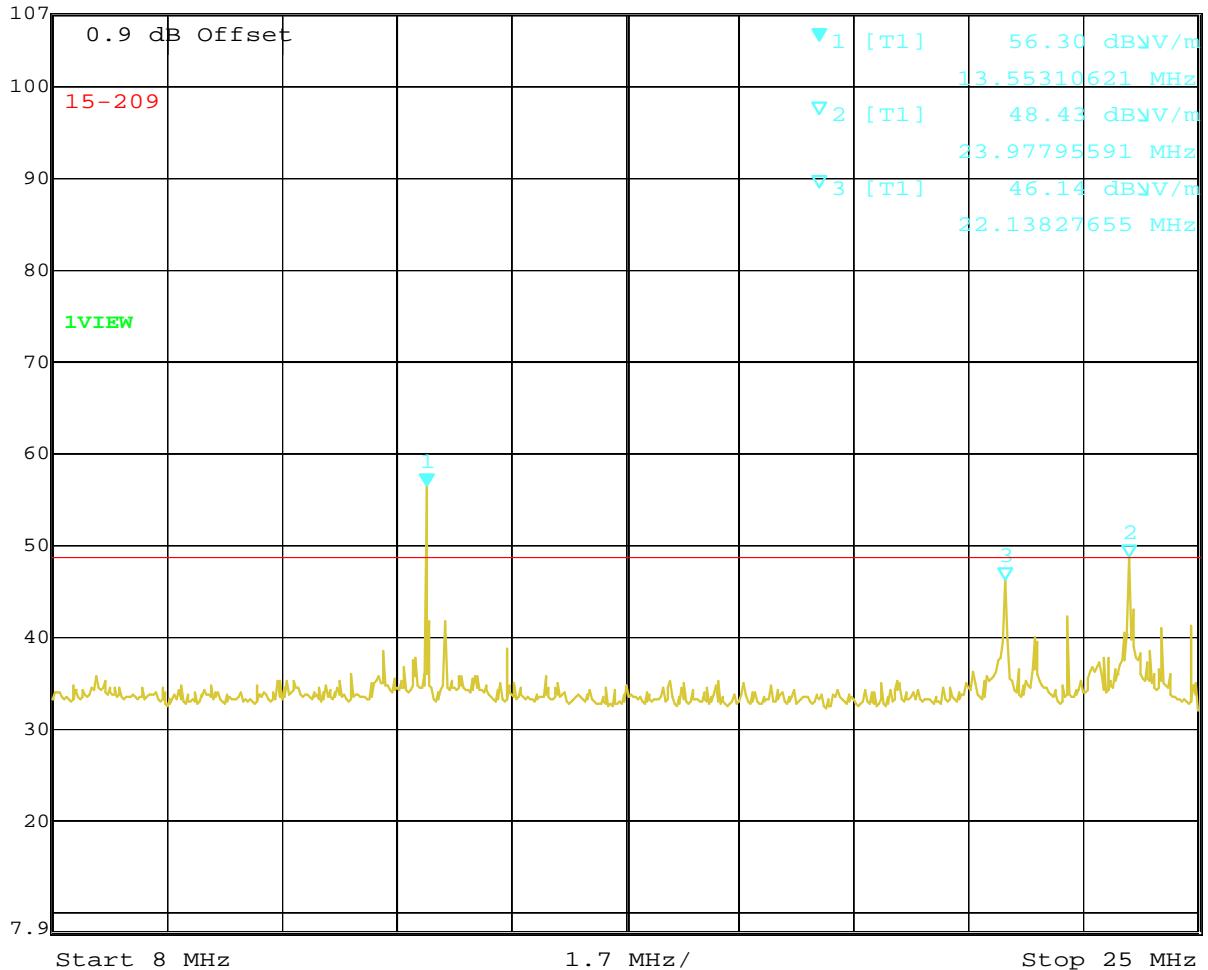dB $\mu$ V/m

Date: 8.JUL.2011 17:52:04

Note: A mark 1 is Fundamental Emissions.

## 25MHz~30MHz

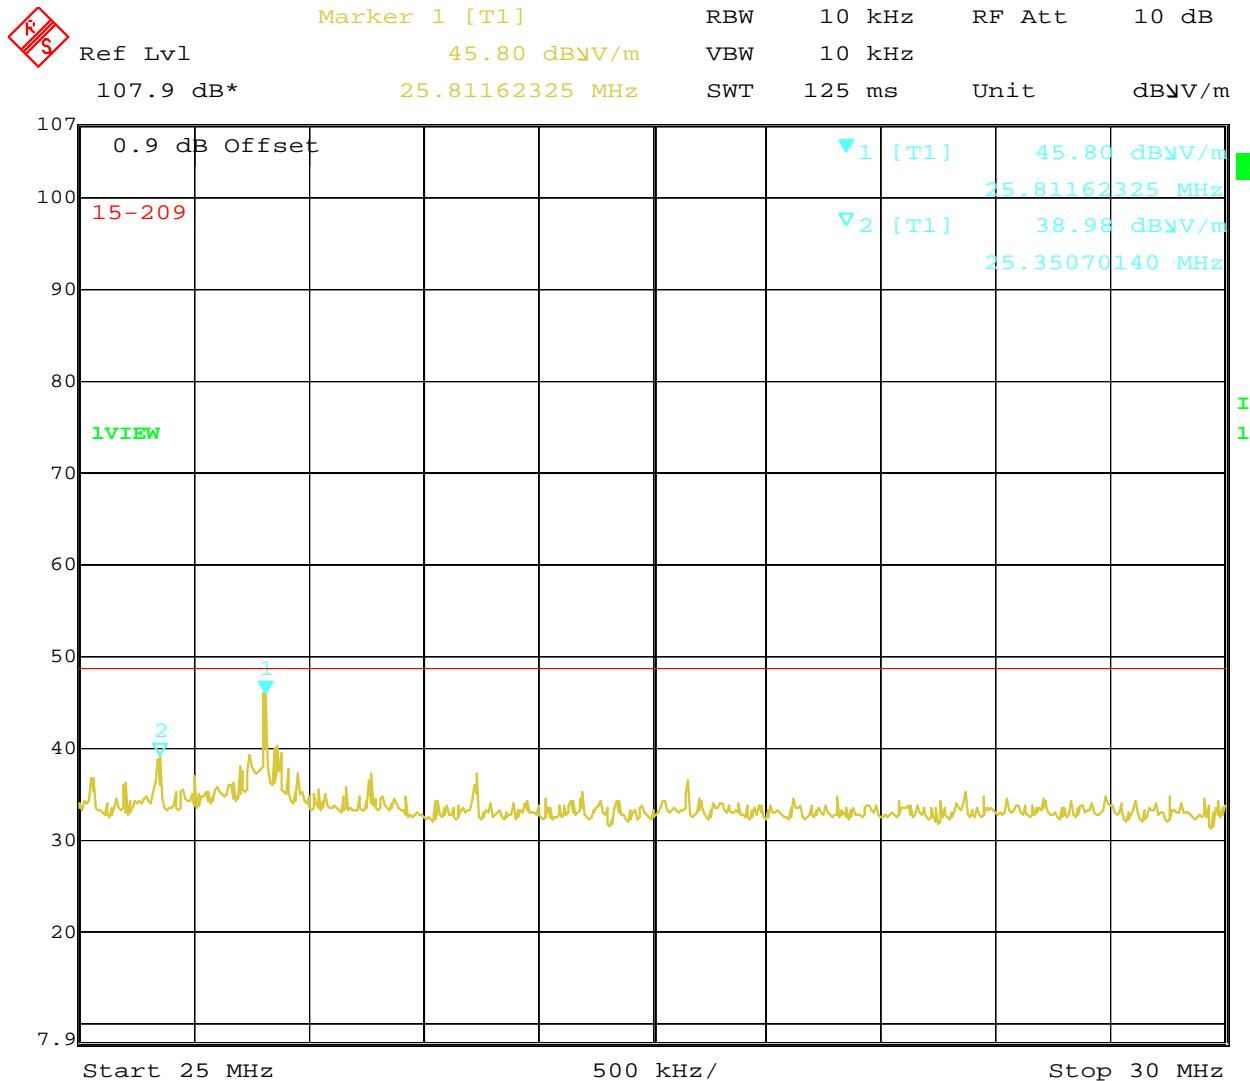

Date: 8.JUL.2011 17:53:47

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);  
 Limit line = specific limits (dB<sub>u</sub>V) + distance extrapolation factor.

## 3.4.8 Results for Radiated Emissions (30MHz~1GHz)


Final Test Date	Jul. 13, 2011	Test Site No.	03CH03-HY
Temperature	24.6°C	Humidity	56%
Test Engineer	Daniel	Configurations	Ch.1 (Docking Mode)

## Horizontal

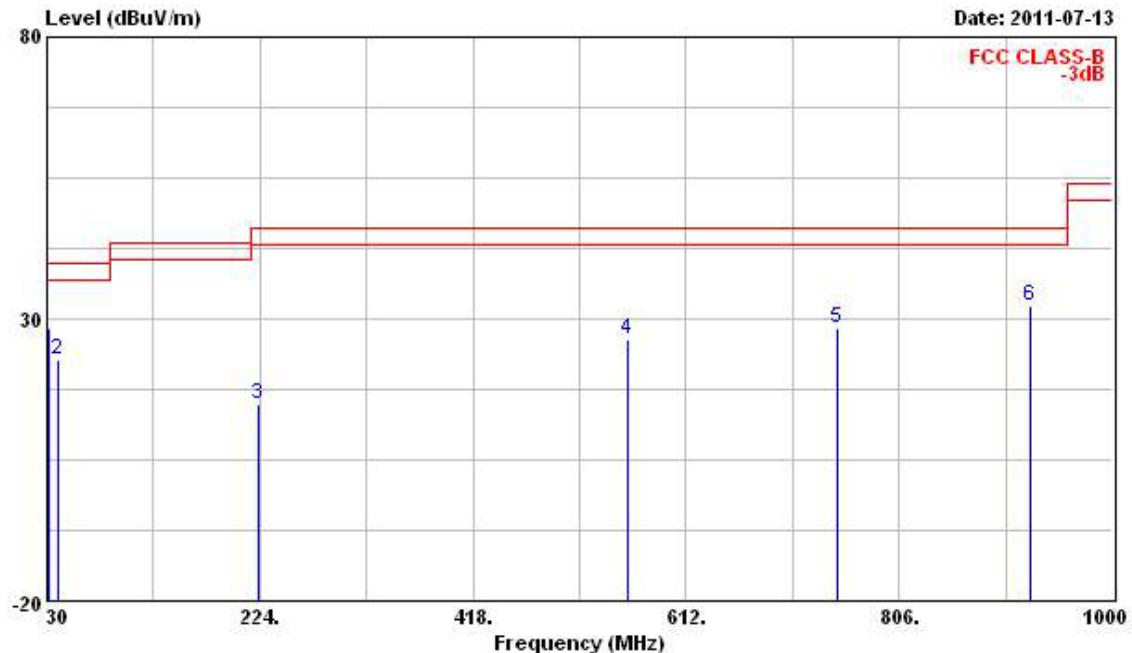

Freq	Level	Over Limit	Limit	Read		Cable	Preamp	Remark	Ant Pos	Table Pos
				Line	Antenna Factor					
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	31.940	28.48	-11.52	40.00	39.48	17.30	-0.85	27.45	Peak	---
2	40.670	22.88	-17.12	40.00	38.88	12.17	-0.69	27.47	Peak	---
3	223.030	14.75	-31.25	46.00	31.82	9.51	1.41	27.99	Peak	---
4	559.620	26.28	-19.72	46.00	33.29	19.30	3.05	29.36	Peak	---
5	749.740	28.37	-17.63	46.00	33.08	20.71	4.02	29.43	Peak	---
6	925.310	32.33	-13.67	46.00	35.30	21.18	5.12	29.27	Peak	---

## Vertical

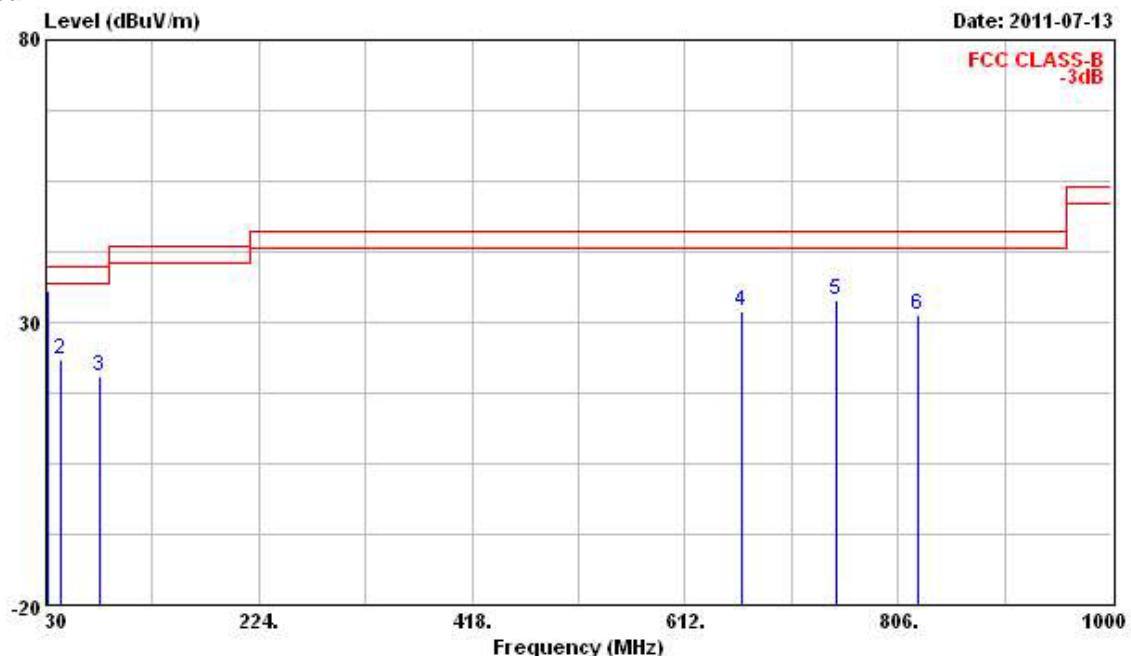

Freq	Level	Over Limit	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
									Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	31.940	35.51	-4.49	40.00	46.51	17.30	-0.85	27.45 Peak	---	---
2	43.580	23.34	-16.66	40.00	40.63	10.93	-0.63	27.59 Peak	---	---
3	79.470	20.34	-19.66	40.00	40.01	7.15	0.60	27.41 Peak	---	---
4	664.380	31.86	-14.14	46.00	37.91	19.73	3.70	29.48 Peak	---	---
5	749.740	33.82	-12.18	46.00	38.53	20.71	4.02	29.43 Peak	---	---
6	823.460	31.40	-14.60	46.00	35.55	20.79	4.51	29.46 Peak	---	---


## Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Final Test Date	Aug. 15, 2011	Test Site No.	03CH06-HY
Temperature	24.6°C	Humidity	56%
Test Engineer	Daniel	Configurations	Ch.1 (Adapter Mode)

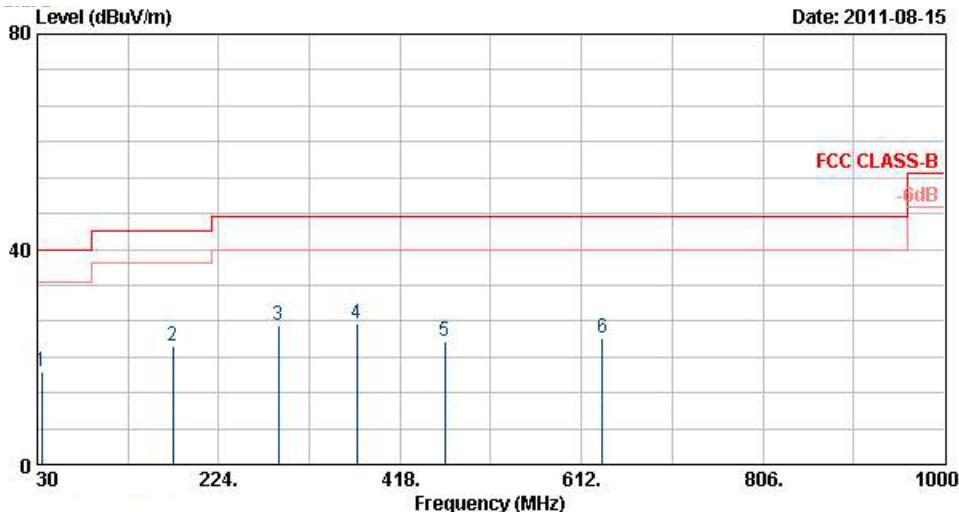**Horizontal**

	Freq MHz	Level dBuV/m	Over Limit dB	Limit Line dBuV/m	Read Level dBuV	Antenna Factor dB/m	Cable Loss dB	Preamp Factor dB	Ant Pos	Table Pos	Remark
1	35.13	17.29	-22.71	40.00	33.32	14.93	0.74	31.70	---	---	Peak
2	174.99	22.16	-21.34	43.50	42.70	9.57	1.57	31.68	---	---	Peak
3	287.58	25.84	-20.16	46.00	42.22	13.27	2.01	31.66	---	---	Peak
4	371.40	26.14	-19.86	46.00	40.38	15.11	2.31	31.66	137	254	Peak
5	465.90	22.94	-23.06	46.00	35.10	17.11	2.55	31.83	---	---	Peak
6	633.90	23.45	-22.55	46.00	33.22	19.24	3.01	32.02	---	---	Peak

## Vertical

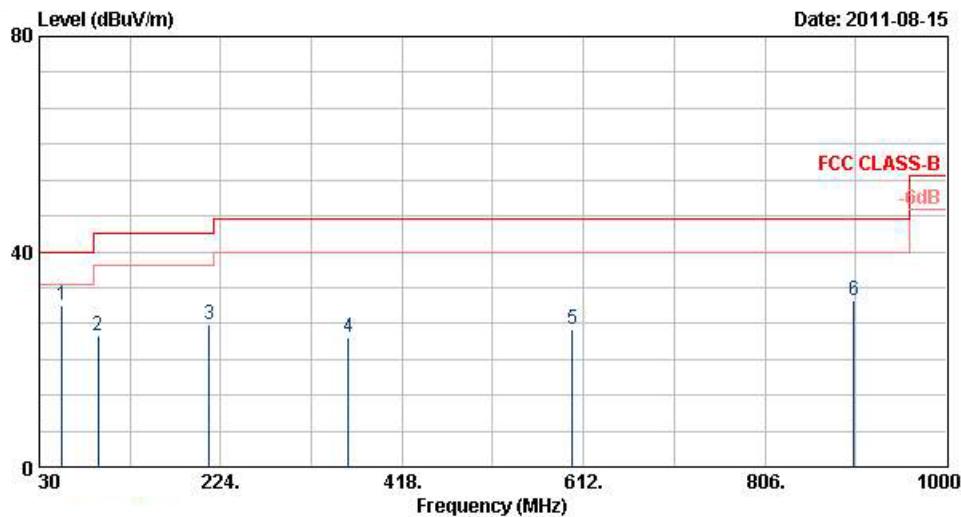

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table		
		MHz	dBuV/m	dB	Line	Level	Factor	Loss	Factor	Pos	Pos
1 @	54.03	30.09	-9.91	40.00	53.44	7.44	0.89	31.68	168	231	Peak
2	92.64	24.35	-19.15	43.50	45.34	9.56	1.16	31.71	---	---	Peak
3	211.44	26.48	-17.02	43.50	46.28	10.12	1.70	31.63	---	---	Peak
4	360.90	24.10	-21.90	46.00	38.54	14.87	2.27	31.57	---	---	Peak
5	600.30	25.52	-20.48	46.00	35.56	19.17	2.92	32.13	---	---	Peak
6	901.30	30.80	-15.20	46.00	36.98	21.63	3.76	31.58	---	---	Peak

## Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

### 3.5 Frequency Stability Measurement

#### 3.5.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

#### 3.5.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	1 kHz
VB	1 kHz
Sweep Time	Auto

#### 3.5.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 1 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c-f)/f_c \times 10^6$  ppm and the limit is less than  $\pm 100$  ppm.
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is -20°C~50°C.

#### 3.5.4 Test Setup Layout

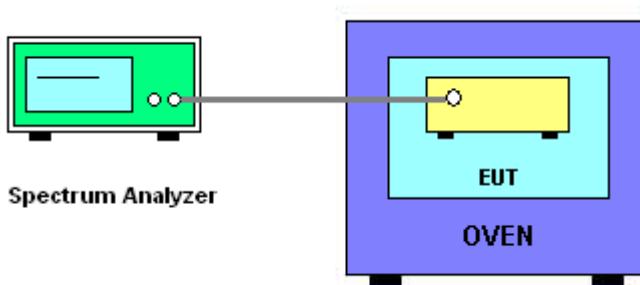

#### 3.5.5 Test Deviation

There is no deviation with the original standard.

#### 3.5.6 EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

## 3.5.7 Test Result of Frequency Stability

Final Test Date	Jul. 13, 2011	Test Site No.	TH01-HY
Temperature	28.2°C	Humidity	62%
Test Engineer	Ian	Configurations	Ch. 1

## Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	13.56 MHz
126.5	13.561180
110	13.561200
93.5	13.561200
Max. Deviation (MHz)	0.001200
Max. Deviation (ppm)	88.4956

## Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	13.56 MHz
-20	13.561240
-10	13.561260
0	13.561280
10	13.561240
20	13.561220
30	13.561200
40	13.561180
50	13.561180
Max. Deviation (MHz)	0.001280
Max. Deviation (ppm)	94.3953

### **3.6 Antenna Requirements**

#### **3.6.1 Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

#### **3.6.2 Antenna Connector Construction**

Please refer to section 2.1 in this test report; antenna connector complied with the requirements.

## 4. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Apr. 20, 2011	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99041	9kHz – 30MHz	Mar. 10, 2011	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	May 04, 2011	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	CB049	9kHz – 30MHz	Apr. 21, 2011	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 30	100023	9KHz ~ 30GHz	Mar. 15, 2011	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Oct. 22, 2010	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 02, 2010	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 02, 2010	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jun. 07, 2011	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	0917017	300MHz~40GHz	Jan. 06, 2011	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jun. 09, 2011*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

## For Radiated emissions 9kHz~3MHz

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
10m Semi Anechoic Chamber	TDK	SAC-10M	10CH02-HY	30MHz~1GHz 10m,3m	Nov. 28, 2010	Radiation (10CH02-HY)
Amplifier	AGILENT	8447D	2944A10827	100KHz – 1.3GHz	May 20, 2011	Radiation (10CH02-HY)
Amplifier	AGILENT	8447D	2944A10828	100KHz – 1.3GHz	May 16, 2011	Radiation (10CH02-HY)
Receiver	R&S	ESI	838496/008	20Hz - 7GHz	Apr. 24, 2011	Radiation (10CH02-HY)
Spectrum Analyzer	R&S	FSP7	100645	9KHz – 7GHz	Jun. 01.2011	Radiation (10CH02-HY)
Biconical Antenna	Schwarzbeck	VHBB 9124	287	30MHz –200MHz	Dec. 20, 2010	Radiation (10CH02-HY)
Log Antenna	Schwarzbeck	VUSLP 9111	207	200MHz -1GHz	Dec. 20, 2010	Radiation (10CH02-HY)
Turn Table	HD	DS 430	430/360	0 ~ 360 degree	N/A	Radiation (10CH02-HY)
Antenna Mast	HD	MA240	240/664	1 m - 4 m	N/A	Radiation (10CH02-HY)
Antenna Mast	HD	MA240	240/667	1 m - 4 m	N/A	Radiation (10CH02-HY)
RF Cable-R10m	Jye Bao	RG142	CB027-INSIDE	30MHz~1GHz	Feb. 12, 2011	Radiation (10CH02-HY)
RF Cable-R10m	Suhner Switzerland + BELDEN	RG223/U + RG8/U	CB026-DOOR	30MHz~1GHz	Feb. 12, 2011	Radiation (10CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

## For Radiated emissions 30MHz~1GHz

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 17, 2011	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 25, 2011	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004	9 kHz - 40 GHz	Nov. 17, 2010	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Oct. 16, 2010	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Jan. 18, 2011	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 29, 2010**	Radiation (10CH02-HY) (03CH03-HY)

Note: Calibration Interval of instruments listed above is two year.

<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Characteristics</b>	<b>Calibration Date</b>	<b>Remark</b>
Spectrum Analyzer	Agilent	E4408B	MY44211030	9KHz-26.5GHz	Oct. 29, 2010	Radiation (03CH06-HY)
Spectrum Analyzer	R&S	FSP40	100057	9KHz-40GHz	Oct. 25, 2010	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESVS10	834468/003	20MHz-1000MHz	May. 10, 2011	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz -2GHz	Oct. 31, 2010	Radiation (03CH06-HY)
Amplifier	Agilent	310N	186713	9KHz~1GHz	Apr. 14, 2011	Radiation (03CH06-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9KHz~30MHz	N/A	Radiation (03CH06-HY)
Spectrum Analyzer	Agilent	E4408B	MY44211030	9KHz-26.5GHz	Oct. 29, 2010	Radiation (03CH06-HY)
Spectrum Analyzer	R&S	FSP40	100057	9KHz-40GHz	Oct. 25, 2010	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESVS10	834468/003	20MHz-1000MHz	May. 10, 2011	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz -2GHz	Oct. 31, 2010	Radiation (03CH06-HY)

Note: Calibration Interval of instruments listed above is one year.

## 5. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 6. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-110111

財團法人全國認證基金會  
Taiwan Accreditation Foundation

## Certificate of Accreditation

This is to certify that

**Sporton International Inc.****EMC & Wireless Communications Laboratory**No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.**is accredited in respect of laboratory****Accreditation Criteria** : ISO/IEC 17025:2005**Accreditation Number** : 1190**Originally Accredited** : December 15, 2003**Effective Period** : January 10, 2010 to January 09, 2013**Accredited Scope** : Testing Field, see described in the Appendix**Specific Accreditation Program** : Accreditation Program for Designated Testing Laboratory  
for Commodities Inspection  
Accreditation Program for Telecommunication Equipment  
Testing Laboratory  
Accreditation Program for BSMI Mutual Recognition  
Arrangement with Foreign Authorities

Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : January 11, 2011

P1, total 24 pages