


TEST REPORT

Applicant: GT-tronics HK Limited
Address: Unit 10, 2/F., Block B, Tonic Industrial Center 19
Lam Hing Street, Kowloon Bay, Kowloon, Hong Kong
Equipment Type: GT-tronics QCC Bluetooth Module
Model Name: QC356FNB-S (refer to section 2.3)
Brand Name: GT-tronics
FCC ID: B4O-QC35XFNX
Test Standard: 47 CFR Part 15 Subpart C
(refer to section 3.1)
Sample Arrival Date: Dec. 30, 2022
Test Date: Jan. 05, 2023 - Jul. 13, 2023
Date of Issue: Aug. 22, 2023

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Julie Zhu**Checked by:** Ye Hongji**Approved by:** Liao Jianming
(Technical Director)

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Aug. 22, 2023</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	General Description for Equipment under Test (EUT)	5
2.4	Technical Information	6
3	SUMMARY OF TEST RESULTS	7
3.1	Test Standards	7
3.2	Test Verdict	7
4	GENERAL TEST CONFIGURATIONS	8
4.1	Test Environments	8
4.2	Test Equipment List	8
4.3	Test Software List	8
4.4	Measurement Uncertainty	9
4.5	Description of Test Setup	9
4.6	Measurement Results Explanation Example	12
5	TEST ITEMS	13
5.1	Antenna Requirements	13
5.2	Output Power	14
5.3	Occupied Bandwidth	16
5.4	Conducted Spurious Emission	17
5.5	Band Edge (Authorized-band band-edge)	19

5.6	Conducted Emission	21
5.7	Radiated Spurious Emission	22
5.8	Band Edge (Restricted-band band-edge).....	27
5.9	Power Spectral density (PSD).....	28
ANNEX A	TEST RESULT	29
A.1	Output Power, Duty Cycle	29
A.2	Occupied Bandwidth	33
A.3	Conducted Spurious Emissions	37
A.4	Band Edge (Authorized-band band-edge).....	42
A.5	Conducted Emissions.....	45
A.6	Radiated Spurious Emission	57
A.7	Band Edge (Restricted-band band-edge).....	141
A.8	Power Spectral Density (PSD)	165
ANNEX B	TEST SETUP PHOTOS	168
ANNEX C	EUT EXTERNAL PHOTOS	168
ANNEX D	EUT INTERNAL PHOTOS	168

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	GT-tronics HK Limited
Address	Unit 10, 2/F., Block B, Tonic Industrial Center 19 Lam Hing Street, Kowloon Bay, Kowloon, Hong Kong

2.2 Manufacturer Information

Manufacturer	GT-tronics HK Limited
Address	B210, Tonic Industrial Center, 19 Lam Hing Street, Kowloon Bay, Hong Kong

2.3 General Description for Equipment under Test (EUT)

EUT Name	GT-tronics QCC Bluetooth Module
Model Name Under Test	QC356FNB-S
Series Model Name	QC356FNA, QC356FNB, QC350FNA, QC350FNB, QCC350FNB-S, QC551FNA, QCC551FNB, QC551FNB-S, QCCx5xFNx, QCCx4xFNx, QCCx5xFPx, QCCx4xFPx, QCCx5xFCx, QCCx4xFCx, QCCx5xFEx, QCCx4xFEx
Description of Model name differentiation	All models are same with electrical parameters and internal circuit structure, but only differ in model name. (this information provided by the applicant)
Hardware Version	v1.0
Software Version	v1.0
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE)
-----------------------------------	------------------------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	DTS	
Modulation Type	GFSK	
Product Type	☒ Mobile ☐ Portable ☐ Fix Location	
Transfer Rate	1 Mbps, 2 Mbps	
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.	
Number of Channel	40 (at intervals of 2 MHz)	
Tested Channel	0 (2402 MHz), 19 (2440 MHz), 39 (2480 MHz)	
Antenna Type/ Antenna Gain	Antenna Type	Antenna Gain
	Ceramic Chip Antenna	2.00 dBi
	Metal Antenna	2.71 dBi
	PCB Antenna	-0.30 dBi
	Dipole Antenna 1	3.00 dBi
	Dipole Antenna 2	2.00 dBi
	Dipole Antenna 3	2.00 dBi
Antenna Impedance	50Ω	
Antenna System (MIMO Smart Antenna)	N/A	

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

3.2 Test Verdict

No.	Description	FCC Part No.	Channel	Test Result	Verdict
1	Antenna Requirement	15.203	N/A	--	Pass ^{Note}
2	Output Power	15.247(b)	Low/Middle/High	ANNEX A.1	Pass
3	Occupied Bandwidth	15.247(a)	Low/Middle/High	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247(d)	Low/Middle/High	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.247(d)	Low/High	ANNEX A.4	Pass
6	Conducted Emission	15.207	Low/Middle/High	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209 15.247(d)	Low/Middle/High	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	Low/High	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247(e)	Low/Middle/High	ANNEX A.8	Pass

Note: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	51% to 63%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+20.3°C to +23.4°C
Working Voltage of the EUT	NV (Normal Voltage)	5 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	KEYSIGHT	N9020A	MY46471071	2022.07.26	2023.07.25
Spectrum Analyzer	KEYSIGHT	N9020A	MY50531259	2022.09.06	2023.09.05
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	02460	2021.05.19	2024.05.08
Test Antenna-Horn	A-INFO	LB-180400KF	J211060273	2021.07.02	2024.07.01
Anechoic Chamber	RAINFORD	9m*6m*6m	140	2021.08.16	2024.08.15
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2022.09.09	2023.09.08
Test Antenna-Loop	SCHWARZBECK	FMZB 1519	1519-037	2021.04.16	2024.04.15
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	130	2021.08.15	2024.08.14
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2022.09.09	2023.09.08
LISN	SCHWARZBECK	NSLK 8127	8127-687	2022.06.01	2023.05.31
				2023.05.16	2024.05.15
Shielded Enclosure	YiHeng Electronic Co., Ltd	3.5m*3.1m*2.8m	112	2022.02.19	2025.02.18
EMI Receiver	Agilent	N9038A	MY55330120	2022.09.09	2023.09.08
Amplifier	COM-MV	ZT30-1000M	B2017119081	2022.09.09	2023.09.08
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	9168-00867	2022.04.12	2025.04.11
Anechoic Chamber	YiHeng	9m*6m*6m	142	2022.02.19	2024.08.18
Amplifier	COM-MV	LSCX_LNA1-12G-01	180602	2020.09.08	2023.09.07
Amplifier	COM-MV	XKu_LNA7-18G-01	180601	2020.09.08	2023.09.07
Amplifier	COM-MV	KA_LNA18-40G-01	18050001	2020.09.08	2023.09.07

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V22.930	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.8℃
Humidity	4%


4.5 Description of Test Setup

4.5.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

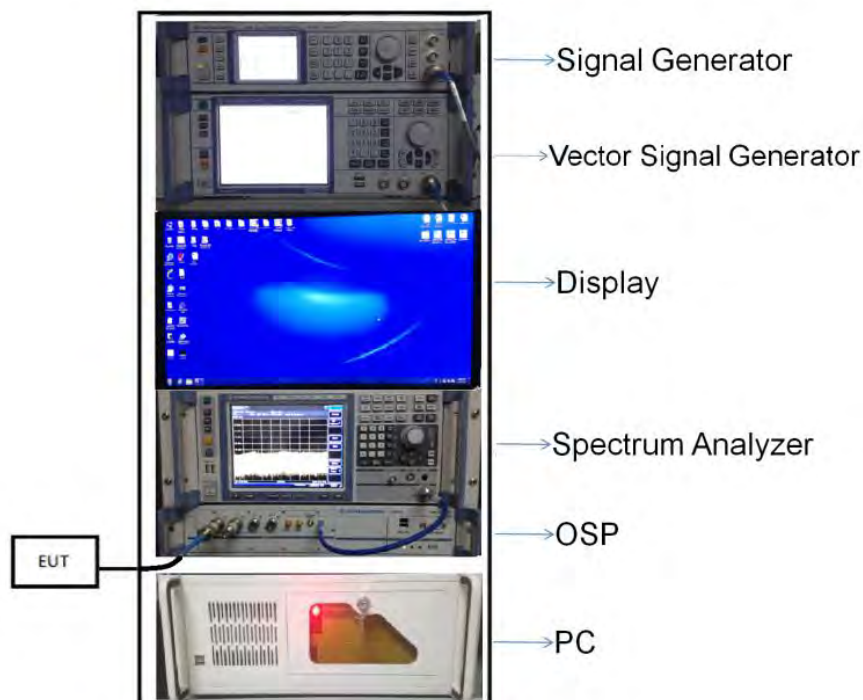


(Diagram 1)

4.5.2 For AC Power Supply Port Test

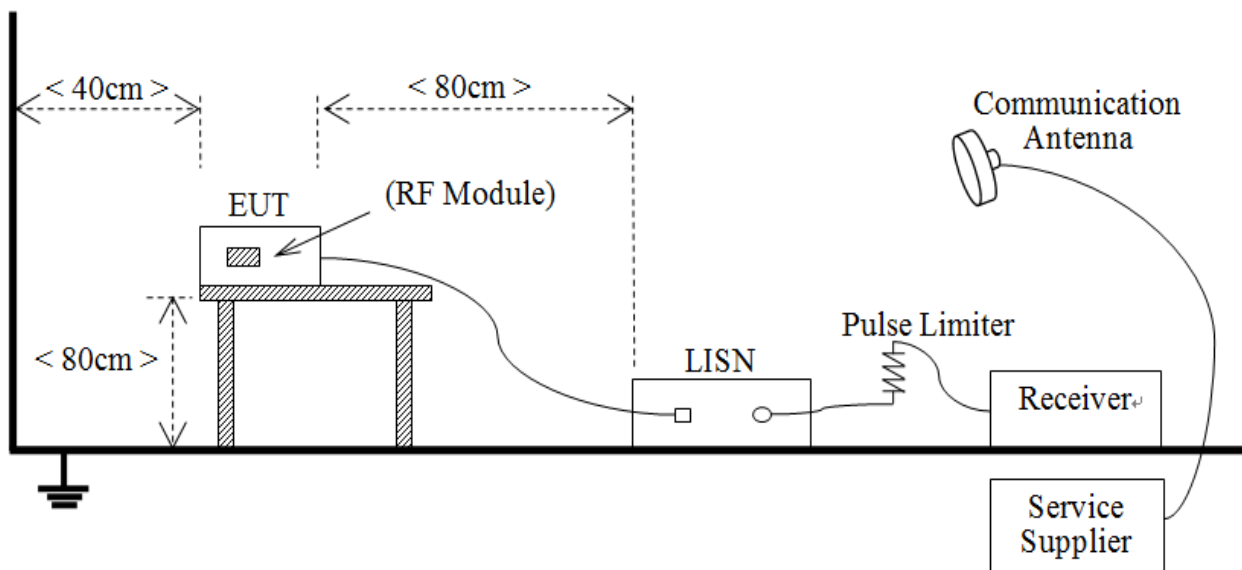


(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

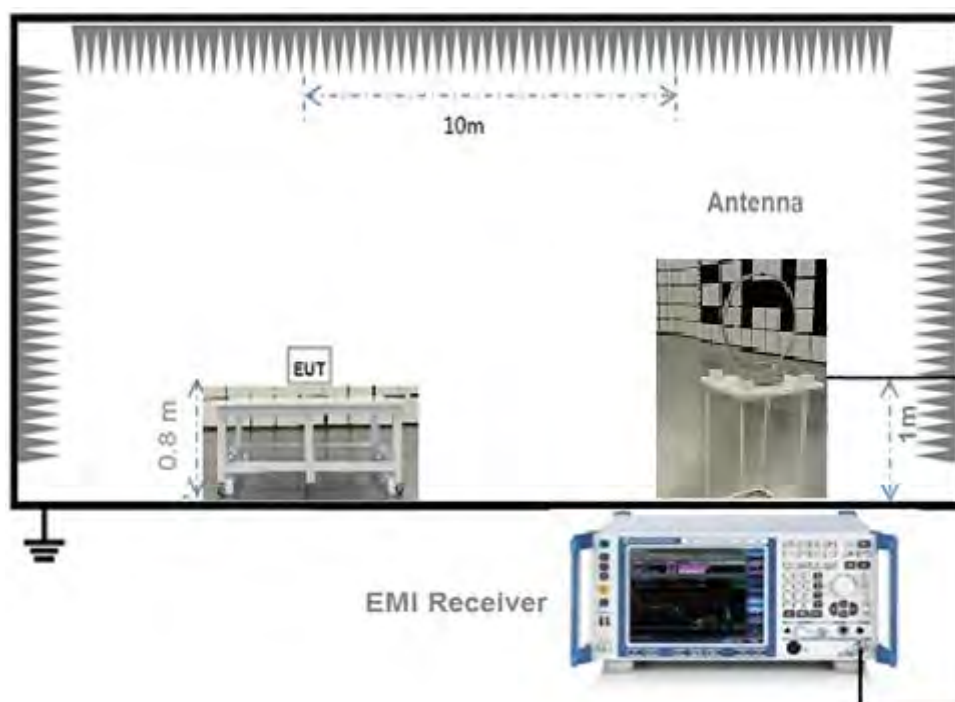


(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

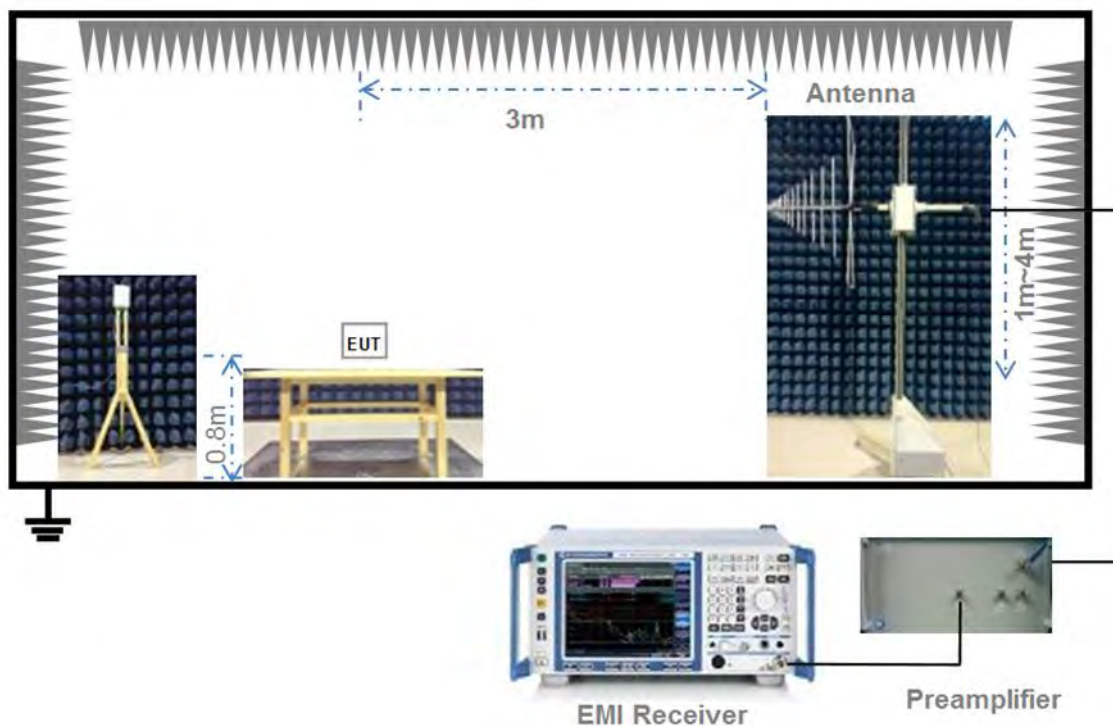

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

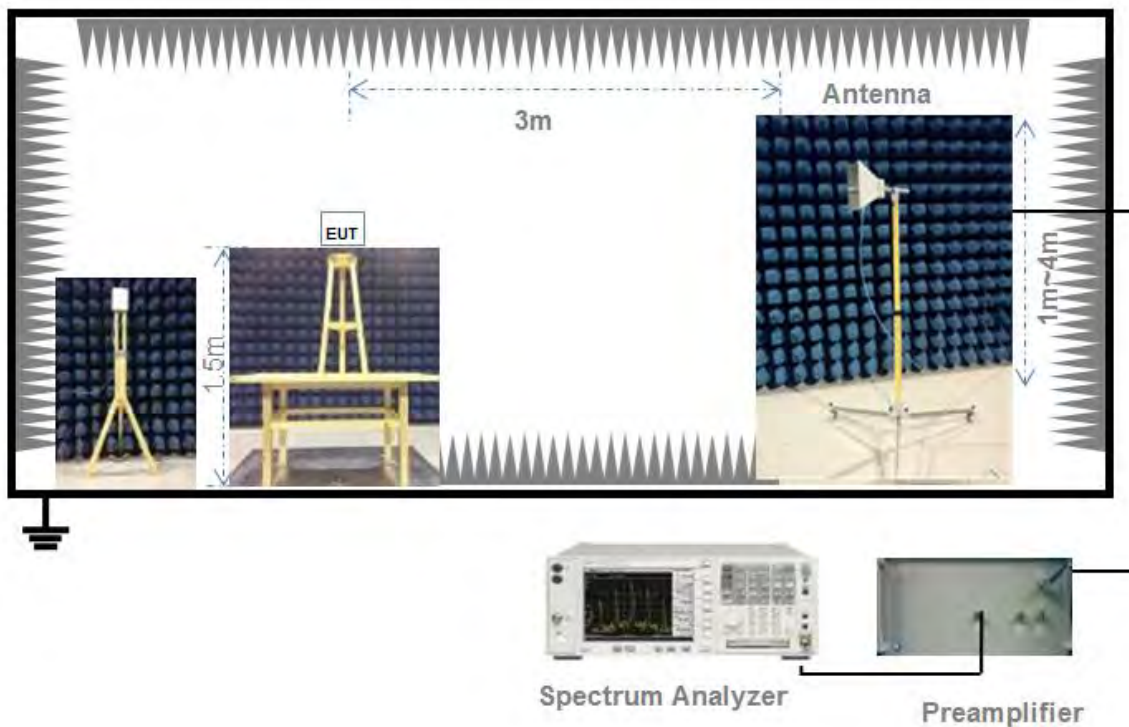

(Diagram 5)

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.6.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Output Power

5.2.1 Test Limit

FCC § 15.247(b)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

5.2.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

a) Maximum peak conducted output power

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

Set the $RBW \geq DTS$ bandwidth.

Set $VBW \geq 3 \times RBW$.

Set span $\geq 3 \times RBW$

Sweep time = auto couple.

Detector = peak.

Trace mode = max hold.

Allow trace to fully stabilize.

Use peak marker function to determine the peak amplitude level.

b) Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.

Set $VBW \geq RBW$. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Occupied Bandwidth

5.3.1 Limit

FCC §15.247(a)

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

5.3.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW) ≥ 3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Conducted Spurious Emission

5.4.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement:

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement:

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Band Edge (Authorized-band band-edge)

5.5.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.5.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission ± 0.5 MHz.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Conducted Emission

5.6.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.6.2 Test Setup

See section 4.5.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.6.4 Test Result

Please refer to ANNEX A.5.

5.7 Radiated Spurious Emission

5.7.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \times \log[\text{Field Strength } (\mu\text{V/m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: $54\text{dB}\mu\text{V/m}@3\text{m}$ (AV) and $74\text{dB}\mu\text{V/m}@3\text{m}$ (PK).

5.7.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements

for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands:

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure:

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW $\geq 3 \times$ RBW.

- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction:

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq 3 \times$ RBW.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:

- 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
- 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
- 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain:

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test:

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the

Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Band Edge (Restricted-band band-edge)

5.8.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.8.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Power Spectral density (PSD)

5.9.1 Limit

FCC §15.247(e)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section 5.4(4), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

5.9.2 Test Setup

See section 4.5.1 (Diagram 1) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

Set the VBW $\geq 3 \text{ RBW}$.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.9.4 Test Result

Please refer to ANNEX A.8.

ANNEX A TEST RESULT

A.1 Output Power, Duty Cycle

Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK (BLE 1Mbps)		dBm	mW	
	dBm	mW			
Low Channel	0.03	1.01	30	1000	Pass
Middle Channel	0.08	1.02			Pass
High Channel	0.35	1.08			Pass

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK (BLE 2Mbps)		dBm	mW	
	dBm	mW			
Low Channel	0.10	1.02	30	1000	Pass
Middle Channel	0.18	1.04			Pass
High Channel	0.45	1.11			Pass

Test Plots

GFSK (BLE 1Mbps) LOW CHANNEL



GFSK (BLE 1Mbps) MIDDLE CHANNEL



GFSK (BLE 1Mbps) HIGH CHANNEL



GFSK (BLE 2Mbps) LOW CHANNEL



GFSK (BLE 2Mbps) MIDDLE CHANNEL



GFSK (BLE 2Mbps) HIGH CHANNEL




Duty Cycle Test Data


Band	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)
GFSK (BLE 1Mbps)	50.02	50.02	100.00%
GFSK (BLE 2Mbps)	10.06	10.06	100.00%

Test Plots

GFSK (BLE 1Mbps)

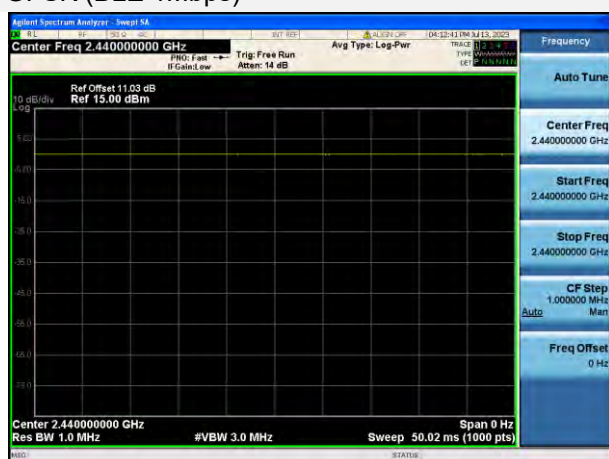

GFSK (BLE 2Mbps)

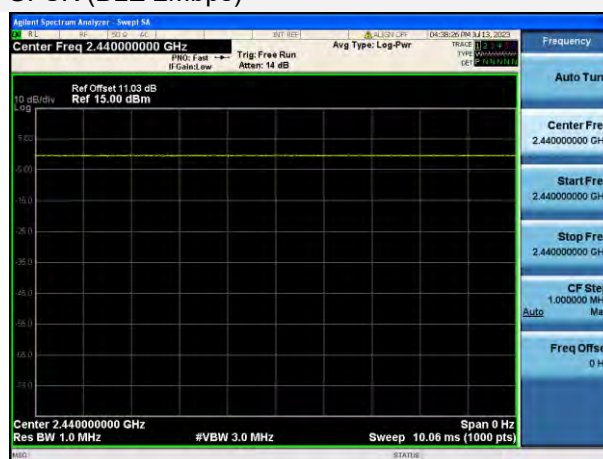

A.2 Occupied Bandwidth

Test Data

Test Mode	GFSK (BLE 1Mbps)		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	740.000	1076.600	≥500
Middle Channel	735.000	1074.500	≥500
High Channel	725.000	1056.600	≥500

Test Mode	GFSK (BLE 2Mbps)		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	1440.000	2090.400	≥500
Middle Channel	1530.000	2113.200	≥500
High Channel	1450.000	2094.400	≥500

Test Plots

6 dB Bandwidth

GFSK (BLE 1Mbps) LOW CHANNEL



GFSK (BLE 1Mbps) MIDDLE CHANNEL



GFSK (BLE 1Mbps) HIGH CHANNEL



GFSK (BLE 2Mbps) MIDDLE CHANNEL



GFSK (BLE 2Mbps) LOW CHANNEL



GFSK (BLE 2Mbps) HIGH CHANNEL



99% Bandwidth

GFSK (BLE 1Mbps) LOW CHANNEL



GFSK (BLE 1Mbps) MIDDLE CHANNEL



GFSK (BLE 1Mbps) HIGH CHANNEL



GFSK (BLE 2Mbps) LOW CHANNEL



GFSK (BLE 2Mbps) MIDDLE CHANNEL



GFSK (BLE 2Mbps) HIGH CHANNEL



A.3 Conducted Spurious Emissions

Test Data

GFSK (BLE 1Mbps)				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-34.30	-0.25	-20.25	Pass
Middle Channel	-35.09	-0.09	-20.09	Pass
High Channel	-35.06	0.26	-19.74	Pass


GFSK (BLE 2Mbps)				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-35.60	-1.55	-21.55	Pass
Middle Channel	-34.30	-1.42	-21.42	Pass
High Channel	-34.75	-1.14	-21.14	Pass

Test Plots


GFSK (BLE 1Mbps) LOW CHANNEL, CARRIER LEVEL



GFSK (BLE 1Mbps) LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

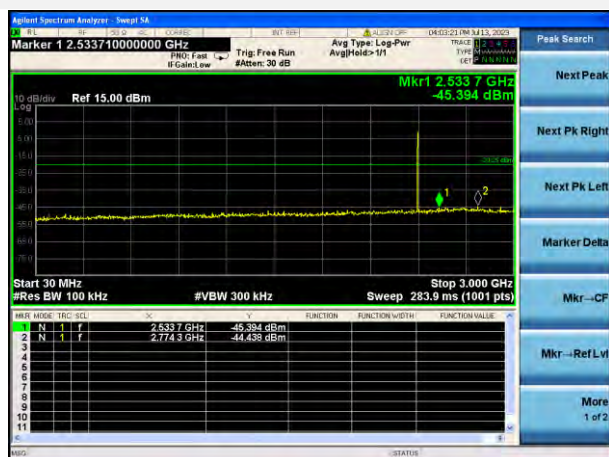


GFSK (BLE 1Mbps) LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

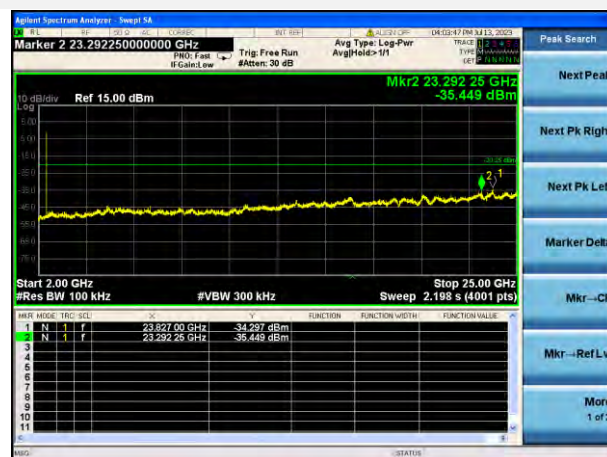

GFSK (BLE 1Mbps) MIDDLE CHANNEL, CARRIER LEVEL



GFSK (BLE 1Mbps) MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

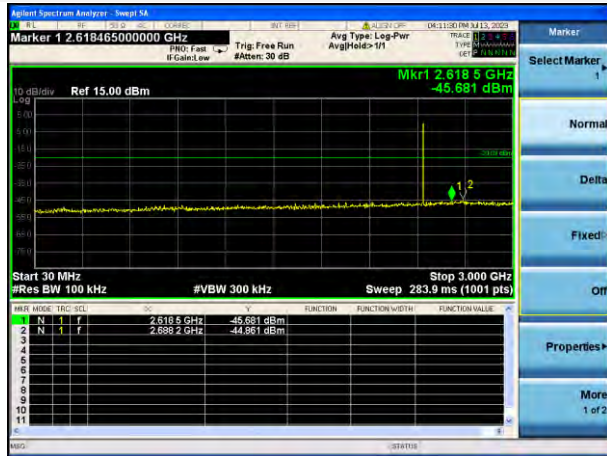


GFSK (BLE 1Mbps) MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz



GFSK (BLE 1Mbps) HIGH CHANNEL, CARRIER LEVEL




GFSK (BLE 1Mbps) HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

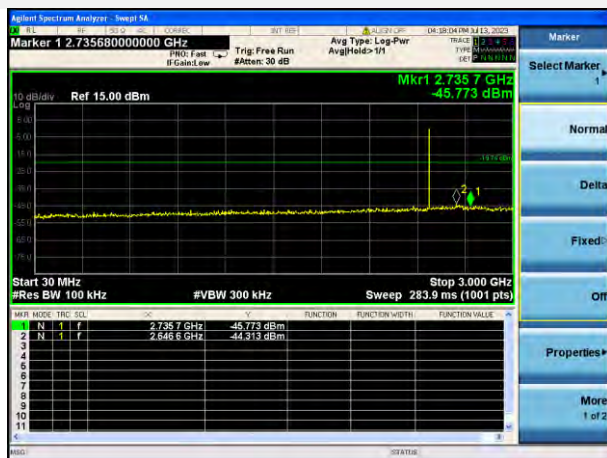


GFSK (BLE 1Mbps) HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz




GFSK (BLE 2Mbps) LOW CHANNEL, CARRIER LEVEL

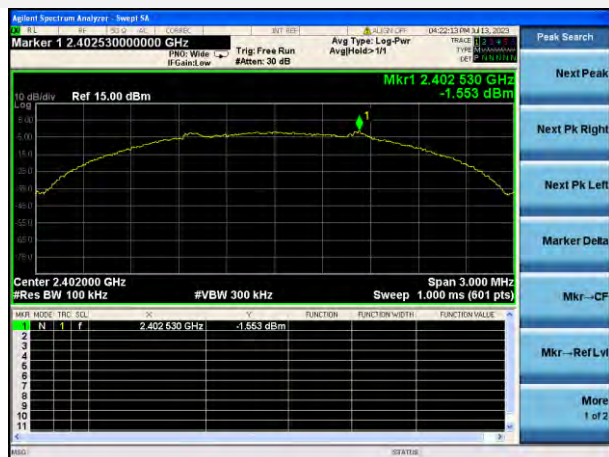

GFSK (BLE 2Mbps) LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

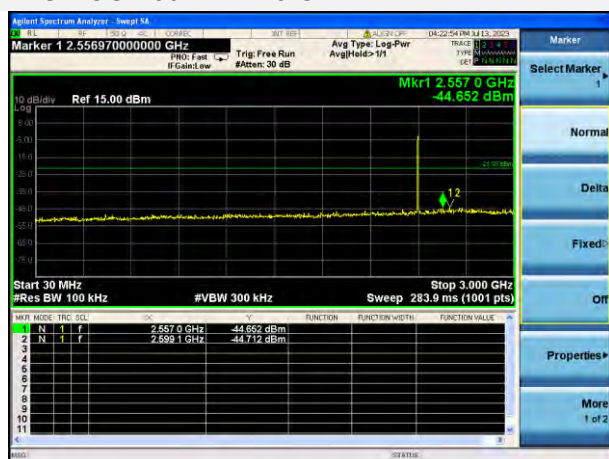


GFSK (BLE 2Mbps) LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

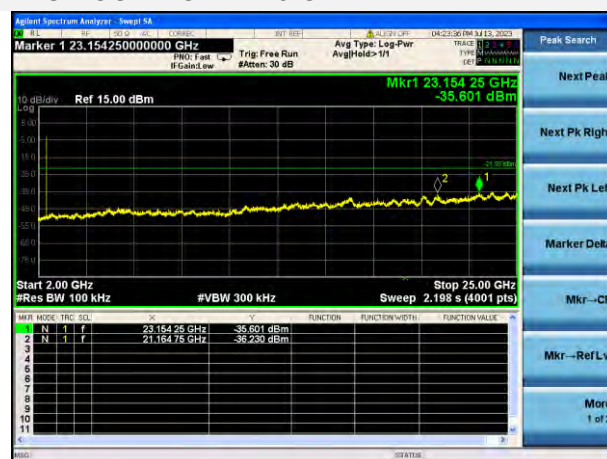


GFSK (BLE 2Mbps) MIDDLE CHANNEL, CARRIER LEVEL




GFSK (BLE 2Mbps) MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

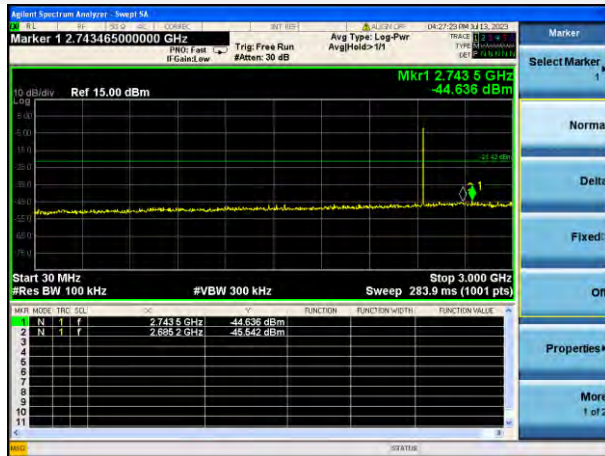


GFSK (BLE 2Mbps) MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

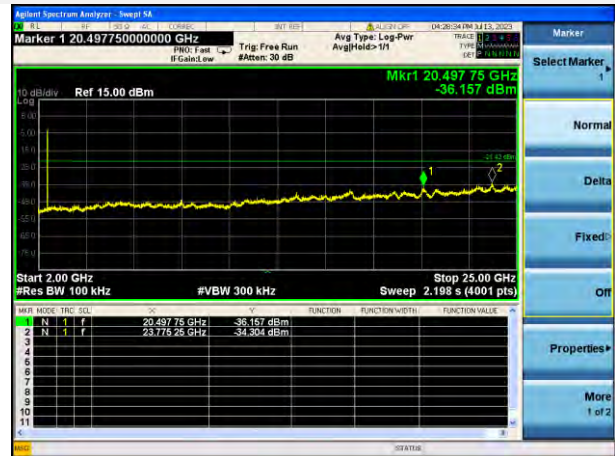


GFSK (BLE 2Mbps) HIGH CHANNEL, CARRIER LEVEL

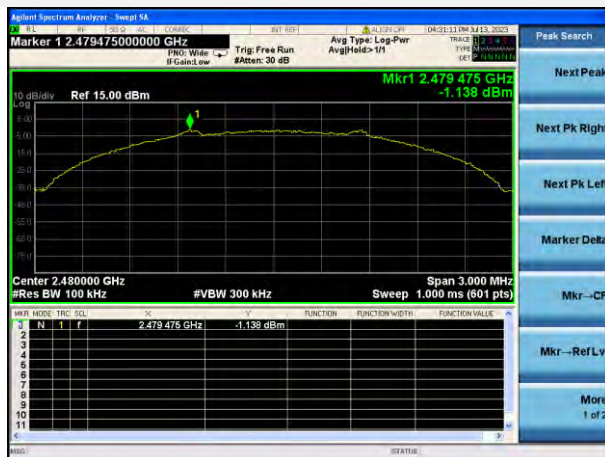

GFSK (BLE 2Mbps) HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

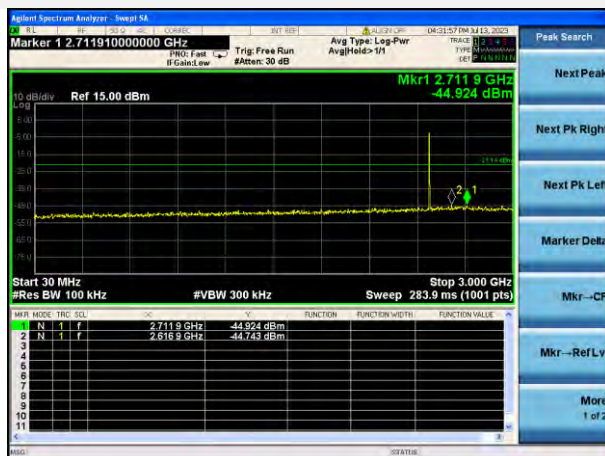

GFSK (BLE 2Mbps) HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

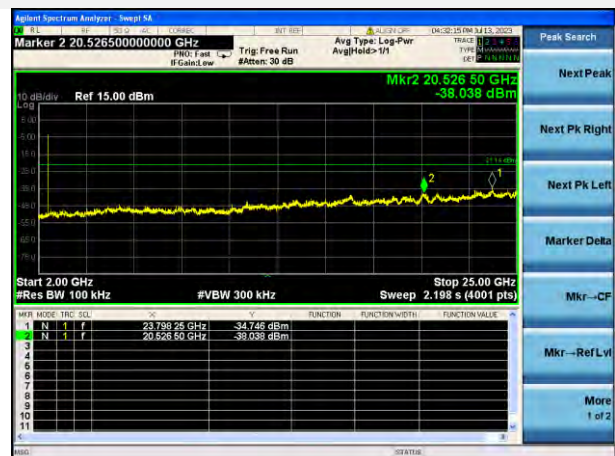

A.4 Band Edge (Authorized-band band-edge)

Note: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Test Data

GFSK (BLE 1Mbps)				
Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-48.22	-0.25	-20.25	Pass
High Channel	-48.44	0.26	-19.74	Pass

GFSK (BLE 2Mbps)				
Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-31.61	-1.55	-21.55	Pass
High Channel	-47.05	-1.14	-21.14	Pass

Test Plots

GFSK (BLE 1Mbps) LOW CHANNEL, CARRIER LEVEL



GFSK (BLE 1Mbps) LOW CHANNEL, BAND EDGE




GFSK (BLE 1Mbps) HIGH CHANNEL, CARRIER LEVEL



GFSK (BLE 1Mbps) HIGH CHANNEL, BAND EDGE




GFSK (BLE 2Mbps) LOW CHANNEL, CARRIER LEVEL

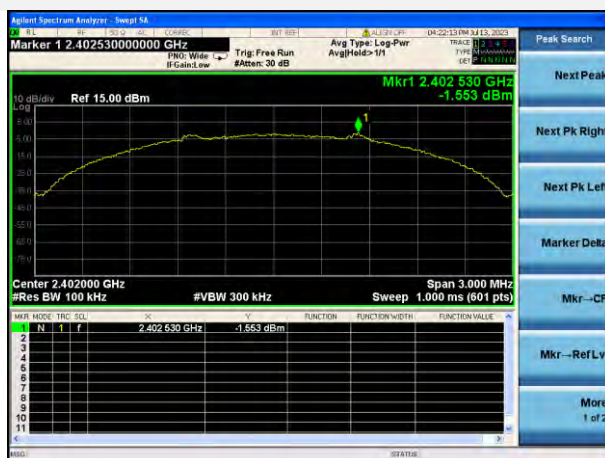

GFSK (BLE 2Mbps) LOW CHANNEL, BAND EDGE

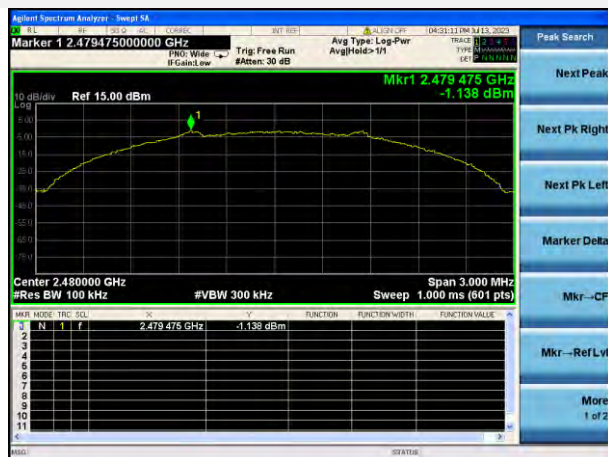

GFSK (BLE 2Mbps) HIGH CHANNEL, CARRIER
LEVELGFSK (BLE 2Mbps) HIGH CHANNEL, BAND
EDGE

A.5 Conducted Emissions


Note ¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Note ²: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots


Ceramic Chip Antenna

PHASE L

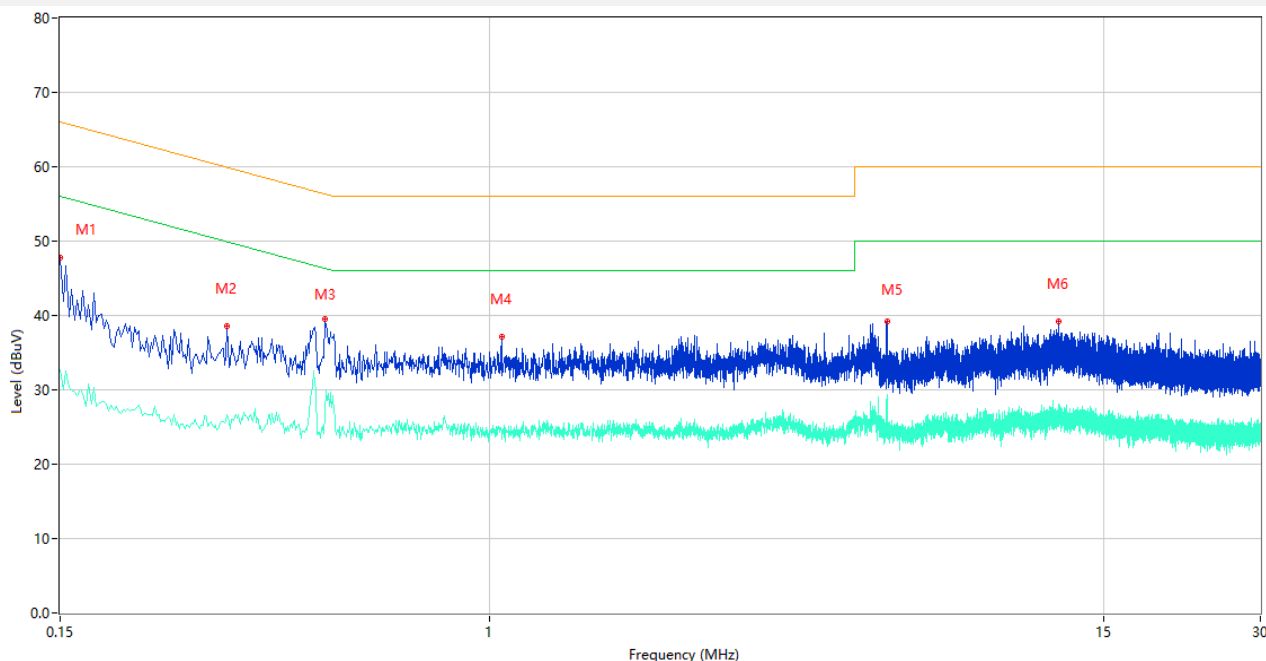

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.150	47.74	10.09	66.00	18.26	Peak	L	Pass
1**	0.150	32.63	10.09	56.00	23.37	AV	L	Pass
2	0.314	38.58	10.26	59.86	21.28	Peak	L	Pass
2**	0.314	26.73	10.26	49.86	23.13	AV	L	Pass
3	0.482	39.46	10.19	56.30	16.84	Peak	L	Pass
3**	0.482	26.83	10.19	46.30	19.47	AV	L	Pass
4	1.052	37.16	10.27	56.00	18.84	Peak	L	Pass
4**	1.052	24.45	10.27	46.00	21.55	AV	L	Pass
5	5.768	39.22	10.42	60.00	20.78	Peak	L	Pass
5**	5.768	29.36	10.42	50.00	20.64	AV	L	Pass
6	12.336	39.22	10.37	60.00	20.78	Peak	L	Pass
6**	12.336	28.03	10.37	50.00	21.97	AV	L	Pass


PHASE N

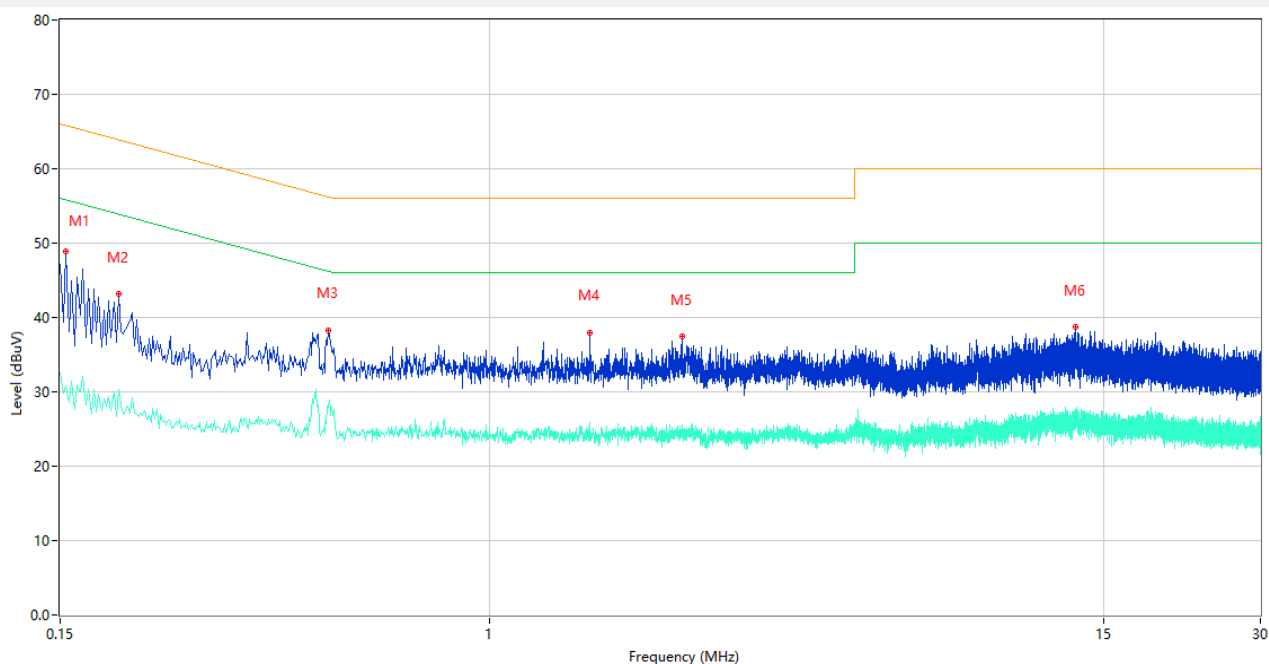

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.154	48.86	10.09	65.78	16.92	Peak	N	Pass
1**	0.154	30.72	10.09	55.78	25.06	AV	N	Pass
2	0.194	43.12	10.06	63.86	20.74	Peak	N	Pass
2**	0.194	30.37	10.06	53.86	23.49	AV	N	Pass
3	0.490	38.29	10.18	56.17	17.88	Peak	N	Pass
3**	0.490	27.91	10.18	46.17	18.26	AV	N	Pass
4	1.554	37.98	10.22	56.00	18.02	Peak	N	Pass
4**	1.554	25.92	10.22	46.00	20.08	AV	N	Pass
5	2.338	37.45	10.13	56.00	18.55	Peak	N	Pass
5**	2.338	25.53	10.13	46.00	20.47	AV	N	Pass
6	13.290	38.71	10.40	60.00	21.29	Peak	N	Pass
6**	13.290	26.10	10.40	50.00	23.90	AV	N	Pass


Metal Antenna

PHASE L

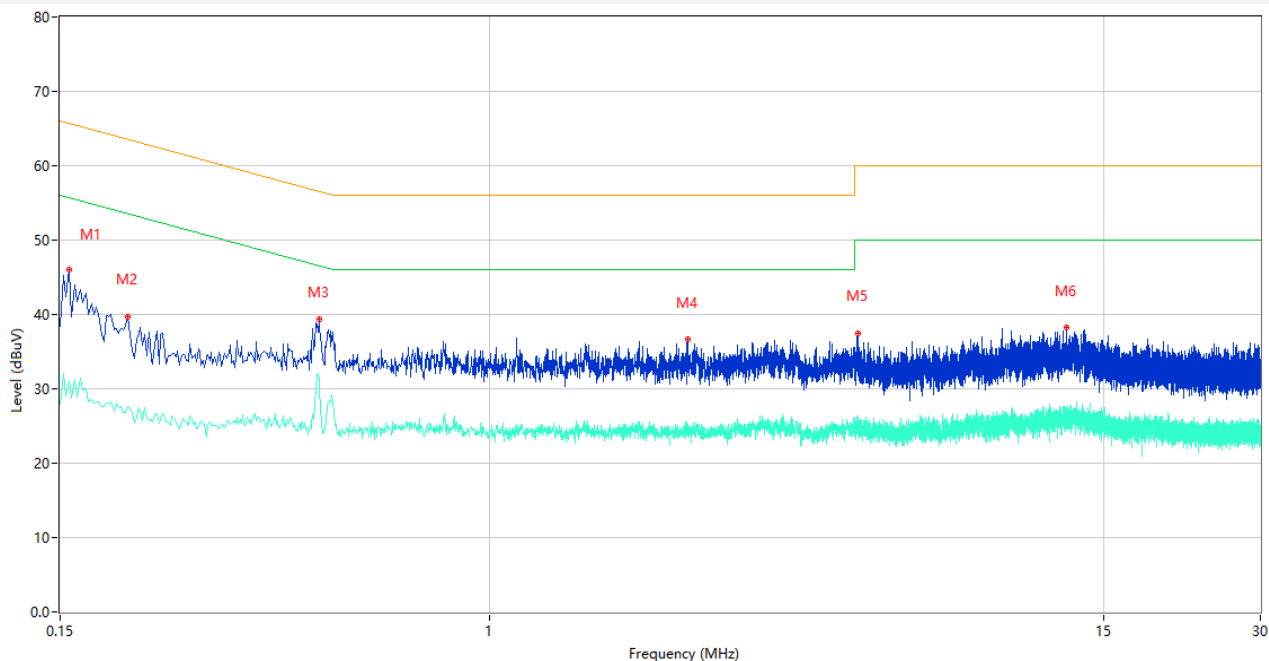

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.156	46.02	10.09	65.67	19.65	Peak	L	Pass
1**	0.156	31.13	10.09	55.67	24.54	AV	L	Pass
2	0.202	39.75	10.05	63.53	23.78	Peak	L	Pass
2**	0.202	27.69	10.05	53.53	25.84	AV	L	Pass
3	0.470	39.37	10.20	56.51	17.14	Peak	L	Pass
3**	0.470	31.62	10.20	46.51	14.89	AV	L	Pass
4	2.398	36.64	10.38	56.00	19.36	Peak	L	Pass
4**	2.398	25.26	10.38	46.00	20.74	AV	L	Pass
5	5.090	37.47	10.32	60.00	22.53	Peak	L	Pass
5**	5.090	26.05	10.32	50.00	23.95	AV	L	Pass
6	12.726	38.21	10.39	60.00	21.79	Peak	L	Pass
6**	12.726	26.89	10.39	50.00	23.11	AV	L	Pass


PHASE N

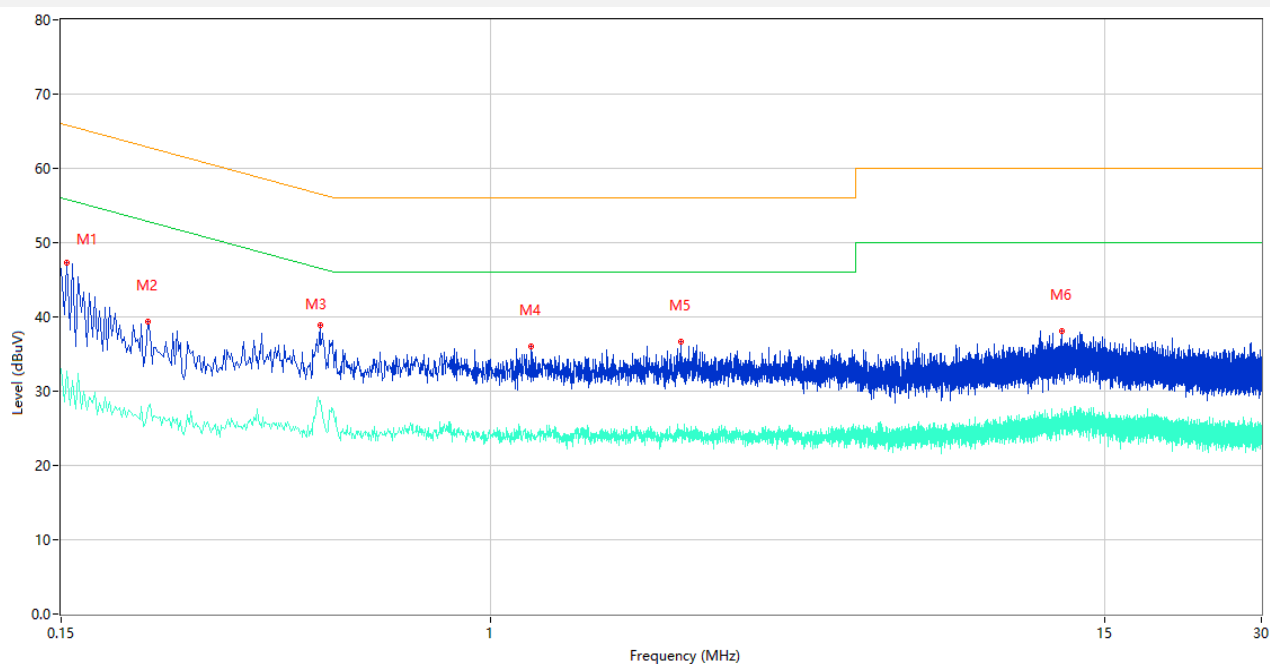

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.154	47.34	10.09	65.78	18.44	Peak	N	Pass
1**	0.154	32.72	10.09	55.78	23.06	AV	N	Pass
2	0.220	39.34	10.04	62.82	23.48	Peak	N	Pass
2**	0.220	27.58	10.04	52.82	25.24	AV	N	Pass
3	0.470	38.82	10.20	56.51	17.69	Peak	N	Pass
3**	0.470	28.78	10.20	46.51	17.73	AV	N	Pass
4	1.196	35.96	10.03	56.00	20.04	Peak	N	Pass
4**	1.196	23.88	10.03	46.00	22.12	AV	N	Pass
5	2.320	36.66	10.26	56.00	19.34	Peak	N	Pass
5**	2.320	24.10	10.26	46.00	21.90	AV	N	Pass
6	12.416	38.08	10.40	60.00	21.92	Peak	N	Pass
6**	12.416	25.80	10.40	50.00	24.20	AV	N	Pass


PCB Antenna

PHASE L

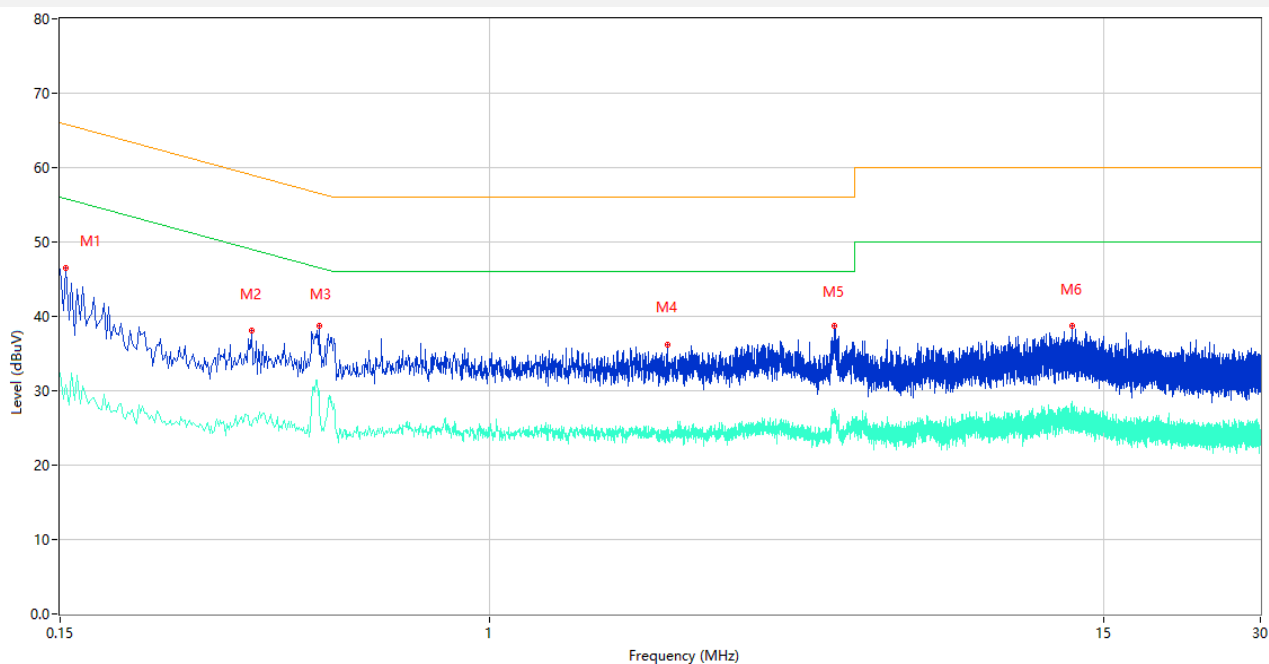

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.154	46.45	10.09	65.78	19.33	Peak	L	Pass
1**	0.154	30.76	10.09	55.78	25.02	AV	L	Pass
2	0.350	38.03	10.97	58.96	20.93	Peak	L	Pass
2**	0.350	25.32	10.97	48.96	23.64	AV	L	Pass
3	0.470	38.79	10.20	56.51	17.72	Peak	L	Pass
3**	0.470	30.08	10.20	46.51	16.43	AV	L	Pass
4	2.190	36.23	10.12	56.00	19.77	Peak	L	Pass
4**	2.190	23.32	10.12	46.00	22.68	AV	L	Pass
5	4.580	38.78	10.58	56.00	17.22	Peak	L	Pass
5**	4.580	26.16	10.58	46.00	19.84	AV	L	Pass
6	13.064	38.67	10.16	60.00	21.33	Peak	L	Pass
6**	13.064	25.32	10.16	50.00	24.68	AV	L	Pass


PHASE N

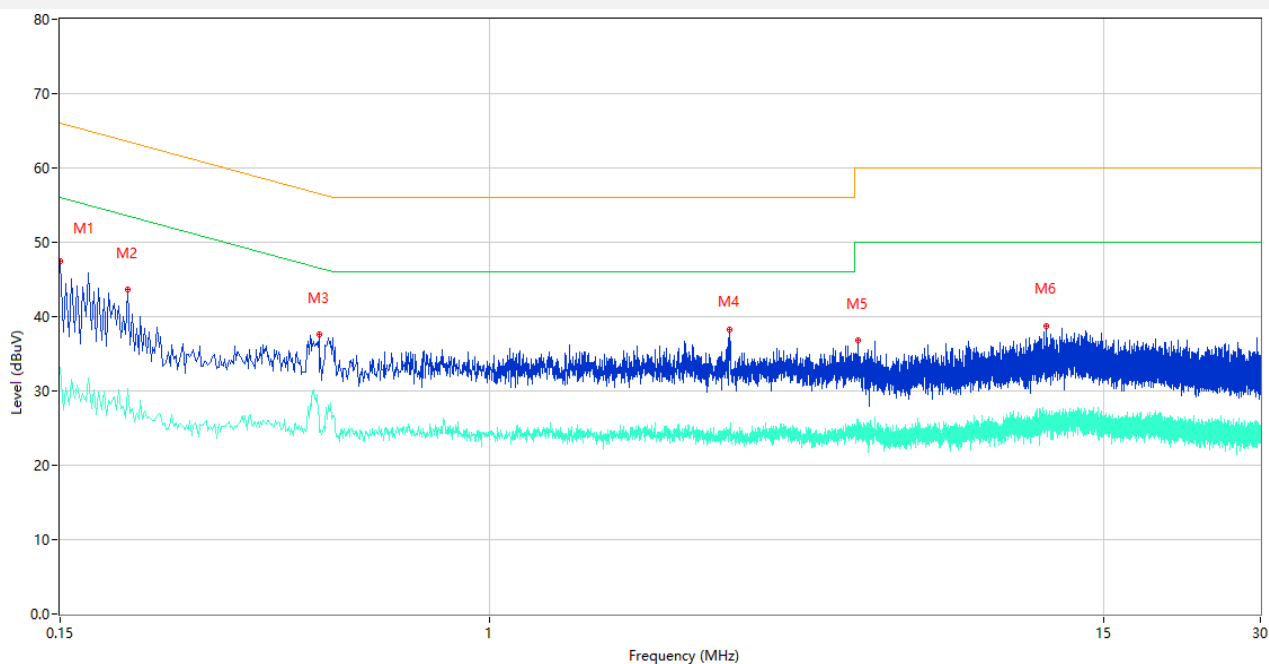

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.150	47.44	10.09	66.00	18.56	Peak	N	Pass
1**	0.150	33.10	10.09	56.00	22.90	AV	N	Pass
2	0.202	43.60	10.05	63.53	19.93	Peak	N	Pass
2**	0.202	30.34	10.05	53.53	23.19	AV	N	Pass
3	0.470	37.59	10.20	56.51	18.92	Peak	N	Pass
3**	0.470	26.65	10.20	46.51	19.86	AV	N	Pass
4	2.880	38.21	9.98	56.00	17.79	Peak	N	Pass
4**	2.880	24.55	9.98	46.00	21.45	AV	N	Pass
5	5.074	36.80	10.34	60.00	23.20	Peak	N	Pass
5**	5.074	26.14	10.34	50.00	23.86	AV	N	Pass
6	11.640	38.75	10.19	60.00	21.25	Peak	N	Pass
6**	11.640	26.82	10.19	50.00	23.18	AV	N	Pass


Dipole Antenna 1

PHASE L

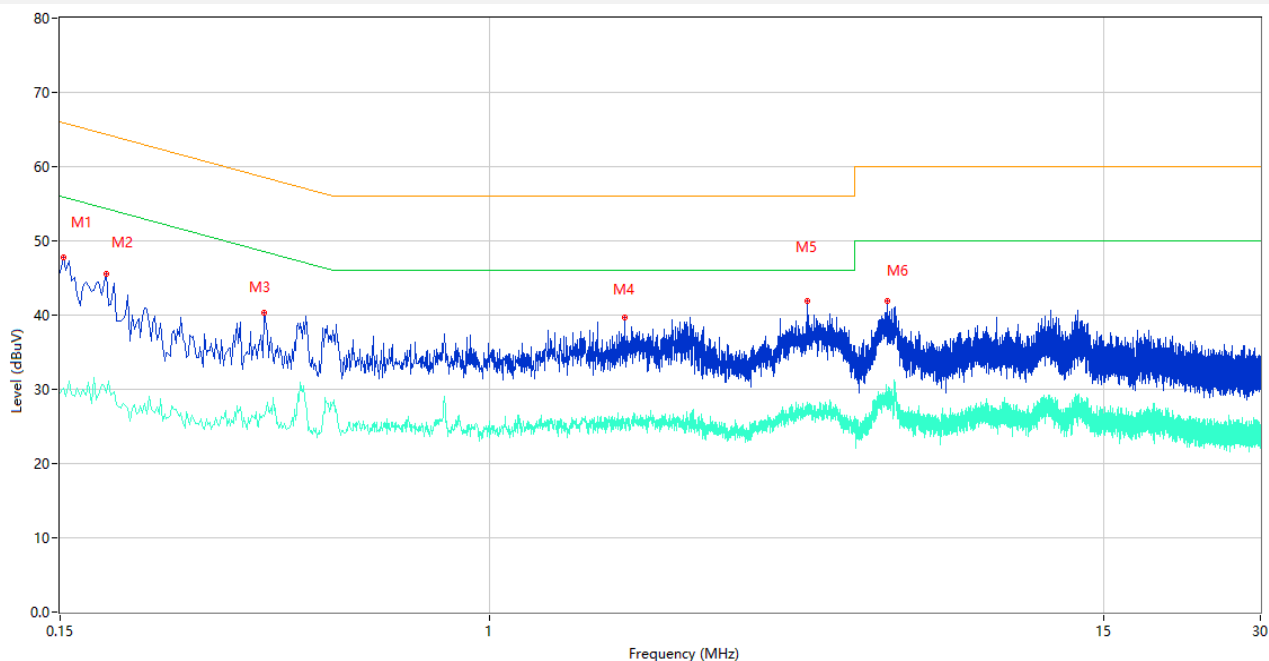

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.152	47.73	10.09	65.89	18.16	Peak	L	Pass
1**	0.152	30.16	10.09	55.89	25.73	AV	L	Pass
2	0.184	45.59	10.07	64.30	18.71	Peak	L	Pass
2**	0.184	29.48	10.07	54.30	24.82	AV	L	Pass
3	0.370	40.37	10.89	58.50	18.13	Peak	L	Pass
3**	0.370	26.42	10.89	48.50	22.08	AV	L	Pass
4	1.812	39.73	10.25	56.00	16.27	Peak	L	Pass
4**	1.812	25.43	10.25	46.00	20.57	AV	L	Pass
5	4.066	41.90	10.44	56.00	14.10	Peak	L	Pass
5**	4.066	28.18	10.44	46.00	17.82	AV	L	Pass
6	5.774	41.88	10.37	60.00	18.12	Peak	L	Pass
6**	5.774	28.82	10.37	50.00	21.18	AV	L	Pass


PHASE N

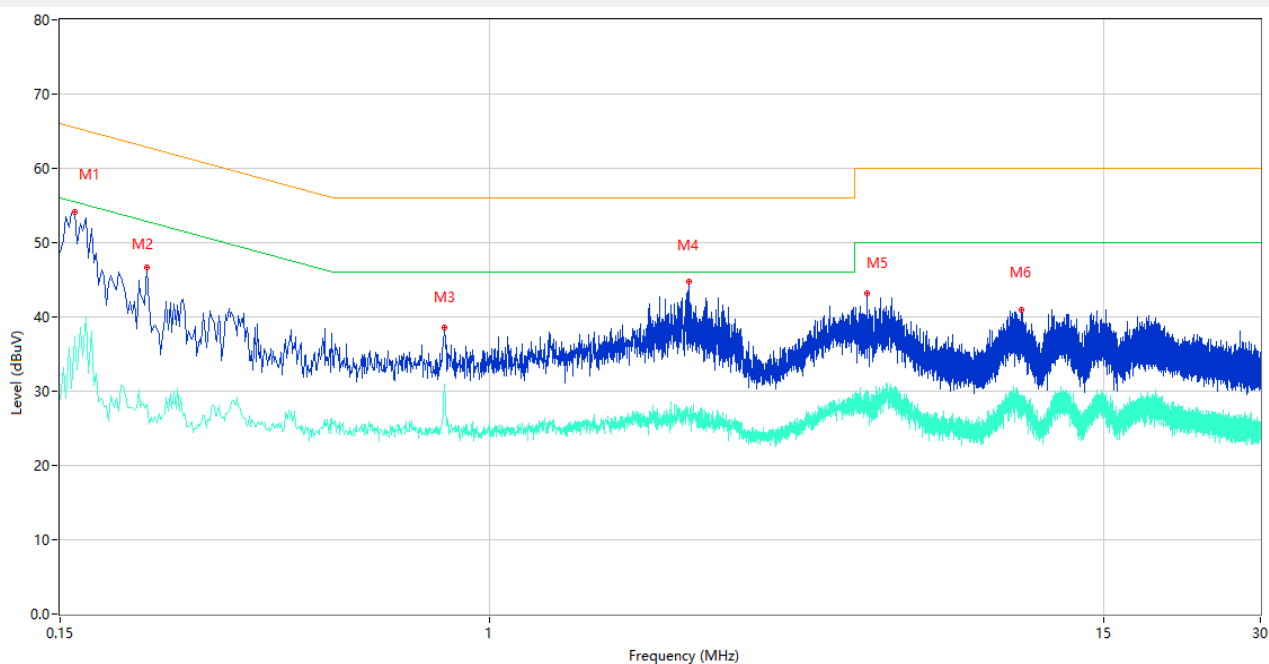

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.160	54.16	10.08	65.46	11.30	Peak	N	Pass
1**	0.160	37.31	10.08	55.46	18.15	AV	N	Pass
2	0.220	46.73	10.04	62.82	16.09	Peak	N	Pass
2**	0.220	28.24	10.04	52.82	24.58	AV	N	Pass
3	0.820	38.57	10.70	56.00	17.43	Peak	N	Pass
3**	0.820	30.95	10.70	46.00	15.05	AV	N	Pass
4	2.404	44.71	10.37	56.00	11.29	Peak	N	Pass
4**	2.404	26.89	10.37	46.00	19.11	AV	N	Pass
5	5.294	43.13	10.28	60.00	16.87	Peak	N	Pass
5**	5.294	29.21	10.28	50.00	20.79	AV	N	Pass
6	10.438	41.02	10.47	60.00	18.98	Peak	N	Pass
6**	10.438	28.11	10.47	50.00	21.89	AV	N	Pass


Dipole Antenna 2

PHASE L

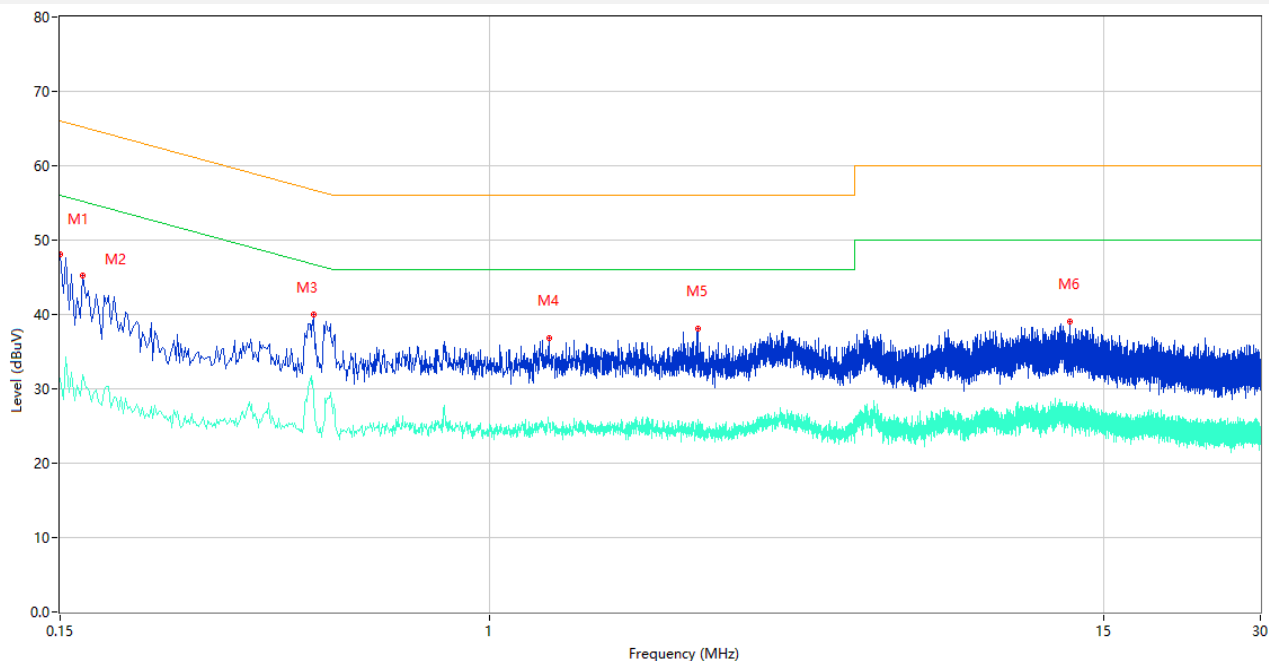

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.150	48.09	10.09	66.00	17.91	Peak	L	Pass
1**	0.150	31.47	10.09	56.00	24.53	AV	L	Pass
2	0.166	45.18	10.08	65.16	19.98	Peak	L	Pass
2**	0.166	31.93	10.08	55.16	23.23	AV	L	Pass
3	0.460	40.06	10.22	56.69	16.63	Peak	L	Pass
3**	0.460	29.19	10.22	46.69	17.50	AV	L	Pass
4	1.298	36.84	10.62	56.00	19.16	Peak	L	Pass
4**	1.298	24.91	10.62	46.00	21.09	AV	L	Pass
5	2.504	38.11	10.24	56.00	17.89	Peak	L	Pass
5**	2.504	25.89	10.24	46.00	20.11	AV	L	Pass
6	12.926	39.09	10.40	60.00	20.91	Peak	L	Pass
6**	12.926	28.01	10.40	50.00	21.99	AV	L	Pass


PHASE N

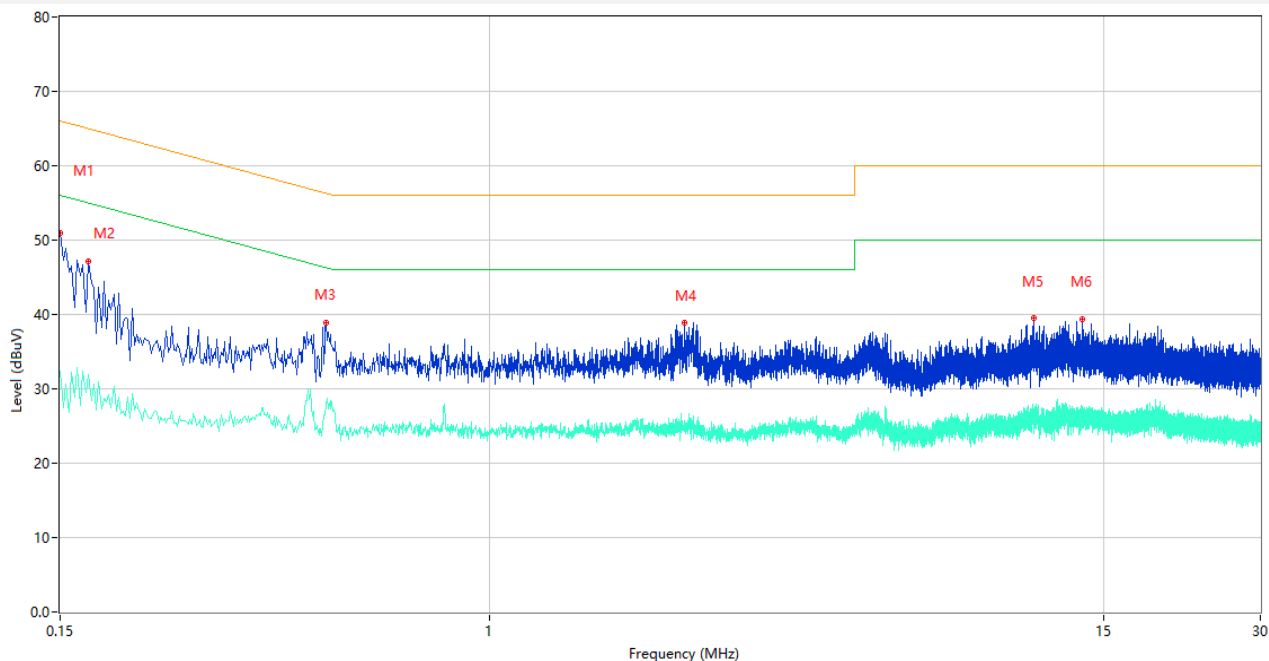

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.150	50.94	10.09	66.00	15.06	Peak	N	Pass
1**	0.150	32.44	10.09	56.00	23.56	AV	N	Pass
2	0.170	47.12	10.08	64.96	17.84	Peak	N	Pass
2**	0.170	31.88	10.08	54.96	23.08	AV	N	Pass
3	0.486	38.96	10.19	56.24	17.28	Peak	N	Pass
3**	0.486	27.80	10.19	46.24	18.44	AV	N	Pass
4	2.360	38.91	10.15	56.00	17.09	Peak	N	Pass
4**	2.360	24.38	10.15	46.00	21.62	AV	N	Pass
5	11.050	39.52	10.37	60.00	20.48	Peak	N	Pass
5**	11.050	26.85	10.37	50.00	23.15	AV	N	Pass
6	13.654	39.43	10.40	60.00	20.57	Peak	N	Pass
6**	13.654	27.24	10.40	50.00	22.76	AV	N	Pass


Dipole Antenna 3

PHASE L

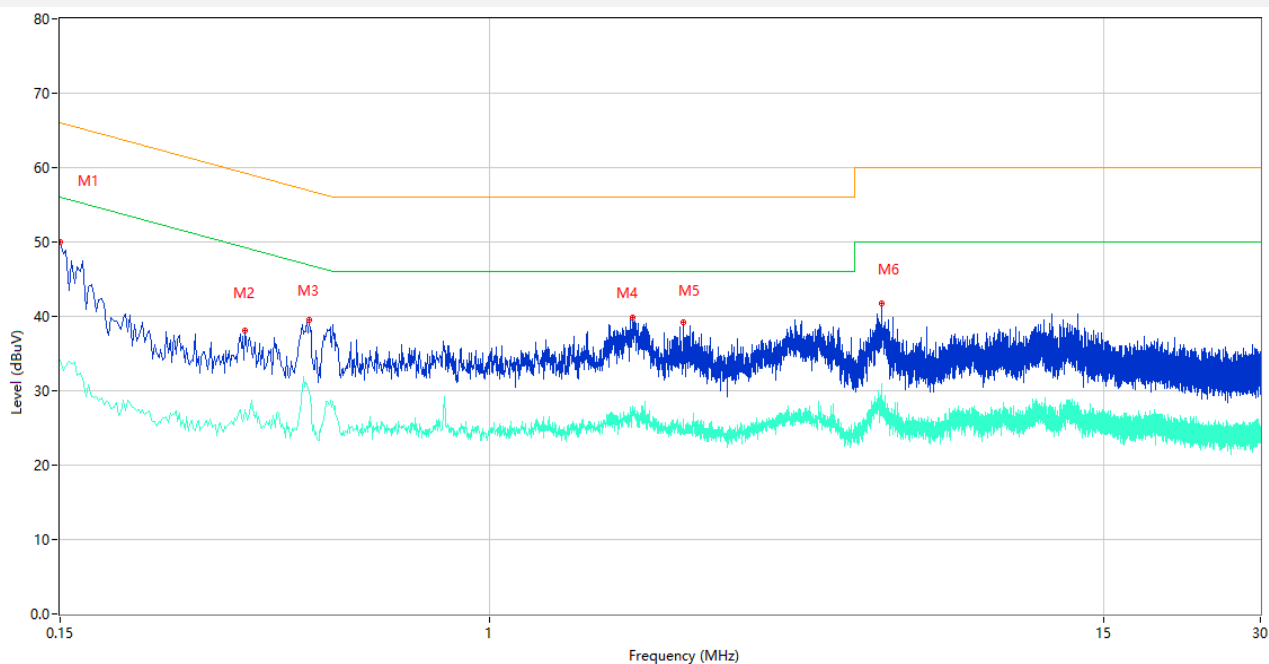

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.150	49.96	10.09	66.00	16.04	Peak	L	Pass
1**	0.150	34.18	10.09	56.00	21.82	AV	L	Pass
2	0.340	38.14	10.77	59.20	21.06	Peak	L	Pass
2**	0.340	27.52	10.77	49.20	21.68	AV	L	Pass
3	0.450	39.55	10.23	56.88	17.33	Peak	L	Pass
3**	0.450	29.93	10.23	46.88	16.95	AV	L	Pass
4	1.874	39.85	10.53	56.00	16.15	Peak	L	Pass
4**	1.874	27.48	10.53	46.00	18.52	AV	L	Pass
5	2.354	39.22	10.12	56.00	16.78	Peak	L	Pass
5**	2.354	25.07	10.12	46.00	20.93	AV	L	Pass
6	5.648	41.80	10.41	60.00	18.20	Peak	L	Pass
6**	5.648	30.99	10.41	50.00	19.01	AV	L	Pass

PHASE N

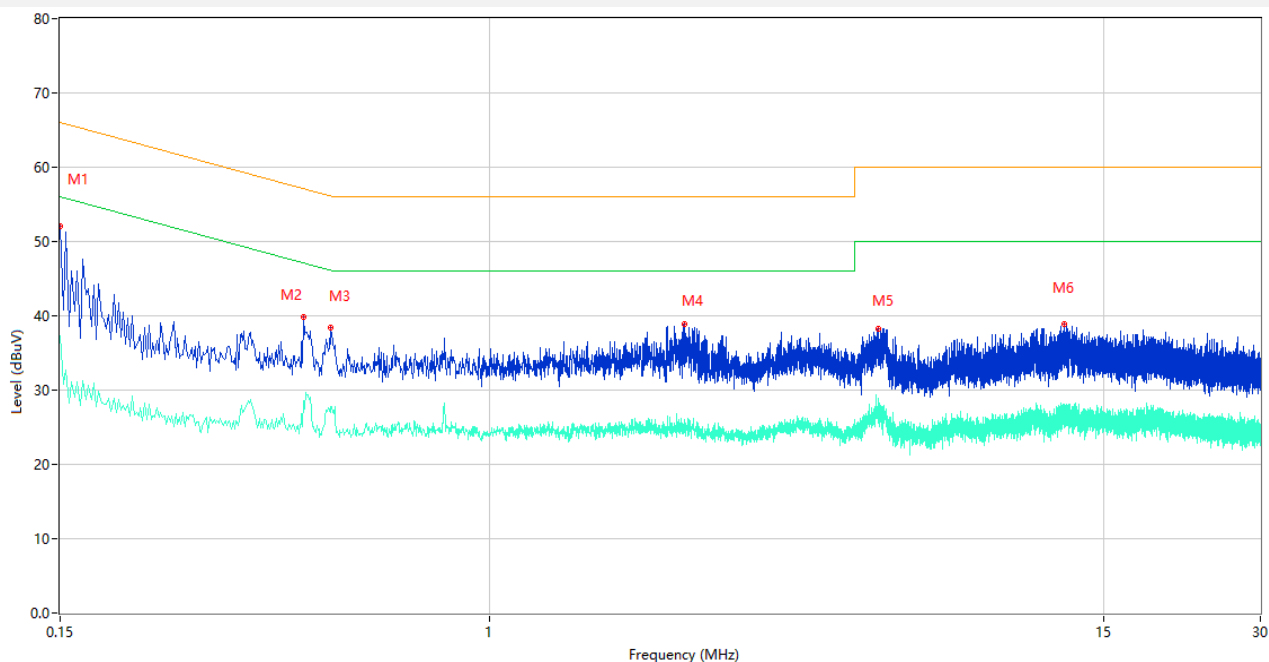

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.150	52.14	10.09	66.00	13.86	Peak	N	Pass
1**	0.150	37.25	10.09	56.00	18.75	AV	N	Pass
2	0.440	39.77	10.33	57.06	17.29	Peak	N	Pass
2**	0.440	28.58	10.33	47.06	18.48	AV	N	Pass
3	0.494	38.46	10.18	56.10	17.64	Peak	N	Pass
3**	0.494	27.81	10.18	46.10	18.29	AV	N	Pass
4	2.360	38.96	10.15	56.00	17.04	Peak	N	Pass
4**	2.360	26.06	10.15	46.00	19.94	AV	N	Pass
5	5.550	38.30	10.52	60.00	21.70	Peak	N	Pass
5**	5.550	27.74	10.52	50.00	22.26	AV	N	Pass
6	12.640	38.81	10.25	60.00	21.19	Peak	N	Pass
6**	12.640	26.54	10.25	50.00	23.46	AV	N	Pass

A.6 Radiated Spurious Emission

Note ¹: The symbol of “--” in the table which means not application.

Note ²: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ³: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


Note ⁴: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and BLE 2M-High channel mode is the worst.

Note ⁵: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

Test Data and Plots


Ceramic Chip Antenna

30 MHz to 1 GHz, ANT H

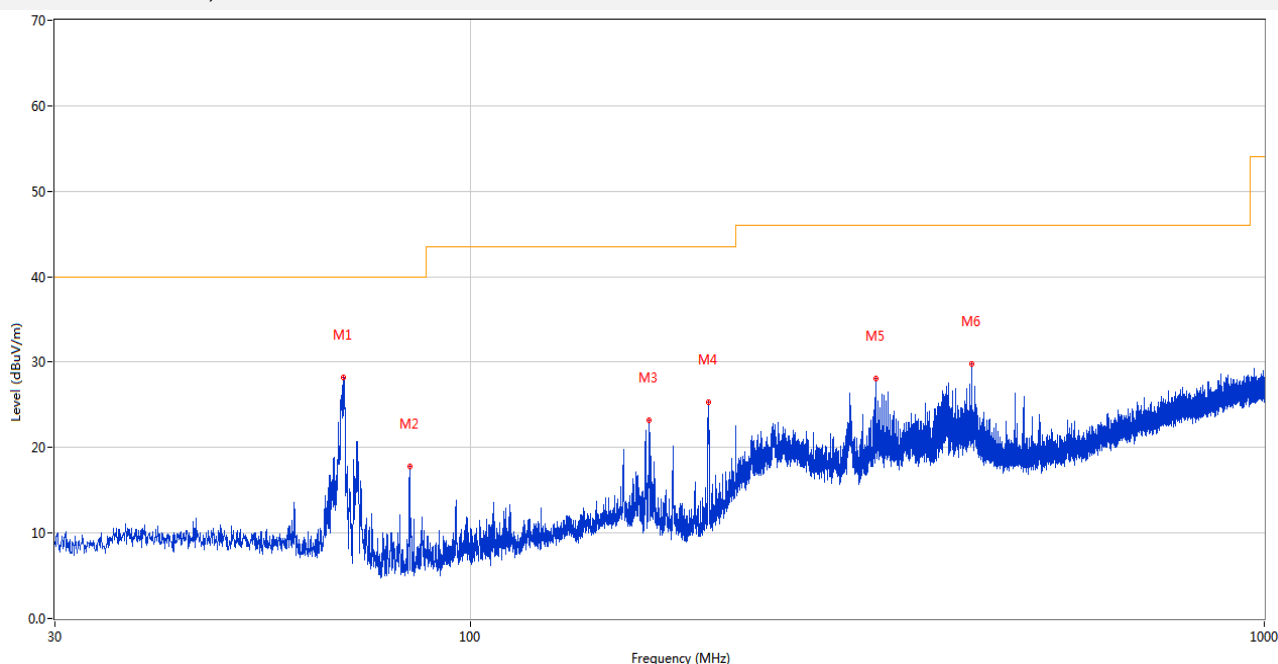

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	69.334	28.25	-28.94	40.0	11.75	Peak	62.00	200	Horizontal	Pass
2	83.883	17.85	-30.42	40.0	22.15	Peak	150.00	200	Horizontal	Pass
3	168.176	23.26	-25.37	43.5	20.24	Peak	356.00	200	Horizontal	Pass
4	199.459	25.38	-28.64	43.5	18.12	Peak	168.00	100	Horizontal	Pass
5	324.056	28.11	-23.29	46.0	17.89	Peak	118.00	100	Horizontal	Pass
6	428.282	29.76	-20.32	46.0	16.24	Peak	75.00	200	Horizontal	Pass


30 MHz to 1 GHz, ANT V

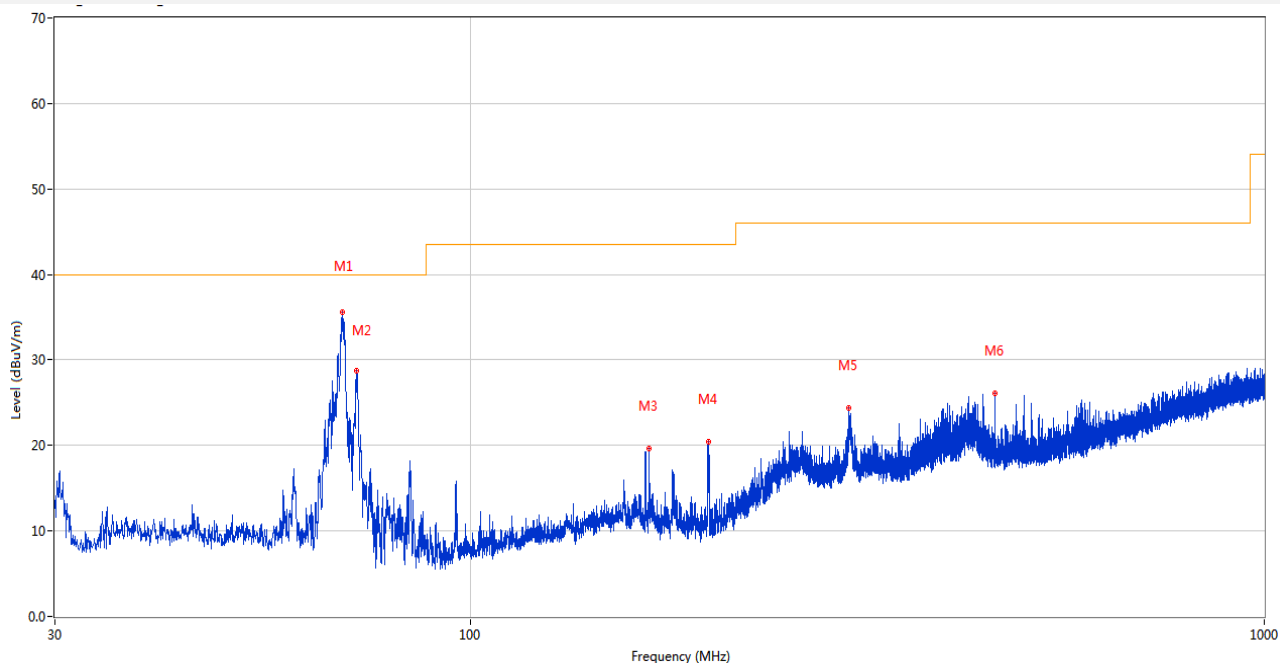

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	68.994	35.62	-28.90	40.0	4.38	Peak	85.00	100	Vertical	Pass
2	71.952	28.78	-29.43	40.0	11.22	Peak	57.00	200	Vertical	Pass
3	167.934	19.62	-25.40	43.5	23.88	Peak	70.00	100	Vertical	Pass
4	199.314	20.40	-28.65	43.5	23.10	Peak	0.00	100	Vertical	Pass
5	299.612	24.39	-24.06	46.0	21.61	Peak	360.00	200	Vertical	Pass
6	458.110	26.14	-19.67	46.0	19.86	Peak	26.00	100	Vertical	Pass


Metal Antenna

30 MHz to 1 GHz, ANT H

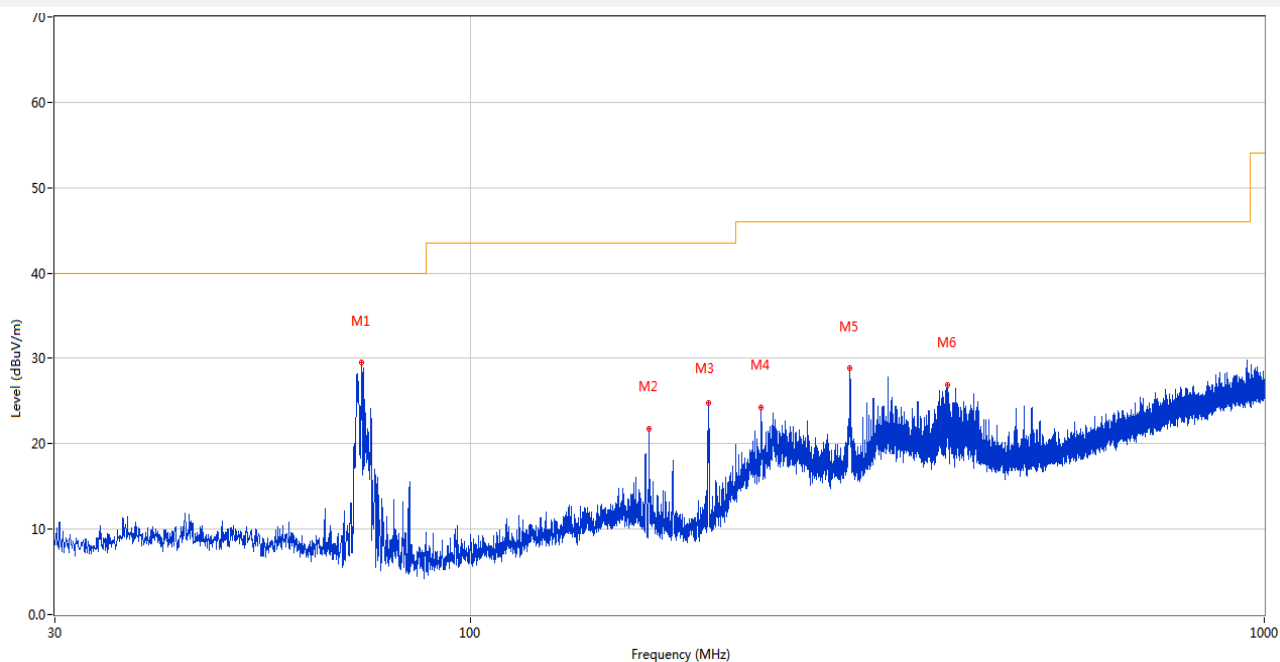

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	73.020	29.46	-29.56	40.0	10.54	Peak	87.00	100	Horizontal	Pass
2	168.080	21.80	-25.38	43.5	21.70	Peak	360.00	200	Horizontal	Pass
3	199.362	24.75	-28.65	43.5	18.75	Peak	360.00	200	Horizontal	Pass
4	232.584	24.27	-26.84	46.0	21.73	Peak	90.00	100	Horizontal	Pass
5	300.970	28.81	-24.01	46.0	17.19	Peak	268.00	100	Horizontal	Pass
6	398.940	26.84	-21.46	46.0	19.16	Peak	103.00	100	Horizontal	Pass


30 MHz to 1 GHz, ANT V

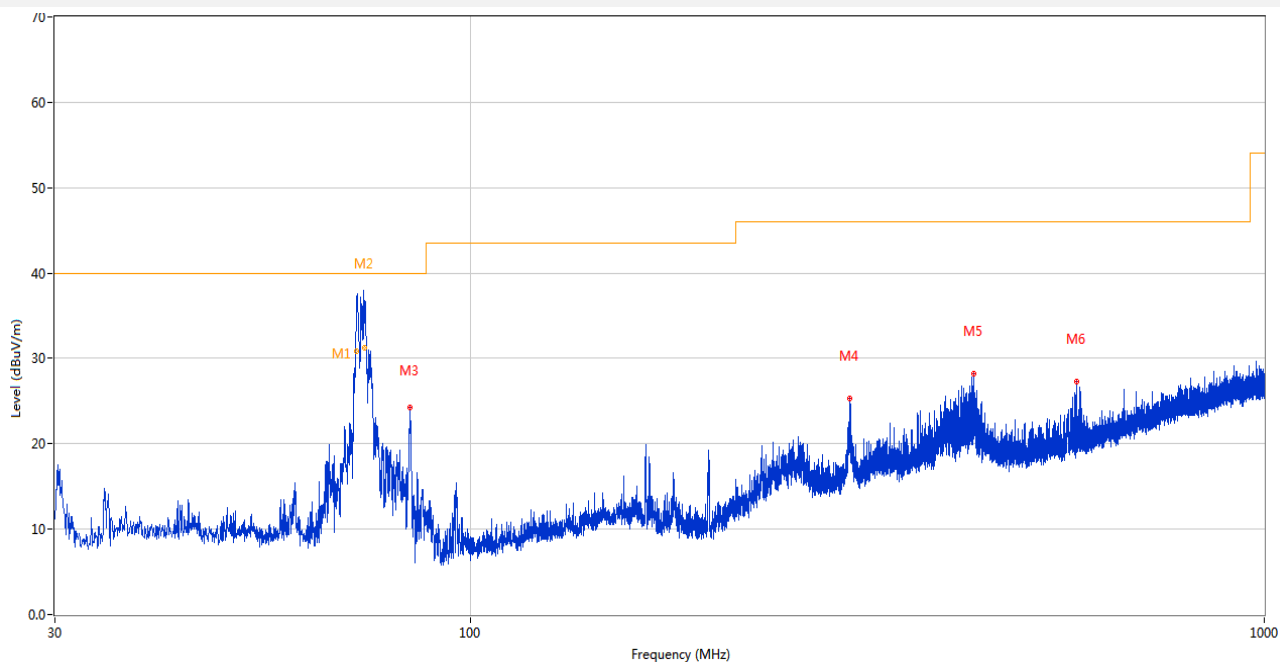

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	71.944	37.91	-29.47	40.0	2.09	Peak	25.00	118	Vertical	N/A
1*	71.944	30.86	-29.47	40.0	9.14	QP	25.00	118	Vertical	Pass
2	73.594	39.53	-29.59	40.0	0.47	Peak	228.00	165	Vertical	N/A
2*	73.594	31.30	-29.59	40.0	8.70	QP	228.00	165	Vertical	Pass
3	84.029	24.19	-30.41	40.0	15.81	Peak	162.00	100	Vertical	Pass
4	300.776	25.32	-24.02	46.0	20.68	Peak	288.00	200	Vertical	Pass
5	431.046	28.18	-20.38	46.0	17.82	Peak	150.00	100	Vertical	Pass
6	580.766	27.32	-17.01	46.0	18.68	Peak	136.00	100	Vertical	Pass


PCB Antenna

30 MHz to 1 GHz, ANT H

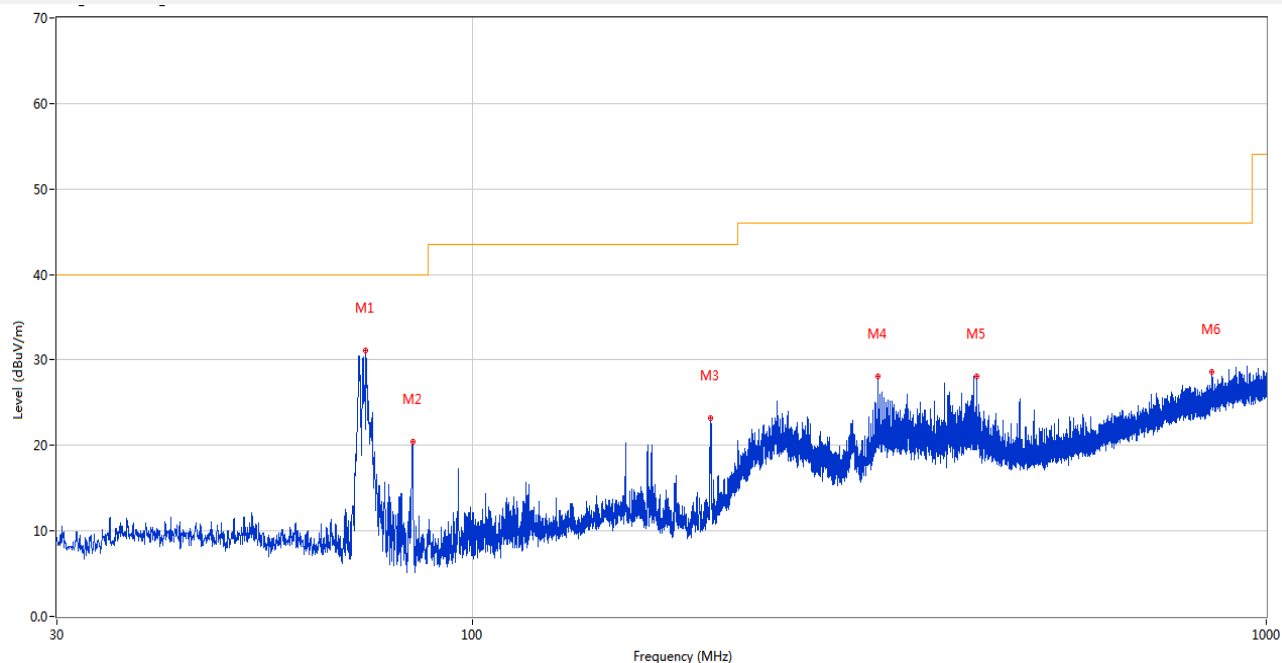

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	73.505	31.17	-29.59	40.0	8.83	Peak	69.00	100	Horizontal	Pass
2	84.126	20.41	-30.40	40.0	19.59	Peak	95.00	200	Horizontal	Pass
3	199.750	23.24	-28.63	43.5	20.26	Peak	149.00	200	Horizontal	Pass
4	324.007	28.06	-23.30	46.0	17.94	Peak	137.00	100	Horizontal	Pass
5	432.259	28.04	-20.32	46.0	17.96	Peak	93.00	200	Horizontal	Pass
6	854.112	28.57	-11.79	46.0	17.43	Peak	85.00	100	Horizontal	Pass


30 MHz to 1 GHz, ANT V

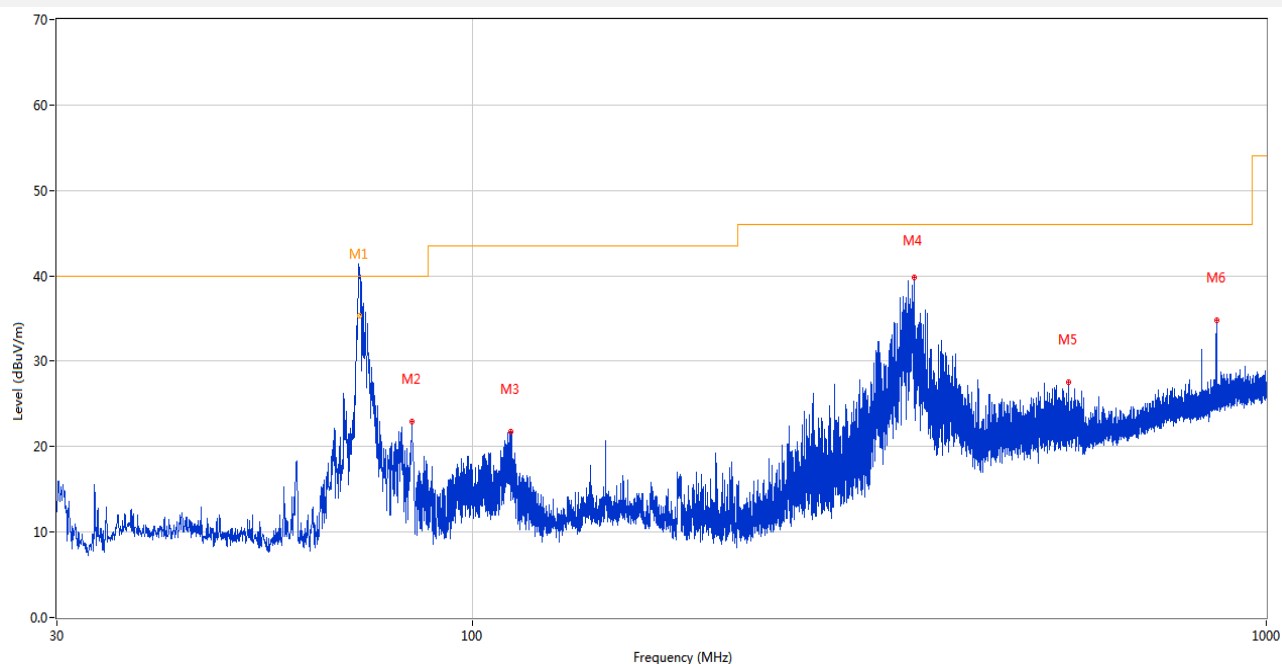

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	72.042	43.75	-29.45	40.0	-3.75	Peak	181.00	134	Vertical	N/A
1*	72.042	35.36	-29.45	40.0	4.64	QP	181.00	134	Vertical	Pass
2	83.980	22.94	-30.41	40.0	17.06	Peak	272.00	100	Vertical	Pass
3	111.723	21.72	-28.01	43.5	21.78	Peak	324.00	100	Vertical	Pass
4	359.897	39.85	-22.45	46.0	6.15	Peak	163.00	100	Vertical	Pass
5	563.742	27.57	-17.33	46.0	18.43	Peak	331.00	100	Vertical	Pass
6	865.898	34.82	-12.23	46.0	11.18	Peak	112.00	100	Vertical	Pass


Dipole Antenna 1

30 MHz to 1 GHz, ANT H

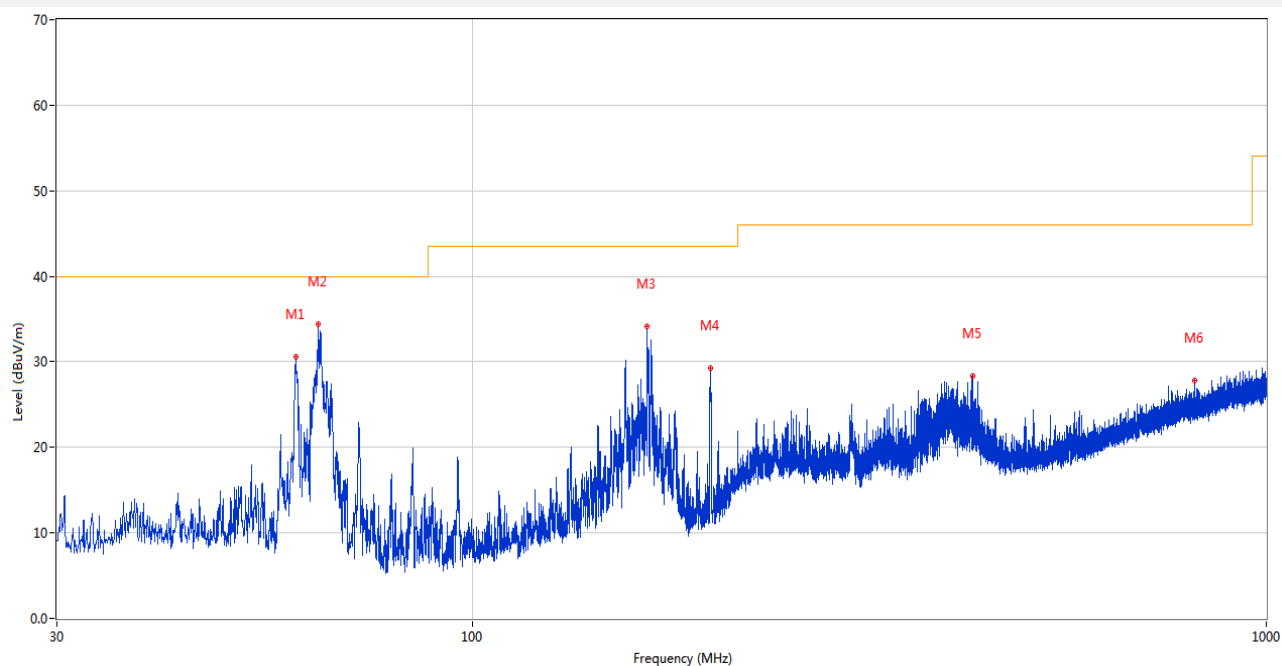

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	59.925	30.53	-27.58	40.0	9.47	Peak	355.00	200	Horizontal	Pass
2	63.950	34.43	-27.83	40.0	5.57	Peak	359.00	200	Horizontal	Pass
3	166.091	34.12	-25.37	43.5	9.38	Peak	0.00	200	Horizontal	Pass
4	199.314	29.30	-28.65	43.5	14.20	Peak	360.00	200	Horizontal	Pass
5	427.021	28.28	-20.34	46.0	17.72	Peak	101.00	100	Horizontal	Pass
6	812.354	27.80	-12.66	46.0	18.20	Peak	278.00	200	Horizontal	Pass


30 MHz to 1 GHz, ANT V

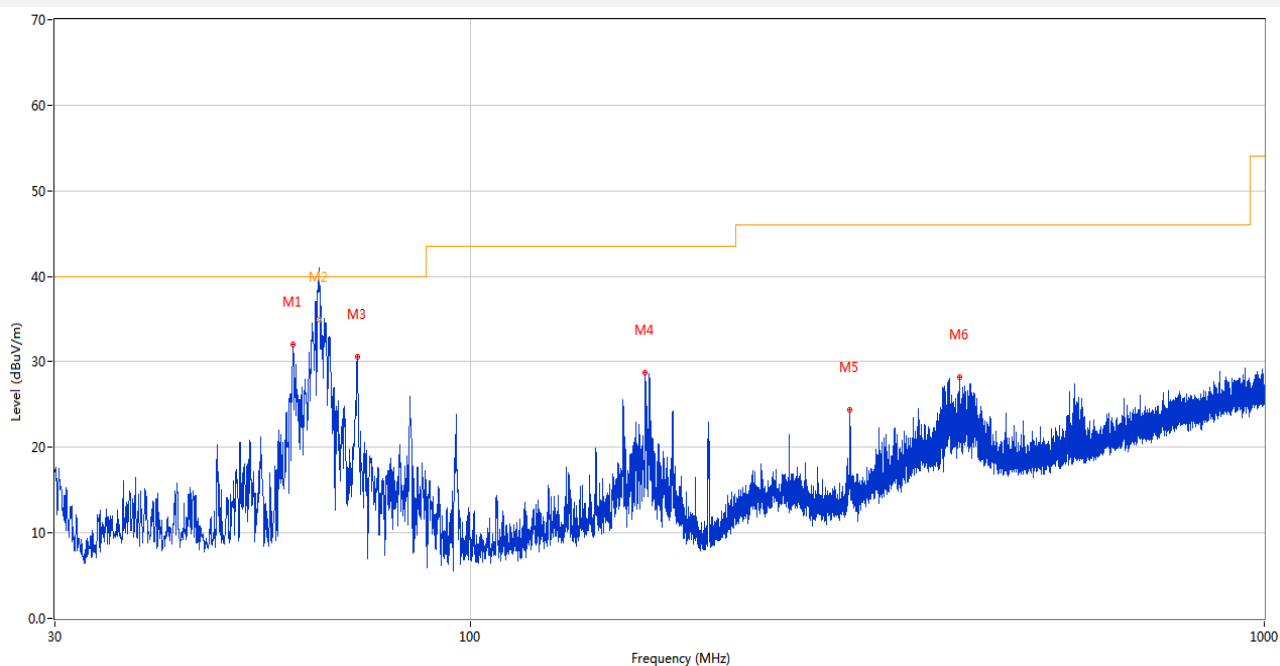

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	59.876	31.97	-27.58	40.0	8.03	Peak	38.00	100	Vertical	Pass
2	64.586	42.06	-27.99	40.0	-2.06	Peak	109.00	101	Vertical	N/A
2*	64.586	34.94	-27.99	40.0	5.06	QP	109.00	101	Vertical	Pass
3	72.049	30.52	-29.46	40.0	9.48	Peak	141.00	100	Vertical	Pass
4	166.091	28.77	-25.37	43.5	14.73	Peak	239.00	100	Vertical	Pass
5	300.824	24.38	-24.01	46.0	21.62	Peak	143.00	100	Vertical	Pass
6	412.907	28.19	-20.82	46.0	17.81	Peak	138.00	100	Vertical	Pass


Dipole Antenna 2

30 MHz to 1 GHz, ANT H

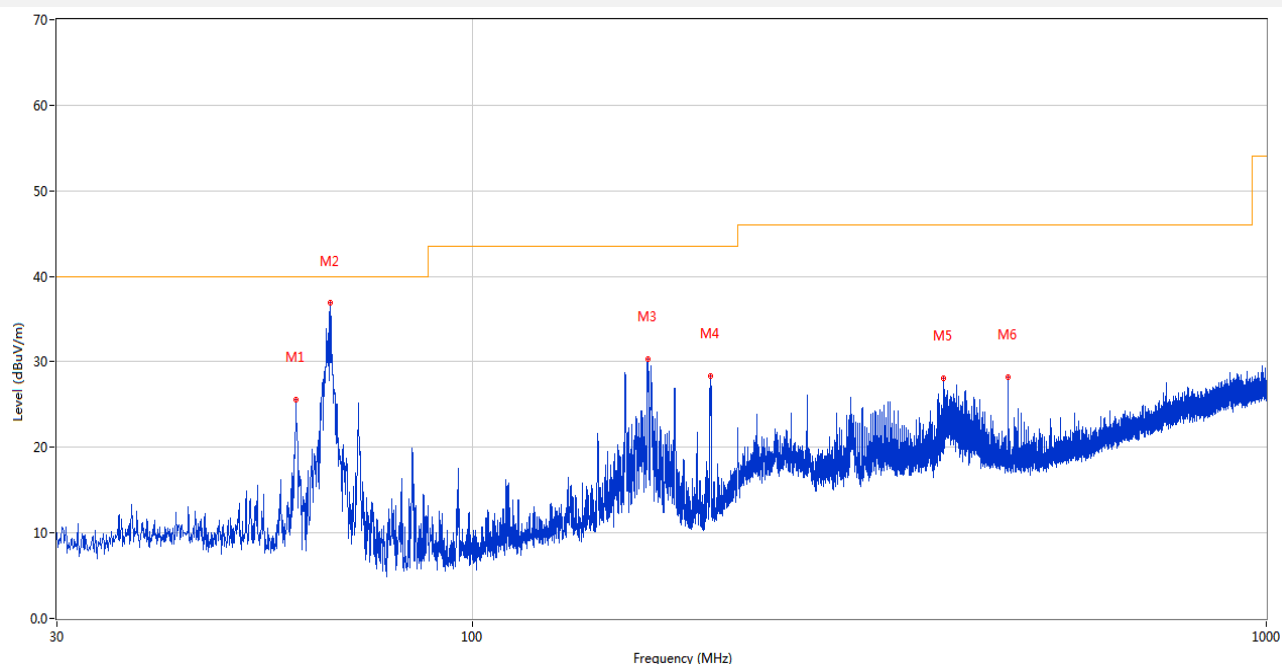

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	59.973	25.61	-27.57	40.0	14.39	Peak	19.00	200	Horizontal	Pass
2	66.326	36.85	-28.48	40.0	3.15	Peak	1.00	200	Horizontal	Pass
3	166.528	30.27	-25.38	43.5	13.23	Peak	360.00	200	Horizontal	Pass
4	199.750	28.35	-28.63	43.5	15.15	Peak	144.00	100	Horizontal	Pass
5	391.858	28.12	-21.55	46.0	17.88	Peak	289.00	100	Horizontal	Pass
6	472.805	28.23	-19.43	46.0	17.77	Peak	80.00	200	Horizontal	Pass


30 MHz to 1 GHz, ANT V

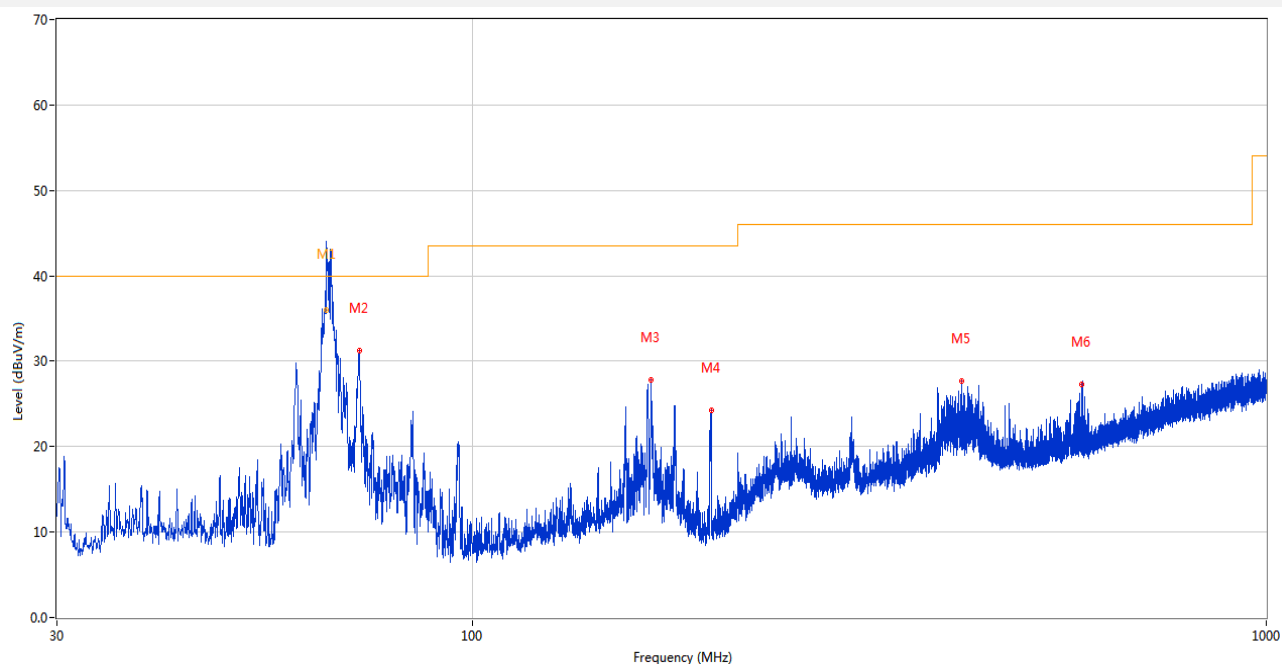

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	65.594	46.85	-28.30	40.0	-6.85	Peak	135.00	108	Vertical	N/A
1*	65.594	36.04	-28.30	40.0	3.96	QP	135.00	108	Vertical	Pass
2	72.098	31.30	-29.47	40.0	8.70	Peak	164.00	100	Vertical	Pass
3	168.031	27.55	-25.39	43.5	15.95	Peak	181.00	100	Vertical	Pass
4	199.944	24.31	-28.62	43.5	19.19	Peak	127.00	100	Vertical	Pass
5	413.150	27.64	-20.80	46.0	18.36	Peak	166.00	100	Vertical	Pass
6	586.150	27.33	-16.77	46.0	18.67	Peak	122.00	100	Vertical	Pass


Dipole Antenna 3

30 MHz to 1 GHz, ANT H

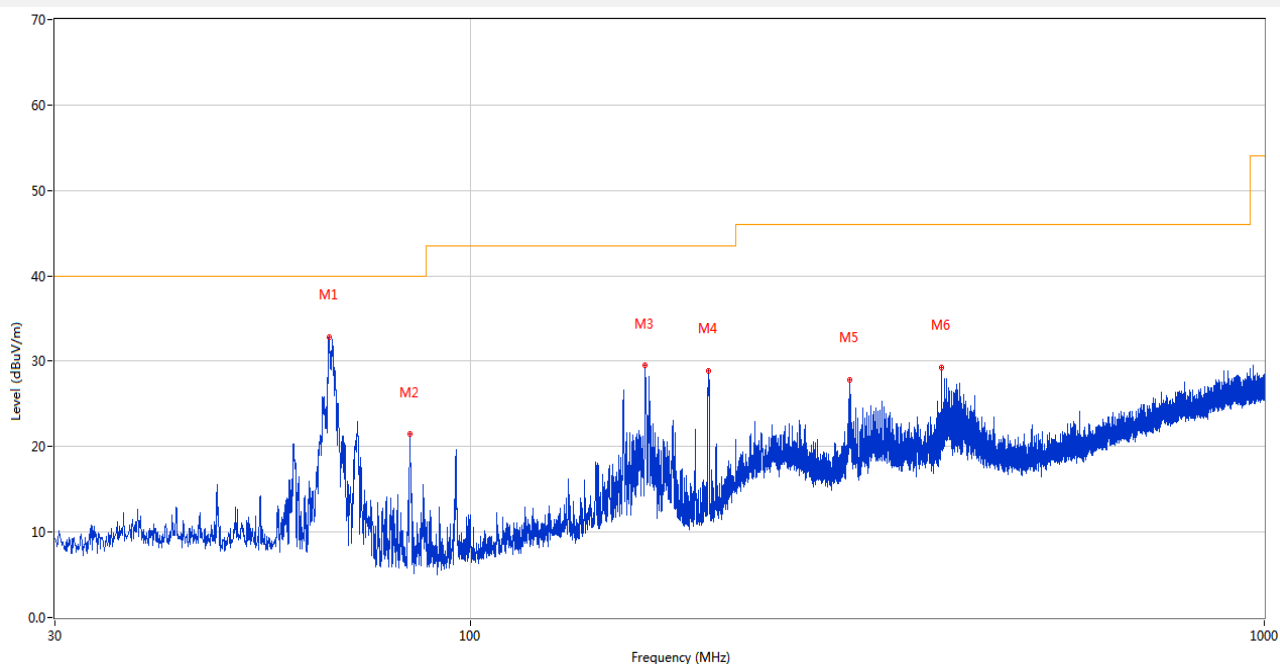

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	66.472	32.89	-28.51	40.0	7.11	Peak	360.00	200	Horizontal	Pass
2	83.980	21.42	-30.41	40.0	18.58	Peak	100.00	200	Horizontal	Pass
3	166.188	29.47	-25.37	43.5	14.03	Peak	346.00	200	Horizontal	Pass
4	199.362	28.90	-28.65	43.5	14.60	Peak	8.00	200	Horizontal	Pass
5	300.921	27.82	-24.01	46.0	18.18	Peak	269.00	100	Horizontal	Pass
6	392.295	29.28	-21.70	46.0	16.72	Peak	272.00	100	Horizontal	Pass

30 MHz to 1 GHz, ANT V

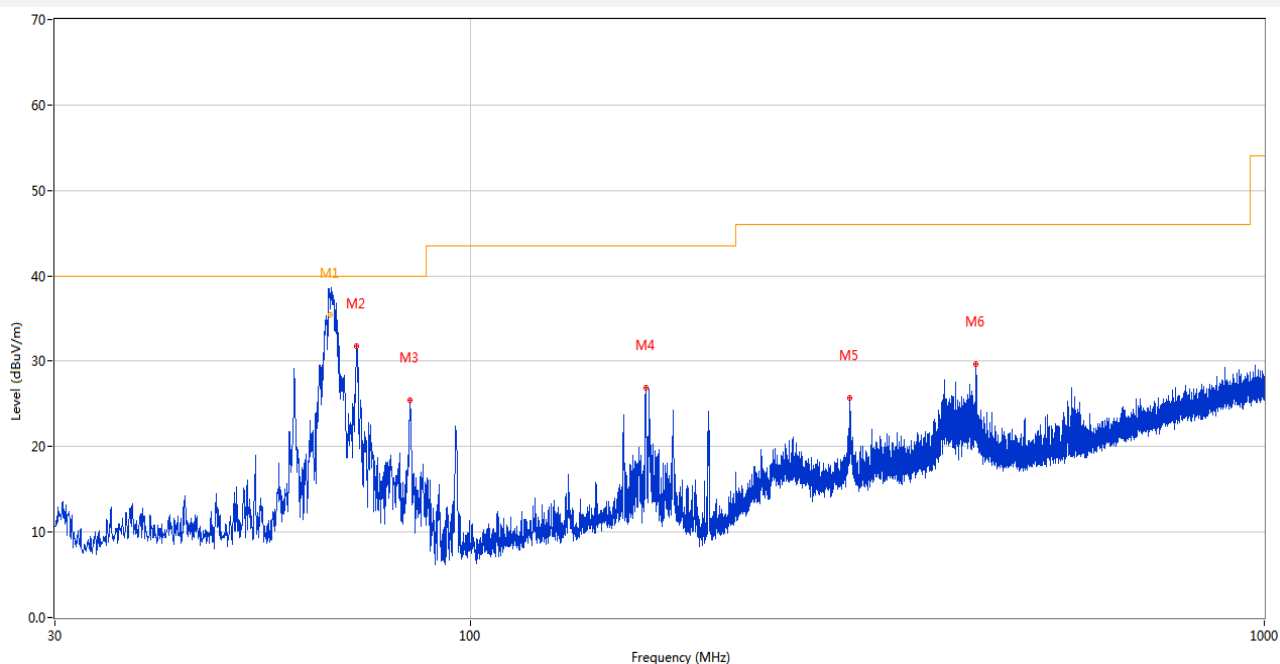

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	66.682	44.78	-28.57	40.0	-4.78	Peak	143.00	108	Vertical	N/A
1*	66.682	35.44	-28.57	40.0	4.56	QP	143.00	108	Vertical	Pass
2	71.952	31.78	-29.43	40.0	8.22	Peak	234.00	100	Vertical	Pass
3	83.932	25.47	-30.42	40.0	14.53	Peak	187.00	100	Vertical	Pass
4	166.479	26.89	-25.37	43.5	16.61	Peak	114.00	100	Vertical	Pass
5	300.921	25.66	-24.01	46.0	20.34	Peak	255.00	200	Vertical	Pass
6	433.132	29.63	-20.23	46.0	16.37	Peak	57.00	100	Vertical	Pass


Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious from 18GHz-25GHz is noise only, do not show on the report.

Ceramic Chip Antenna

GFSK (BLE 1Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

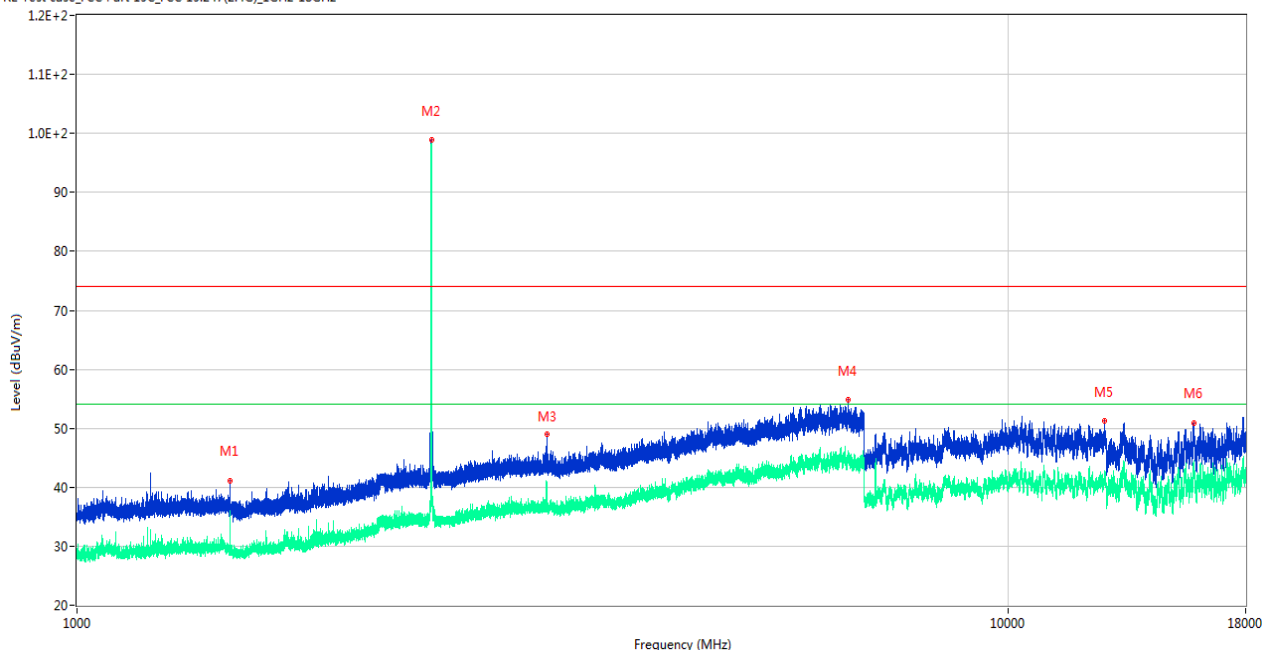

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1461.100	41.16	-17.27	74.0	32.84	Peak	360.00	100	Horizontal	Pass
1**	1461.100	28.96	-17.27	54.0	25.04	AV	360.00	100	Horizontal	Pass
2	2402.200	98.89	-11.74	74.0	-24.89	Peak	282.00	100	Horizontal	N/A
2**	2402.200	98.65	-11.74	54.0	-44.65	AV	282.00	100	Horizontal	N/A
3	3196.000	48.97	-7.77	74.0	25.03	Peak	247.00	100	Horizontal	Pass
3**	3196.000	37.15	-7.77	54.0	16.85	AV	247.00	100	Horizontal	Pass
4	6739.000	54.82	2.20	74.0	19.18	Peak	134.00	100	Horizontal	Pass
4**	6739.000	44.66	2.20	54.0	9.34	AV	134.00	100	Horizontal	Pass
5	12699.975	51.24	0.84	74.0	22.76	Peak	111.00	100	Horizontal	Pass
5**	12699.975	41.85	0.84	54.0	12.15	AV	111.00	100	Horizontal	Pass
6	15829.650	50.96	1.51	74.0	23.04	Peak	309.00	100	Horizontal	Pass
6**	15829.650	41.84	1.51	54.0	12.16	AV	309.00	100	Horizontal	Pass

GFSK (BLE 1Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

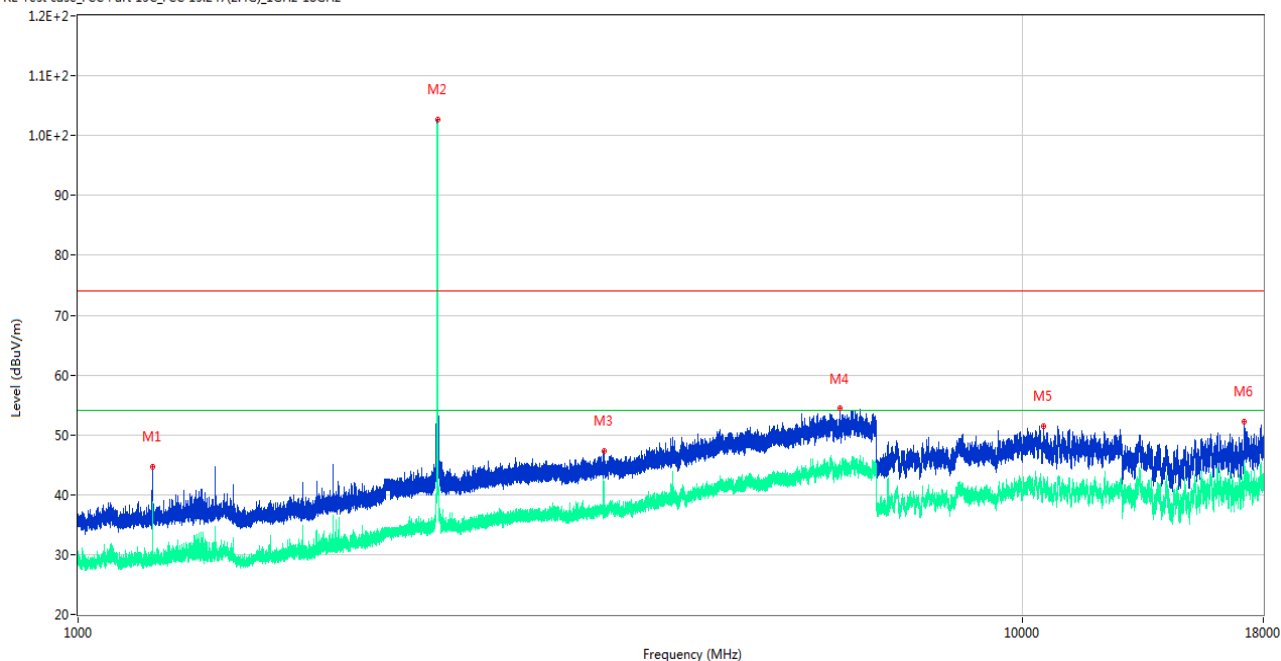

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1198.600	44.76	-17.88	74.0	29.24	Peak	52.00	100	Vertical	Pass
1**	1198.600	29.35	-17.88	54.0	24.65	AV	52.00	100	Vertical	Pass
2	2402.200	102.76	-11.74	74.0	-28.76	Peak	238.00	100	Vertical	N/A
2**	2402.200	102.14	-11.74	54.0	-48.14	AV	238.00	100	Vertical	N/A
3	3603.200	47.39	-6.75	74.0	26.61	Peak	190.00	300	Vertical	Pass
3**	3603.200	41.48	-6.75	54.0	12.52	AV	190.00	300	Vertical	Pass
4	6406.000	54.38	0.89	74.0	19.62	Peak	360.00	100	Vertical	Pass
4**	6406.000	44.77	0.89	54.0	9.23	AV	360.00	100	Vertical	Pass
5	10535.675	51.50	-0.69	74.0	22.50	Peak	162.00	400	Vertical	Pass
5**	10535.675	41.77	-0.69	54.0	12.23	AV	162.00	400	Vertical	Pass
6	17194.650	52.19	2.20	74.0	21.81	Peak	0.00	100	Vertical	Pass
6**	17194.650	44.49	2.20	54.0	9.51	AV	0.00	100	Vertical	Pass

GFSK (BLE 1Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

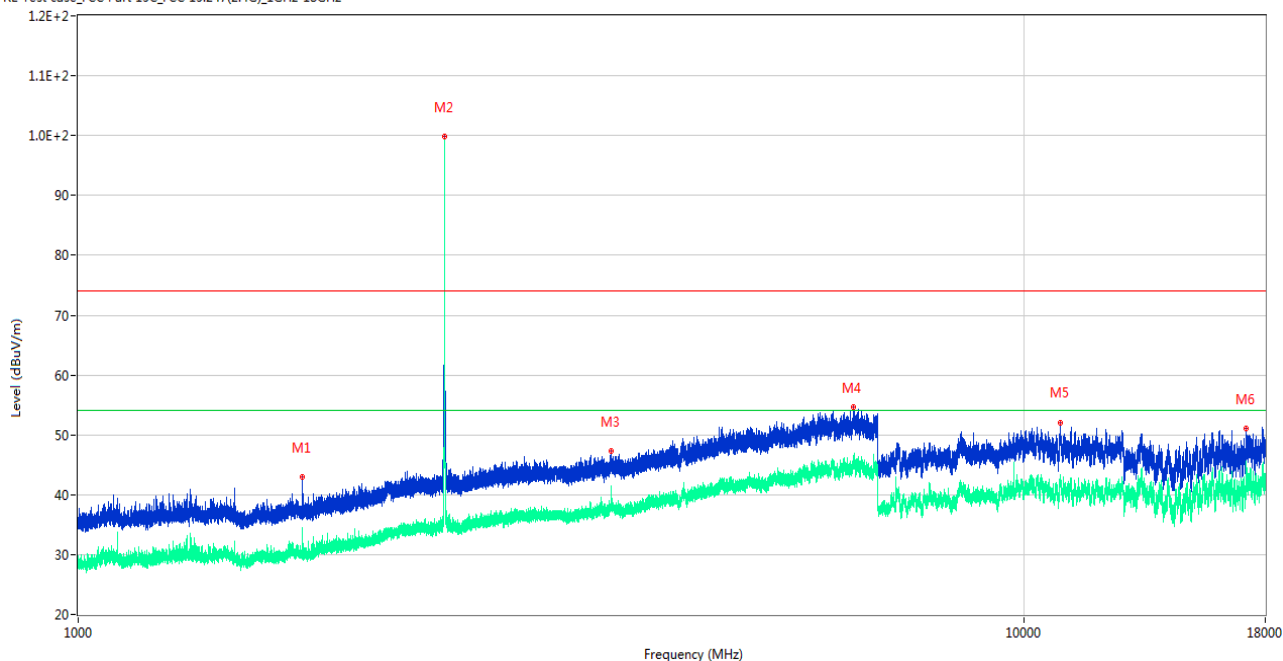

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1726.200	42.92	-17.06	74.0	31.08	Peak	276.00	300	Horizontal	Pass
1**	1726.200	29.15	-17.06	54.0	24.85	AV	276.00	300	Horizontal	Pass
2	2440.300	99.81	-12.24	74.0	-25.81	Peak	360.00	200	Horizontal	N/A
2**	2440.300	99.08	-12.24	54.0	-45.08	AV	360.00	200	Horizontal	N/A
3	3659.600	47.34	-6.41	74.0	26.66	Peak	334.00	300	Horizontal	Pass
3**	3659.600	39.87	-6.41	54.0	14.13	AV	334.00	300	Horizontal	Pass
4	6606.600	54.67	1.88	74.0	19.33	Peak	297.00	400	Horizontal	Pass
4**	6606.600	45.58	1.88	54.0	8.42	AV	297.00	400	Horizontal	Pass
5	10916.612	52.02	0.21	74.0	21.98	Peak	41.00	400	Horizontal	Pass
5**	10916.612	42.82	0.21	54.0	11.18	AV	41.00	400	Horizontal	Pass
6	17190.187	51.17	2.33	74.0	22.83	Peak	20.00	300	Horizontal	Pass
6**	17190.187	43.23	2.33	54.0	10.77	AV	20.00	300	Horizontal	Pass

GFSK (BLE 1Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

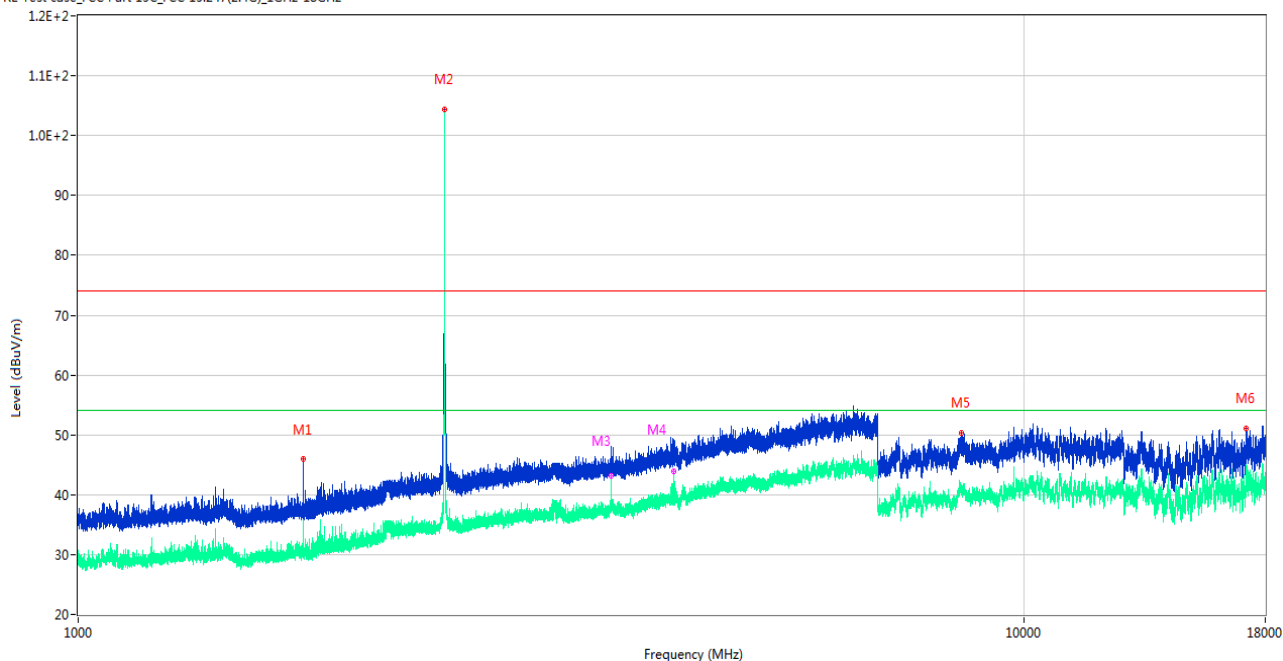

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1728.700	45.90	-16.94	74.0	28.10	Peak	78.00	300	Vertical	Pass
1**	1728.700	33.41	-16.94	54.0	20.59	AV	78.00	300	Vertical	Pass
2	2440.300	104.44	-12.24	74.0	-30.44	Peak	31.00	200	Vertical	N/A
2**	2440.300	103.75	-12.24	54.0	-49.75	AV	31.00	200	Vertical	N/A
3	3660.000	47.84	-6.41	74.0	26.16	Peak	12.00	300	Vertical	Pass
3**	3660.000	43.08	-6.41	54.0	10.92	AV	12.00	300	Vertical	Pass
4	4263.200	47.96	-4.17	74.0	26.04	Peak	95.00	400	Vertical	Pass
4**	4263.200	43.88	-4.17	54.0	10.12	AV	95.00	400	Vertical	Pass
5	8584.700	50.23	-2.08	74.0	23.77	Peak	324.00	400	Vertical	Pass
5**	8584.700	40.98	-2.08	54.0	13.02	AV	324.00	400	Vertical	Pass
6	17195.176	51.08	2.18	74.0	22.92	Peak	107.00	300	Vertical	Pass
6**	17195.176	43.41	2.18	54.0	10.59	AV	107.00	300	Vertical	Pass

GFSK (BLE 1Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

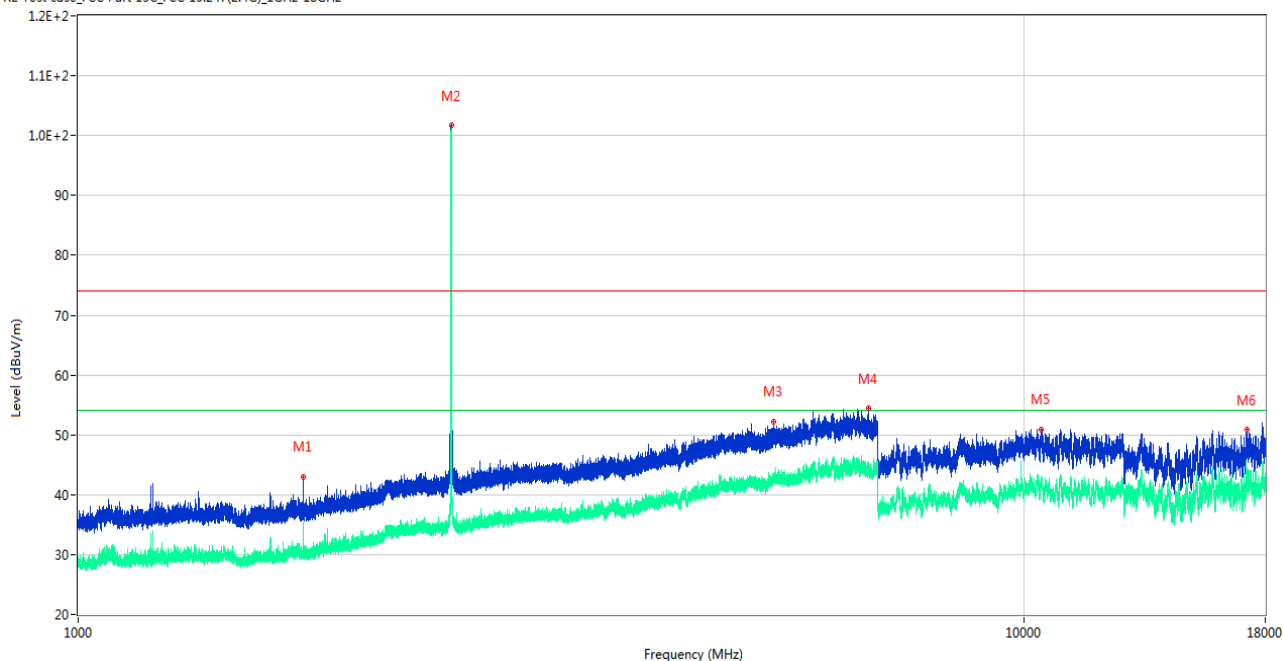

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1730.500	43.06	-16.86	74.0	30.94	Peak	95.00	300	Horizontal	Pass
1**	1730.500	30.50	-16.86	54.0	23.50	AV	95.00	300	Horizontal	Pass
2	2479.800	101.66	-12.20	74.0	-27.66	Peak	301.00	150	Horizontal	N/A
2**	2479.800	100.43	-12.20	54.0	-46.43	AV	301.00	150	Horizontal	N/A
3	5439.600	52.23	-1.08	74.0	21.77	Peak	253.00	300	Horizontal	Pass
3**	5439.600	42.56	-1.08	54.0	11.44	AV	253.00	300	Horizontal	Pass
4	6851.000	54.41	1.33	74.0	19.59	Peak	319.00	200	Horizontal	Pass
4**	6851.000	44.33	1.33	54.0	9.67	AV	319.00	200	Horizontal	Pass
5	10423.838	50.92	0.03	74.0	23.08	Peak	124.00	300	Horizontal	Pass
5**	10423.838	42.21	0.03	54.0	11.79	AV	124.00	300	Horizontal	Pass
6	17204.888	50.84	1.65	74.0	23.16	Peak	123.00	400	Horizontal	Pass
6**	17204.888	42.63	1.65	54.0	11.37	AV	123.00	400	Horizontal	Pass

GFSK (BLE 1Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

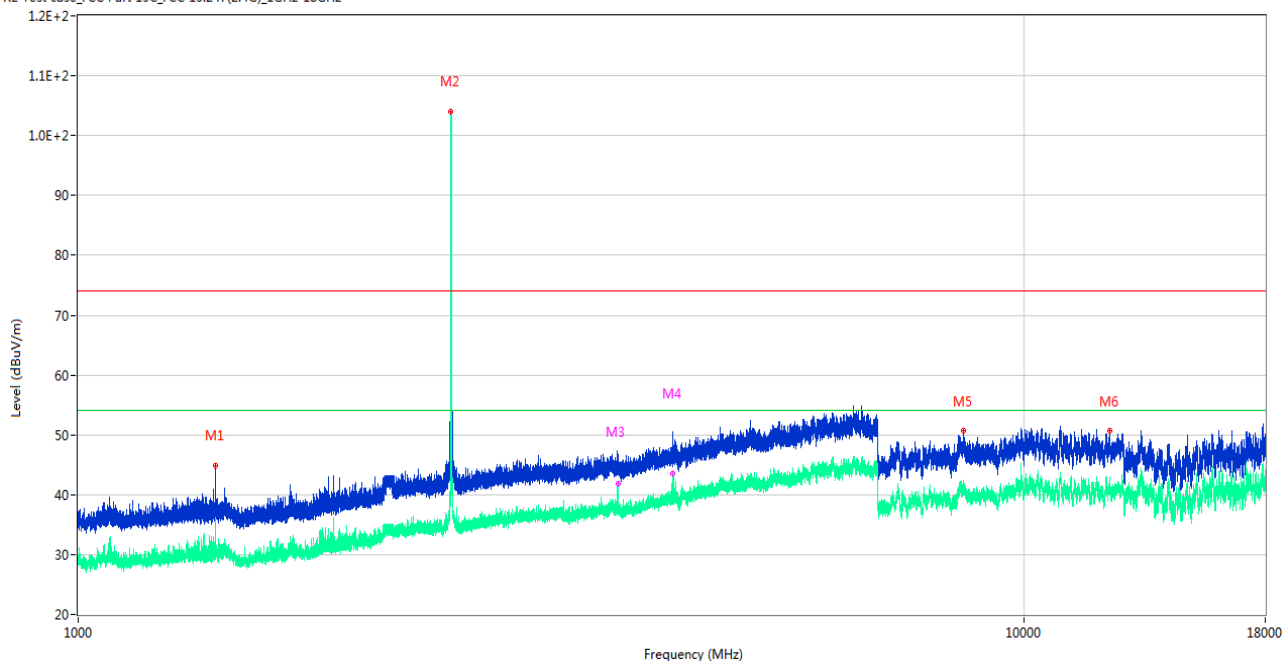

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1398.400	44.95	-17.32	74.0	29.05	Peak	234.00	100	Vertical	Pass
1**	1398.400	36.26	-17.32	54.0	17.74	AV	234.00	100	Vertical	Pass
2	2479.700	104.05	-12.21	74.0	-30.05	Peak	241.00	150	Vertical	N/A
2**	2479.700	103.13	-12.21	54.0	-49.13	AV	241.00	150	Vertical	N/A
3	3720.400	46.29	-5.89	74.0	27.71	Peak	360.00	200	Vertical	Pass
3**	3720.400	41.88	-5.89	54.0	12.12	AV	360.00	200	Vertical	Pass
4	4251.400	44.70	-4.70	74.0	29.30	Peak	30.00	300	Vertical	Pass
4**	4251.400	43.59	-4.70	54.0	10.41	AV	30.00	300	Vertical	Pass
5	8638.463	50.63	-1.83	74.0	23.37	Peak	257.00	300	Vertical	Pass
5**	8638.463	41.19	-1.83	54.0	12.81	AV	257.00	300	Vertical	Pass
6	12314.438	50.64	1.40	74.0	23.36	Peak	168.00	300	Vertical	Pass
6**	12314.438	40.74	1.40	54.0	13.26	AV	168.00	300	Vertical	Pass

GFSK (BLE 2Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

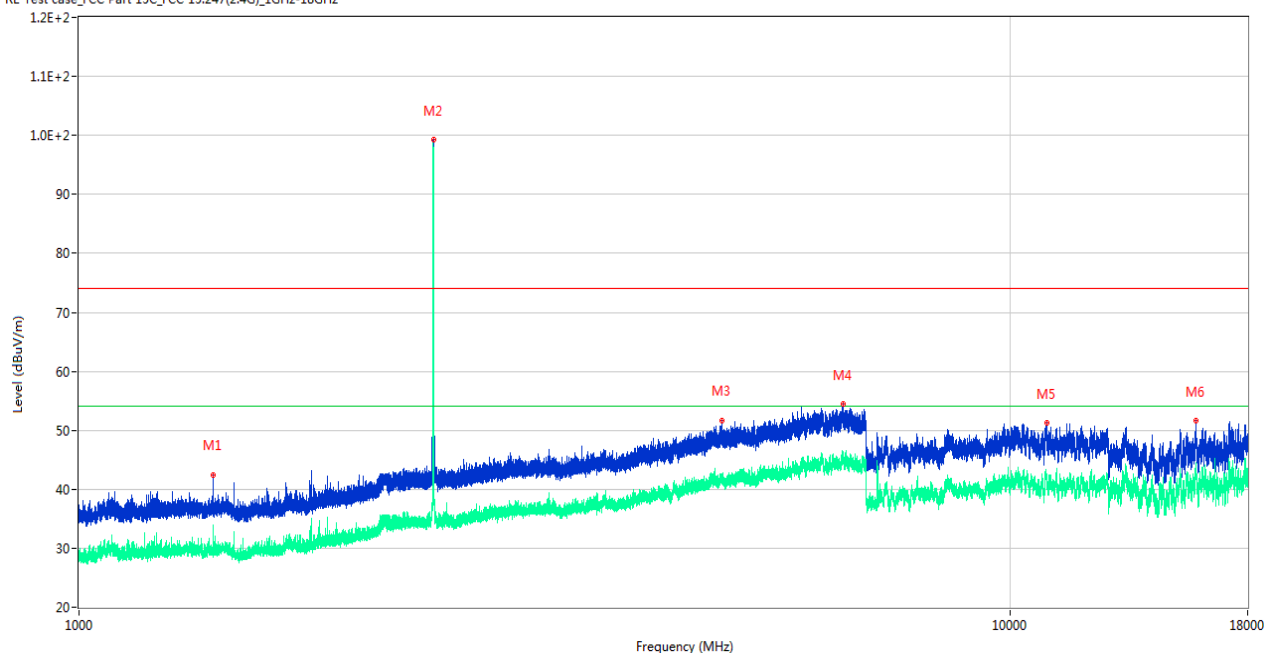

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1394.900	42.50	-17.49	74.0	31.50	Peak	150.00	300	Horizontal	Pass
1**	1394.900	29.52	-17.49	54.0	24.48	AV	150.00	300	Horizontal	Pass
2	2402.500	99.21	-11.74	74.0	-25.21	Peak	283.00	150	Horizontal	N/A
2**	2402.500	97.28	-11.74	54.0	-43.28	AV	283.00	150	Horizontal	N/A
3	4901.000	51.71	-2.22	74.0	22.29	Peak	240.00	150	Horizontal	Pass
3**	4901.000	41.64	-2.22	54.0	12.36	AV	240.00	150	Horizontal	Pass
4	6611.800	54.39	2.14	74.0	19.61	Peak	297.00	300	Horizontal	Pass
4**	6611.800	45.42	2.14	54.0	8.58	AV	297.00	300	Horizontal	Pass
5	10943.638	51.21	-0.11	74.0	22.79	Peak	133.00	300	Horizontal	Pass
5**	10943.638	41.85	-0.11	54.0	12.15	AV	133.00	300	Horizontal	Pass
6	15856.425	51.57	1.12	74.0	22.43	Peak	329.00	100	Horizontal	Pass
6**	15856.425	42.10	1.12	54.0	11.90	AV	329.00	100	Horizontal	Pass

GFSK (BLE 2Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

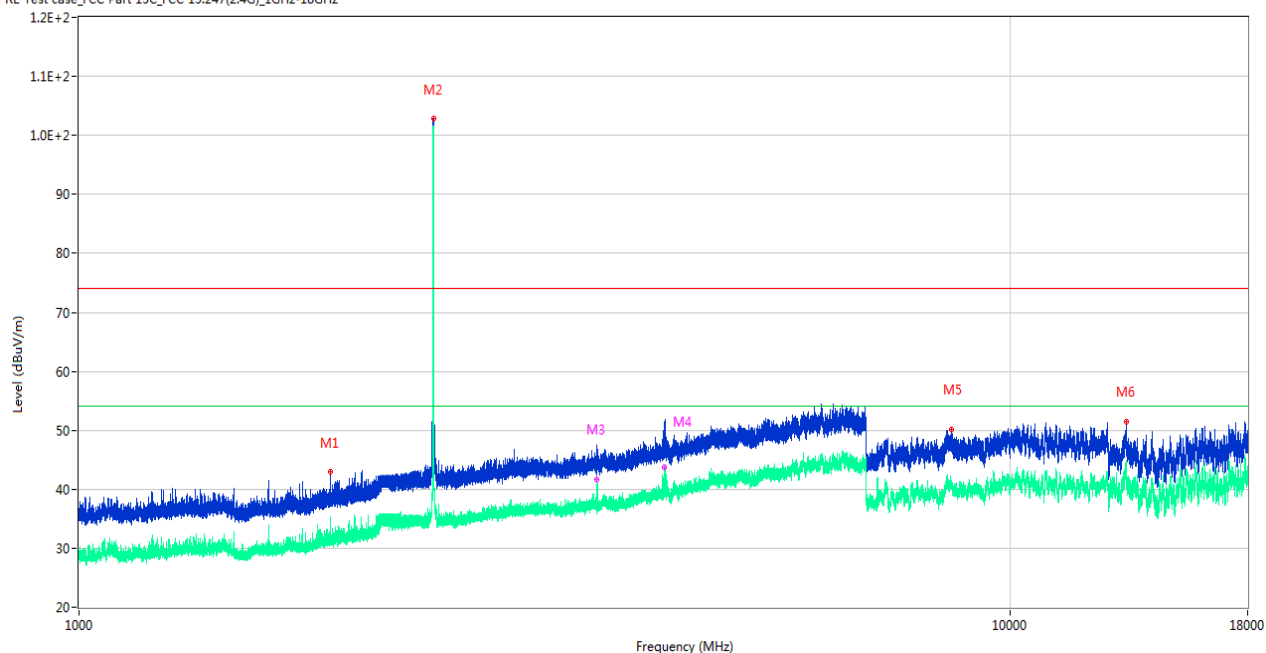

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1861.500	42.97	-16.01	74.0	31.03	Peak	119.00	400	Vertical	Pass
1**	1861.500	31.05	-16.01	54.0	22.95	AV	119.00	400	Vertical	Pass
2	2402.500	102.79	-11.74	74.0	-28.79	Peak	240.00	200	Vertical	N/A
2**	2402.500	100.39	-11.74	54.0	-46.39	AV	240.00	200	Vertical	N/A
3	3602.600	45.05	-6.85	74.0	28.95	Peak	136.00	200	Vertical	Pass
3**	3602.600	41.56	-6.85	54.0	12.44	AV	136.00	200	Vertical	Pass
4	4254.400	47.07	-4.71	74.0	26.93	Peak	78.00	300	Vertical	Pass
4**	4254.400	43.65	-4.71	54.0	10.35	AV	78.00	300	Vertical	Pass
5	8648.526	50.10	-1.89	74.0	23.90	Peak	235.00	400	Vertical	Pass
5**	8648.526	40.56	-1.89	54.0	13.44	AV	235.00	400	Vertical	Pass
6	13320.937	51.38	0.91	74.0	22.62	Peak	110.00	400	Vertical	Pass
6**	13320.937	42.90	0.91	54.0	11.10	AV	110.00	400	Vertical	Pass

GFSK (BLE 2Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

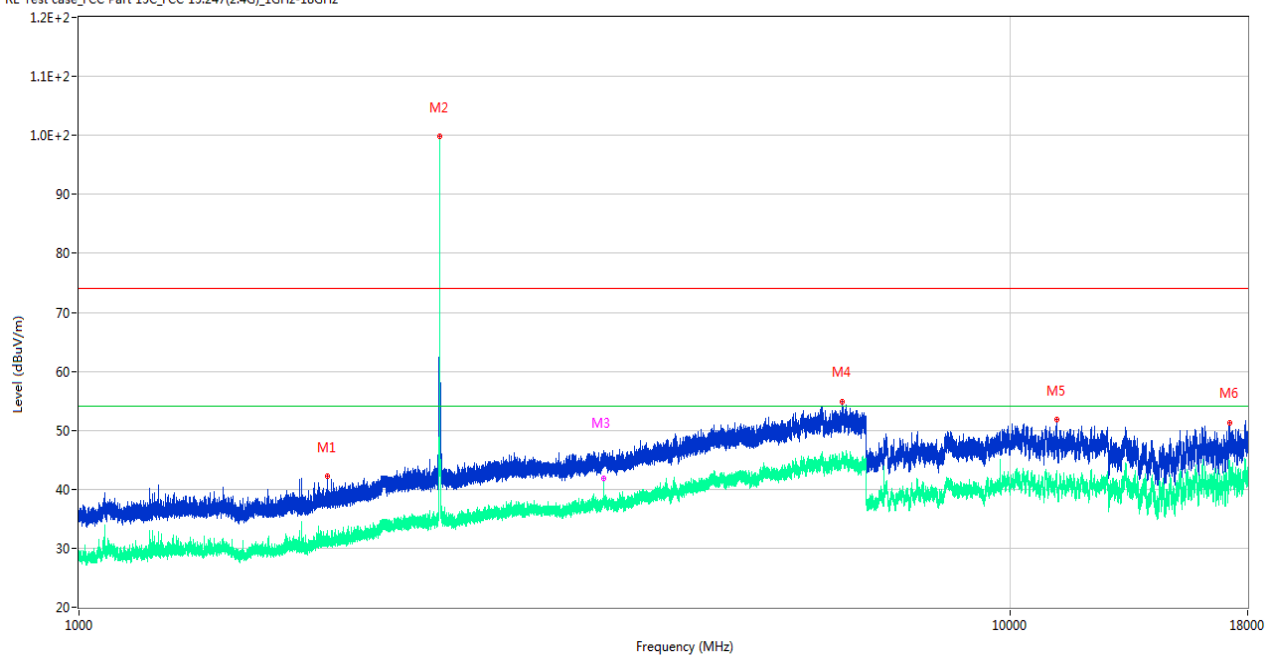

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1848.100	42.18	-16.15	74.0	31.82	Peak	14.00	400	Horizontal	Pass
1**	1848.100	30.57	-16.15	54.0	23.43	AV	14.00	400	Horizontal	Pass
2	2480.300	100.33	-12.24	74.0	-26.33	Peak	360.00	200	Horizontal	N/A
2**	2480.300	99.96	-12.24	54.0	-45.96	AV	360.00	200	Horizontal	N/A
3	3660.400	45.68	-6.40	74.0	28.32	Peak	281.00	200	Horizontal	Pass
3**	3660.400	41.81	-6.40	54.0	12.19	AV	281.00	200	Horizontal	Pass
4	6602.400	54.85	1.40	74.0	19.15	Peak	306.00	300	Horizontal	Pass
4**	6602.400	45.88	1.40	54.0	8.12	AV	306.00	300	Horizontal	Pass
5	11215.901	51.76	-0.19	74.0	22.24	Peak	55.00	400	Horizontal	Pass
5**	11215.901	41.59	-0.19	54.0	12.41	AV	55.00	400	Horizontal	Pass
6	17202.526	51.35	1.77	74.0	22.65	Peak	144.00	400	Horizontal	Pass
6**	17202.526	43.28	1.77	54.0	10.72	AV	144.00	400	Horizontal	Pass

GFSK (BLE 2Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

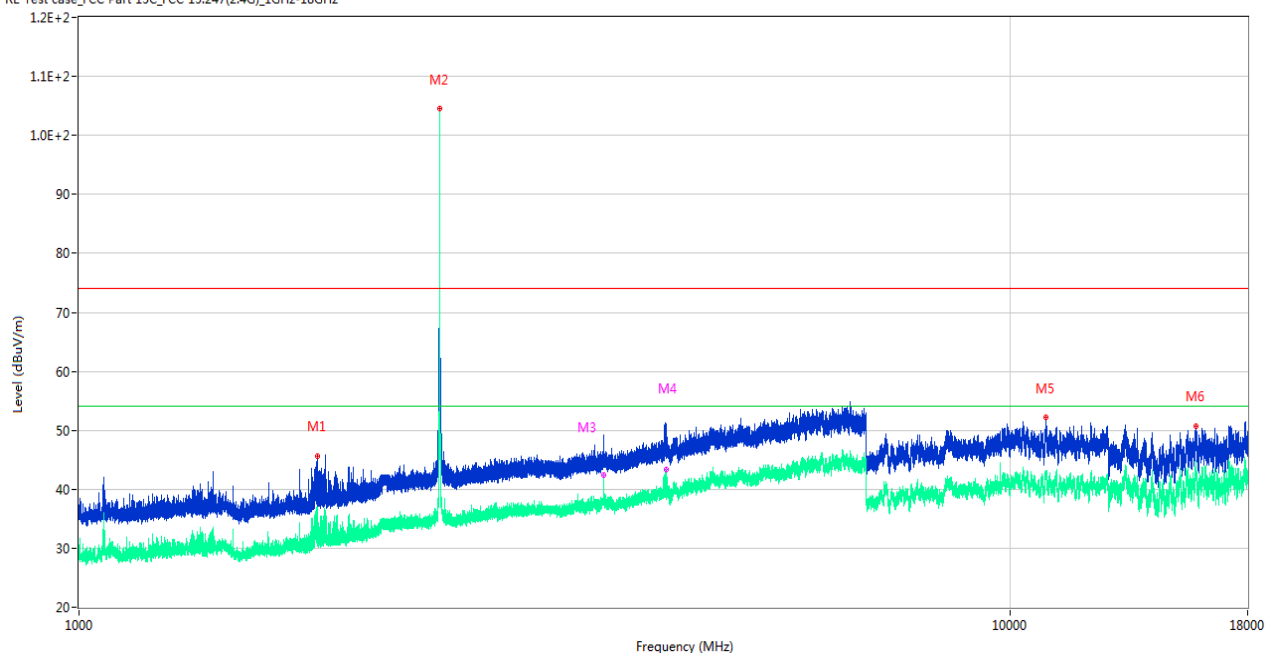

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1803.300	45.61	-16.28	74.0	28.39	Peak	84.00	400	Vertical	Pass
1**	1803.300	34.69	-16.28	54.0	19.31	AV	84.00	400	Vertical	Pass
2	2480.200	104.51	-12.25	74.0	-30.51	Peak	45.00	200	Vertical	N/A
2**	2480.200	103.92	-12.25	54.0	-49.92	AV	45.00	200	Vertical	N/A
3	3659.800	46.44	-6.41	74.0	27.56	Peak	360.00	200	Vertical	Pass
3**	3659.800	42.41	-6.41	54.0	11.59	AV	360.00	200	Vertical	Pass
4	4275.200	51.11	-3.82	74.0	22.89	Peak	92.00	300	Vertical	Pass
4**	4275.200	43.34	-3.82	54.0	10.66	AV	92.00	300	Vertical	Pass
5	10933.576	52.13	0.02	74.0	21.87	Peak	325.00	400	Vertical	Pass
5**	10933.576	42.37	0.02	54.0	11.63	AV	325.00	400	Vertical	Pass
6	15832.013	50.78	1.48	74.0	23.22	Peak	360.00	400	Vertical	Pass
6**	15832.013	42.74	1.48	54.0	11.26	AV	360.00	400	Vertical	Pass

GFSK (BLE 2Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

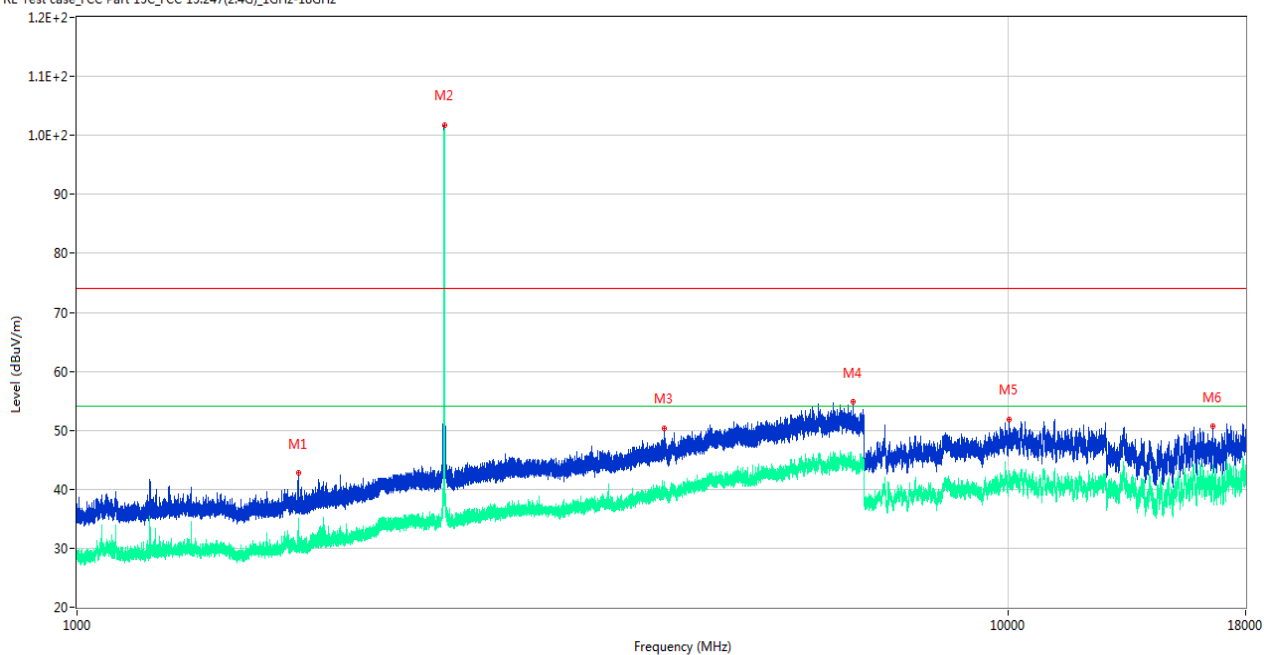

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1728.900	42.74	-16.93	74.0	31.26	Peak	343.00	200	Horizontal	Pass
1**	1728.900	30.72	-16.93	54.0	23.28	AV	343.00	200	Horizontal	Pass
2	2479.800	101.81	-12.20	74.0	-27.81	Peak	294.00	200	Horizontal	N/A
2**	2479.800	100.89	-12.20	54.0	-46.89	AV	294.00	200	Horizontal	N/A
3	4270.600	50.38	-3.67	74.0	23.62	Peak	359.00	400	Horizontal	Pass
3**	4270.600	39.04	-3.67	54.0	14.96	AV	359.00	400	Horizontal	Pass
4	6822.200	54.76	1.40	74.0	19.24	Peak	162.00	400	Horizontal	Pass
4**	6822.200	43.61	1.40	54.0	10.39	AV	162.00	400	Horizontal	Pass
5	10029.388	51.91	-0.77	74.0	22.09	Peak	256.00	200	Horizontal	Pass
5**	10029.388	42.65	-0.77	54.0	11.35	AV	256.00	200	Horizontal	Pass
6	16588.276	50.67	0.90	74.0	23.33	Peak	249.00	100	Horizontal	Pass
6**	16588.276	43.32	0.90	54.0	10.68	AV	249.00	100	Horizontal	Pass

GFSK (BLE 2Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

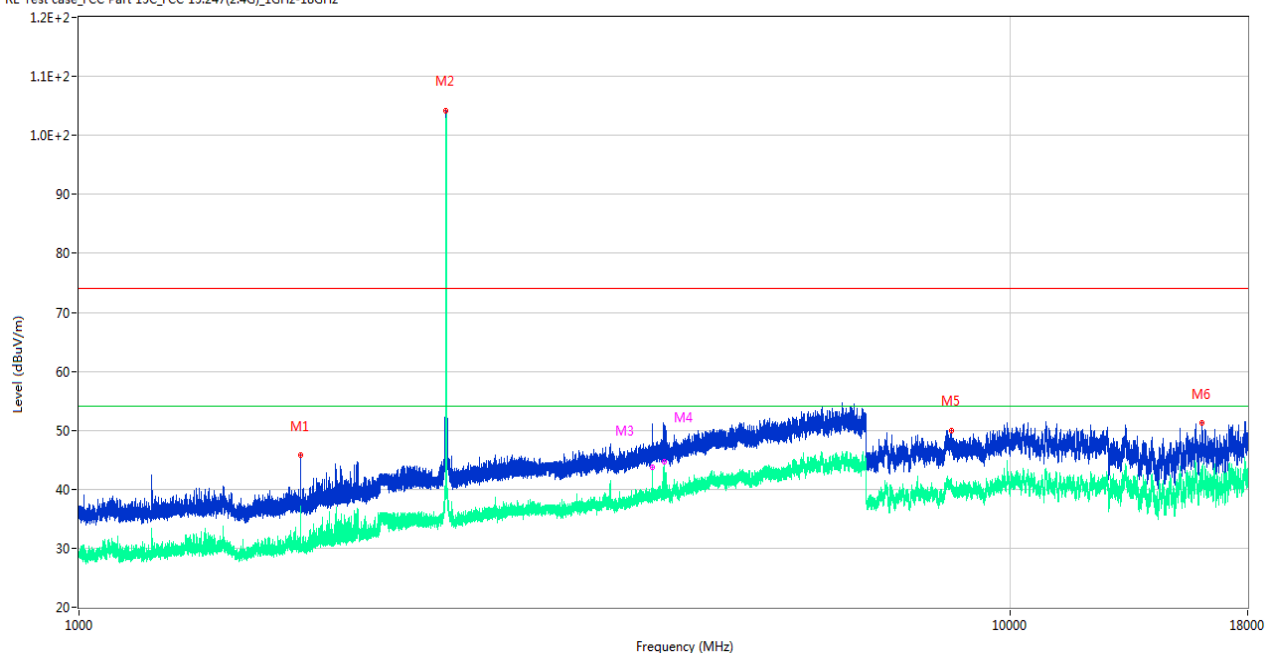


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1731.800	45.72	-16.89	74.0	28.28	Peak	56.00	200	Vertical	Pass
1**	1731.800	30.16	-16.89	54.0	23.84	AV	56.00	200	Vertical	Pass
2	2479.700	104.22	-12.21	74.0	-30.22	Peak	244.00	200	Vertical	N/A
2**	2479.700	102.89	-12.21	54.0	-48.89	AV	244.00	200	Vertical	N/A
3	4130.400	45.53	-4.98	74.0	28.47	Peak	360.00	400	Vertical	Pass
3**	4130.400	43.67	-4.98	54.0	10.33	AV	360.00	400	Vertical	Pass
4	4248.000	46.74	-5.03	74.0	27.26	Peak	105.00	400	Vertical	Pass
4**	4248.000	44.59	-5.03	54.0	9.41	AV	105.00	400	Vertical	Pass
5	8646.225	49.97	-1.87	74.0	24.03	Peak	0.00	200	Vertical	Pass
5**	8646.225	40.78	-1.87	54.0	13.22	AV	0.00	200	Vertical	Pass
6	16089.000	51.23	1.45	74.0	22.77	Peak	187.00	100	Vertical	Pass
6**	16089.000	42.83	1.45	54.0	11.17	AV	187.00	100	Vertical	Pass

Metal Antenna

GFSK (BLE 1Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

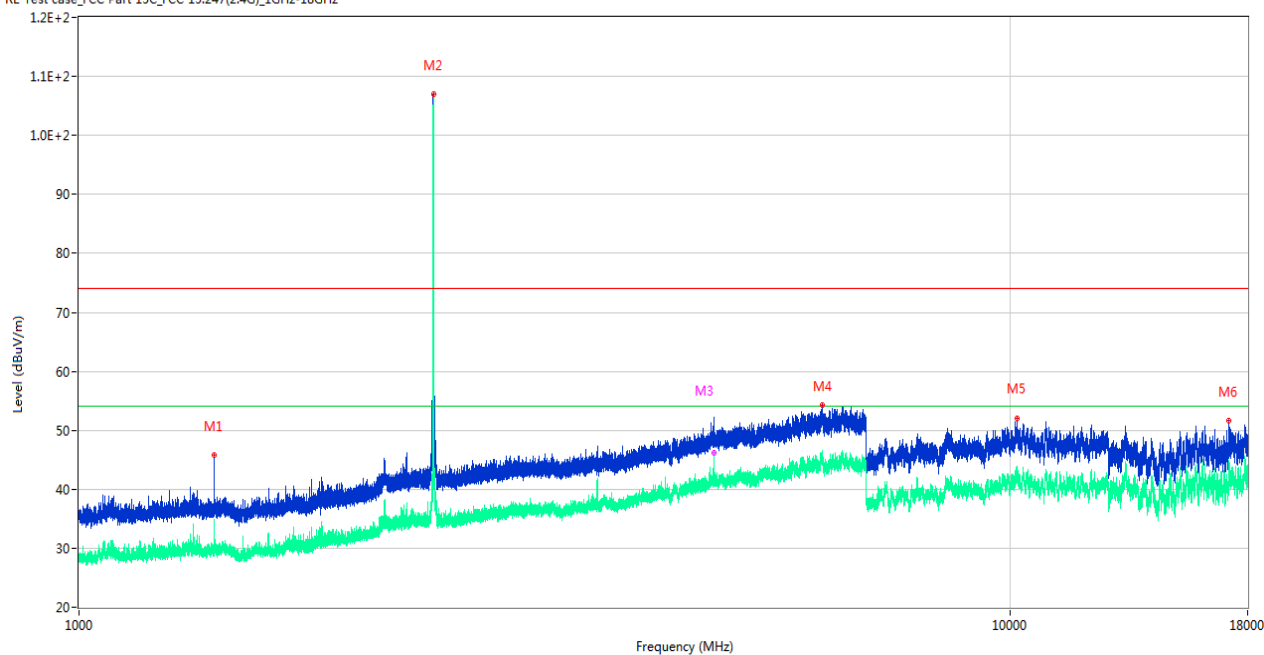

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1395.900	45.75	-17.24	74.0	28.25	Peak	97.00	300	Horizontal	Pass
1**	1395.900	31.14	-17.24	54.0	22.86	AV	97.00	300	Horizontal	Pass
2	2402.300	106.91	-11.74	74.0	-32.91	Peak	154.00	100	Horizontal	N/A
2**	2402.300	105.71	-11.74	54.0	-51.71	AV	154.00	100	Horizontal	N/A
3	4803.800	50.66	-2.02	74.0	23.34	Peak	165.00	100	Horizontal	Pass
3**	4803.800	46.10	-2.02	54.0	7.90	AV	165.00	100	Horizontal	Pass
4	6287.800	54.30	1.51	74.0	19.70	Peak	360.00	100	Horizontal	Pass
4**	6287.800	45.05	1.51	54.0	8.95	AV	360.00	100	Horizontal	Pass
5	10186.651	52.05	0.20	74.0	21.95	Peak	0.00	300	Horizontal	Pass
5**	10186.651	42.67	0.20	54.0	11.33	AV	0.00	300	Horizontal	Pass
6	17194.125	51.58	2.21	74.0	22.42	Peak	92.00	200	Horizontal	Pass
6**	17194.125	42.97	2.21	54.0	11.03	AV	92.00	200	Horizontal	Pass

GFSK (BLE 1Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

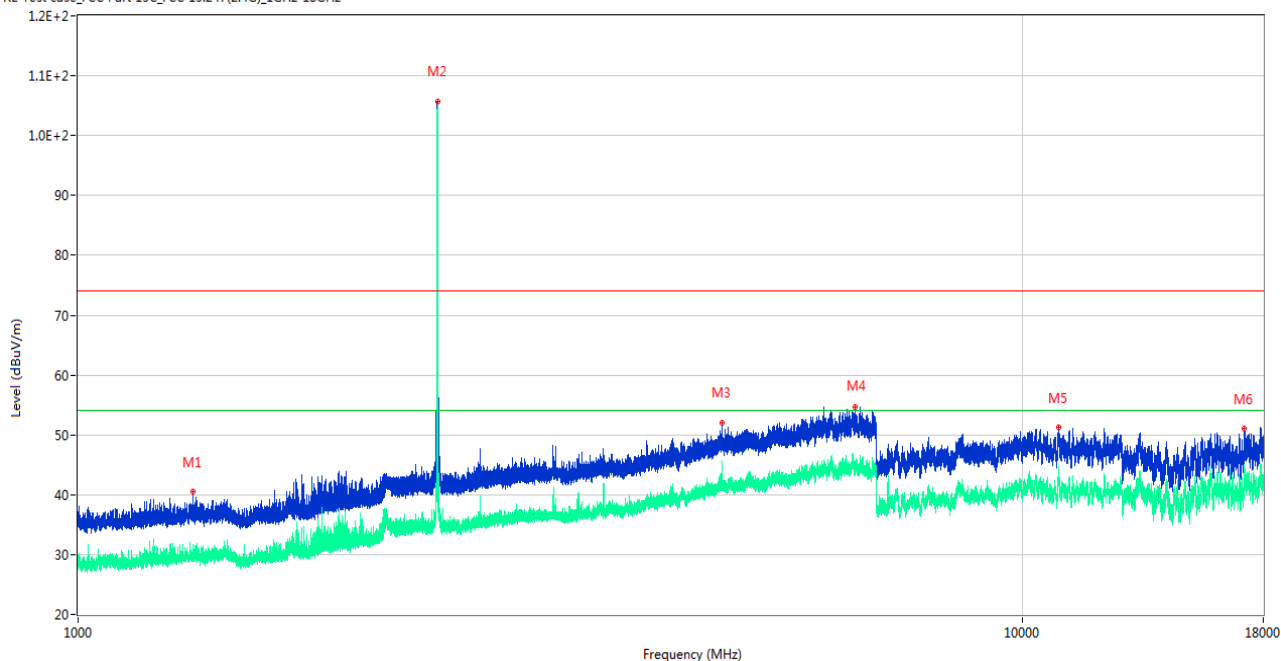

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1323.800	40.52	-17.24	74.0	33.48	Peak	81.00	100	Vertical	Pass
1**	1323.800	31.63	-17.24	54.0	22.37	AV	81.00	100	Vertical	Pass
2	2402.300	105.69	-11.74	74.0	-31.69	Peak	134.00	100	Vertical	N/A
2**	2402.300	104.87	-11.74	54.0	-50.87	AV	134.00	100	Vertical	N/A
3	4803.600	51.96	-2.00	74.0	22.04	Peak	293.00	100	Vertical	Pass
3**	4803.600	44.40	-2.00	54.0	9.60	AV	293.00	100	Vertical	Pass
4	6659.600	54.71	0.81	74.0	19.29	Peak	133.00	200	Vertical	Pass
4**	6659.600	45.69	0.81	54.0	8.31	AV	133.00	200	Vertical	Pass
5	10929.549	51.19	0.09	74.0	22.81	Peak	201.00	300	Vertical	Pass
5**	10929.549	42.38	0.09	54.0	11.62	AV	201.00	300	Vertical	Pass
6	17196.751	50.99	2.08	74.0	23.01	Peak	35.00	300	Vertical	Pass
6**	17196.751	43.77	2.08	54.0	10.23	AV	35.00	300	Vertical	Pass

GFSK (BLE 1Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

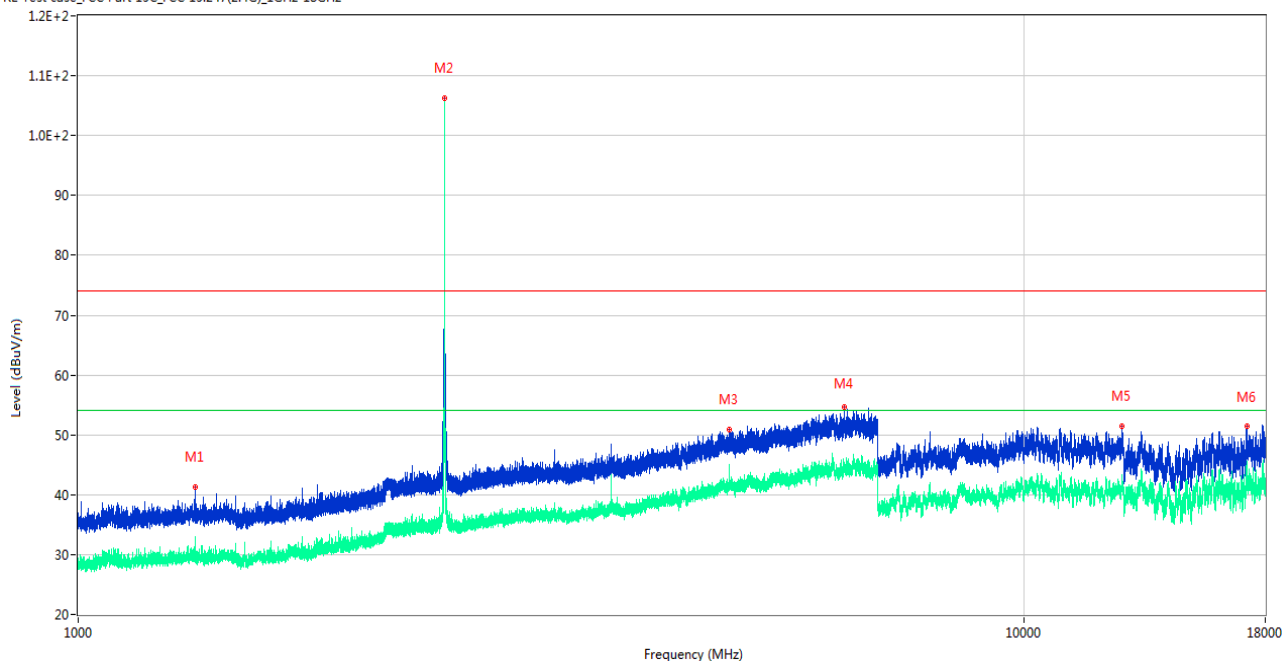

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.400	41.37	-17.38	74.0	32.63	Peak	67.00	400	Horizontal	Pass
1**	1330.400	32.94	-17.38	54.0	21.06	AV	67.00	400	Horizontal	Pass
2	2439.700	106.28	-12.28	74.0	-32.28	Peak	151.00	200	Horizontal	N/A
2**	2439.700	105.33	-12.28	54.0	-51.33	AV	151.00	200	Horizontal	N/A
3	4880.400	50.95	-2.61	74.0	23.05	Peak	155.00	150	Horizontal	Pass
3**	4880.400	43.37	-2.61	54.0	10.63	AV	155.00	150	Horizontal	Pass
4	6451.800	54.64	1.72	74.0	19.36	Peak	29.00	400	Horizontal	Pass
4**	6451.800	44.69	1.72	54.0	9.31	AV	29.00	400	Horizontal	Pass
5	12707.738	51.45	0.94	74.0	22.55	Peak	184.00	100	Horizontal	Pass
5**	12707.738	41.84	0.94	54.0	12.16	AV	184.00	100	Horizontal	Pass
6	17210.663	51.38	1.48	74.0	22.62	Peak	335.00	300	Horizontal	Pass
6**	17210.663	42.51	1.48	54.0	11.49	AV	335.00	300	Horizontal	Pass

GFSK (BLE 1Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

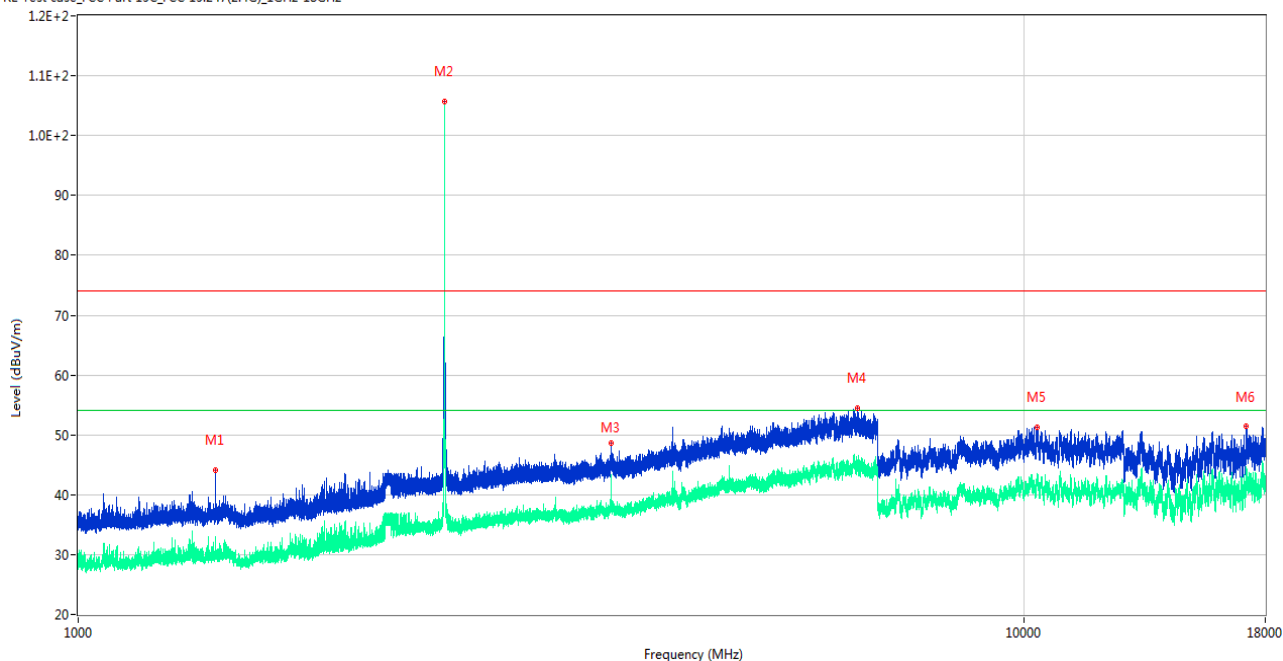

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1396.700	44.19	-17.15	74.0	29.81	Peak	165.00	100	Vertical	Pass
1**	1396.700	29.57	-17.15	54.0	24.43	AV	165.00	100	Vertical	Pass
2	2440.300	105.76	-12.24	74.0	-31.76	Peak	135.00	150	Vertical	N/A
2**	2440.300	105.01	-12.24	54.0	-51.01	AV	135.00	150	Vertical	N/A
3	3660.400	48.54	-6.40	74.0	25.46	Peak	185.00	100	Vertical	Pass
3**	3660.400	42.83	-6.40	54.0	11.17	AV	185.00	100	Vertical	Pass
4	6664.400	54.54	0.82	74.0	19.46	Peak	226.00	200	Vertical	Pass
4**	6664.400	44.51	0.82	54.0	9.49	AV	226.00	200	Vertical	Pass
5	10328.674	51.31	-0.01	74.0	22.69	Peak	137.00	400	Vertical	Pass
5**	10328.674	42.41	-0.01	54.0	11.59	AV	137.00	400	Vertical	Pass
6	17199.114	51.37	1.95	74.0	22.63	Peak	278.00	200	Vertical	Pass
6**	17199.114	43.79	1.95	54.0	10.21	AV	278.00	200	Vertical	Pass

GFSK (BLE 1Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

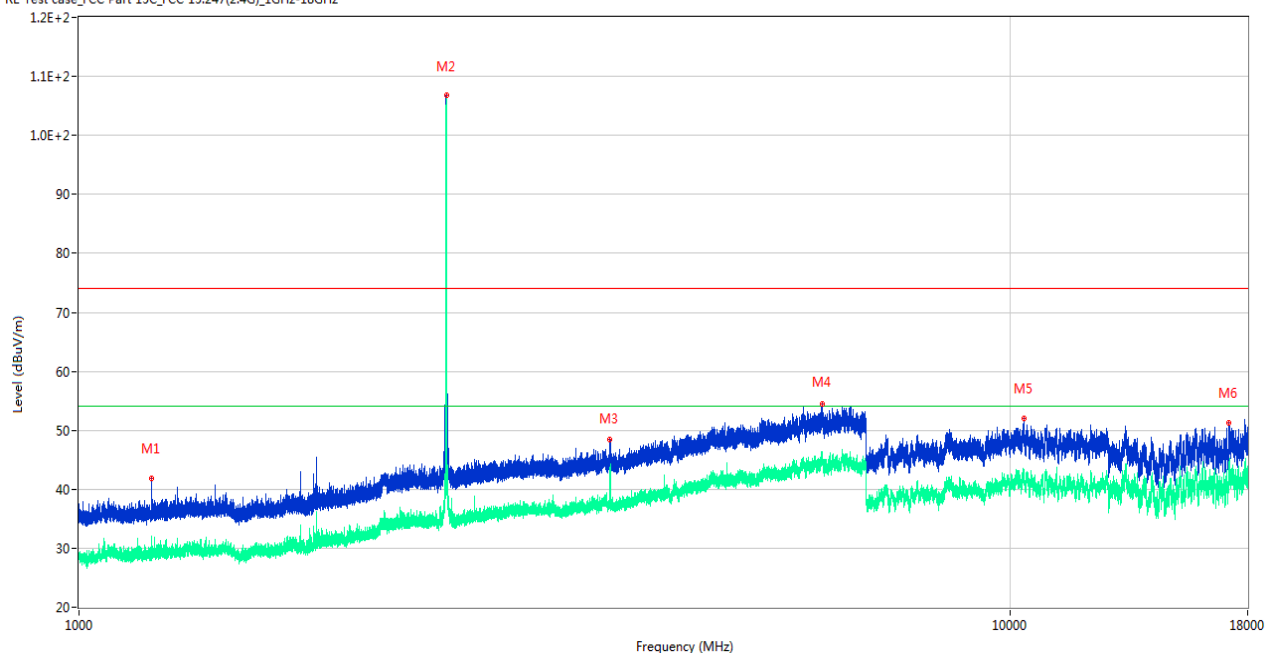

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.600	41.86	-17.86	74.0	32.14	Peak	8.00	200	Horizontal	Pass
1**	1197.600	29.21	-17.86	54.0	24.79	AV	8.00	200	Horizontal	Pass
2	2479.800	106.78	-12.20	74.0	-32.78	Peak	150.00	150	Horizontal	N/A
2**	2479.800	105.56	-12.20	54.0	-51.56	AV	150.00	150	Horizontal	N/A
3	3719.600	48.42	-5.86	74.0	25.58	Peak	58.00	100	Horizontal	Pass
3**	3719.600	43.70	-5.86	54.0	10.30	AV	58.00	100	Horizontal	Pass
4	6284.400	54.52	1.33	74.0	19.48	Peak	0.00	200	Horizontal	Pass
4**	6284.400	44.51	1.33	54.0	9.49	AV	0.00	200	Horizontal	Pass
5	10341.325	52.01	0.07	74.0	21.99	Peak	136.00	100	Horizontal	Pass
5**	10341.325	42.52	0.07	54.0	11.48	AV	136.00	100	Horizontal	Pass
6	17187.301	51.29	2.44	74.0	22.71	Peak	360.00	100	Horizontal	Pass
6**	17187.301	43.30	2.44	54.0	10.70	AV	360.00	100	Horizontal	Pass

GFSK (BLE 1Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

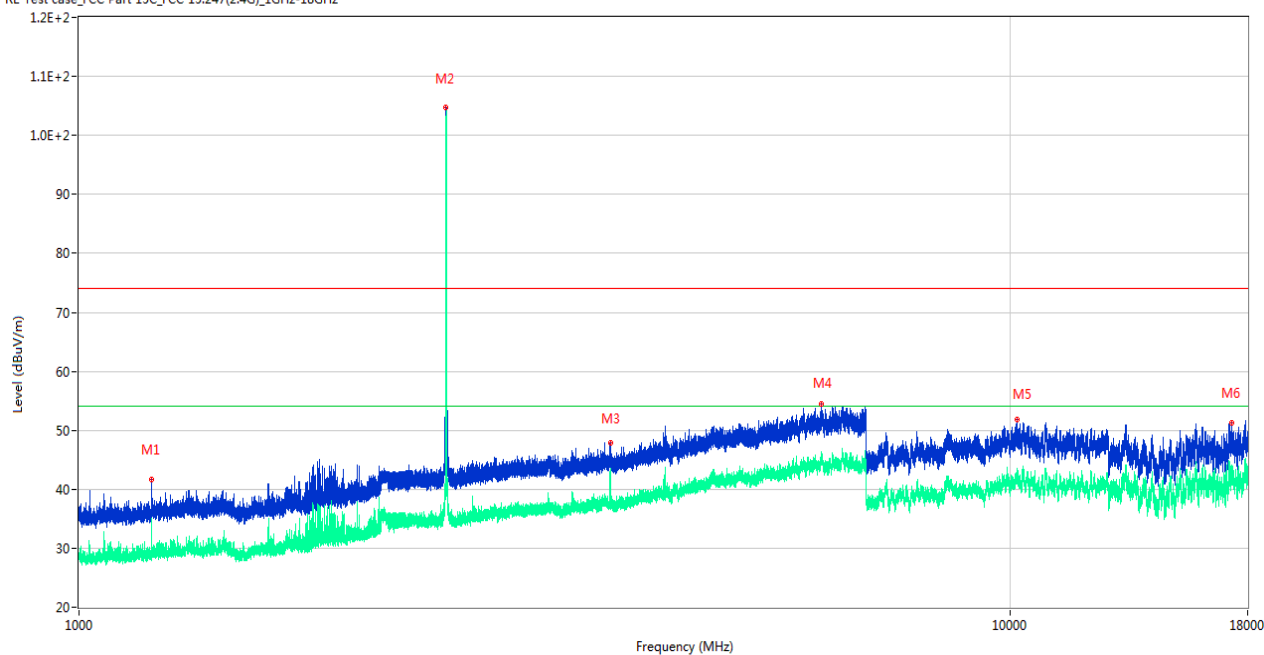

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1196.400	41.66	-17.83	74.0	32.34	Peak	156.00	200	Vertical	Pass
1**	1196.400	28.44	-17.83	54.0	25.56	AV	156.00	200	Vertical	Pass
2	2479.700	104.68	-12.21	74.0	-30.68	Peak	132.00	150	Vertical	N/A
2**	2479.700	102.59	-12.21	54.0	-48.59	AV	132.00	150	Vertical	N/A
3	3720.600	47.80	-5.90	74.0	26.20	Peak	86.00	100	Vertical	Pass
3**	3720.600	42.63	-5.90	54.0	11.37	AV	86.00	100	Vertical	Pass
4	6264.000	54.47	0.65	74.0	19.53	Peak	61.00	400	Vertical	Pass
4**	6264.000	45.95	0.65	54.0	8.05	AV	61.00	400	Vertical	Pass
5	10171.700	51.84	-0.21	74.0	22.16	Peak	319.00	400	Vertical	Pass
5**	10171.700	42.16	-0.21	54.0	11.84	AV	319.00	400	Vertical	Pass
6	17293.089	51.35	1.64	74.0	22.65	Peak	20.00	200	Vertical	Pass
6**	17293.089	41.44	1.64	54.0	12.56	AV	20.00	200	Vertical	Pass