




UTC Fire and Security
Water Proof Panic Module (PN: 60-578)
FCC 15.231:2018
Low Power Periodic Transmitter

Report # UTCF0088

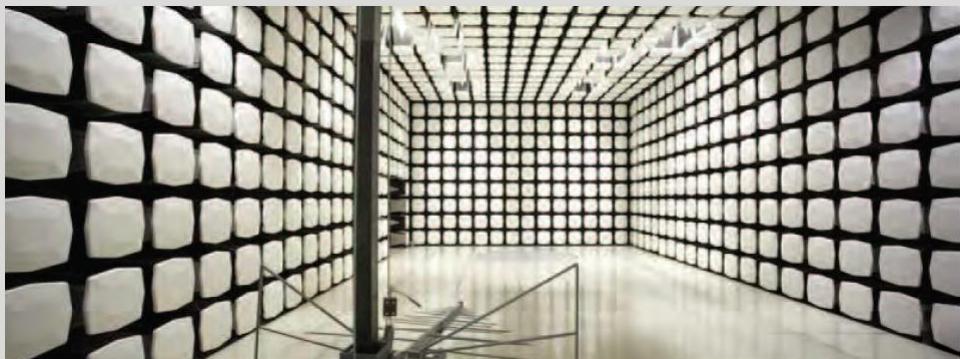

NVLAP LAB CODE: 200676-0



This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America. This Report shall not be reproduced, except in full without written approval of the laboratory.

CERTIFICATE OF TEST



Last Date of Test: March 8, 2018
UTC Fire and Security
Model: Water Proof Panic Module (PN: 60-578)

Radio Equipment Testing

Standards

Specification	Method
FCC 15.231:2018	ANSI C63.10:2013


Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	No	N/A	Not required for a battery powered EUT.
6.5, 6.6	Field Strength of Fundamental	Yes	Pass	
6.5, 6.6	Spurious Radiated Emissions	Yes	Pass	
6.9.2	Occupied Bandwidth	Yes	Pass	
7.5	Duty Cycle	Yes	Pass	

Deviations From Test Standards

None

Approved By:

A handwritten signature in black ink, appearing to read 'Victor Ratinoff'.

Victor Ratinoff, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information.

REVISION HISTORY



Revision Number	Description	Date	Page Number
00	None		

ACCREDITATIONS AND AUTHORIZATIONS



United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with ISED.

European Union

European Commission – Within Element, we have a EU Notified Body validated for the EMCD and RED Directives.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIT / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:


<http://portlandcustomer.element.com/ts/scope/scope.htm>

<http://gsi.nist.gov/global/docs/cabs/designations.html>

FACILITIES



California	Minnesota	New York	Oregon	Texas	Washington
Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918	Labs MN01-10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612) 638-5136	Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 554-8214	Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425) 984-6600
NVLAP					
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code: 201049-0	NVLAP Lab Code: 200629-0
Innovation, Science and Economic Development Canada					
2834B-1, 2834B-3	2834E-1, 2834E-3	N/A	2834D-1, 2834D-2	2834G-1	2834F-1
BSMI					
SL2-IN-E-1154R	SL2-IN-E-1152R	N/A	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI					
A-0029	A-0109	N/A	A-0108	A-0201	A-0110
Recognized Phase I CAB for ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA					
US0158	US0175	N/A	US0017	US0191	US0157

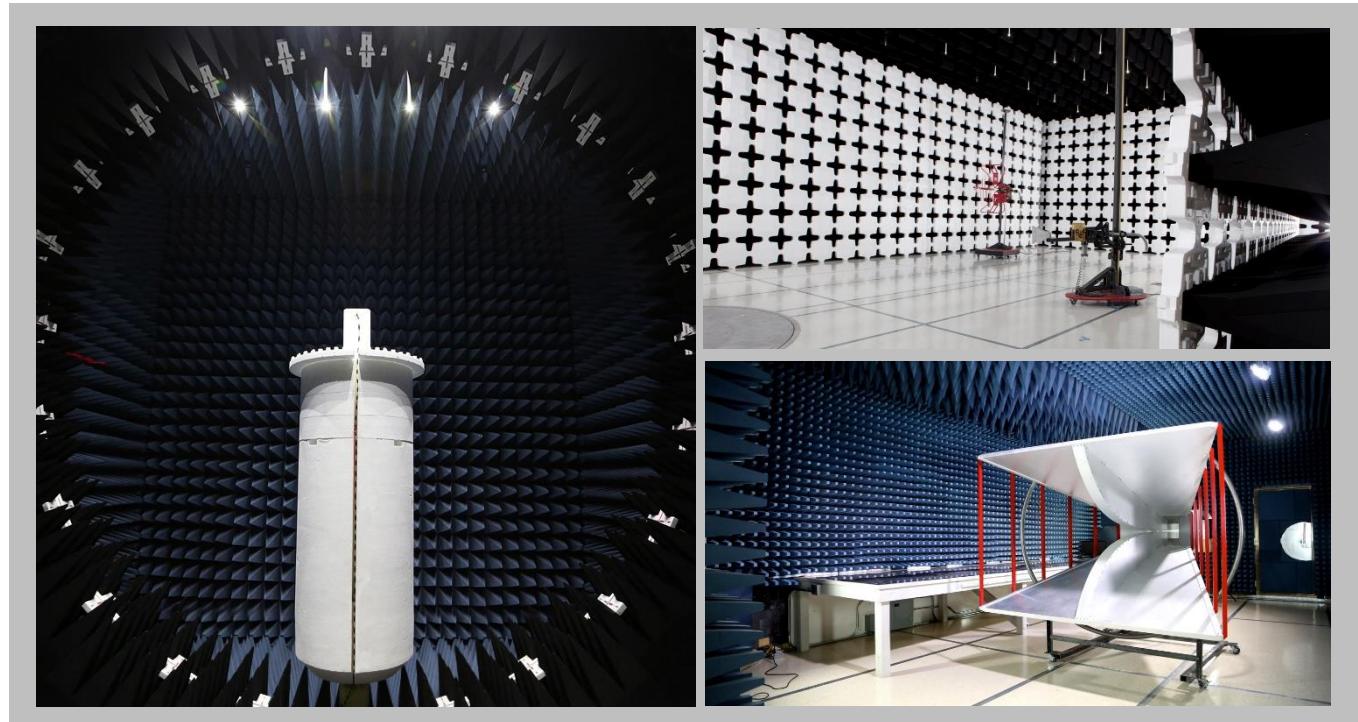

MEASUREMENT UNCERTAINTY



Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.


A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.


Test	+ MU	- MU
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

Test Setup Block Diagrams


Antenna Port Conducted Measurements

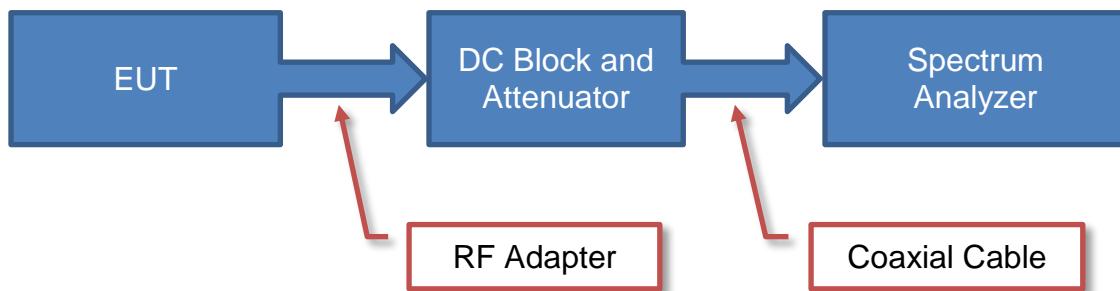

Near Field Test Fixture Measurements

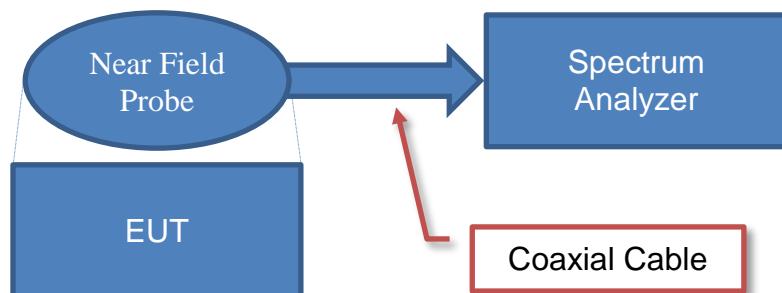

Spurious Radiated Emissions

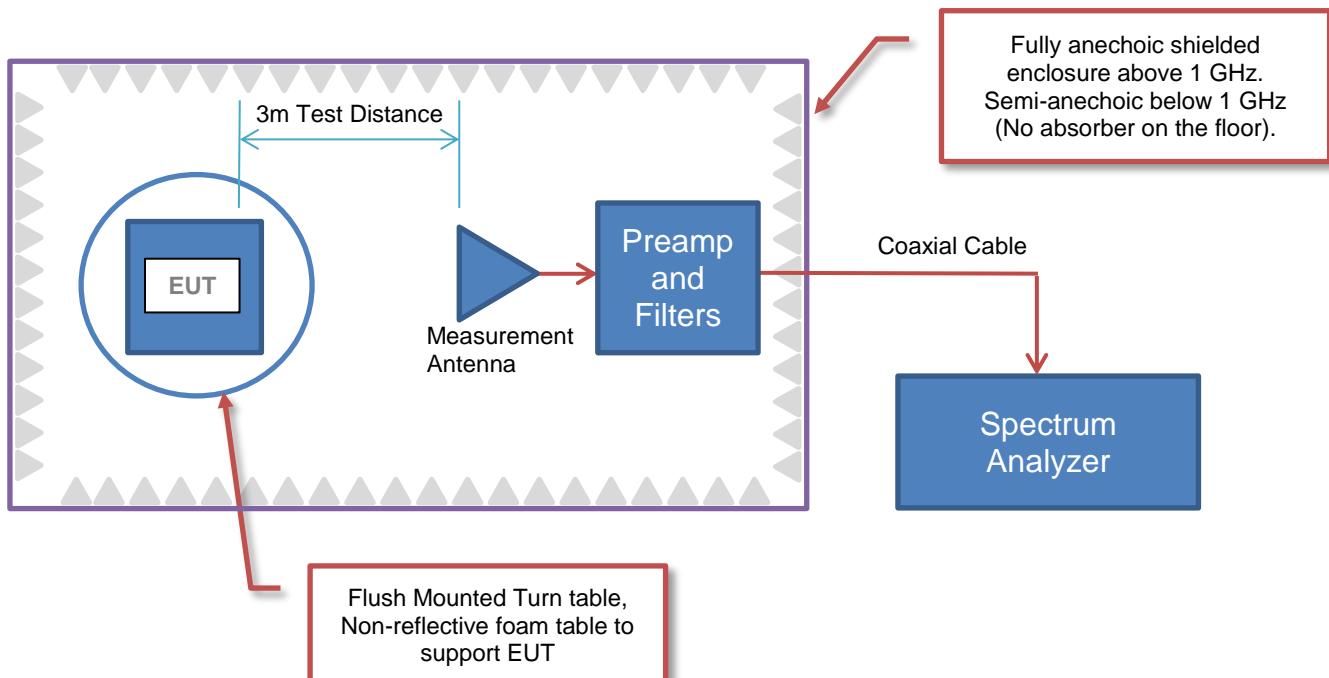

PRODUCT DESCRIPTION



Client and Equipment Under Test (EUT) Information

Company Name:	UTC Fire and Security
Address:	9 Farm Springs Road
City, State, Zip:	Farmington, CT 06034
Test Requested By:	Konstantin Khrustov
Model:	Water Proof Panic Module (PN: 60-578)
First Date of Test:	March 7, 2018
Last Date of Test:	March 8, 2018
Receipt Date of Samples:	March 7, 2018
Equipment Design Stage:	Production
Equipment Condition:	No Damage
Purchase Authorization:	Verified

Information Provided by the Party Requesting the Test

Functional Description of the EUT:
Water Resistant Pendant Panic. Low power transmitter operating at 319.5 MHz
Testing Objective:
To demonstrate compliance to FCC 15.231 specifications.



CONFIGURATIONS

Configuration UTCF0088- 1

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Water Proof Panic Module	UTC Fire and Security	60-578	Sample 26 (TX ID 03BA274)

Configuration UTCF0088- 2

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Water Proof Panic Module	UTC Fire and Security	60-578	Sample 10 (TX ID 036841D)

MODIFICATIONS



2017-1-25

Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	3/7/2018	Field Strength of Fundamental	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
2	3/7/2018	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
3	3/7/2018	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
4	3/8/2018	Duty Cycle	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

FIELD STRENGTH OF FUNDAMENTAL



PSA-ESCI 2017.12.19

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Continuously Transmitting Unmodulated at 319.5 MHz

POWER SETTINGS INVESTIGATED

Battery

CONFIGURATIONS INVESTIGATED

UTCFO088 - 1

FREQUENCY RANGE INVESTIGATED

Start Frequency | 30 MHz | Stop Frequency | 1000 MHz

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Cable	Element	10kHz-1GHz RE Cables	OCH	1-Aug-2017	12 mo
Antenna - Biconilog	Teseq	CBL 6141A	AYE	7-Nov-2017	24 mo
Analyzer - Spectrum Analyzer	Agilent	E4446A	AAV	21-Nov-2017	12 mo

TEST DESCRIPTION

The antennas to be used with the EUT were tested. The EUT was configured for continuous un-modulated CW operation at its single transmit frequency. The field strength of the transmit frequency was maximized by rotating the EUT, adjusting the measurement antenna height and polarization, and manipulating the EUT in 3 orthogonal planes (per ANSI C63.10:2013).

To derive average emission measurements, a duty cycle correction factor was utilized:

Duty Cycle = On time/100 milliseconds (or the period, whichever is less)

Where "On time" = N1L1 +N2L2 +....

Where N1 is the number of type 1 pulses, L1 is length of type 1 pulses, N2 is the number of type 2 pulses, L2 is the length of type 2 pulses, etc.

Therefore, Duty Cycle = (N1L1 +N2L2 +...)/100mS or T, whichever is less. (Where T is the period of the pulse train.)

The measured values for the EUT's pulse train are as follows:

Period = 100 mSec

Pulsewidth of Type 1 Pulse = 0.9792 mSec

Pulsewidth of Type 2 Pulse = 0.1251 mSec

Pulsewidth of Type 3 Pulse = 0.4909 mSec

Number of Type 1 Pulses = 1

Number of Type 2 Pulses = 58

Number of Type 3 Pulses = 1

Duty Cycle = $20 \log [((1)(0.9792) + (58)(0.1251) + (1)(0.4909))/100] = -21.18 \text{ dB}$

The duty cycle correction factor of -21.18 dB was added to the peak readings to mathematically derive the average levels. Peak measurements were made with a resolution bandwidth of 100kHz and a video bandwidth of 300kHz.

FIELD STRENGTH OF FUNDAMENTAL




EmiR5 2018.02.06

PSA-ESCI 2017.12.19

Work Order:	UTCFO088	Date:	7-Mar-2018	
Project:	None	Temperature:	21 °C	
Job Site:	OC10	Humidity:	45% RH	
Serial Number:	Sample 28	Barometric Pres.:	1015 mbar	Tested by: Johnny Candelas
EUT:	Water Proof Panic Module (PN: 60-578)			
Configuration:	1			
Customer:	UTC Fire and Security			
Attendees:	Konstantin Khrustov			
EUT Power:	Battery			
Operating Mode:	Continuously Transmitting Unmodulated at 319.5 MHz			
Deviations:	None			
Comments:	None			

Test Specifications	Test Method
FCC 15.231:2018	ANSI C63.10:2013

Run #	1	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass

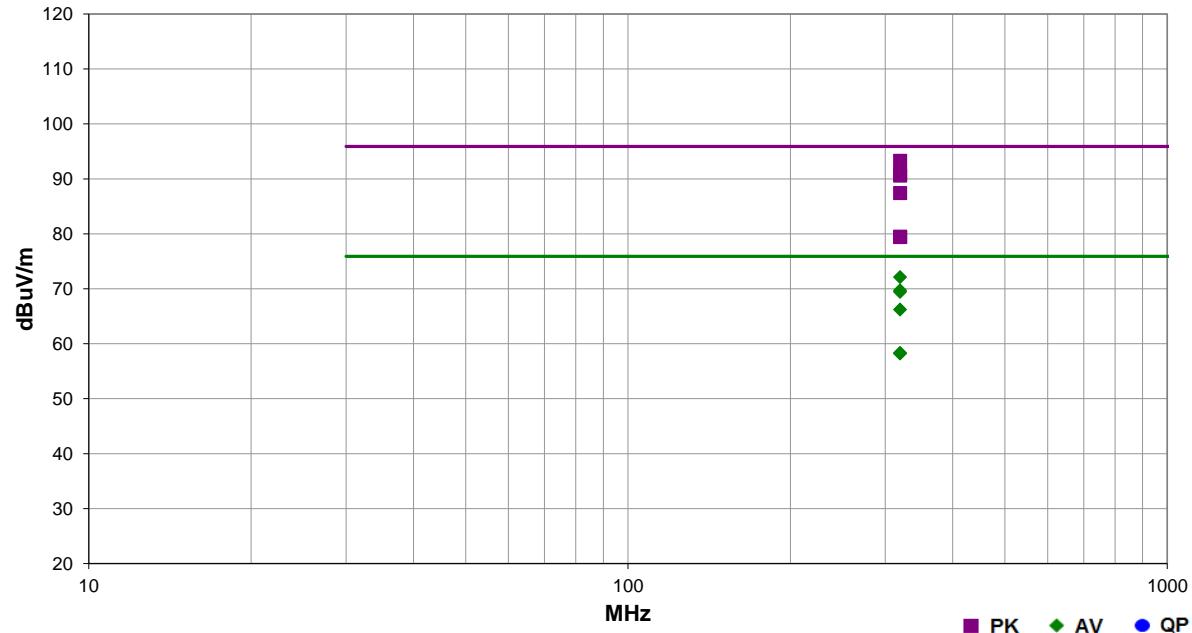

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
319.498	70.5	22.8	1.1	107.0	0.0	Horz	PK	0.0	93.3	95.9	-2.6	EUT Horiz	
319.500	70.5	22.8	1.0	121.0	-21.18	0.0	Horz	AV	0.0	72.1	75.9	-3.8	EUT Horiz
319.498	68.1	22.8	2.3	109.0	0.0	Vert	PK	0.0	90.9	95.9	-5.0	EUT Vert	
319.500	67.8	22.8	1.0	7.0	0.0	Horz	PK	0.0	90.6	95.9	-5.3	EUT on Side	
319.498	68.1	22.8	2.3	109.0	-21.18	0.0	Vert	AV	0.0	69.7	75.9	-6.2	EUT Vert
319.500	67.8	22.8	1.0	7.0	-21.18	0.0	Horz	AV	0.0	69.4	75.9	-6.5	EUT on Side
319.500	64.6	22.8	2.9	295.0	0.0	Vert	PK	0.0	87.4	95.9	-8.5	EUT on Side	
319.500	64.6	22.8	2.9	295.0	-21.18	0.0	Vert	AV	0.0	66.2	75.9	-9.7	EUT on Side
319.503	56.7	22.8	4.0	203.0	0.0	Vert	PK	0.0	79.5	95.9	-16.4	EUT Horiz	
319.502	56.6	22.8	1.0	134.0	0.0	Horz	PK	0.0	79.4	95.9	-16.5	EUT Vert	
319.503	56.7	22.8	4.0	203.0	-21.18	0.0	Vert	AV	0.0	58.3	75.9	-17.6	EUT Horiz
319.502	56.6	22.8	1.0	134.0	-21.18	0.0	Horz	AV	0.0	58.2	75.9	-17.7	EUT Vert

SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2017.12.19

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Continuously Transmitting Unmodulated at 319.5 MHz

POWER SETTINGS INVESTIGATED

Battery

CONFIGURATIONS INVESTIGATED

UTCFO088 - 1

FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	4000 MHz
-----------------	--------	----------------	----------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator	Fairview Microwave	SA18H-10	TKP	NCR	0 mo
Amplifier - Pre-Amplifier	Miteq	AM-1402	AOZ	1-Aug-2017	12 mo
Cable	Element	10kHz-1GHz RE Cables	OCH	1-Aug-2017	12 mo
Antenna - Biconilog	Teseq	CBL 6141A	AYE	7-Nov-2017	24 mo
Amplifier - Pre-Amplifier	Miteq	AMF-4D-010120-30-10P-1	AOP	13-Jul-2017	12 mo
Cable	Element	1-8GHz RE Cables	OCJ	13-Jul-2017	12 mo
Antenna - Double Ridge	ETS Lindgren	3117	AHQ	28-Sep-2017	24 mo
Analyzer - Spectrum Analyzer	Agilent	E4446A	AAY	21-Nov-2017	12 mo

TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequency in each operational band and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These "pre-scans" are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector

PK = Peak Detector

AV = RMS Detector

To derive average emission measurements, a duty cycle correction factor was utilized:

Duty Cycle = On time/100 milliseconds (or the period, whichever is less)

Where "On time" = $N1L1 + N2L2 + \dots$

Where $N1$ is the number of type 1 pulses, $L1$ is length of type 1 pulses, $N2$ is the number of type 2 pulses, $L2$ is the length of type 2 pulses, etc.

Therefore, Duty Cycle = $(N1L1 + N2L2 + \dots)/100\text{mS}$ or T , whichever is less. Where T is the period of the pulse train.

The measured values for the EUT's pulse train are as follows:

Period = 100 mSec

Pulsewidth of Type 1 Pulse = 0.9792 mSec

Pulsewidth of Type 2 Pulse = 0.1251 mSec

Pulsewidth of Type 3 Pulse = 0.4909 mSec

Number of Type 1 Pulses = 1

Number of Type 2 Pulses = 58

Number of Type 3 Pulses = 1

Duty Cycle = $20 \log [((1)(0.9792) + (58)(0.1251) + (1)(0.4909))/100] - 21.18 \text{ dB}$

The duty cycle correction factor of -21.18 dB was added to the peak readings to mathematically derive the average levels. Peak measurements were made with a resolution bandwidth of 100kHz and a video bandwidth of 300kHz for measurements at or below 1GHz. Above 1GHz, a resolution bandwidth of 1MHz and a video bandwidth of 3MHz was used.

SPURIOUS RADIATED EMISSIONS




EmiR5 2018.02.06

PSA-ESCI 2017.12.19

Work Order:	UTCFO088	Date:	8-Mar-2018		
Project:	None	Temperature:	20.5 °C		
Job Site:	OC10	Humidity:	38.2% RH		
Serial Number:	Sample 26	Barometric Pres.:	1019 mbar	Tested by: Johnny Candelas	
EUT:	Water Proof Panic Module (PN: 60-578)				
Configuration:	1				
Customer:	UTC Fire and Security				
Attendees:	Konstantin Khrustov				
EUT Power:	Battery				
Operating Mode:	Continuously Transmitting Unmodulated at 319.5 MHz				
Deviations:	None				
Comments:	None				

Test Specifications		Test Method	
FCC 15.231:2018		ANSI C63.10:2013	

Run #	1	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass

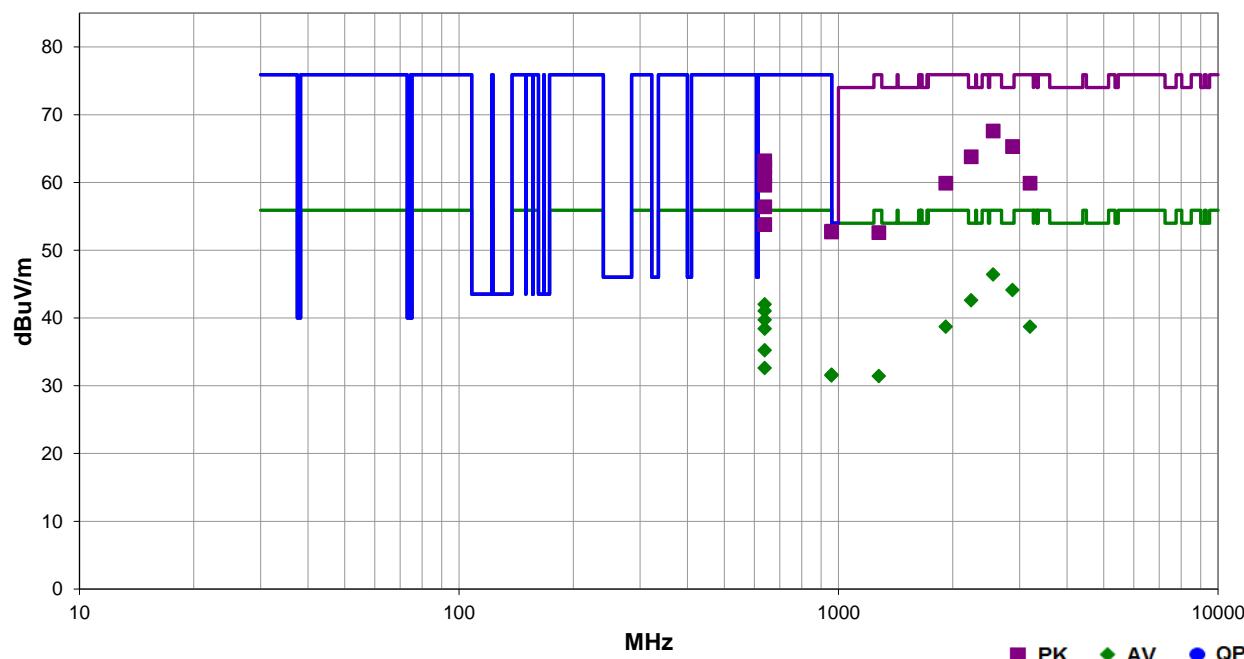

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2555.967	60.7	6.9	2.3	329.0		0.0	Horz	PK	0.0	67.6	75.9	-8.3	EUT Horiz
2875.450	57.0	8.3	1.9	315.0		0.0	Horz	PK	0.0	65.3	74.0	-8.7	EUT Horiz
2555.967	60.7	6.9	2.3	329.0	-21.2	0.0	Horz	AV	0.0	46.4	55.9	-9.5	EUT Horiz
2875.450	57.0	8.3	1.9	315.0	-21.2	0.0	Horz	AV	0.0	44.1	54.0	-9.9	EUT Horiz
2236.608	57.7	6.1	1.2	257.0		0.0	Vert	PK	0.0	63.8	74.0	-10.2	EUT Vert
2236.608	57.7	6.1	1.2	257.0	-21.2	0.0	Vert	AV	0.0	42.6	54.0	-11.4	EUT Vert
639.012	40.0	13.2	1.0	300.0		10.0	Vert	PK	0.0	63.2	75.9	-12.7	EUT Vert
639.012	39.0	13.2	1.4	149.0		10.0	Horz	PK	0.0	62.2	75.9	-13.7	EUT Horiz
639.012	40.0	13.2	1.0	300.0	-21.2	10.0	Vert	AV	0.0	42.0	55.9	-13.9	EUT Vert
639.012	39.0	13.2	1.4	149.0	-21.2	10.0	Horz	AV	0.0	41.0	55.9	-14.9	EUT Horiz
638.983	37.7	13.2	1.6	57.0		10.0	Horz	PK	0.0	60.9	75.9	-15.0	EUT on Side
3194.950	51.1	8.8	1.1	325.0		0.0	Vert	PK	0.0	59.9	75.9	-16.0	EUT Vert
1916.958	54.8	5.1	1.1	70.0		0.0	Vert	PK	0.0	59.9	75.9	-16.0	EUT Vert
638.983	37.7	13.2	1.6	57.0	-21.2	10.0	Horz	AV	0.0	39.7	55.9	-16.2	EUT on Side

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
639.012	36.4	13.2	1.0	103.0		10.0	Vert	PK	0.0	59.6	75.9	-16.3	EUT on Side
3194.950	51.1	8.8	1.1	325.0	-21.2	0.0	Vert	AV	0.0	38.7	55.9	-17.2	EUT Vert
1916.958	54.8	5.1	1.1	70.0	-21.2	0.0	Vert	AV	0.0	38.7	55.9	-17.2	EUT Vert
639.012	36.4	13.2	1.0	103.0	-21.2	10.0	Vert	AV	0.0	38.4	55.9	-17.5	EUT on Side
639.008	33.2	13.2	1.5	201.0		10.0	Horz	PK	0.0	56.4	75.9	-19.5	EUT Vert
639.008	33.2	13.2	1.5	201.0	-21.2	10.0	Horz	AV	0.0	35.2	55.9	-20.7	EUT Vert
639.012	30.6	13.2	1.6	209.0		10.0	Vert	PK	0.0	53.8	75.9	-22.1	EUT Horiz
959.835	22.3	20.5	3.3	3.0		10.0	Horz	PK	0.0	52.8	75.9	-23.1	EUT Horiz
957.775	22.3	20.4	1.0	246.0		10.0	Vert	PK	0.0	52.7	75.9	-23.2	EUT Vert
639.012	30.6	13.2	1.6	209.0	-21.2	10.0	Vert	AV	0.0	32.6	55.9	-23.3	EUT Horiz
1277.983	51.7	0.9	1.4	58.0		0.0	Vert	PK	0.0	52.6	75.9	-23.3	EUT Vert
959.835	22.3	20.5	3.3	3.0	-21.2	10.0	Horz	AV	0.0	31.6	55.9	-24.3	EUT Horiz
957.775	22.3	20.4	1.0	246.0	-21.2	10.0	Vert	AV	0.0	31.5	55.9	-24.4	EUT Vert
1277.983	51.7	0.9	1.4	58.0	-21.2	0.0	Vert	AV	0.0	31.4	55.9	-24.5	EUT Vert

OCCUPIED BANDWIDTH



XMIT 2017.12.13

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Probe - Near Field Set	Com-Power	PS-400	IPF	NCR	NCR
Analyzer - Spectrum Analyzer	Agilent	E4446A	AAY	21-Nov-17	21-Nov-18

TEST DESCRIPTION

A near-field probe was placed near the transmitter. A low-loss coaxial cable was used to connect the near-field probe to the spectrum analyzer. The EUT was transmitting at its maximum data rate.

The 20 dB occupied bandwidth is required to be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz.

OCCUPIED BANDWIDTH




XMIT 2017.12.13

EUT:	Water Proof Panic Module (PN: 60-578)		Work Order:	UTCFO088	
Serial Number:	Sample 10		Date:	7-Mar-18	
Customer:	UTC Fire and Security		Temperature:	21.9 °C	
Attendees:	Konstantin Khrustov		Humidity:	38.1% RH	
Project:	None		Barometric Pres.:	1018 mbar	
Tested by:	Johnny Candelas	Power:	Battery	Job Site:	OC10
TEST SPECIFICATIONS			Test Method		
FCC 15.231:2018			ANSI C63.10:2013		
COMMENTS					
Limit based on center frequency: 319.5 MHz * 0.25% = 0.79875 MHz.					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	2	Signature			
			Value	Limit	Result
319.5 MHz			26.485 kHz	798.75 kHz	Pass

OCCUPIED BANDWIDTH



XMI 2017.12.13

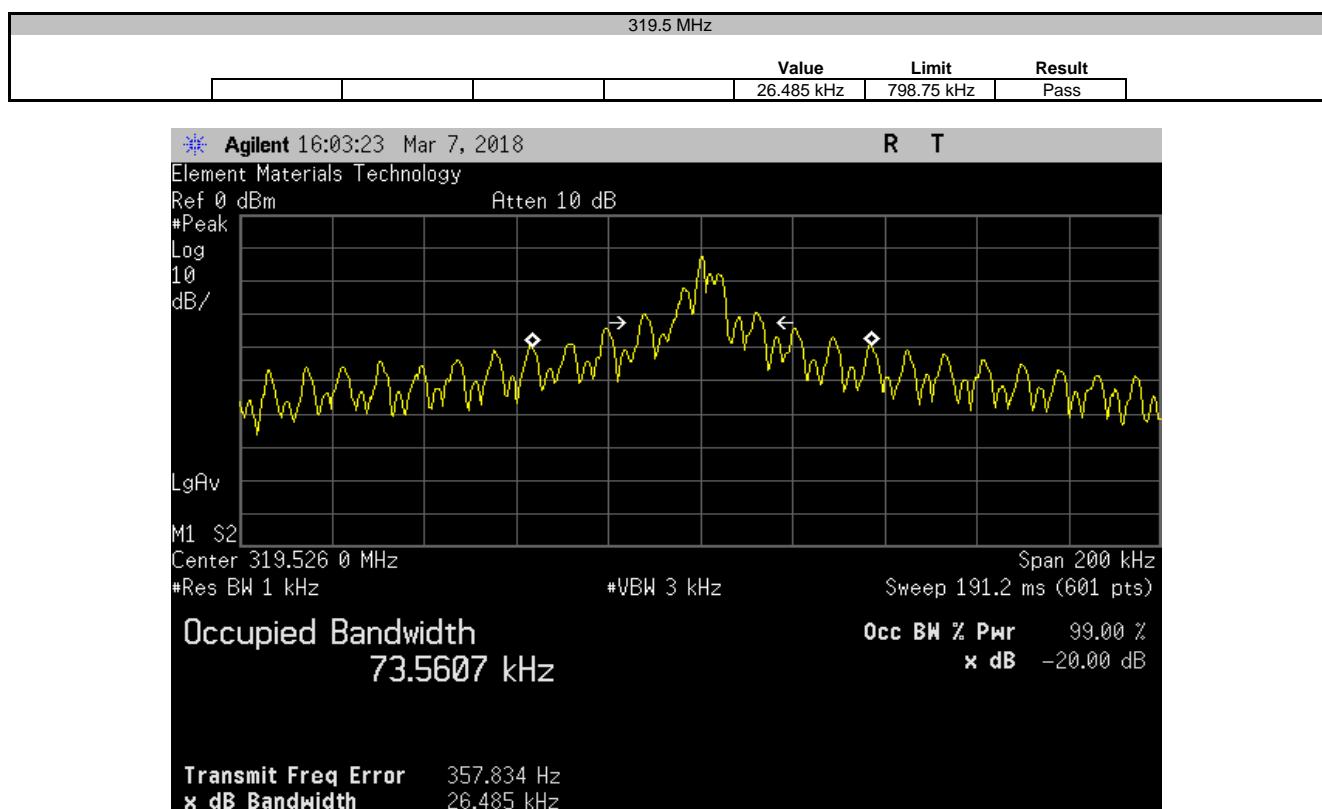

DUTY CYCLE



XMit 2017.12.13

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Probe - Near Field Set	Com-Power	PS-400	IPF	NCR	NCR
Analyzer - Spectrum Analyzer	Agilent	E4446A	AAY	21-Nov-17	21-Nov-18

TEST DESCRIPTION

A near-field probe was placed near the transmitter. A low-loss coaxial cable was used to connect the near-field probe to the spectrum analyzer. The EUT was transmitting at its maximum data rate.

For software controlled or pre-programmed devices, the manufacturer shall declare the duty cycle class or classes for the equipment under test. For manually operated or event dependant devices, with or without software controlled functions, the manufacturer shall declare whether the device once triggered, follows a pre-programmed cycle, or whether the transmission is constant until the trigger is released or manually reset. The manufacturer shall also give a description of the application for the device and include a typical usage pattern. The typical usage pattern as declared by the manufacturer shall be used to determine the duty cycle and hence the duty class.

Where an acknowledgement is required, the additional transmitter on-time shall be included and declared by the manufacturer.

To derive average emission measurements, a duty cycle correction factor was utilized:

Duty Cycle = On time/100 milliseconds (or the period, whichever is less)

Where "On time" = $N1L1 + N2L2 + \dots$

Where $N1$ is the number of type 1 pulses, $L1$ is length of type 1 pulses, $N2$ is the number of type 2 pulses, $L2$ is the length of type 2 pulses, etc.

Therefore, Duty Cycle = $(N1L1 + N2L2 + \dots)/100\text{mS}$ or T , whichever is less. (Where T is the period of the pulse train.)
The measured values for the EUT's pulse train are as follows:

Period = 100 mSec

Pulsewidth of Type 1 Pulse = 0.9792 mSec

Pulsewidth of Type 2 Pulse = 0.1251 mSec

Pulsewidth of Type 3 Pulse = 0.4909 mSec

Number of Type 1 Pulses = 1

Number of Type 2 Pulses = 58

Number of Type 3 Pulses = 1

Duty Cycle = $20 \log [((1)(0.9792) + (58)(0.1251) + (1)(0.4909))/100] = -21.18 \text{ dB}$

The duty cycle correction factor of -21.18 dB was added to the peak readings to mathematically derive the average levels. Peak measurements were made with a resolution bandwidth of 100kHz and a video bandwidth of 300kHz.

DUTY CYCLE



XMIT 2017.12.13


EUT:	Water Proof Panic Module (PN: 60-578)		Work Order:	UTCFO088			
Serial Number:	Sample 10		Date:	8-Mar-18			
Customer:	UTC Fire and Security		Temperature:	21.8 °C			
Attendees:	Konstantin Khrustov		Humidity:	37.3% RH			
Project:	None		Barometric Pres.:	1018 mbar			
Tested by:	Johnny Candelas	Power:	Battery	Job Site:	OC10		
TEST SPECIFICATIONS			Test Method				
FCC 15.231:2018			ANSI C63.10:2013				
COMMENTS							
<p>Period between bursts is greater than 100 mS. Initial amplitude increase on the 30 mS screen capture is due to the system becoming active and is below the spurious limits, so this was excluded from the "on time" of the duty cycle calculation.</p>							
DEVIATIONS FROM TEST STANDARD							
None							
Configuration #	2	Signature					
			Pulse Width Type 1 (ms)	Pulse Width Type 2 (ms)	Pulse Width Type 3 (ms)		
30ms Interval			0.9792	0.1251	0.4909	N/A	N/A
100ms Interval			N/A	N/A	N/A	N/A	N/A
1s Interval			N/A	N/A	N/A	N/A	N/A
5s Interval			N/A	N/A	N/A	N/A	N/A
10s Interval			N/A	N/A	N/A	N/A	N/A

DUTY CYCLE




XMI 2017.12.13

30ms Interval						Limit	Result
Pulse Width	Pulse Width	Pulse Width	Type 1 (ms)	Type 2 (ms)	Type 3 (ms)		
			0.9792	0.1251	0.4909	N/A	N/A

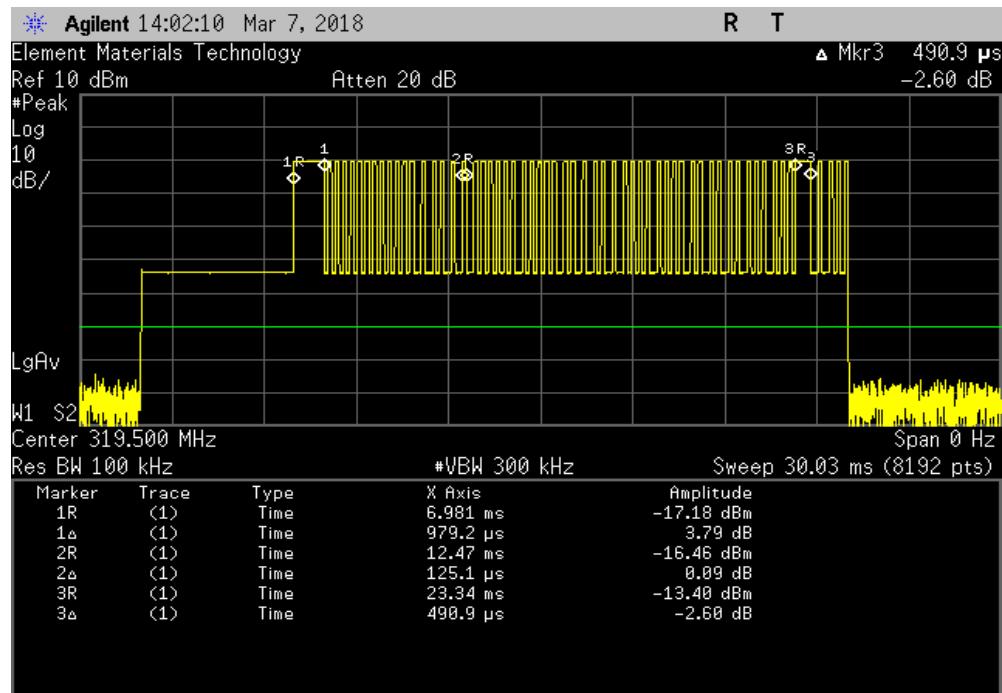

100ms Interval						Limit	Result
Pulse Width	Pulse Width	Pulse Width	Type 1 (ms)	Type 2 (ms)	Type 3 (ms)		
			N/A	N/A	N/A	N/A	N/A

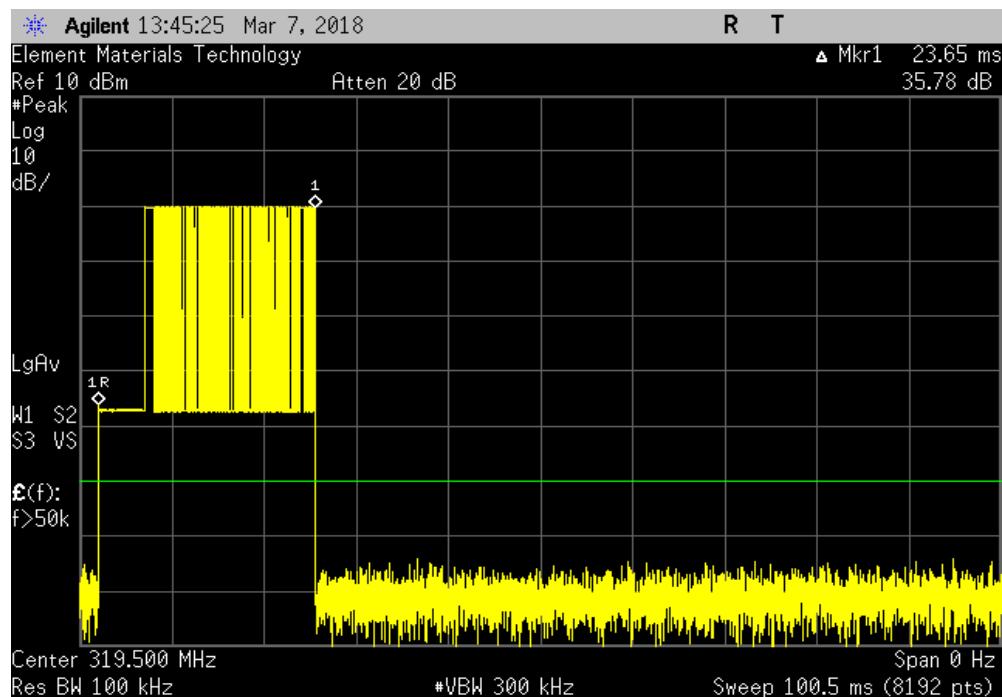


DUTY CYCLE




XMI 2017.12.13

1s Interval						
Pulse Width	Pulse Width	Pulse Width	Limit	Result		
Type 1 (ms)	Type 2 (ms)	Type 3 (ms)				
N/A	N/A	N/A	N/A	N/A		

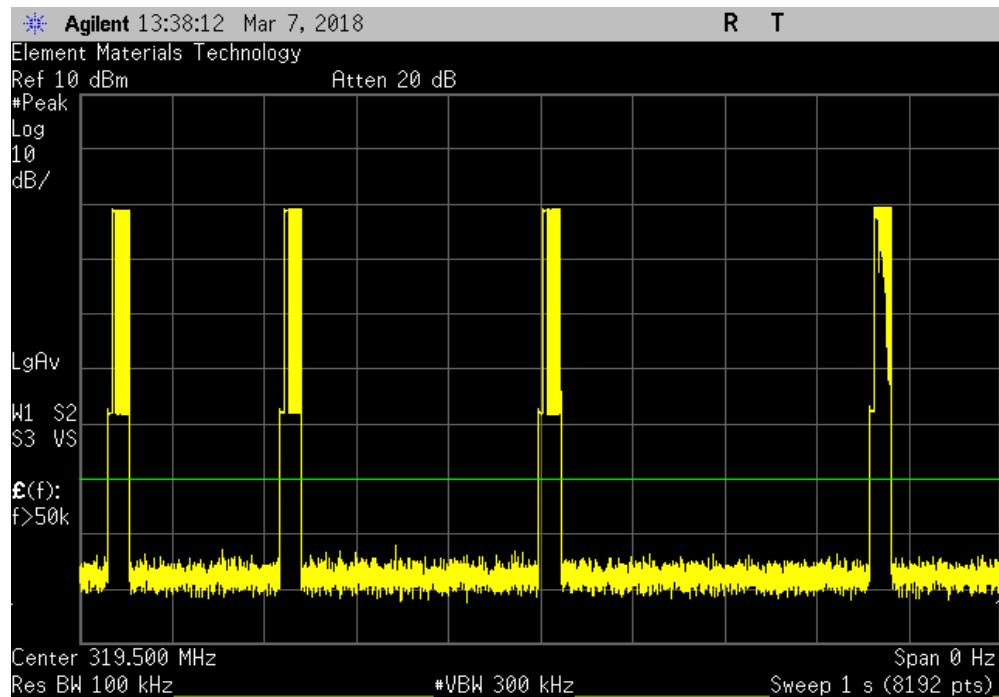

5s Interval						
Pulse Width	Pulse Width	Pulse Width	Limit	Result		
Type 1 (ms)	Type 2 (ms)	Type 3 (ms)				
N/A	N/A	N/A	N/A	N/A		

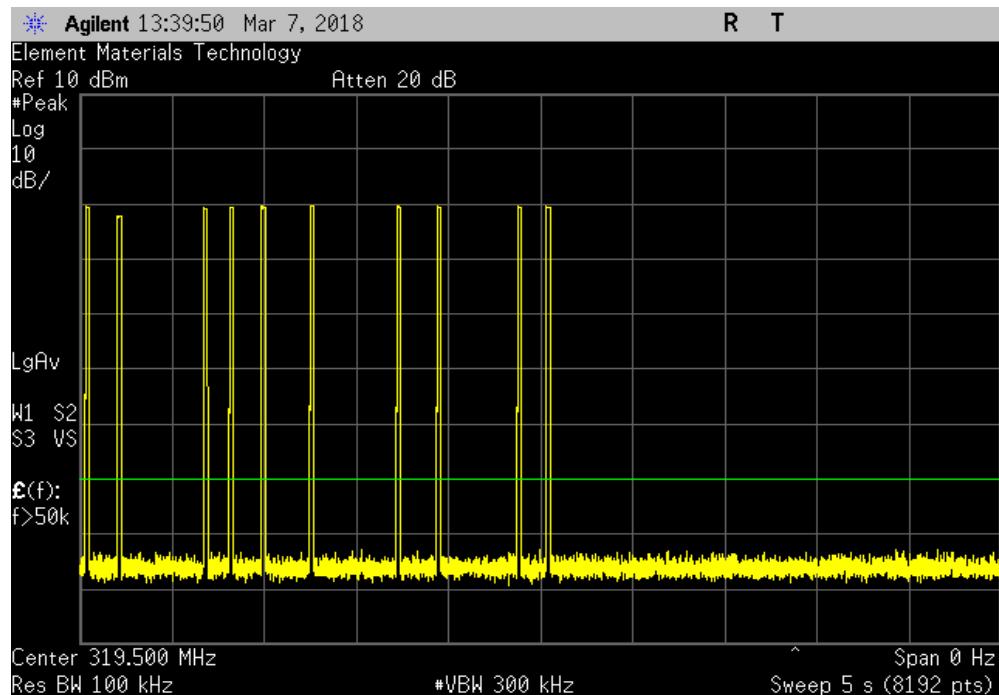

DUTY CYCLE



XMT 2017.12.13

10s Interval						
Pulse Width	Pulse Width	Pulse Width	Limit	Result		
Type 1 (ms)	Type 2 (ms)	Type 3 (ms)				
	N/A	N/A	N/A	N/A	N/A	

