

RADIATED EMISSIONS



Test Report #: WC405471 Run 1 Test Area: LTS

EUT Model #: 56-869-95R A3 Date: 11/29/04

EUT Serial #: 1 EUT Power: BATTERY Temperature: 20.0 °C

Test Method: FCC PART 15 - C Air Pressure: 99.0 kPa

Customer: GE SECURITY Rel. Humidity: 25.0 %

EUT Description: 319.5MHz AM 4 BUTTON DESIGNER FOB

Notes: FCC ID# B4Z-869-FOB

Data File Name: 5471.dat

Page: 1 of 2

List of measurements for run #: 1

FREQ	LEVEL (dBuV)	CABLE / ANT / PREAMP / ATTEN (dB)	FINAL (dBuV / m)	POL / HGT / AZ (m)(DEG)	DELTA1	DELTA2
MAXIMIZED.						
319.417 MHz	94.7 Pk	1.5 / 13.76 / 26.67 / 0.0	83.29	V / 1.50 / 135	n/a	n/a
638.917 MHz	69.1 Pk	2.1 / 19.39 / 27.05 / 0.0	63.54	V / 1.50 / 135	n/a	n/a
958.423 MHz	45.55 Pk	2.68 / 22.61 / 26.52 / 0.0	44.33	V / 1.00 / 70	n/a	n/a
1.278 GHz	52.7 Pk	3.1 / 24.86 / 26.3 / 0.0	54.36	V / 1.00 / 0	n/a	n/a
1.598 GHz	42.05 Pk	3.52 / 26.11 / 26.5 / 0.0	45.18	V / 1.00 / 0	n/a	n/a
1.917 GHz	56.0 Pk	3.88 / 27.64 / 43.28 / 0.0	44.24	V / 1.30 / 270	n/a	n/a
2.237 GHz	66.65 Pk	4.11 / 28.34 / 44.04 / 0.0	55.06	V / 1.10 / 0	n/a	n/a
2.556 GHz	73.5 Pk	4.4 / 28.84 / 44.5 / 0.0	62.24	V / 1.10 / 228	n/a	n/a
2.876 GHz	65.7 Pk	4.63 / 29.71 / 44.92 / 0.0	55.12	V / 1.00 / 218	n/a	n/a
3.195 GHz	59.95 Pk	4.94 / 30.46 / 45.15 / 0.0	50.2	H / 1.00 / 0	n/a	n/a
END OF SCAN.						

Tested by: RMJ _____
Printed Signature

Reviewed
by: _____
Printed Signature

RADIATED EMISSIONS



Test Report #: WC405471 Run 1 Test Area: LTS

EUT Model #: 56-869-95R A3 Date: 11/29/04

EUT Serial #: 1 EUT Power: BATTERY Temperature: 20.0 °C

Test Method: FCC PART 15 - C Air Pressure: 99.0 kPa


Customer: GE SECURITY Rel. Humidity: 25.0 %

EUT Description: 319.5MHz AM 4 BUTTON DESIGNER FOB

Notes: FCC ID# B4Z-869-FOB

Data File Name: 5471.dat Page: 2 of 2

Graph:

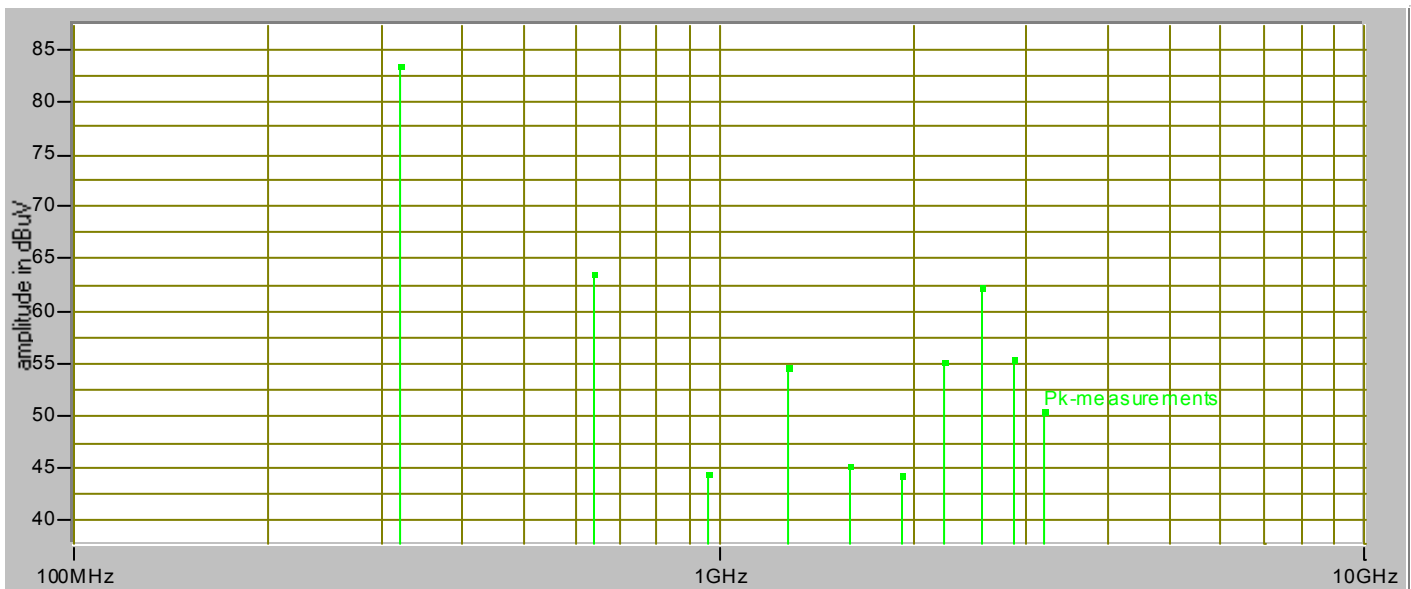

Tested by: RMJ Printed Signature

Reviewed by: Printed Signature