



# FCC SAR Test Report

**APPLICANT** : Hewlett-Packard Company, Palm GBU  
**EQUIPMENT** : Phone  
**BRAND NAME** : HP  
**MODEL NAME** : HSTNH-F30CE  
**FCC ID** : B94HHF30CE  
**STANDARD** : FCC 47 CFR Part 2 (2.1093)  
IEEE C95.1-1991  
IEEE 1528-2003  
FCC OET Bulletin 65 Supplement C (Edition 01-01)

The product was received on Mar. 08, 2011 and completely tested on May 06, 2011. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Roy Wu / Manager



## **SPORTON INTERNATIONAL INC.**

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



## Table of Contents

Revision History.....	3
1. Statement of Compliance .....	4
2. Administration Data .....	5
2.1 Testing Laboratory.....	5
2.2 Applicant.....	5
2.3 Manufacturer .....	5
2.4 Application Details .....	5
3. General Information .....	6
3.1 Description of Device Under Test (DUT).....	6
3.2 Applied Standards .....	7
3.3 Device Category and SAR Limits .....	7
3.4 Test Conditions .....	7
3.4.1 Ambient Condition .....	7
3.4.2 Test Configuration.....	7
4. Specific Absorption Rate (SAR).....	8
4.1 Introduction.....	8
4.2 SAR Definition .....	8
5. SAR Measurement System.....	9
5.1 E-Field Probe.....	10
5.1.1 E-Field Probe Specification .....	10
5.1.2 E-Field Probe Calibration.....	11
5.2 Data Acquisition Electronics (DAE).....	11
5.3 Robot.....	11
5.4 Measurement Server .....	12
5.5 Phantom .....	13
5.6 Device Holder .....	14
5.7 Data Storage and Evaluation.....	16
5.7.1 Data Storage .....	16
5.7.2 Data Evaluation .....	16
5.8 Test Equipment List .....	18
6. Tissue Simulating Liquids.....	19
7. Uncertainty Assessment .....	21
8. SAR Measurement Evaluation .....	24
8.1 Purpose of System Performance check .....	24
8.2 System Setup .....	24
8.3 Validation Results .....	25
9. DUT Testing Position .....	27
10. Measurement Procedures .....	30
10.1 Spatial Peak SAR Evaluation .....	30
10.2 Area & Zoom Scan Procedures.....	31
10.3 Volume Scan Procedures .....	31
10.4 SAR Averaged Methods .....	31
10.5 Power Drift Monitoring.....	31
11. SAR Test Results .....	32
11.1 Conducted Power (Unit: dBm).....	32
11.2 Test Records for Head SAR Test .....	33
11.3 Test Records for Body-worn SAR Test.....	34
11.4 Test Records for Hotspot SAR Test .....	35
11.5 Simultaneous Transmission SAR Analysis and Measurements.....	36
12. References.....	37

Appendix A. Plots of System Performance Check

Appendix B. Plots of SAR Measurement

Appendix C. DASYS Calibration Certificate



### Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA130815B	Rev. 01	Initial issue of report	May 24, 2011



### 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Hewlett-Packard Company, Palm GBU Phone HP HSTNH-F30CE** are as follows (with expanded uncertainty 21.4 % for 300 MHz to 3 GHz, and 25.6% for 3 GHz to 6 GHz).

Band	Position	SAR <sub>1g</sub> (W/kg)
802.11b/g/n	Head	0.108
	Body (1.0 cm Gap)	0.156
802.11a/n	Head	0.463
	Body (1.5 cm Gap)	1.17
Bluetooth	Head	N/A
	Body	N/A

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1991, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003 and FCC OET Bulletin 65 Supplement C (Edition 01-01).



**2. Administration Data**

**2.1 Testing Laboratory**

<b>Test Site</b>	SPORTON INTERNATIONAL INC.
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978

**2.2 Applicant**

<b>Company Name</b>	Hewlett-Packard Company, Palm GBU
<b>Address</b>	950 W Maude Avenue, Sunnyvale, CA 94085

**2.3 Manufacturer**

<b>Company Name</b>	Hewlett-Packard Company, Palm GBU
<b>Address</b>	950 W Maude Avenue, Sunnyvale, CA 94085

**2.4 Application Details**

<b>Date of Receipt of Application</b>	Mar. 08, 2011
<b>Date of Start during the Test</b>	May 01, 2011
<b>Date of End during the Test</b>	May 06, 2011



### 3. General Information

#### 3.1 Description of Device Under Test (DUT)

Product Feature & Specification	
DUT Type	Phone
Brand Name	HP
Model Name	HSTNH-F30CE
FCC ID	B94HHF30CE
Tx Frequency	802.11b/g/n : 2400 MHz ~ 2483.5 MHz 802.11a/n : 5150 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz; 5725 MHz ~ 5825 MHz; 5725 MHz ~ 5850 MHz Bluetooth : 2400 MHz ~ 2483.5 MHz
Rx Frequency	802.11b/g/n : 2400 MHz ~ 2483.5 MHz 802.11a/n : 5150 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz; 5725 MHz ~ 5825 MHz; 5725 MHz ~ 5850 MHz Bluetooth : 2400 MHz ~ 2483.5 MHz
Maximum Output Power to Antenna	802.11b : 16.54 dBm 802.11g : 15.49 dBm 802.11n (2.4GHz, BW 20MHz) : 15.73 dBm 802.11a : 16.2 dBm 802.11n (5GHz, BW 20MHz) : 16.04 dBm 802.11n (5GHz, BW 40MHz) : 16.32 dBm Bluetooth : 6.32 dBm
Antenna Type	PIFA Antenna
HW Version	D2
SW Version	WebOS 2.3
Type of Modulation	802.11b : DSSS (BPSK / QPSK / CCK) 802.11a/g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
DUT Stage	Identical Prototype

**Remark:**

1. The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The WLAN function of this device supports wireless hotspot mode only for 2.4 GHz band and 5 .GHz band does not support hotspot mode.
3. The WLAN and Bluetooth share the same antenna, and Bluetooth power is less than WLAN; thus Bluetooth SAR tests are excluded
4. For 2.4GHz, SAR tests are using 11b mode. For 5 GHz, SAR tests are using 11a mode, except 11n-HT20 CH64 and 11n-HT40 CH134 are also evaluated due to higher power than 11a mode.



### 3.2 Applied Standards

The Specific Absorption Rate (SAR) testing specification, method and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- IEEE C95.1-1991
- IEEE 1528-2003
- FCC OET Bulletin 65 Supplement C (Edition 01-01)
- FCC KDB 248227 D01 v01r02
- FCC KDB 648474 D01 v01r05

### 3.3 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

### 3.4 Test Conditions

#### 3.4.1 **Ambient Condition**

Ambient Temperature	20 to 24 °C
Humidity	< 60 %

#### 3.4.2 **Test Configuration**

For WLAN SAR testing, WLAN engineering testing software installed on the DUT can provide continuous transmitting RF signal. This RF signal utilized in SAR measurement has almost 100% duty cycle and its crest factor is 1.

The data rates for WLAN SAR testing were set in 1Mbps for 802.11b, 6Mbps for 802.11g, 6Mbps for 802.11a, and M0 for 802.11n due to the highest RF output power.

## **4. Specific Absorption Rate (SAR)**

### **4.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **4.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = c \left( \frac{\delta T}{\delta t} \right)$$


Where: C is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 5. SAR Measurement System

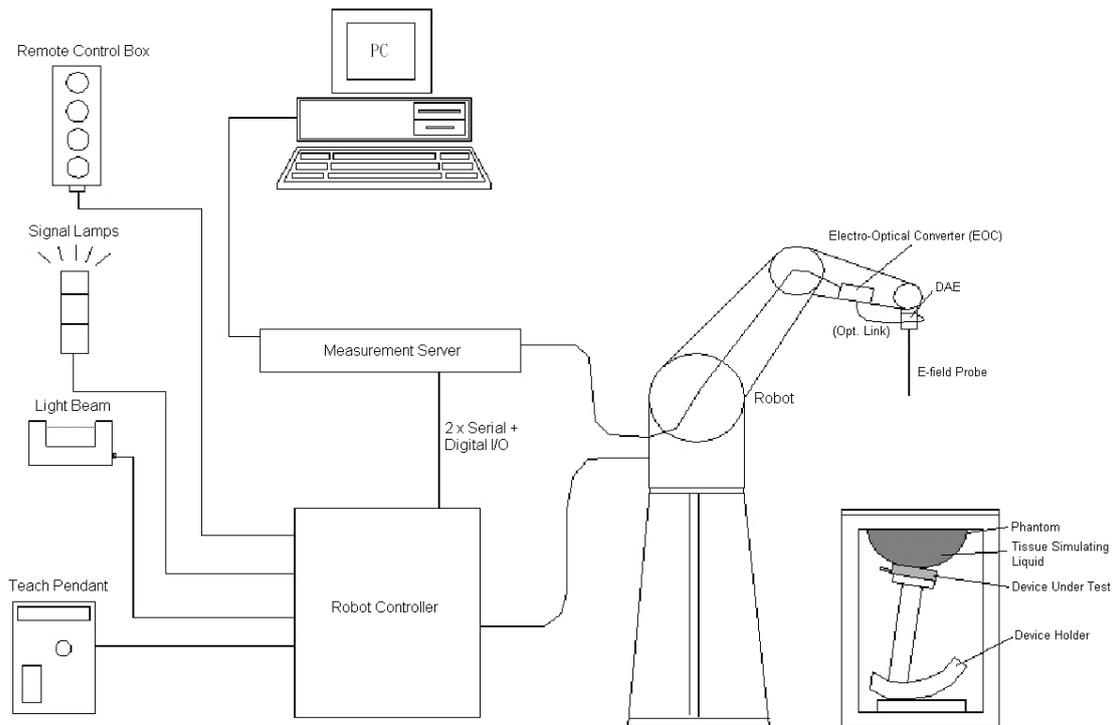

**Fig 5.1 SPEAG DASY4 or DASY5 System Configurations**

The DASY4 or DASY5 system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (ECO) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY4 or DASY5 software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Some of the components are described in details in the following sub-sections.

### 5.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

#### 5.1.1 E-Field Probe Specification

##### <ET3DV6>

<b>Construction</b>	Symmetrical design with triangular core Built-in optical fiber for surface detection system. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
<b>Frequency</b>	10 MHz to 3 GHz; Linearity: $\pm 0.2$ dB
<b>Directivity</b>	$\pm 0.2$ dB in HSL (rotation around probe axis) $\pm 0.4$ dB in HSL (rotation normal to probe axis)
<b>Dynamic Range</b>	5 $\mu$ W/g to 100 mW/g; Linearity: $\pm 0.2$ dB
<b>Dimensions</b>	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 6.8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.7 mm



Fig 5.2 Photo of ET3DV6

##### <EX3DV4 Probe>

<b>Construction</b>	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
<b>Frequency</b>	10 MHz to 6 GHz; Linearity: $\pm 0.2$ dB
<b>Directivity</b>	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)
<b>Dynamic Range</b>	10 $\mu$ W/g to 100 mW/g; Linearity: $\pm 0.2$ dB (noise: typically $< 1$ $\mu$ W/g)
<b>Dimensions</b>	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm



Fig 5.3 Photo of EX3DV4

### 5.1.2 E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy shall be evaluated and within  $\pm 0.25$  dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

### 5.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.




**Fig 5.4 Photo of DAE**

### 5.3 Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90BL; DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability  $\pm 0.035$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

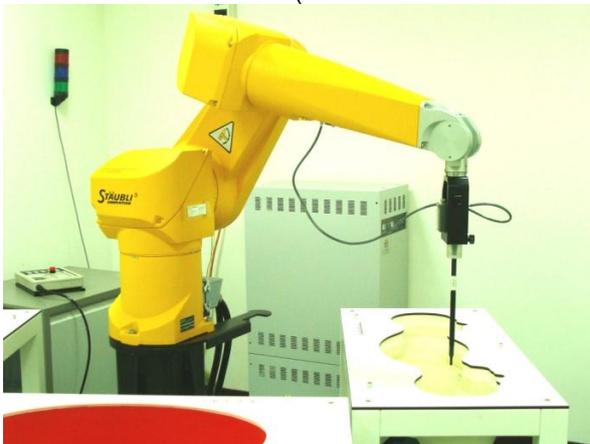

**Fig 5.5 Photo of DASY4**



**Fig 5.6 Photo of DASY5**

### **5.4 Measurement Server**

The measurement server is based on a PC/104 CPU board with CPU (DASY4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chipdisk (DASY4: 32 MB; DASY5: 128 MB), RAM (DASY4: 64 MB, DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



**Fig 5.7 Photo of Server for DASY4**



**Fig 5.8 Photo of Server for DASY5**

**5.5 Phantom**

**<SAM Twin Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
<b>Filling Volume</b>	Approx. 25 liters
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom



**Fig 5.9 Photo of SAM Phantom**

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI4 Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)
<b>Filling Volume</b>	Approx. 30 liters
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm



**Fig 5.10 Photo of ELI4 Phantom**

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## 5.6 Device Holder

### <Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of  $\pm 0.5$  mm would produce a SAR uncertainty of  $\pm 20$  %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles.


The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig 5.11 Device Holder

**<Laptop Extension Kit>**

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.

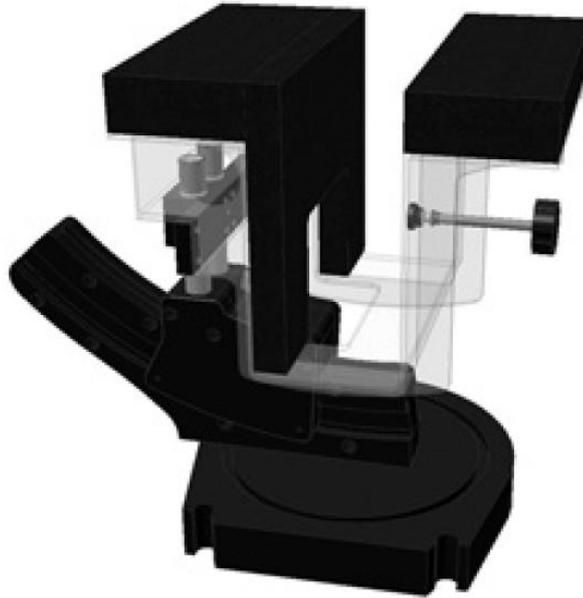

**Fig 5.12 Laptop Extension Kit**



## 5.7 Data Storage and Evaluation

### 5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### 5.7.2 Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

<b>Probe parameters :</b>	- Sensitivity	Norm <sub>i</sub> , a <sub>10</sub> , a <sub>11</sub> , a <sub>12</sub>
	- Conversion factor	ConvF <sub>i</sub>
	- Diode compression point	dcp <sub>i</sub>
<b>Device parameters :</b>	- Frequency	f
	- Crest factor	cf
<b>Media parameters :</b>	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with  $V_i$  = compensated signal of channel i, (i = x, y, z)  
 $U_i$  = input signal of channel i, (i = x, y, z)  
 cf = crest factor of exciting field (DASY parameter)  
 dcp<sub>i</sub> = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with  $V_i$  = compensated signal of channel i, (i = x, y, z)  
 Norm<sub>i</sub> = sensor sensitivity of channel i, (i = x, y, z),  $\mu\text{V}/(\text{V/m})^2$  for E-field Probes  
 ConvF = sensitivity enhancement in solution  
 a<sub>ij</sub> = sensor sensitivity factors for H-field probes  
 f = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel i in V/m  
 $H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g  
 $E_{\text{tot}}$  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in  $\text{g}/\text{cm}^3$

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.



**5.8 Test Equipment List**

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	Dosimetric E-Field Probe	ET3DV6	1787	May 18, 2010	May 17, 2011
SPEAG	Dosimetric E-Field Probe	EX3DV4	3731	Jul. 16, 2010	Jul. 15, 2011
SPEAG	Dosimetric E-Field Probe	EX3DV4	3697	Nov. 23, 2010	Nov. 22, 2011
SPEAG	2450MHz System Validation Kit	D2450V2	735	Jun. 17, 2010	Jun. 16, 2011
SPEAG	5GHz System Validation Kit	D5GHzV2	1040	Jun. 23, 2010	Jun. 22, 2011
SPEAG	Data Acquisition Electronics	DAE3	577	Jan. 13, 2011	Jan. 12, 2012
SPEAG	Data Acquisition Electronics	DAE4	778	Oct. 22, 2010	Oct. 21, 2011
SPEAG	Data Acquisition Electronics	DAE4	905	Jun. 22, 2010	Jun. 21, 2011
SPEAG	Device Holder	N/A	N/A	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1303	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1383	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1446	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1478	NCR	NCR
SPEAG	ELI4 Phantom	QD 0VA 001 BB	1026	NCR	NCR
SPEAG	ELI4 Phantom	QD 0VA 001 BA	1029	NCR	NCR
Agilent	PNA Series Network Analyzer	E8358A	US40260131	May 06, 2010	May 05, 2011
Agilent	Wireless Communication Test Set	E5515C	MY48360820	Jan. 12, 2010	Jan. 11, 2012
Agilent	Wireless Communication Test Set	E5515C	GB46311322	Mar. 23, 2011	Mar. 22, 2013
R&S	Universal Radio Communication Tester	CMU200	114256	Feb. 08, 2010	Feb. 07, 2012
Agilent	Dielectric Probe Kit	85070D	US01440205	NCR	NCR
Agilent	Dual Directional Coupler	778D	50422	NCR	NCR
AR	Power Amplifier	5S1G4M2	0328767	NCR	NCR

**Table 5.1 Test Equipment List**

**Note:** The calibration certificate of DASY can be referred to appendix C of this report.

## 6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.2.

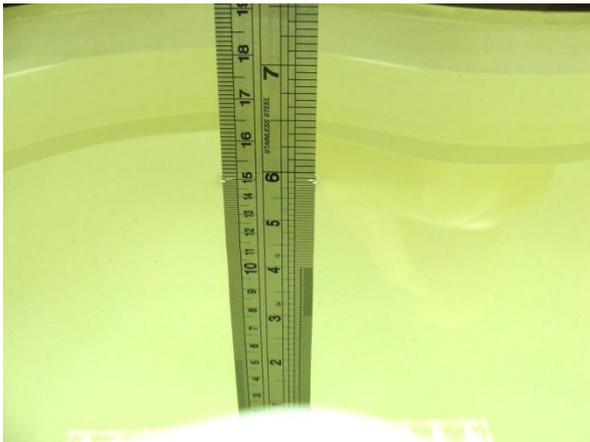


Fig 6.1 Photo of Liquid Height for Head SAR



Fig 6.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
<b>For Head</b>								
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
<b>For Body</b>								
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7

Table 6.1 Recipes of Tissue Simulating Liquid

The following table gives the targets for tissue simulating liquid.

Frequency (MHz)	Liquid Type	Conductivity ( $\sigma$ )	$\pm 5\%$ Range	Permittivity ( $\epsilon_r$ )	$\pm 5\%$ Range
2450	Head	1.80	1.71 ~ 1.89	39.2	37.2 ~ 41.2
5200	Head	4.66	4.43 ~ 4.89	36.0	34.2 ~ 37.8
5500	Head	4.96	4.71 ~ 5.21	35.6	33.8 ~ 37.4
5800	Head	5.27	5.01 ~ 5.53	35.3	33.5 ~ 37.1
2450	Body	1.95	1.85 ~ 2.05	52.7	50.1 ~ 55.3
5200	Body	5.30	5.04 ~ 5.57	49.0	46.6 ~ 51.5
5500	Body	5.65	5.37 ~ 5.93	48.6	46.2 ~ 51.0
5800	Body	6.00	5.70 ~ 6.30	48.2	45.8 ~ 50.6

**Table 6.2 Targets of Tissue Simulating Liquid**

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Frequency (MHz)	Liquid Type	Temperature ( $^{\circ}\text{C}$ )	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Measurement Date
2450	Head	21.3	1.84	38.6	May 03, 2011
2450	Head	21.3	1.84	38.6	May 03, 2011
2450	Body	21.5	1.93	53.6	May 03, 2011
5200	Head	21.4	4.79	35.5	May 02, 2011
5200	Body	21.3	5.14	47.5	May 01, 2011
5500	Head	21.4	5.11	35	May 02, 2011
5500	Body	21.6	5.52	47	May 01, 2011
5800	Head	21.5	5.39	34.4	May 02, 2011
5800	Body	21.8	5.99	46.5	May 01, 2011

**Table 6.3 Measuring Results for Simulating Liquid**

## **7. Uncertainty Assessment**

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 7.1

<b>Uncertainty Distributions</b>	<b>Normal</b>	<b>Rectangular</b>	<b>Triangular</b>	<b>U-Shape</b>
Multi-plying Factor <sup>(a)</sup>	1/k <sup>(b)</sup>	1/√3	1/√6	1/√2

- (a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity
- (b)  $\kappa$  is the coverage factor

**Table 7.1 Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is showed in Table 7.2 and Table 7.3.



Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Standard Uncertainty (1g)
<b>Measurement System</b>					
Probe Calibration	5.5	Normal	1	1	± 5.5 %
Axial Isotropy	4.7	Rectangular	√3	0.7	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	± 0.6 %
Linearity	4.7	Rectangular	√3	1	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	± 0.6 %
Readout Electronics	0.3	Normal	1	1	± 0.3 %
Response Time	0.8	Rectangular	√3	1	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	± 0.6 %
<b>Test Sample Related</b>					
Device Positioning	2.9	Normal	1	1	± 2.9 %
Device Holder	3.6	Normal	1	1	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	± 2.9 %
<b>Phantom and Setup</b>					
Phantom Uncertainty	4.0	Rectangular	√3	1	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	± 1.8 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	± 1.6 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	± 1.7 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	± 1.5 %
<b>Combined Standard Uncertainty</b>					± 10.7 %
<b>Coverage Factor for 95 %</b>					K = 2
<b>Expanded Uncertainty</b>					± 21.4 %

Table 7.2 Uncertainty Budget of DASY for frequency range 300 MHz to 3 GHz



Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Standard Uncertainty (1g)
<b>Measurement System</b>					
Probe Calibration	6.55	Normal	1	1	± 6.55 %
Axial Isotropy	4.7	Rectangular	√3	0.7	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	± 3.9 %
Boundary Effects	2.0	Rectangular	√3	1	± 1.2 %
Linearity	4.7	Rectangular	√3	1	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	± 0.6 %
Readout Electronics	0.3	Normal	1	1	± 0.3 %
Response Time	0.8	Rectangular	√3	1	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	± 1.7 %
Probe Positioner	0.8	Rectangular	√3	1	± 0.5 %
Probe Positioning	9.9	Rectangular	√3	1	± 5.7 %
Max. SAR Eval.	4.0	Rectangular	√3	1	± 2.3 %
<b>Test Sample Related</b>					
Device Positioning	2.9	Normal	1	1	± 2.9 %
Device Holder	3.6	Normal	1	1	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	± 2.9 %
<b>Phantom and Setup</b>					
Phantom Uncertainty	4.0	Rectangular	√3	1	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.43	± 1.8 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.43	± 1.6 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.49	± 1.7 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.49	± 1.5 %
<b>Combined Standard Uncertainty</b>					± 12.8 %
<b>Coverage Factor for 95 %</b>					K = 2
<b>Expanded Uncertainty</b>					± 25.6 %

Table 7.3 Uncertainty Budget of DASY for frequency range 3 GHz to 6 GHz

## 8. SAR Measurement Evaluation

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

### 8.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 8.2 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:


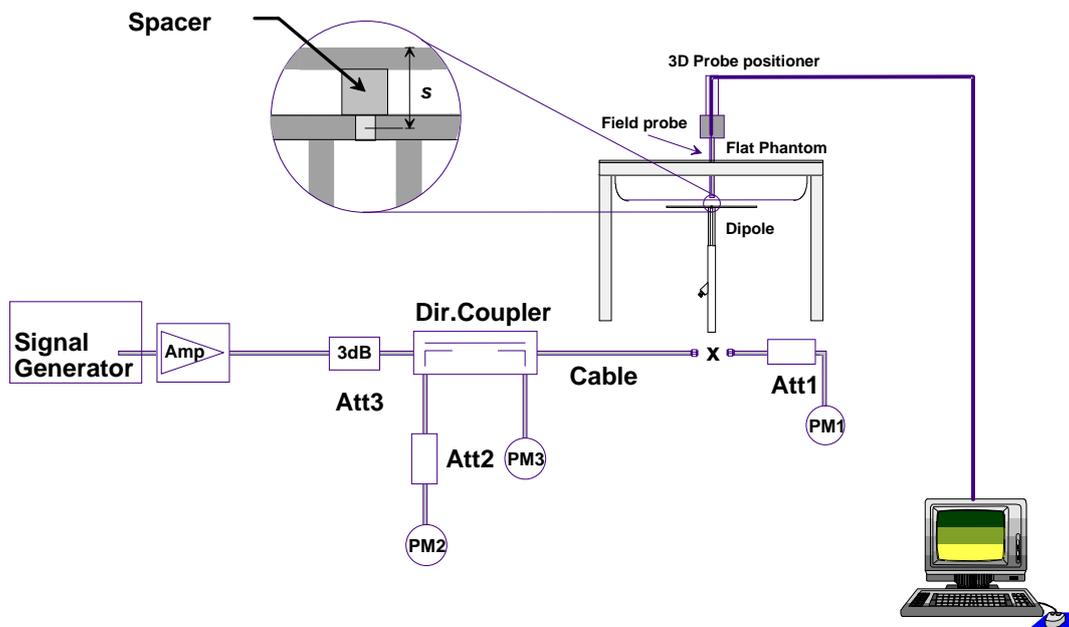


Fig 8.1 System Setup for System Evaluation

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole

The output power on dipole port must be calibrated to 20 dBm (100 mW) before dipole is connected.

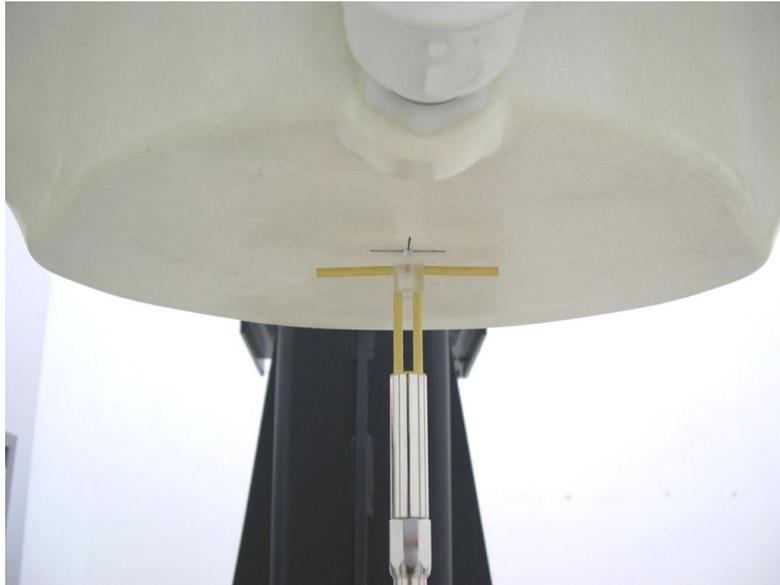

**Fig 8.2 Photo of Dipole Setup**

### **8.3 Validation Results**

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 %. Table 8.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.



Measurement Date	Frequency (MHz)	Targeted SAR <sub>1g</sub> (W/kg)	Measured SAR <sub>1g</sub> (W/kg)	Normalized SAR (W/kg)	Deviation (%)
May 03, 2011	2450	52.20	5.12	51.20	-1.92
May 03, 2011	2450	52.20	5.63	56.30	7.85
May 03, 2011	2450	53.50	5.55	55.50	3.74
May 02, 2011	5200	82.20	8.18	81.80	-0.49
May 01, 2011	5200	79.00	8.52	85.20	7.85
May 02, 2011	5500	88.80	8.37	83.70	-5.74
May 01, 2011	5500	85.40	8.60	86.00	0.70
May 02, 2011	5800	78.20	8.00	80.00	2.30
May 01, 2011	5800	73.70	7.01	70.10	-4.88

Table 8.1 Target and Measurement SAR after Normalized

## 9. DUT Testing Position

This DUT was tested in nine different positions. They are right cheek, right tilted, left cheek, left tilted, front face of the DUT, rear face of the DUT, left side of the DUT, right side of the DUT, and top side of the DUT as illustrated below:

### 1. Define two imaginary lines on the handset

- (a) The vertical centerline passes through two points on the front side of the handset - the midpoint of the width  $w_t$  of the handset at the level of the acoustic output, and the midpoint of the width  $w_b$  of the bottom of the handset.
- (b) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (c) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.


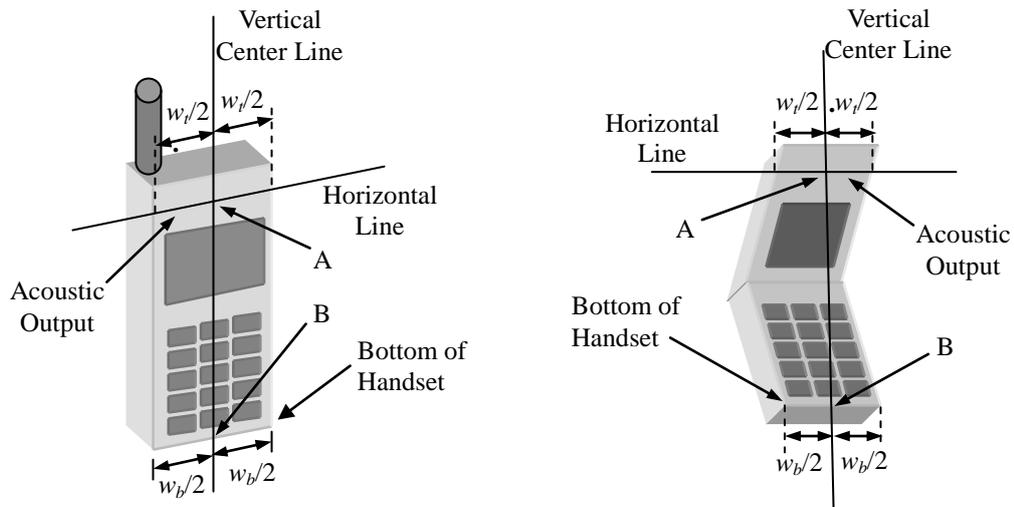


Fig 9.1 Illustration for Handset Vertical and Horizontal Reference Lines

**2. Cheek Position**


- (a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 9.2).

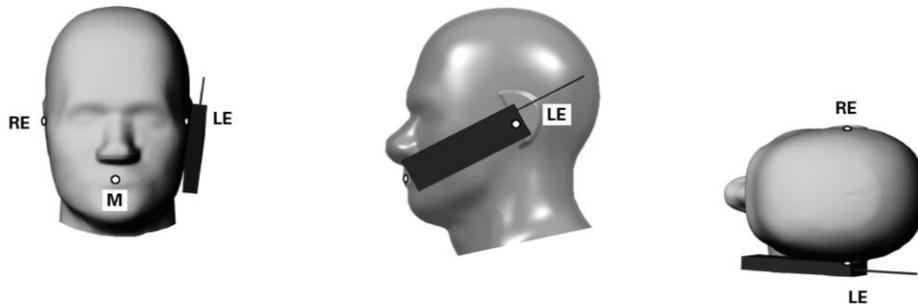

**Fig 9.2 Illustration for Cheek Position**

**3. Tilted Position**


- (a) To position the device in the “cheek” position described above.
- (b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 9.3).

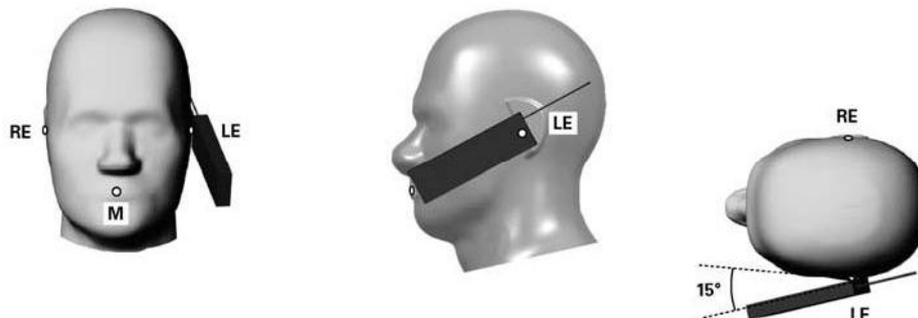

**Fig 9.3 Illustration for Tilted Position**

#### 4. Body Worn Position

- (a) To position the device parallel to the phantom surface.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 1.5 cm or 1.0 cm.

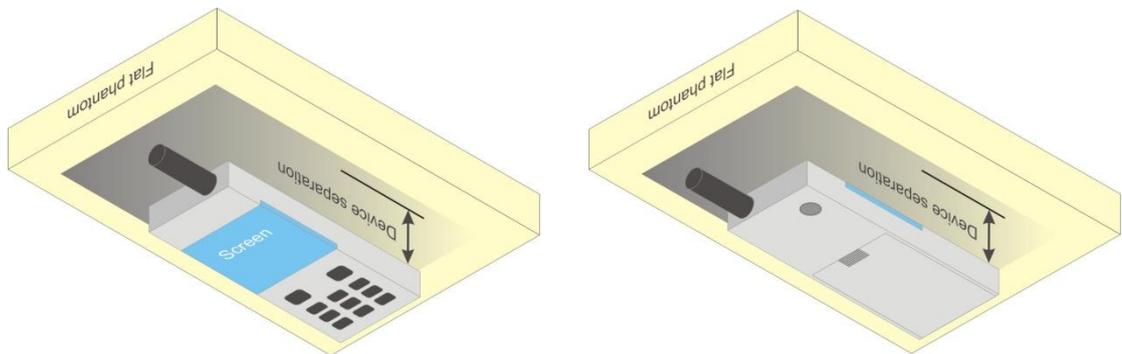

**Fig 9.4 Illustration for Body Worn Position**

## **10. Measurement Procedures**

The measurement procedures are as follows:

- (a) Use engineering software to transmit RF power continuously (continuous Tx) in the highest power channel
- (b) Measure output power through RF cable and power meter
- (c) Place the DUT in the positions described in the last section
- (d) Set scan area, grid size and other setting on the DASY software
- (e) Taking data for the middle channel on each testing position
- (f) Find out the largest SAR result on these testing positions of each band
- (g) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **10.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g



## **10.2 Area & Zoom Scan Procedures**

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

## **10.3 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the DUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

## **10.4 SAR Averaged Methods**

In DASy, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

## **10.5 Power Drift Monitoring**

All SAR testing is under the DUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of DUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.



## 11. SAR Test Results

### 11.1 Conducted Power (Unit: dBm)

Band	802.11b			802.11g		
Channel	1	6	11	1	6	11
Frequency (MHz)	2412	2437	2462	2412	2437	2462
Average Power	16.54	15.95	15.34	15.45	15.38	15.49

Band	802.11n (BW 20MHz)		
Channel	1	6	11
Frequency (MHz)	2412	2437	2462
Average Power	15.73	15.69	15.29

**Note:** SAR tests were performed in 11b mode, 11g/11n modes are excluded since the output power is less than 1/4dB higher than 11b, referring to KDB 248227.

Band	802.11a							
Channel	36	44	48	52	60	64	100	104
Frequency (MHz)	5180	5220	5240	5260	5300	5320	5500	5520
Average Power	14.56	12.88	14.70	15.89	16.20	15.46	15.97	16.16

Band	802.11a							
Channel	116	124	136	140	149	157	161	165
Frequency (MHz)	5580	5620	5680	5700	5745	5785	5805	5825
Average Power	15.52	15.76	15.51	15.62	15.40	15.46	15.74	14.83

Band	802.11n (BW 20MHz)							
Channel	36	44	48	52	60	64	100	104
Frequency (MHz)	5180	5220	5240	5260	5300	5320	5500	5520
Average Power	14.38	12.80	14.54	15.90	15.63	16.04	15.7	15.31

Band	802.11n (BW 20MHz)							
Channel	116	124	136	140	149	157	161	165
Frequency (MHz)	5580	5620	5680	5700	5745	5785	5805	5825
Average Power	14.92	14.69	14.92	14.92	15.06	15.45	15.71	14.87



Band	802.11n (BW 40MHz)								
Channel	38	46	54	62	102	118	134	151	159
Frequency (MHz)	5190	5230	5270	5310	5510	5590	5670	5755	5795
Average Power	13.43	12.23	15.11	13.80	15.85	15.08	16.32	14.51	15.04

Note: SAR tests are performed in 11a mode, 11n-HT20 CH64 and 11-n-HT40 CH134 are tested additionally due to higher output power than 11a mode.

**11.2 Test Records for Head SAR Test**

Plot No.	Band	Mode	Test Position	Ch	Battery	DUT Status	SAR <sub>1g</sub> (W/kg)
107	802.11b	-	Right Cheek	1	Slide Off	1	0.052
108	802.11b	-	Right Tilted	1	Slide Off	1	0.073
109	802.11b	-	Left Cheek	1	Slide Off	1	0.078
<b>110</b>	<b>802.11b</b>	-	<b>Left Tilted</b>	<b>1</b>	<b>Slide Off</b>	<b>1</b>	<b>0.108</b>
112	802.11b	-	Left Tilted	1	Slide Off	2	0.093
111	802.11b	-	Right Cheek	1	Slide Up	1	0.024
113	802.11b	-	Right Tilted	1	Slide Up	1	0.00874
114	802.11b	-	Left Cheek	1	Slide Up	1	0.017
115	802.11b	-	Left Tilted	1	Slide Up	1	0.00635
116	802.11b	-	Right Cheek	1	Slide Up	2	0.011
85	802.11a	-	Right Cheek	104	Slide Off	1	0.192
<b>86</b>	<b>802.11a</b>	-	<b>Right Tilted</b>	<b>104</b>	<b>Slide Off</b>	<b>1</b>	<b>0.463</b>
87	802.11a	-	Left Cheek	104	Slide Off	1	0.194
88	802.11a	-	Left Tilted	104	Slide Off	1	0.319
89	802.11a	-	Right Cheek	104	Slide Up	1	0.021
90	802.11a	-	Right Tilted	104	Slide Up	1	0.018
91	802.11a	-	Left Cheek	104	Slide Up	1	0.023
92	802.11a	-	Left Tilted	104	Slide Up	1	0.018
93	802.11n	BW 20MHz	Right Tilted	64	Slide Off	1	0.374
94	802.11n	BW 40MHz	Right Tilted	134	Slide Off	1	0.32
95	802.11a	-	Right Tilted	36	Slide Off	1	0.167
96	802.11a	-	Right Tilted	48	Slide Off	1	0.244
97	802.11a	-	Right Tilted	52	Slide Off	1	0.328
98	802.11a	-	Right Tilted	64	Slide Off	1	0.369
99	802.11a	-	Right Tilted	116	Slide Off	1	0.38
101	802.11a	-	Right Tilted	136	Slide Off	1	0.293
102	802.11a	-	Right Tilted	149	Slide Off	1	0.223
103	802.11a	-	Right Tilted	157	Slide Off	1	0.232
104	802.11a	-	Right Tilted	161	Slide Off	1	0.264
105	802.11a	-	Right Tilted	165	Slide Off	1	0.231
106	802.11a	-	Right Tilted	104	Slide Off	2	0.292



11.3 Test Records for Body-worn SAR Test

Plot No.	Band	Mode	Test Position	Separation Distance (cm)	Channel	DUT Status	Battery	Ear-phone	SAR <sub>1g</sub> (W/kg)
117	802.11b	-	Front Face	1	1	Slide Off	1	w/o	0.018
118	802.11b	-	Bottom Face	1	1	Slide Off	1	w/o	0.115
123	802.11b	-	Bottom Face	1	1	Slide Off	2	w/o	0.098
124	802.11b	-	Bottom Face	1	1	Slide Off	1	w/	0.156

Note: 11b Hotspot SAR tests with 1 cm distance. Since it will be more conservative than Body-worn configuration with 1.5 cm, the Hotspot mode SAR data put here instead.

Plot No.	Band	Mode	Test Position	Separation Distance (cm)	Channel	DUT Status	Battery	Ear-phone	SAR <sub>1g</sub> (W/kg)
69	802.11a	-	Bottom Face	1.5	104	Slide Off	1	w/	1.17
70	802.11a	-	Front Face	1.5	104	Slide Off	1	w/	0.052
71	802.11n	BW 20MHz	Bottom Face	1.5	64	Slide Off	1	w/	0.866
72	802.11n	BW 40MHz	Bottom Face	1.5	134	Slide Off	1	w/	0.876
73	802.11a	-	Bottom Face	1.5	36	Slide Off	1	w/	0.463
74	802.11a	-	Bottom Face	1.5	48	Slide Off	1	w/	0.828
75	802.11a	-	Bottom Face	1.5	52	Slide Off	1	w/	1.04
76	802.11a	-	Bottom Face	1.5	64	Slide Off	1	w/	1.17
77	802.11a	-	Bottom Face	1.5	116	Slide Off	1	w/	1.08
79	802.11a	-	Bottom Face	1.5	136	Slide Off	1	w/	1.06
80	802.11a	-	Bottom Face	1.5	149	Slide Off	1	w/	1.02
81	802.11a	-	Bottom Face	1.5	157	Slide Off	1	w/	0.937
82	802.11a	-	Bottom Face	1.5	161	Slide Off	1	w/	0.951
83	802.11a	-	Bottom Face	1.5	165	Slide Off	1	w/	1.02
84	802.11a	-	Bottom Face	1.5	104	Slide Off	2	w/	1.14



11.4 Test Records for Hotspot SAR Test

Plot No.	Band	Mode	Test Position	Separation Distance (cm)	Channel	DUT Status	Battery	Ear-phone	SAR <sub>1g</sub> (W/kg)
117	802.11b	-	Front Face	1	1	Slide Off	1	w/o	0.018
118	802.11b	-	Bottom Face	1	1	Slide Off	1	w/o	0.115
119	802.11b	-	Left Side	1	1	Slide Off	1	w/o	0.023
120	802.11b	-	Right Side	1	1	Slide Off	1	w/o	0.021
121	802.11b	-	Top Side	1	1	Slide Off	1	w/o	0.015
122	802.11b	-	Down Side	1	1	Slide Off	1	w/o	0.00736
123	802.11b	-	Bottom Face	1	1	Slide Off	2	w/o	0.098
124	802.11b	-	Bottom Face	1	1	Slide Off	1	w/	0.156

Note:

1. According to October 2010 TCB Workshop RF Exposure Procedures Update, the WLAN Antenna SAR for hotspot mode only Front Face, Bottom Face, Left Side, Right Side, and Top Side are needed due to the antenna location is within 2.5 cm from the edge.
2. The device dimension is > 9cm\*5cm, thus the test distance is 10 mm according to KDB 941225 D06.



**11.5 Simultaneous Transmission SAR Analysis and Measurements**

Refer to Sporton number FA130815A Section 12.

**Test Engineer :** Niels Ouyang and A-Rod Chen and Jack Wu and Angelo Chang and Troy Chen



## **12. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] IEEE Std. C95.1-1991, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", 1991
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] FCC OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", June 2001
- [5] SPEAG DASY System Handbook
- [6] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [7] FCC KDB 447498 D01 v04, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", November 2009
- [8] FCC KDB 447498 D02 v02, "SAR Measurement Procedures for USB Dongle Transmitters", November 2009
- [9] FCC KDB 616217 D01 v01r01, "SAR Evaluation Considerations for Laptop Computers with Antennas Built-in on Display Screens", November 2009
- [10] FCC KDB 616217 D03 v01, "SAR Evaluation Considerations for Laptop/Notebook/Netbook and Tablet Computers", November 2009
- [11] FCC KDB 648474 D01 v01r05, "SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas", September 2008
- [12] FCC KDB 941225 D01 v02, "SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA", October 2007
- [13] FCC KDB 941225 D03 v01, "Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE", December 2008
- [14] FCC KDB 941225 D04 v01, "Evaluating SAR for GSM/(E)GPRS Dual Transfer Mode", January 27 2010



## ***Appendix A. Plots of System Performance Check***

The plots are shown as follows.

## **System Check\_Head\_2450Mz\_110503**

### **DUT: Dipole 2450 MHz**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1  
Medium: HSL\_2450\_110503 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.84$  mho/m;  $\epsilon_r = 38.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

### **DASY4 Configuration:**

- Probe: ET3DV6 - SN1787; ConvF(4.5, 4.5, 4.5); Calibrated: 2010/5/18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Pin=100mW/Area Scan (91x91x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 5.89 mW/g


**Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.2 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 10.8 W/kg

**SAR(1 g) = 5.12 mW/g; SAR(10 g) = 2.41 mW/g**

Maximum value of SAR (measured) = 5.74 mW/g

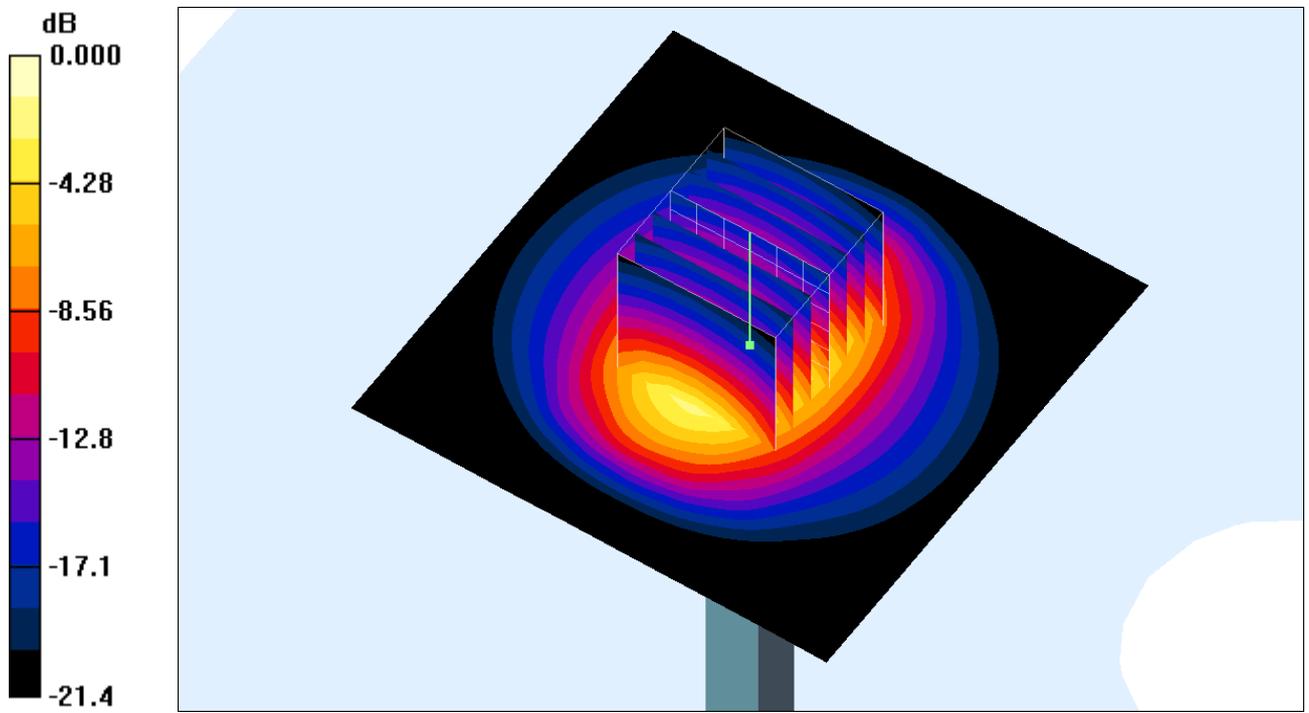

0 dB = 5.74mW/g

## **System Check\_Head\_2450MHz\_110503**

### **DUT: Dipole 2450 MHz**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1  
Medium: HSL\_2450\_110503 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.84$  mho/m;  $\epsilon_r = 38.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

### **DASY4 Configuration:**

- Probe: EX3DV4 - SN3697; ConvF(6.77, 6.77, 6.77); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Pin=100mW/Area Scan (91x91x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 6.44 mW/g


**Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.1 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 12.9 W/kg

**SAR(1 g) = 5.63 mW/g; SAR(10 g) = 2.53 mW/g**

Maximum value of SAR (measured) = 6.40 mW/g

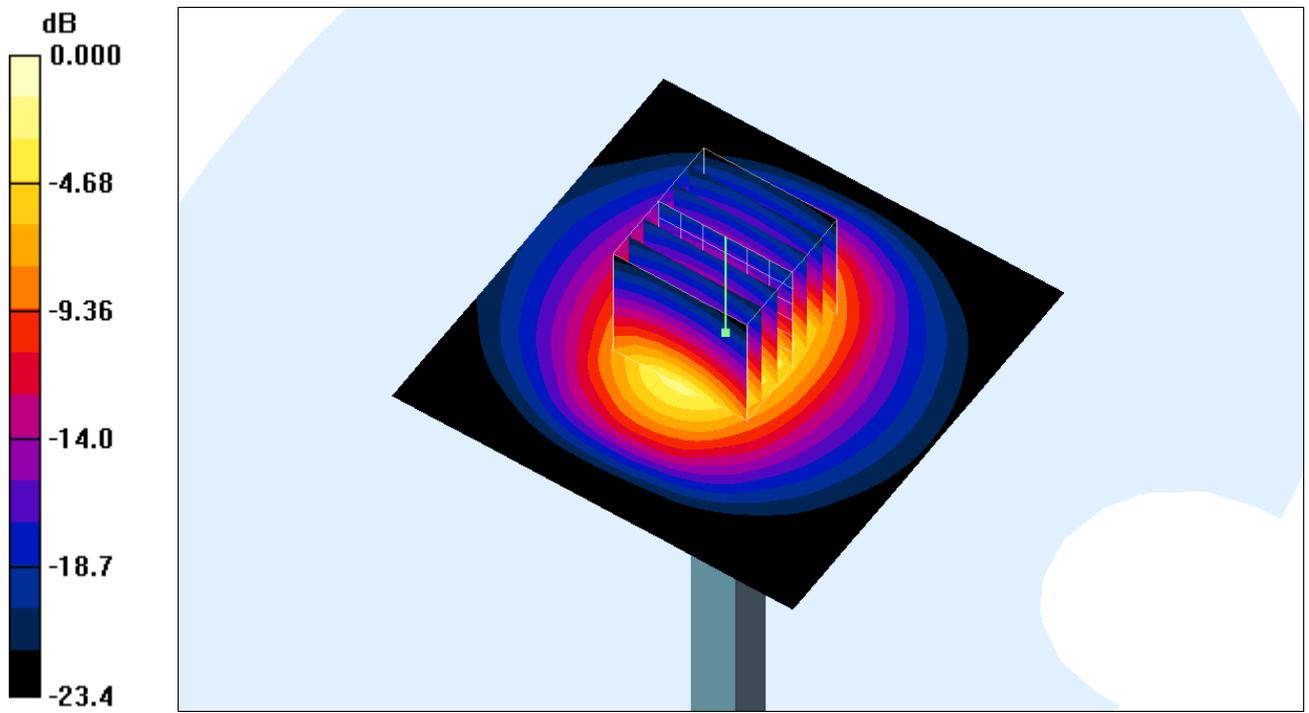

0 dB = 6.40mW/g

## System Check\_Body\_2450MHz\_110503

### DUT: Dipole 2450 MHz

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1  
Medium: MSL\_2450\_110503 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.93$  mho/m;  $\epsilon_r = 53.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

### DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.02, 7.02, 7.02); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Pin=100mW/Area Scan (91x91x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 6.73 mW/g


**Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.0 V/m; Power Drift = -0.137 dB

Peak SAR (extrapolated) = 11.9 W/kg

**SAR(1 g) = 5.55 mW/g; SAR(10 g) = 2.52 mW/g**

Maximum value of SAR (measured) = 6.36 mW/g

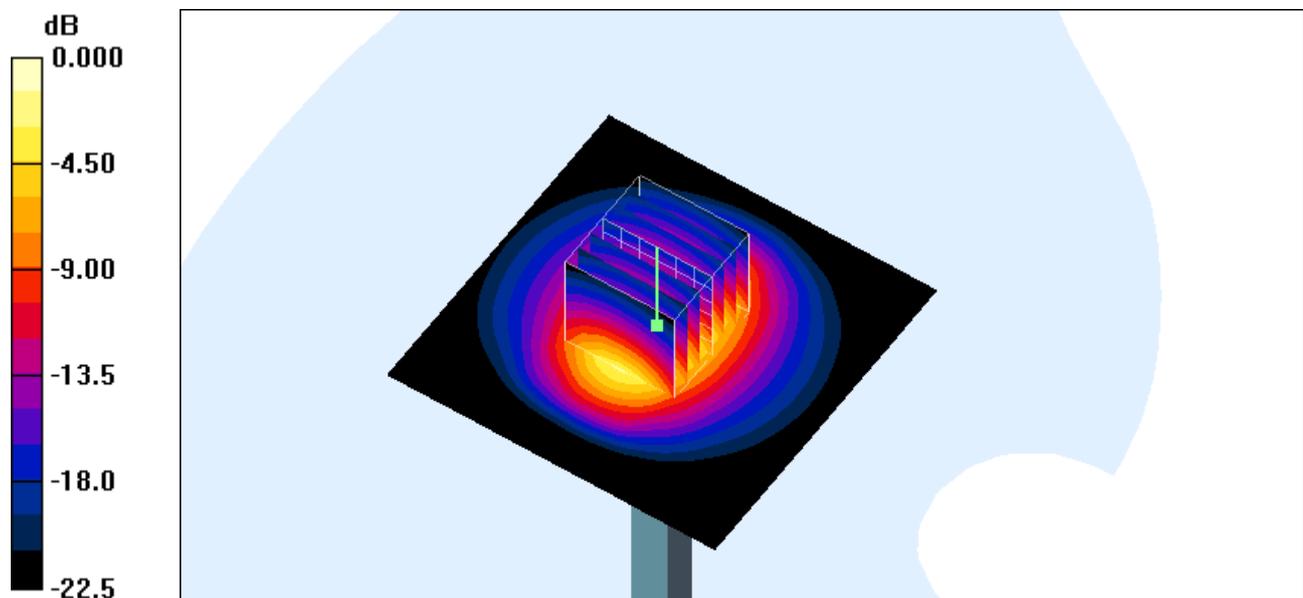

0 dB = 6.36mW/g

## **System Check\_Head\_5200MHz\_110502**

### **DUT: Dipole 5GHz**

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: HSL\_5G\_110502 Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.79$  mho/m;  $\epsilon_r = 35.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

### **DASY4 Configuration:**

- Probe: EX3DV4 - SN3731; ConvF(4.83, 4.83, 4.83); Calibrated: 2010/9/20
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Pin=100mW/Area Scan (91x91x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 14.7 mW/g


**Pin=100mW/Zoom Scan (8x8x8)/Cube 0:** Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 60.3 V/m; Power Drift = -0.199 dB

Peak SAR (extrapolated) = 30.9 W/kg

**SAR(1 g) = 8.18 mW/g; SAR(10 g) = 2.36 mW/g**

Maximum value of SAR (measured) = 13.5 mW/g

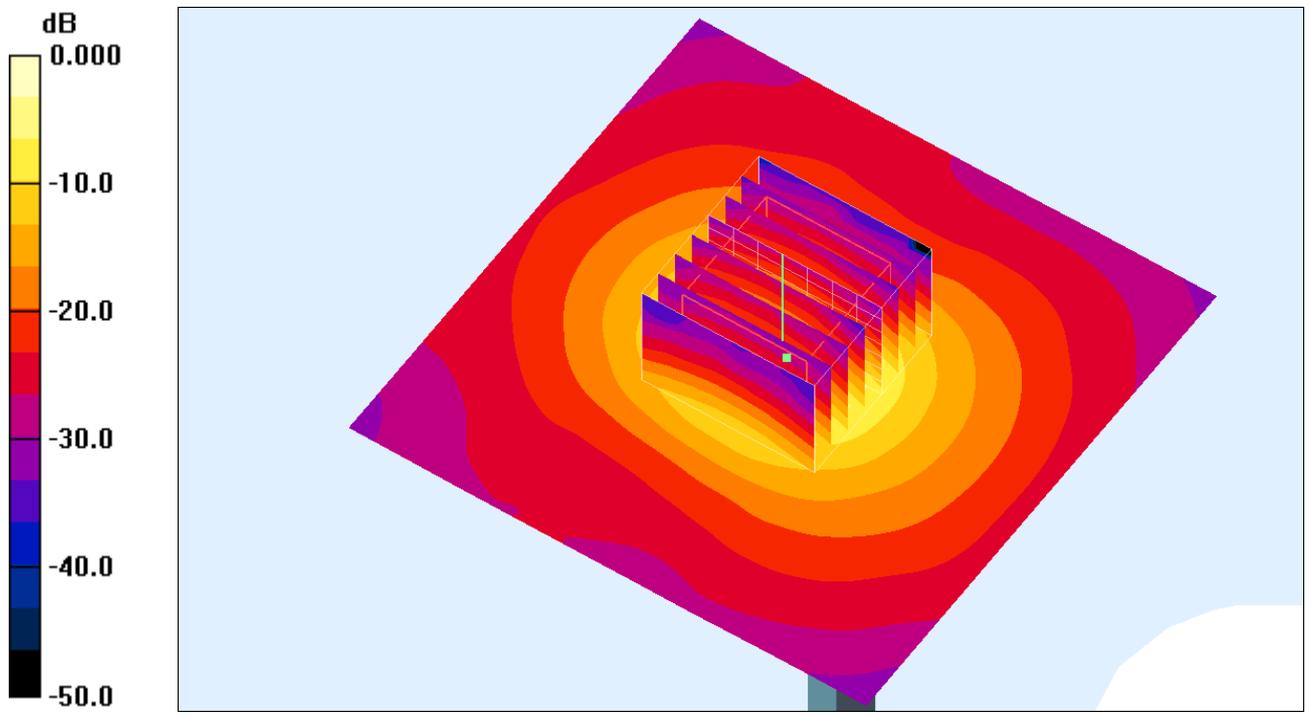

0 dB = 13.5mW/g

## **System Check\_Body\_5200MHz\_110501**

### **DUT: Dipole 5GHz**

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1  
Medium: MSL\_5G\_110501 Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.14$  mho/m;  $\epsilon_r = 47.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

### **DASY4 Configuration:**

- Probe: EX3DV4 - SN3731; ConvF(3.87, 3.87, 3.87); Calibrated: 2010/9/20
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Pin=100mW/Area Scan (91x91x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 15.6 mW/g


**Pin=100mW/Zoom Scan (8x8x8)/Cube 0:** Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 60.3 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 26.8 W/kg

**SAR(1 g) = 8.52 mW/g; SAR(10 g) = 2.46 mW/g**

Maximum value of SAR (measured) = 14.6 mW/g

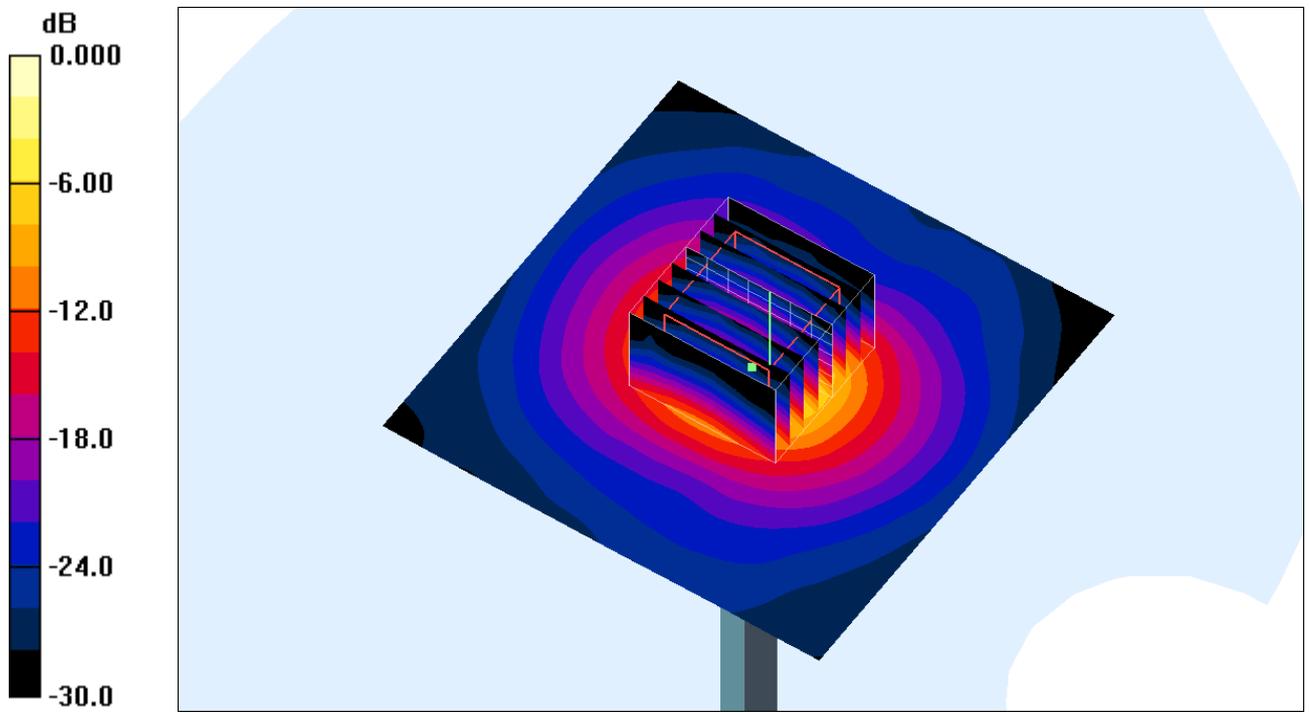

0 dB = 14.6mW/g

## **System Check\_Head\_5500MHz\_110502**

### **DUT: Dipole 5GHz**

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1  
Medium: HSL\_5G\_110502 Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.11$  mho/m;  $\epsilon_r = 35$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

### **DASY4 Configuration:**

- Probe: EX3DV4 - SN3731; ConvF(4.46, 4.46, 4.46); Calibrated: 2010/9/20
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Pin=100mW/Area Scan (91x91x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 14.7 mW/g


**Pin=100mW/Zoom Scan (8x8x8)/Cube 0:** Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 56.3 V/m; Power Drift = 0.065 dB

Peak SAR (extrapolated) = 30.9 W/kg

**SAR(1 g) = 8.37 mW/g; SAR(10 g) = 2.4 mW/g**

Maximum value of SAR (measured) = 14.1 mW/g

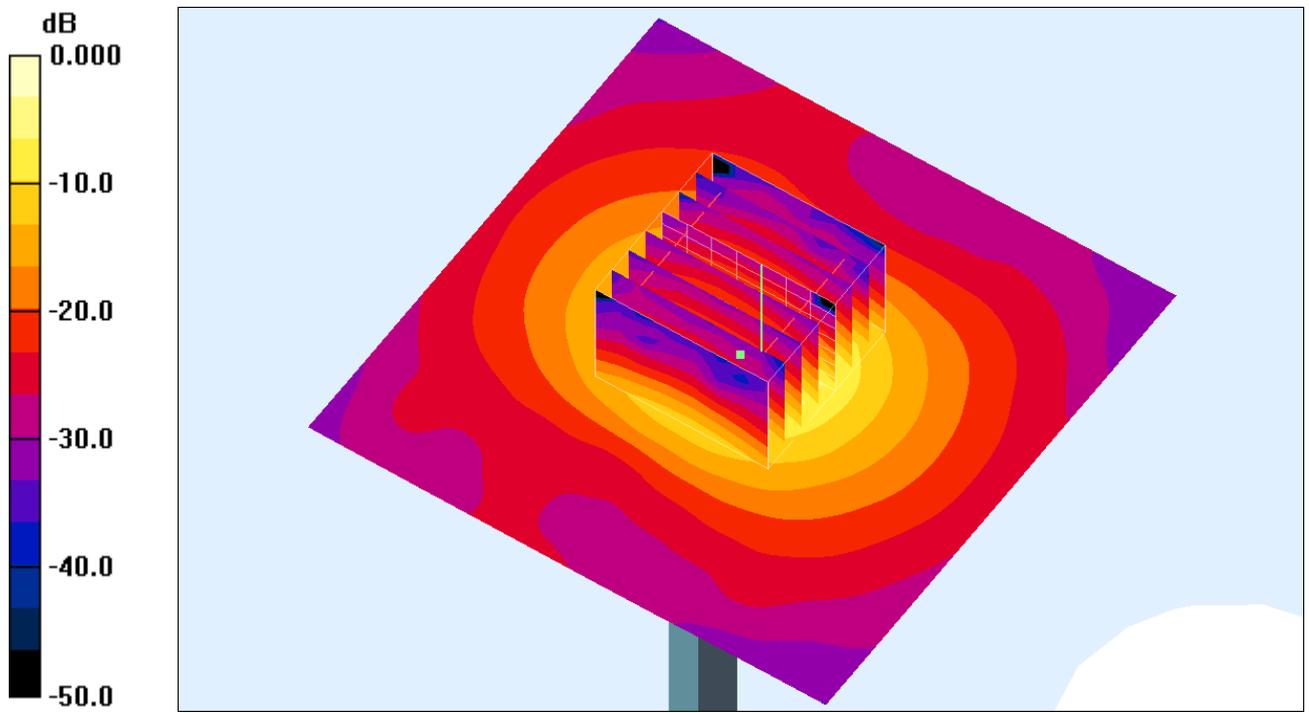

0 dB = 14.1mW/g

## **System Check\_Body\_5500MHz\_110501**

### **DUT: Dipole 5GHz**

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1  
Medium: MSL\_5G\_110501 Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.52$   
mho/m;  $\epsilon_r = 47$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.6 °C

### **DASY4 Configuration:**

- Probe: EX3DV4 - SN3731; ConvF(3.44, 3.44, 3.44); Calibrated: 2010/9/20
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Pin=100mW/Area Scan (91x91x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 14.9 mW/g


**Pin=100mW/Zoom Scan (8x8x8)/Cube 0:** Measurement grid: dx=4.3mm,  
dy=4.3mm, dz=3mm

Reference Value = 57.5 V/m; Power Drift = 0.126 dB

Peak SAR (extrapolated) = 28.0 W/kg

**SAR(1 g) = 8.6 mW/g; SAR(10 g) = 2.41 mW/g**

Maximum value of SAR (measured) = 15.2 mW/g

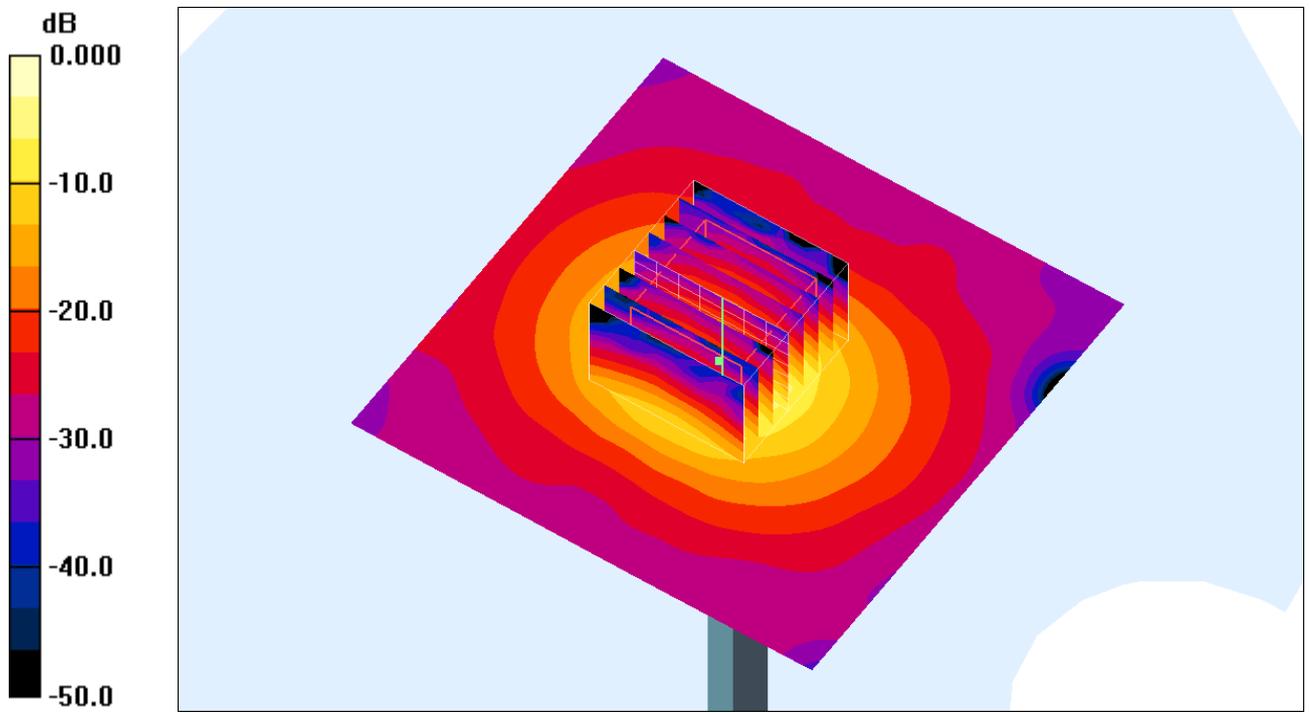

0 dB = 15.2mW/g

## **System Check\_Head\_5800MHz\_110502**

### **DUT: Dipole 5GHz**

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: HSL\_5G\_110502 Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.39$  mho/m;  $\epsilon_r = 34.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

### **DASY4 Configuration:**

- Probe: EX3DV4 - SN3731; ConvF(4.22, 4.22, 4.22); Calibrated: 2010/9/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Pin=100mW/Area Scan (91x91x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 12.5 mW/g


**Pin=100mW/Zoom Scan (8x8x8)/Cube 0:** Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 50.0 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 30.0 W/kg

**SAR(1 g) = 8 mW/g; SAR(10 g) = 2.28 mW/g**

Maximum value of SAR (measured) = 11.8 mW/g

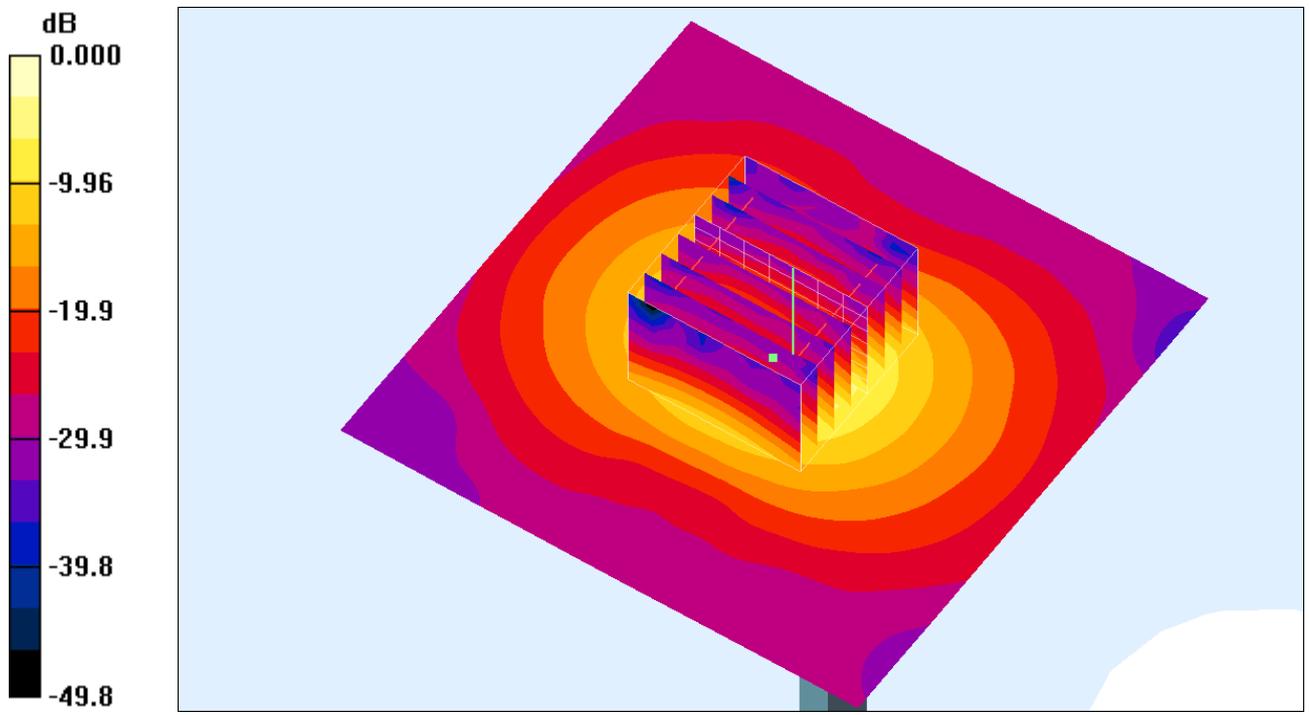

0 dB = 11.8mW/g

## **System Check\_Body\_5800MHz\_110501**

### **DUT: Dipole 5GHz**

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1  
Medium: MSL\_5G\_110501 Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.99$  mho/m;  $\epsilon_r = 46.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.8 °C

### **DASY4 Configuration:**

- Probe: EX3DV4 - SN3731; ConvF(3.59, 3.59, 3.59); Calibrated: 2010/7/16
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Pin=100mW/Area Scan (91x91x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 12.3 mW/g


**Pin=100mW/Zoom Scan (8x8x8)/Cube 0:** Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 50.1 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 23.6 W/kg

**SAR(1 g) = 7.01 mW/g; SAR(10 g) = 1.96 mW/g**

Maximum value of SAR (measured) = 12.5 mW/g

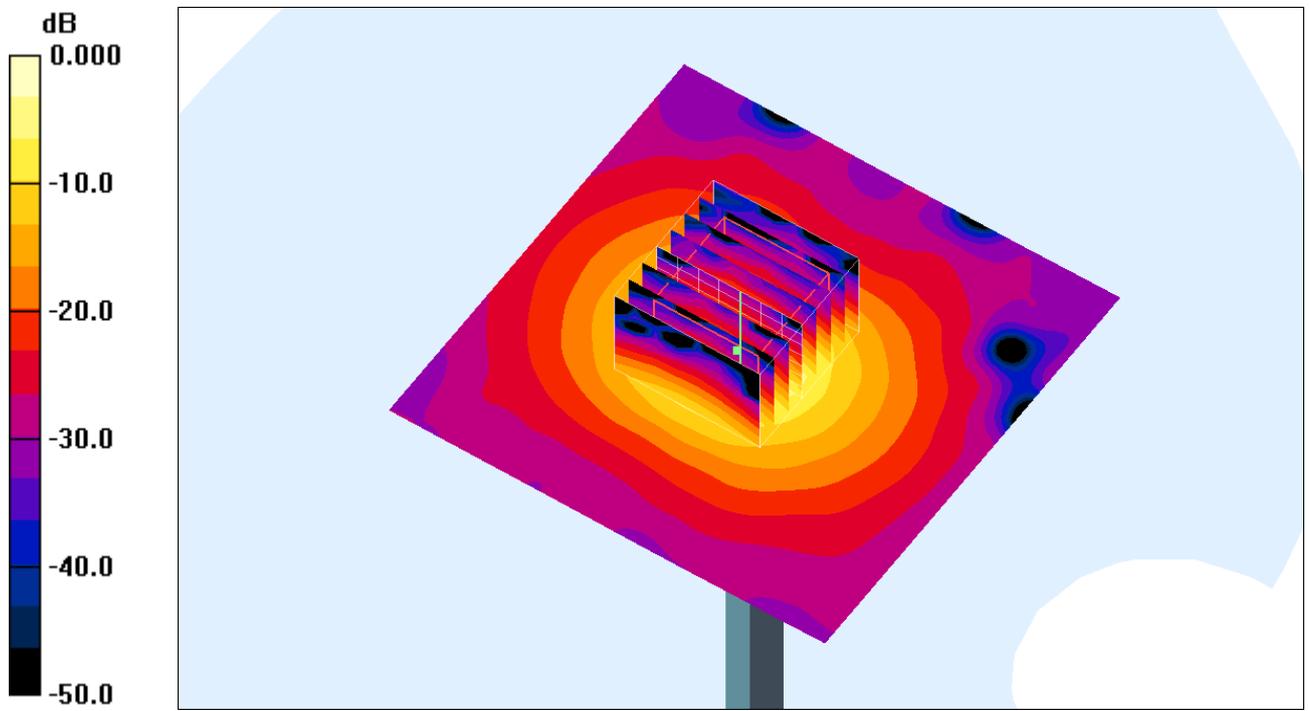

0 dB = 12.5mW/g



## ***Appendix B. Plots of SAR Measurement***

The plots are shown as follows.

## #107 802.11b\_Right Cheek\_Ch1\_Slide Off\_Battery1

**DUT: 130815**

Communication System: 802.11b ; Frequency: 2412 MHz; Duty Cycle: 1:1  
Medium: HSL\_2450\_110503 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.8$   
mho/m;  $\epsilon_r = 38.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.5, 4.5, 4.5); Calibrated: 2010/5/18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch1/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR (interpolated) = 0.049 mW/g



**Ch1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm,  
dz=5mm

Reference Value = 4.05 V/m; Power Drift = 0.114 dB

Peak SAR (extrapolated) = 0.139 W/kg

**SAR(1 g) = 0.052 mW/g; SAR(10 g) = 0.024 mW/g**

Maximum value of SAR (measured) = 0.066 mW/g

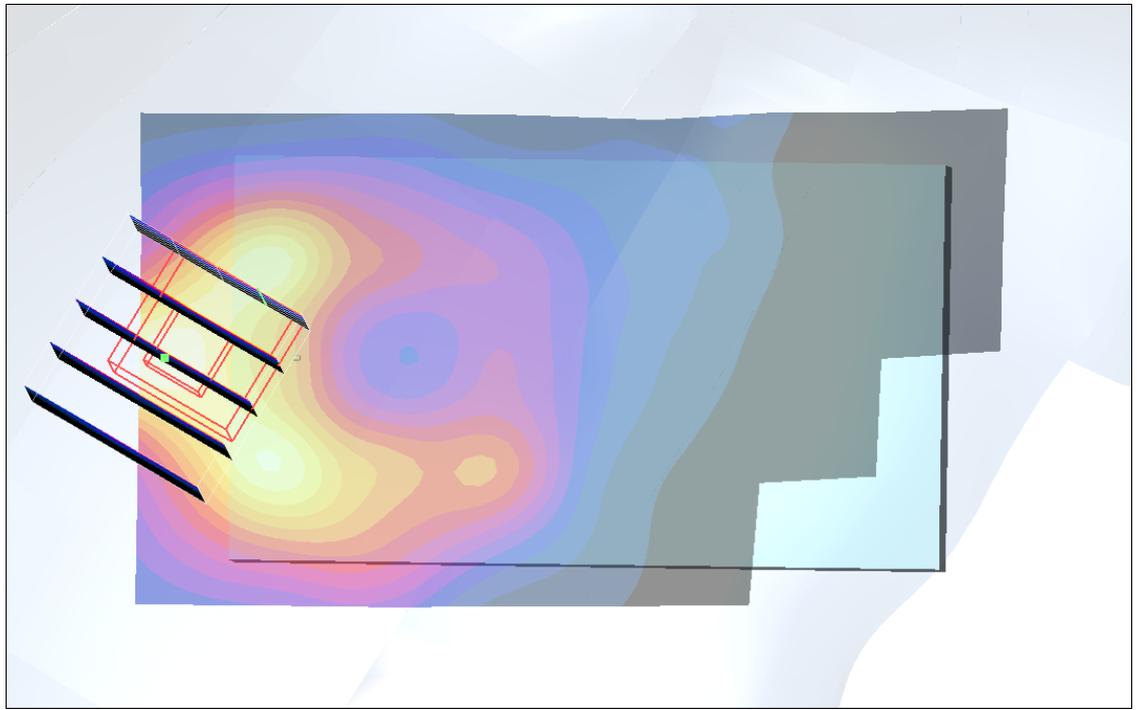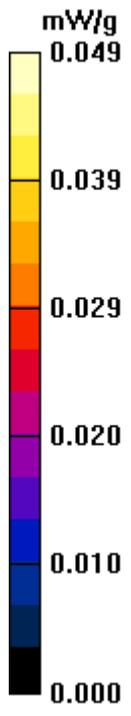

## #108 802.11b\_Right Tilted\_Ch1\_Slide Off\_Battery1

**DUT: 130815**

Communication System: 802.11b ; Frequency: 2412 MHz; Duty Cycle: 1:1  
Medium: HSL\_2450\_110503 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.8$   
mho/m;  $\epsilon_r = 38.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.5, 4.5, 4.5); Calibrated: 2010/5/18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch1/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR (interpolated) = 0.068 mW/g



**Ch1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm,  
dz=5mm

Reference Value = 3.84 V/m; Power Drift = 0.175 dB

Peak SAR (extrapolated) = 0.147 W/kg

**SAR(1 g) = 0.073 mW/g; SAR(10 g) = 0.033 mW/g**

Maximum value of SAR (measured) = 0.083 mW/g

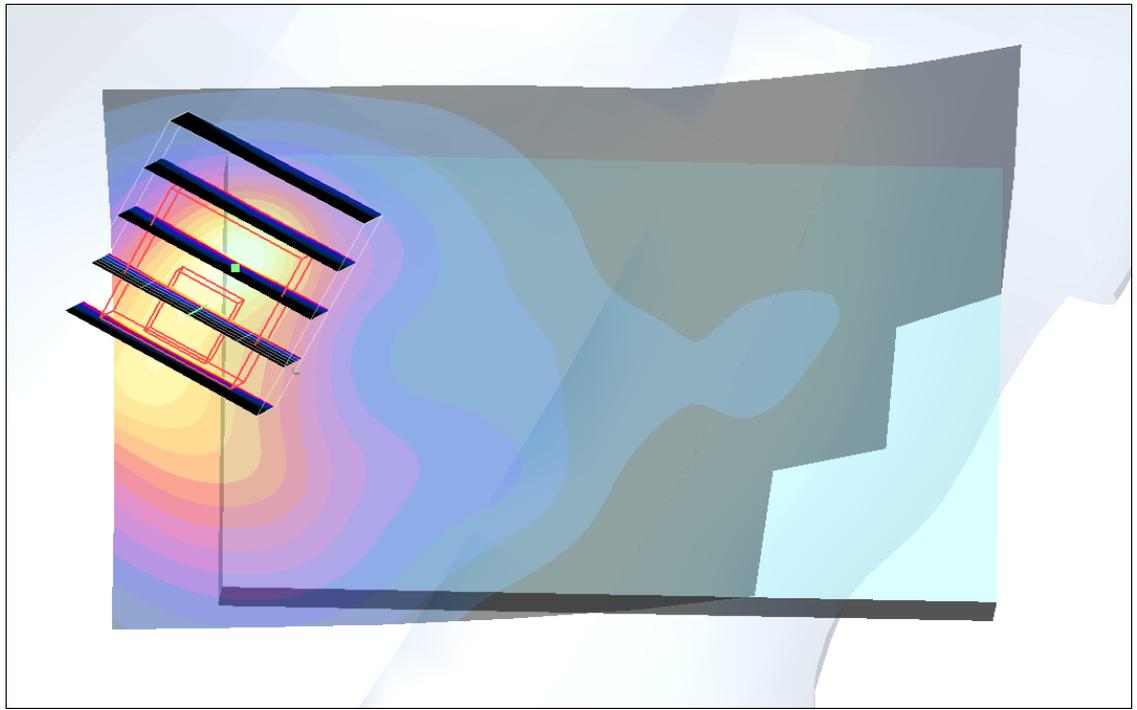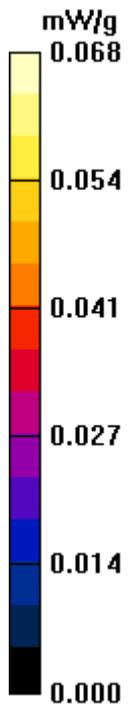

## #109 802.11b\_Left Check\_Ch1\_Slide Off\_Battery1

**DUT: 130815**

Communication System: 802.11b ; Frequency: 2412 MHz; Duty Cycle: 1:1  
Medium: HSL\_2450\_110503 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.8$   
mho/m;  $\epsilon_r = 38.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.5, 4.5, 4.5); Calibrated: 2010/5/18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch1/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR (interpolated) = 0.060 mW/g


**Ch1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm,  
dz=5mm

Reference Value = 3.99 V/m; Power Drift = 0.089 dB

Peak SAR (extrapolated) = 0.183 W/kg

**SAR(1 g) = 0.078 mW/g; SAR(10 g) = 0.033 mW/g**

Maximum value of SAR (measured) = 0.083 mW/g

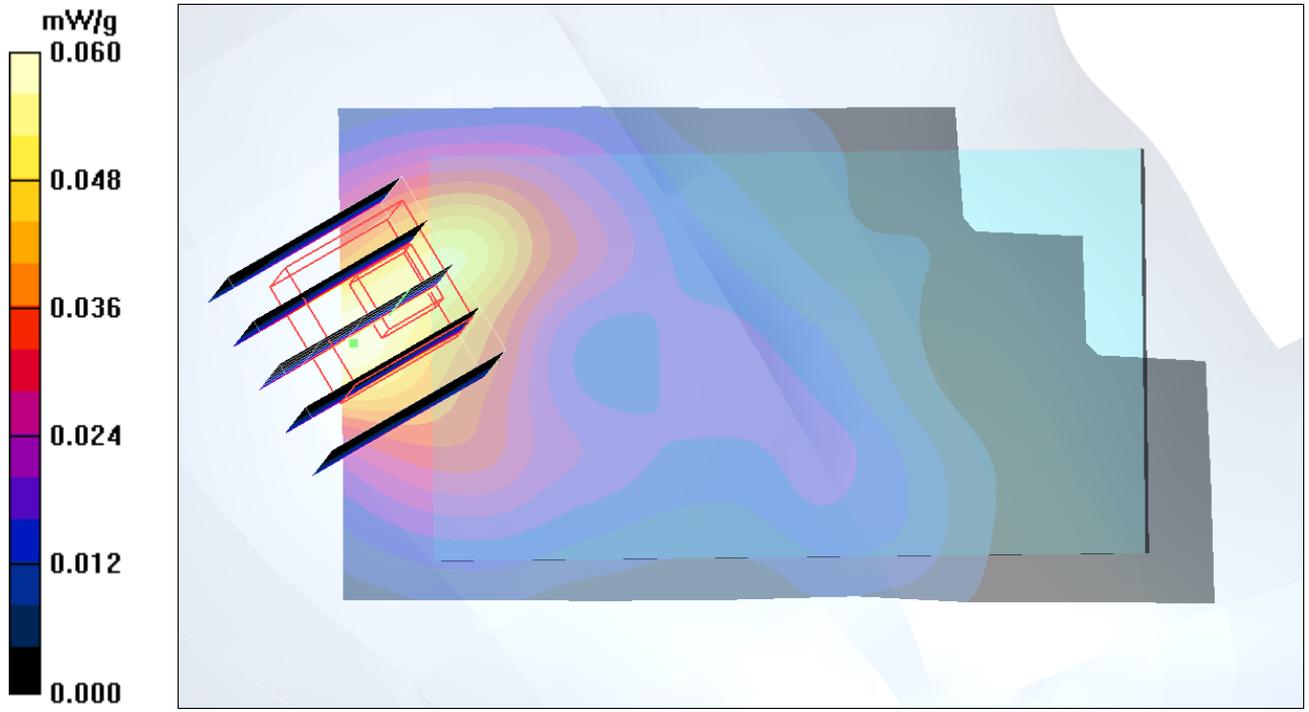

## #110 802.11b\_Left Tilted\_Ch1\_Slide Off\_Battery1

**DUT: 130815**

Communication System: 802.11b ; Frequency: 2412 MHz; Duty Cycle: 1:1  
Medium: HSL\_2450\_110503 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.8$   
mho/m;  $\epsilon_r = 38.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.5, 4.5, 4.5); Calibrated: 2010/5/18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch1/Area Scan (41x81x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR (interpolated) = 0.102 mW/g



**Ch1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm,  
dz=5mm

Reference Value = 4.02 V/m; Power Drift = 0.115 dB

Peak SAR (extrapolated) = 0.244 W/kg

**SAR(1 g) = 0.108 mW/g; SAR(10 g) = 0.050 mW/g**

Maximum value of SAR (measured) = 0.115 mW/g

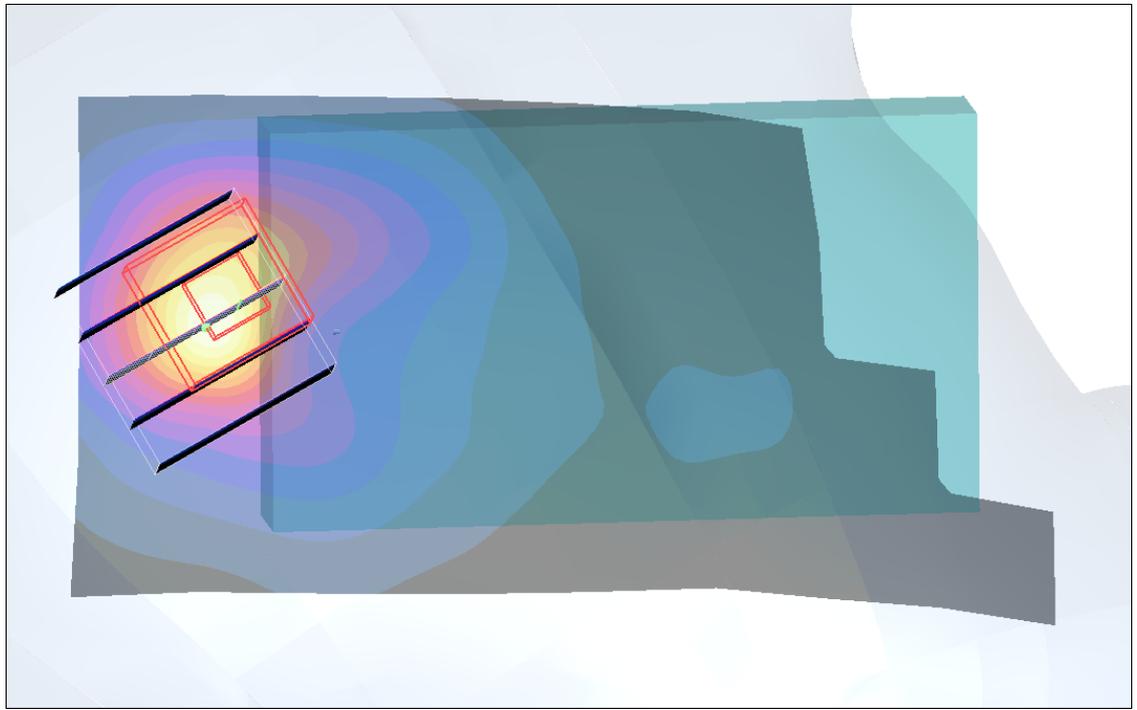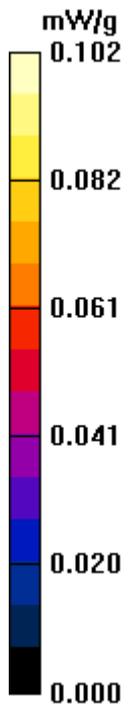

## #110 802.11b\_Left Tilted\_Ch1\_Slide Off\_Battery1\_2D

**DUT: 130815**

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1  
Medium: HSL\_2450\_110503 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.8$   
mho/m;  $\epsilon_r = 38.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.5, 4.5, 4.5); Calibrated: 2010/5/18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch1/Area Scan (41x81x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR (interpolated) = 0.102 mW/g

**Ch1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm,  
dz=5mm

Reference Value = 4.02 V/m; Power Drift = 0.115 dB


Peak SAR (extrapolated) = 0.244 W/kg

**SAR(1 g) = 0.108 mW/g; SAR(10 g) = 0.050 mW/g**

Maximum value of SAR (measured) = 0.115 mW/g

# 1g/10g Averaged SAR

SAR; Zoom Scan: Value Along Z, X=1, Y=2

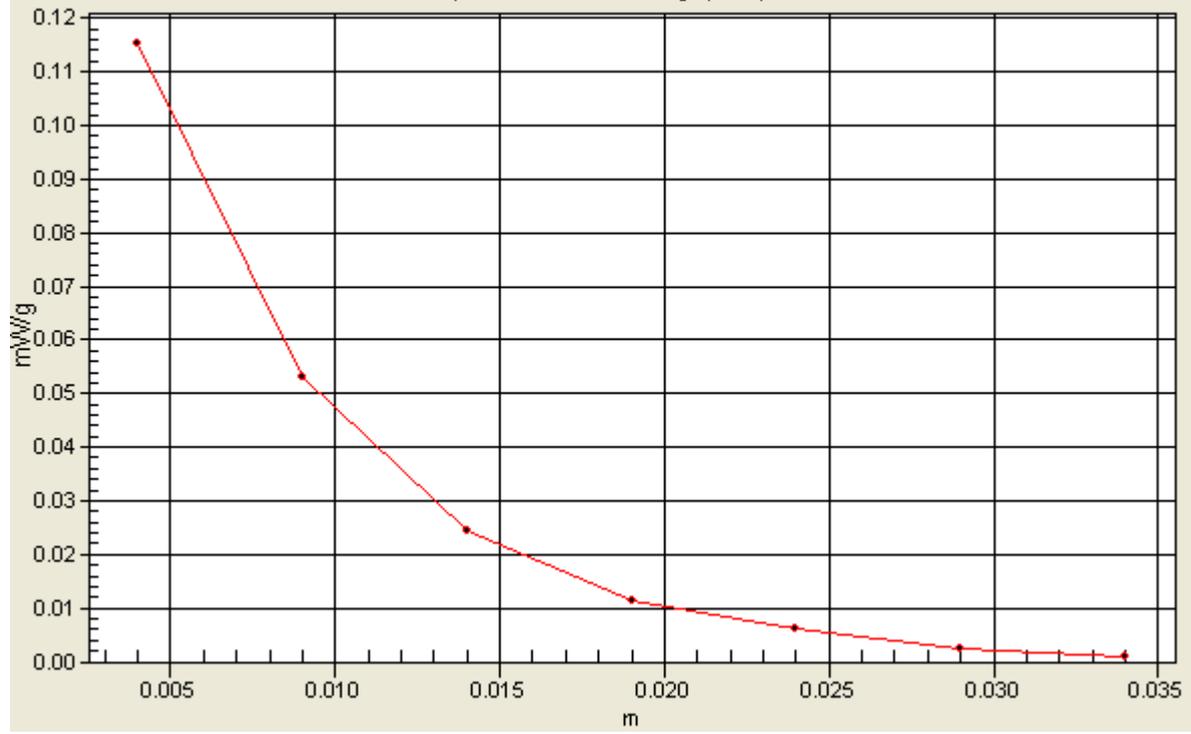

## #112 802.11b\_Left Tilted\_Ch1\_Slide Off\_Battery2

**DUT: 130815**

Communication System: 802.11b ; Frequency: 2412 MHz; Duty Cycle: 1:1  
Medium: HSL\_2450\_110503 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.8$   
mho/m;  $\epsilon_r = 38.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.77, 6.77, 6.77); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch11/Area Scan (41x101x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR (interpolated) = 0.099 mW/g



**Ch11/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm,  
dz=5mm

Reference Value = 4.64 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 0.216 W/kg

**SAR(1 g) = 0.093 mW/g; SAR(10 g) = 0.043 mW/g**

Maximum value of SAR (measured) = 0.100 mW/g

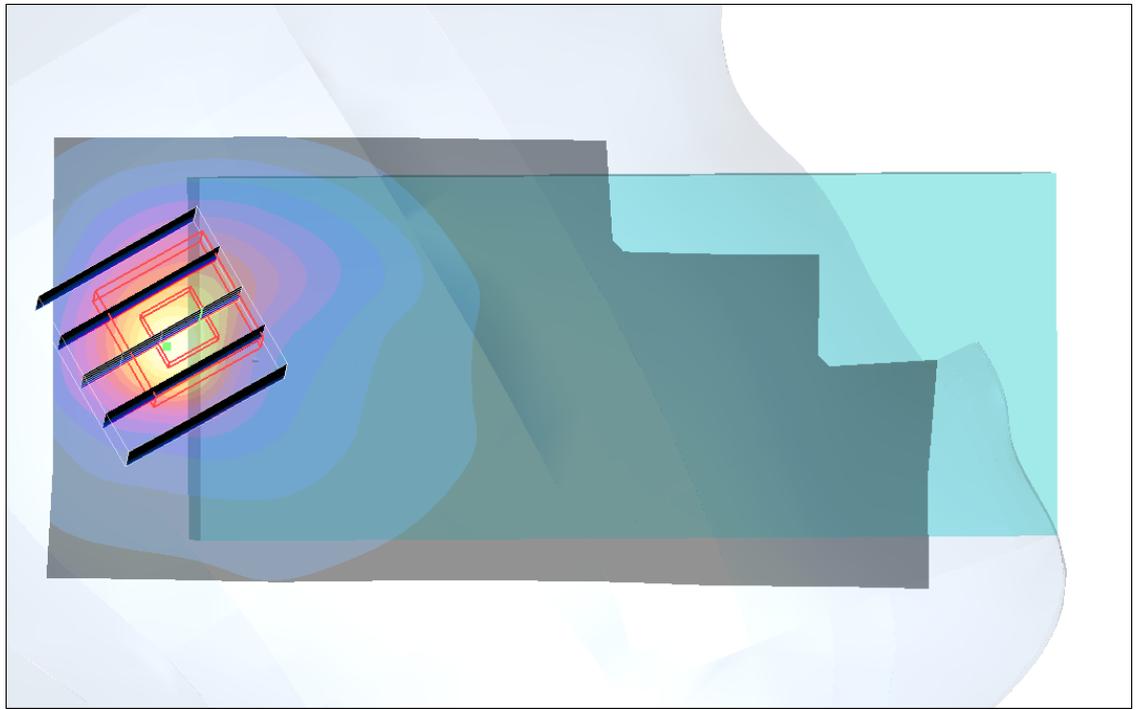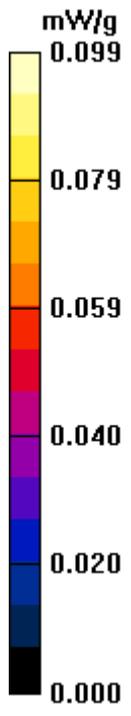

## #111 802.11b\_Right Cheek\_Ch1\_Slide Up\_Battery1

**DUT: 130815**

Communication System: 802.11b ; Frequency: 2412 MHz; Duty Cycle: 1:1  
Medium: HSL\_2450\_110503 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.8$   
mho/m;  $\epsilon_r = 38.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.5, 4.5, 4.5); Calibrated: 2010/5/18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch1/Area Scan (41x91x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR (interpolated) = 0.029 mW/g

**Ch1/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm,  
dz=5mm

Reference Value = 1.69 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.035 W/kg

**SAR(1 g) = 0.024 mW/g; SAR(10 g) = 0.012 mW/g**

Maximum value of SAR (measured) = 0.028 mW/g



**Ch1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm,  
dz=5mm

Reference Value = 1.69 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.032 W/kg

**SAR(1 g) = 0.017 mW/g; SAR(10 g) = 0.00759 mW/g**

Maximum value of SAR (measured) = 0.019 mW/g

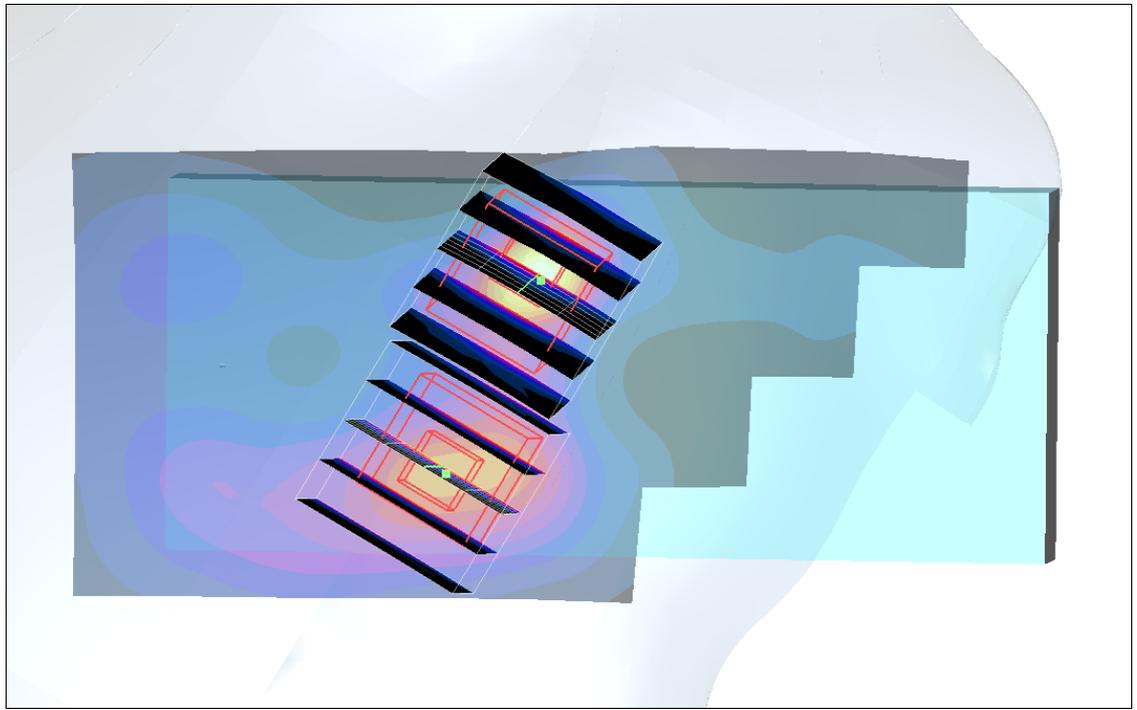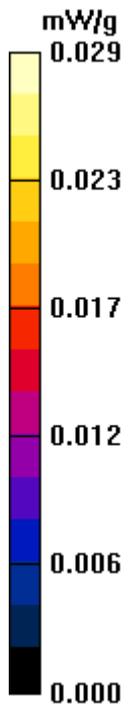

## #113 802.11b\_Right Tilted\_Ch1\_Slide Up\_Battery1

**DUT: 130815**

Communication System: 802.11b ; Frequency: 2412 MHz; Duty Cycle: 1:1  
Medium: HSL\_2450\_110503 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.8$   
mho/m;  $\epsilon_r = 38.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.77, 6.77, 6.77); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch1/Area Scan (41x101x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR (interpolated) = 0.019 mW/g


**Ch1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm,  
dz=5mm

Reference Value = 1.53 V/m; Power Drift = 0.164 dB

Peak SAR (extrapolated) = 0.024 W/kg

**SAR(1 g) = 0.00874 mW/g; SAR(10 g) = 0.00432 mW/g**

Maximum value of SAR (measured) = 0.010 mW/g

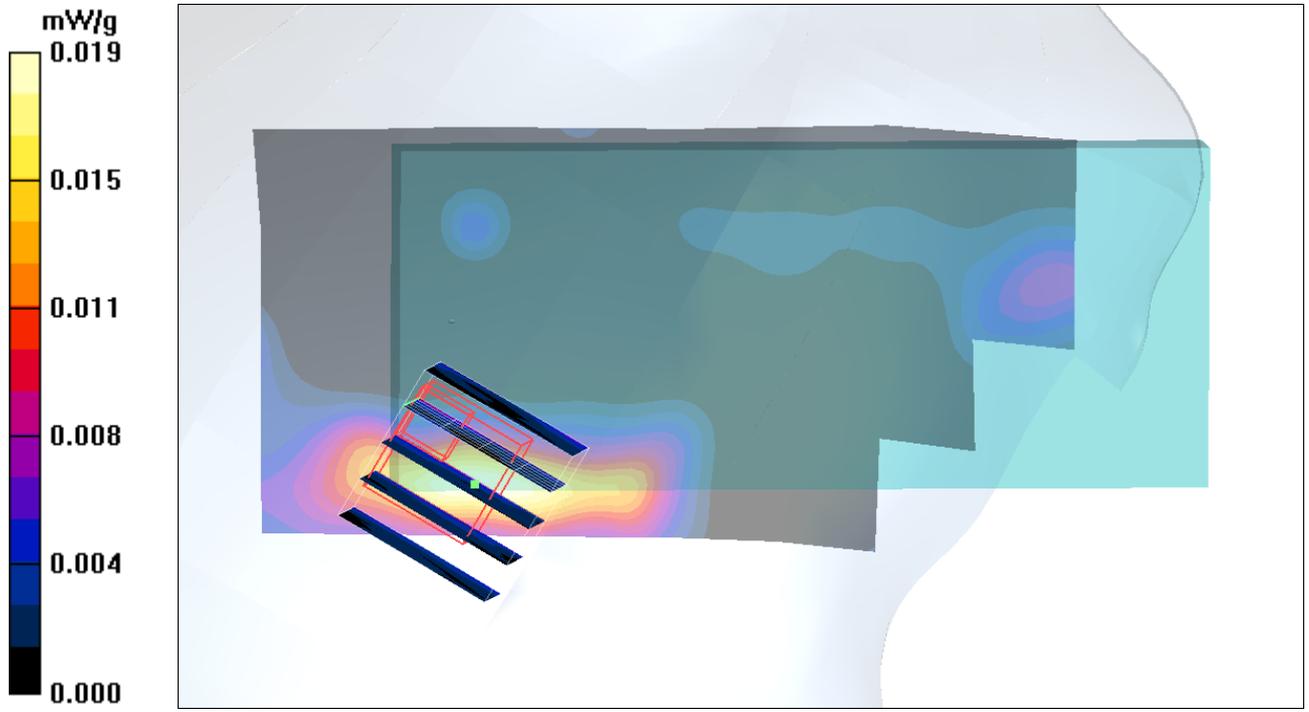

## #114 802.11b\_Left Cheek\_Ch1\_Slide Up\_Battery1

**DUT: 130815**

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1  
Medium: HSL\_2450\_110503 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.8$   
mho/m;  $\epsilon_r = 38.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.77, 6.77, 6.77); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch1/Area Scan (41x101x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR (interpolated) = 0.020 mW/g

**Ch1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm,  
dz=5mm

Reference Value = 1.10 V/m; Power Drift = 0.143 dB

Peak SAR (extrapolated) = 0.028 W/kg

**SAR(1 g) = 0.017 mW/g; SAR(10 g) = 0.0085 mW/g**

Maximum value of SAR (measured) = 0.018 mW/g


**Ch1/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm,  
dz=5mm

Reference Value = 1.10 V/m; Power Drift = 0.143 dB

Peak SAR (extrapolated) = 0.026 W/kg

**SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.00584 mW/g**

Maximum value of SAR (measured) = 0.015 mW/g

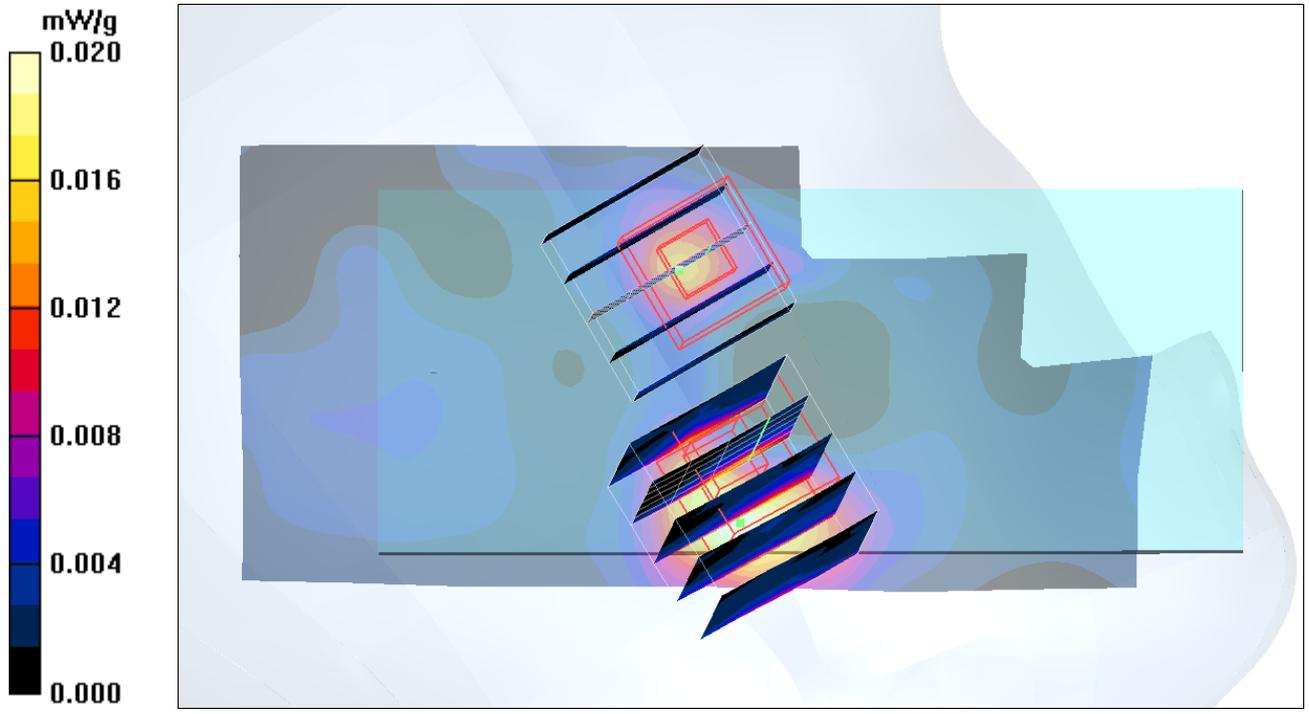

## #115 802.11b\_Left Tilted\_Ch1\_Slide Up\_Battery1

**DUT: 130815**

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1  
Medium: HSL\_2450\_110503 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.8$   
mho/m;  $\epsilon_r = 38.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.77, 6.77, 6.77); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch1/Area Scan (41x101x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR (interpolated) = 0.010 mW/g



**Ch1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm,  
dz=5mm

Reference Value = 1.14 V/m; Power Drift = 0.156 dB

Peak SAR (extrapolated) = 0.011 W/kg

**SAR(1 g) = 0.00635 mW/g; SAR(10 g) = 0.00346 mW/g**

Maximum value of SAR (measured) = 0.008 mW/g

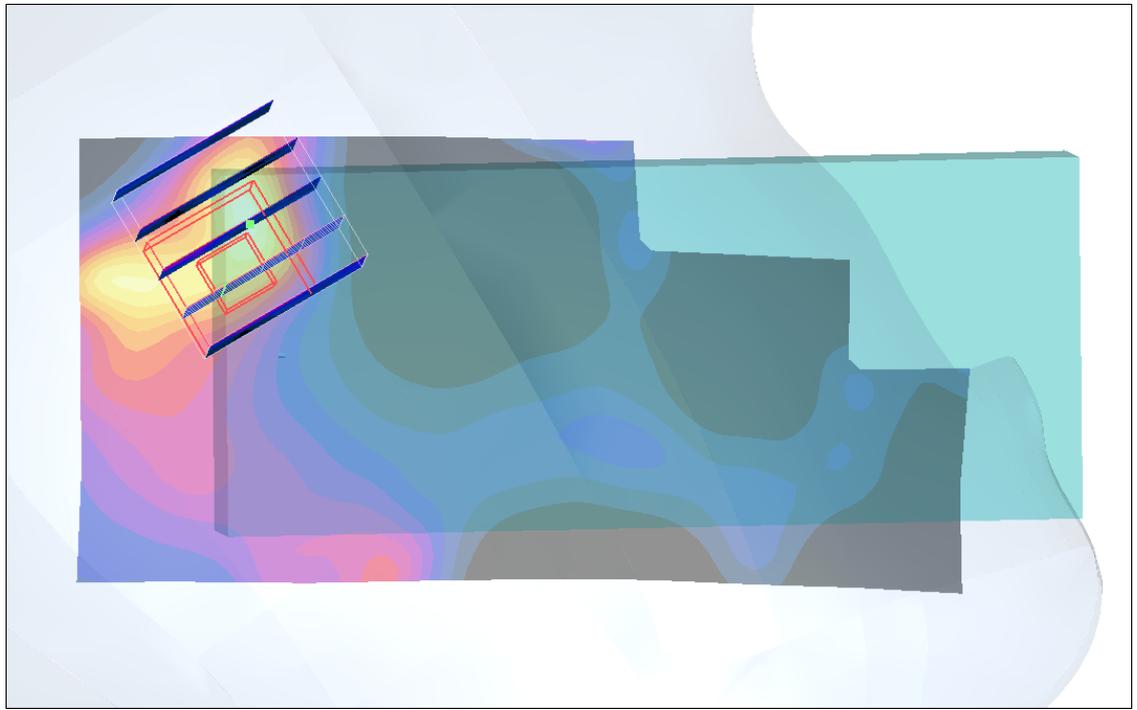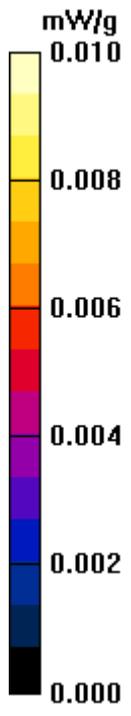

## #116 802.11b\_Right Cheek\_Ch1\_Slide Up\_Battery2

**DUT: 130815**

Communication System: 802.11b ; Frequency: 2412 MHz; Duty Cycle: 1:1  
Medium: HSL\_2450\_110503 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.8$  mho/m;  $\epsilon_r = 38.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.77, 6.77, 6.77); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch1/Area Scan (41x101x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR (interpolated) = 0.016 mW/g

**Ch1/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.37 V/m; Power Drift = 0.149 dB

Peak SAR (extrapolated) = 0.029 W/kg

**SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.00367 mW/g**

Maximum value of SAR (measured) = 0.012 mW/g


**Ch1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.37 V/m; Power Drift = 0.149 dB

Peak SAR (extrapolated) = 0.018 W/kg

**SAR(1 g) = 0.00957 mW/g; SAR(10 g) = 0.00407 mW/g**

Maximum value of SAR (measured) = 0.014 mW/g

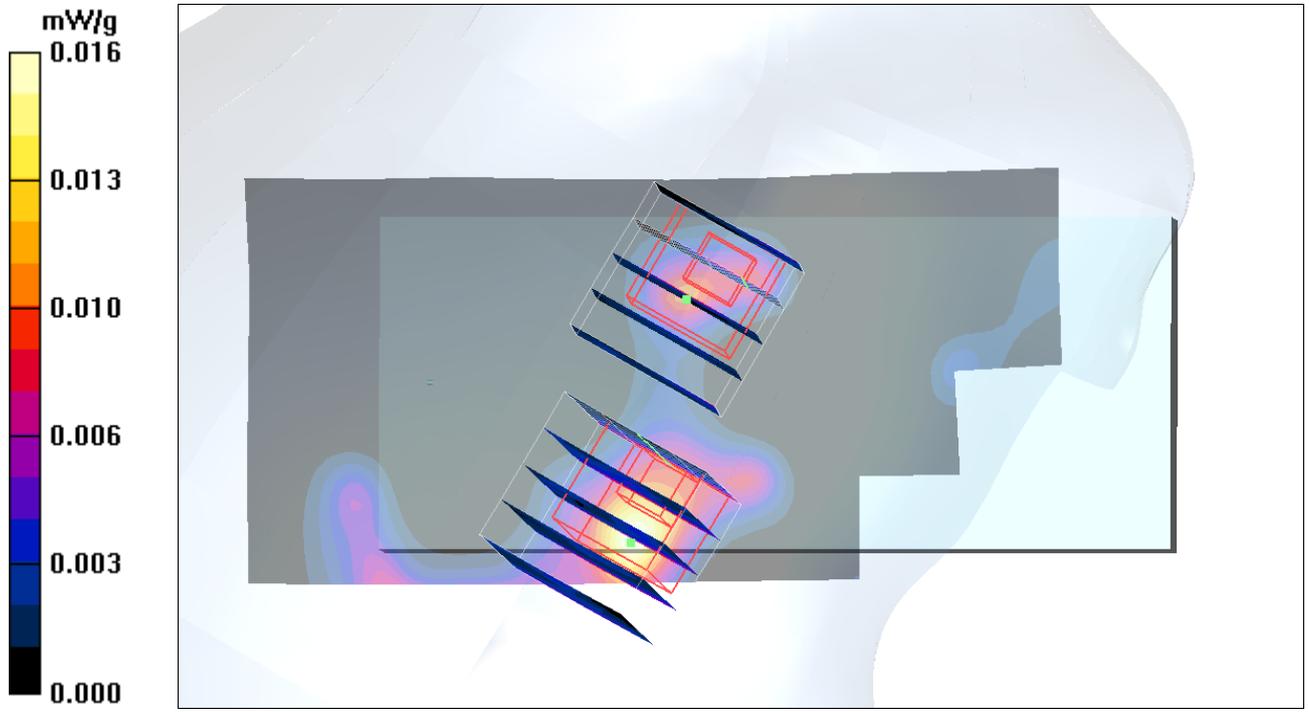

## #85 802.11a\_Right Check\_Ch104\_Slide Off\_Battery1

**DUT: 132125**

Communication System: 802.11a; Frequency: 5520 MHz; Duty Cycle: 1:1  
Medium: HSL\_5G\_110502 Medium parameters used :  $f = 5520$  MHz;  $\sigma = 5.13$   
mho/m;  $\epsilon_r = 35$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.46, 4.46, 4.46); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch104/Area Scan (81x161x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.184 mW/g



**Ch104/Zoom Scan (8x8x10)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.68 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.662 W/kg

**SAR(1 g) = 0.192 mW/g; SAR(10 g) = 0.071 mW/g**

Maximum value of SAR (measured) = 0.364 mW/g

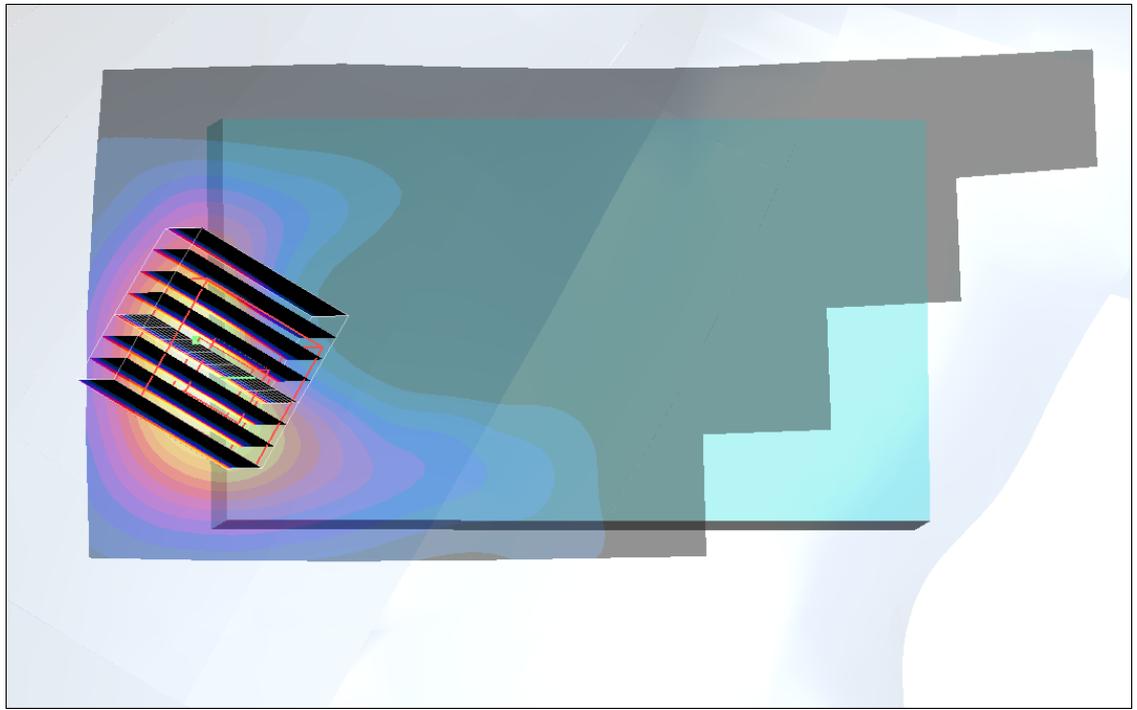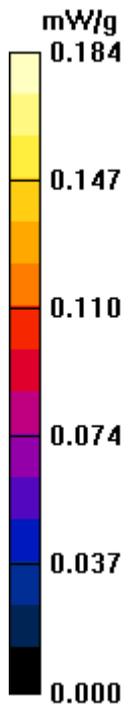

## #86 802.11a\_Right Tilted\_Ch104\_Slide Off\_Battery1

**DUT: 132125**

Communication System: 802.11n; Frequency: 5670 MHz; Duty Cycle: 1:1  
Medium: HSL\_5G\_110502 Medium parameters used :  $f = 5670$  MHz;  $\sigma = 5.28$   
mho/m;  $\epsilon_r = 34.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.07, 4.07, 4.07); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch134/Area Scan (101x201x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.524 mW/g



**Ch134/Zoom Scan (8x8x10)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.13 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.47 W/kg

**SAR(1 g) = 0.463 mW/g; SAR(10 g) = 0.172 mW/g**

Maximum value of SAR (measured) = 0.843 mW/g

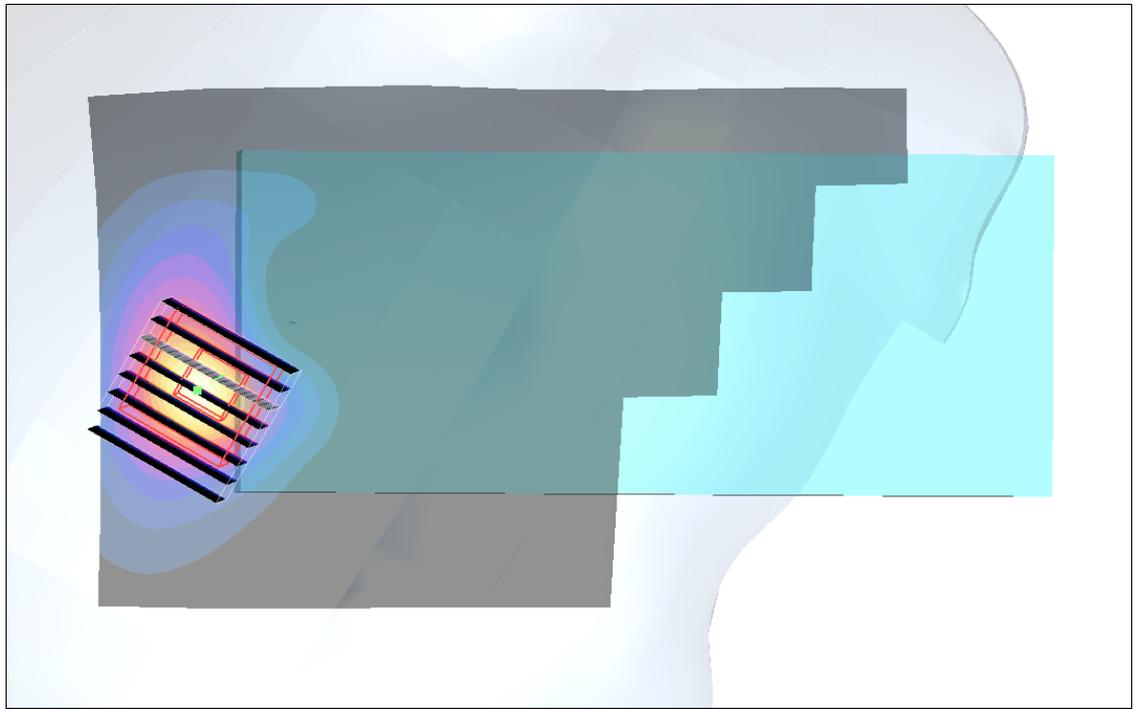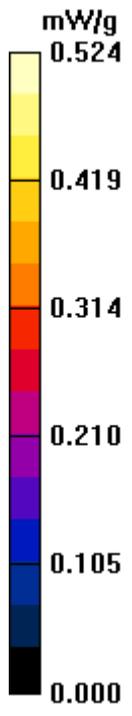

**#86 802.11a\_Right Tilted\_Ch104\_Slide Off\_Battery1\_2D**

**DUT: 132125**

Communication System: 802.11n; Frequency: 5670 MHz; Duty Cycle: 1:1

Medium: HSL\_5G\_110502 Medium parameters used:  $f = 5670$  MHz;  $\sigma = 5.28$  mho/m;  $\epsilon_r = 34.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.07, 4.07, 4.07); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch134/Area Scan (101x201x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.524 mW/g


**Ch134/Zoom Scan (8x8x10)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.13 V/m; Power Drift = 0.181 dB

Peak SAR (extrapolated) = 1.47 W/kg

**SAR(1 g) = 0.463 mW/g; SAR(10 g) = 0.172 mW/g**

Maximum value of SAR (measured) = 0.843 mW/g

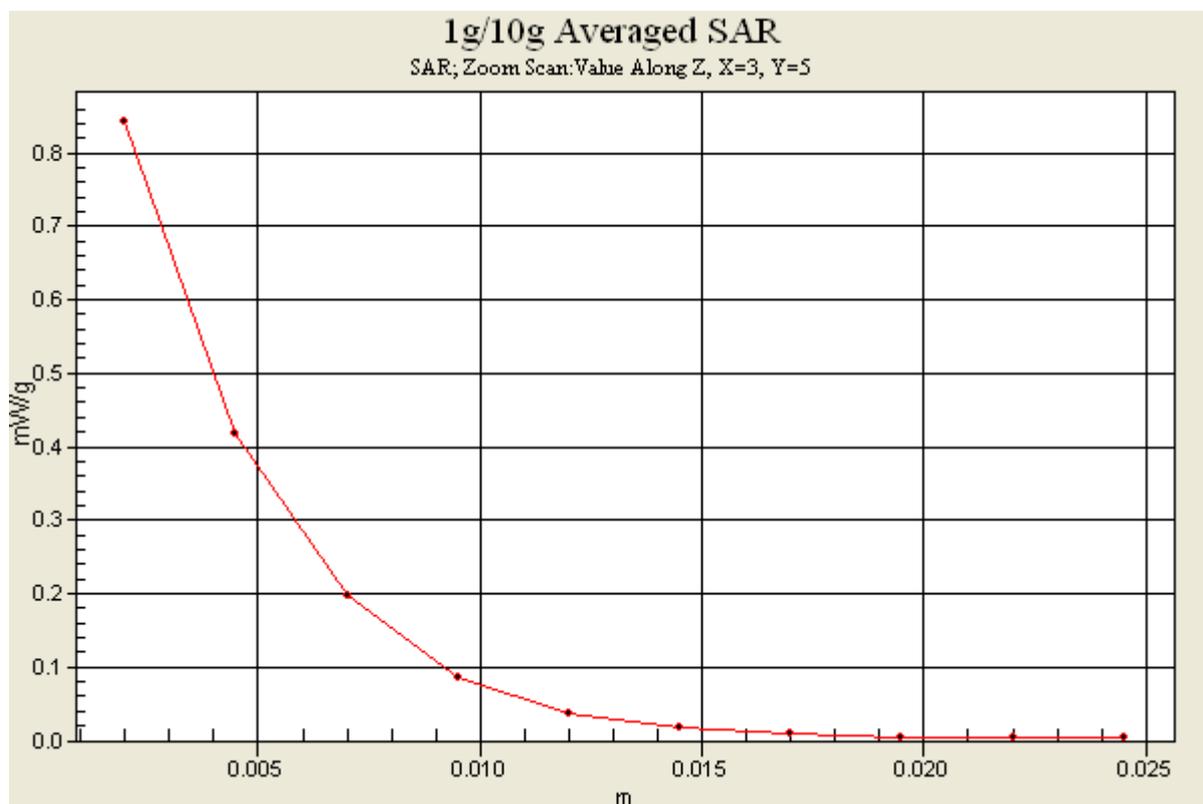

## #87 802.11a\_Left Check\_Ch104\_Slide Off\_Battery1

**DUT: 132125**

Communication System: 802.11a; Frequency: 5520 MHz; Duty Cycle: 1:1  
Medium: HSL\_5G\_110502 Medium parameters used :  $f = 5520$  MHz;  $\sigma = 5.13$   
mho/m;  $\epsilon_r = 35$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.46, 4.46, 4.46); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch104/Area Scan (81x161x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.341 mW/g



**Ch104/Zoom Scan (8x8x10)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.66 V/m; Power Drift = -0.190 dB

Peak SAR (extrapolated) = 0.620 W/kg

**SAR(1 g) = 0.194 mW/g; SAR(10 g) = 0.072 mW/g**

Maximum value of SAR (measured) = 0.355 mW/g

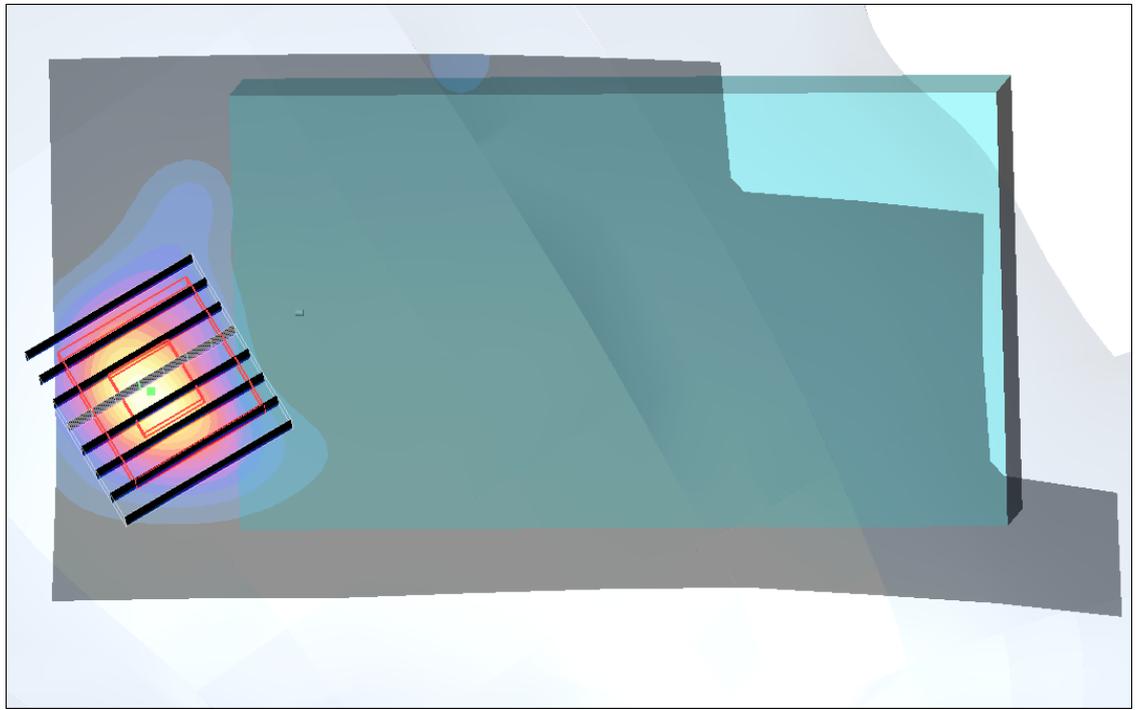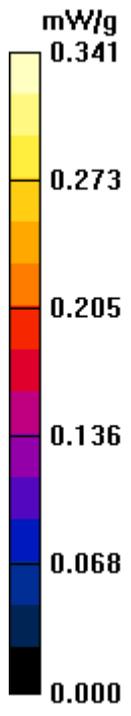

## #88 802.11a\_Left Tilted\_Ch104\_Slide Off\_Battery1

**DUT: 132125**

Communication System: 802.11a; Frequency: 5520 MHz; Duty Cycle: 1:1  
Medium: HSL\_5G\_110502 Medium parameters used :  $f = 5520$  MHz;  $\sigma = 5.13$   
mho/m;  $\epsilon_r = 35$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.46, 4.46, 4.46); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch104/Area Scan (81x161x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.391 mW/g


**Ch104/Zoom Scan (8x8x10)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.22 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.00 W/kg

**SAR(1 g) = 0.319 mW/g; SAR(10 g) = 0.117 mW/g**

Maximum value of SAR (measured) = 0.599 mW/g

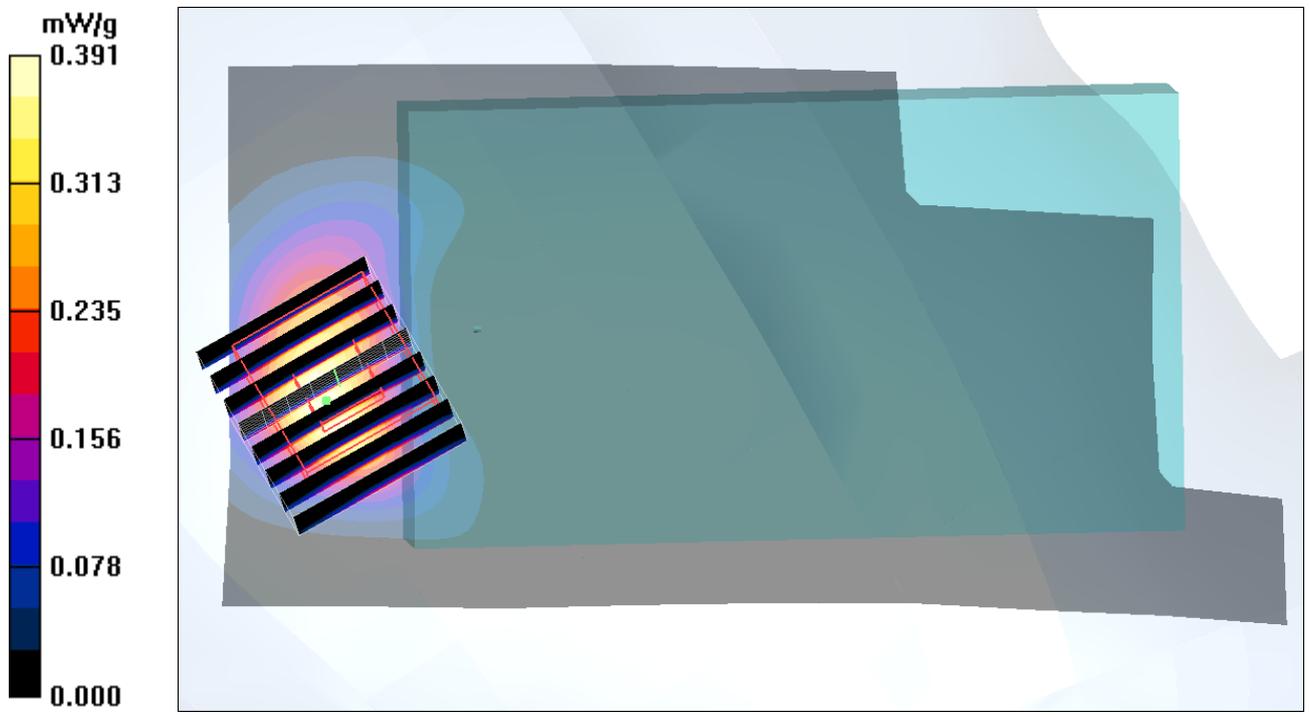

## #89 802.11a\_Right Check\_Ch104\_Slide Up\_Battery1

**DUT: 132125**

Communication System: 802.11a; Frequency: 5520 MHz; Duty Cycle: 1:1  
Medium: HSL\_5G\_110502 Medium parameters used :  $f = 5520$  MHz;  $\sigma = 5.13$   
mho/m;  $\epsilon_r = 35$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.46, 4.46, 4.46); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch104/Area Scan (101x181x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.016 mW/g

**Ch104/Zoom Scan (8x8x10)/Cube 1:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.102 dB

Peak SAR (extrapolated) = 0.234 W/kg

**SAR(1 g) = 0.021 mW/g; SAR(10 g) = 0.00347 mW/g**

Maximum value of SAR (measured) = 0.038 mW/g



**Ch104/Zoom Scan (8x8x10)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.102 dB

Peak SAR (extrapolated) = 0.179 W/kg

**SAR(1 g) = 0.018 mW/g; SAR(10 g) = 0.00588 mW/g**

Maximum value of SAR (measured) = 0.029 mW/g

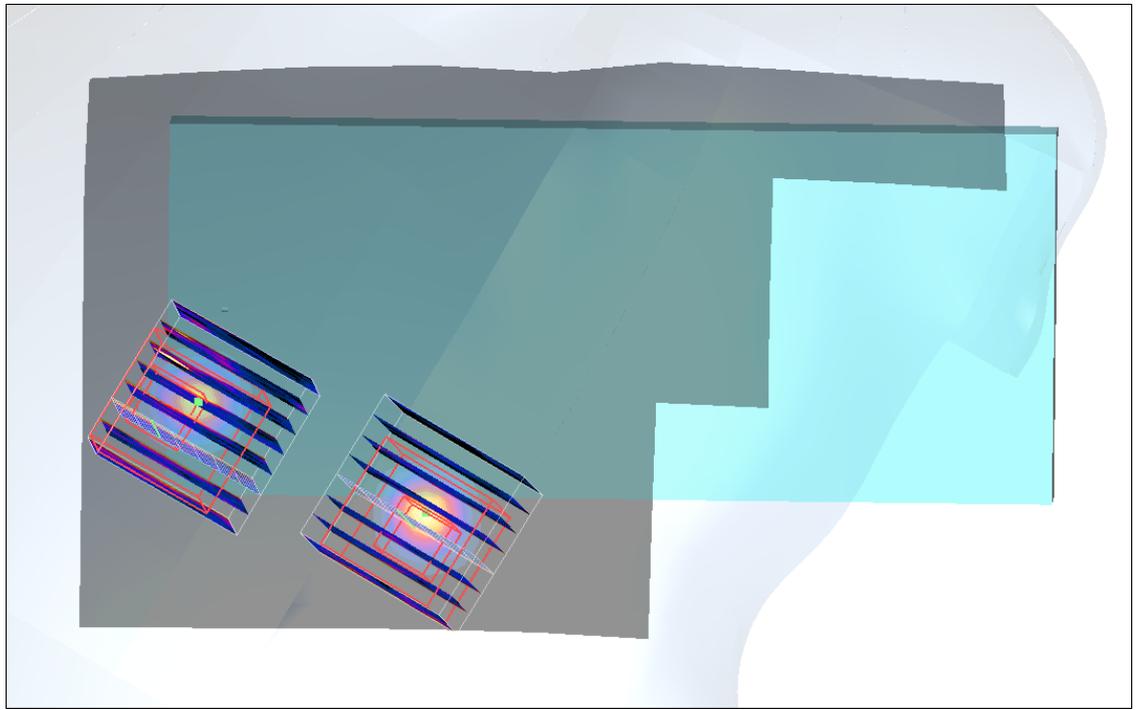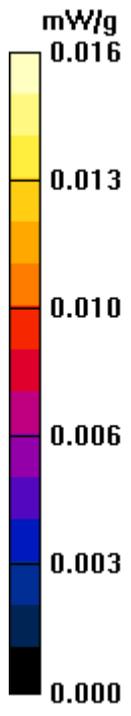

## #90 802.11a\_Right Tilted\_Ch104\_Slide Up\_Battery1

**DUT: 132125**

Communication System: 802.11a; Frequency: 5520 MHz; Duty Cycle: 1:1  
Medium: HSL\_5G\_110502 Medium parameters used :  $f = 5520$  MHz;  $\sigma = 5.13$   
mho/m;  $\epsilon_r = 35$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.46, 4.46, 4.46); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch104/Area Scan (101x201x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.026 mW/g



**Ch104/Zoom Scan (8x8x10)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.20 V/m; Power Drift = -0.101 dB

Peak SAR (extrapolated) = 0.086 W/kg

**SAR(1 g) = 0.018 mW/g; SAR(10 g) = 0.0071 mW/g**

Maximum value of SAR (measured) = 0.036 mW/g

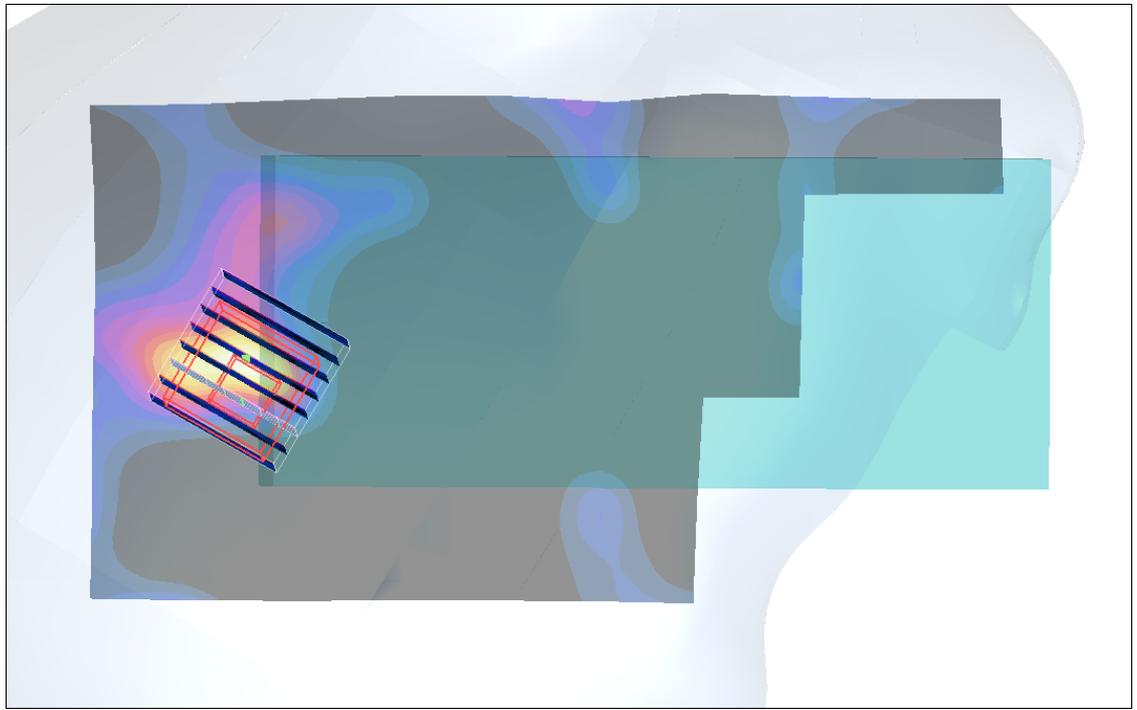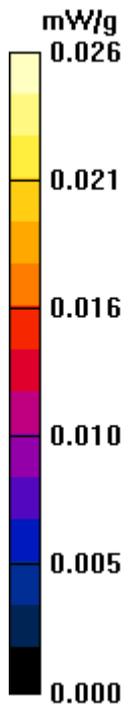

## #91 802.11a\_Left Cheek\_Ch104\_Slide Up\_Battery1

**DUT: 132125**

Communication System: 802.11a; Frequency: 5520 MHz; Duty Cycle: 1:1  
Medium: HSL\_5G\_110502 Medium parameters used :  $f = 5520$  MHz;  $\sigma = 5.13$   
mho/m;  $\epsilon_r = 35$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.46, 4.46, 4.46); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch104/Area Scan (101x201x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.058 mW/g



**Ch104/Zoom Scan (8x8x10)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.748 V/m; Power Drift = 0.166 dB

Peak SAR (extrapolated) = 0.229 W/kg

**SAR(1 g) = 0.023 mW/g; SAR(10 g) = 0.00766 mW/g**

Maximum value of SAR (measured) = 0.061 mW/g

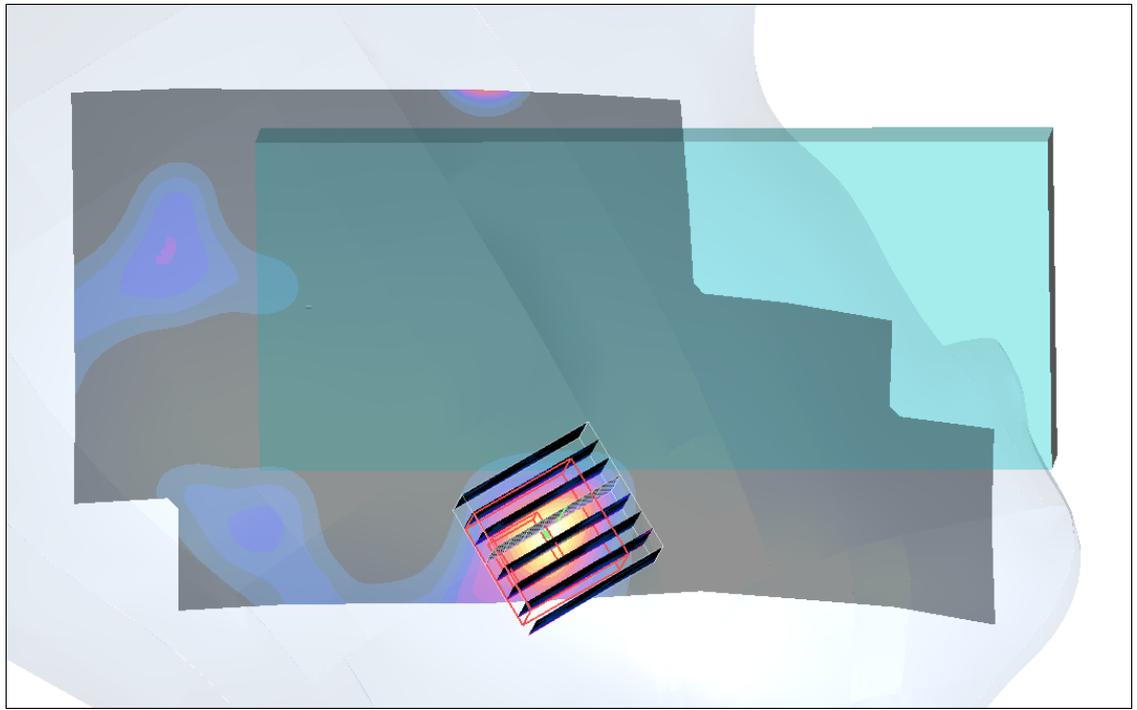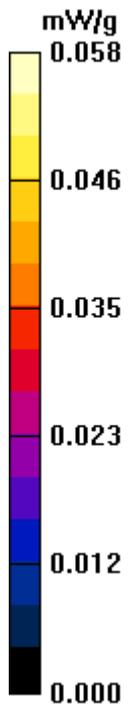

## #92 802.11a\_Left Tilted\_Ch104\_Slide Up\_Battery1

**DUT: 132125**

Communication System: 802.11a; Frequency: 5520 MHz; Duty Cycle: 1:1  
Medium: HSL\_5G\_110502 Medium parameters used :  $f = 5520$  MHz;  $\sigma = 5.13$   
mho/m;  $\epsilon_r = 35$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.46, 4.46, 4.46); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch104/Area Scan (101x201x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.060 mW/g


**Ch104/Zoom Scan (8x8x10)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.486 V/m; Power Drift = 0.175 dB

Peak SAR (extrapolated) = 0.150 W/kg

**SAR(1 g) = 0.018 mW/g; SAR(10 g) = 0.00709 mW/g**

Maximum value of SAR (measured) = 0.041 mW/g

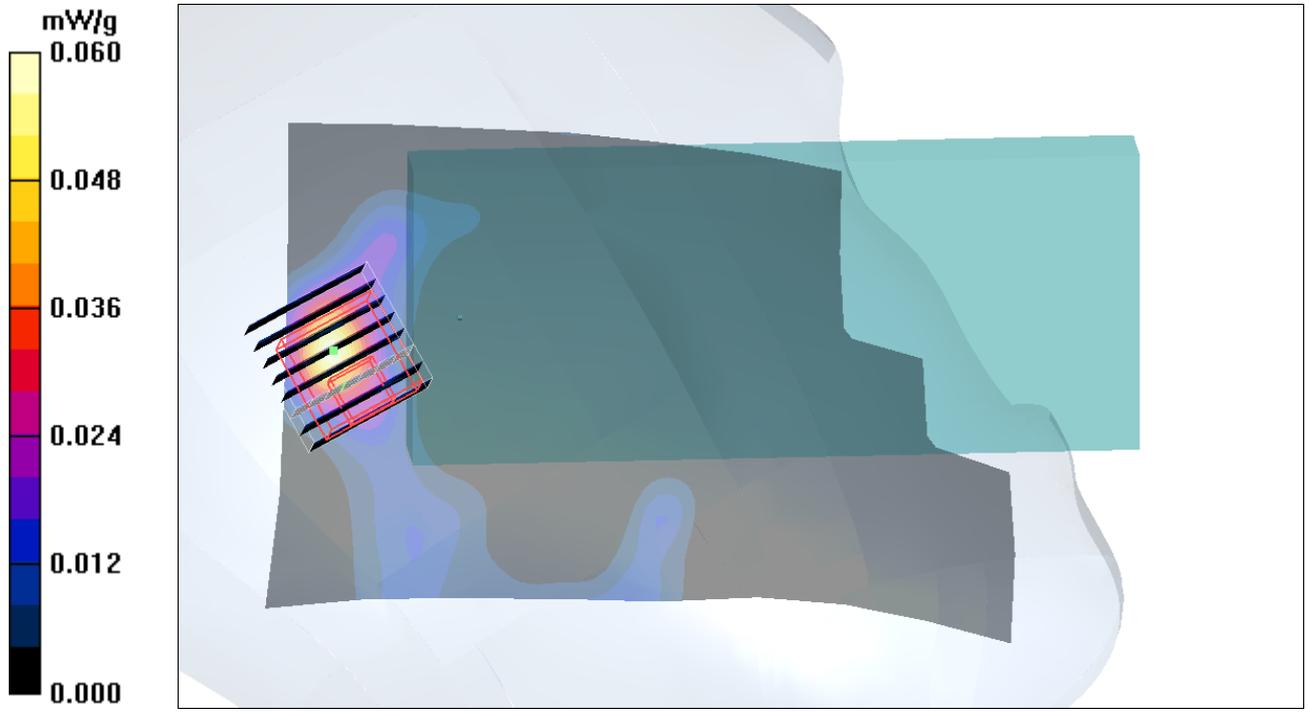

## #93 802.11n\_20M\_Right Tilted\_Ch64\_Slide off\_Battery1

**DUT: 132125**

Communication System: 802.11n; Frequency: 5320 MHz; Duty Cycle: 1:1  
Medium: HSL\_5G\_110502 Medium parameters used :  $f = 5320$  MHz;  $\sigma = 4.92$   
mho/m;  $\epsilon_r = 35.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.46, 4.46, 4.46); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch64/Area Scan (101x201x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.384 mW/g


**Ch64/Zoom Scan (8x8x10)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.03 V/m; Power Drift = -0.107 dB

Peak SAR (extrapolated) = 1.18 W/kg

**SAR(1 g) = 0.374 mW/g; SAR(10 g) = 0.140 mW/g**

Maximum value of SAR (measured) = 0.683 mW/g

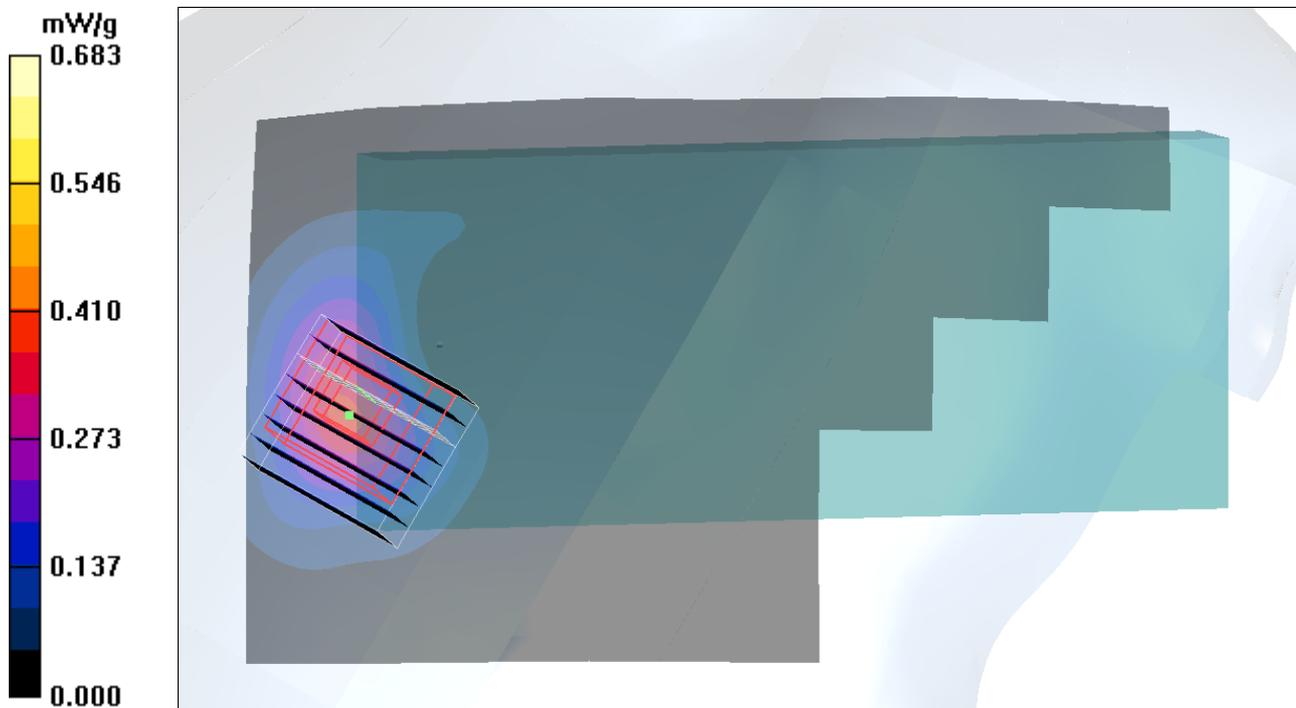

## #94 802.11a\_40M\_Right Tilted\_Ch134\_Slide Off\_Battery1

**DUT: 132125**

Communication System: 802.11a; Frequency: 5520 MHz; Duty Cycle: 1:1  
Medium: HSL\_5G\_110502 Medium parameters used :  $f = 5520$  MHz;  $\sigma = 5.13$   
mho/m;  $\epsilon_r = 35$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.46, 4.46, 4.46); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch104/Area Scan (81x161x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.287 mW/g



**Ch104/Zoom Scan (8x8x10)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.13 V/m; Power Drift = 0.980 dB

Peak SAR (extrapolated) = 1.08 W/kg

**SAR(1 g) = 0.320 mW/g; SAR(10 g) = 0.117 mW/g**

Maximum value of SAR (measured) = 0.595 mW/g

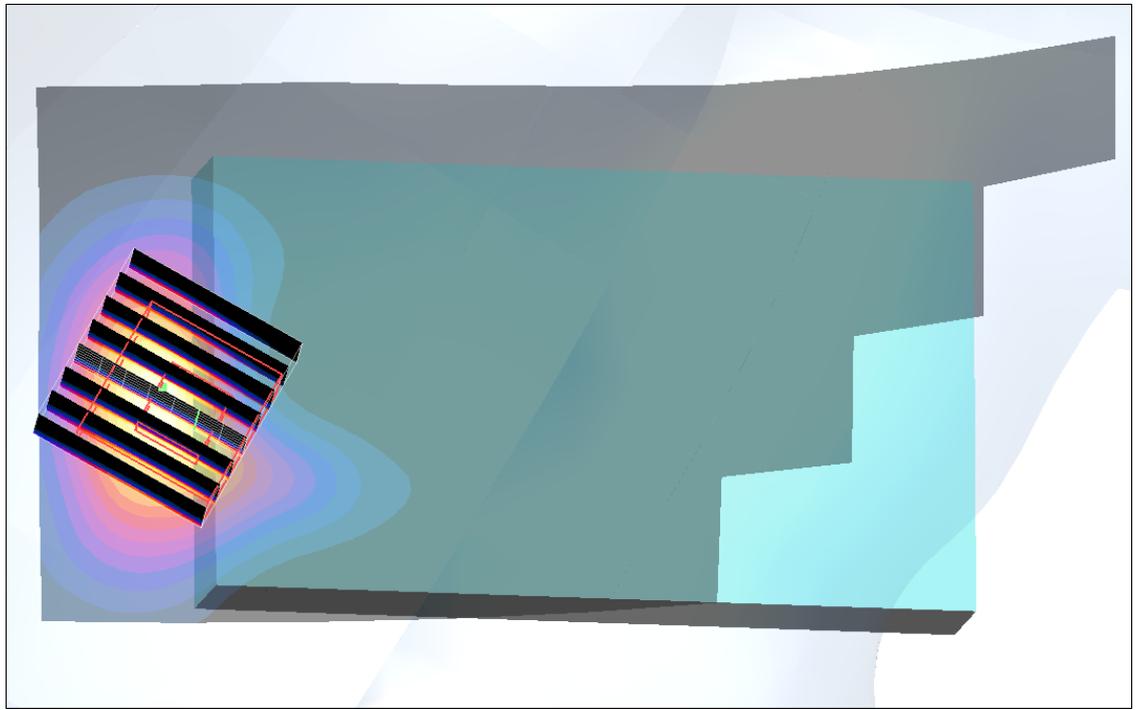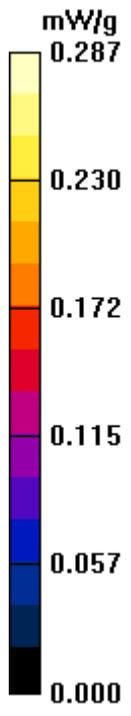

## #95 802.11a\_Right Tilted\_Ch36\_Slide Off\_Battery1

**DUT: 132125**

Communication System: 802.11a; Frequency: 5180 MHz; Duty Cycle: 1:1  
Medium: HSL\_5G\_110502 Medium parameters used :  $f = 5180$  MHz;  $\sigma = 4.77$   
mho/m;  $\epsilon_r = 35.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(4.83, 4.83, 4.83); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/10/5
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch36/Area Scan (101x201x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.184 mW/g

**Ch36/Zoom Scan (8x8x10)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.41 V/m; Power Drift = -0.168 dB

Peak SAR (extrapolated) = 0.537 W/kg

**SAR(1 g) = 0.167 mW/g; SAR(10 g) = 0.063 mW/g**

Maximum value of SAR (measured) = 0.302 mW/g