



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION**

TEST REPORT

FOR

Wireless Print Server Module

MODEL NUMBER: RSVLD-0403

FCC ID: B94RSVLD0403

REPORT NUMBER: 04U3067-1 REVISION B

ISSUE DATE: NOVEMBER 16, 2004

Prepared for

**HEWLETT PACKARD COMPANY
3000 HANOVER STREET
PALO ALTO, CALIFORNIA 94304
U.S.A.**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**



Revision History

<u>Rev.</u>	<u>Revisions</u>	<u>Revised By</u>
B	Change USB 1.0 to USB 1.1	D. Zhan

TABLE OF CONTENTS

1. TEST RESULT DECLARATION	4
2. EUT DESCRIPTION.....	5
3. TEST METHODOLOGY	6
4. FACILITIES AND ACCREDITATION	6
5. CALIBRATION AND UNCERTAINTY.....	7
5.1. MEASURING INSTRUMENT CALIBRATION.....	7
5.2. MEASUREMENT UNCERTAINTY.....	7
5.3. TEST AND MEASUREMENT EQUIPMENT.....	8
6. SETUP OF EQUIPMENT UNDER TEST	9
6.1. USB 1.1 CONFIGURATION.....	9
6.2. USB 2.0 CONFIGURATION.....	11
7. APPLICABLE LIMITS AND TEST RESULTS	13
7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND	13
7.1.1. 6 dB BANDWIDTH	13
7.1.2. 99% BANDWIDTH.....	20
7.1.3. PEAK OUTPUT POWER	27
7.1.4. MAXIMUM PERMISSIBLE EXPOSURE	35
7.1.5. AVERAGE POWER.....	38
7.1.6. PEAK POWER SPECTRAL DENSITY	39
7.1.7. CONDUCTED SPURIOUS EMISSIONS.....	46
7.2. RADIATED EMISSIONS.....	59
7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS	59
7.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND	62
7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz WITH USB 1.1 CONFIGURATION.....	80
7.2.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz WITH USB 2.0 CONFIGURATION.....	84
7.3. POWERLINE CONDUCTED EMISSIONS	88
8. SETUP PHOTOS	94

1. TEST RESULT DECLARATION

COMPANY NAME: HEWLETT PACKARD COMPANY
3000 HANOVER ST.
PALO ALTO, CA 94304
U.S.A

EUT DESCRIPTION: Wireless Print Server Module

MODEL: RSVLD-0403

DATE TESTED: OCTOBER 22 – NOVEMBER 02, 2004

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Approved & Released For CCS By:

Tested By:



YAN ZHENG
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

NEELESH RAJ
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. EUT DESCRIPTION

The EUT is an 802.11b/g USB transceiver operating in the 2400-2483.5 MHz band. The EUT can be configured to operate in a USB 1.1 mode or a USB 2.0 mode.

The transmitter has a maximum peak conducted output power as follows:

2400 to 2483.5 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	23.03	200.91
2412 - 2462	802.11g	25.30	338.84

The radio utilizes two integral antennas for diversity, each with a maximum gain of 2.41 dBi.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4/2001, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.



No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.

5. CALIBRATION AND UNCERTAINTY

5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	8379443	10/21/05
Site A Line Stabilizer / Conditioner	Tripplite	LC-1800a	A0051681	CNR
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	8/30/05
EMI Test Receiver	R & S	ESHS 20	827129/006	10/22/05
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	11/21/04
RF Filter Section	HP	85420E	3705A00256	11/21/04
30MHz---- 2Ghz	Sunol Sciences	JB1 Antenna	A121003	12/22/04
Spectrum Analyzer	Agilent	E4446A	MY43360112	1/13/05
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	2238	9/12/05
Amplifier 1-26GHz	MITEQ	NSP2600-SP	924342	8/17/05
2.4-2.5 GHz Reject Filter	Micro-Tronics	BRM50702	1	N/A
4.0 GHz High Pass Filter	Micro-Tronics	HPM-13351	1	N/A

6. SETUP OF EQUIPMENT UNDER TEST

WORST-CASE

The X, Y and Z positions were investigated during the radiated emission test; “Y” position was found to be the worst case. All the tests were performed at the worst-case position. For B mode all tests were performed at 11 Mbps data rate, which has the highest power and highest PPSD results; for G mode all tests were performed at 6 Mbps data rate, which has the highest power and highest PPSD results.

There are two configurations for this device, USB 1.1 and USB 2.0. Due to USB 2.0 configuration yields the worst-case results, therefore, all the tests were performed by USB 2.0 configuration except the radiated emission test for below 1GHz.

6.1. USB 1.1 CONFIGURATION

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
LAPTOP	DELL	LATITUDE D400	81424010113260300	N/A
AC ADAPTER	DELL	AA22850	CN-OT2357-16291	N/A
USB CONVERTER	INTEL	8X931A	N/A	N/A
AC ADAPTER	DELTA	ADP-105B REV.B	BMW0302019430	N/A


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB 1.0	1	USB	SHIELDED	0.77M	N/A
2	USB 2.0	1	USB	SHIELDED	0.90M	FERRITE BOTH ENDS
3	DC PWR	1	DC PWR	UNSHIELDED	1.64M	FERRITE BOTH ENDS
4	DC PWR	1	DC PWR	UNSHIELDED	1.74M	FERRITE LAPTOP END

TEST SETUP

During the process of testing, the EUT was connected to the USB 1.1 converter and set into continuous transmit mode. For all tests the accessory equipment was located outside the test site except for AC power line conduction.

SETUP DIAGRAM FOR TESTS

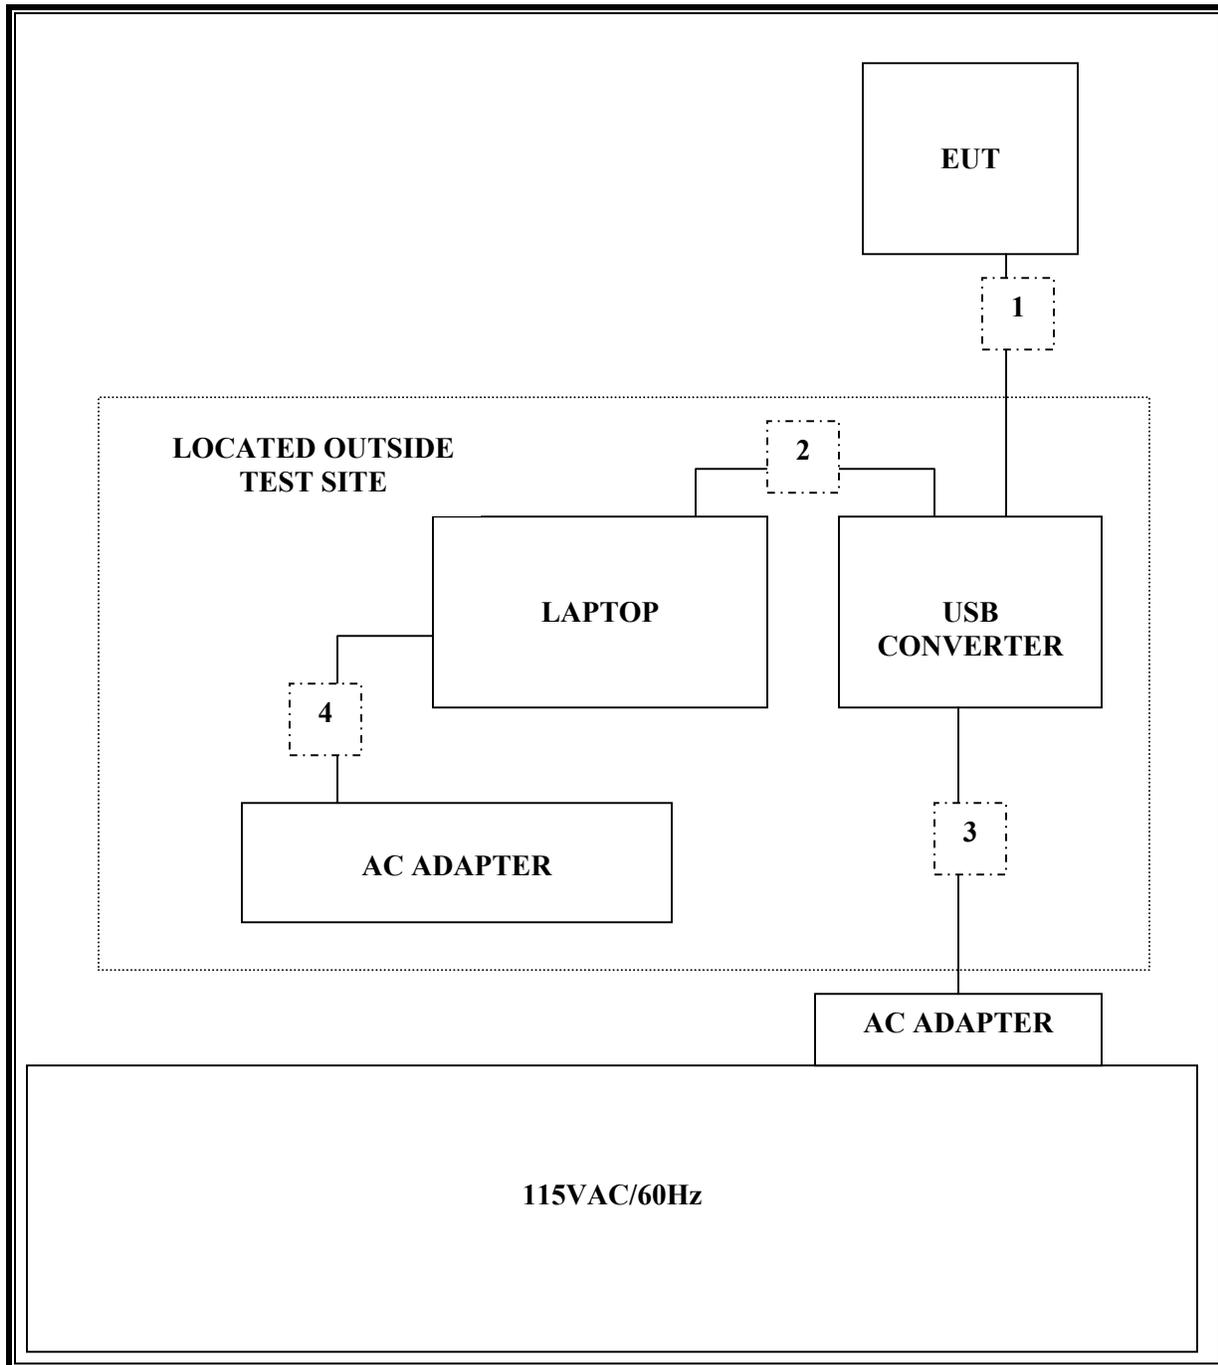

6.2. USB 2.0 CONFIGURATION

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
LAPTOP	DELL	LATITUDE D400	81424010113260300	N/A
AC ADAPTER	DELL	AA22850	CN-OT2357-16291	N/A


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB 2.0	1	USB	SHIELDED	1.81M	N/A
2	DC PWR	1	DC PWR	UNSHIELDED	1.74M	FERRITE LAPTOP END
3	AC PWR	1	AC PWR	UNSHIELDED	1.86M	N/A

TEST SETUP

During the process of testing, the EUT was connected to the laptop (USB 2.0) and set into continuous transmit mode. For all tests the accessory equipment was located outside the test site except for AC power line conduction.

SETUP DIAGRAM FOR TESTS

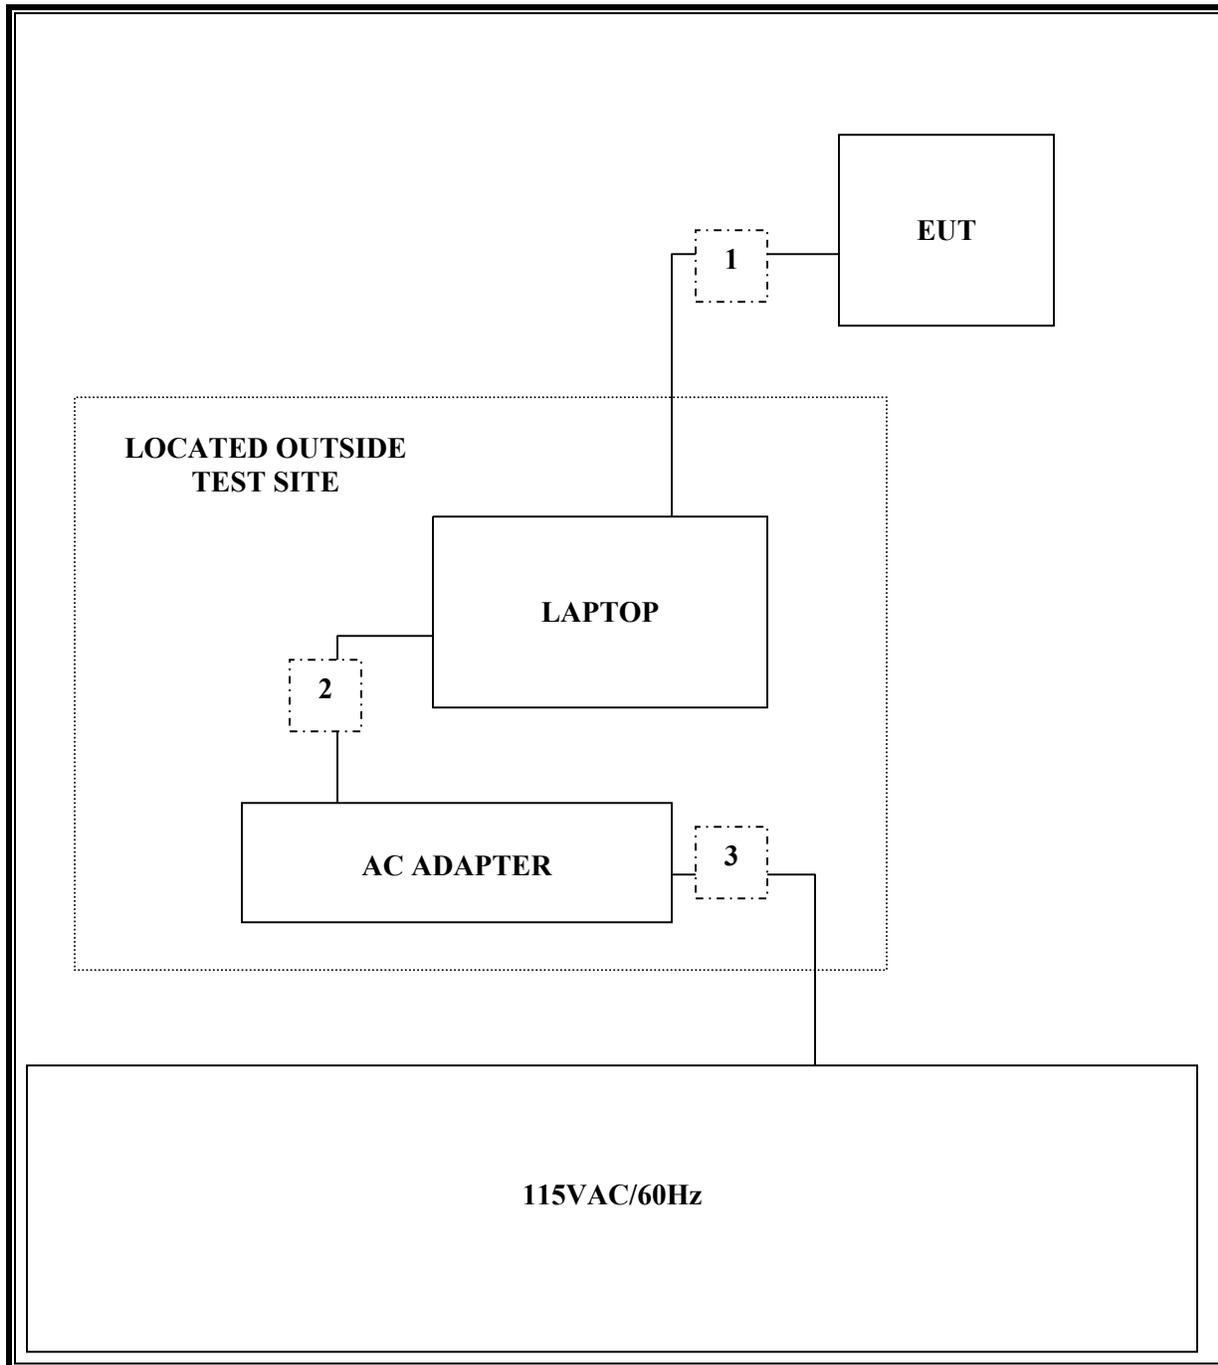

7. APPLICABLE LIMITS AND TEST RESULTS

7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND

7.1.1. 6 dB BANDWIDTH

LIMIT

§15.247 (a) (2) for direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	11200	500	10700
Middle	2437	10600	500	10100
High	2462	11530	500	11030


802.11g Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	16350	500	15850
Middle	2437	16500	500	16000
High	2462	16500	500	16000


6 DB BANDWIDTH (802.11b MODE)

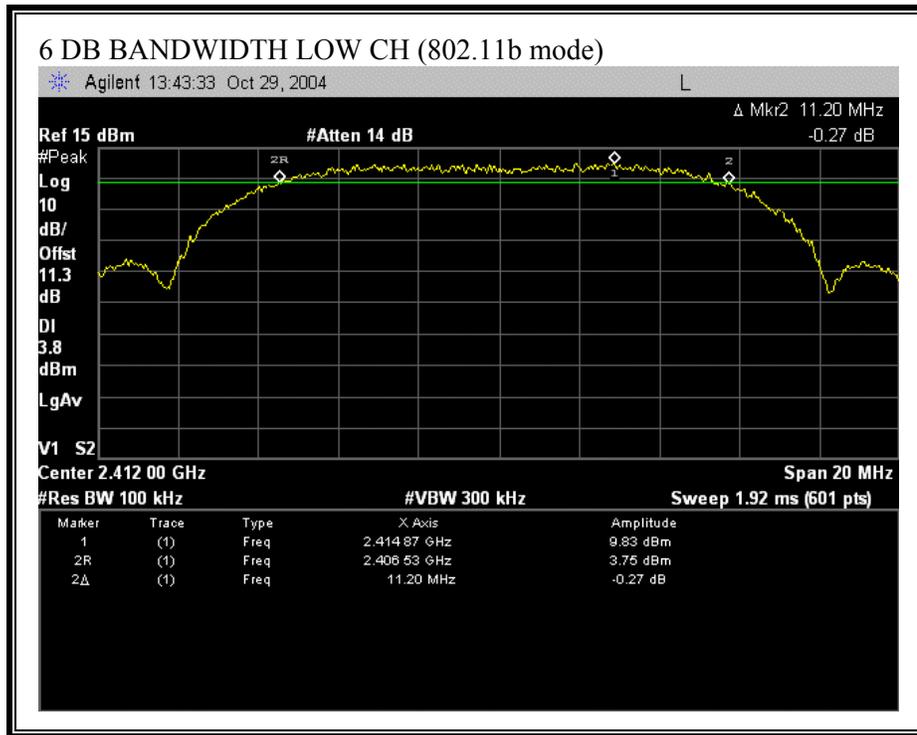


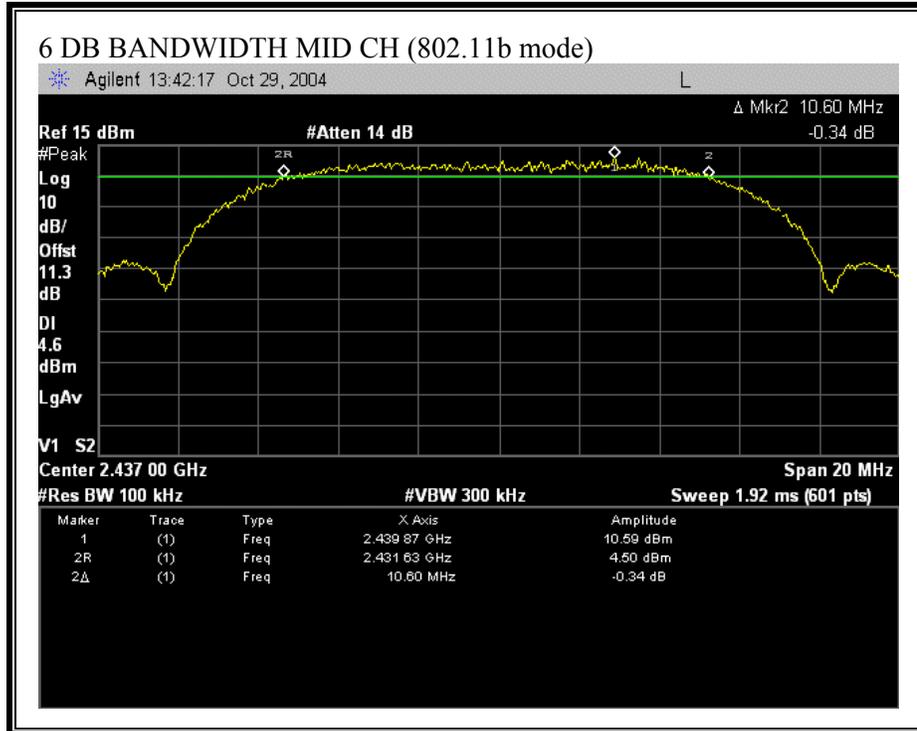


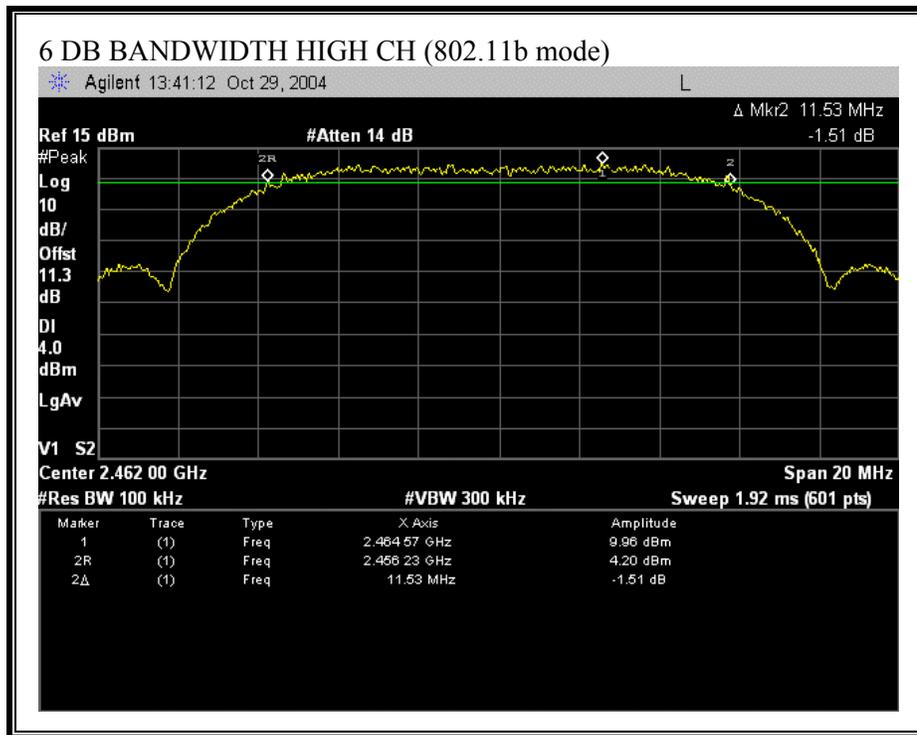

6 DB BANDWIDTH (802.11g MODE)

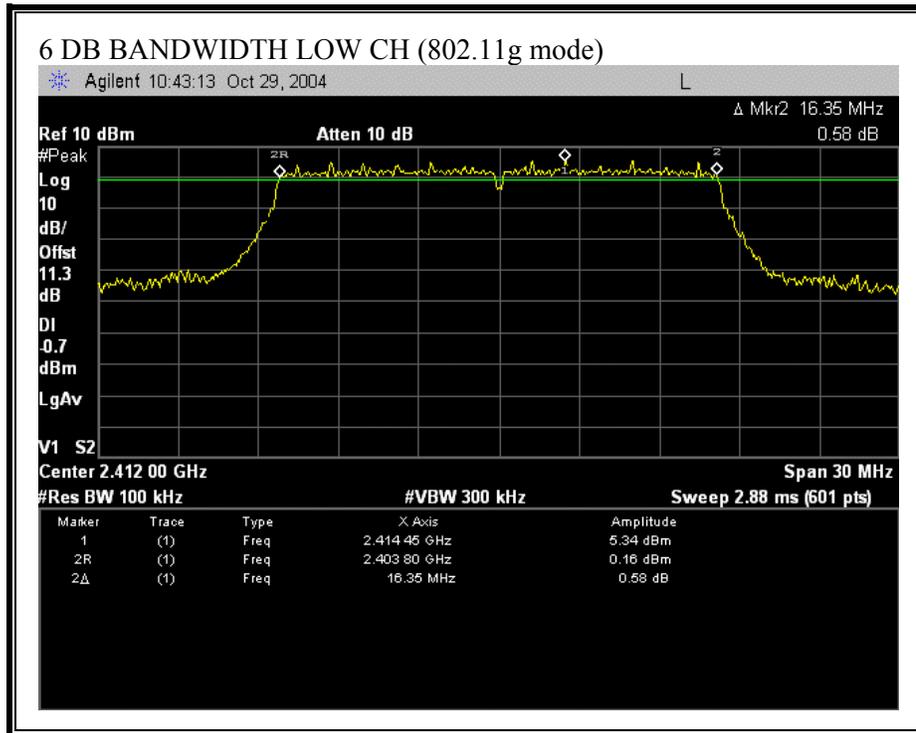

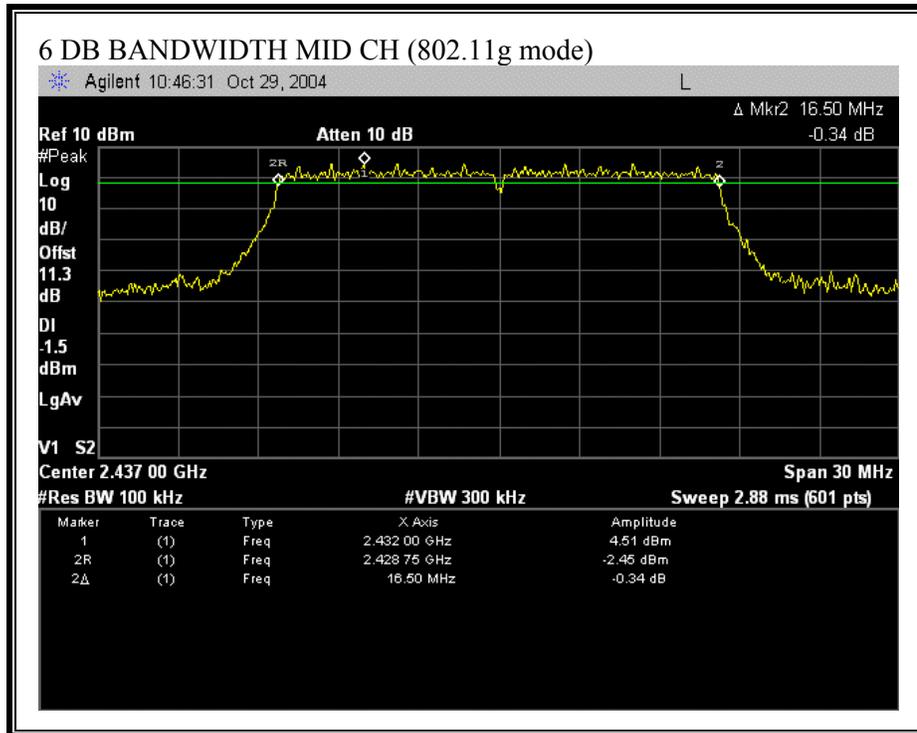

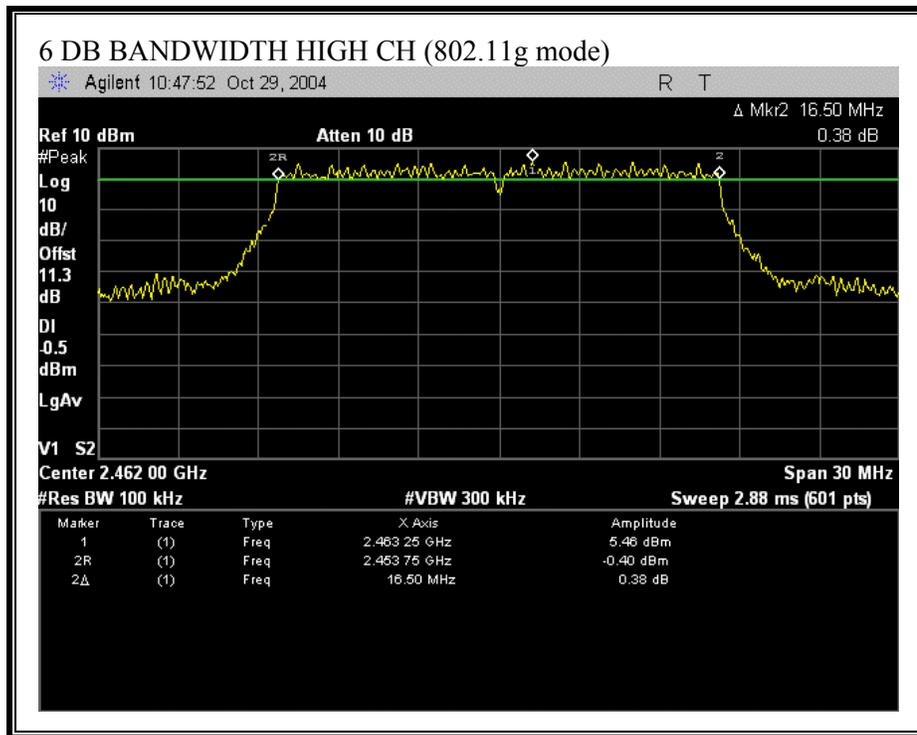

7.1.2. 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	12.877
Middle	2437	12.8574
High	2462	12.8502


802.11g Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.4821
Middle	2437	16.4612
High	2462	16.5017


99% BANDWIDTH (802.11b MODE)

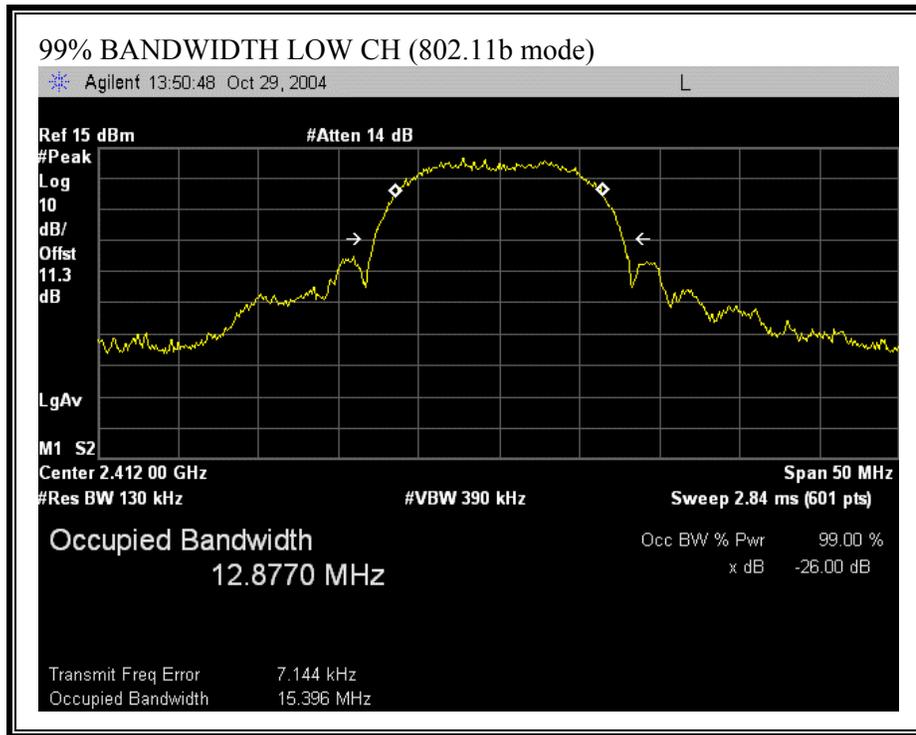


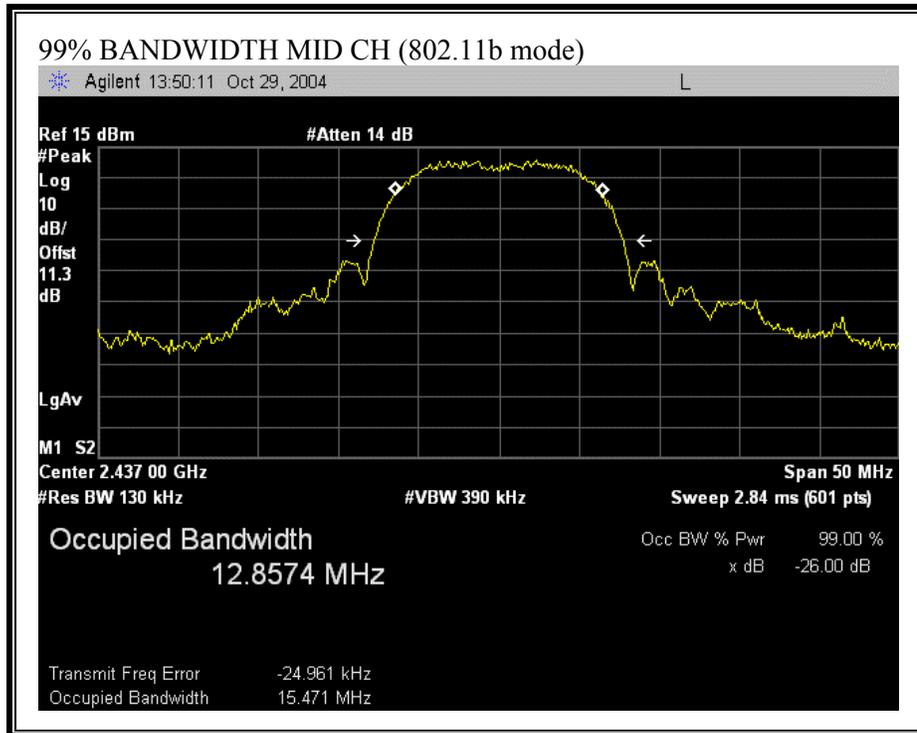


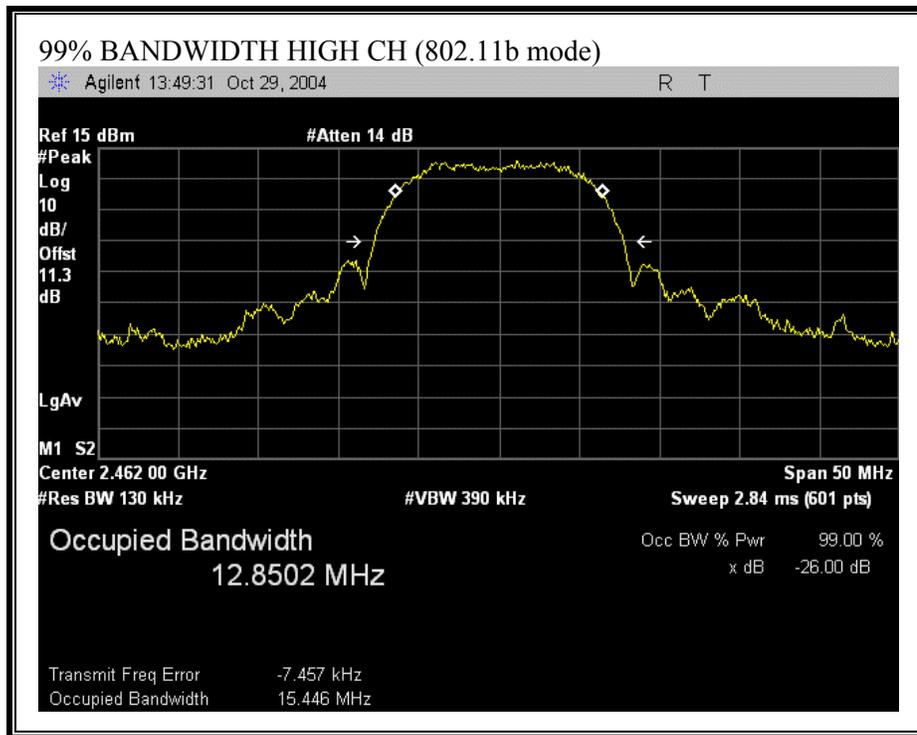

99% BANDWIDTH (802.11g MODE)

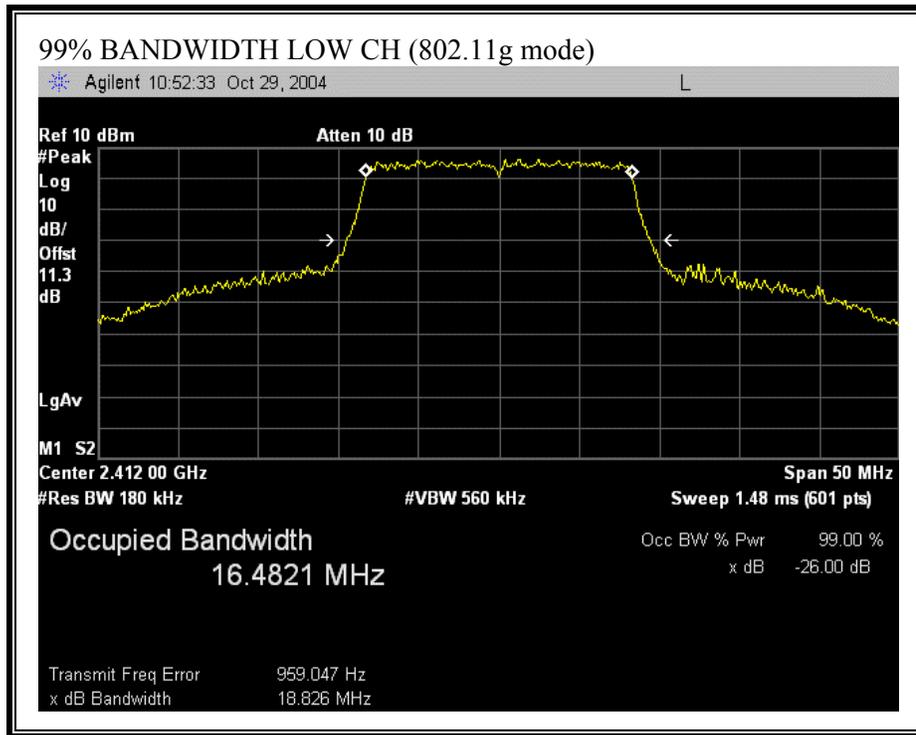

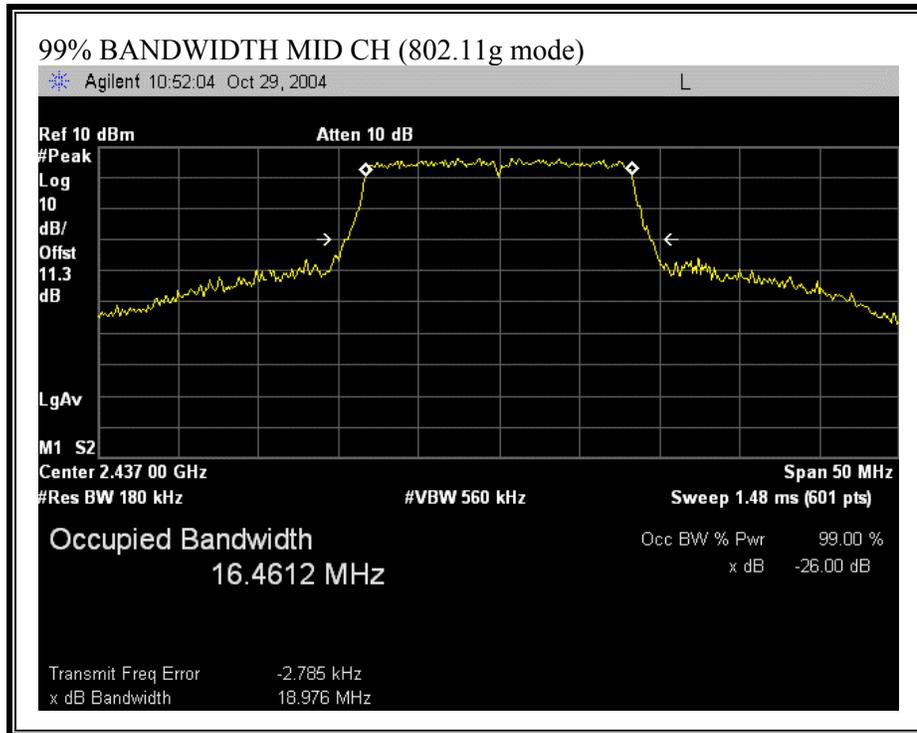

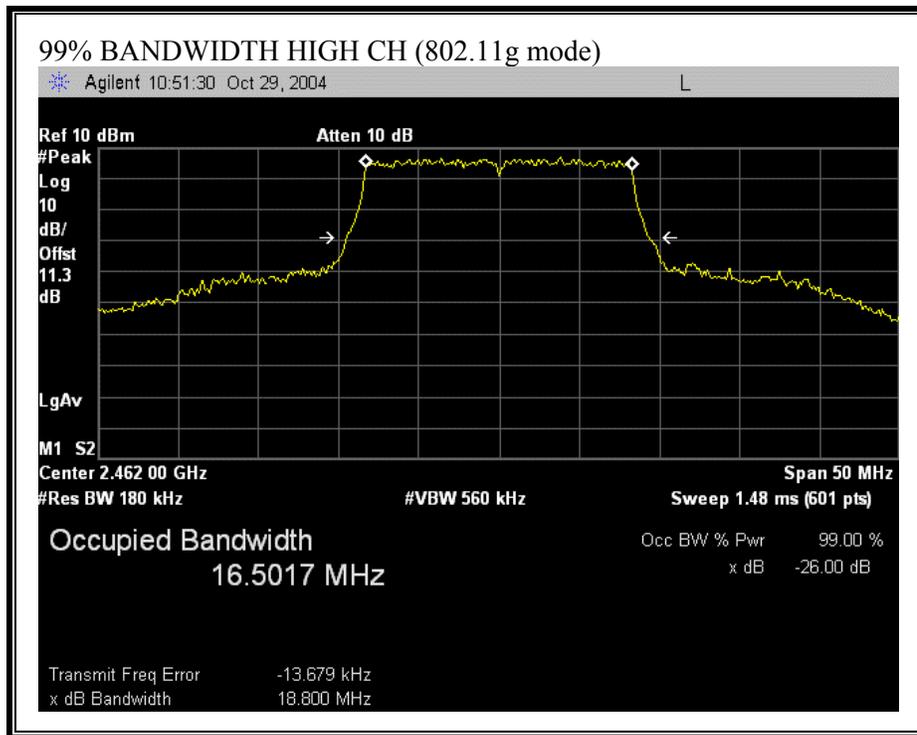

7.1.3. PEAK OUTPUT POWER

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(4) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.247 (b) (4) (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

RESULTS

The maximum antenna gain is 2.41 dBi for other than fixed, point-to-point operations; therefore the limit is 30 dBm.

No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	22.97	30	-7.03
Middle	2437	23.03	30	-6.97
High	2462	22.81	30	-7.19


802.11g Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	25.03	30	-4.97
Middle	2437	25.11	30	-4.89
High	2462	25.30	30	-4.70


OUTPUT POWER (802.11b MODE)

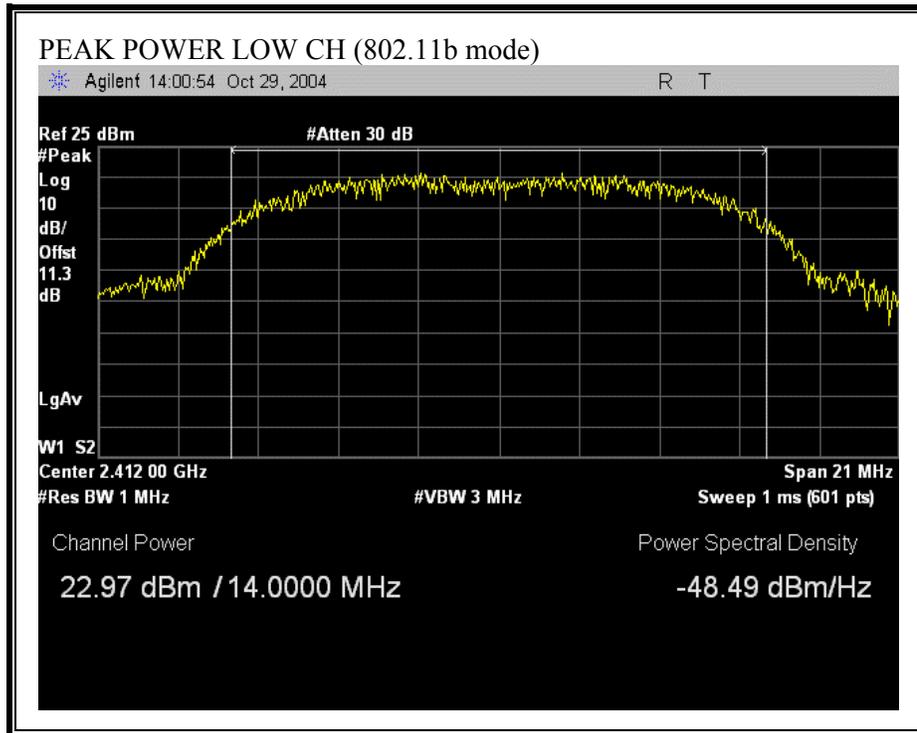


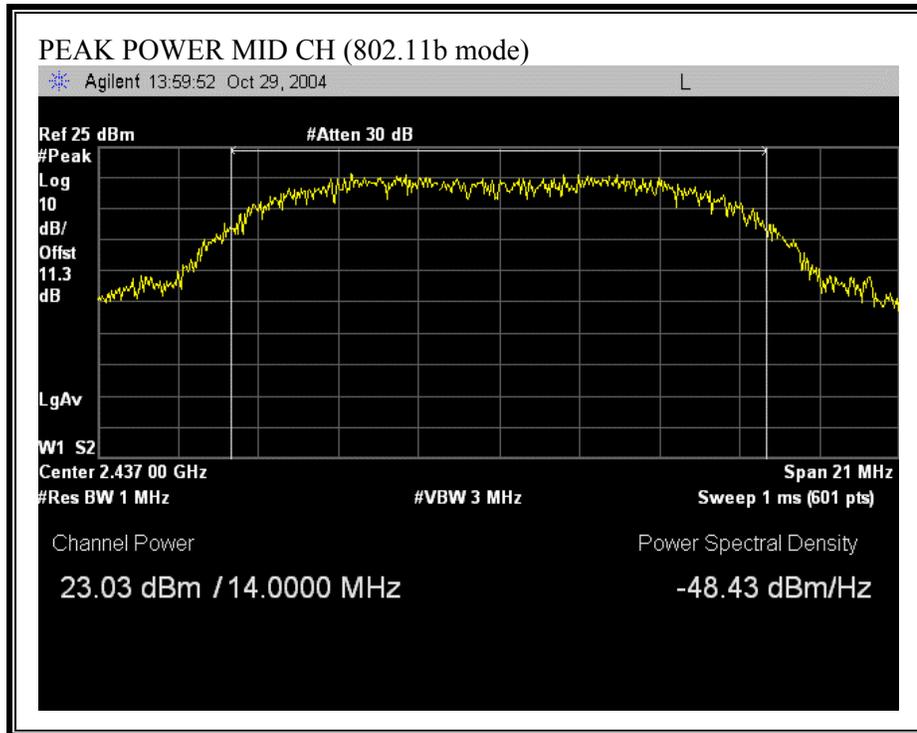


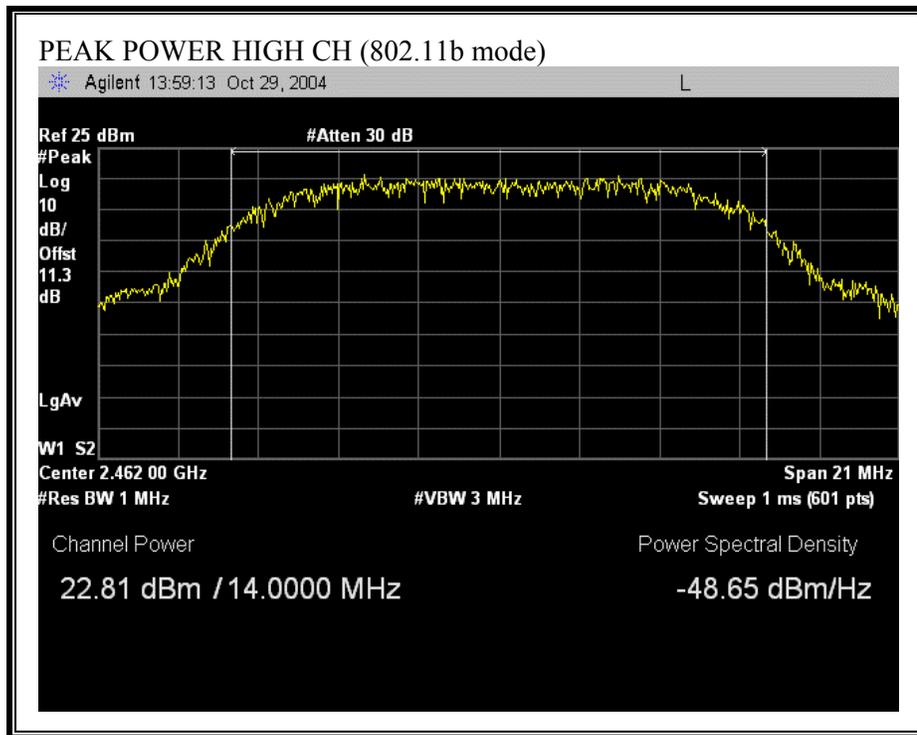

OUTPUT POWER (802.11g MODE)

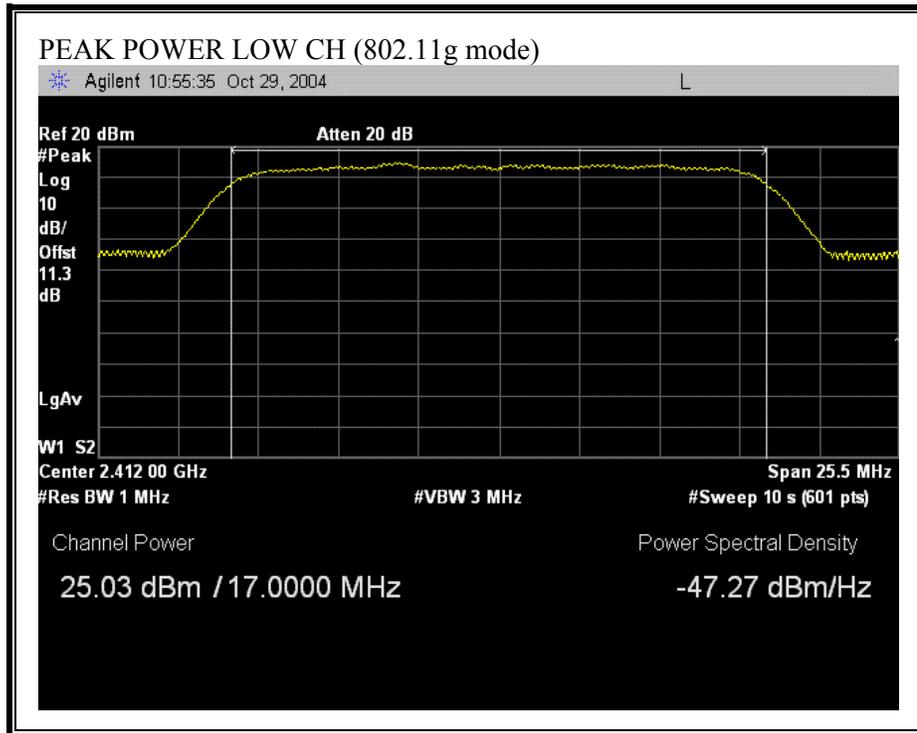

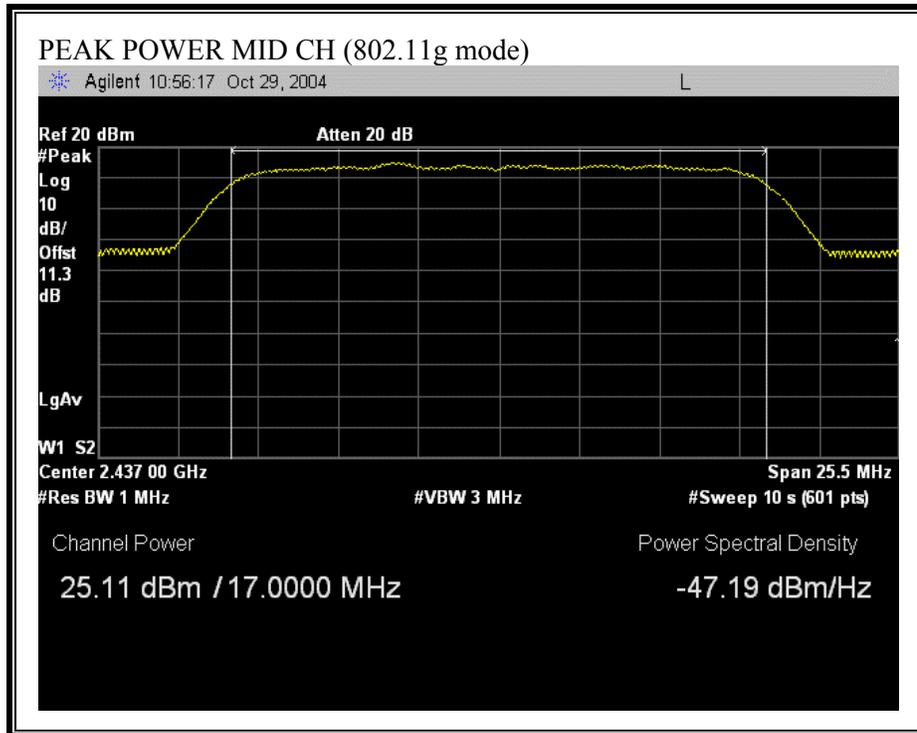

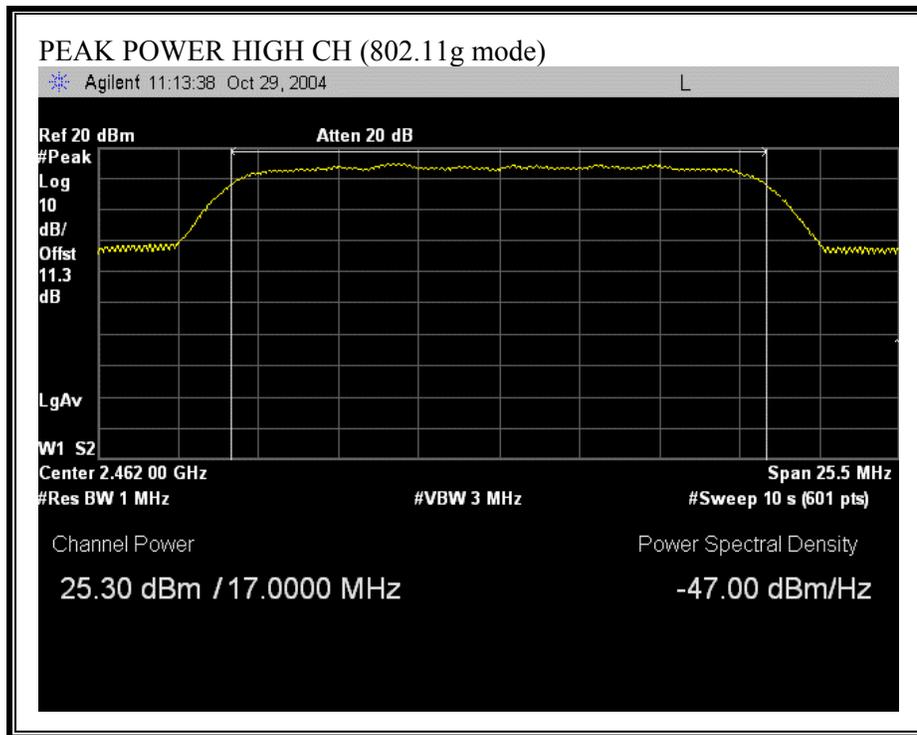

7.1.4. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S} \quad \text{Equation (1)}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Equation (1) and the measured peak power is used to calculate the MPE distance.

LIMITS

From §1.1310 Table 1 (B), $S = 1.0 \text{ mW/cm}^2$

RESULTS

No non-compliance noted:

Mode	Power Density Limit (mW/cm²)	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
802.11b	1.0	23.03	2.41	5.28
802.11g	1.0	25.30	2.41	6.85

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

7.1.5. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 11.3 dB (including 10 dB pad and 1.3 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11b Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	19.03
Middle	2437	19.05
High	2462	19.02

802.11g Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	16.52
Middle	2437	16.52
High	2462	16.53

Note: Average power was measured as a time gated measurement (packet power).

7.1.6. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

RESULTS

No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-3.97	8	-11.97
Middle	2437	-4.12	8	-12.12
High	2462	-4.00	8	-12.00


802.11g Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-8.33	8	-16.33
Middle	2437	-9.56	8	-17.56
High	2462	-7.73	8	-15.73


PEAK POWER SPECTRAL DENSITY (802.11b MODE)

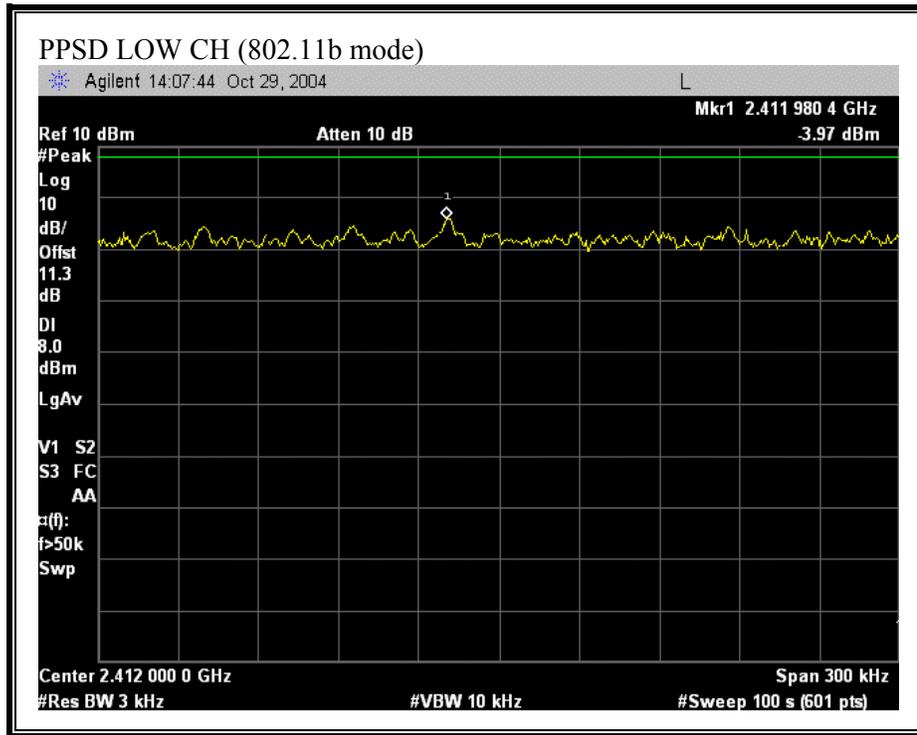


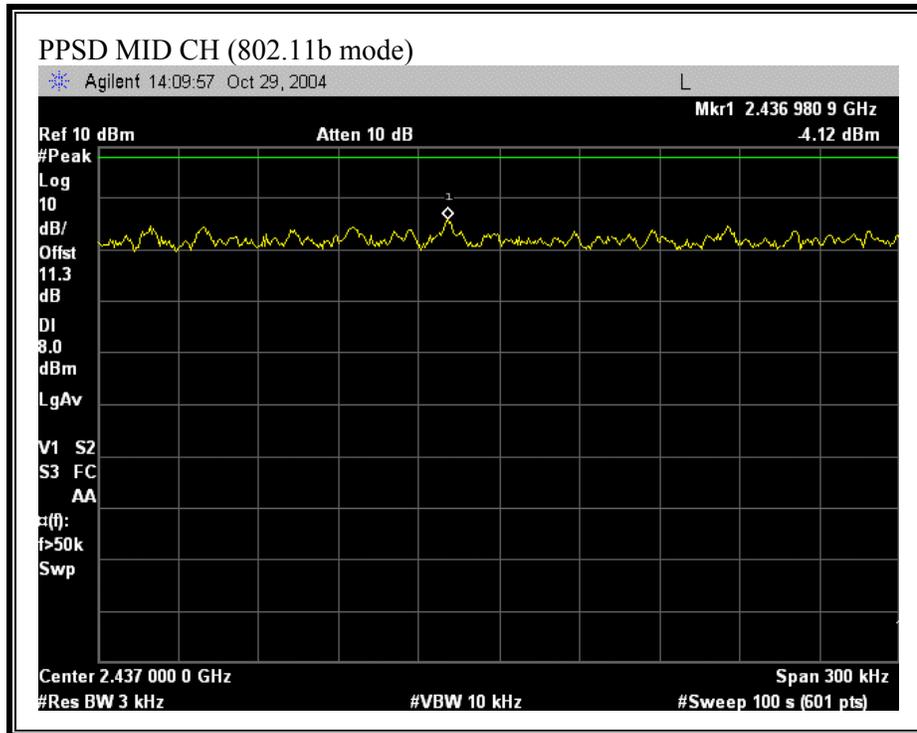


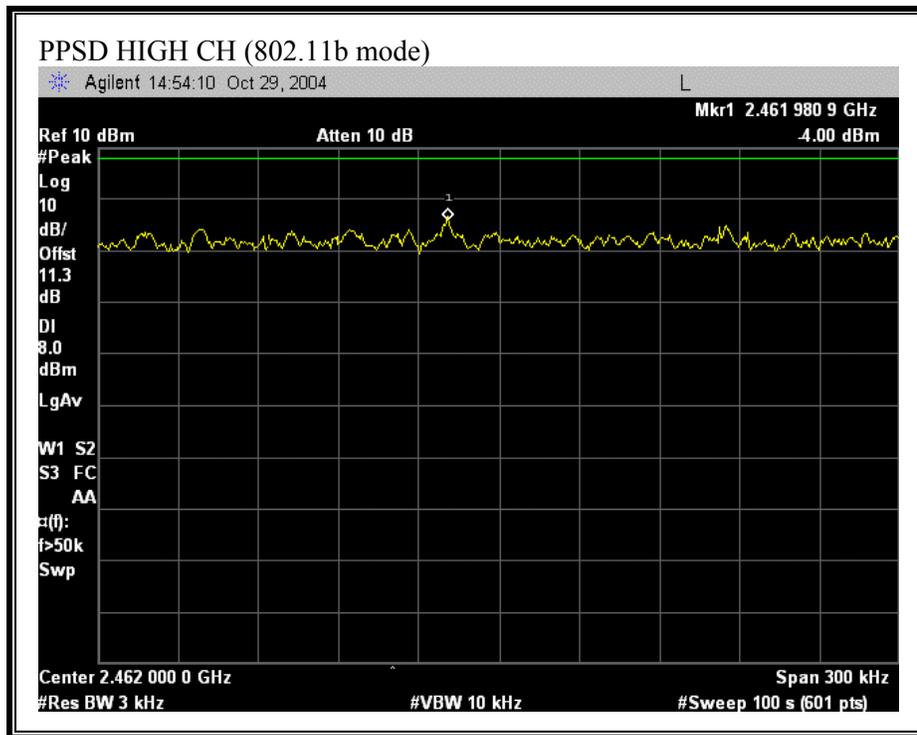

PEAK POWER SPECTRAL DENSITY (802.11g MODE)

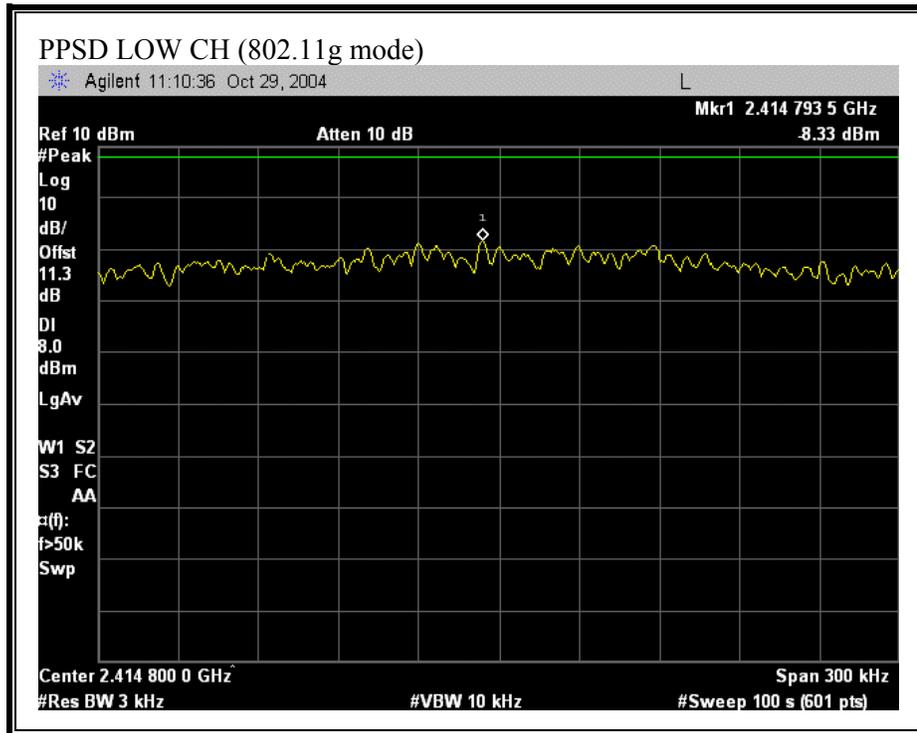

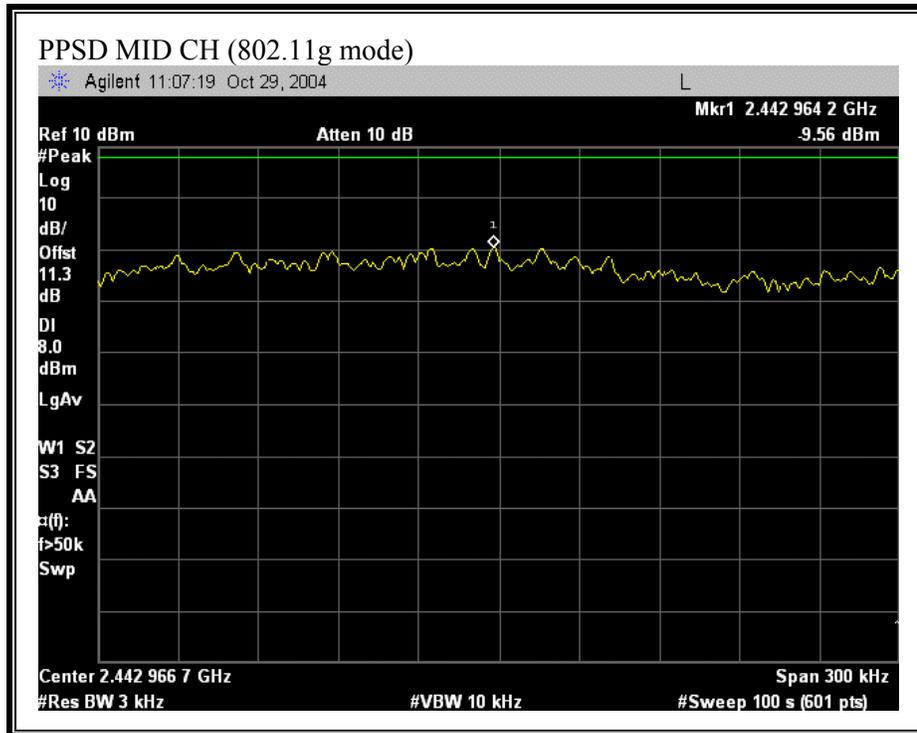

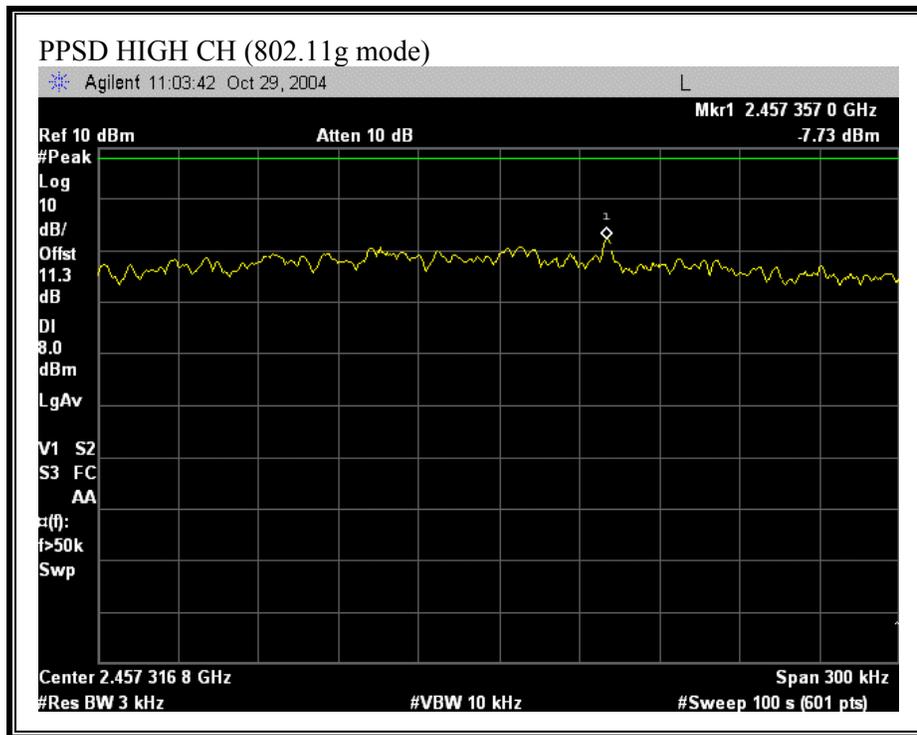

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions, which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS


No non-compliance noted:


SPURIOUS EMISSIONS, LOW CHANNEL (802.11b MODE)

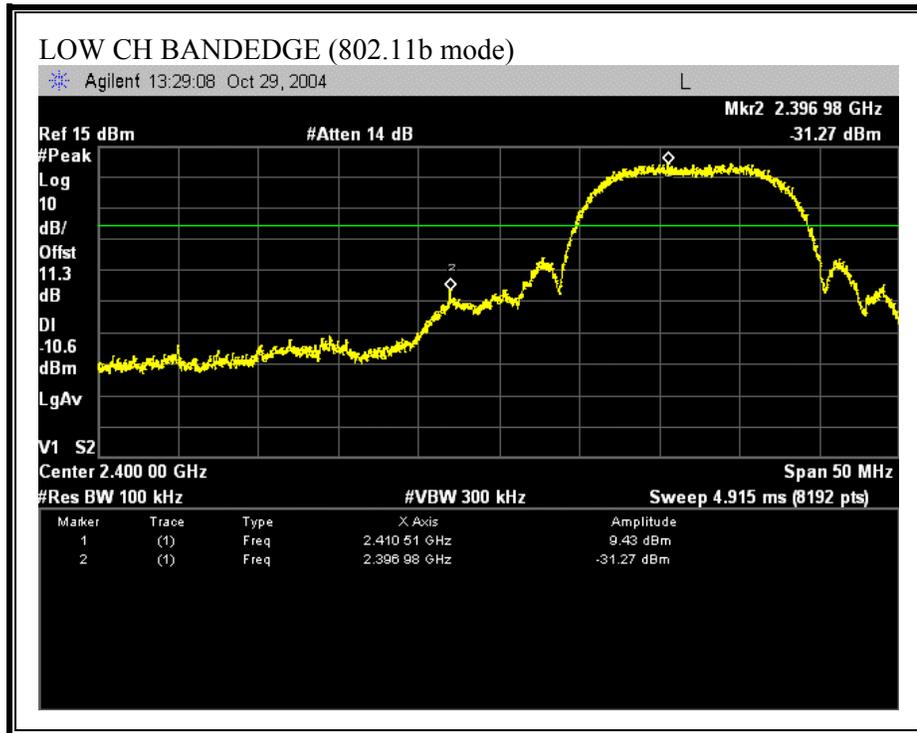

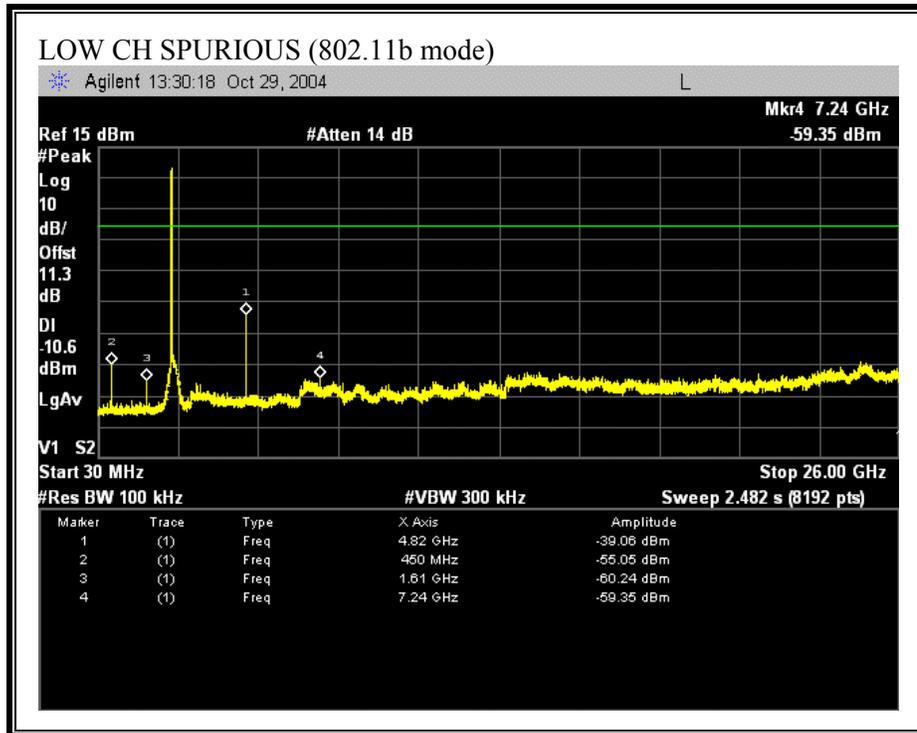



SPURIOUS EMISSIONS, MID CHANNEL (802.11b MODE)

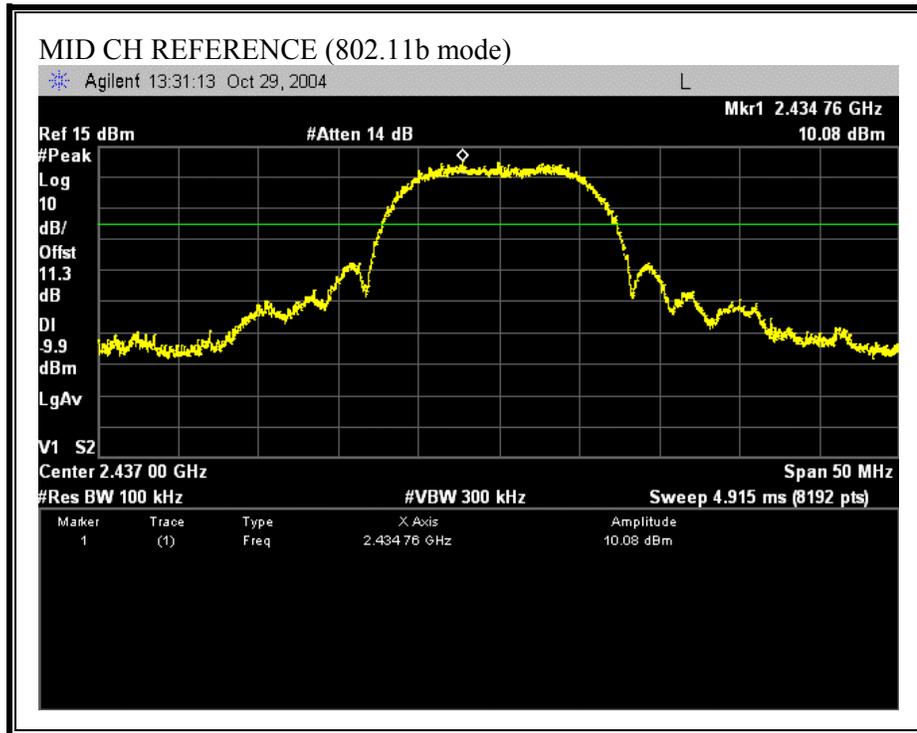

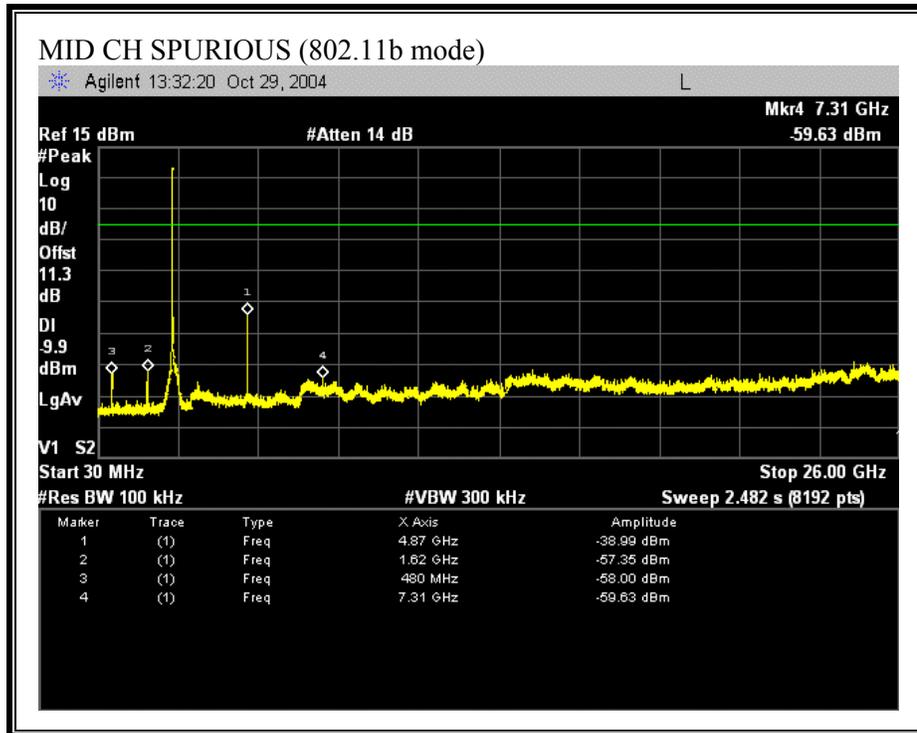



SPURIOUS EMISSIONS, HIGH CHANNEL (802.11b MODE)

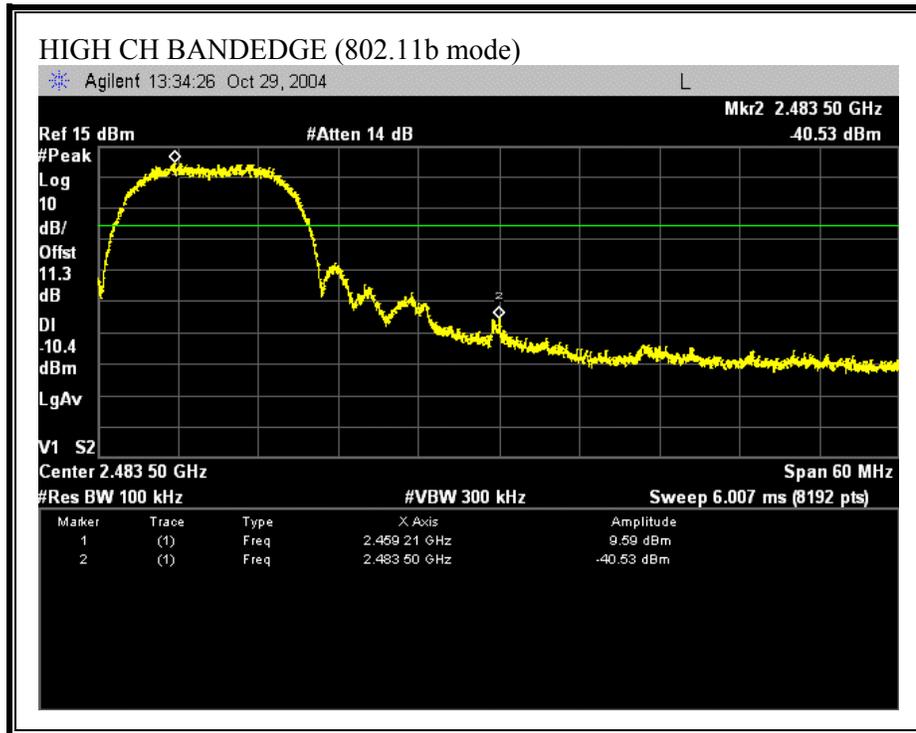

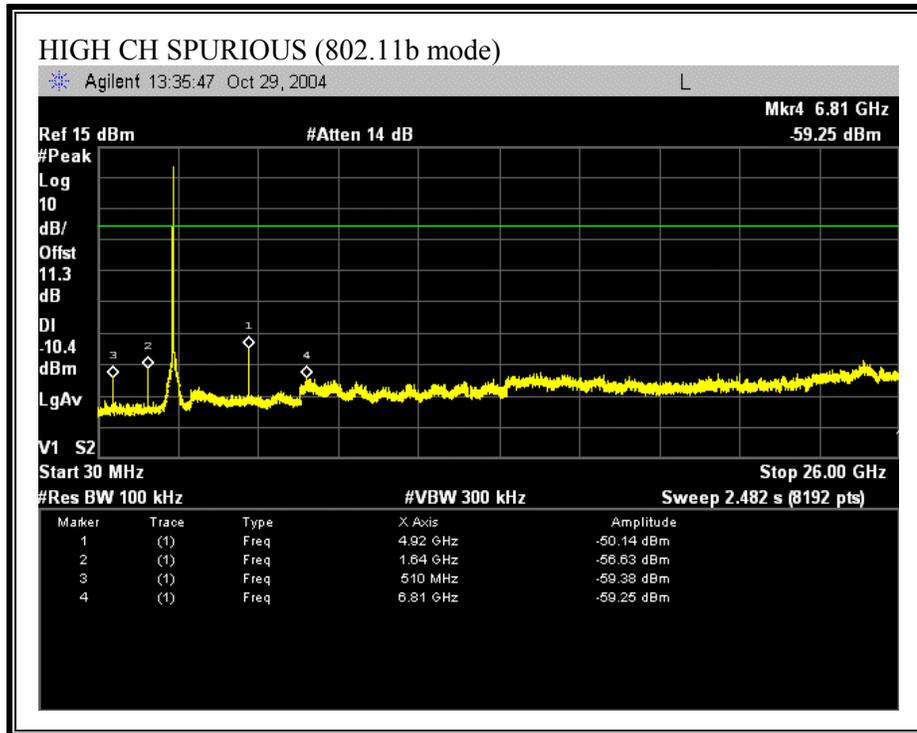



SPURIOUS EMISSIONS, LOW CHANNEL (802.11g MODE)

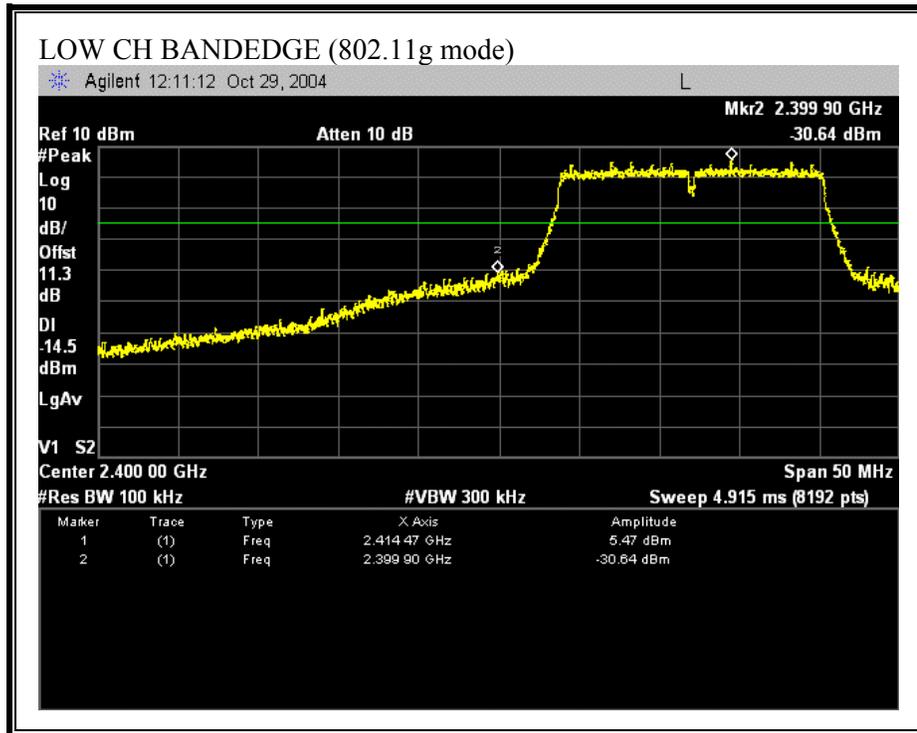

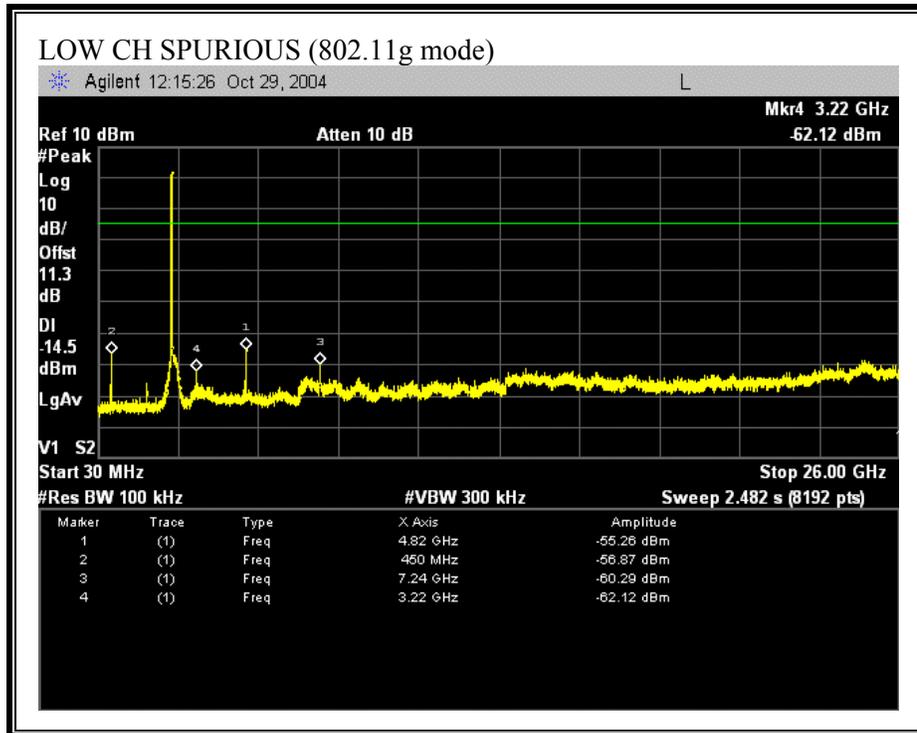



SPURIOUS EMISSIONS, MID CHANNEL (802.11g MODE)

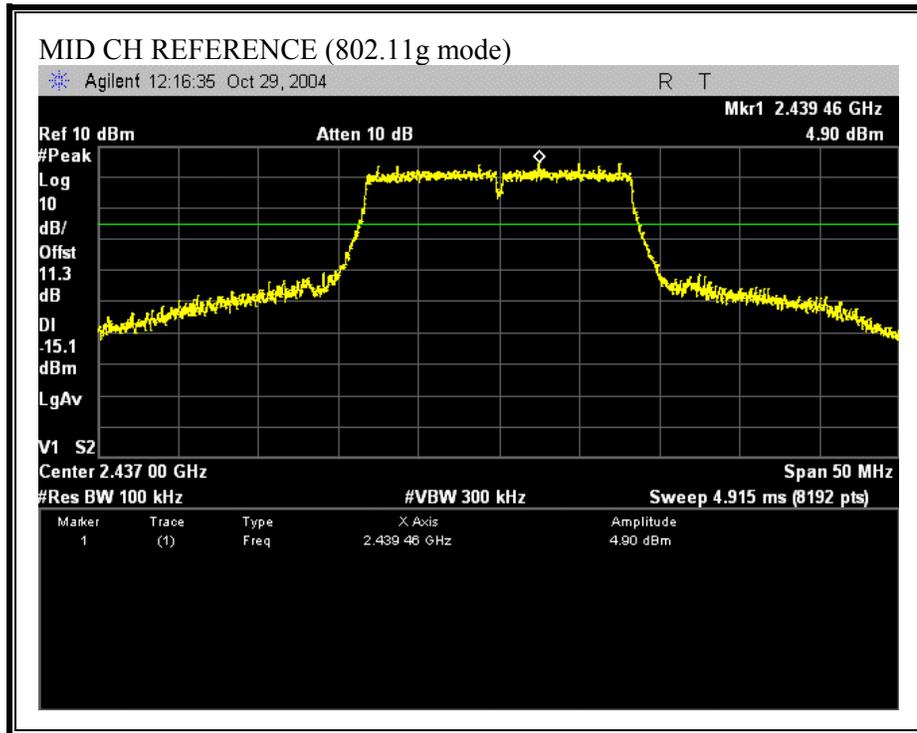

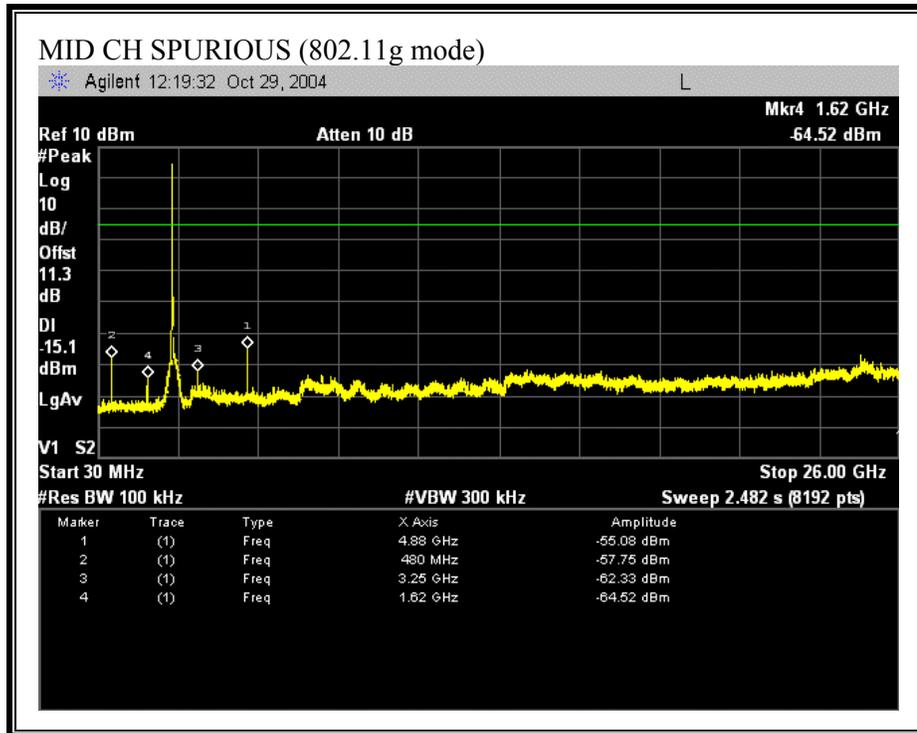

SPURIOUS EMISSIONS, HIGH CHANNEL (802.11g MODE)

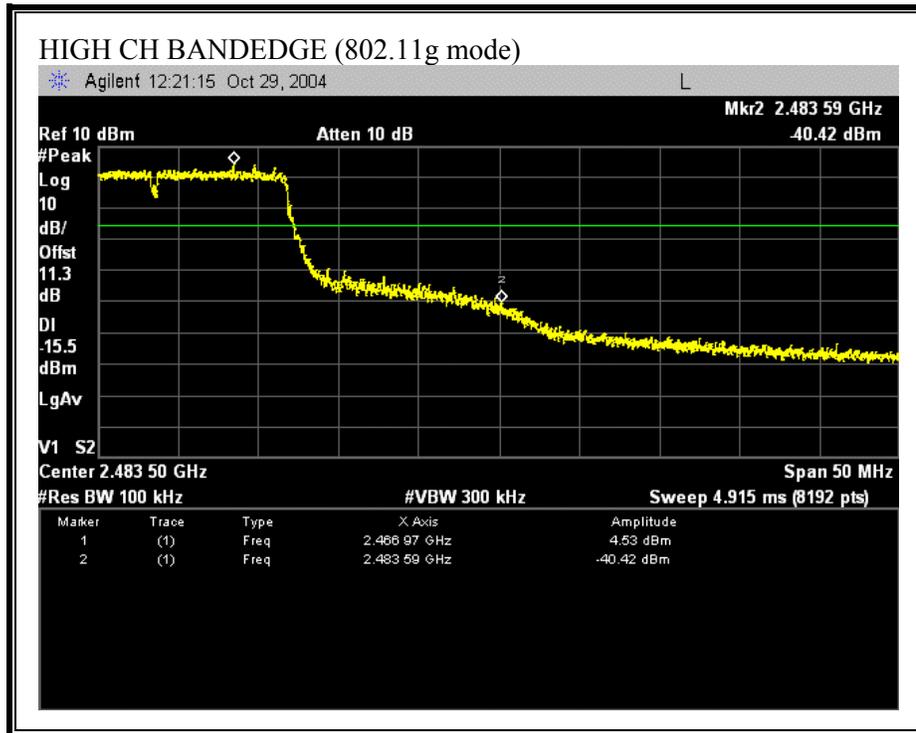

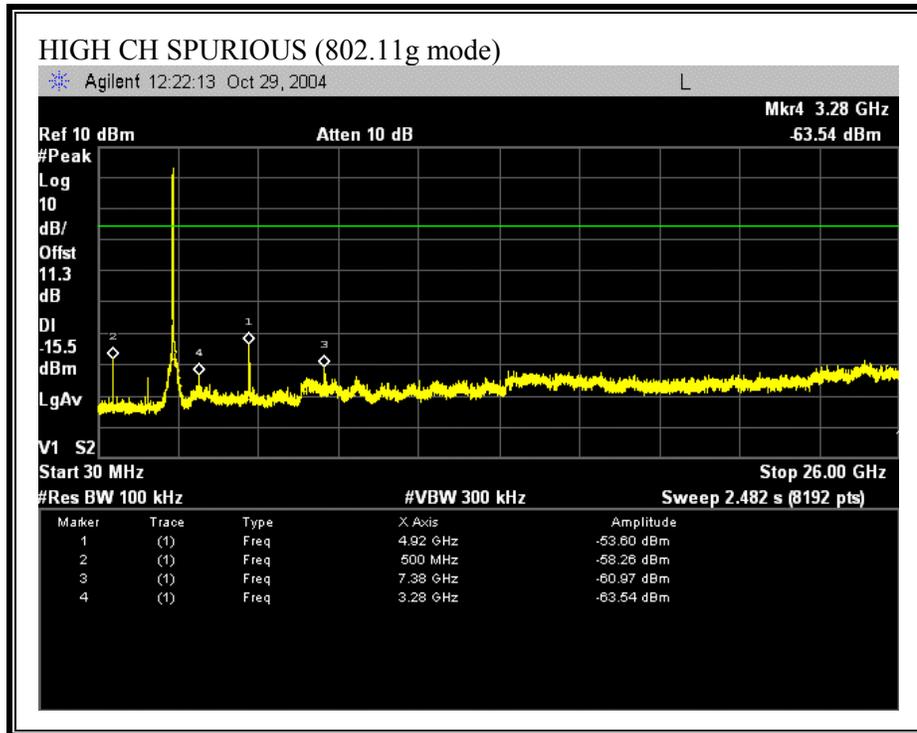

7.2. RADIATED EMISSIONS

7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


7.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

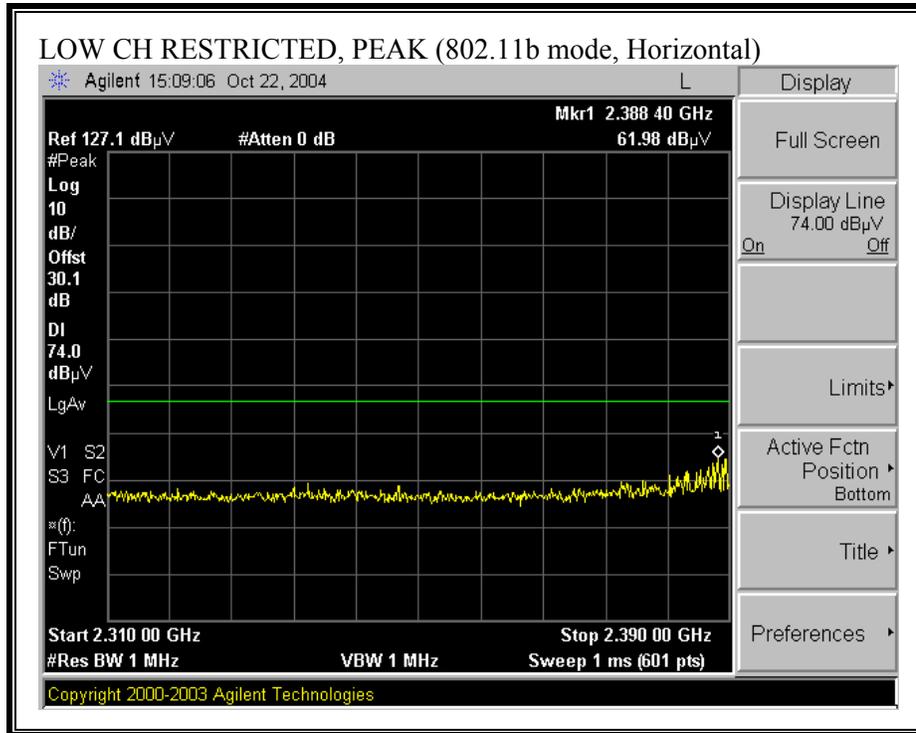

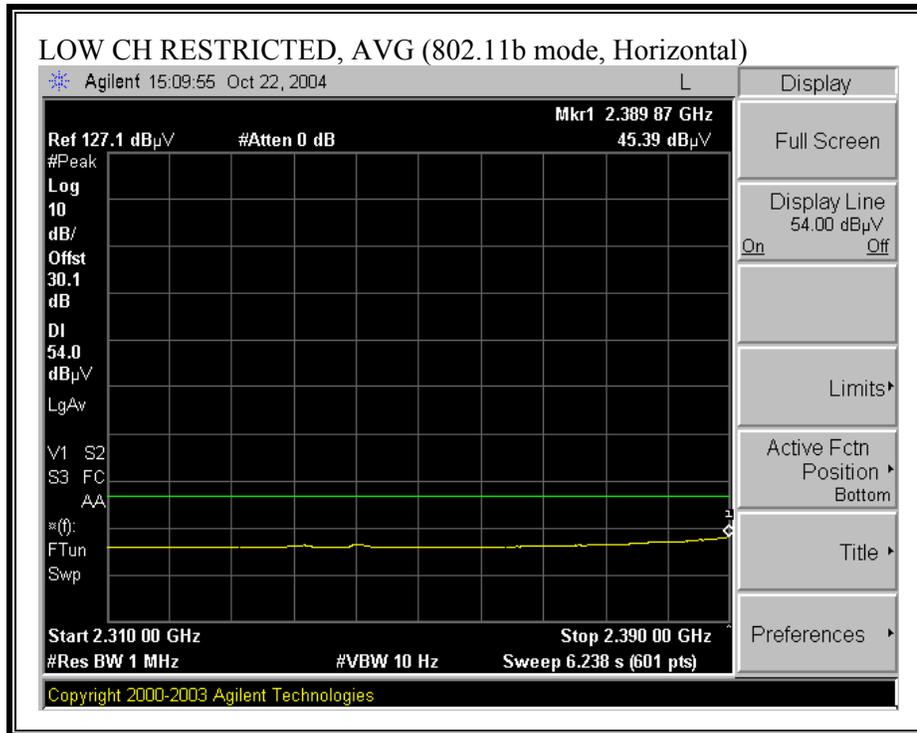



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

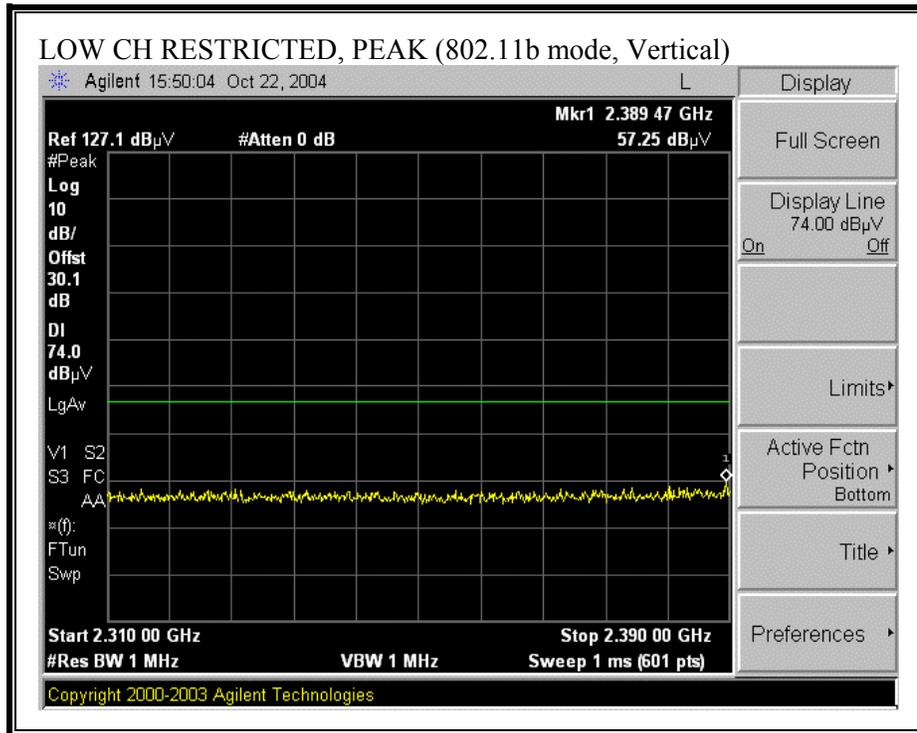

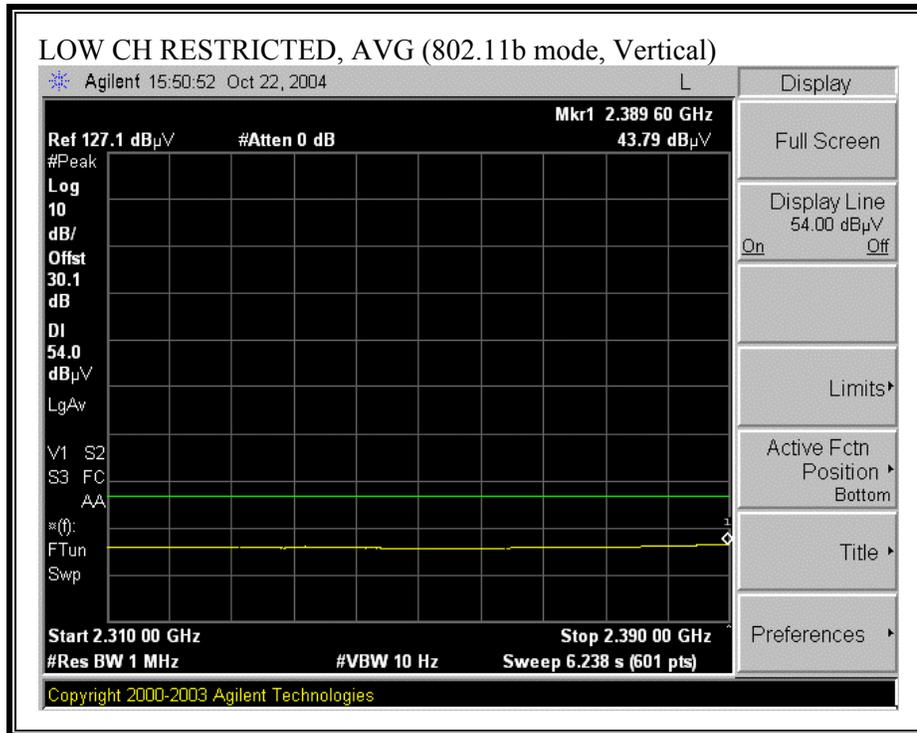



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

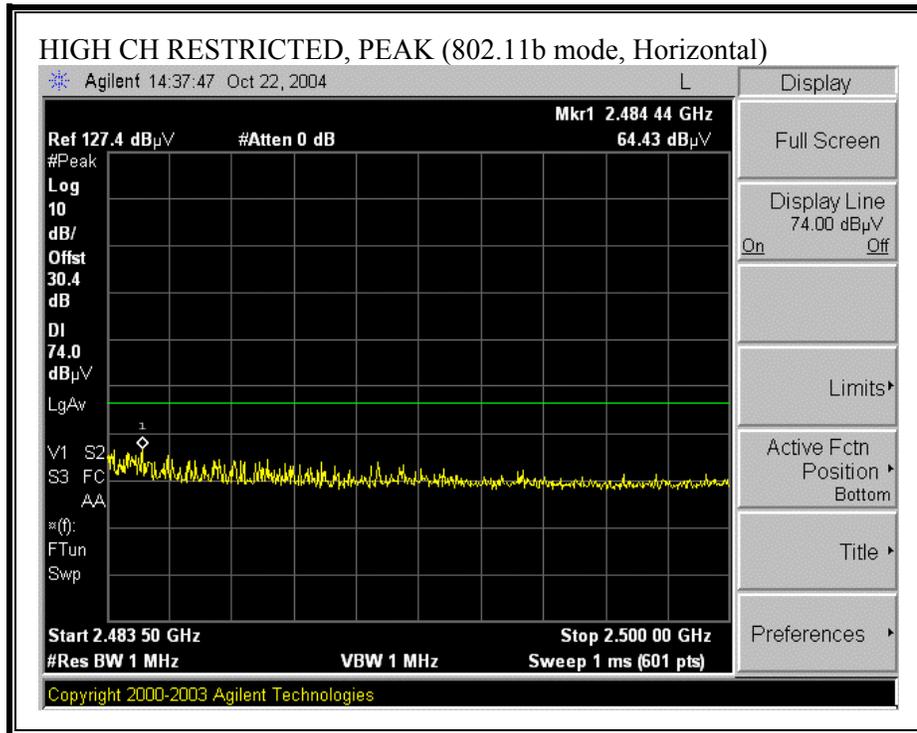

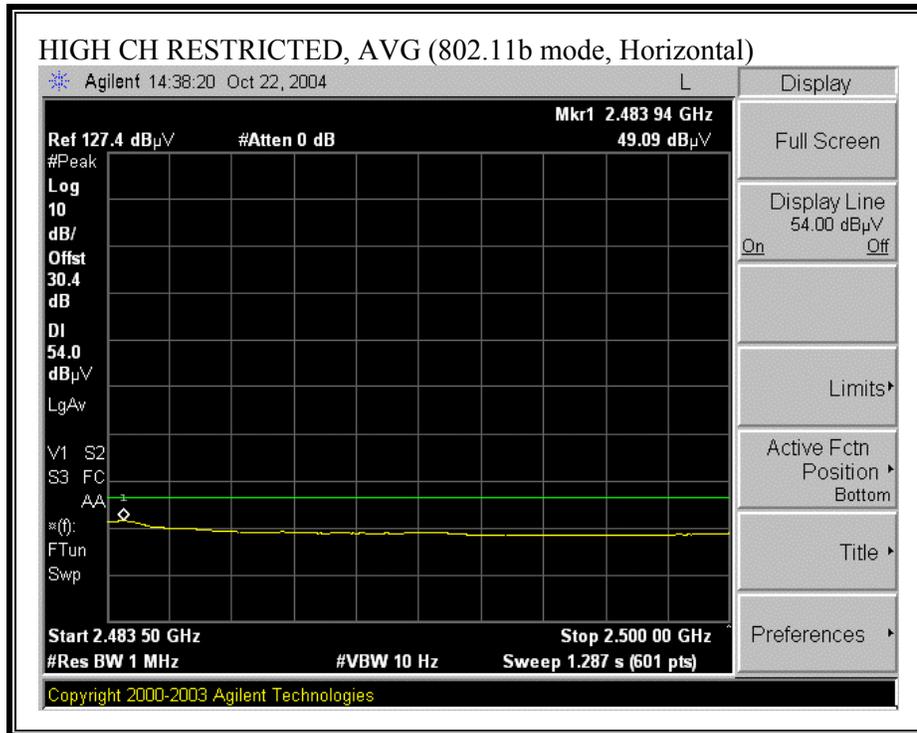

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

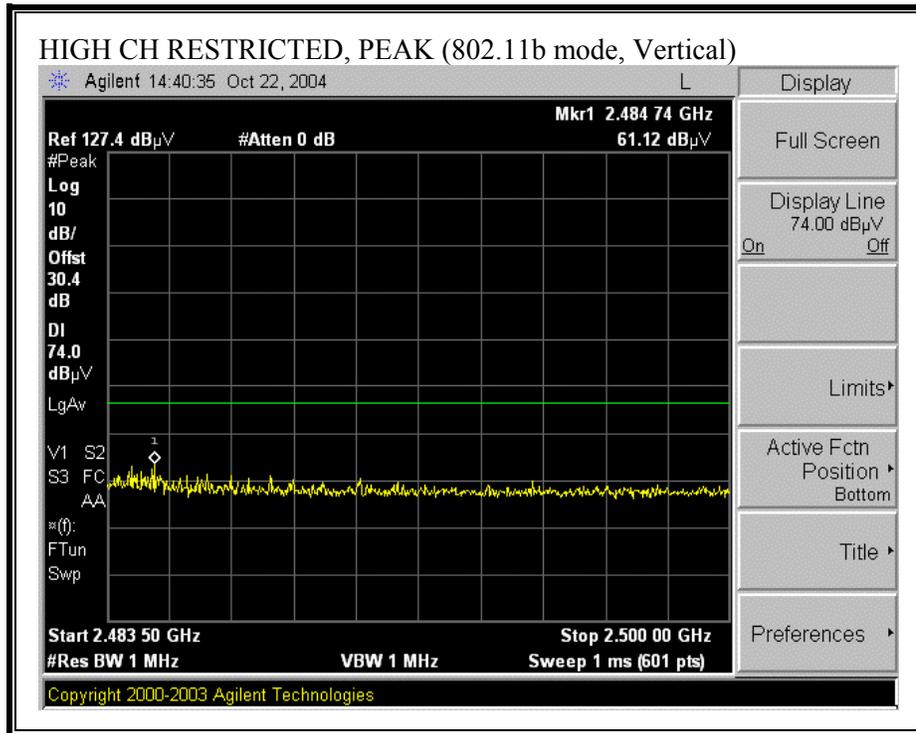

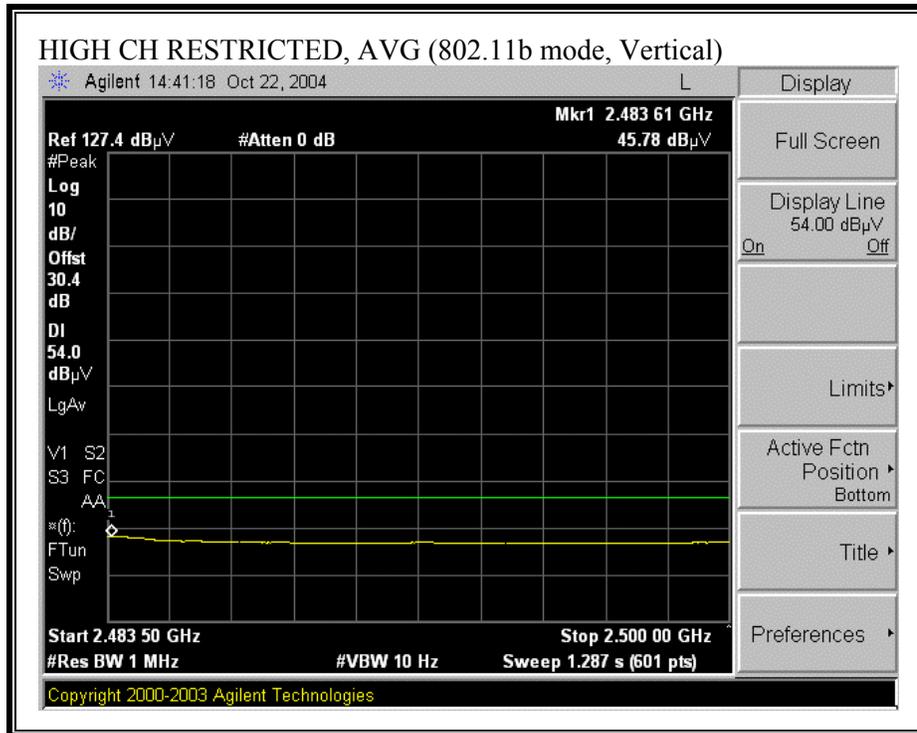

HARMONICS AND SPURIOUS EMISSIONS (b MODE)

10/22/04 High Frequency Measurement
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: NEELESH RAJ
 Project #: 04U3067
 Company: BROADCOM CORP
 EUT Descrip.: BROADCOM 54G WLAN USB PRINTER MODULE
 EUT M/N: TBD
 Test Target: FCC
 Mode Oper: TX B MODE

Test Equipment:


EMCO Horn 1-18GHz: T60; S/N: 2238 @1m
 Pre-amplifier 1-26GHz: T87 Miteq 924342
 Pre-amplifier 26-40GHz:
 Horn > 18GHz:
 Limit: FCC 15.205


Hi Frequency Cables:
 2 foot cable:
 3 foot cable:
 4 foot cable: 4_Neelesh
 12 foot cable: 12_Neelesh
 HPF: HPF_4.0GHz
 Reject Filter:
 Peak Measurements: RBW=VBW=1MHz
 Average Measurements: RBW=1MHz; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
LOW CHANNEL SPURIOUS															
4.824	3.0	49.2	36.1	33.0	4.0	-39.6	0.0	0.6	47.3	34.2	74	54	-26.7	-19.8	V
12.060	3.0	40.7	31.5	38.4	6.6	-39.2	0.0	0.9	47.5	38.3	74	54	-26.5	-15.7	V
4.824	3.0	59.7	45.5	33.0	4.0	-39.6	0.0	0.6	57.8	43.6	74	54	-16.2	-10.4	H
12.060	3.0	40.6	31.7	38.4	6.6	-39.2	0.0	0.9	47.4	38.5	74	54	-26.6	-15.5	H
MIDDLE CHANNEL SPURIOUS															
4.874	3.0	51.1	38.0	33.0	4.1	-39.6	0.0	0.6	49.2	36.1	74	54	-24.8	-17.9	V
7.311	3.0	46.6	35.7	35.9	5.2	-40.3	0.0	0.6	48.1	37.2	74	54	-25.9	-16.8	V
12.185	3.0	44.5	32.9	38.4	6.7	-39.3	0.0	0.9	51.2	39.6	74	54	-22.8	-14.4	V
4.874	3.0	62.9	48.0	33.0	4.1	-39.6	0.0	0.6	60.9	46.1	74	54	-13.1	-7.9	H
7.311	3.0	44.9	35.9	35.9	5.2	-40.3	0.0	0.6	46.4	37.3	74	54	-27.6	-16.7	H
12.185	3.0	39.6	32.8	38.4	6.7	-39.3	0.0	0.9	46.4	39.5	74	54	-27.6	-14.5	H
HIGH CHANNEL SPURIOUS															
4.924	3.0	52.0	39.1	33.0	4.1	-39.7	0.0	0.6	50.0	37.1	74	54	-24.0	-16.9	V
7.386	3.0	44.9	35.4	36.0	5.3	-40.3	0.0	0.6	46.6	37.0	74	54	-27.4	-17.0	V
12.310	3.0	44.5	33.4	38.5	6.7	-39.4	0.0	0.9	51.2	40.1	74	54	-22.8	-13.9	V
4.924	3.0	62.8	48.8	33.0	4.1	-39.7	0.0	0.6	60.8	46.8	74	54	-13.2	-7.2	H
7.386	3.0	44.1	35.5	36.0	5.3	-40.3	0.0	0.6	45.8	37.1	74	54	-28.2	-16.9	H
12.310	3.0	43.4	33.3	38.5	6.7	-39.4	0.0	0.9	50.1	39.9	74	54	-23.9	-14.1	H
NO OTHER SPURIOUS EMISSIONS WERE DETECTED ABOVE THE SYSTEM NOISE FLOOR -20dB TO THE LIMIT IN THE RESTRICTED BANDS															


f Measurement Frequency Amp Preamp Gain Avg Lim Average Field Strength Limit
 Dist Distance to Antenna D Corr Distance Correct to 3 meters Pk Lim Peak Field Strength Limit
 Read Analyzer Reading Avg Average Field Strength @ 3 m Avg Mar Margin vs. Average Limit
 AF Antenna Factor Peak Calculated Peak Field Strength Pk Mar Margin vs. Peak Limit
 CL Cable Loss HPF High Pass Filter


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

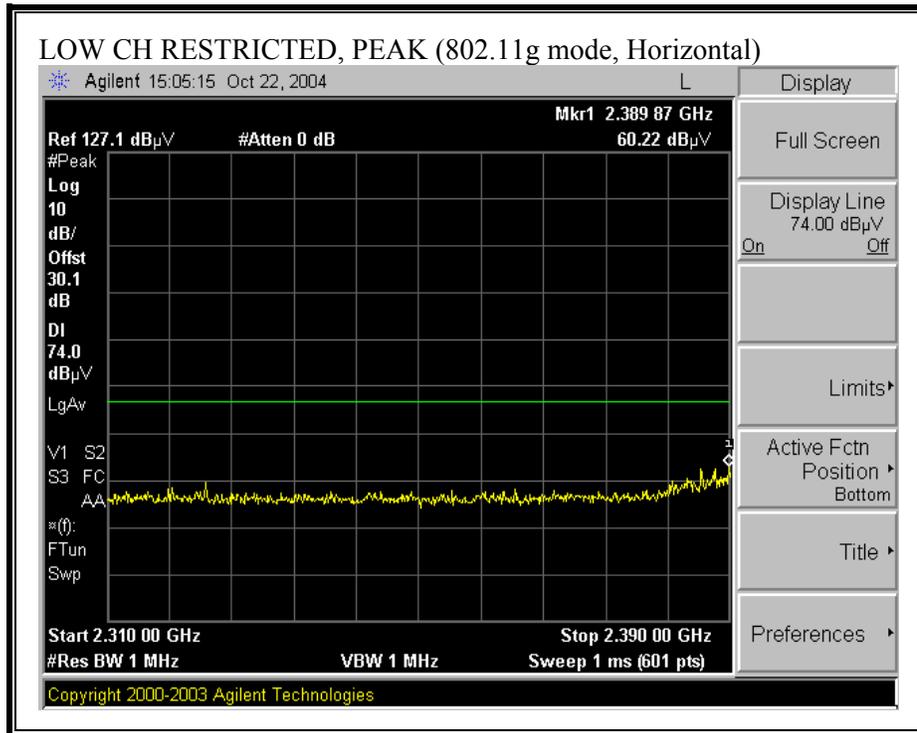

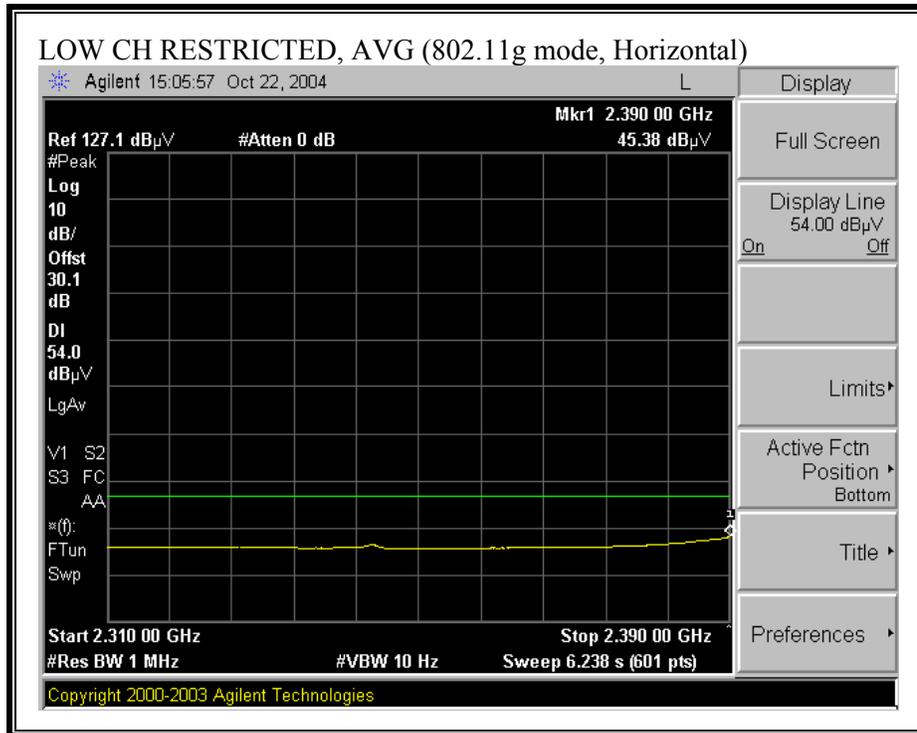



RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

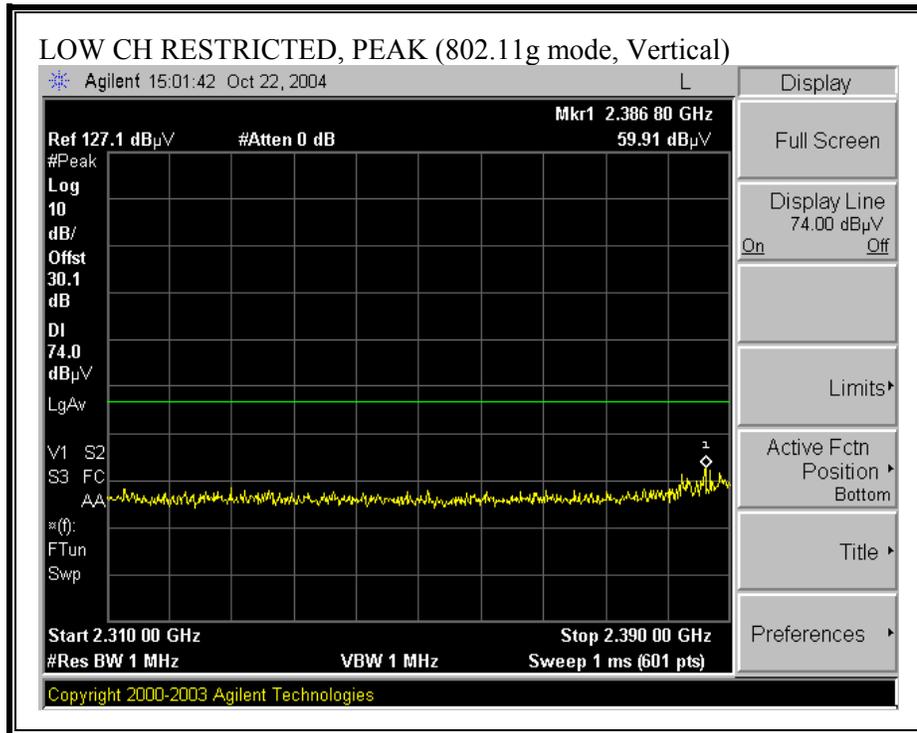

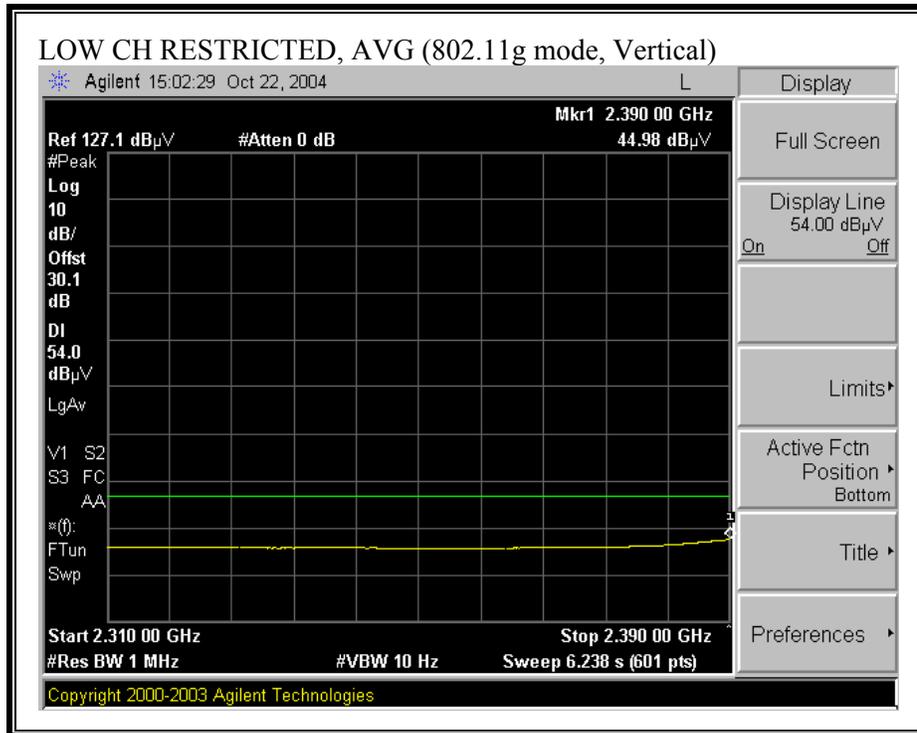



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

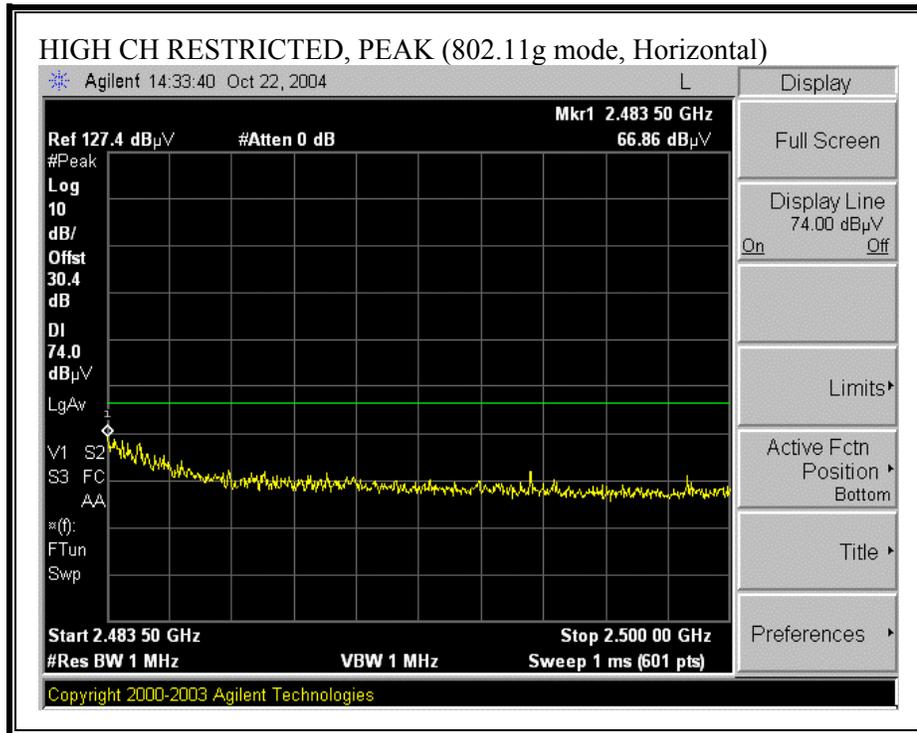

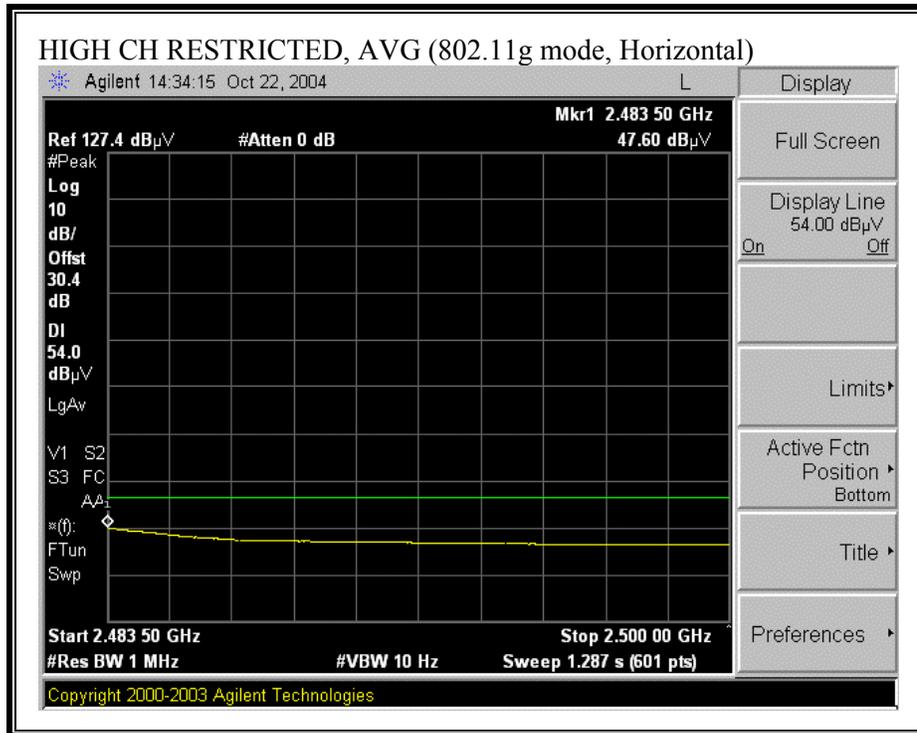

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

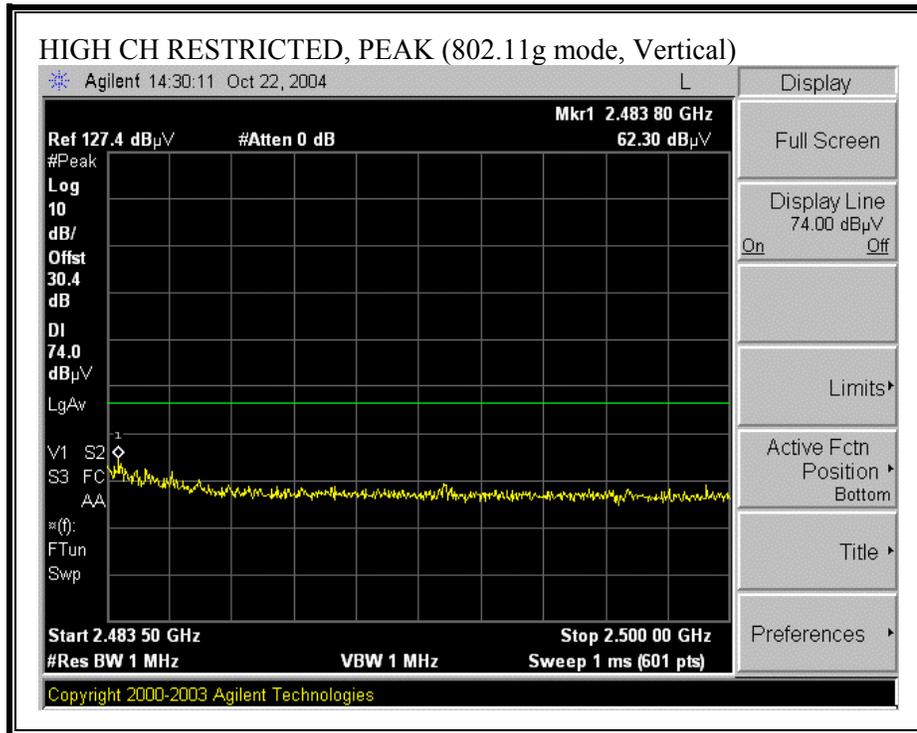

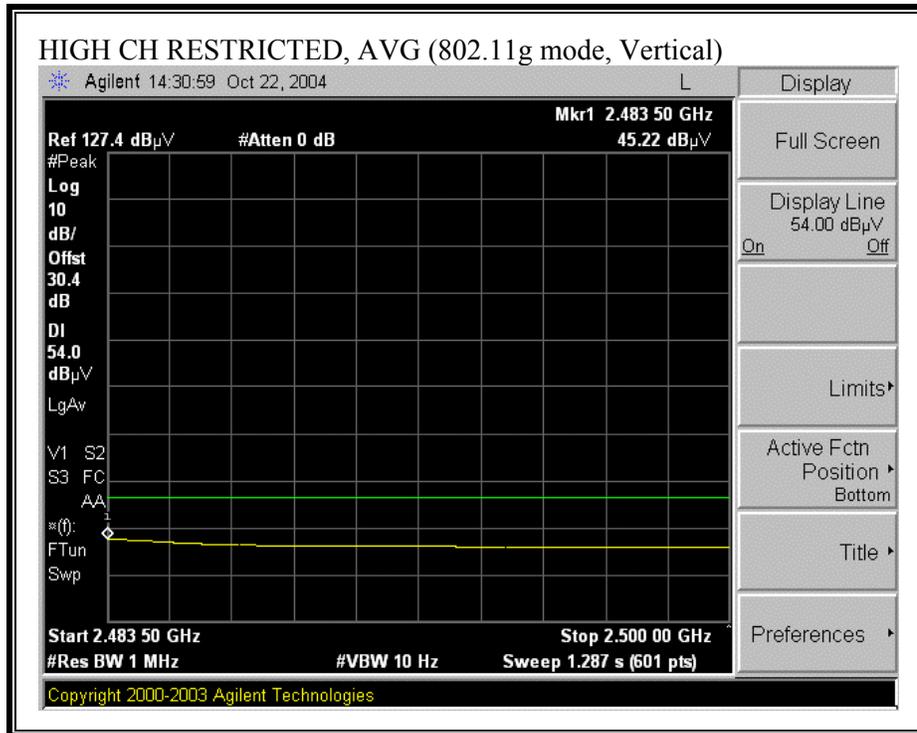

HARMONICS AND SPURIOUS EMISSIONS (g MODE)

10/22/04 High Frequency Measurement
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: NEELESH RAJ
 Project #: 04U3067
 Company: BROADCOM CORP
 EUT Descrip.: BROADCOM 54G WLAN USB PRINTER MODULE
 EUT M/N: TBD
 Test Target: FCC
 Mode Oper: TXG MODE

Test Equipment:

EMCO Horn 1-18GHz: T60; S/N: 2238 @1m
 Pre-amplifier 1-26GHz: T87 Miteq 924342
 Pre-amplifier 26-40GHz: [Empty]
 Horn > 18GHz: [Empty]
 Limit: FCC 15.205

Hi Frequency Cables: 2 foot cable, 3 foot cable, 4 foot cable, 12 foot cable
 4_Neelesh, 12_Neelesh
 HPF: HPF_4.0GHz
 Reject Filter: [Empty]


Peak Measurements: RBW=VBW=1MHz
 Average Measurements: RBW=1MHz; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
LOW CHANNEL SPURIOUS															
4.824	3.0	48.1	36.1	33.0	4.0	-39.6	0.0	0.6	46.2	34.1	74	54	-27.8	-19.9	V
12.060	3.0	44.9	33.9	38.4	6.6	-39.2	0.0	0.9	51.7	40.7	74	54	-22.3	-13.3	V
4.824	3.0	54.8	39.4	33.0	4.0	-39.6	0.0	0.6	52.9	37.5	74	54	-21.1	-16.5	H
12.060	3.0	44.0	34.0	38.4	6.6	-39.2	0.0	0.9	50.8	40.8	74	54	-23.2	-13.2	H
MIDDLE CHANNEL SPURIOUS															
4.874	3.0	48.0	36.0	33.0	4.1	-39.6	0.0	0.6	46.1	34.1	74	54	-27.9	-19.9	V
7.311	3.0	48.1	36.2	35.9	5.2	-40.3	0.0	0.6	49.6	37.7	74	54	-24.4	-16.3	V
12.185	3.0	45.5	34.2	38.4	6.7	-39.3	0.0	0.9	52.2	41.0	74	54	-21.8	-13.0	V
4.874	3.0	57.2	40.7	33.0	4.1	-39.6	0.0	0.6	55.3	38.8	74	54	-18.7	-15.2	H
7.311	3.0	46.4	36.4	35.9	5.2	-40.3	0.0	0.6	47.9	37.9	74	54	-26.1	-16.1	H
12.185	3.0	45.7	34.3	38.4	6.7	-39.3	0.0	0.9	52.4	41.0	74	54	-21.6	-13.0	H
HIGH CHANNEL SPURIOUS															
4.924	3.0	49.4	36.5	33.0	4.1	-39.7	0.0	0.6	47.5	34.5	74	54	-26.5	-19.5	V
7.386	3.0	45.6	35.9	36.0	5.3	-40.3	0.0	0.6	47.3	37.5	74	54	-26.7	-16.5	V
12.310	3.0	43.5	33.4	38.5	6.7	-39.4	0.0	0.9	50.2	40.1	74	54	-23.8	-13.9	V
4.924	3.0	57.8	41.7	33.0	4.1	-39.7	0.0	0.6	55.8	39.8	74	54	-18.2	-14.2	H
7.386	3.0	46.8	36.0	36.0	5.3	-40.3	0.0	0.6	48.5	37.6	74	54	-25.5	-16.4	H
12.310	3.0	42.7	33.5	38.5	6.7	-39.4	0.0	0.9	49.3	40.2	74	54	-24.7	-13.8	H
NO OTHER SPURIOUS EMISSIONS WERE DETECTED ABOVE THE SYSTEM NOISE FLOOR -20dB TO THE LIMIT IN THE RESTRICTED BANDS															

f Measurement Frequency Amp Preamp Gain Avg Lim Average Field Strength Limit
 Dist Distance to Antenna D Corr Distance Correct to 3 meters Pk Lim Peak Field Strength Limit
 Read Analyzer Reading Avg Average Field Strength @ 3 m Avg Mar Margin vs. Average Limit
 AF Antenna Factor Peak Calculated Peak Field Strength Pk Mar Margin vs. Peak Limit
 CL Cable Loss HPF High Pass Filter

7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz WITH USB 1.1 CONFIGURATION

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

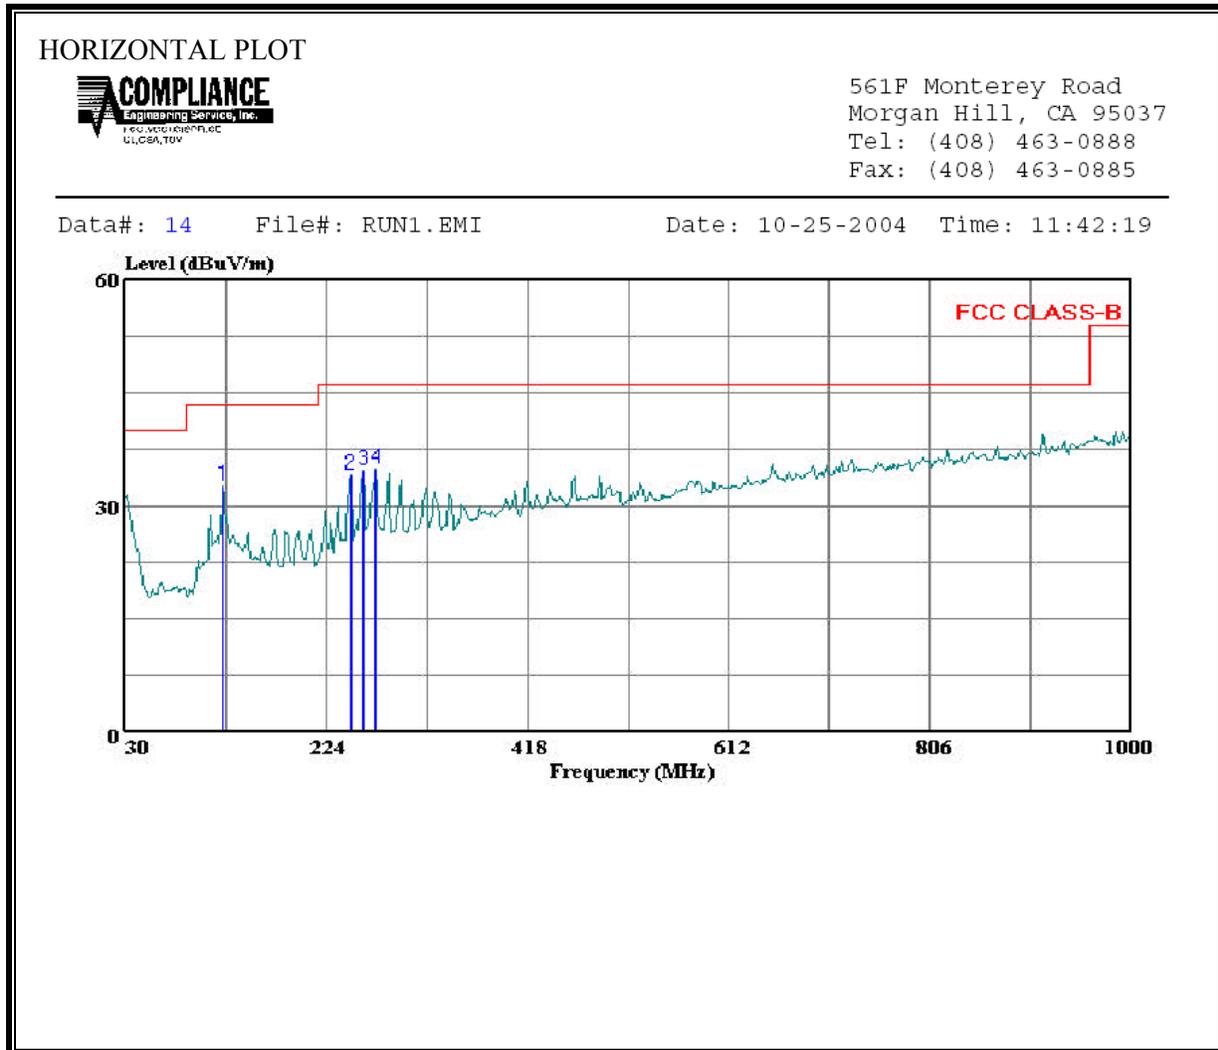

HORIZONTAL DATA

(Aidx ATC)

Trace: 13


Ref Trace:

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : NEELESH RAJ
Project #: : 04U3067
Company: : BROADCOM CORP.
EUT: : BROADCOM 54G WLAN USB PRINTER MODULE
Model No: : RSVLD-0403
Configuration: : USB 1.0
Target of Test: : FCC
Mode of Operation: TX WORST CASE

Page: 1

	Freq	Remark	Read Level	Factor	Level	Limit Line	Over Limit
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB
1	124.090	Peak	16.93	15.73	32.66	43.50	-10.84
2	247.280	Peak	19.78	14.27	34.05	46.00	-11.95
3	259.890	Peak	19.65	14.93	34.58	46.00	-11.42
4	271.530	Peak	19.28	15.52	34.80	46.00	-11.20

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

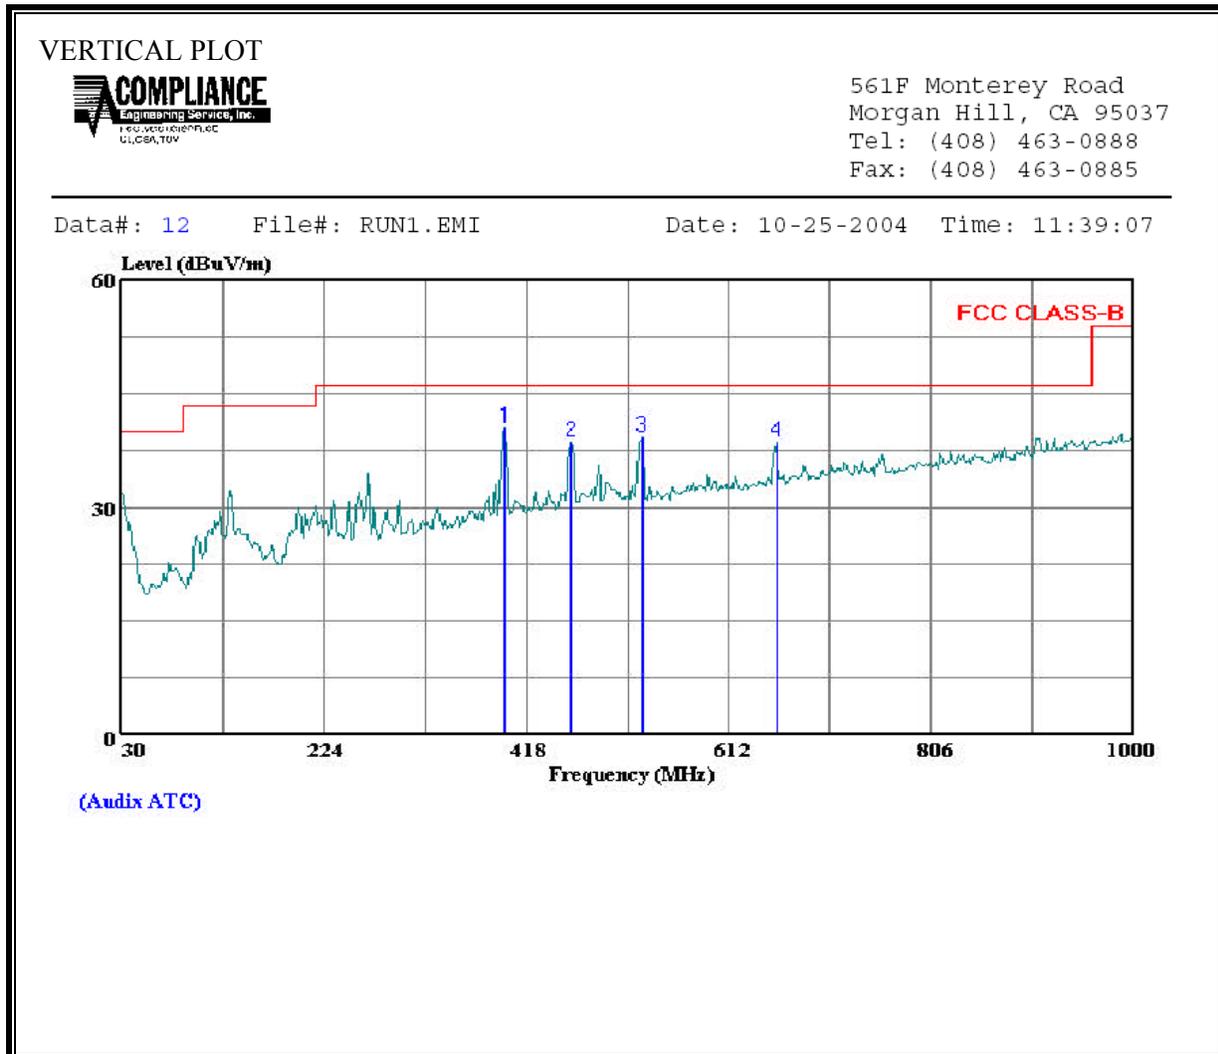

VERTICAL DATA

Trace: 11

Ref Trace:


Condition: FCC CLASS-B VERTICAL
Test Operator: : NEELESH RAJ
Project #: : 04U3067
Company: : BROADCOM CORP.
EUT: : BROADCOM 54G WLAN USB PRINTER MODULE
Model No: : RSVLD-0403
Configuration: : USB 1.0
Target of Test: : FCC
Mode of Operation: TX WORST CASE

Page: 1

	Freq	Remark	Read Level	Factor	Level	Limit Line	Over Limit
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB
1	397.630	Peak	21.92	18.52	40.44	46.00	-5.56
2	460.680	Peak	18.61	20.08	38.69	46.00	-7.31
3	528.580	Peak	17.89	21.35	39.24	46.00	-6.76
4	657.590	Peak	15.24	23.37	38.61	46.00	-7.39

7.2.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz WITH USB 2.0 CONFIGURATION

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

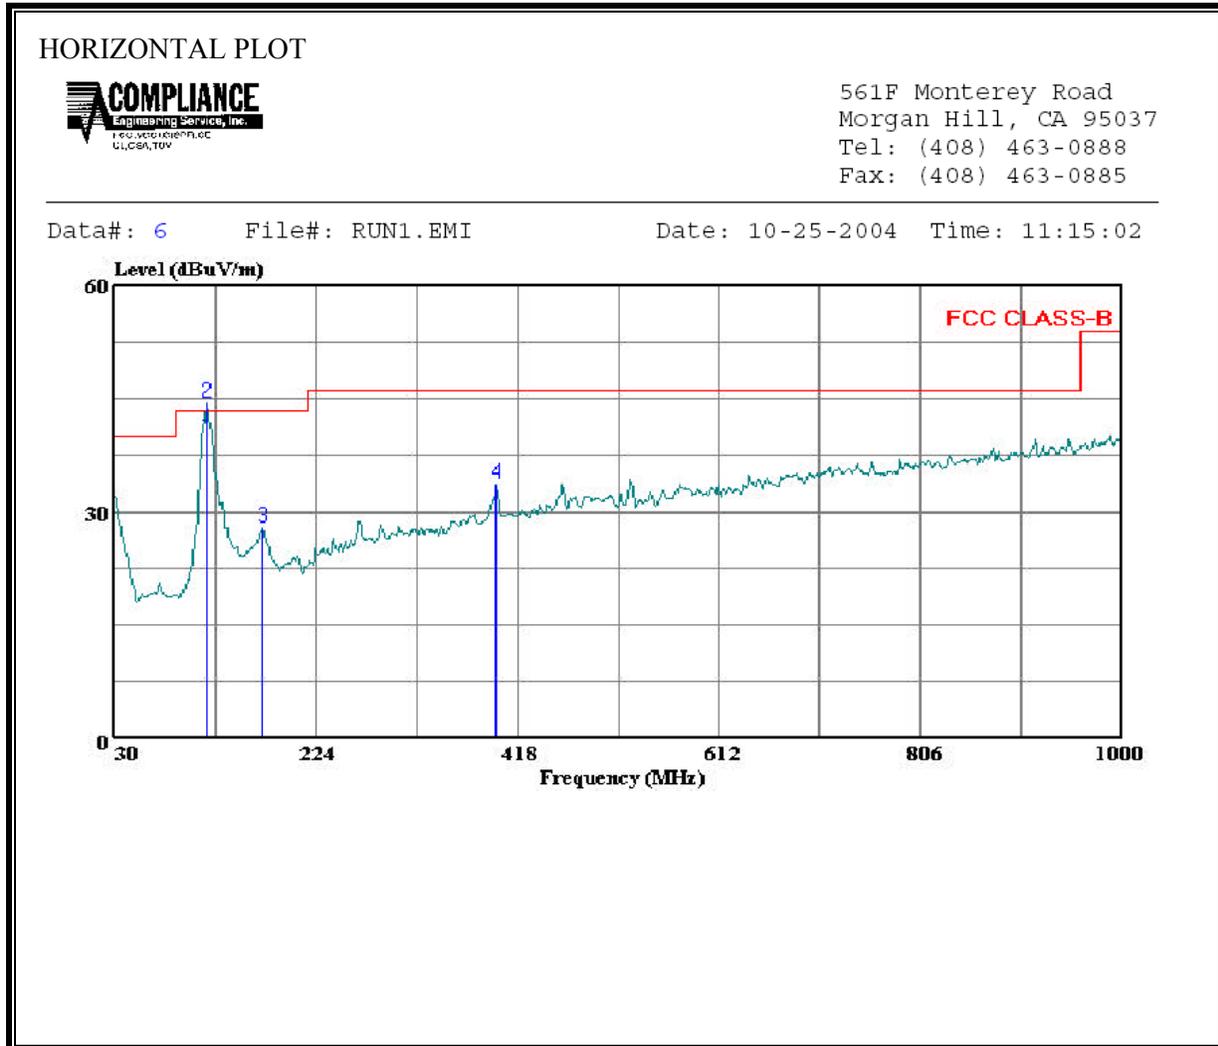

HORIZONTAL DATA

(AUX ATC)

Trace: 1


Ref Trace:

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : NEELESH RAJ
Project #: : 04U3067
Company: : BROADCOM CORP.
EUT: : BROADCOM 54G WLAN USB PRINTER MODULE
Model No: : RSVLD-0403
Configuration: : USB 2.0
Target of Test: : FCC
Mode of Operation: TX WORST CASE

Page: 1

	Freq	Remark	Read Level	Factor	Level	Limit Line	Over Limit	
	MHZ		dBuV	dB	dBuV/m	dBuV/m	dB	
1	119.240	QP	24.35	15.24	39.59	43.50	-3.91	*FROM LAPTOP
2 *	119.240	Peak	29.12	15.24	44.36	43.50	0.86	*FROM LAPTOP
3	172.590	Peak	14.25	13.68	27.93	43.50	-15.57	
4	397.630	Peak	15.04	18.52	33.56	46.00	-12.44	

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

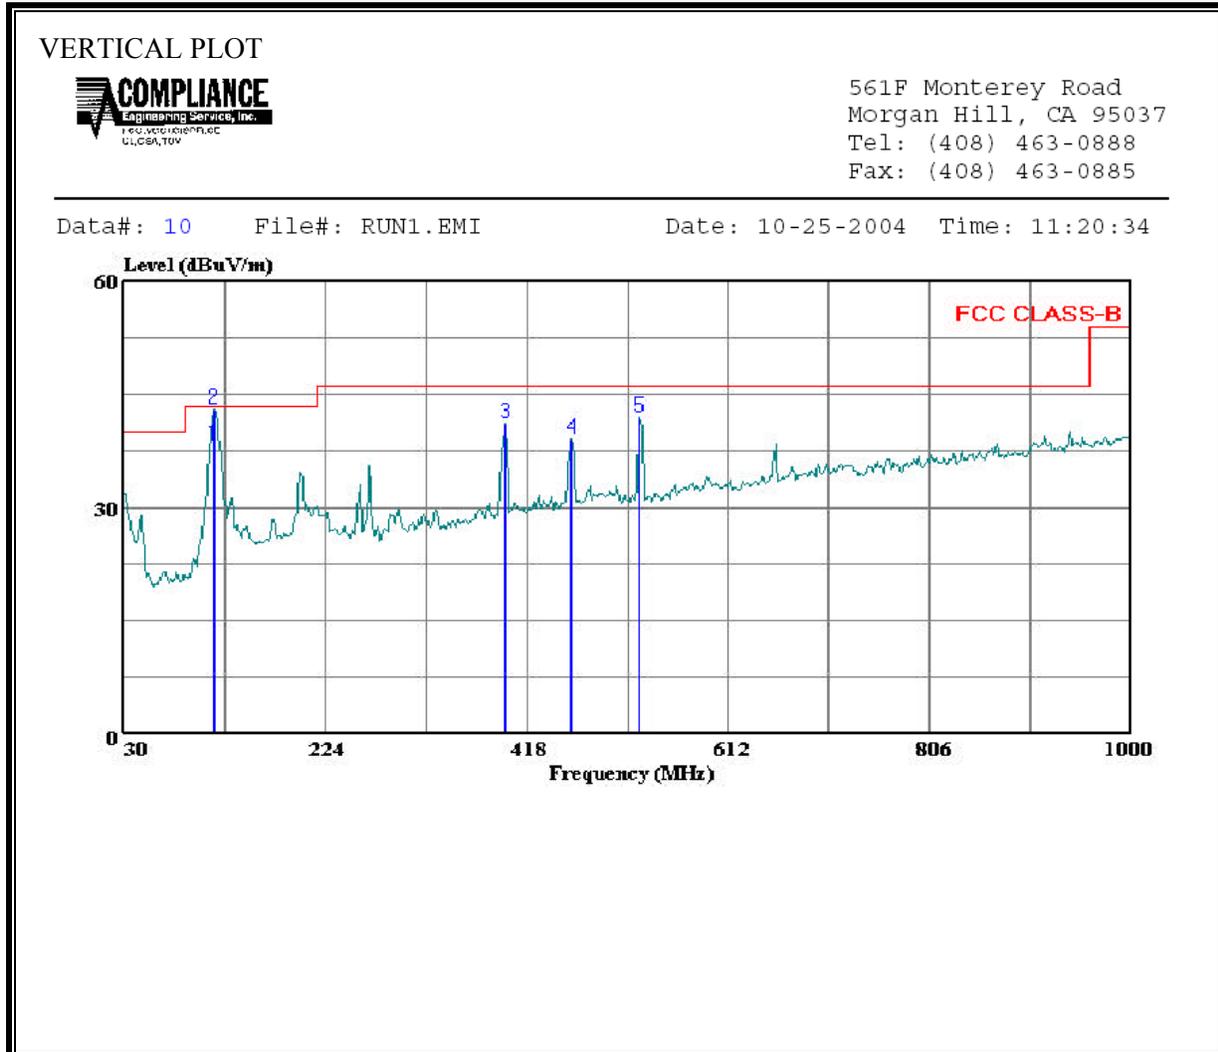

VERTICAL DATA

(Aidx ATC)

Trace: 7

Ref Trace:

Condition: FCC CLASS-B VERTICAL
 Test Operator: : NEELESH RAJ
 Project #: : 04U3067
 Company: : BROADCOM CORP.
 EUT: : BROADCOM 54G WLAN USB PRINTER MODULE
 Model No: : RSVLD-0403
 Configuration: : USB 2.0
 Target of Test: : FCC
 Mode of Operation: TX WORST CASE

Page: 1

	Freq	Remark	Read Level	Factor	Level	Limit Line	Over Limit	
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB	
1	116.330	QP	23.25	14.88	38.13	43.50	-5.37	*FROM LAPTOP
2	116.330	Peak	28.14	14.88	43.02	43.50	-0.48	*FROM LAPTOP
3	397.630	Peak	22.53	18.52	41.05	46.00	-4.95	
4	460.680	Peak	18.93	20.08	39.01	46.00	-6.99	
5	526.640	Peak	20.53	21.36	41.89	46.00	-4.11	

7.3. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

No non-compliance noted:


6 WORST EMISSIONS (USB1.1)

CONDUCTED EMISSIONS DATA (115VAC 60Hz)										
Freq. (MHz)	Reading			Class (dB)	Limit QP	EN_B		Margin		Remark L1 / L2
	PK (dBuV)	QP (dBuV)	AV (dBuV)			AV	QP (dB)	AV (dB)		
0.17	54.62	--	42.30	0.00	65.49	55.49	-10.87	-13.19	L1	
0.43	43.34	--	17.59	0.00	58.11	48.11	-14.77	-30.52	L1	
1.87	41.70	--	18.81	0.00	56.00	46.00	-14.30	-27.19	L1	
0.17	52.66	--	41.59	0.00	65.46	55.46	-12.80	-13.87	L2	
0.20	49.54	--	26.63	0.00	64.63	54.63	-15.09	-28.00	L2	
0.43	43.76	--	16.95	0.00	58.11	48.11	-14.35	-31.16	L2	
6 Worst Data										


6 WORST EMISSIONS (USB2.0)

CONDUCTED EMISSIONS DATA (115VAC 60Hz)										
Freq. (MHz)	Reading			Class (dB)	Limit QP	EN_B		Margin		Remark L1 / L2
	PK (dBuV)	QP (dBuV)	AV (dBuV)			AV	QP (dB)	AV (dB)		
0.21	54.32	--	41.04	0.00	64.43	54.43	-10.11	-13.39	L1	
0.52	39.42	--	26.29	0.00	56.00	46.00	-16.58	-19.71	L1	
0.72	38.92	--	28.25	0.00	56.00	46.00	-17.08	-17.75	L1	
0.20	54.56	--	43.71	0.00	64.46	54.46	-9.90	-10.75	L2	
0.62	40.76	--	34.28	0.00	56.00	46.00	-15.24	-11.72	L2	
1.43	40.92	--	30.56	0.00	56.00	46.00	-15.08	-15.44	L2	
6 Worst Data										


LINE 1 RESULTS (USB 1.1)

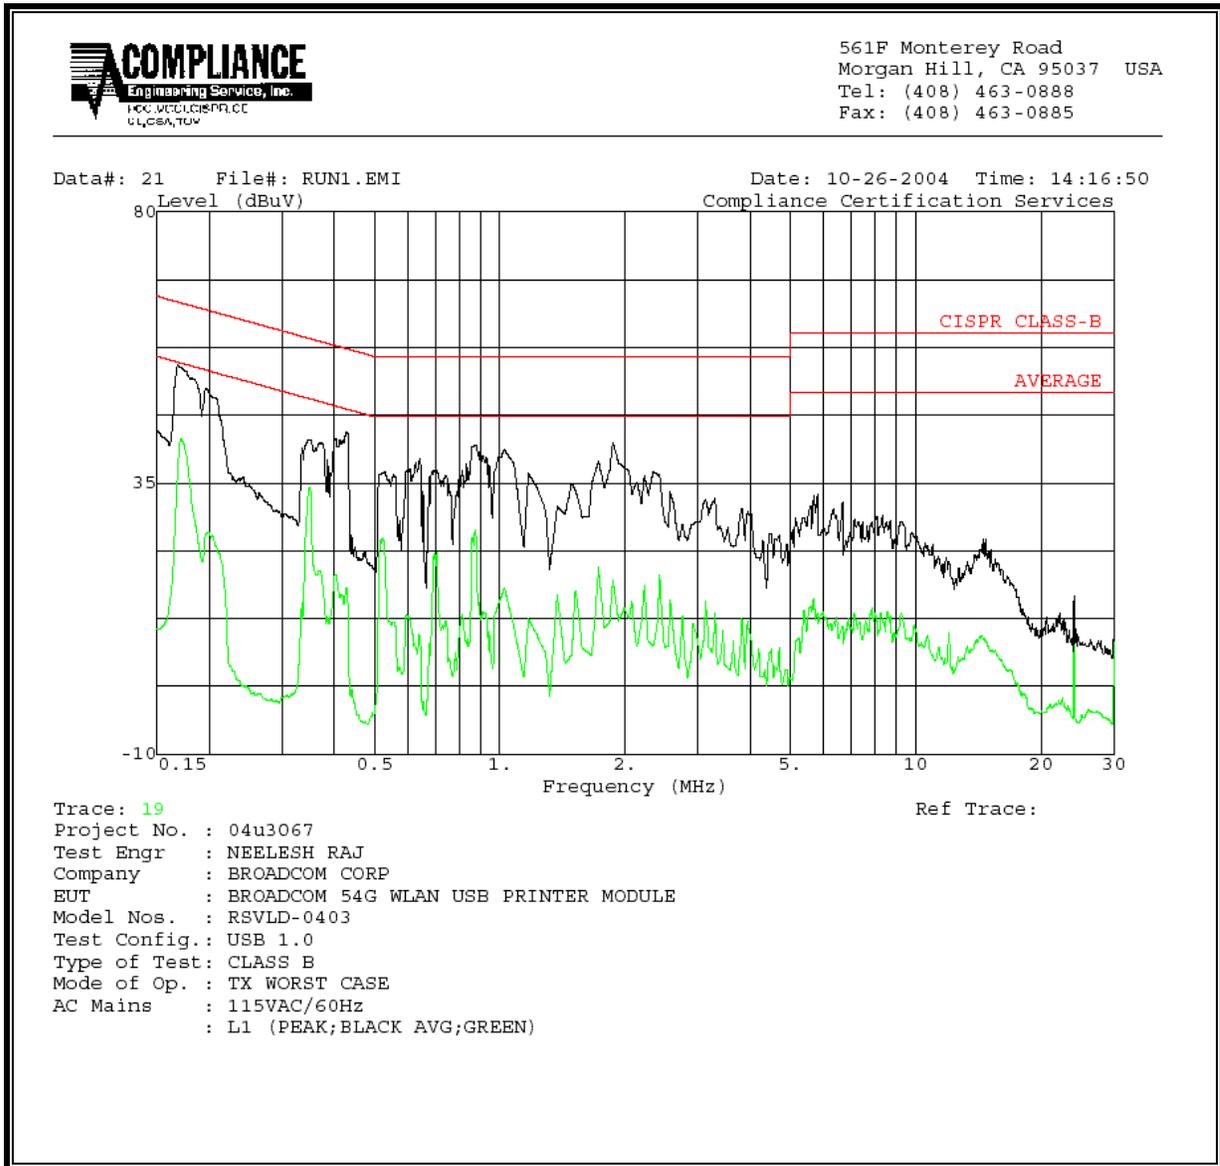


LINE 2 RESULTS (USB 1.1)

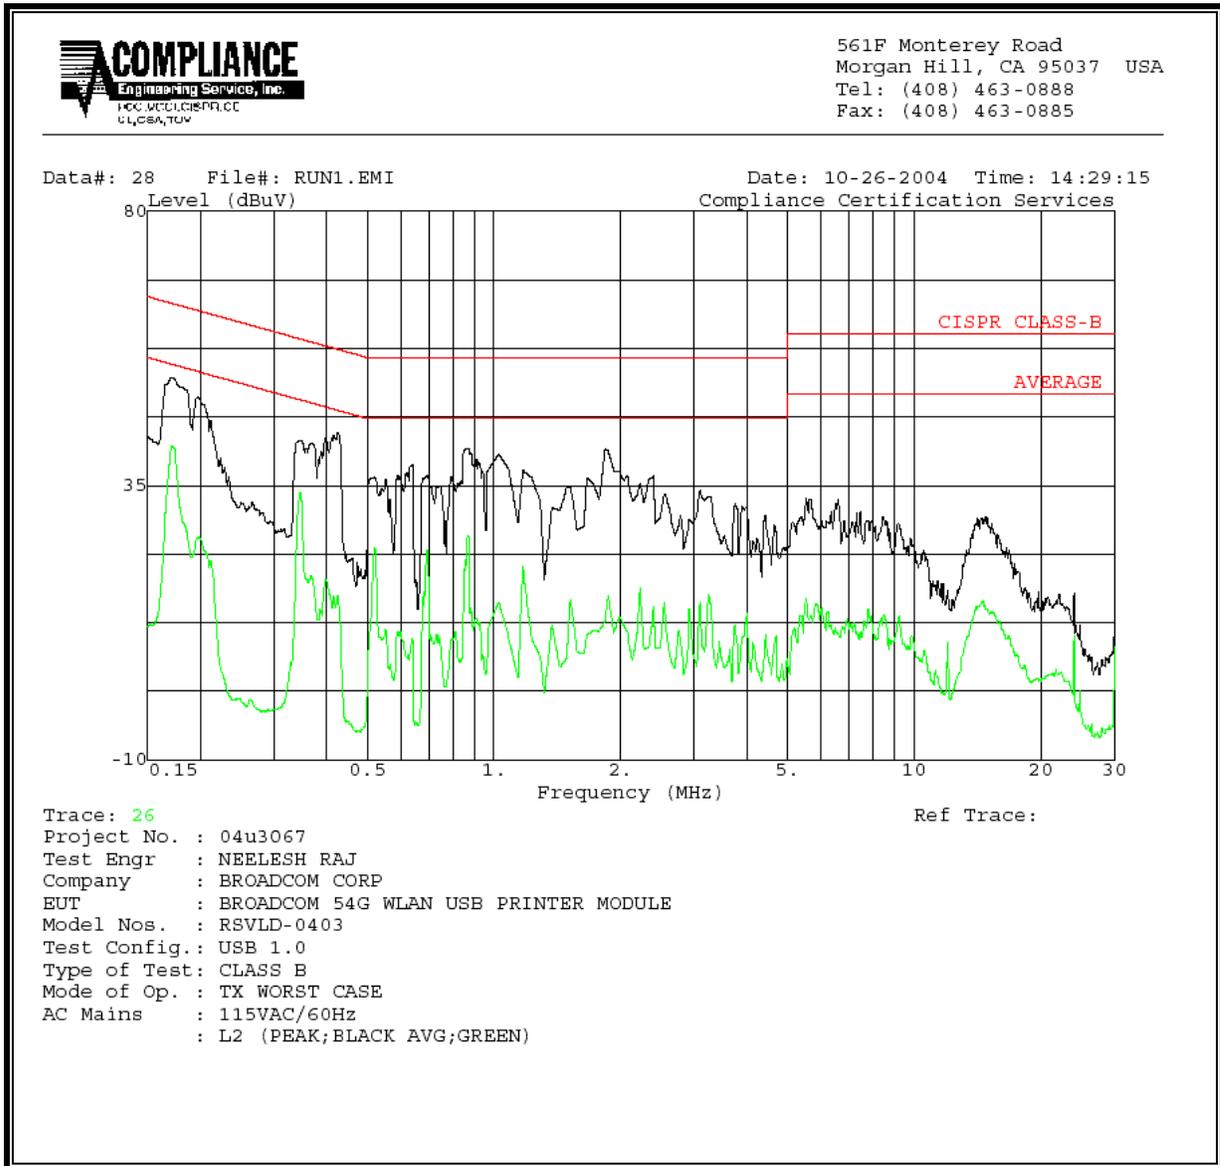

LINE 1 RESULTS (USB 2.0)

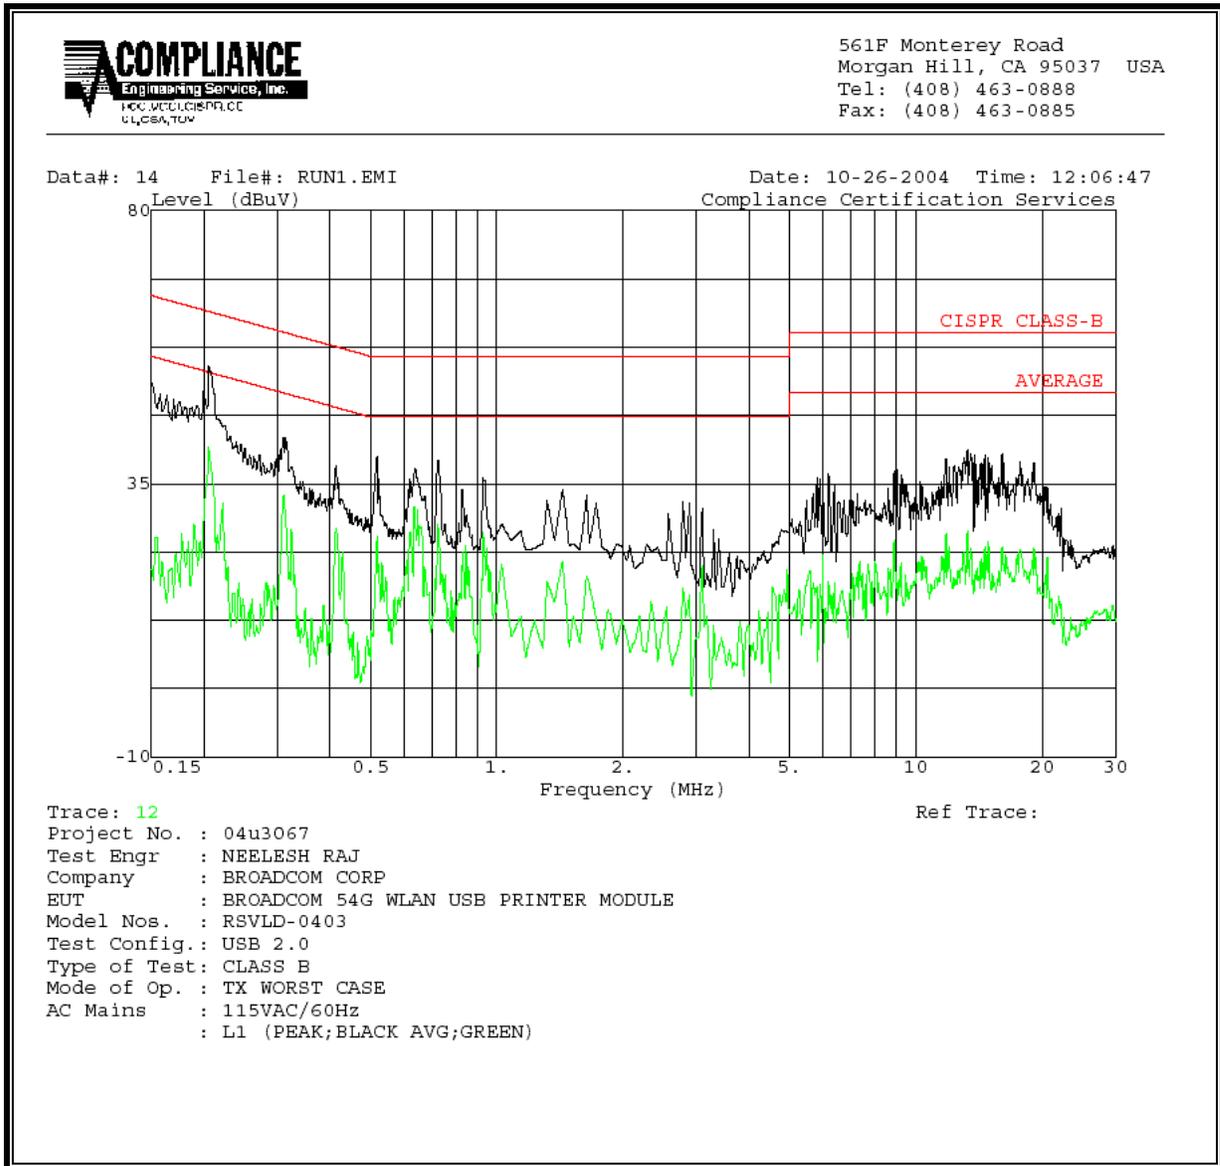


LINE 2 RESULTS (USB 2.0)

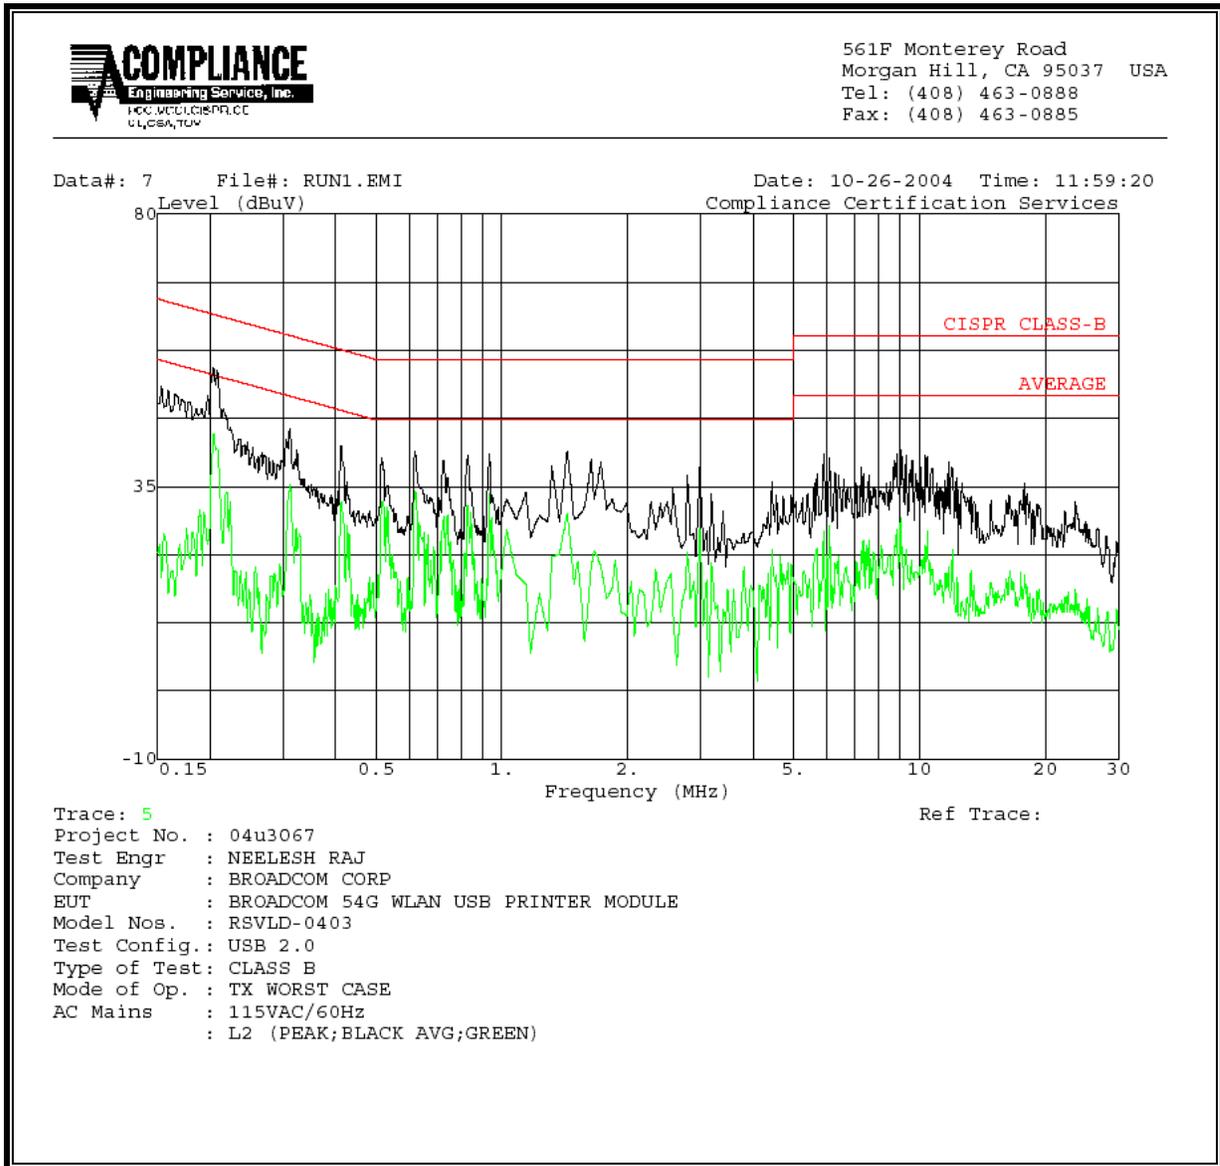


8. SETUP PHOTOS


ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

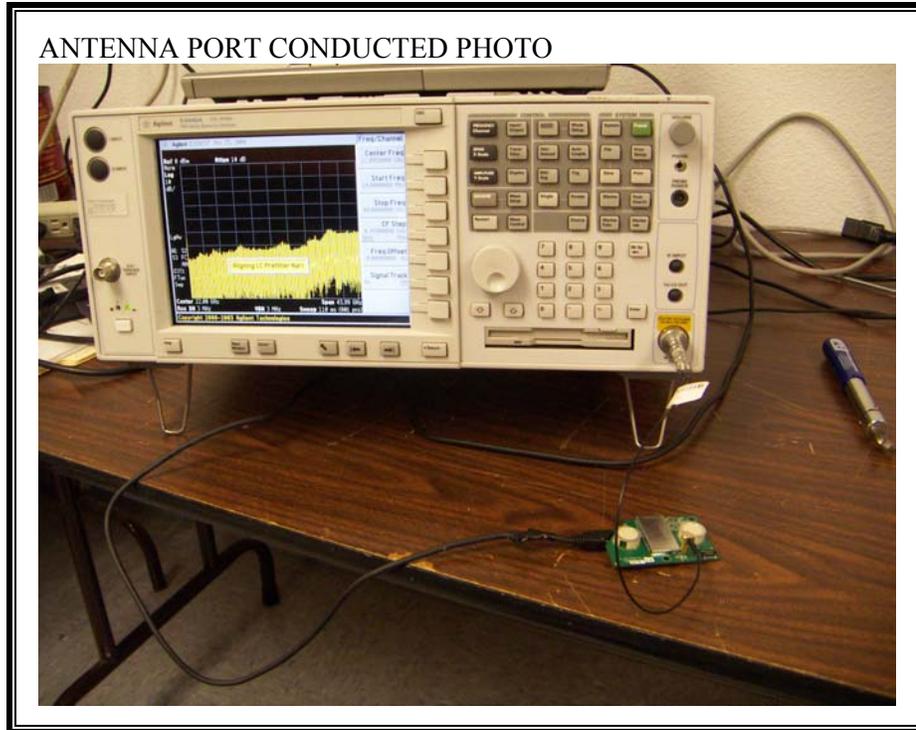

RADIATED RF MEASUREMENT SETUP FOR PORTABLE CONFIGURATION

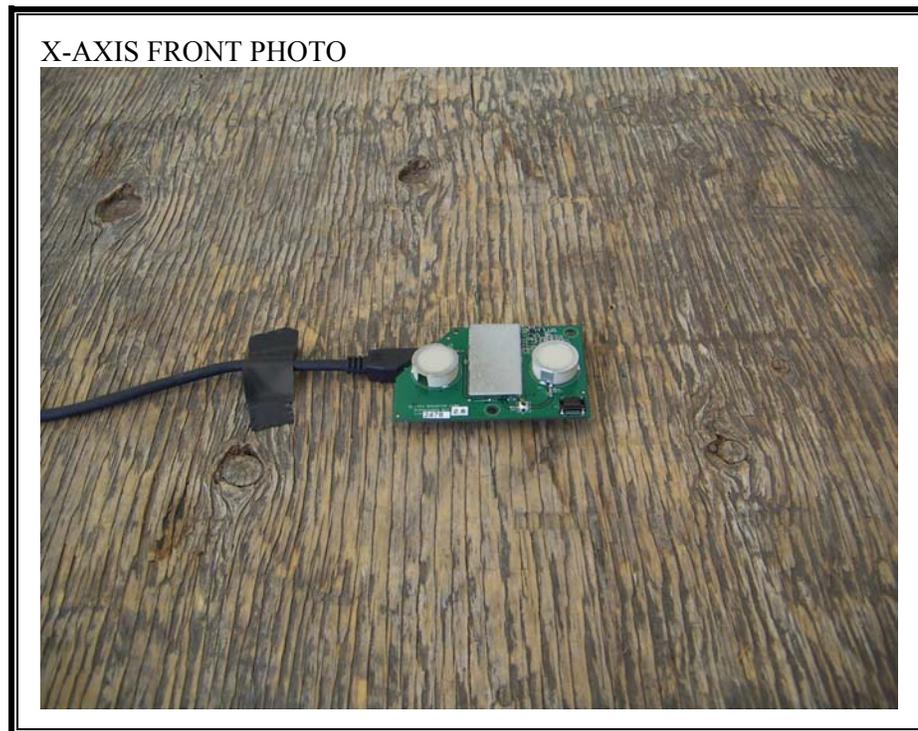


Y-AXIS FRONT PHOTO (WORST CASE)

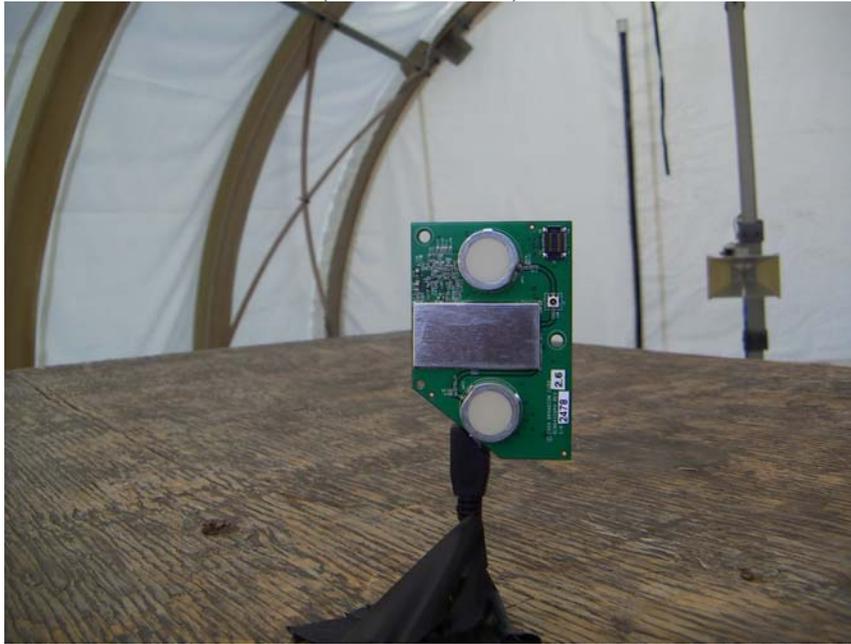



Y-AXIS BACK PHOTO (WORST-CASE)



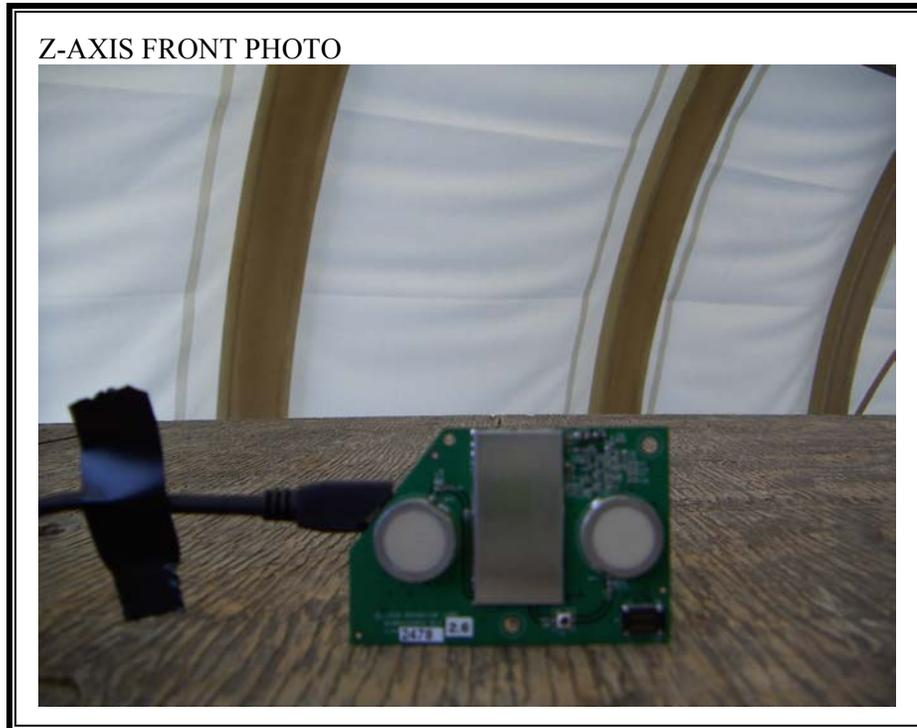



DIGITAL DEVICE RADIATED EMISSIONS SETUP (USB 1.1)

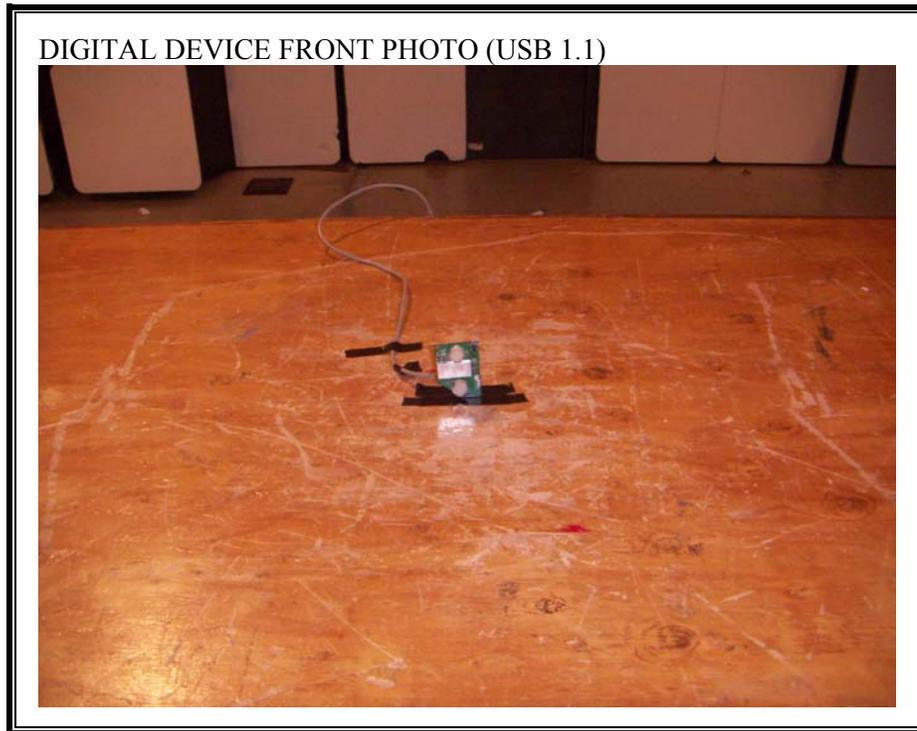

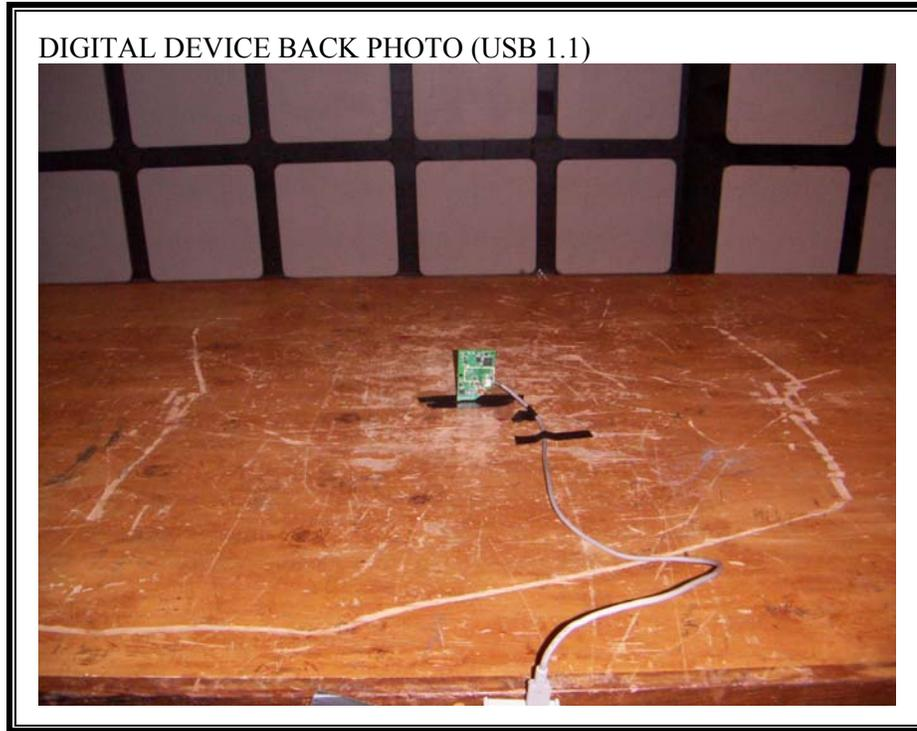



DIGITAL DEVICE RADIATED EMISSIONS SETUP (USB 2.0)

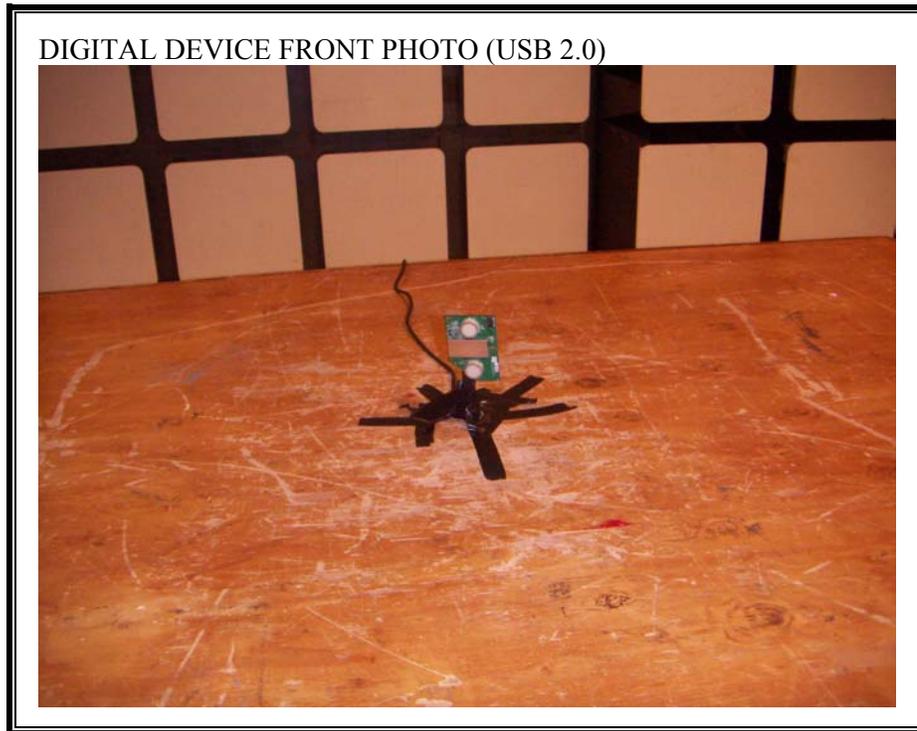

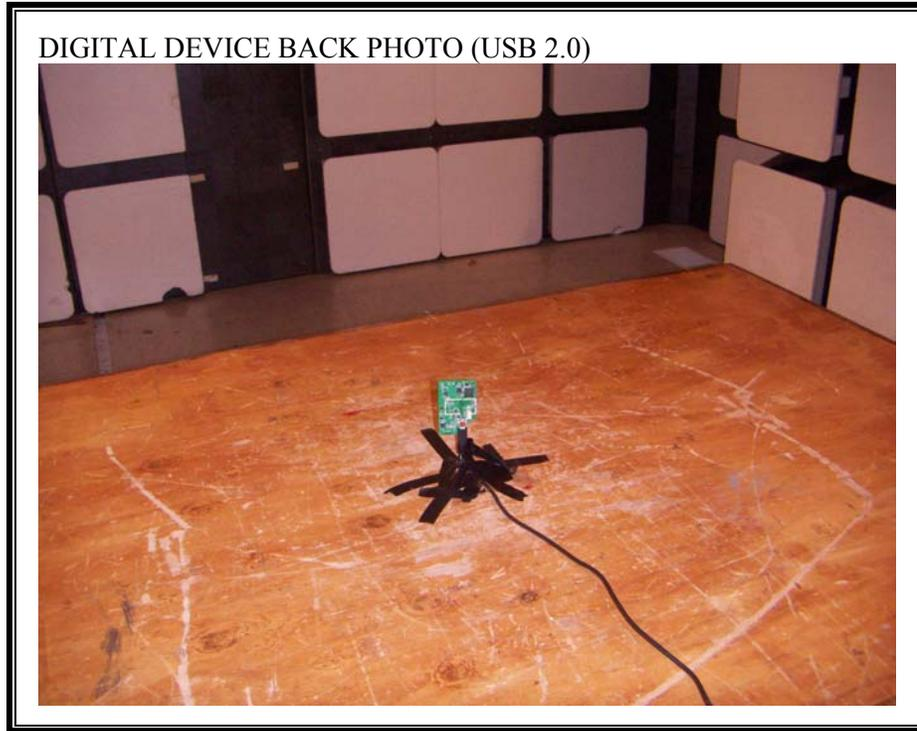



POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP (USB 1.1)

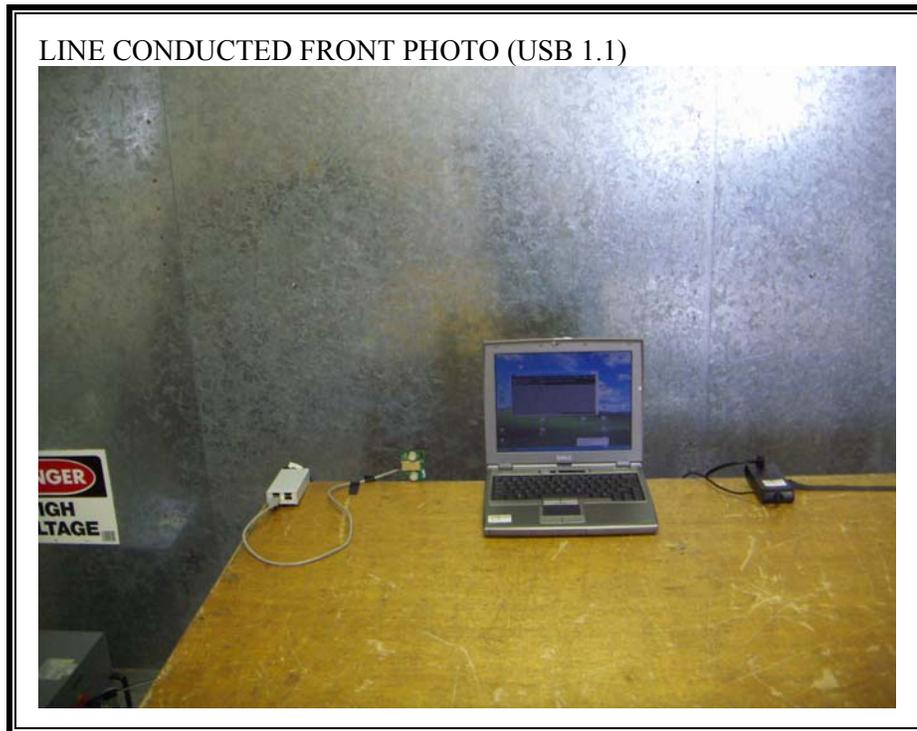

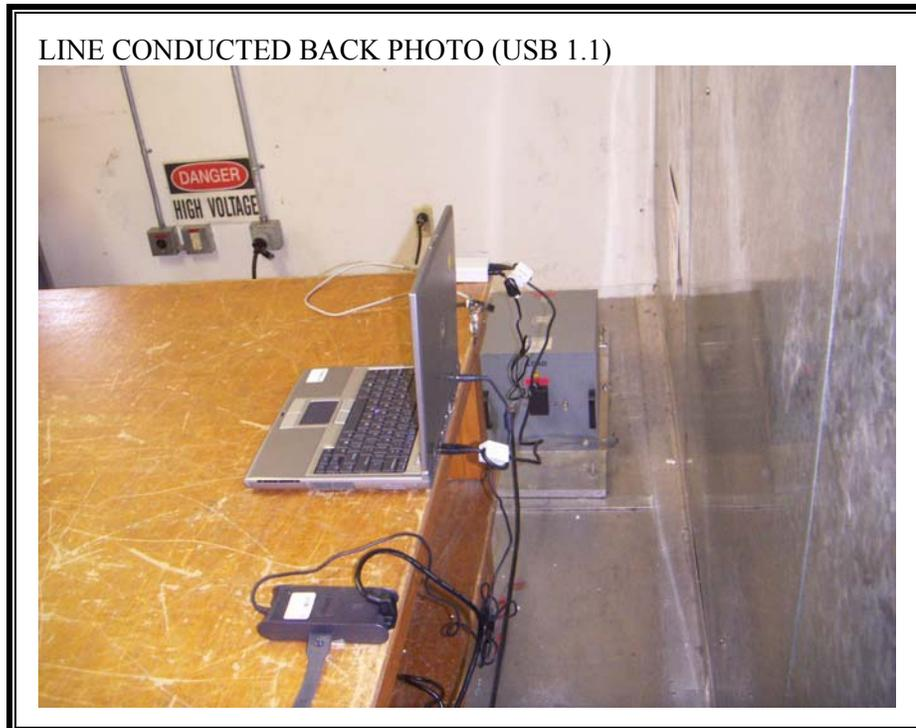

POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP (USB 2.0)

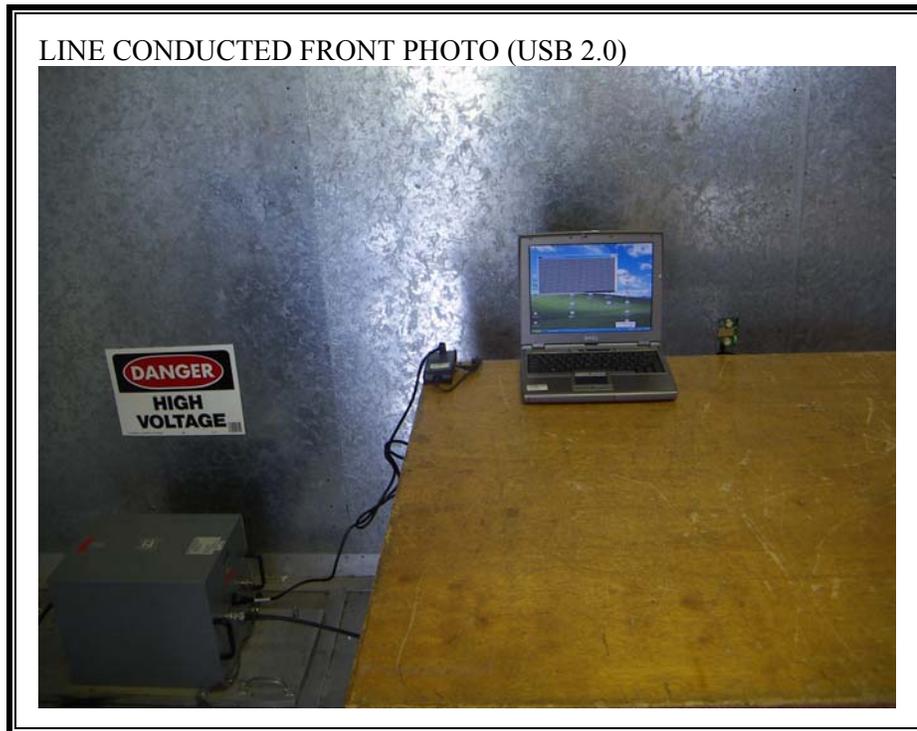

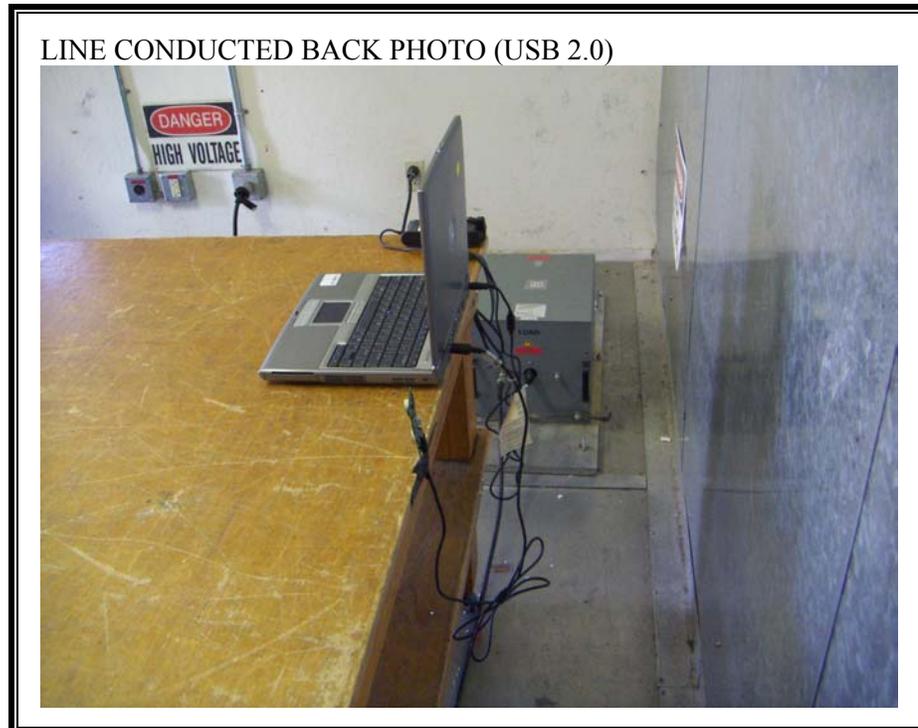

END OF REPORT