

MEASUREMENT REPORT

FCC PART 15.407 / ISSED RSS-247 UNII 802.11a/n

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

05/01/2020 - 08/05/2020

Test Site/Location:

PCTEST Lab. Morgan Hill, CA, USA

Test Report Serial No.:

1C2004270019-10.BCG

FCC ID:

BCG-A2294

IC:

579C-A2294

APPLICANT:

Apple Inc.

Application Type:

Certification

Model/HVIN:

A2294

EUT Type:

Watch

Frequency Range:

5180 – 5825MHz

Modulation Type:

OFDM

FCC Classification:

Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s):

Part 15 Subpart E (15.407)

ISED Specification:

RSS-247 Issue 2

Test Procedure(s):

ANSI C63.10-2013, KDB 789033 D02 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 1 of 66


TABLE OF CONTENTS

1.0	INTRODUCTION	4
1.1	Scope.....	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Antenna Description	7
2.4	Test Support Equipment.....	7
2.5	Test Configuration.....	8
2.6	Software and Firmware	8
2.7	EMI Suppression Device(s)/Modifications.....	8
3.0	DESCRIPTION OF TESTS	9
3.1	Evaluation Procedure	9
3.2	AC Line Conducted Emissions	9
3.3	Radiated Emissions.....	10
3.4	Environmental Conditions.....	10
4.0	ANTENNA REQUIREMENTS	11
5.0	MEASUREMENT UNCERTAINTY	12
6.0	TEST EQUIPMENT CALIBRATION DATA.....	13
7.0	TEST RESULTS	14
7.1	Summary.....	14
7.2	26dB Bandwidth Measurement – 802.11a/n	15
7.3	6dB Bandwidth Measurement – 802.11a/n	22
7.4	Conducted Output Power and Max EIRP Measurement – 802.11a/n.....	25
7.5	Maximum Power Spectral Density – 802.11a/n	27
7.6	Radiated Spurious Emissions – Above 1GHz.....	35
7.6.1	Radiated Spurious Emission Measurements.....	38
7.6.2	Simultaneous Tx Radiated Spurious Emission Measurements.....	51
7.6.3	Radiated Band Edge Measurements (20MHz BW)	53
7.7	Radiated Spurious Emissions – Below 1GHz	57
7.7.1	Radiated Spurious Emission Measurements (Below 1GHz).....	60
7.7.2	Simultaneous Tx Radiated Spurious Emission Measurements (Below 1GHz).....	61
7.8	AC Line-Conducted Emissions Measurements.....	62
8.0	CONCLUSION.....	66

FCC ID: BCG-A2294	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 2 of 66



MEASUREMENT REPORT



UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	FCM	
			Max. Power (mW)	Max. Power (dBm)
1	20	5180 - 5240	39.174	15.93
2A		5260 - 5320	39.719	15.99
2C		5500 - 5720	39.811	16.00
3		5745 - 5825	39.811	16.00

FCC/ISED EUT Overview

FCC ID: BCG-A2294	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 3 of 66

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Morgan Hill, CA 95037, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISSED.

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 4 of 66

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Watch FCC ID: BCG-A2294**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

Test Device Serial No.: GY6CP017Q61Y, GY6CP00ZQ61Y

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n UNII, Bluetooth (1x, EDR, HDR4, HDR8, LE), NFC, UWB

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
42	5210	56	5280	116	5580	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825

Table 2-1. 802.11a / 802.11n (20MHz) Frequency / Channel Operations

FCC ID: BCG-A2294	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 5 of 66

Notes:

- 5GHz NII operation is possible in 20MHz channel bandwidth. The maximum measured duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of KDB 789033 D02 v02r01 and ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Measured Duty Cycles		
802.11 Mode/Band		Duty Cycle [%]
		FCM
5GHz	a	98.4
	n (HT20)	98.2

Table 2-2. Measured Duty Cycles

Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)
6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n – 20MHz)

- This device supports simultaneous multi radio transmission feature, which allows multiple radios to transmit simultaneously at the same antenna. The table below shows all the possible multi radio TX combinations:

Simultaneous Tx Config	Antenna FCM				
	WLAN	Bluetooth	LTE/WCDMA	UNII	UWB
	802.11 b/g/n	BDR, EDR, HDR4/8, LE	Mid band/ High band	802.11 a/n	Ch.5, Ch.9
Config 1	✓	✗	✗	✗	✓
Config 2	✗	✓	✗	✗	✓
Config 3	✗	✗	✓	✗	✓
Config 4	✗	✓	✓	✗	✗
Config 5	✓	✗	✓	✗	✗
Config 6	✗	✗	✓	✓	✗
Config 7	✗	✓	✗	✓	✗
Config 8	✓	✗	✓	✗	✓
Config 9	✗	✓	✓	✗	✓
Config 10	✗	✓	✓	✓	✗

Table 2-3. Simultaneous Transmission Configuration

✓ = Support ; ✗ = NOT Support

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch		Page 6 of 66

2.3 Antenna Description

Following antenna was used for the testing.

Frequency [GHz]	Antenna Gain (dBi)
	FCM
5.15 – 5.25	-4.2
5.25 – 5.35	-2.0
5.47 – 5.725	-4.4
5.725 – 5.85	-3.8

Table 2-4. Highest Antenna Gain

2.4 Test Support Equipment

1	Apple MacBook	Model:	A1398	S/N:	C02QT94WG8WP
	w/AC/DC Adapter	Model:	A1435	S/N:	N/A
2	Apple USB Cable	Model:	Kanzi	S/N:	325316
	w/ Charging Dock	Model:	FAPS73	S/N:	17481001022
	w/ Dock	Model:	X241	S/N:	GW17F01ST22
3	USB Lightning Cable	Model:	N/A	S/N:	N/A
	w/ AC Adapter	Model:	A1385	S/N:	N/A
4	Wireless Charging Pad (WCP)	Model:	EVT	S/N:	DLC9223004YLNWL43
	Wireless Charging Pad (WCP)	Model:	EVT	S/N:	DLC9104001JLNWK18
5	Test Pathfinder CANMORE Board	Model:	X1658	S/N:	920-08295-03
	w/ Test Socket BANKSY	Model:	EVT X1658	S/N:	920-08658-03
6	DC Power Supply	Model:	KPS3010D	S/N:	N/A

Table 2-5. Test Support Equipment List

FCC ID: BCG-A2294	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 7 of 66

2.5 Test Configuration

The EUT was tested per the guidance of KDB 789033 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

The worst case configuration was investigated for all combinations of the three materials, aluminum, stainless steel, and Titanium and various types of wristbands, metal and non-metal wristbands. The store display sample was investigated and determined as not the worst case. The EUT was also investigated with and without wireless charger. The worst case configuration found was used for all testing.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, the following configurations were investigated:

- EUT powered by AC/DC adaptor via USB cable with wireless charger
- EUT powered by host PC via USB cable with wireless charger

All possible simultaneous transmission configurations have been investigated and the worst case config has been reported.

Description	Bluetooth	LTE (Band 41)	UNII
Antenna	FCM	FCM	FCM
Channel	39	39750	36
Operating Frequency (MHz)	2441	2506	5180
Mode/Modulation	GFSK ePA	QPSK/1RB/20MHz	11n

Table 2-6. Worst Case Simultaneous Transmission Configuration

2.6 Software and Firmware

The test was conducted with firmware version wOS 7.0 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 8 of 66

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.8. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 9 of 66

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCG-A2294	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 10 of 66

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCG-A2294	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 11 of 66

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.30
Line Conducted Disturbance	2.34
Radiated Disturbance (<1GHz)	4.15
Radiated Disturbance (>1GHz)	4.59
Radiated Disturbance (>18GHz)	4.96

FCC ID: BCG-A2294	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch
		Page 12 of 66

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	3/4/2020	Annual	3/4/2021	MY49430244
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	10/29/2019	Annual	10/29/2020	T058701-02
ESPEC	SU-241	Tabletop Temperature Chamber	9/3/2019	Annual	9/3/2020	92009574
ETS-Lindgren	3142E-PA	Pre-Amplifier (30MHz - 6GHz)	9/19/2019	Annual	9/19/2020	213236
ETS-Lindgren	3142E	BiConiLog Antenna (30MHz - 6GHz)	1/6/2020	Annual	1/6/2021	224569
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	4/21/2020	Annual	4/21/2021	205956
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	3/2/2020	Annual	3/2/2021	101619
Rohde & Schwarz	ESW26	EMI Test Receiver	6/1/2020	Annual	6/1/2021	101299
Rohde & Schwarz	ESW44	EMI Test Receiver	9/13/2019	Annual	9/13/2020	101570
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	11/16/2019	Annual	11/16/2020	164715
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	4/16/2020	Annual	4/16/2021	166869
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	9/19/2019	Annual	9/19/2020	100051
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	11/14/2019	Annual	11/14/2020	101057
Rohde & Schwarz	HFH2-Z2	Loop Antenna	3/12/2020	Annual	3/12/2021	100546

Table 6-1. Test Equipment List

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 13 of 66

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
FCC ID: BCG-A2294
FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407	RSS-Gen [6.7]	26dB Bandwidth	N/A	CONDUCTED	N/A	Section 7.2
15.407(e)	RSS-Gen [6.7]	6dB Bandwidth	>500kHz(5725-5850MHz)		PASS	Section 7.3
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.4
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.5
15.407(h)	RSS-247 [6.3]	Dynamic Frequency Selection	See 15.407 (h) & RSS-247 [6.3]	RADIATED	PASS	See DFS Test Report (1C20042700 19-09.BCG)
15.407(b.1), (2), (3), (4)	RSS-247 [6.2]	Out of band and Band edge Emissions	Out of band and Band edge Emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2])		PASS	Section 7.6
15.205, 15.407(b.1), (4), (5), (6)	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])		PASS	Section 7.6, 7.7
15.407	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 (RSS-Gen [8.8]) limits	LINE CONDUCTED	PASS	Section 7.8

Table 7-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “UNII Automation,” Version 4.8.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “Chamber Automation,” Version 1.3.1.

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 14 of 66

7.2 26dB Bandwidth Measurement – 802.11a/n

§15.407; RSS-Gen [6.7]

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4

KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes


1. All modes were investigated and only the worst case is reported.

FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch		Page 15 of 66


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	n (20MHz)	6.5/7.2 (MCS0)	35.33
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	35.75
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	34.84
Band 2A	5260	52	n (20MHz)	6.5/7.2 (MCS0)	34.54
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	35.28
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	35.50
Band 2C	5500	100	n (20MHz)	6.5/7.2 (MCS0)	33.24
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	38.81
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	35.29

Table 7-2. Conducted Bandwidth Measurements

FCC ID: BCG-A2294	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 16 of 66

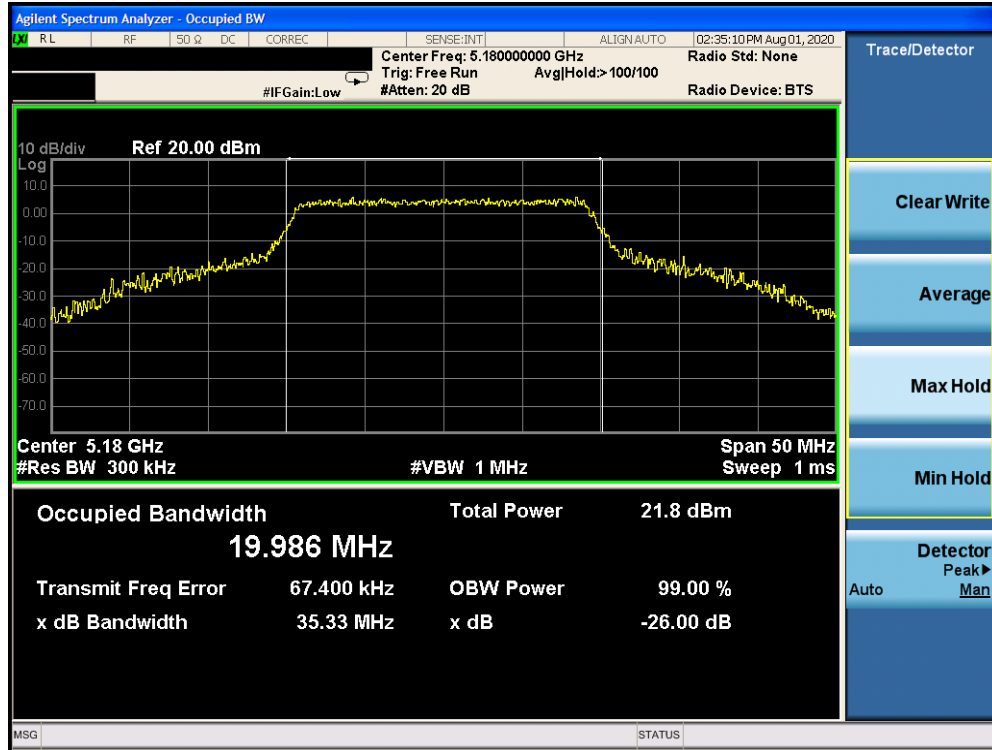


Plot 7-1. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

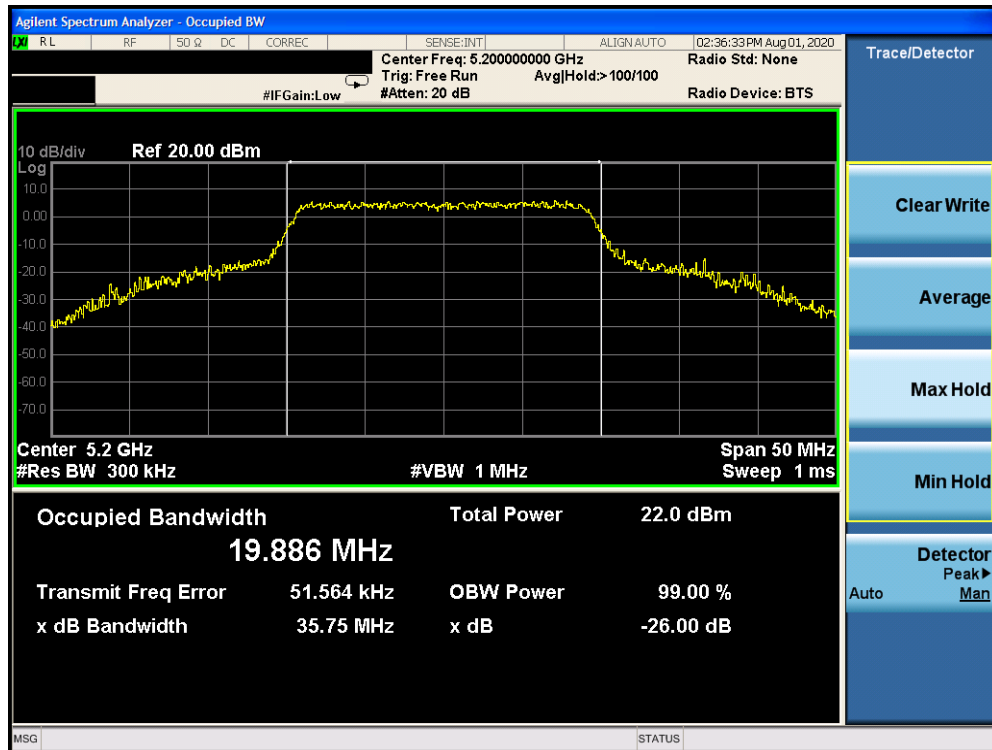


Plot 7-2. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 17 of 66

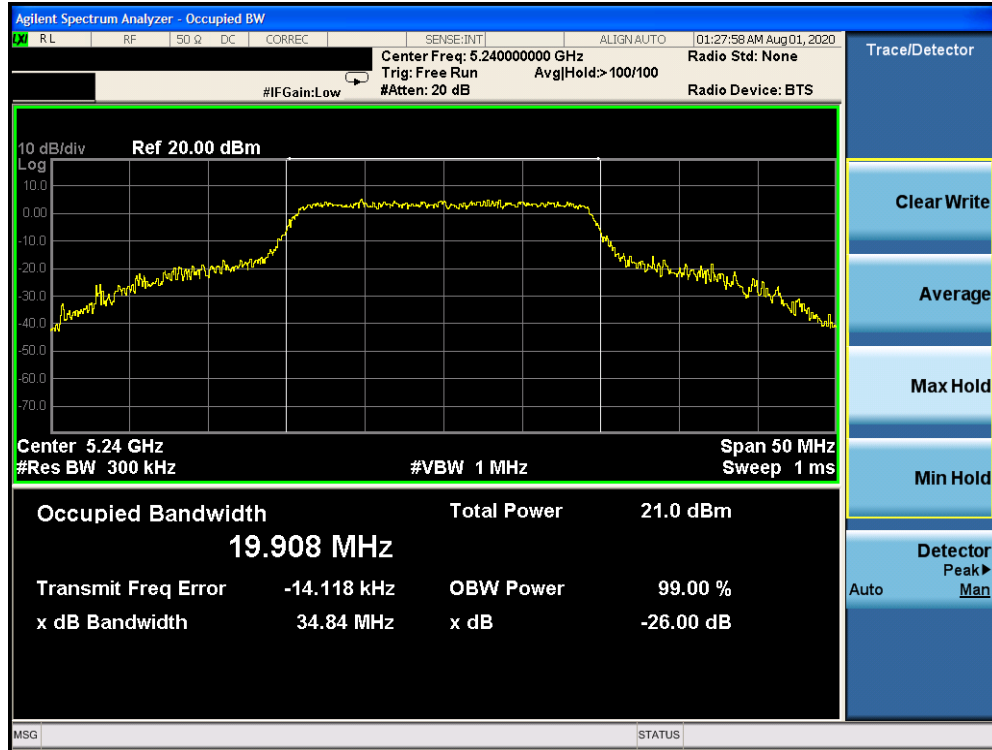


Plot 7-3. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

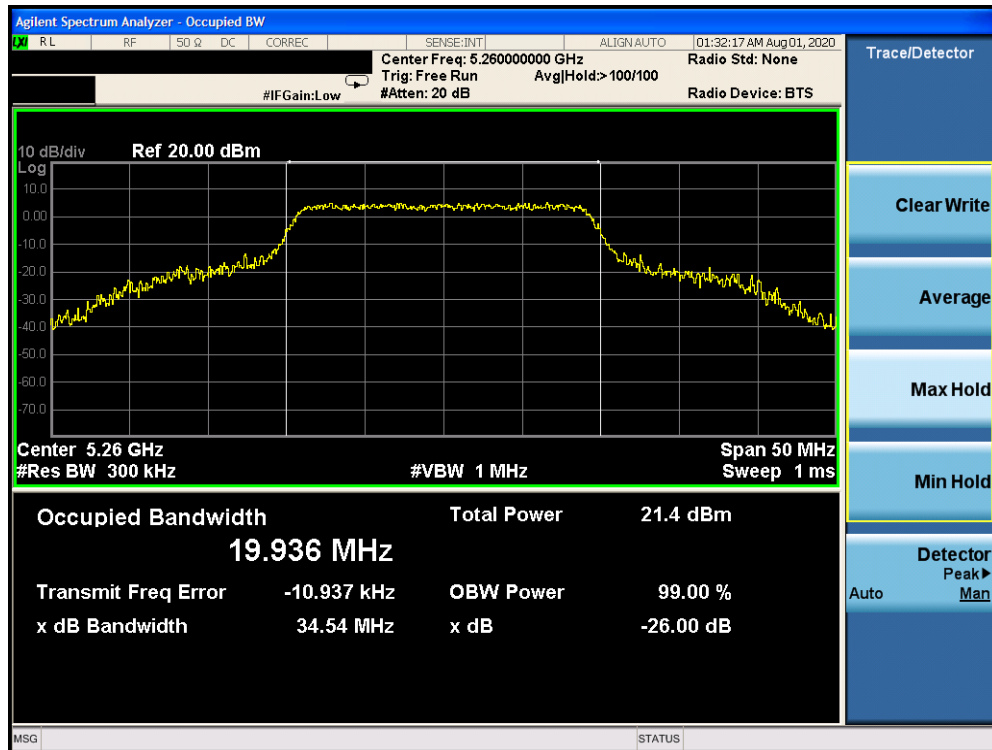


Plot 7-4. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 18 of 66

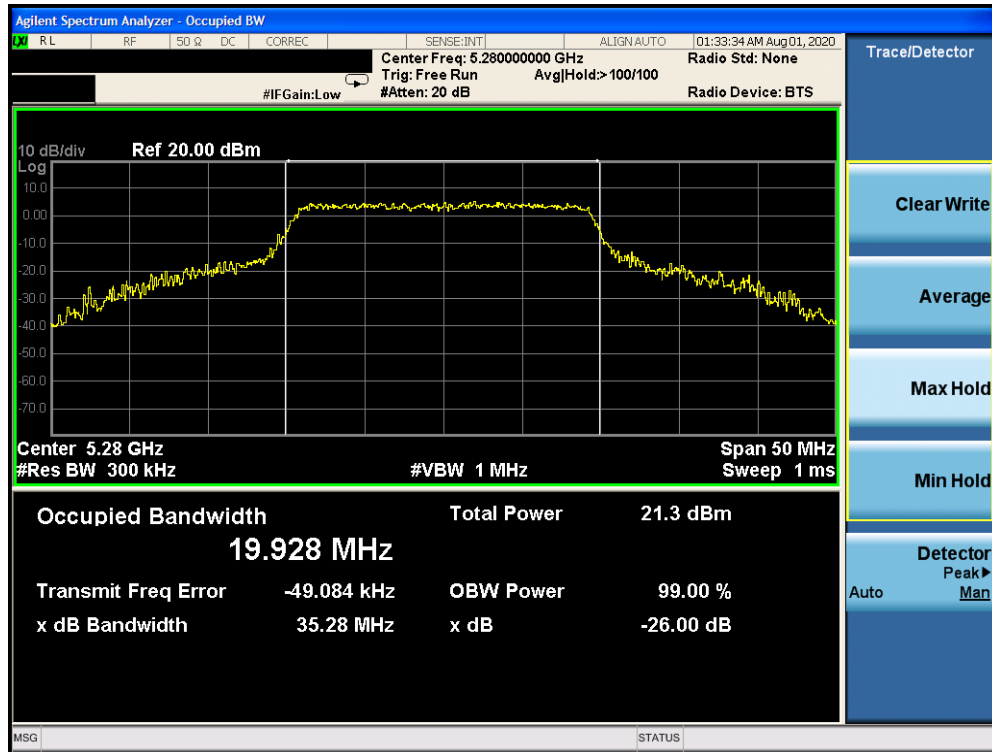


Plot 7-5. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

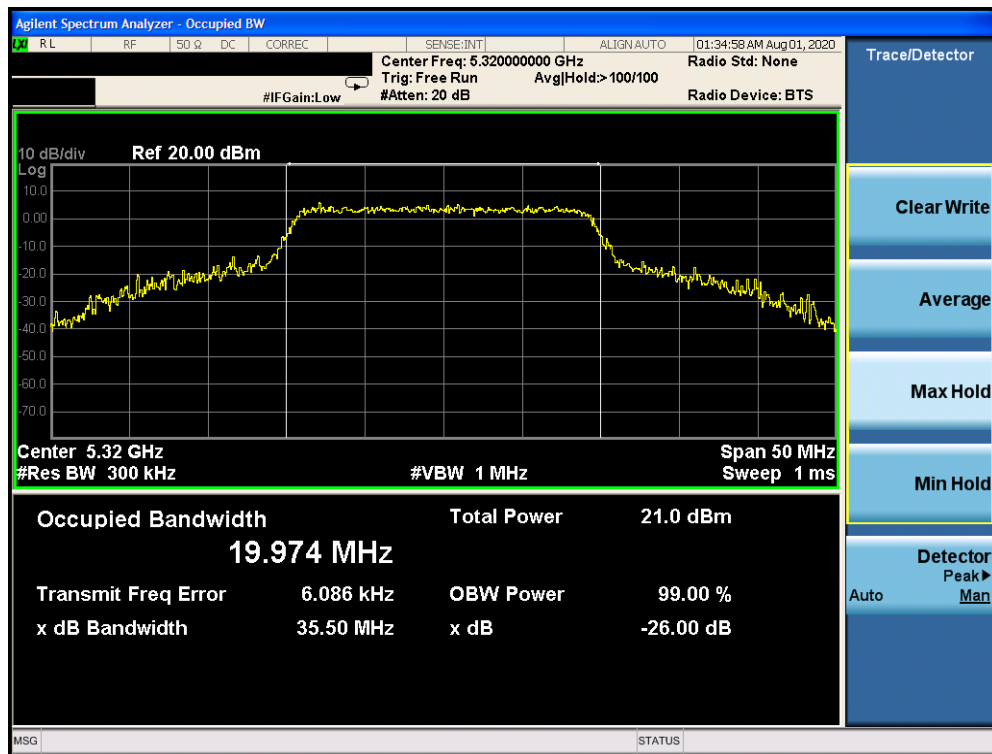


Plot 7-6. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 19 of 66

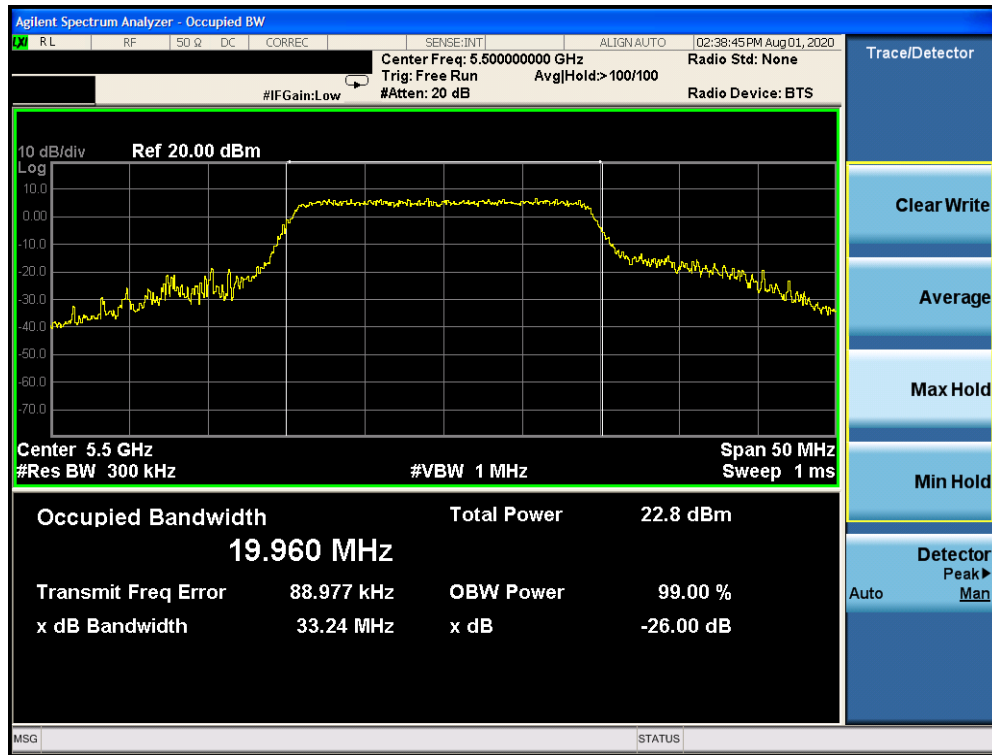


Plot 7-7. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

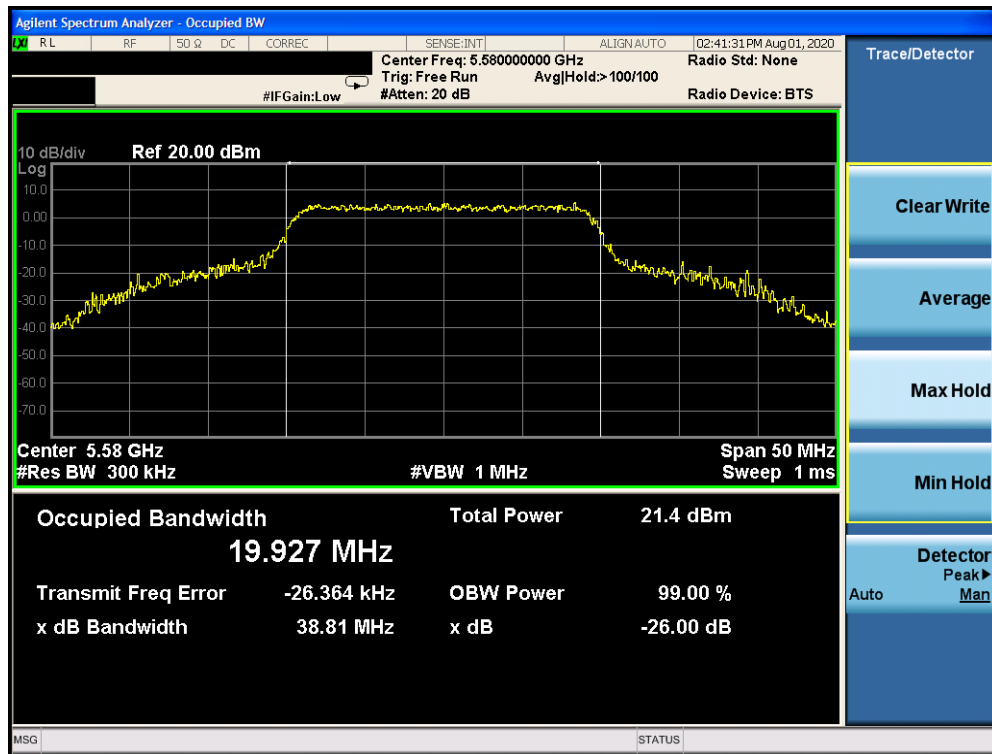

Plot 7-8. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 116)

FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 20 of 66

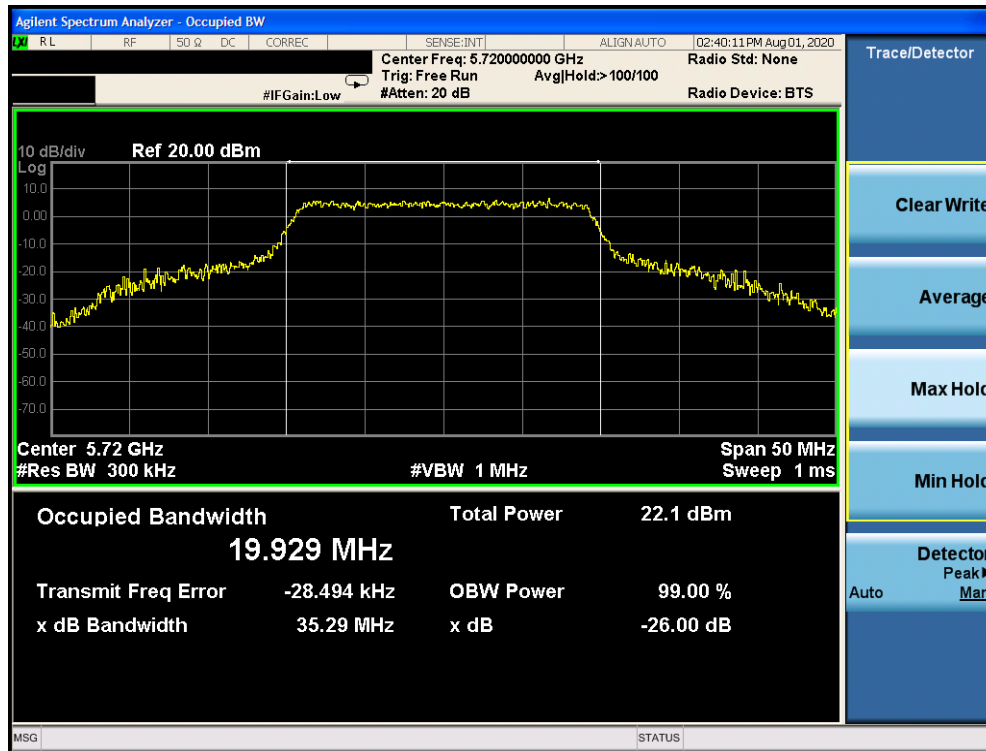

Plot 7-9. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 21 of 66

7.3 6dB Bandwidth Measurement – 802.11a/n §15.407 (e); RSS-Gen [6.7]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz band, the 6dB bandwidth must be ≥ 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup


Test Notes

1. All modes were investigated and only the worst case is reported.

FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 22 of 66


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	n (20MHz)	6.5/7.2 (MCS0)	18.09
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	18.39
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	18.18

Table 7-3. Conducted Bandwidth Measurements

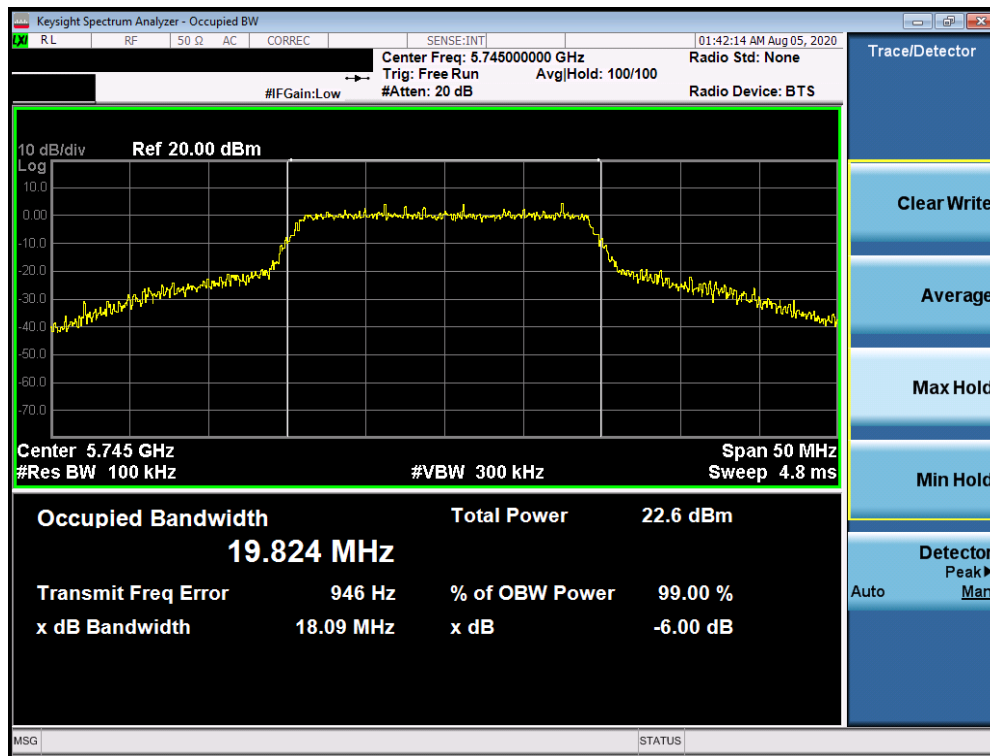


Plot 7-10. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 23 of 66

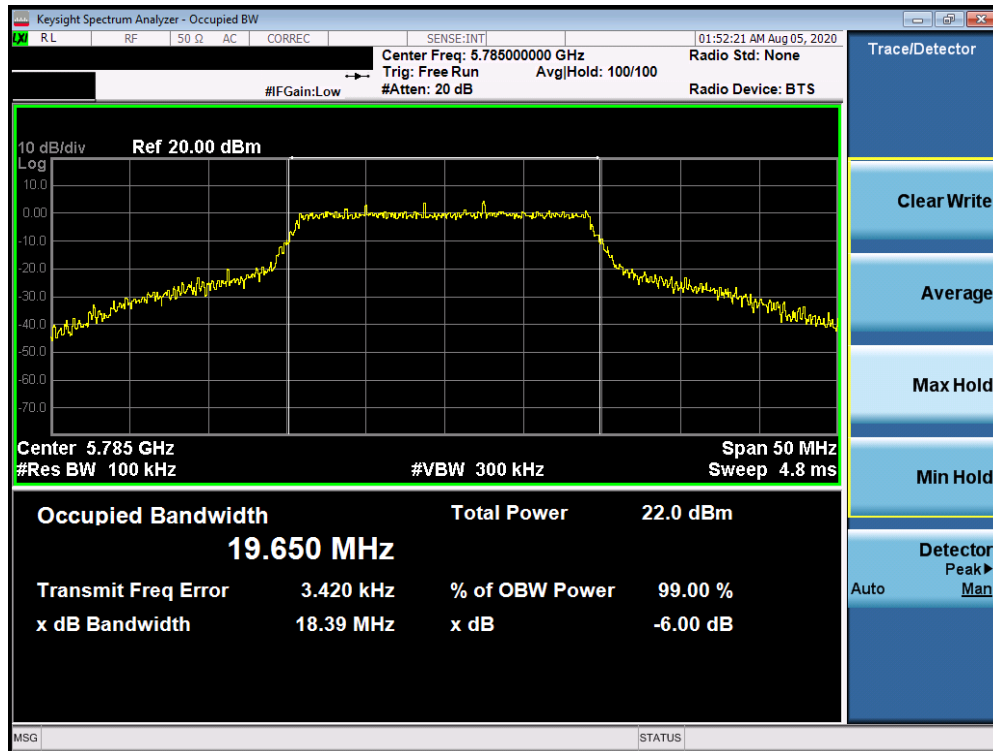

Plot 7-11. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

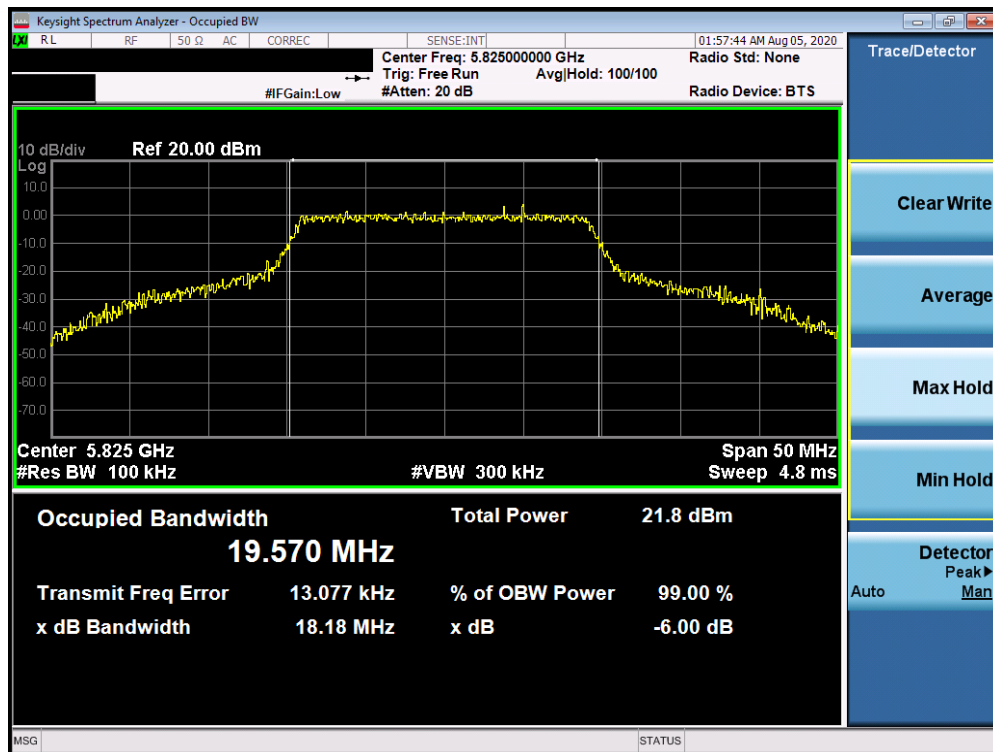

Plot 7-12. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 24 of 66

7.4 Conducted Output Power and Max EIRP Measurement – 802.11a/n §15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. B is the 99% OBW per ISSED RSS-247 and 26dB BW is per FCC 15.407.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm). The maximum e.i.r.p. shall not exceed the lesser of 200 mW or $10 + 10 \log_{10} B$, dBm.

In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or $11 \text{ dBm} + 10 \log_{10}(26 \text{ dB BW}) = 11 \text{ dBm} + 10 \log_{10}(34.54) = 26.38 \text{ dBm}$. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or $17 + 10 \log_{10} B$, dBm.

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or $11 \text{ dBm} + 10 \log_{10}(26 \text{ dB BW}) = 11 \text{ dBm} + 10 \log_{10}(33.24) = 26.22 \text{ dBm}$. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or $17 + 10 \log_{10} B$, dBm.

In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm). The maximum e.i.r.p. is 36 dBm.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G
KDB 789033 D02 v02r01 – Section E3)b) Method PM-G

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

- Per RSS-247 Section 6.2.3, transmission on channels which overlap the 5600-5650 MHz is prohibited. This device operates under these frequencies only under the control of a certified master device and does not support active scanning on these channels. This device does not transmit any beacons or initiate any transmissions in UNII Bands 2A or 2C.
- For 802.11n, the worst case data rate for channel 140 was found to be MCS7. For all other channels, the worst case was MCS0.

FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 25 of 66

Freq [MHz]	Channel	Detector	IEEE Transmission Mode [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
			802.11a	802.11n		
5180	36	AVG	15.90	15.93	23.98	-8.05
5200	40	AVG	15.87	15.73	23.98	-8.11
5240	48	AVG	15.77	15.75	23.98	-8.21
5260	52	AVG	15.83	15.99	23.98	-7.99
5280	56	AVG	15.79	15.87	23.98	-8.11
5320	64	AVG	15.79	15.81	23.98	-8.17
5500	100	AVG	15.86	16.00	23.98	-7.98
5580	116	AVG	15.78	15.82	23.98	-8.16
5680	136	AVG	15.90	15.97	23.98	-8.01
5700	140	AVG	12.50	12.50	23.98	-11.48
5720	144	AVG	16.00	15.86	23.98	-7.98
5745	149	AVG	15.71	16.00	30.00	-14.00
5785	157	AVG	15.81	15.80	30.00	-14.19
5825	165	AVG	15.91	15.88	30.00	-14.09

Table 7-4. FCC 20MHz BW (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Detector	IEEE Transmission Mode [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			802.11a	802.11n						
5180	36	AVG	15.90	15.93	-	-	-4.20	11.73	23.01	-11.28
5200	40	AVG	15.87	15.73	-	-	-4.20	11.67	23.01	-11.34
5240	48	AVG	15.77	15.75	-	-	-4.20	11.57	23.01	-11.44
5260	52	AVG	15.83	15.99	23.98	-7.99	-2.00	13.99	30.00	-16.01
5280	56	AVG	15.79	15.87	23.98	-8.11	-2.00	13.87	30.00	-16.13
5320	64	AVG	15.79	15.81	23.98	-8.17	-2.00	13.81	30.00	-16.19
5500	100	AVG	15.86	16.00	23.98	-7.98	-4.40	11.60	30.00	-18.40
5580	116	AVG	15.78	15.82	23.98	-8.16	-4.40	11.42	30.00	-18.58
5680	136	AVG	15.90	15.97	23.98	-8.01	-4.40	11.57	30.00	-18.43
5700	140	AVG	12.50	12.50	23.98	-11.48	-4.40	8.10	30.00	-21.90
5720	144	AVG	16.00	15.86	23.98	-7.98	-4.40	11.60	30.00	-18.40
5745	149	AVG	15.71	16.00	30.00	-14.00	-3.80	12.20	-	-
5785	157	AVG	15.81	15.80	30.00	-14.19	-3.80	12.01	-	-
5825	165	AVG	15.91	15.88	30.00	-14.09	-3.80	12.11	-	-

Table 7-5. ISD 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP

FCC ID: BCG-A2294	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 26 of 66

7.5 Maximum Power Spectral Density – 802.11a/n §15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.15 – 5.25GHz, 5.25 – 5.35GHz, 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.

In the 5.15 – 5.25GHz band, the e.i.r.p. spectral density shall not exceed 10 dBm in any 1 MHz band.

In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2
KDB 789033 D02 v02r01 – Section F

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span}/\text{RBW})$
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

1. All modes were investigated and only the worst case is reported.


FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 27 of 66

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	n (20MHz)	6.5/7.2 (MCS0)	6.63	11.0	-4.37
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	6.41	11.0	-4.59
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	6.61	11.0	-4.39
Band 2A	5260	52	n (20MHz)	6.5/7.2 (MCS0)	7.09	11.0	-3.91
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	7.01	11.0	-3.99
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	6.94	11.0	-4.06
Band 2C	5500	100	n (20MHz)	6.5/7.2 (MCS0)	6.90	11.0	-4.10
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	7.28	11.0	-3.72
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	6.85	11.0	-4.15

Table 7-6. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	n (20MHz)	6.5/7.2 (MCS0)	6.63	-4.20	2.43	10.0	-7.57
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	6.41	-4.20	2.21	10.0	-7.79
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	6.61	-4.20	2.41	10.0	-7.59

Table 7-7. Band 1 e.i.r.p. Conducted Power Spectral Density Measurements (ISED)

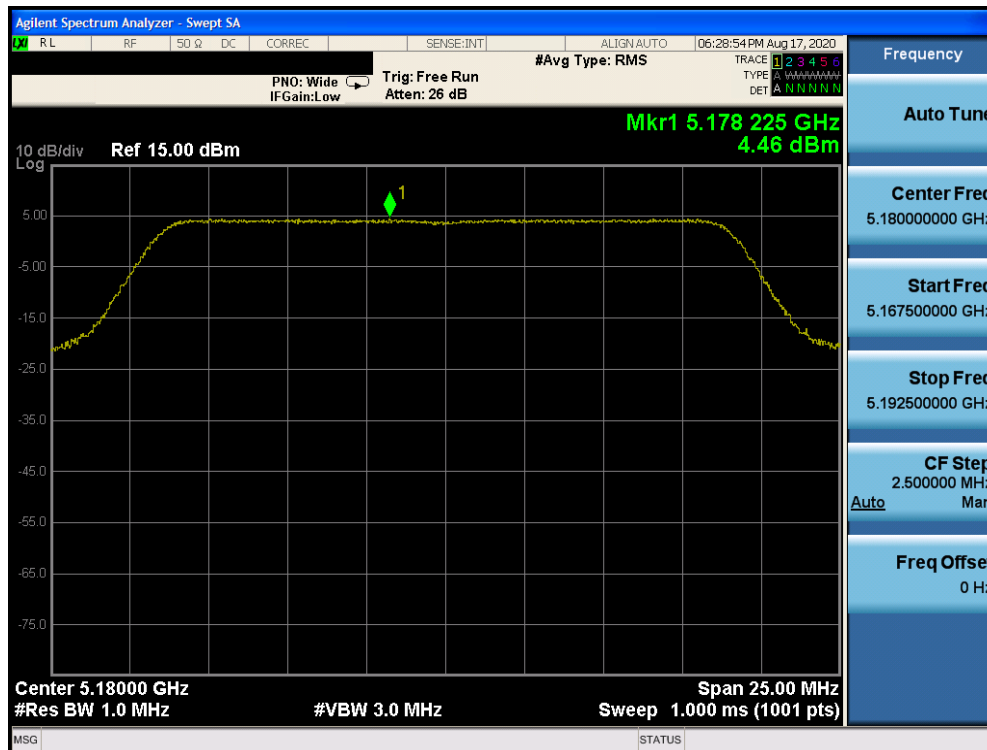


Plot 7-13. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 28 of 66

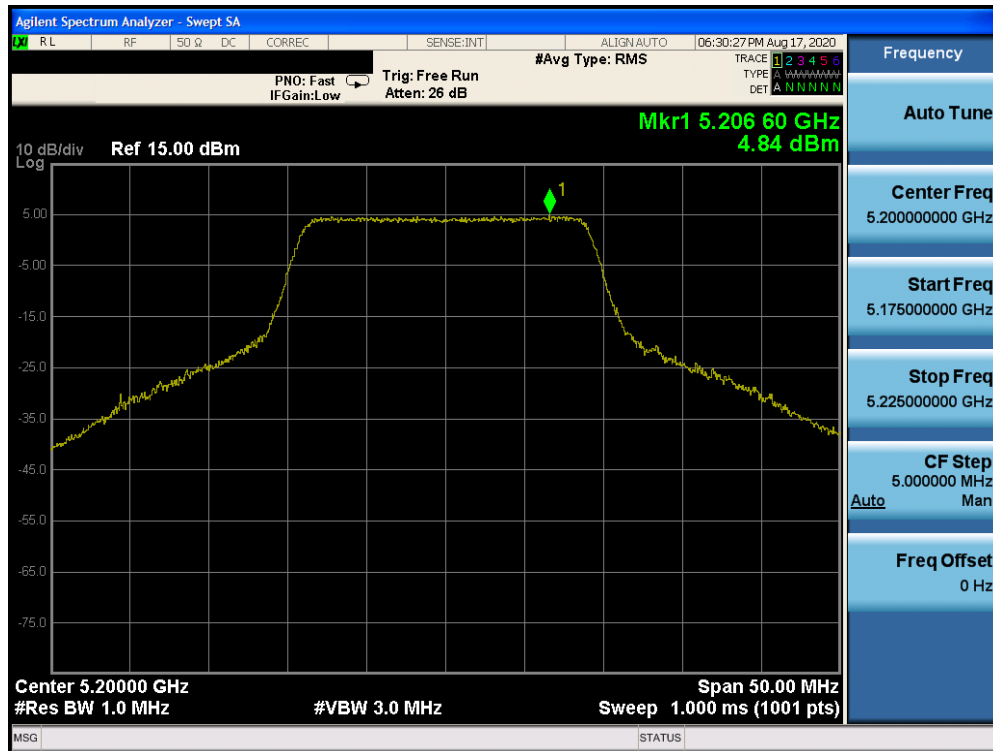


Plot 7-14. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

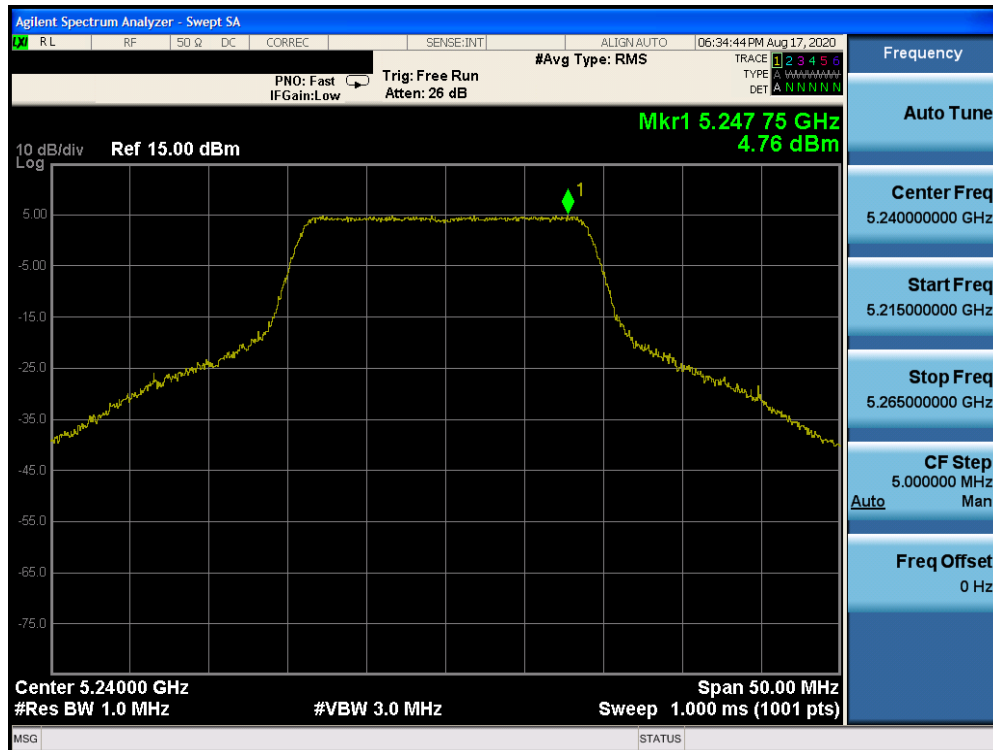


Plot 7-15. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 29 of 66

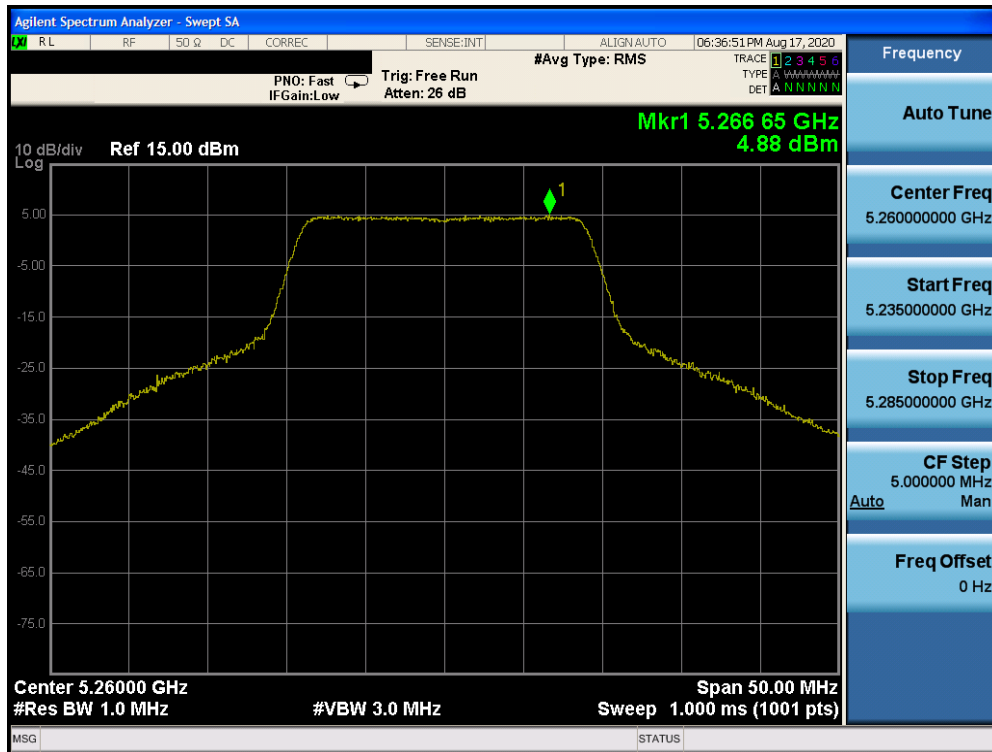


Plot 7-16. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

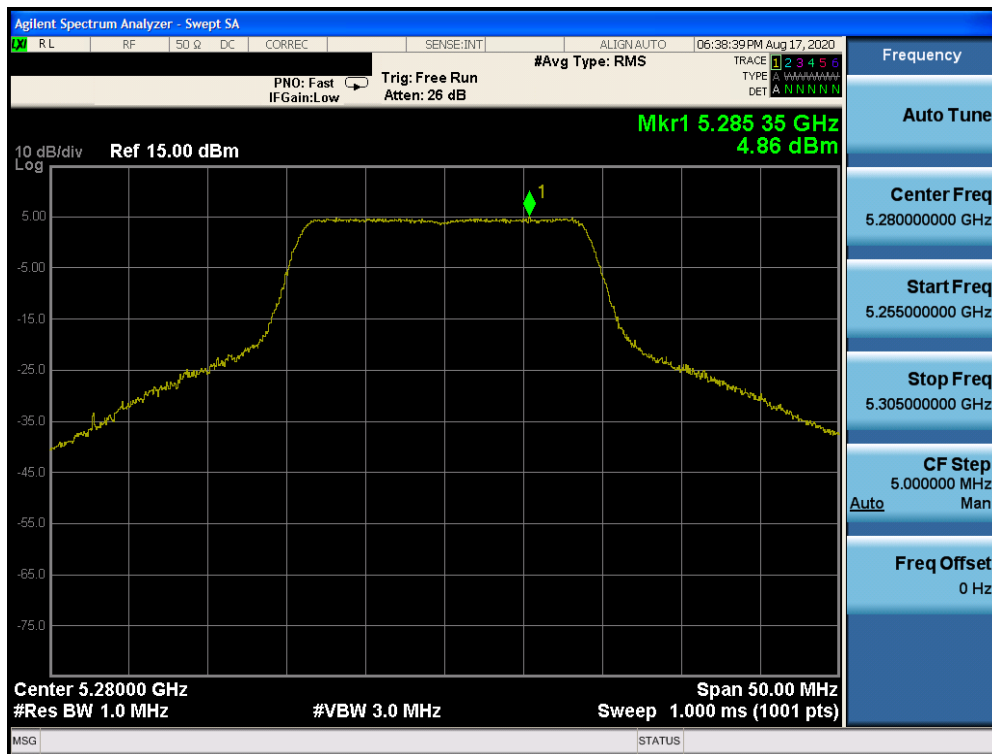


Plot 7-17. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 30 of 66

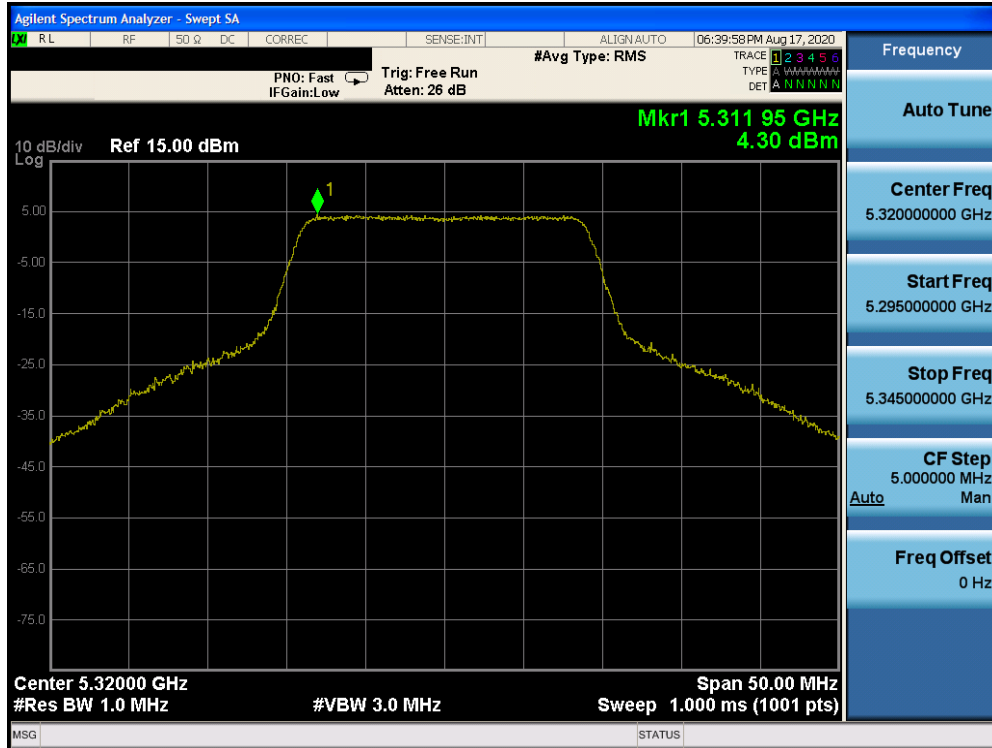


Plot 7-18. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

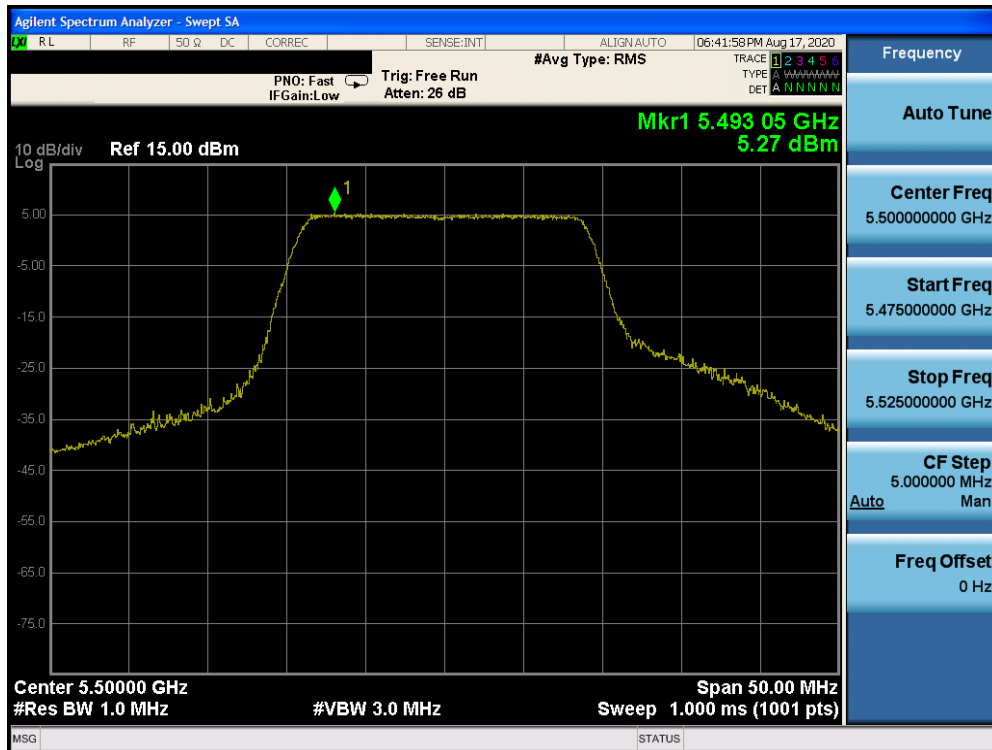


Plot 7-19. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 31 of 66

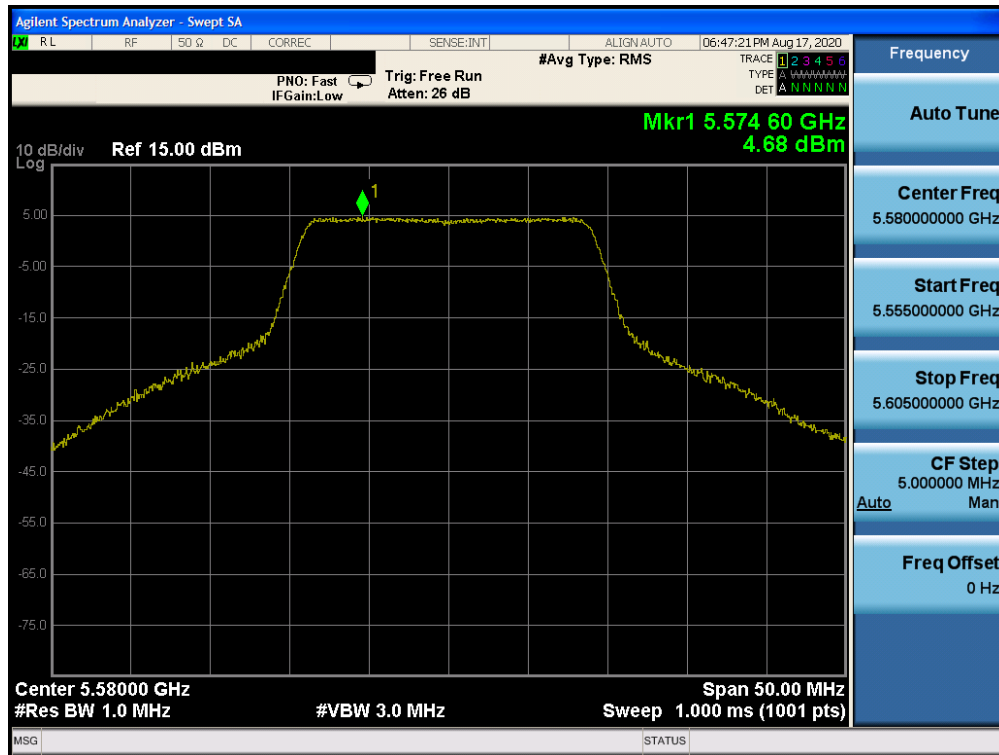

Plot 7-20. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 116)

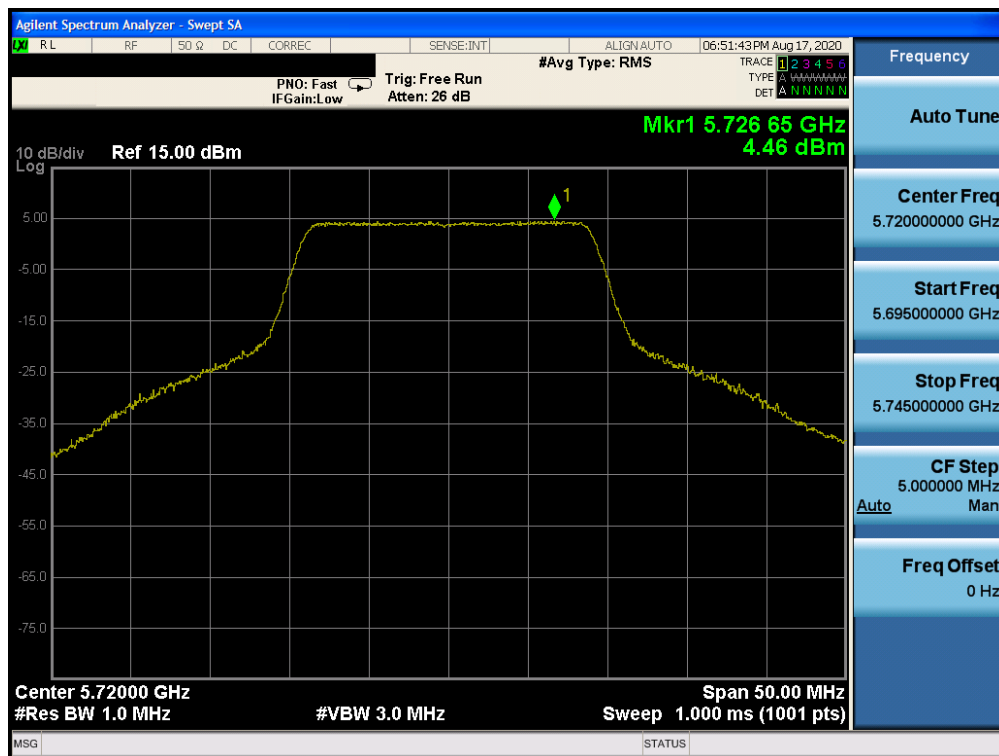


Plot 7-21. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 32 of 66


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm/500kHz]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5745	149	n (20MHz)	6.5/7.2 (MCS0)	4.03	30.0	-25.97
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	3.52	30.0	-26.48
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	3.53	30.0	-26.47

Table 7-8. Band 3 Conducted Power Spectral Density Measurements

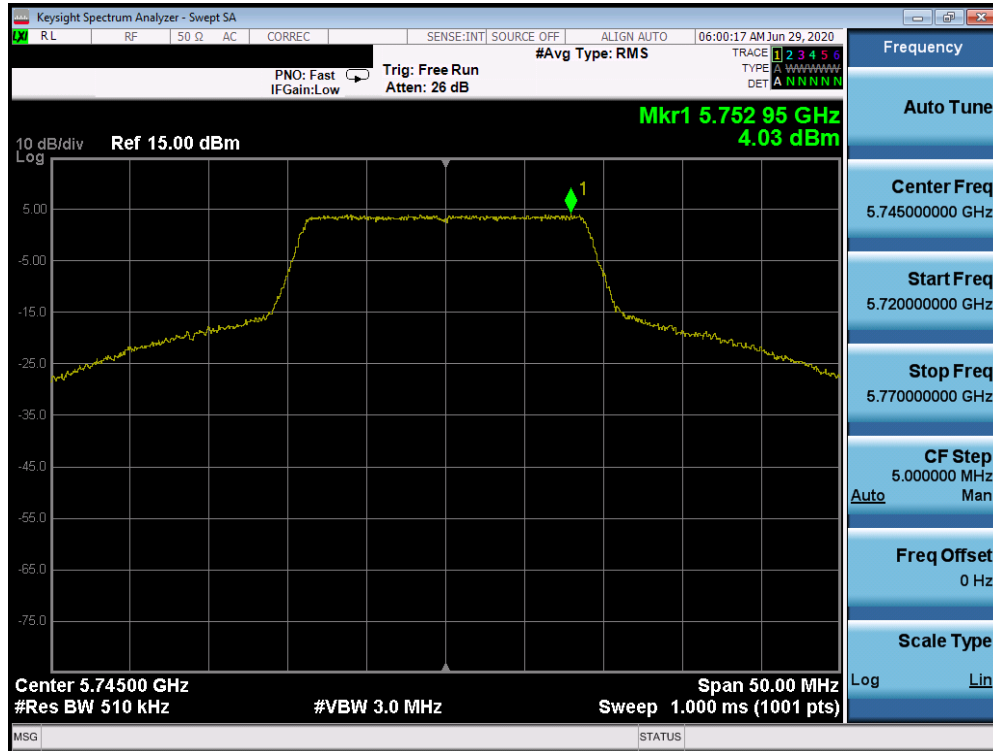


Plot 7-22. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 33 of 66

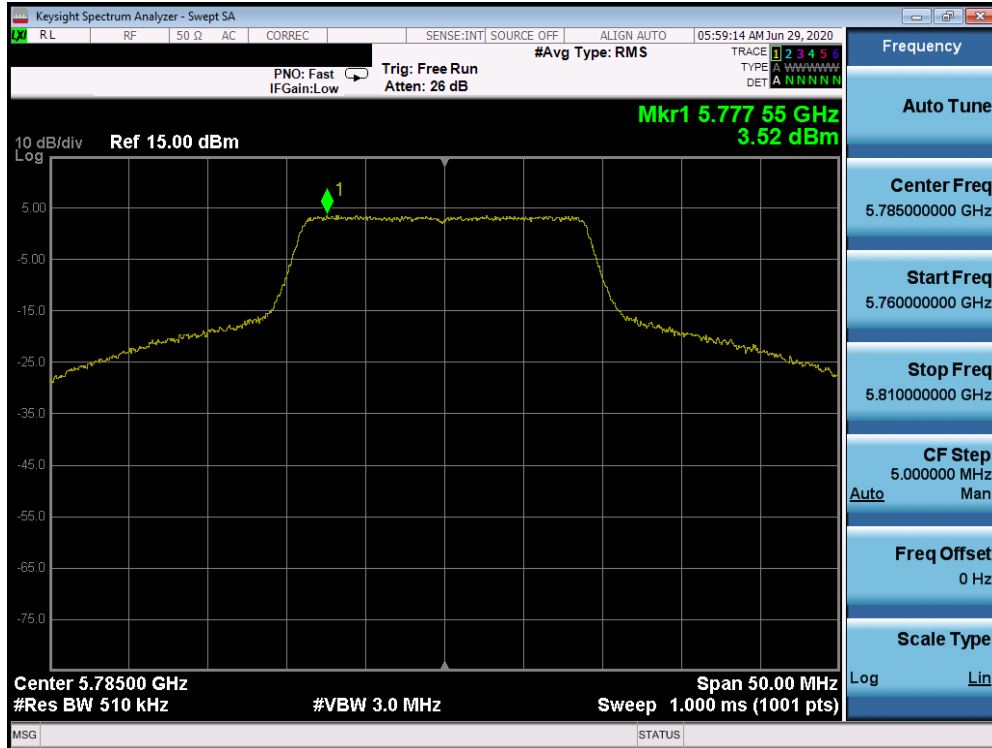

Plot 7-23. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

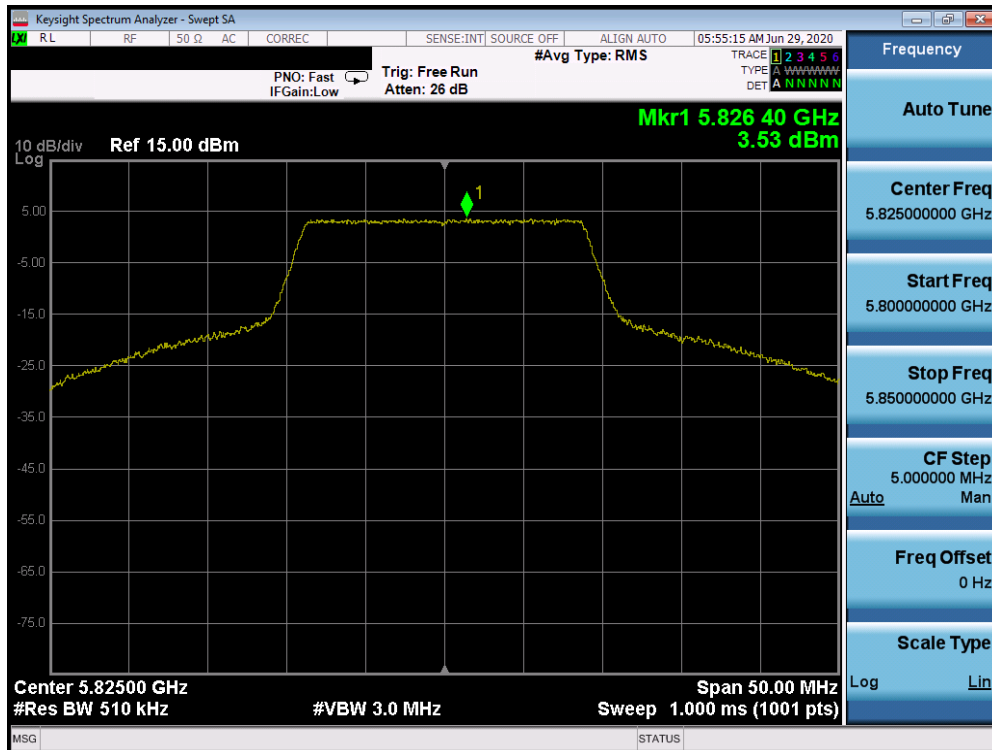

Plot 7-24. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 34 of 66

7.6 Radiated Spurious Emissions – Above 1GHz

§15.407(b) §15.205 §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-9 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-9. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5
KDB 789033 D02 v02r01 – Section G

Test Settings

Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 35 of 66

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

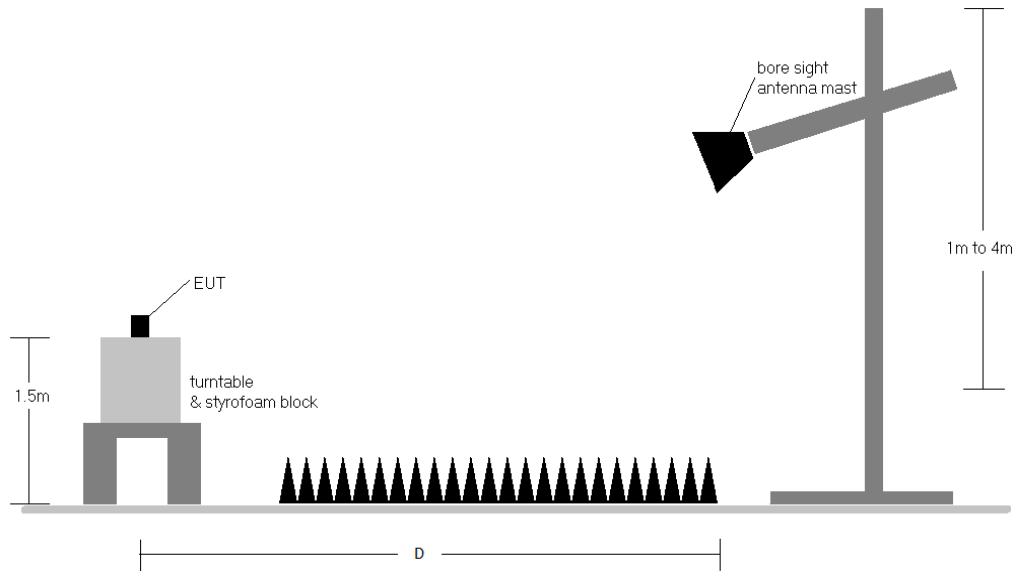


Figure 7-5. Radiated Measurement Setup

FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 36 of 66

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-9.
2. All spurious emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-9. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dBμV/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. “D” is 3 meter distance for 1GHz – 18GHz measurements and 1 meter distance for above 18GHz measurements.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The “-” shown in the following RSE tables are used to denote a noise floor measurement.
9. The intermodulation emissions were tested against the less stringent limit across all rule parts applicable to simultaneous transmitters.
10. For simultaneous transmission measurements, Trace mode = Max Hold was used for pulsed emissions.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level [dBμV/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] - Preamp Gain [dB]
- Margin [dB] = Field Strength Level [dBμV/m] – Limit [dBμV/m]

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in Section 7.6 was calculated using the formula:
 Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 37 of 66


7.6.1 Radiated Spurious Emission Measurements

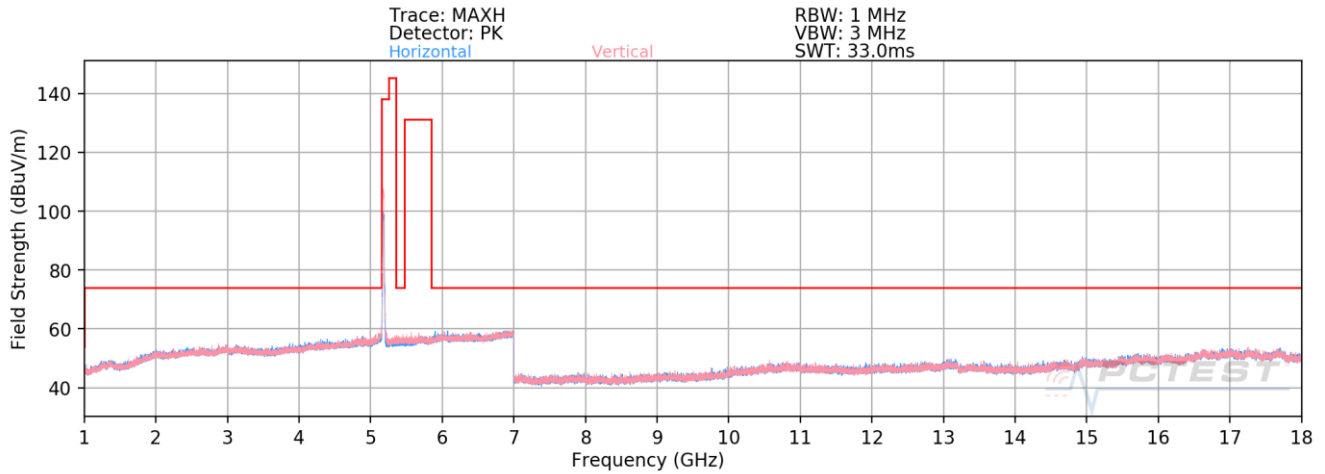

Plot 7-25. Radiated Spurious Emissions above 1GHz (802.11n – UNII 1 Ch. 36)

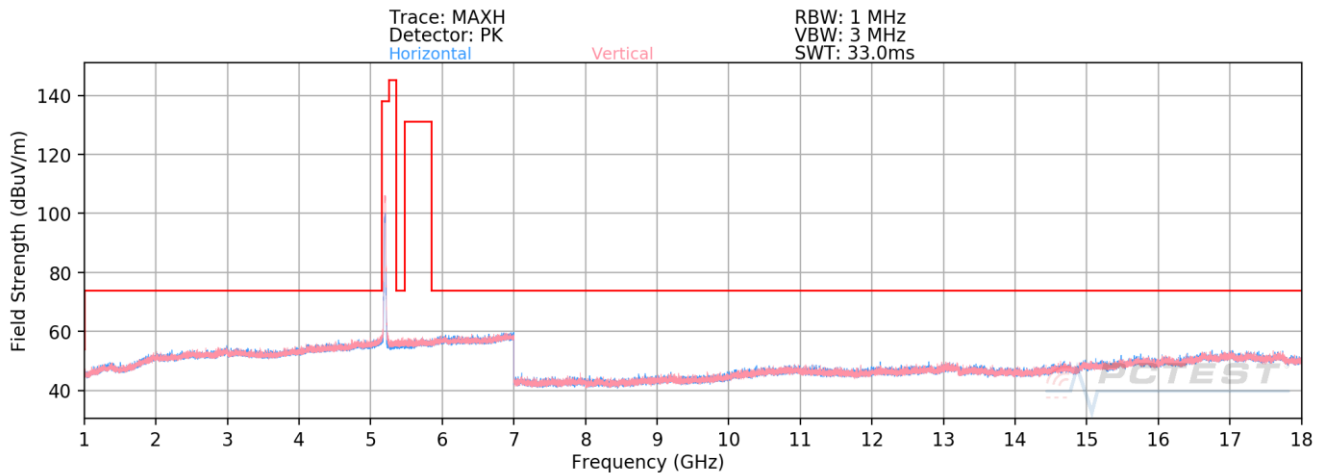


Plot 7-26. Radiated Spurious Emissions above 1GHz (802.11n – UNII 1 Ch. 40)

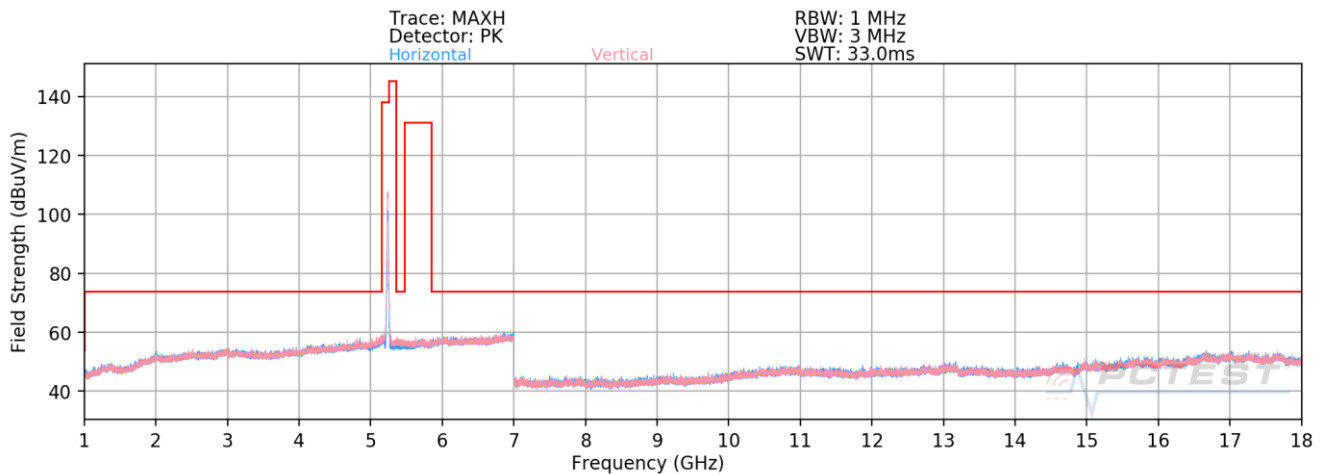


Plot 7-27. Radiated Spurious Emissions above 1GHz (802.11n – UNII 1 Ch. 48)


FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 38 of 66

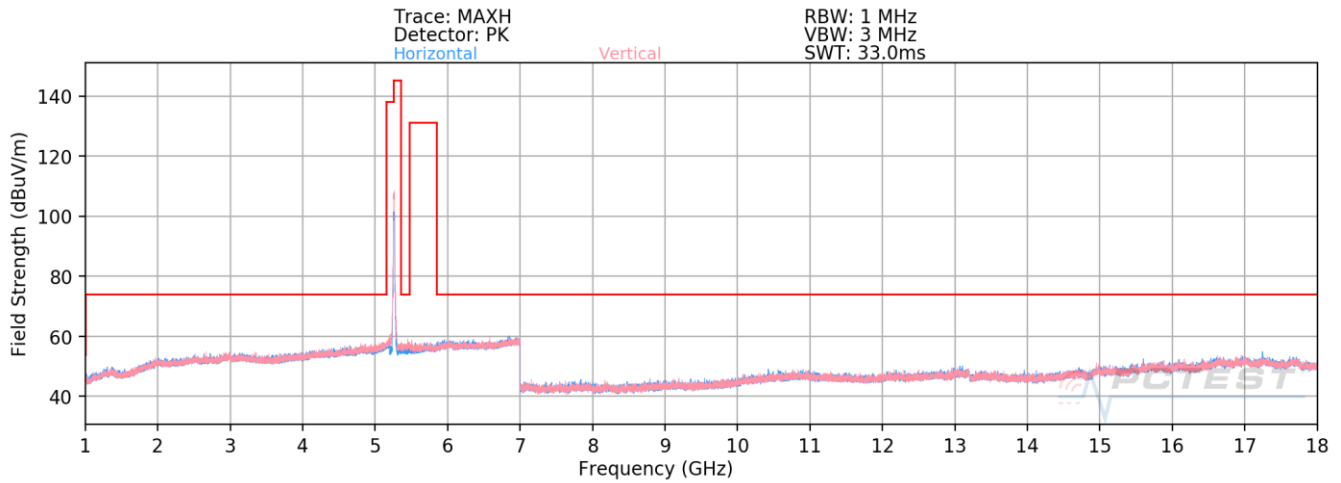

Plot 7-28. Radiated Spurious Emissions above 1GHz (802.11n – UNII 2A Ch. 52)

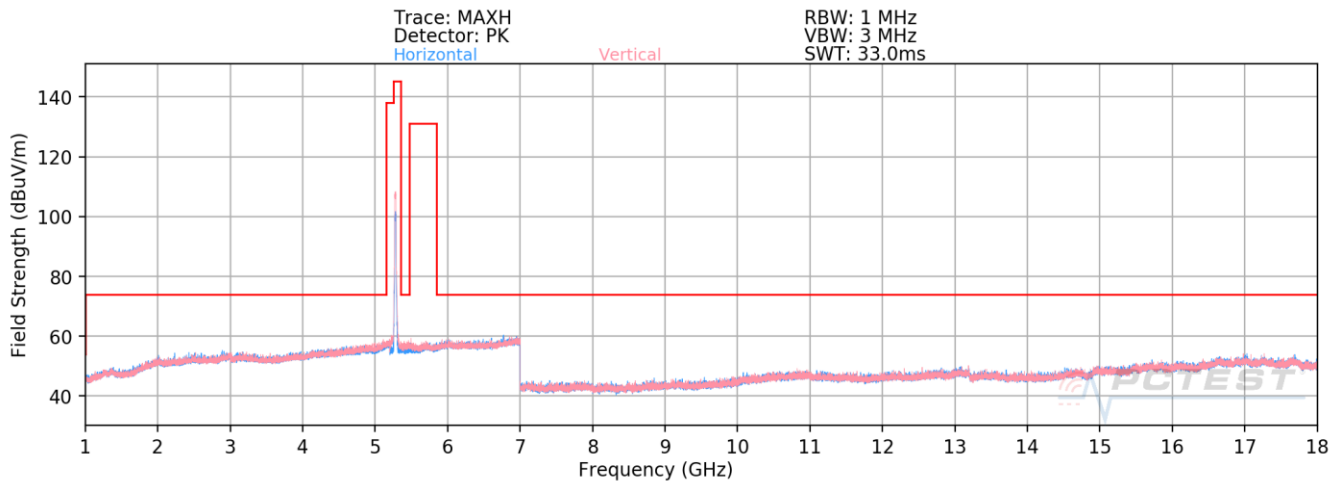


Plot 7-29. Radiated Spurious Emissions above 1GHz (802.11n – UNII 2A Ch. 56)

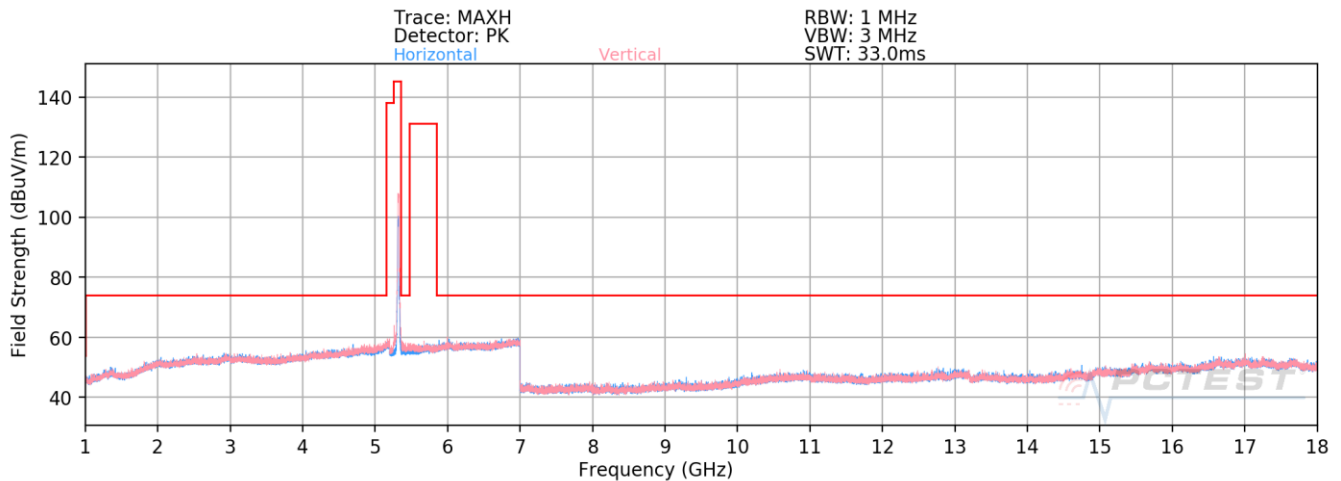


Plot 7-30. Radiated Spurious Emissions above 1GHz (802.11n – UNII 2A Ch. 64)


FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 39 of 66

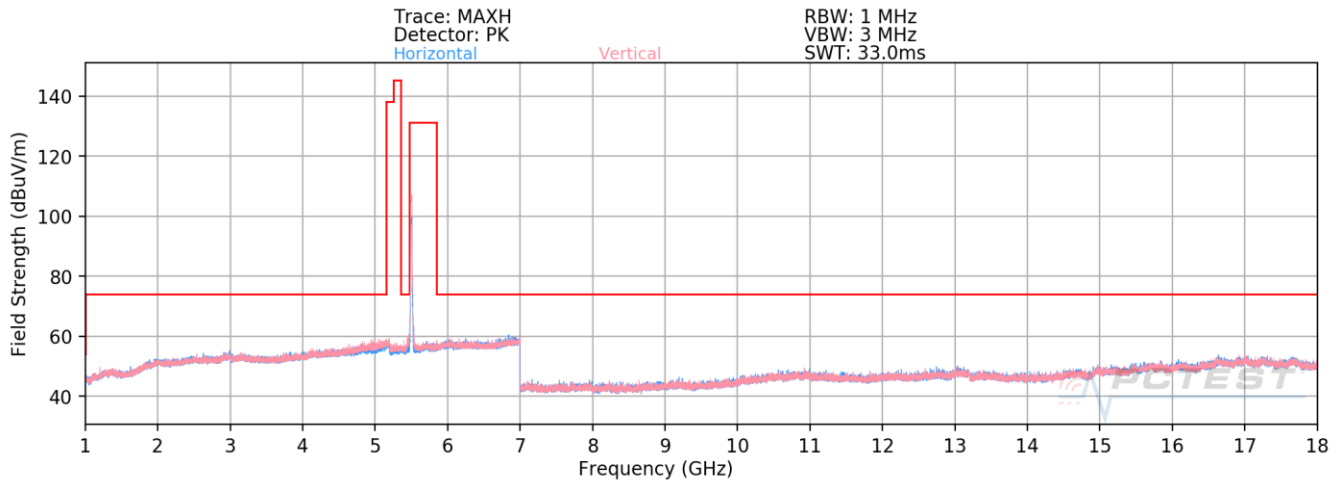

Plot 7-31. Radiated Spurious Emissions above 1GHz (802.11n – UNII 2C Ch. 100)

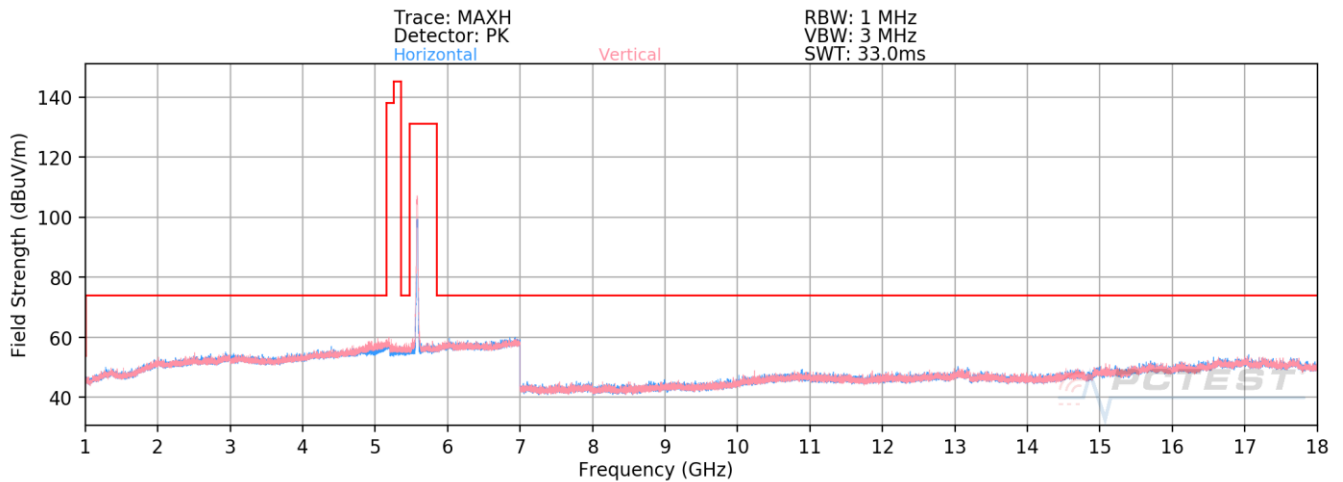


Plot 7-32. Radiated Spurious Emissions above 1GHz (802.11n – UNII 2C Ch. 116)

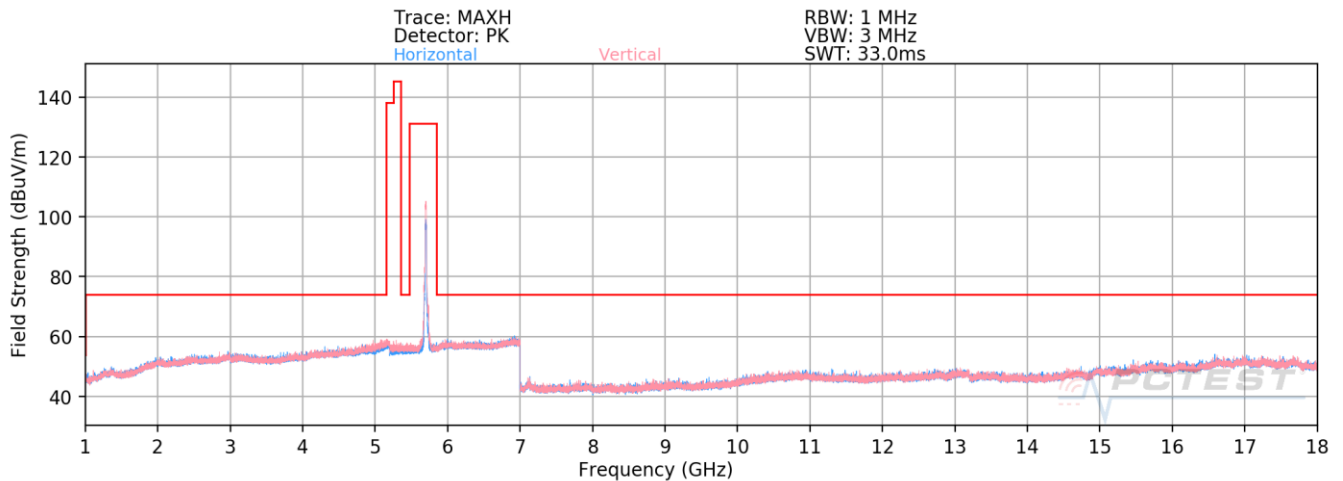


Plot 7-33. Radiated Spurious Emissions above 1GHz (802.11n – UNII 2C Ch. 144)


FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 40 of 66

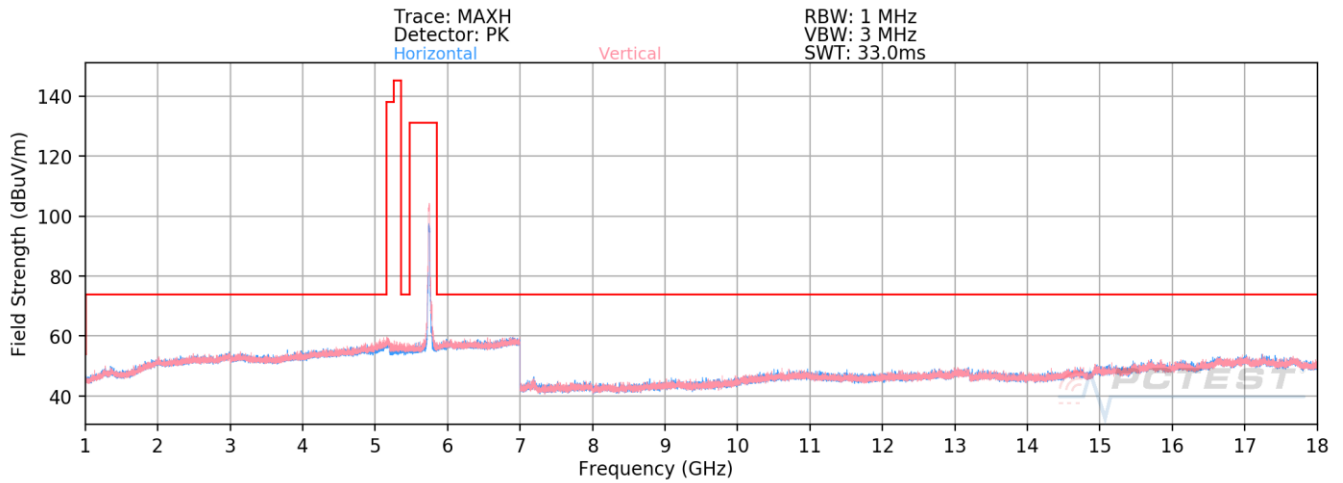

Plot 7-34. Radiated Spurious Emissions above 1GHz (802.11n – UNII 3 Ch. 149)

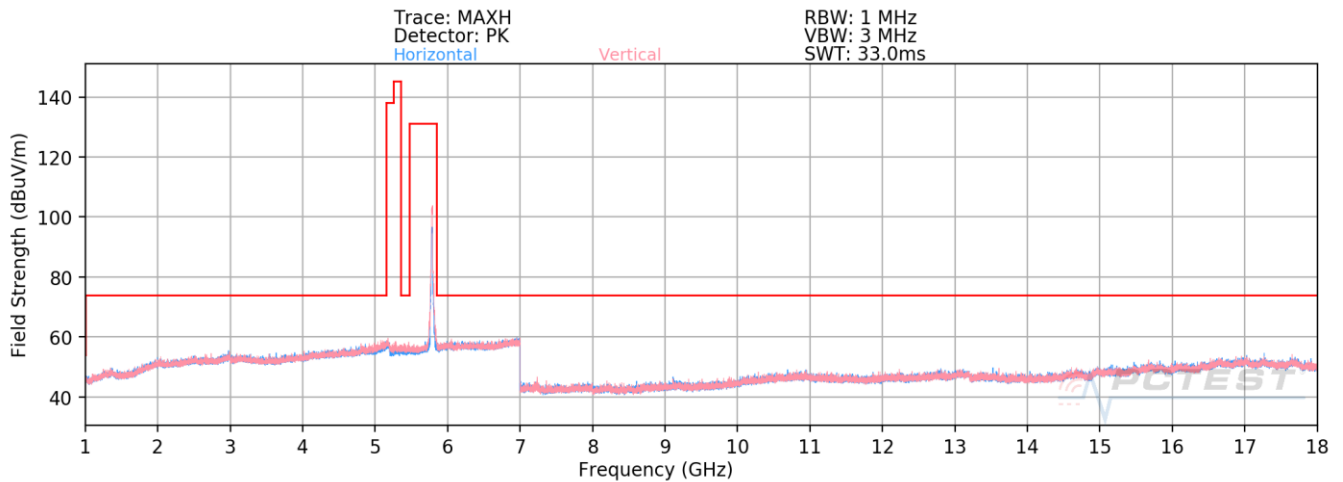


Plot 7-35. Radiated Spurious Emissions above 1GHz (802.11n – UNII 3 Ch. 157)

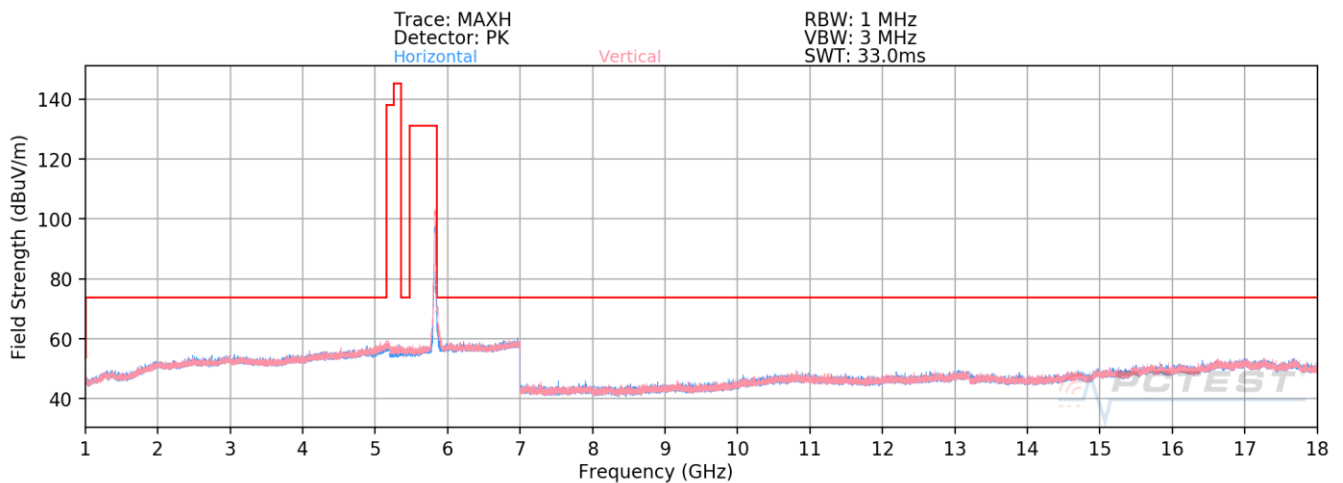

Plot 7-36. Radiated Spurious Emissions above 1GHz (802.11n – UNII 3 Ch. 165)


FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 41 of 66

Radiated Spurious Emission Measurements (Above 18GHz)

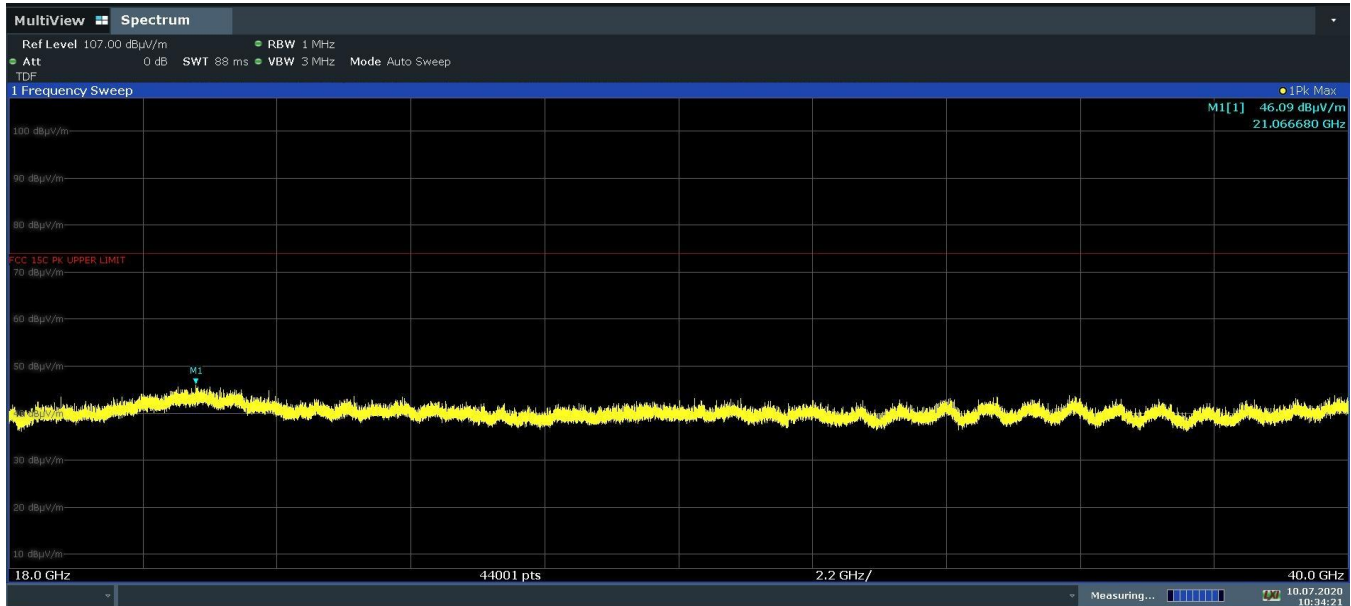

10:34:22 10.07.2020

Plot 7-37. Radiated Spurious Emissions 18GHz - 40GHz – H Polarity (802.11n Ch 116)

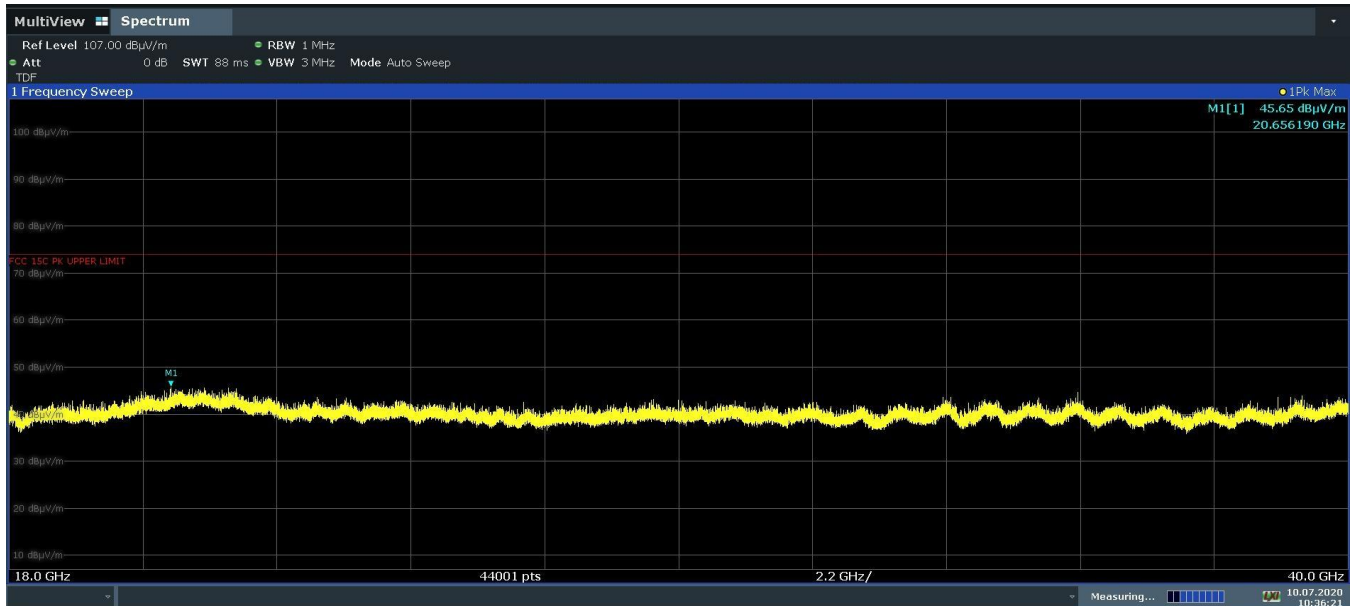

10:36:22 10.07.2020

Plot 7-38. Radiated Spurious Emissions 18GHz - 40GHz – V Polarity (802.11n Ch 116)

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 42 of 66

© 2020 PCTEST

V 10.1 02/01/2020

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Radiated Spurious Emission Measurements

§15.407(b) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5180MHz
Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
6482.00	Peak	V	237	220	-65.60	18.75	60.15	68.20	-8.05
10360.00	Peak	V	-	-	-75.54	13.19	44.65	68.20	-23.55
* 15540.00	Average	V	-	-	-86.28	16.93	37.65	53.98	-16.33
* 15540.00	Peak	V	-	-	-76.73	16.93	47.20	73.98	-26.78

Table 7-10. Radiated Measurements

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5200MHz
Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
6508.00	Peak	V	306	49	-64.81	18.89	61.08	68.20	-7.12
10400.00	Peak	V	-	-	-75.83	13.11	44.28	68.20	-23.92
* 15600.00	Average	V	-	-	-86.46	16.90	37.44	53.98	-16.54
* 15600.00	Peak	V	-	-	-77.09	16.90	46.81	73.98	-27.17

Table 7-11. Radiated Measurements

FCC ID: BCG-A2294	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 43 of 66

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
6557.00	Peak	V	103	76	-64.39	19.23	61.84	68.20	-6.36
10480.00	Peak	V	-	-	-75.73	13.36	44.63	68.20	-23.57
* 15720.00	Average	V	-	-	-86.60	18.17	38.57	53.98	-15.41
* 15720.00	Peak	V	-	-	-76.22	18.17	48.95	73.98	-25.03

Table 7-12. Radiated Measurements

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5260MHz
Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
6582.00	Peak	V	104	216	-65.23	18.65	60.42	68.20	-7.78
10520.00	Peak	V	-	-	-75.55	13.10	44.55	68.20	-23.65
* 15780.00	Average	V	-	-	-86.01	17.92	38.91	53.98	-15.07
* 15780.00	Peak	V	-	-	-76.61	17.92	48.31	73.98	-25.67

Table 7-13. Radiated Measurements

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 44 of 66

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5280MHz
Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
6607.00	Peak	V	281	223	-63.88	18.68	61.80	68.20	-6.40
10560.00	Peak	V	-	-	-74.77	13.64	45.87	68.20	-22.33
* 15840.00	Average	V	-	-	-86.56	18.40	38.84	53.98	-15.14
* 15840.00	Peak	V	-	-	-76.01	18.40	49.39	73.98	-24.59

Table 7-14. Radiated Measurements

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5320MHz
Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
6658.00	Peak	V	278	203	-63.10	18.79	62.69	68.20	-5.51
* 10640.00	Average	V	-	-	-86.16	13.32	34.16	53.98	-19.82
* 10640.00	Peak	V	-	-	-76.15	13.32	44.17	73.98	-29.81
* 15960.00	Average	V	-	-	-86.92	17.67	37.75	53.98	-16.23
* 15960.00	Peak	V	-	-	-76.48	17.67	48.19	73.98	-25.79

Table 7-15. Radiated Measurements

FCC ID: BCG-A2294	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 45 of 66

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
6883.00	Peak	V	287	227	-63.81	19.04	62.23	68.20	-5.97
* 11000.00	Average	V	-	-	-86.12	13.75	34.63	53.98	-19.35
* 11000.00	Peak	V	-	-	-76.34	13.75	44.41	73.98	-29.57
16500.00	Peak	V	-	-	-78.33	18.62	47.29	68.20	-20.91

Table 7-16. Radiated Measurements

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5580MHz
Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 5017.00	Average	V	109	219	-74.32	15.95	48.63	53.98	-5.35
* 5017.00	Peak	V	109	219	-63.02	15.95	59.93	73.98	-14.05
* 5369.00	Average	V	117	212	-76.70	16.62	46.92	53.98	-7.06
* 5369.00	Peak	V	117	212	-64.95	16.62	58.67	73.98	-15.31
6983.00	Peak	V	261	222	-63.19	19.27	63.08	68.20	-5.12
* 11160.00	Average	V	-	-	-86.40	13.78	34.38	53.98	-19.60
* 11160.00	Peak	V	-	-	-76.25	13.78	44.53	73.98	-29.45
16740.00	Peak	V	-	-	-77.30	19.34	49.04	68.20	-19.16

Table 7-17. Radiated Measurements

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 46 of 66

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5720
Channel: 144

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	5019.00	Average	V	112	217	-75.41	15.95	47.54	53.98	-6.44
*	5019.00	Peak	V	112	217	-63.66	15.95	59.29	73.98	-14.69
*	5351.00	Average	V	126	208	-76.62	16.79	47.17	53.98	-6.81
*	5351.00	Peak	V	126	208	-64.42	16.79	59.37	73.98	-14.61
	7133.00	Peak	V	251	212	-63.09	14.75	58.66	68.20	-9.54
*	11440.00	Average	V	-	-	-86.80	13.90	34.10	53.98	-19.88
*	11440.00	Peak	V	-	-	-75.94	13.90	44.96	73.98	-29.02
	17160.00	Peak	V	-	-	-78.27	18.99	47.72	68.20	-20.48

Table 7-18. Radiated Measurements

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 47 of 66

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	5032.00	Average	V	103	203	-75.19	15.96	47.77	53.98	-6.21
*	5032.00	Peak	V	103	203	-62.53	15.96	60.43	73.98	-13.55
*	5381.00	Average	V	107	200	-75.25	16.47	48.22	53.98	-5.76
*	5381.00	Peak	V	107	200	-64.09	16.47	59.38	73.98	-14.60
	7187.00	Peak	V	337	216	-64.34	8.60	51.26	68.20	-16.94
	11490.00	Average	V	-	-	-86.64	16.43	36.79	53.98	-17.19
*	11490.00	Peak	V	-	-	-73.96	16.43	49.47	73.98	-24.51
	17235.00	Peak	V	-	-	-74.61	22.05	54.44	68.20	-13.76

Table 7-19. Radiated Measurements

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 48 of 66

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5785MHz
Channel: 157

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	5129.00	Average	V	104	221	-75.17	16.29	48.12	53.98	-5.86
*	5129.00	Peak	V	104	221	-63.17	16.29	60.12	73.98	-13.86
*	5357.00	Average	V	149	200	-76.93	16.72	46.79	53.98	-7.19
*	5357.00	Peak	V	149	200	-65.04	16.72	58.68	73.98	-15.30
	7236.00	Peak	V	288	227	-63.75	8.61	51.86	68.20	-16.34
*	11570.00	Average	V	-	-	-86.91	16.26	36.35	53.98	-17.63
*	11570.00	Peak	V	-	-	-74.64	16.26	48.62	73.98	-25.36
	17355.00	Peak	V	-	-	-77.59	22.82	52.23	68.20	-15.97

Table 7-20. Radiated Measurements

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 49 of 66

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	5127.00	Average	V	159	198	-77.83	16.28	45.45	53.98	-8.53
*	5127.00	Peak	V	159	198	-63.52	16.28	59.76	73.98	-14.22
*	5352.00	Average	V	119	213	-76.24	16.79	47.55	53.98	-6.43
*	5352.00	Peak	V	119	213	-64.56	16.79	59.23	73.98	-14.75
	7337.00	Peak	V	118	207	-66.34	9.14	49.80	68.20	-18.40
*	11650.00	Average	V	-	-	-87.12	16.71	36.59	53.98	-17.39
*	11650.00	Peak	V	-	-	-75.05	16.71	48.66	73.98	-25.32
	17475.00	Peak	V	-	-	-75.59	22.03	53.44	68.20	-14.76

Table 7-21. Radiated Measurements


FCC ID: BCG-A2294	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 50 of 66

7.6.2 Simultaneous Tx Radiated Spurious Emission Measurements


§15.407(b) §15.247(d) §15.205 §15.209 & §27.53(m); RSS-Gen [8.9] & RSS-199 [4.5]

Description	Bluetooth	LTE (Band 41)	UNII
Antenna	FCM	FCM	FCM
Channel	39	39750	36
Operating Frequency (MHz)	2441	2506	5180
Mode	GFSK ePA	QPSK/1RB/20MHz	11n

Table 7-22. Worst Case Simultaneous Transmission Configuration

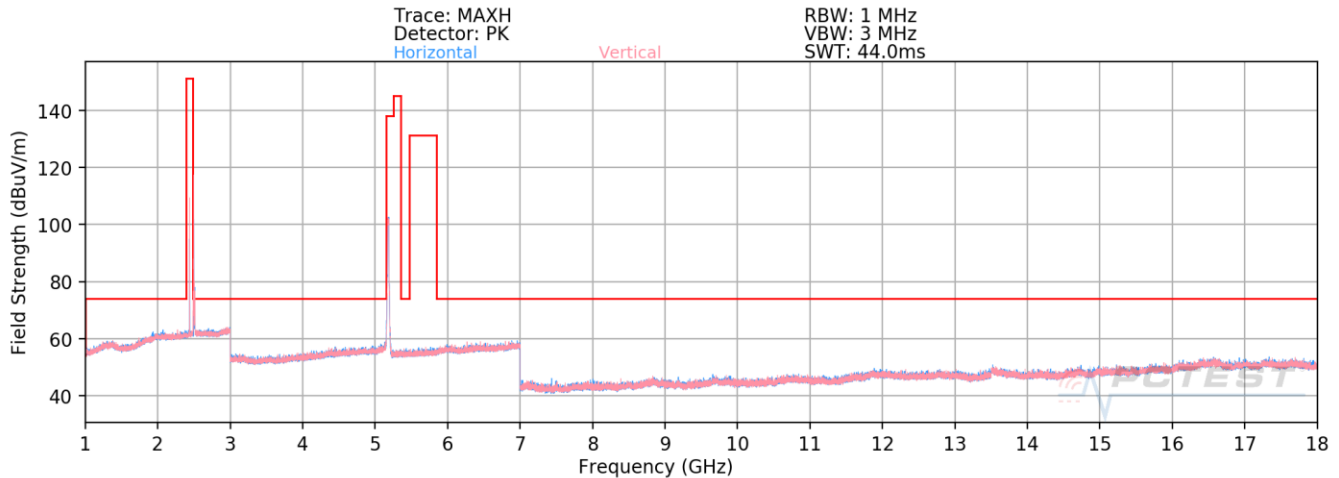


Plot 7-39. Radiated Spurious Emissions – Simultaneous Transmission 1GHz - 18GHz

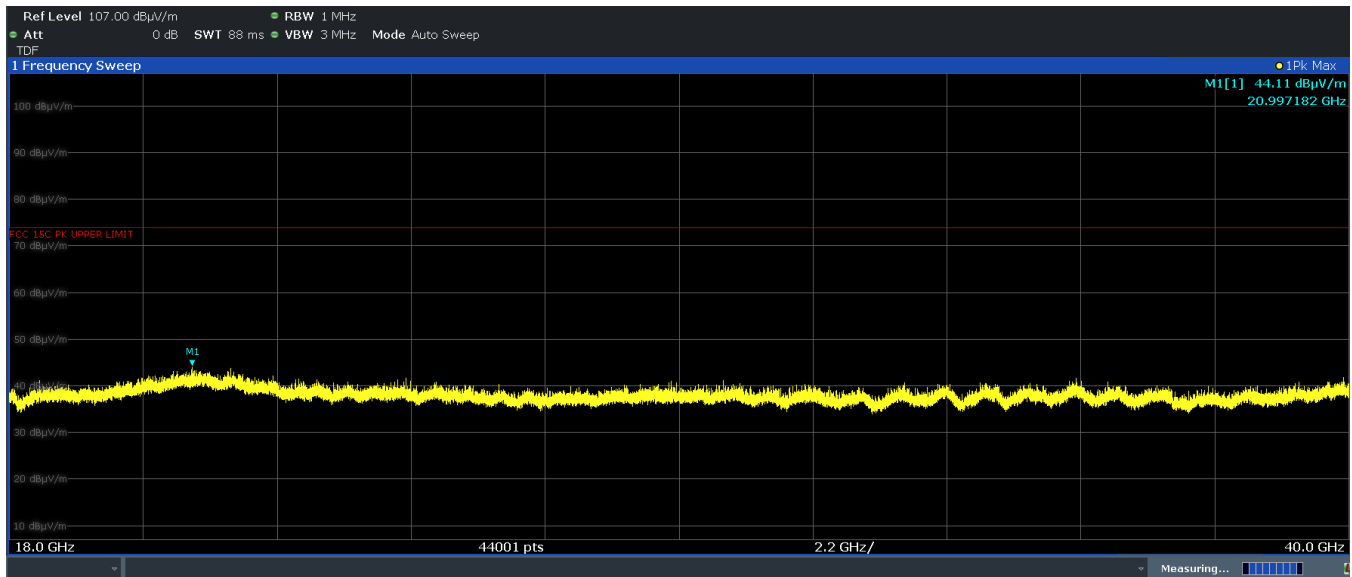

Plot 7-40. Radiated Spurious Emissions – Simultaneous Transmission 18GHz – 40GHz Pol H

FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 51 of 66

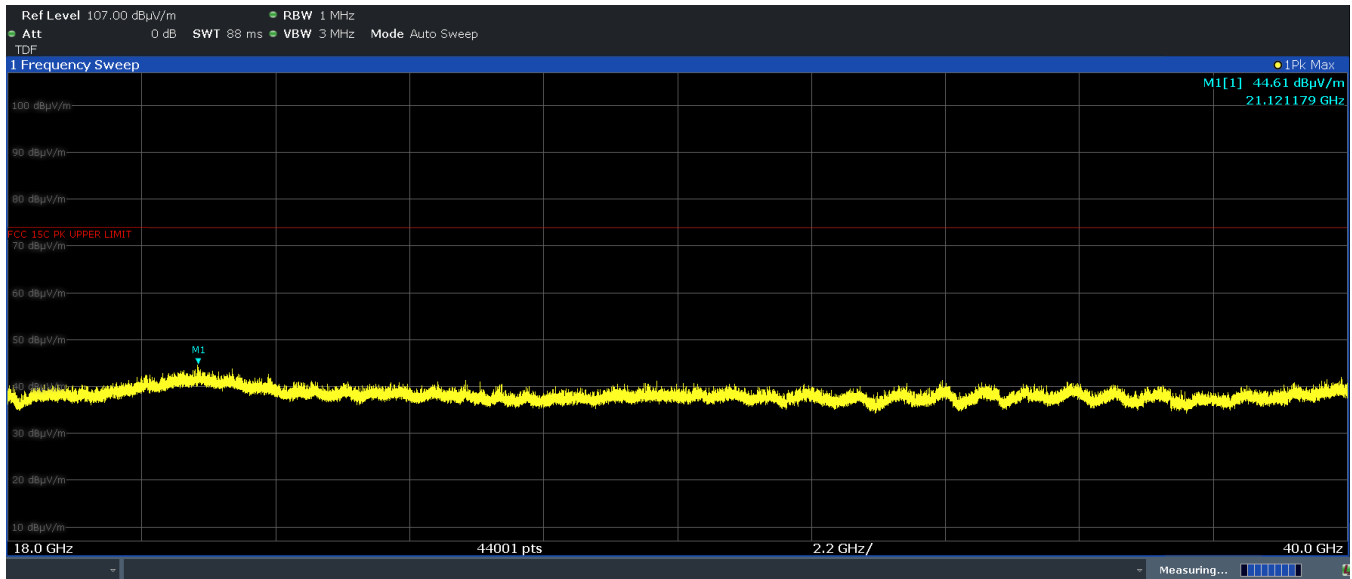

Plot 7-41. Radiated Spurious Emissions – Simultaneous Transmission 18GHz – 40GHz Pol V

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4882.00	Avg	V	-	-	-80.04	16.15	43.11	53.98	-10.86
4882.00	Peak	V	-	-	-68.30	16.15	54.85	73.98	-19.12
7323.00	Avg	V	-	-	-83.73	13.56	36.83	53.98	-17.15
7323.00	Peak	V	-	-	-72.61	13.56	47.95	73.98	-26.03
12205.00	Avg	V	-	-	-84.67	19.77	42.10	53.98	-11.88
12205.00	Peak	V	-	-	-73.03	19.77	53.74	73.98	-20.24
10360.00	Avg	V	-	-	-85.97	17.80	38.83	53.98	-35.15
10360.00	Peak	V	-	-	-74.11	17.80	50.69	73.98	-23.29
15540.00	Avg	V	-	-	-86.48	22.33	42.85	53.98	-31.13
15540.00	Peak	V	-	-	-75.00	22.33	54.33	73.98	-19.65

Table 7-23. BT and UNII Harmonics Emissions Measurement in Simultaneous Transmission Mode

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5012.00	Avg	V	-	-	-52.89	10.02	-42.87	-25.0	-17.87
7518.00	Avg	V	-	-	-58.27	12.00	-46.27	-25.0	-21.27
10024.00	Avg	V	-	-	-56.73	13.04	-43.69	-25.0	-18.69
12530.00	Avg	V	-	-	-57.65	13.22	-44.43	-25.0	-19.43
2385.00	Avg	V	139	167	-41.98	6.16	-35.82	-25.0	-10.82


Table 7-24. LTE Harmonics and Intermodulations Emissions Measurements in Simultaneous Transmission Mode

FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch		Page 52 of 66

7.6.3 Radiated Band Edge Measurements (20MHz BW)


§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

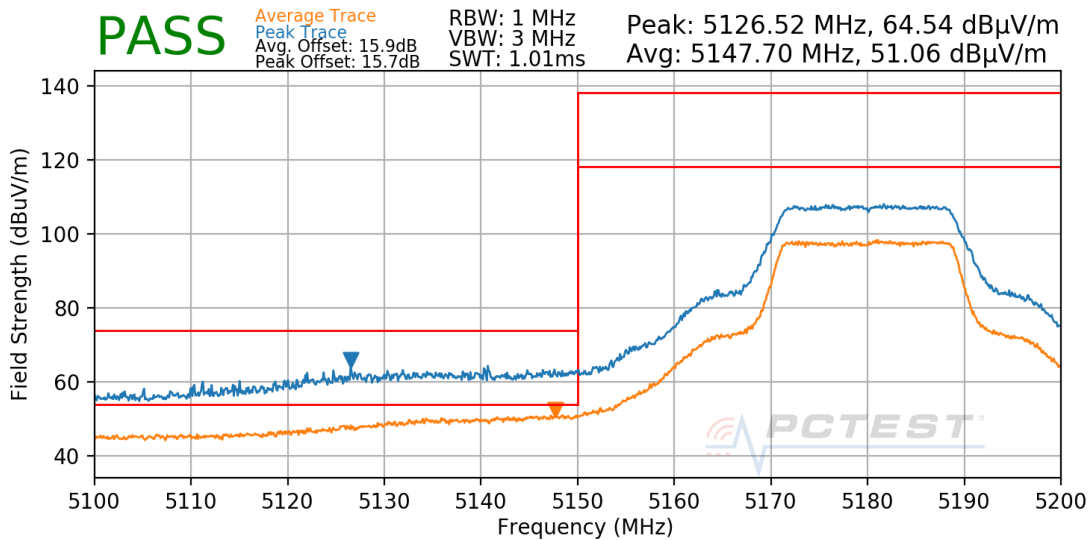

Plot 7-42. Radiated Lower Band Edge Plot (UNII Band 1)


Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5320MHz
Channel:	64

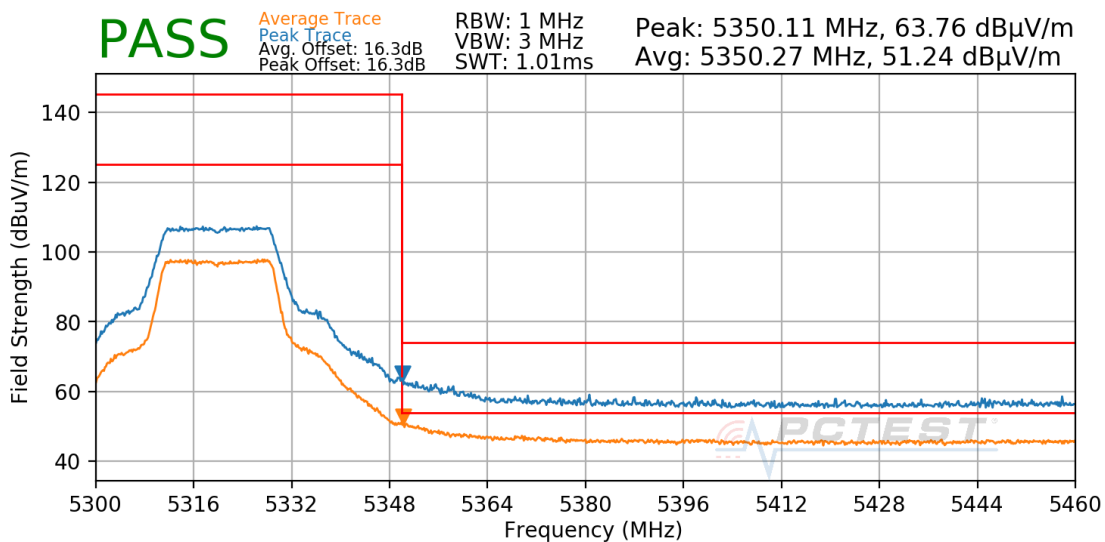

Plot 7-43. Radiated Upper Band Edge Plot (UNII Band 2A)


FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 53 of 66

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

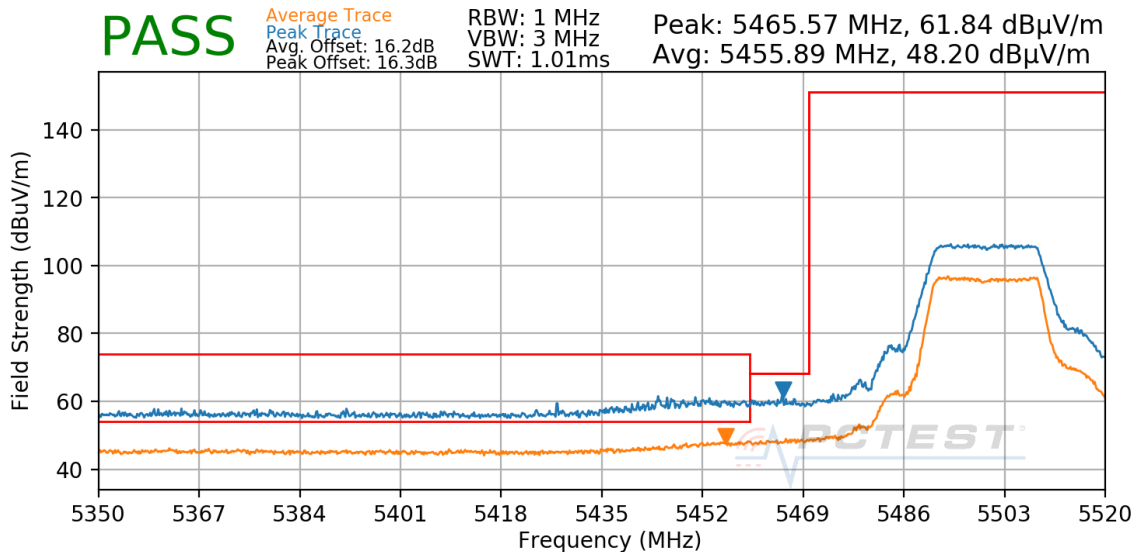

Plot 7-44. Radiated Lower Band Edge Plot (UNII Band 2C)


Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5680MHz
Channel: 136

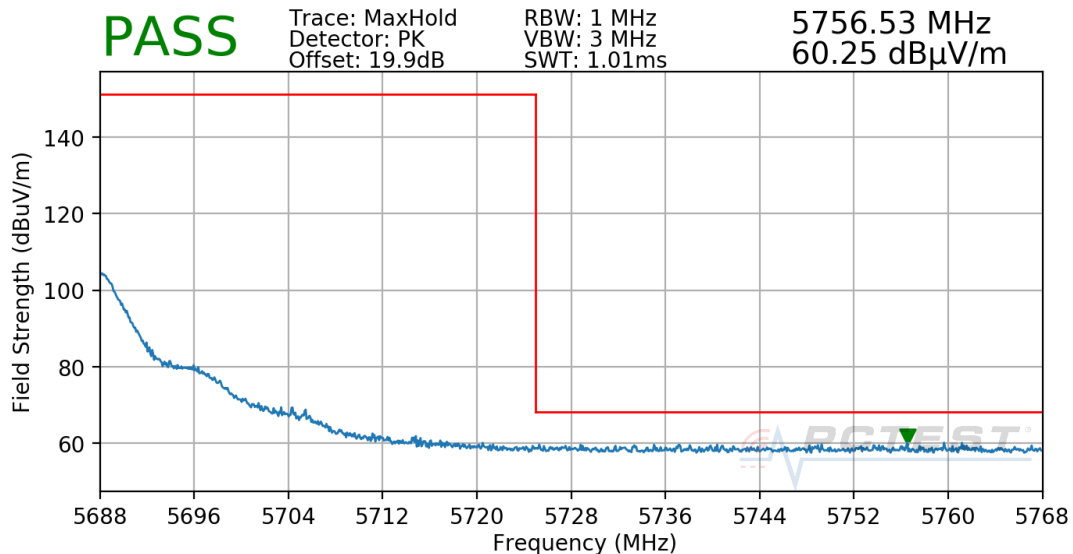

Plot 7-45. Radiated Upper Band Edge Plot (Peak - UNII Band 2C)


FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 54 of 66

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS7
Distance of Measurements: 3 Meters
Operating Frequency: 5700MHz
Channel: 140

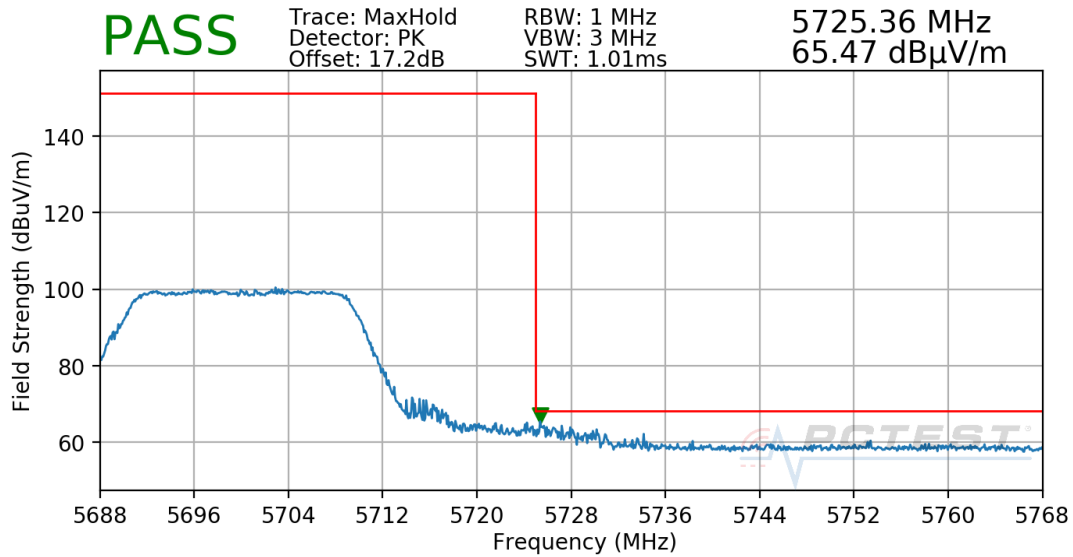

Plot 7-46. Radiated Upper Band Edge Plot (Peak – UNII Band 2C)


Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149

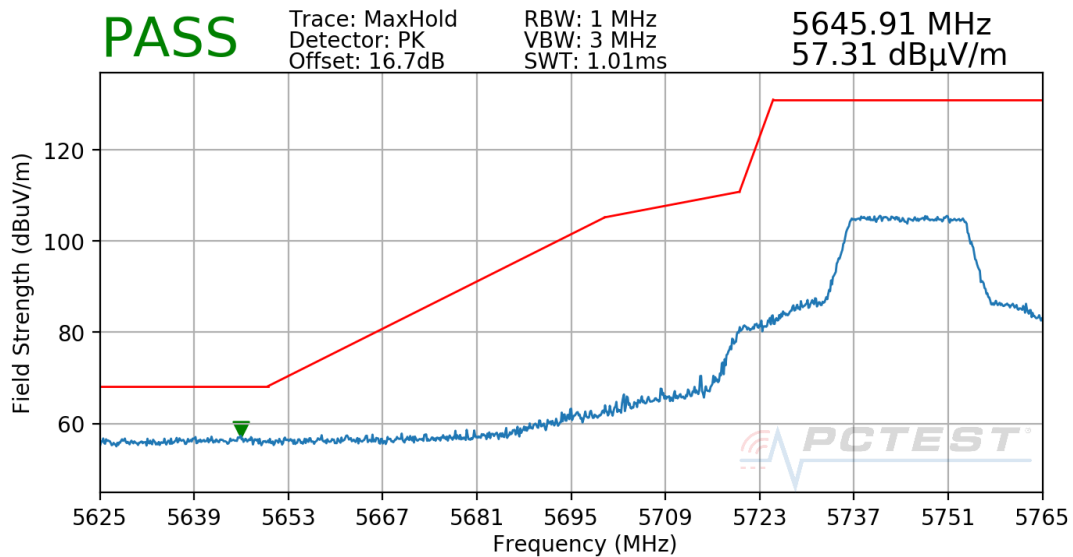

Plot 7-47. Radiated Lower Band Edge Plot (Peak – UNII Band 3)

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 55 of 66

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165

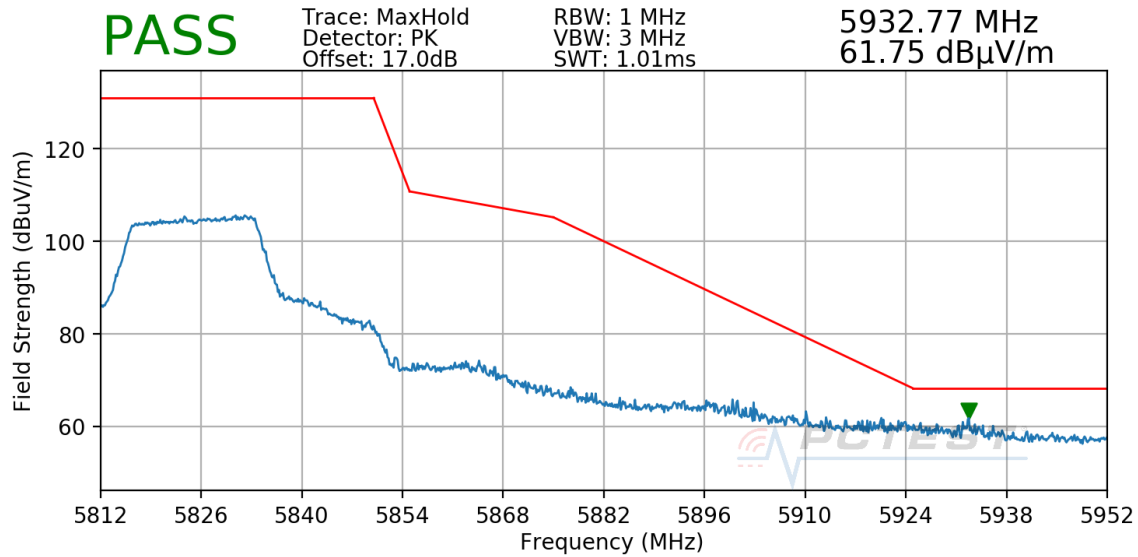

Plot 7-48. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 56 of 66

7.7 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-25 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-25. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 57 of 66

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

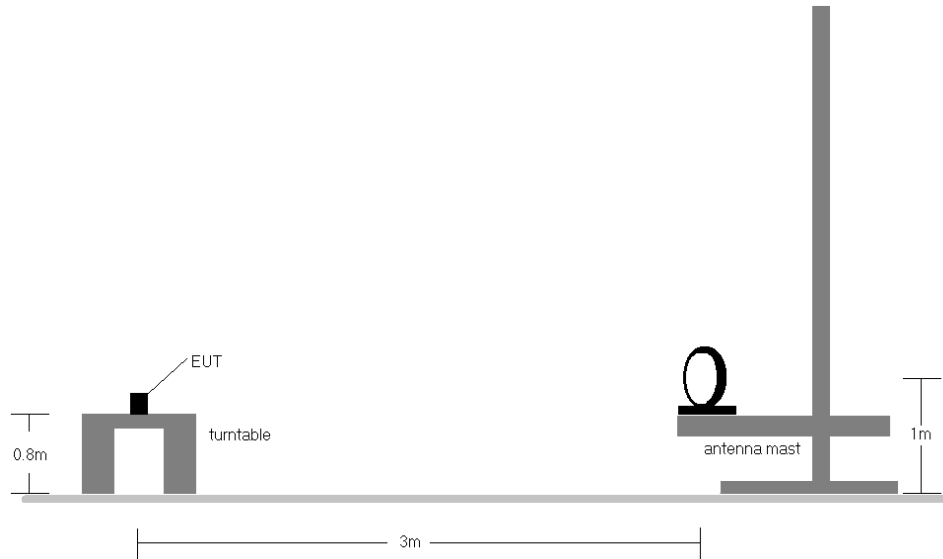


Figure 7-6. Radiated Test Setup < 30MHz

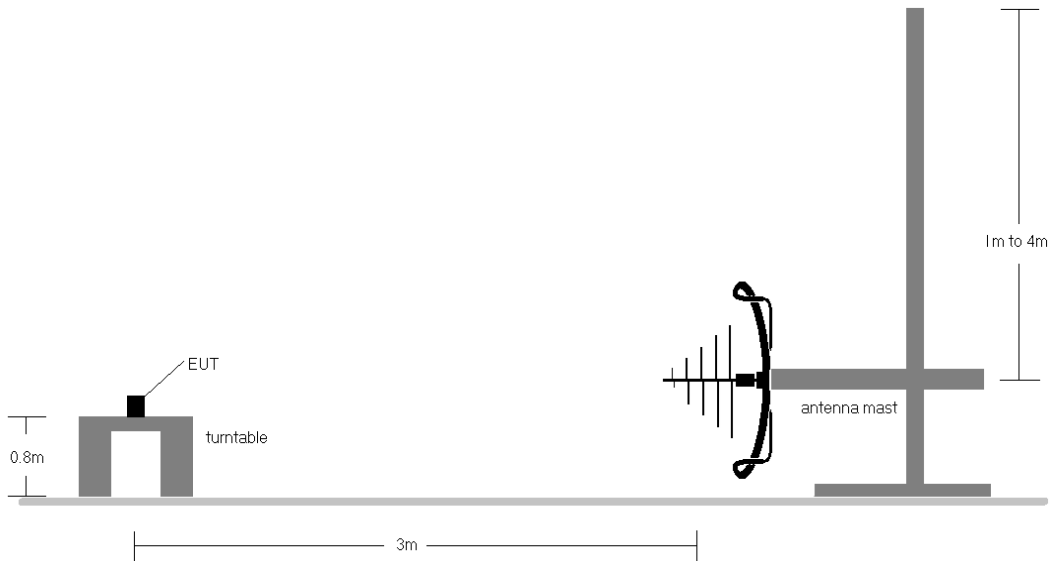


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 58 of 66

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-25.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The loop antenna was positioned in three orthogonal positions (X front, Y side, Z top). The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB cable with wireless charger
 - b. EUT powered by host PC via USB cable with wireless charger

Sample Calculations


Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]} - \text{Preamp Gain}_{[dB]}$
- $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 59 of 66

7.7.1 Radiated Spurious Emission Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

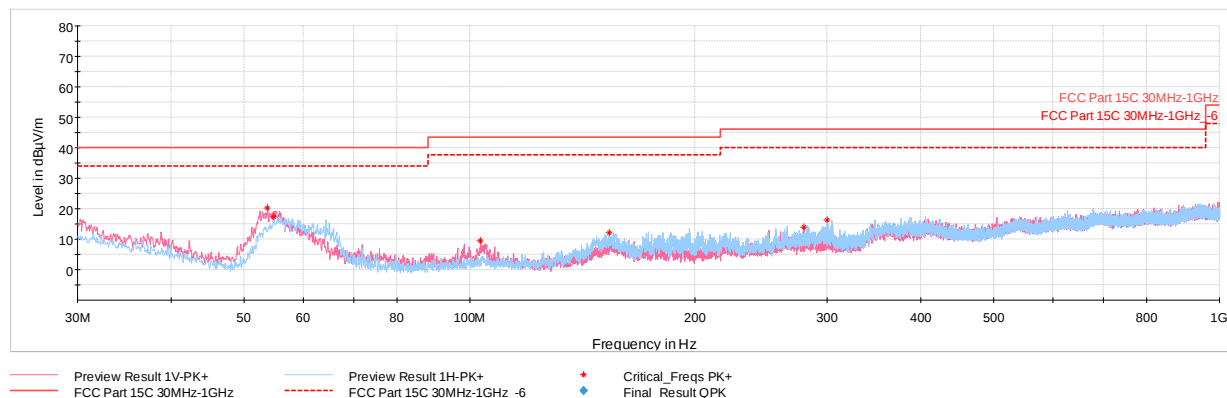

Plot 7-49. Radiated Spurious Plot below 1GHz (802.11n – UNII 2C Ch. 116) with laptop

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
53.77	Peak	V	100	93	-59.59	-27.24	20.17	40.00	-19.83
54.83	Peak	H	250	187	-62.35	-27.20	17.45	40.00	-22.55
103.38	Peak	V	100	93	-72.49	-24.95	9.56	43.52	-33.97
153.68	Peak	H	100	109	-73.32	-21.65	12.03	43.52	-31.49
279.34	Peak	V	250	151	-73.24	-19.70	14.06	46.02	-31.96
299.81	Peak	H	100	260	-71.79	-18.98	16.23	46.02	-29.80

Table 7-26. Radiated Spurious Emissions below 1GHz (802.11n – UNII 2C Ch. 116) with laptop


FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 60 of 66

7.7.2 Simultaneous Tx Radiated Spurious Emission Measurements (Below 1GHz)

§15.209 & §27.53(m); RSS-Gen [8.9] & RSS-199 [4.5]

Description	Bluetooth	LTE (Band 41)	UNII
Antenna	FCM	FCM	FCM
Channel	39	39750	36
Operating Frequency (MHz)	2441	2506	5180
Mode	GFSK ePA	QPSK/1RB/20MHz	11n

Table 7-27. Worst Case Simultaneous Transmission Configuration

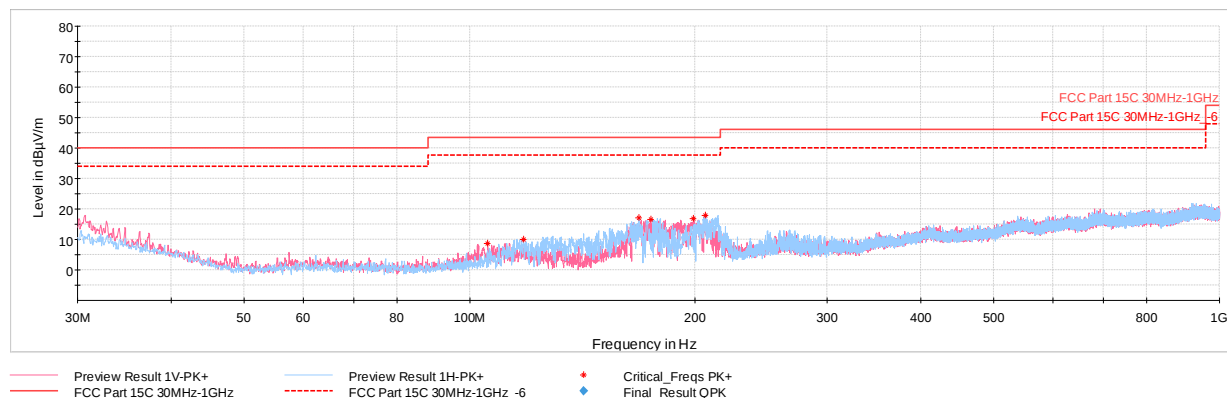

Plot 7-50. Radiated Spurious Emission – Simultaneous Transmission below 1GHz with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
105.71	Peak	V	100	8	-73.31	-24.88	8.81	43.52	-34.71
118.03	Peak	H	250	168	-71.25	-25.71	10.04	43.52	-33.48
168.18	Peak	H	100	113	-66.61	-23.34	17.05	43.52	-26.47
174.29	Peak	V	100	318	-67.83	-22.55	16.62	43.52	-26.90
198.97	Peak	V	100	92	-67.63	-22.42	16.95	43.52	-26.57
206.49	Peak	H	100	154	-67.16	-21.87	17.97	43.52	-25.55

Table 7-28. Radiated Spurious Emission – Simultaneous Transmission below 1GHz with AC/DC Adapter

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 61 of 66

7.8 AC Line-Conducted Emissions Measurements

§15.407; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-29. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 62 of 66

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


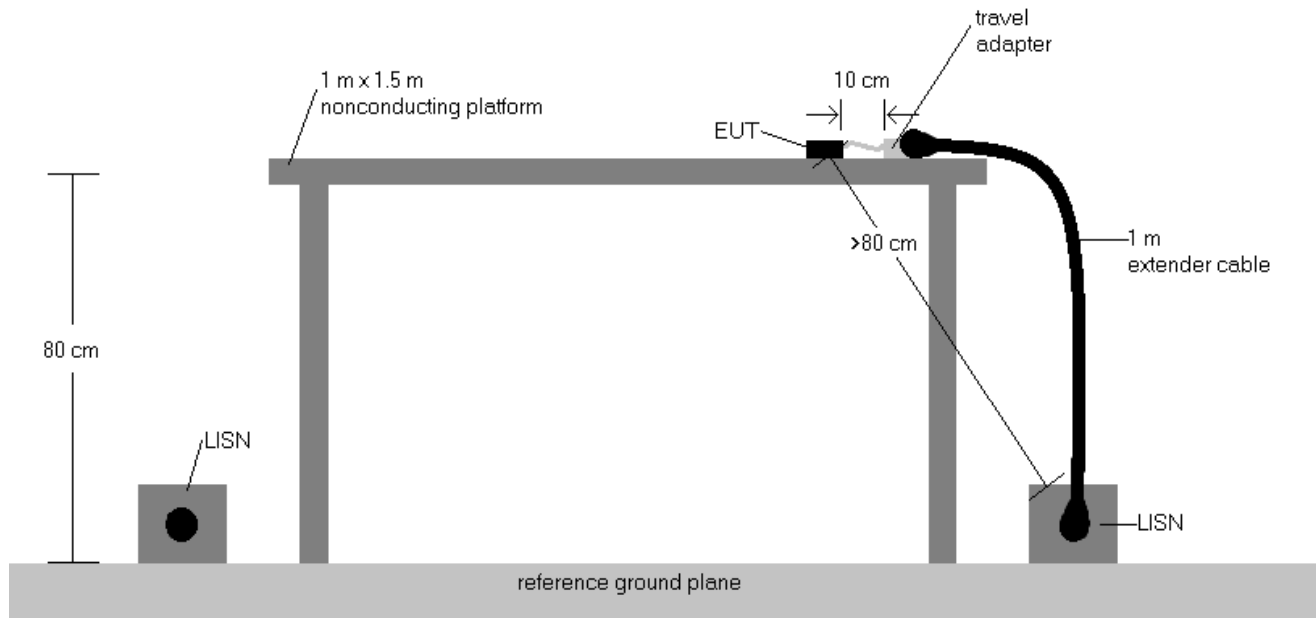


Figure 7-8. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
6. Traces shown in plots are made using quasi-peak and average detectors.
7. Deviations to the Specifications: None.
8. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB cable with wireless charger
 - b. EUT powered by host PC via USB cable with wireless charger

FCC ID: BCG-A2294	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 63 of 66

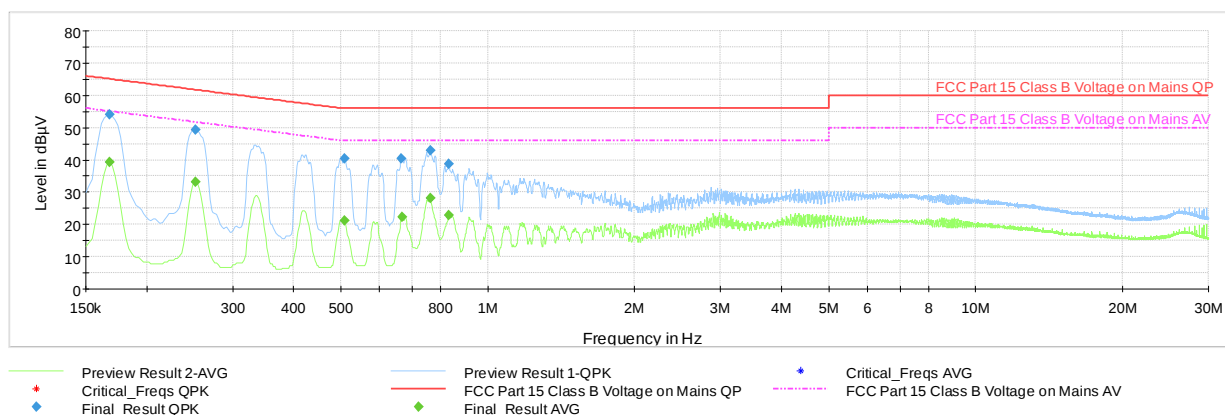


Plot 7-51. AC Line Conducted Plot with 802.11n UNII Band 2C – Ch.116 (L1) with AC/DC Charger

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.168	FINAL	53.97	—	65.06	-11.09	L1	GND
0.168	FINAL	—	39.31	55.06	-15.75	L1	GND
0.251	FINAL	49.26	—	61.72	-12.46	L1	GND
0.251	FINAL	—	33.25	51.72	-18.47	L1	GND
0.508	FINAL	40.33	—	56.00	-15.67	L1	GND
0.508	FINAL	—	21.24	46.00	-24.76	L1	GND
0.665	FINAL	40.51	—	56.00	-15.49	L1	GND
0.668	FINAL	—	22.27	46.00	-23.73	L1	GND
0.762	FINAL	—	28.22	46.00	-17.78	L1	GND
0.762	FINAL	42.94	—	56.00	-13.06	L1	GND
0.832	FINAL	38.72	—	56.00	-17.28	L1	GND
0.832	FINAL	—	22.74	46.00	-23.26	L1	GND

Table 7-30. AC Line Conducted with 802.11n UNII Band 2C – Ch.116 (L1) with AC/DC Charger

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 64 of 66

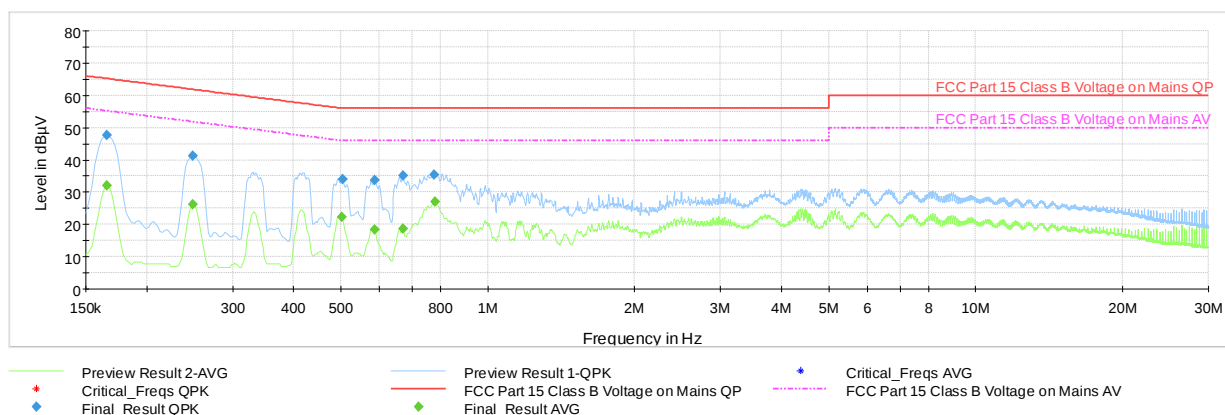

Plot 7-52. AC Line Conducted Plot with 802.11n UNII Band 2C – Ch.116 (N) with AC/DC Charger

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.166	FINAL	47.75	—	65.17	-17.42	N	GND
0.166	FINAL	—	32.16	55.17	-23.01	N	GND
0.249	FINAL	41.18	—	61.79	-20.61	N	GND
0.249	FINAL	—	26.31	51.79	-25.48	N	GND
0.501	FINAL	—	22.33	46.00	-23.67	N	GND
0.503	FINAL	34.07	—	56.00	-21.93	N	GND
0.587	FINAL	—	18.51	46.00	-27.49	N	GND
0.587	FINAL	33.83	—	56.00	-22.17	N	GND
0.670	FINAL	—	18.67	46.00	-27.33	N	GND
0.670	FINAL	35.14	—	56.00	-20.86	N	GND
0.776	FINAL	35.49	—	56.00	-20.51	N	GND
0.780	FINAL	—	27.05	46.00	-18.95	N	GND

Table 7-31. AC Line Conducted with 802.11n UNII Band 2C – Ch.116 (N) with AC/DC Charger

FCC ID: BCG-A2294		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 65 of 66

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Watch FCC ID: BCG-A2294** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCG-A2294	 Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270019-10.BCG	Test Dates: 05/01/2020 - 08/05/2020	EUT Type: Watch	Page 66 of 66