**MEASUREMENT REPORT****FCC PART 15.247 / ISED RSS-247 WLAN 802.11b/g/n****Applicant Name:**

Apple Inc.  
One Apple Park Way  
Cupertino, CA 95014  
United States

**Date of Testing:**

7/26/2018-10/10/2018

**Test Site/Location:**

PCTEST Lab. Morgan Hill, CA, USA

**Test Report Serial No.:**

1C1806050011-05-R1.BCG

**FCC ID:**

**BCGA2014**

**IC:**

**579C-A2014**

**APPLICANT:**

**Apple Inc.**

**Application Type:**

Certification

**Model/HVIN:**

A2014

**EUT Type:**

Tablet Device

**Frequency Range:**

2412 – 2472MHz

**FCC Classification:**

Digital Transmission System (DTS)

**FCC Rule Part(s):**

Part 15 Subpart C (15.247)

**ISED Specification:**

RSS-247 Issue 2

**Test Procedure(s):**

ANSI C63.10-2013, KDB 558074 D01 v05, KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 558074 D01 v05. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1C1806050011-05-R1.BCG) supersedes and replaces the previously issued test report (S/N: 1C1806050011-05.BCG) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


  
Randy Ortanez  
President

|                                                   |                                                                                                                                   |                                   |                                        |
|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|----------------------------------------|
| FCC ID: BCGA2014                                  |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                                   | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C1806050011-05-R1.BCG | <b>Test Dates:</b><br>7/26/2018-10/10/2018                                                                                        | <b>EUT Type:</b><br>Tablet Device | Page 1 of 142                          |


# TABLE OF CONTENTS

|        |                                                                       |     |
|--------|-----------------------------------------------------------------------|-----|
| 1.0    | INTRODUCTION.....                                                     | 4   |
| 1.1    | Scope .....                                                           | 4   |
| 1.2    | PCTEST Test Location.....                                             | 4   |
| 1.3    | Test Facility / Accreditations.....                                   | 4   |
| 2.0    | PRODUCT INFORMATION .....                                             | 5   |
| 2.1    | Equipment Description .....                                           | 5   |
| 2.2    | Device Capabilities .....                                             | 5   |
| 2.3    | Antenna Description .....                                             | 6   |
| 2.4    | Test Support Equipment.....                                           | 6   |
| 2.5    | Test Configuration .....                                              | 7   |
| 2.6    | Software and Firmware .....                                           | 7   |
| 2.7    | EMI Suppression Device(s)/Modifications .....                         | 7   |
| 3.0    | DESCRIPTION OF TESTS .....                                            | 8   |
| 3.1    | Evaluation Procedure .....                                            | 8   |
| 3.2    | AC Line Conducted Emissions .....                                     | 8   |
| 3.3    | Radiated Emissions.....                                               | 9   |
| 3.4    | Environmental Conditions.....                                         | 9   |
| 4.0    | ANTENNA REQUIREMENTS .....                                            | 10  |
| 5.0    | MEASUREMENT UNCERTAINTY.....                                          | 11  |
| 6.0    | TEST EQUIPMENT CALIBRATION DATA.....                                  | 12  |
| 7.0    | TEST RESULTS.....                                                     | 13  |
| 7.1    | Summary.....                                                          | 13  |
| 7.2    | 6dB Bandwidth Measurement .....                                       | 14  |
| 7.3    | Output Power Measurement.....                                         | 30  |
| 7.3.1  | Average Output Power Measurement .....                                | 31  |
| 7.3.2  | Peak Output Power Measurement .....                                   | 33  |
| 7.4    | Power Spectral Density .....                                          | 35  |
| 7.5    | Conducted Emissions at the Band Edge .....                            | 66  |
| 7.6    | Conducted Spurious Emissions.....                                     | 85  |
| 7.7    | Radiated Spurious Emission Measurements – Above 1 GHz.....            | 96  |
| 7.7.1  | SISO Core0 Radiated Spurious Emission Measurements .....              | 99  |
| 7.7.2  | SISO Core 1 Primary Radiated Spurious Emission Measurements.....      | 102 |
| 7.7.3  | SISO Core 1 Diversity Radiated Spurious Emission Measurements .....   | 105 |
| 7.7.4  | CDD Primary Radiated Spurious Emission Measurements .....             | 108 |
| 7.7.5  | CDD Diversity Radiated Spurious Emission Measurements.....            | 111 |
| 7.7.6  | SISO Core0 Radiated Restricted Band Edge Measurements.....            | 115 |
| 7.7.7  | SISO Core1 Primary Radiated Restricted Band Edge Measurements.....    | 119 |
| 7.7.8  | SISO Core1 Diversity Radiated Restricted Band Edge Measurements ..... | 124 |
| 7.7.9  | CDD Primary Radiated Restricted Band Edge Measurements .....          | 128 |
| 7.7.10 | CDD Diversity Radiated Restricted Band Edge Measurements.....         | 131 |
| 7.8    | Radiated Spurious Emissions Measurements – Below 1GHz .....           | 134 |
| 7.9    | AC Line-Conducted Test Data.....                                      | 138 |
| 8.0    | CONCLUSION .....                                                      | 142 |

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 2 of 142                   |



# MEASUREMENT REPORT



| Mode    | Tx Frequency (MHz) | CORE0           |                  |                 |                  | CORE1 Primary   |                  |                 |                  | CORE1 Diversity |                  |                 |                  |
|---------|--------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|
|         |                    | Avg Conducted   |                  | Peak Conducted  |                  | Avg Conducted   |                  | Peak Conducted  |                  | Avg Conducted   |                  | Peak Conducted  |                  |
|         |                    | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) |
| 802.11b | 2412 - 2472        | 23.714          | 13.75            | 42.954          | 16.33            | 26.607          | 14.25            | 48.306          | 16.84            | 79.433          | 19.00            | 137.404         | 21.38            |
| 802.11g | 2412 - 2472        | 23.714          | 13.75            | 116.145         | 20.65            | 26.607          | 14.25            | 121.060         | 20.83            | 79.433          | 19.00            | 214.783         | 23.32            |
| 802.11n | 2412 - 2472        | 23.714          | 13.75            | 124.165         | 20.94            | 26.607          | 14.25            | 128.233         | 21.08            | 79.433          | 19.00            | 216.770         | 23.36            |

## EUT Overview SISO

| Mode    | Tx Frequency (MHz) | CORE0           |                  |                 |                  | CORE1 Primary   |                  |                 |                  | Combined        |                  |                 |                  |
|---------|--------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|
|         |                    | Avg Conducted   |                  | Peak Conducted  |                  | Avg Conducted   |                  | Peak Conducted  |                  | Avg Conducted   |                  | Peak Conducted  |                  |
|         |                    | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) |
| 802.11g | 2412 - 2472        | 23.714          | 13.75            | 83.753          | 19.23            | 26.607          | 14.25            | 124.165         | 20.94            | 50.350          | 17.02            | 207.970         | 23.18            |
| 802.11n | 2412 - 2472        | 23.714          | 13.75            | 85.507          | 19.32            | 26.485          | 14.23            | 134.586         | 21.29            | 50.234          | 17.01            | 220.293         | 23.43            |

## EUT Overview CDD Primary

| Mode    | Tx Frequency (MHz) | CORE0           |                  |                 |                  | CORE1 Diversity |                  |                 |                  | Combined        |                  |                 |                  |
|---------|--------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|
|         |                    | Avg Conducted   |                  | Peak Conducted  |                  | Avg Conducted   |                  | Peak Conducted  |                  | Avg Conducted   |                  | Peak Conducted  |                  |
|         |                    | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) |
| 802.11g | 2412 - 2472        | 23.388          | 13.69            | 79.983          | 19.03            | 79.433          | 19.00            | 193.197         | 22.86            | 102.802         | 20.12            | 272.898         | 24.36            |
| 802.11n | 2412 - 2472        | 23.714          | 13.75            | 86.099          | 19.35            | 79.433          | 19.00            | 199.526         | 23.00            | 103.039         | 20.13            | 285.759         | 24.56            |

## EUT Overview CDD Diversity

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device |                                 |
|                                            |                                                                                                                                   |                            | Page 3 of 142                   |

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

### 1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Morgan Hill, CA 95037, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISSED.

|                                            |                                                                                     |                                       |                                 |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                 | EUT Type:<br>Tablet Device            | Page 4 of 142                   |

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2014**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

**Test Device Serial No.:** DLXX303FKNQK, DLXX502EKYD1

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE, HDR4, HDR8)

| Ch. | Frequency (MHz) | Ch. | Frequency (MHz) |
|-----|-----------------|-----|-----------------|
| 1   | 2412            | 8   | 2447            |
| 2   | 2417            | 9   | 2452            |
| 3   | 2422            | 10  | 2457            |
| 4   | 2427            | 11  | 2462            |
| 5   | 2432            | 12  | 2467            |
| 6   | 2437            | 13  | 2472            |
| 7   | 2442            |     |                 |

**Table 2-1. Frequency/ Channel Operations**

**Note:** The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of ANSI C63.10-2013 and KDB 558074 D01 v05. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

| Maximum Achievable Duty Cycles |   |                |               |                 |             |               |
|--------------------------------|---|----------------|---------------|-----------------|-------------|---------------|
| 802.11 Mode/Band               |   | Duty Cycle [%] |               |                 |             |               |
|                                |   | Core0          | Core1 Primary | Core1 Diversity | CDD Primary | CDD Diversity |
| 2.4GHz                         | b | 100.0          | 100.0         | 100.0           | N/A         | N/A           |
|                                | g | 98.9           | 98.9          | 98.7            | 98.9        | 98.8          |
|                                | n | 99.1           | 98.9          | 98.8            | 99.2        | 99.6          |

**Table 2-2. Measured Duty Cycles**

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 5 of 142                   |

The device employs MIMO technology. Below are the possible configurations.

| WiFi Configurations |     | SISO  |               |                 | MIMO Primary |               |       |               | MIMO Diversity |               |       |               |
|---------------------|-----|-------|---------------|-----------------|--------------|---------------|-------|---------------|----------------|---------------|-------|---------------|
|                     |     |       |               |                 | CDD          |               | SDM   |               | CDD            |               | SDM   |               |
|                     |     | CORE0 | CORE1 Primary | CORE1 Diversity | CORE0        | CORE1 Primary | CORE0 | CORE1 Primary | CORE0          | CORE1 Primary | CORE0 | CORE1 Primary |
| 2.4GHz              | 11b | ✓     | ✓             | ✓               | ✗            | ✗             | ✗     | ✗             | ✗              | ✗             | ✗     | ✗             |
|                     | 11g | ✓     | ✓             | ✓               | ✓            | ✓             | ✗     | ✗             | ✓              | ✓             | ✗     | ✗             |
|                     | 11n | ✓     | ✓             | ✓               | ✓            | ✓             | ✓     | ✓             | ✓              | ✓             | ✓     | ✓             |

**Table 2-3. Frequency / Channel Operations**

✓ = Support; ✗ = NOT Support

**SISO** = Single Input Single Output

**MIMO** = Multiple Input Multiple Output

**SDM** = Spatial Diversity Multiplexing – MIMO Function

**CDD** = Cyclic Delay Diversity – 2Tx Function

Data Rates Supported: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps (b)  
 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps (g)  
 6.5/7.2Mbps, 13/14.4Mbps, 19.5/21.7Mbps, 26/28.9Mbps, 39/43.3Mbps, 52/57.8Mbps, 58.5/65Mbps, 65/72.2Mbps (n)  
 13/14.4Mbps, 26/28.9Mbps, 39/43.3Mbps, 52/57.8Mbps, 78/86.7Mbps, 104/115.6Mbps, 117/130Mbps, 130/144.4Mbps (MIMO n)

## 2.3 Antenna Description

Following antenna was used for the testing.

| Frequency [GHz] | Antenna Gain (dBi) |                |                  |
|-----------------|--------------------|----------------|------------------|
|                 | Core 0             | Core 1 Primary | Core 1 Diversity |
| 2.4             | -2.3               | -0.4           | -15.4            |

**Table 2-4. Antenna Peak Gain**

## 2.4 Test Support Equipment

|   |                            |        |          |      |                    |
|---|----------------------------|--------|----------|------|--------------------|
| 1 | Apple MacBook              | Model: | A1398    | S/N: | C2QKP008F6F3       |
|   | w/AC/DC Adapter            | Model: | A1435    | S/N: | C04325505K1F2888G  |
| 2 | Apple USB-C Cable          | Model: | Chimp    | S/N: | 300C44             |
| 3 | USB-C Cable                | Model: | A146     | S/N: | N/A                |
|   | w/ AC Adapter              | Model: | A1720    | S/N: | C3D8257A2EPGKVP2C  |
| 4 | USB-C to 3.5mm Aux Adapter | Model: | A2049    | S/N: | DWH413100GJJ KLT12 |
| 5 | DC Power Supply            | Model: | KPS3010D | S/N: | N/A                |

**Table 2-5. Test Support Equipment Used**

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 6 of 142                   |

## 2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013 and KDB 558074 D01 v05. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 7.9 for AC line conducted emissions test setups, 7.7 for radiated emissions test setups, and, 7.2, 7.3, 7.4, 7.5 and 7.6 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and worst case was reported.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

## 2.6 Software and Firmware

The test was conducted with firmware version 16B64 installed on the EUT.

## 2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

|                                            |                                                                                                                                   |                                       |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device            | Page 7 of 142                   |

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 v05 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

### 3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50 $\Omega$ /50 $\mu$ H Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.9. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.20.01.

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 8 of 142                   |

### 3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

### 3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 9 of 142                   |

## 4.0 ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

### Conclusion:

The EUT unit complies with the requirement of §15.203.

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 10 of 142                  |

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution                     | Expanded Uncertainty ( $\pm$ dB) |
|----------------------------------|----------------------------------|
| Conducted Bench Top Measurements | 1.13                             |
| Line Conducted Disturbance       | 3.09                             |
| Radiated Disturbance (<1GHz)     | 4.98                             |
| Radiated Disturbance (>1GHz)     | 5.07                             |
| Radiated Disturbance (>18GHz)    | 5.09                             |

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 11 of 142                  |

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

| Manufacturer          | Model       | Description                                    | Cal Date   | Cal Interval | Cal Due    | Serial Number |
|-----------------------|-------------|------------------------------------------------|------------|--------------|------------|---------------|
| Anritsu               | ML2495A     | Power Meter                                    | 11/28/2017 | Annual       | 11/28/2018 | 1039008       |
| Anritsu               | MA2411B     | Power Sensor 10MHz-40GHz                       | 11/28/2017 | Annual       | 11/28/2018 | 1027293       |
| ATM                   | 180-442A-KF | 20dB Nominal Gain Horn Antenna                 | 3/13/2018  | Annual       | 3/13/2019  | T058601-02    |
| COM-POWER             | LIN-120A    | LISN                                           | 3/7/2018   | Annual       | 3/7/2019   | 241296        |
| Keysight Technologies | N9030A      | 3Hz-44GHz PXA Signal Analyzer                  | 2/27/2018  | Annual       | 2/27/2019  | MY49430244    |
| Rohde & Schwarz       | FSV40       | Signal Analyzer (10Hz-40GHz)                   | 2/6/2018   | Annual       | 2/6/2019   | 101619        |
| Rohde & Schwarz       | ESW44       | EMI Test Receiver                              | 12/20/2017 | Annual       | 12/20/2018 | 101668        |
| Rohde & Schwarz       | ESW44       | EMI Test Receiver                              | 11/16/2017 | Annual       | 11/16/2018 | 101570        |
| Rohde & Schwarz       | SFUNIT-RX   | Shielded Filter Unit                           | 7/5/2018   | Annual       | 7/5/2019   | 102137        |
| Rohde & Schwarz       | SFUNIT-RX   | Shielded Filter Unit                           | 12/11/2017 | Annual       | 12/11/2018 | 102136        |
| Rohde & Schwarz       | TS-PR1840   | Pre-Amplifier (18GHz - 40GHz)                  | 6/11/2018  | Annual       | 6/11/2019  | 100051        |
| Rohde & Schwarz       | TS-PR8      | Pre-Amplifier (30MHz - 8GHz)                   | 1/25/2018  | Annual       | 1/25/2019  | 102333        |
| Rohde & Schwarz       | HL562E      | Ultra Broadband Antenna (30MHz - 6GHz)         | 6/8/2018   | Annual       | 6/8/2019   | 100810        |
| Rohde & Schwarz       | TC-TA18     | Cross Polarized Vivaldi Antenna (400MHz-18GHz) | 11/13/2017 | Annual       | 11/13/2018 | 101057        |
| Rohde & Schwarz       | TC-TA18     | Cross Polarized Vivaldi Antenna (400MHz-18GHz) | 11/29/2017 | Annual       | 11/29/2018 | 101063        |
| Rohde & Schwarz       | HFH2-Z2     | Loop Antenna                                   | 3/13/2018  | Annual       | 3/13/2019  | 100519        |

**Table 6-1. Annual Test Equipment Calibration Schedule**

### Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 12 of 142                  |

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Apple Inc.

FCC ID: BCGA2014

FCC Classification: Digital Transmission System (DTS)

| FCC Part Section(s) | RSS Section(s) | Test Description                                                              | Test Limit                                                                                     | Test Condition | Test Result | Reference         |
|---------------------|----------------|-------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|----------------|-------------|-------------------|
| 15.247(a)(2)        | RSS-247 [5.2]  | 6dB Bandwidth                                                                 | > 500kHz                                                                                       | CONDUCTED      | PASS        | Section 7.2       |
| 15.247(b)(3)        | RSS-247 [5.4]  | Transmitter Output Power                                                      | < 1 Watt                                                                                       |                | PASS        | Sections 7.3      |
| 15.247(e)           | RSS-247 [5.2]  | Transmitter Power Spectral Density                                            | < 8dBm / 3kHz Band                                                                             |                | PASS        | Section 7.4       |
| 15.247(d)           | RSS-247 [5.5]  | Band Edge / Out-of-Band Emissions                                             | ≥ 20dBc                                                                                        |                | PASS        | Sections 7.5, 7.6 |
| 15.205<br>15.209    | RSS-Gen [8.9]  | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9]) | RADIATED       | PASS        | Sections 7.7, 7.8 |
| 15.207              | RSS-Gen [8.8]  | AC Conducted Emissions 150kHz – 30MHz                                         | < FCC 15.207 limits (RSS-Gen[8.8])                                                             | LINE CONDUCTED | PASS        | Section 7.9       |

**Table 7-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "WLAN Automation," Version 3.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.3.0.

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 13 of 142                  |

## 7.2 6dB Bandwidth Measurement

§15.247(a.2); RSS-247 [5.2]

### Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

***The minimum permissible 6dB bandwidth is 500 kHz.***

### Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2  
KDB 558074 D01 v05 – Section 8.2

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 6$ . The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes


None

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 14 of 142                  |

## SISO Core 0 6 dB Bandwidth Measurements


| Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Bandwidth [MHz] | Minimum Bandwidth [MHz] |
|-----------------|-------------|-------------|------------------|--------------------------|-------------------------|
| 2412            | 1           | b           | 1                | 8.576                    | 0.500                   |
| 2437            | 6           | b           | 1                | 8.109                    | 0.500                   |
| 2462            | 11          | b           | 1                | 8.110                    | 0.500                   |
| 2412            | 1           | g           | 6                | 16.31                    | 0.500                   |
| 2437            | 6           | g           | 6                | 16.08                    | 0.500                   |
| 2462            | 11          | g           | 6                | 15.51                    | 0.500                   |
| 2412            | 1           | n           | 6.5/7.2 (MCS0)   | 16.92                    | 0.500                   |
| 2437            | 6           | n           | 6.5/7.2 (MCS0)   | 16.96                    | 0.500                   |
| 2462            | 11          | n           | 6.5/7.2 (MCS0)   | 15.74                    | 0.500                   |

Table 7-2. SISO Core0 Conducted Bandwidth Measurements

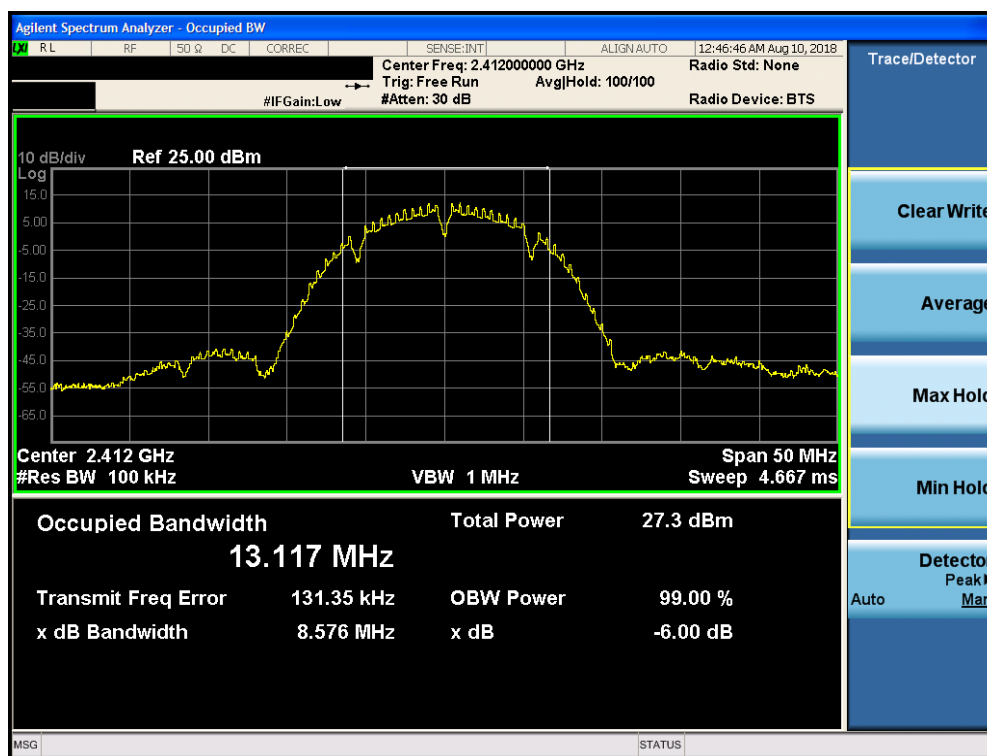


Plot 7-1. 6dB Bandwidth Plot SISO CORE0 (802.11b – Ch. 1)

|                                            |                                               |                                       |                                 |
|--------------------------------------------|-----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018           | EUT Type:<br>Tablet Device            | Page 15 of 142                  |

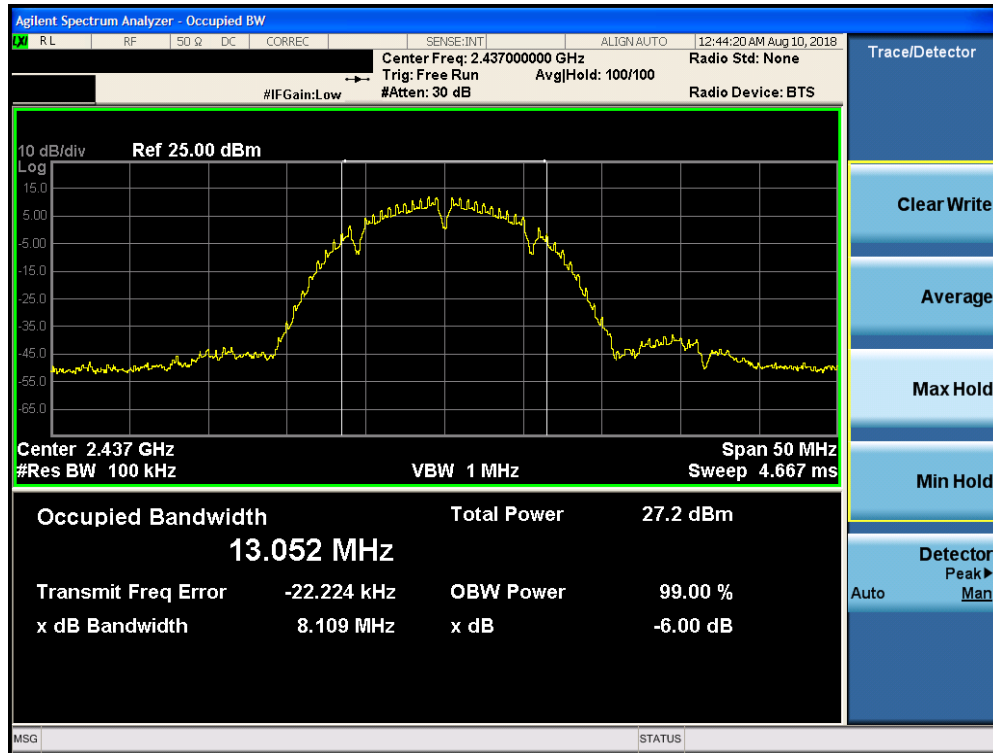


Plot 7-2. 6dB Bandwidth Plot SISO CORE0 (802.11b – Ch. 6)

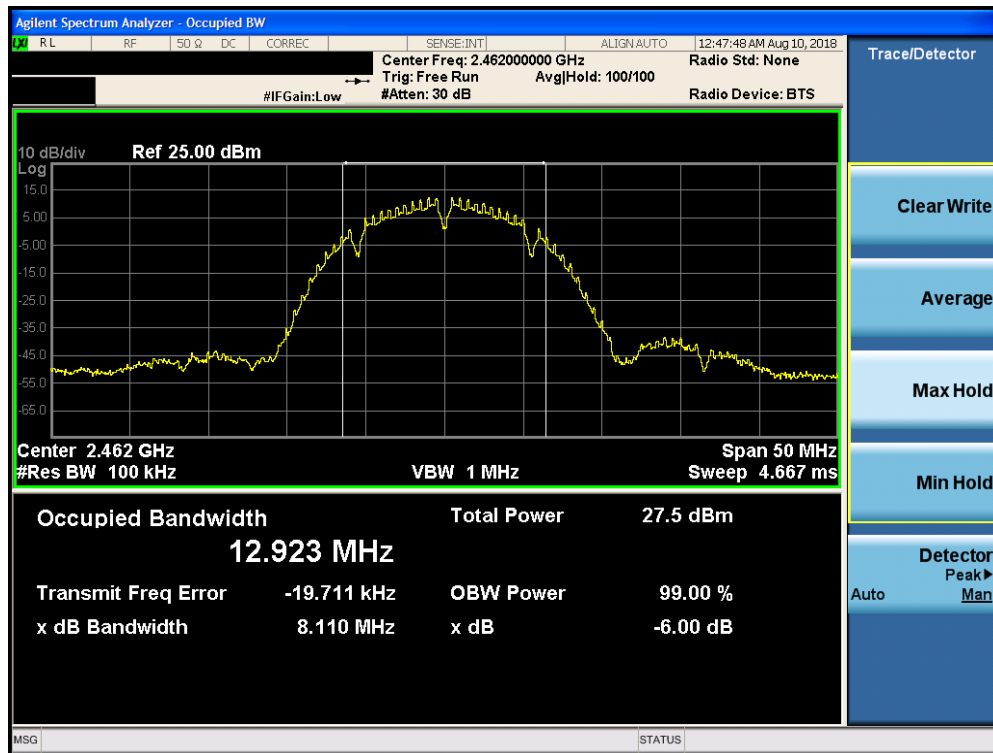


Plot 7-3. 6dB Bandwidth Plot SISO CORE0 (802.11b – Ch. 11)

|                                            |                                               |                            |                                 |
|--------------------------------------------|-----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018           | EUT Type:<br>Tablet Device | Page 16 of 142                  |

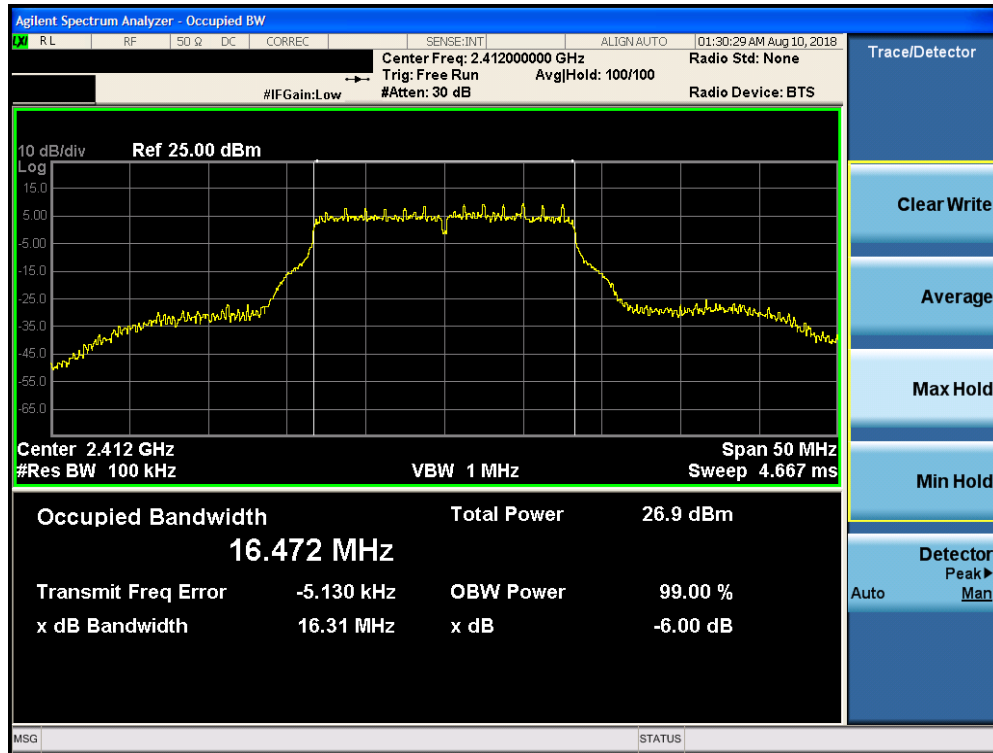


Plot 7-4. 6dB Bandwidth Plot SISO CORE0 (802.11g - Ch. 1)

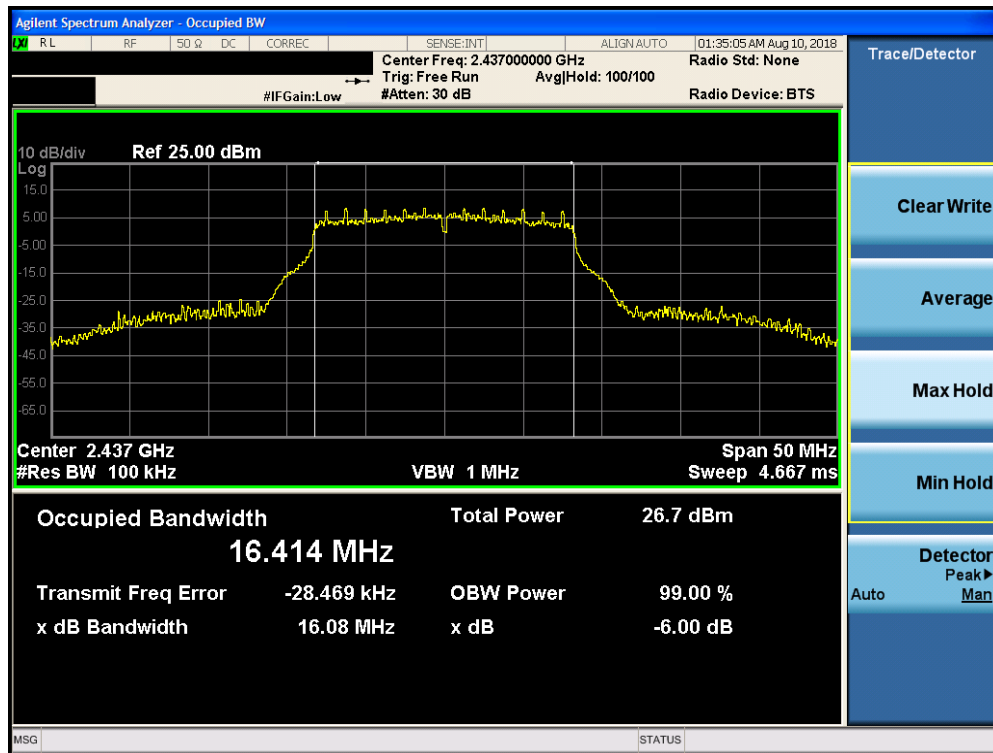


Plot 7-5. 6dB Bandwidth Plot SISO CORE0 (802.11g - Ch. 6)

|                                            |                                               |                            |                                 |
|--------------------------------------------|-----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018           | EUT Type:<br>Tablet Device | Page 17 of 142                  |

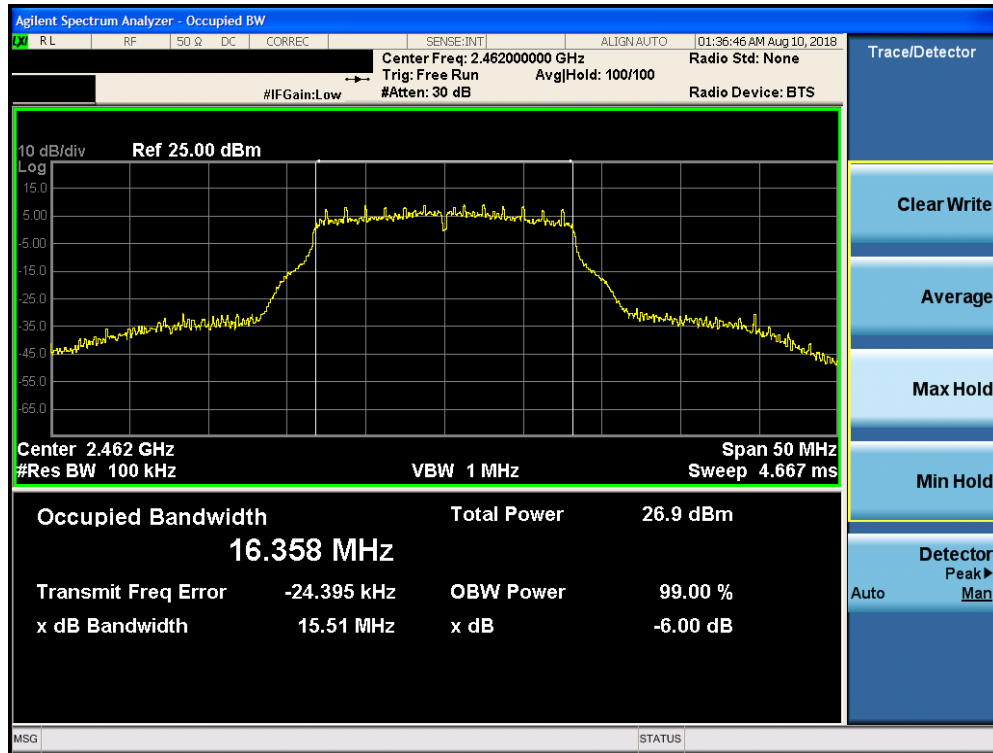


Plot 7-6. 6dB Bandwidth Plot SISO CORE0 (802.11g – Ch. 11)

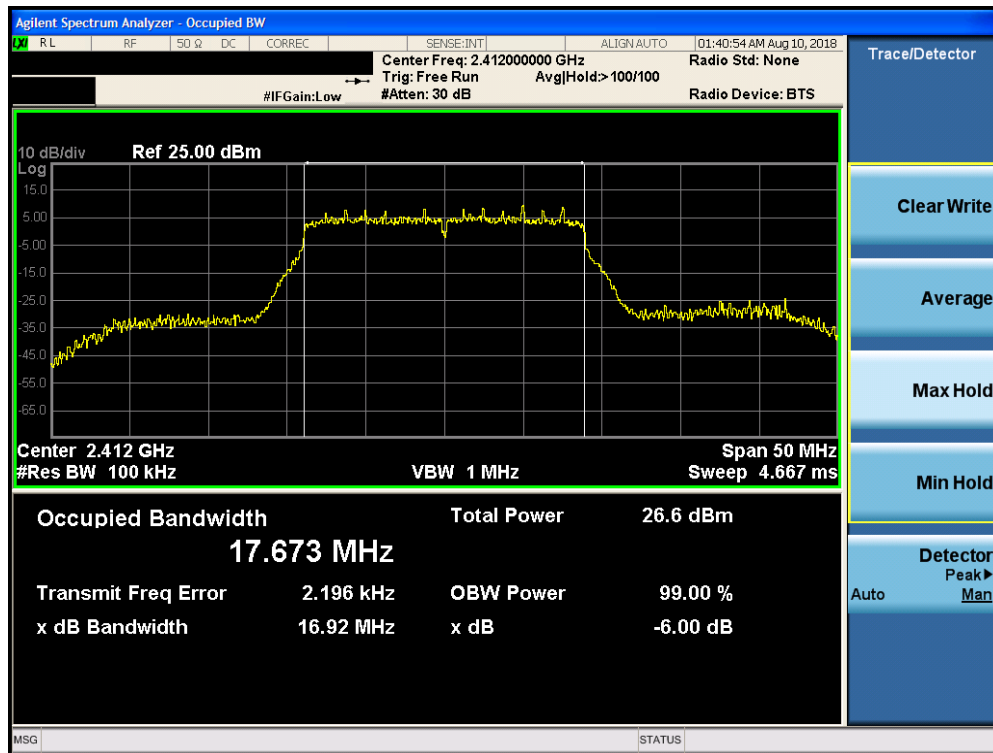


Plot 7-7. 6dB Bandwidth Plot SISO CORE0 (802.11n (2.4GHz) – Ch. 1)

|                                            |                                               |                            |                                 |
|--------------------------------------------|-----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018           | EUT Type:<br>Tablet Device | Page 18 of 142                  |

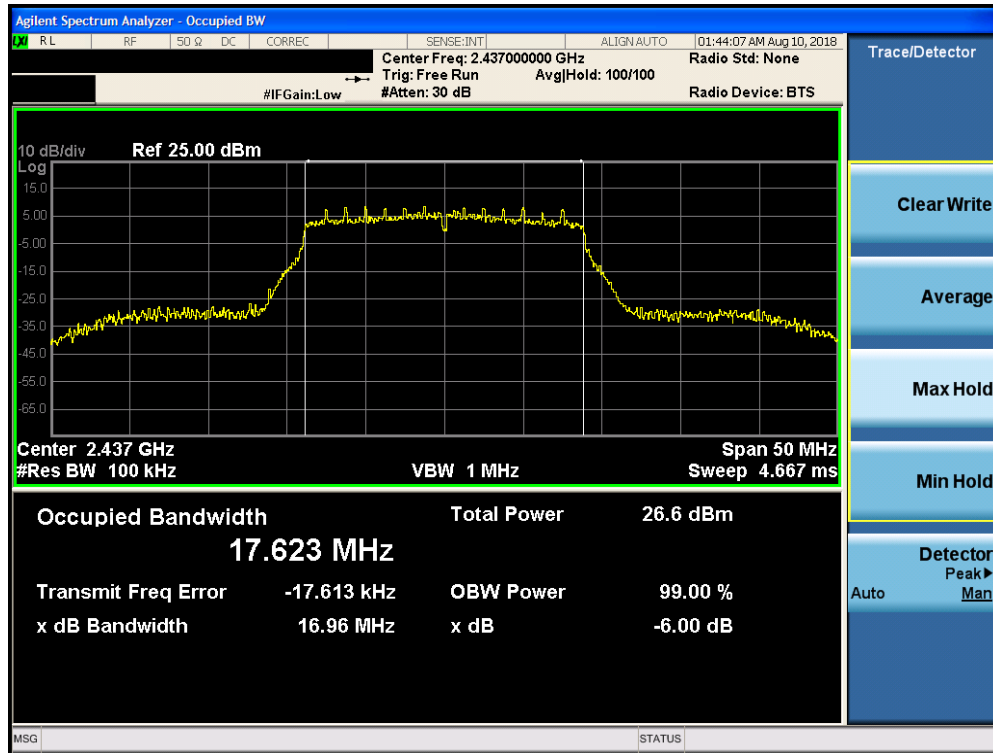

Plot 7-8. 6dB Bandwidth Plot SISO CORE0 (802.11n (2.4GHz) – Ch. 6)

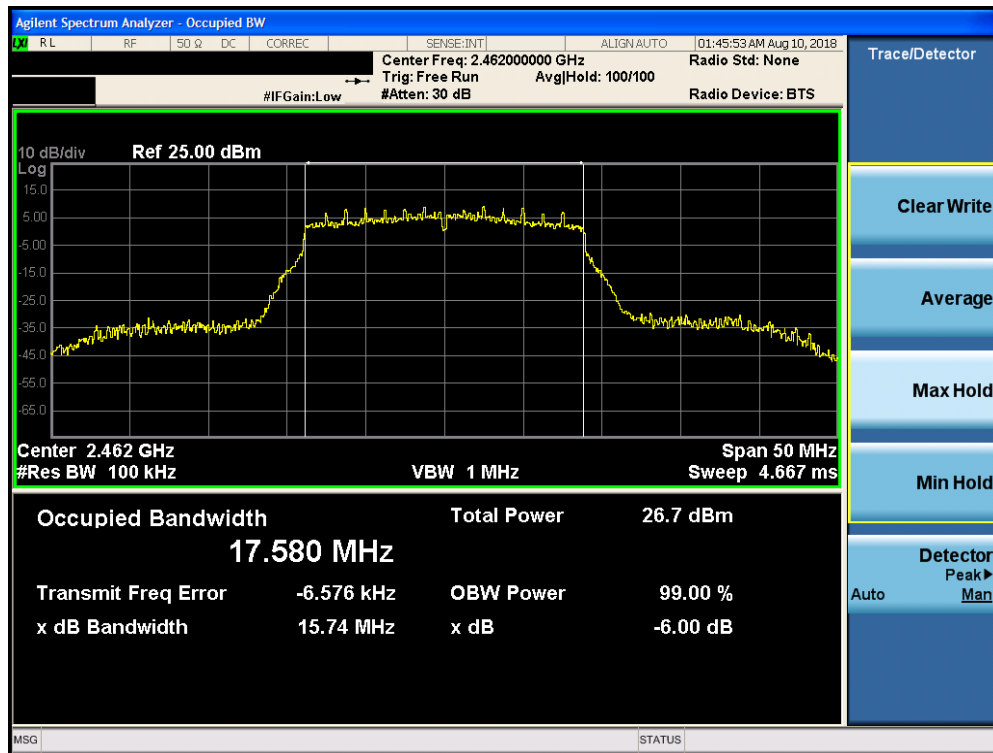


Plot 7-9. 6dB Bandwidth Plot SISO CORE0 (802.11n (2.4GHz) – Ch. 11)

|                                            |                                               |                            |                                 |
|--------------------------------------------|-----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018           | EUT Type:<br>Tablet Device | Page 19 of 142                  |

## SISO Core 1 Primary 6 dB Bandwidth Measurements


| Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Bandwidth [MHz] | Minimum Bandwidth [MHz] |
|-----------------|-------------|-------------|------------------|--------------------------|-------------------------|
| 2412            | 1           | b           | 1                | 8.116                    | 0.500                   |
| 2437            | 6           | b           | 1                | 8.548                    | 0.500                   |
| 2462            | 11          | b           | 1                | 8.092                    | 0.500                   |
| 2412            | 1           | g           | 6                | 16.09                    | 0.500                   |
| 2437            | 6           | g           | 6                | 15.84                    | 0.500                   |
| 2462            | 11          | g           | 6                | 16.07                    | 0.500                   |
| 2412            | 1           | n           | 6.5/7.2 (MCS0)   | 17.29                    | 0.500                   |
| 2437            | 6           | n           | 6.5/7.2 (MCS0)   | 16.10                    | 0.500                   |
| 2462            | 11          | n           | 6.5/7.2 (MCS0)   | 16.08                    | 0.500                   |

Table 7-3. SISO Core1 Primary Conducted Bandwidth Measurements

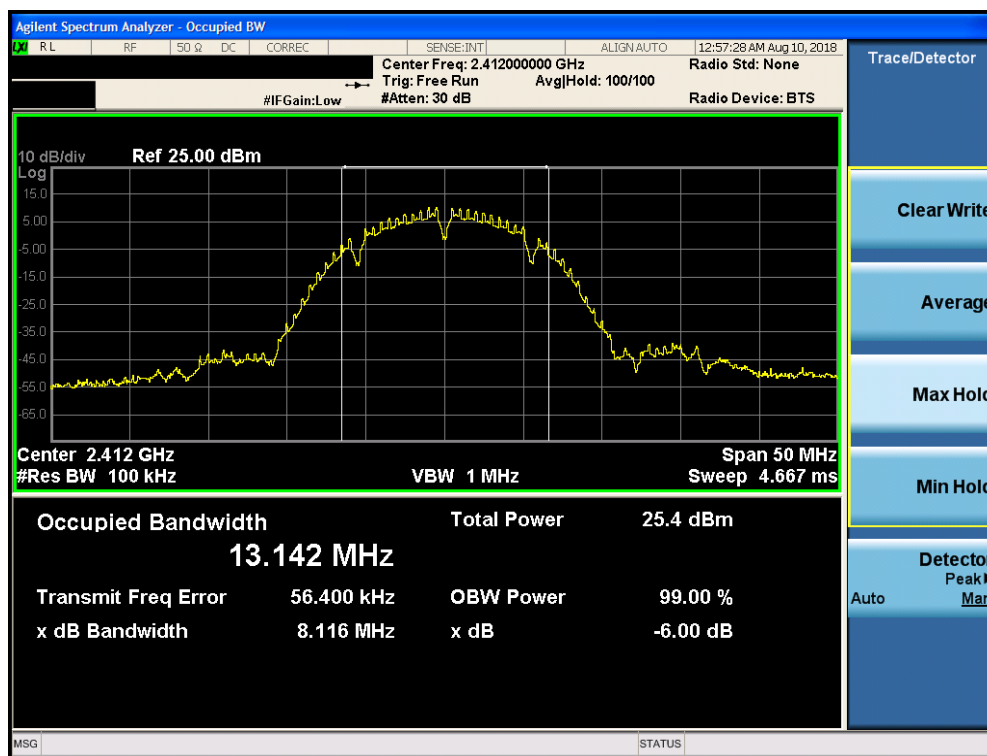


Plot 7-10. 6dB Bandwidth Plot SISO CORE1 PRIMARY (802.11b – Ch. 1)

|                                            |                                               |                                       |                                 |
|--------------------------------------------|-----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018           | EUT Type:<br>Tablet Device            | Page 20 of 142                  |

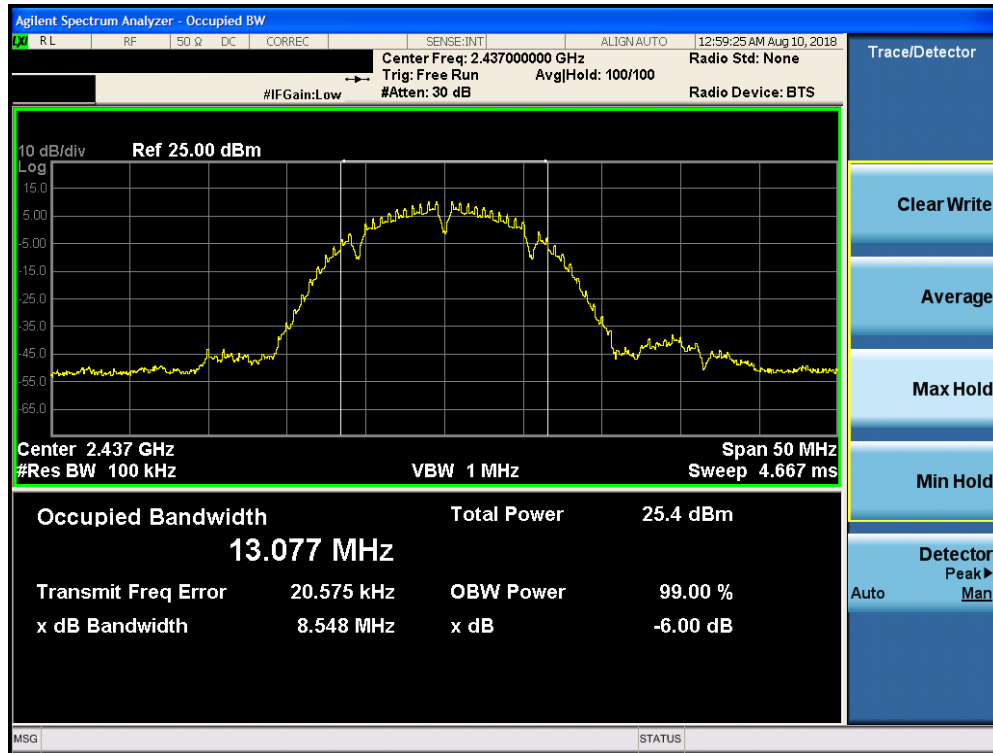


Plot 7-11. 6dB Bandwidth Plot SISO CORE1 PRIMARY (802.11b – Ch. 6)

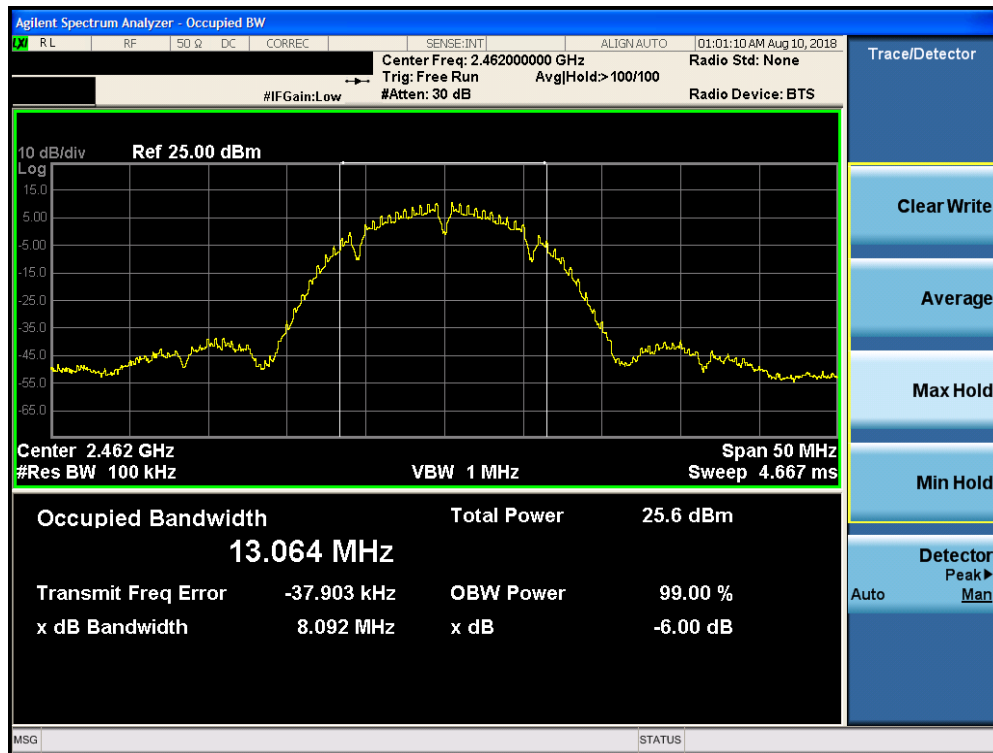


Plot 7-12. 6dB Bandwidth Plot SISO CORE1 PRIMARY (802.11b – Ch. 11)

|                                            |                                               |                            |                                 |
|--------------------------------------------|-----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018           | EUT Type:<br>Tablet Device | Page 21 of 142                  |

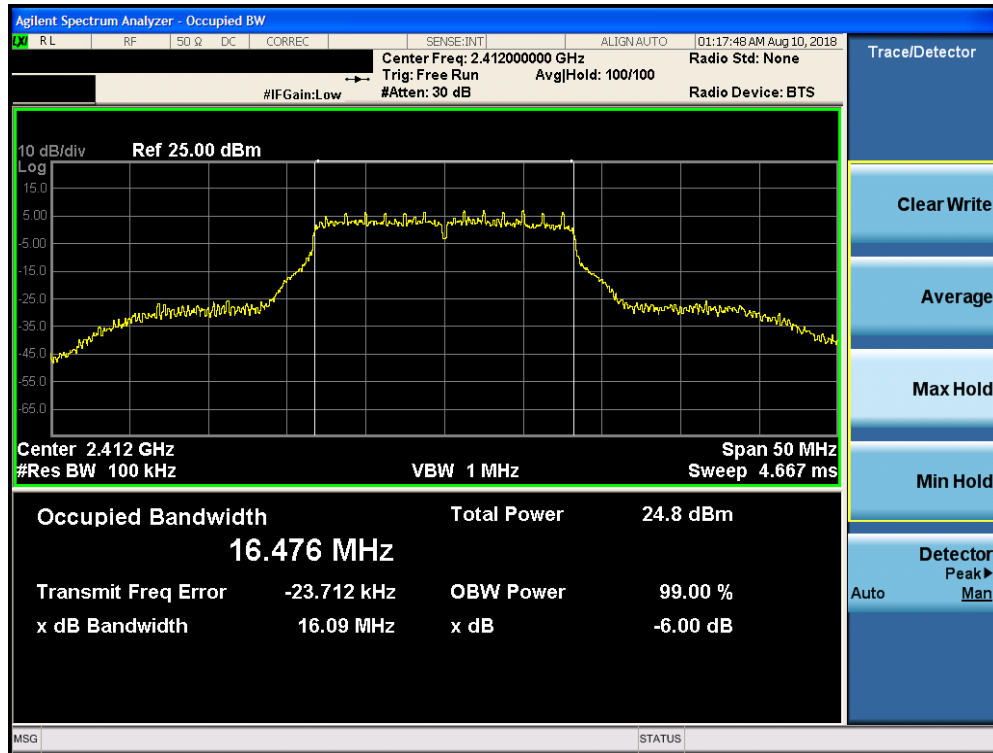


Plot 7-13. 6dB Bandwidth Plot SISO CORE1 PRIMARY (802.11g – Ch. 1)

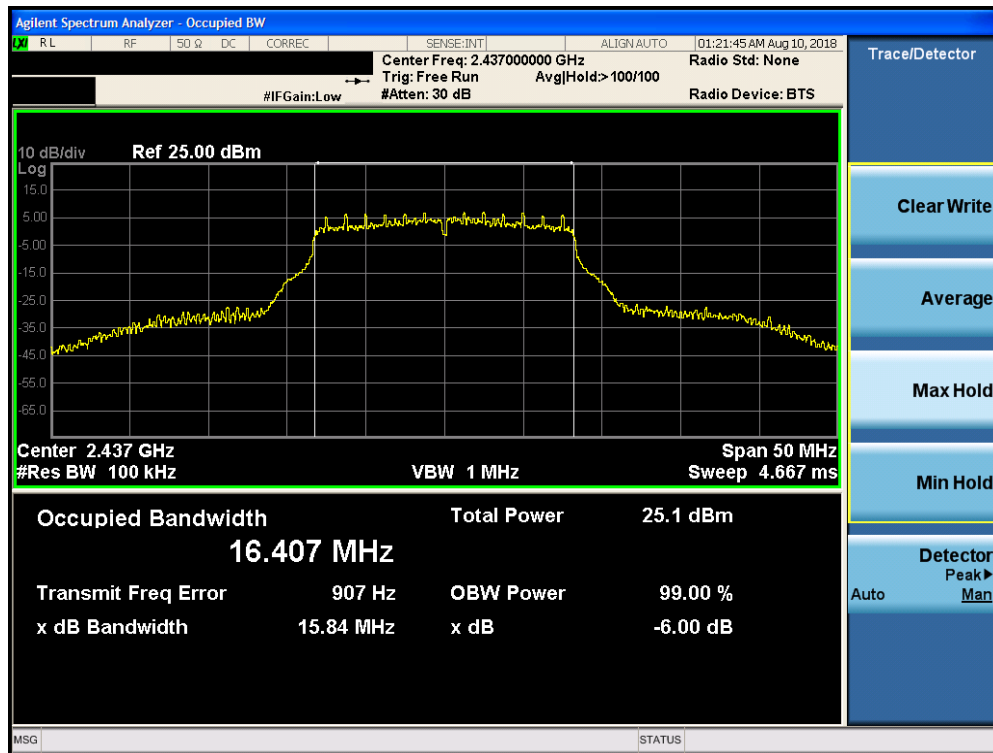


Plot 7-14. 6dB Bandwidth Plot SISO CORE1 PRIMARY (802.11g – Ch. 6)

|                                            |                                               |                            |                                 |
|--------------------------------------------|-----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018           | EUT Type:<br>Tablet Device | Page 22 of 142                  |

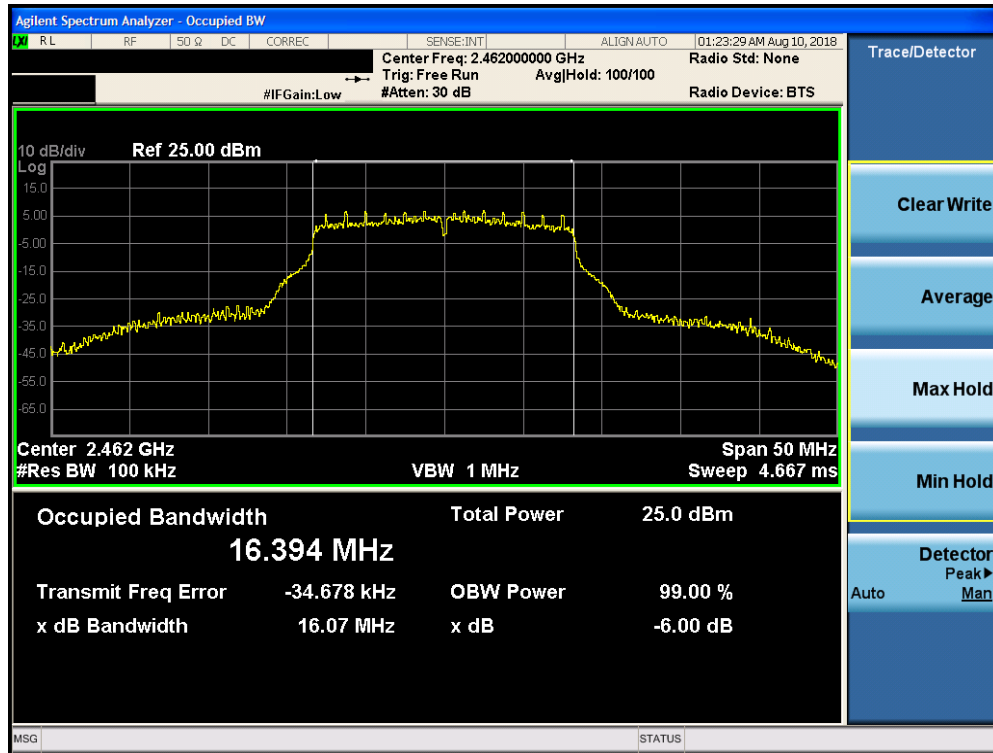


Plot 7-15. 6dB Bandwidth Plot SISO CORE1 PRIMARY (802.11g – Ch. 11)

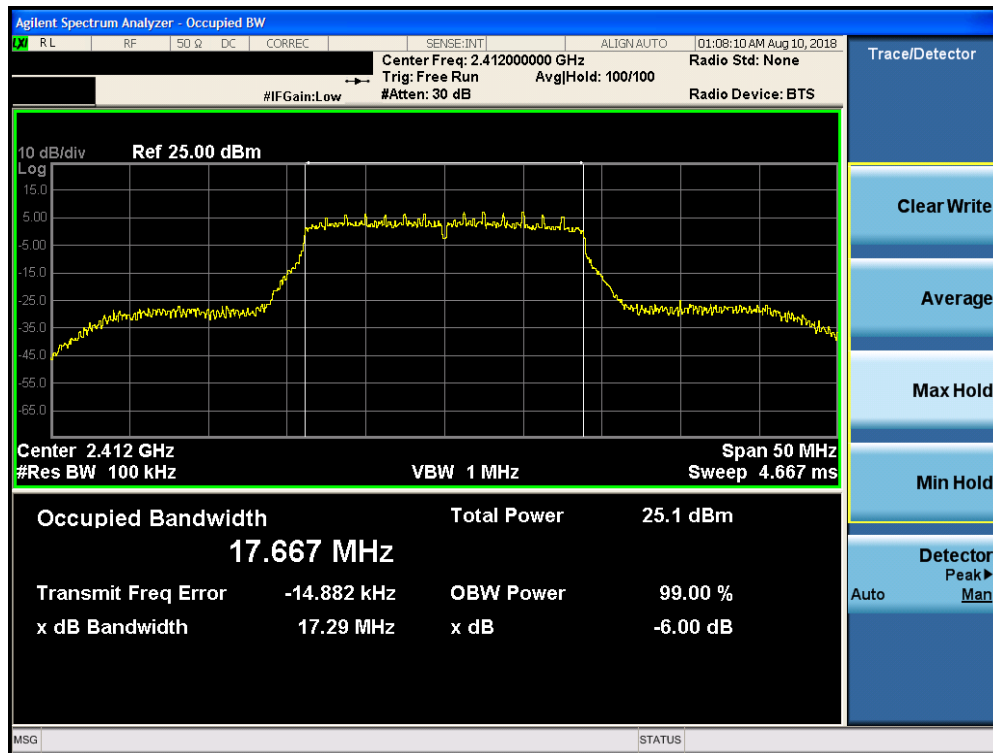


Plot 7-16. 6dB Bandwidth Plot SISO CORE1 PRIMARY (802.11n (2.4GHz) – Ch. 1)

|                                            |                                               |                            |                                 |
|--------------------------------------------|-----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018           | EUT Type:<br>Tablet Device | Page 23 of 142                  |

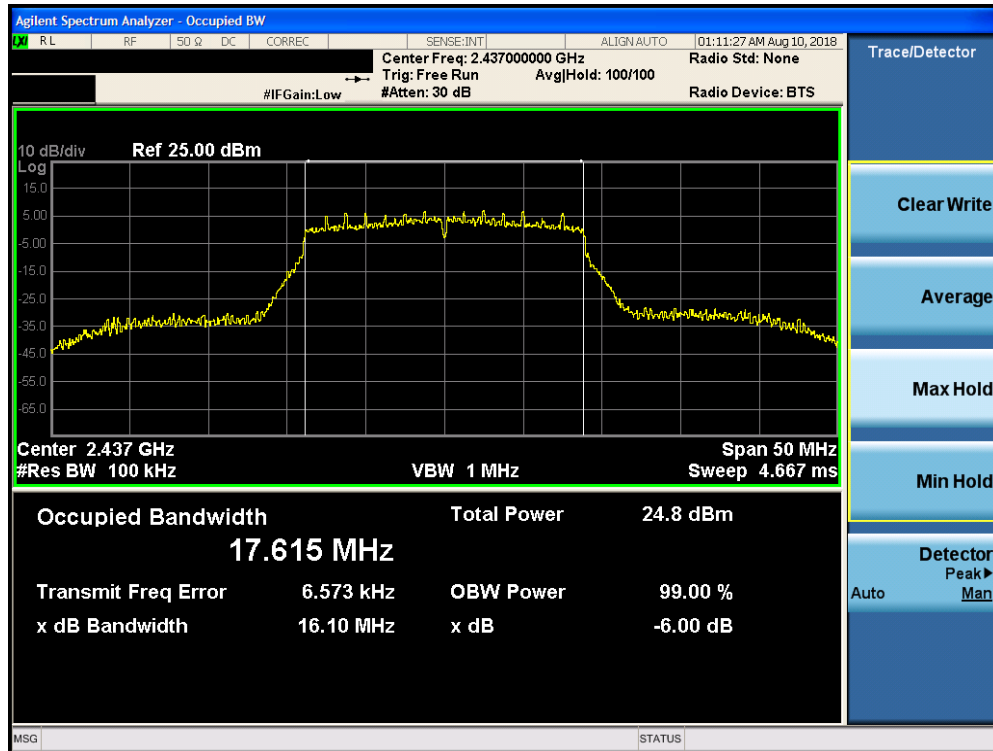

Plot 7-17. 6dB Bandwidth Plot SISO CORE1 PRIMARY (802.11n (2.4GHz) – Ch. 6)

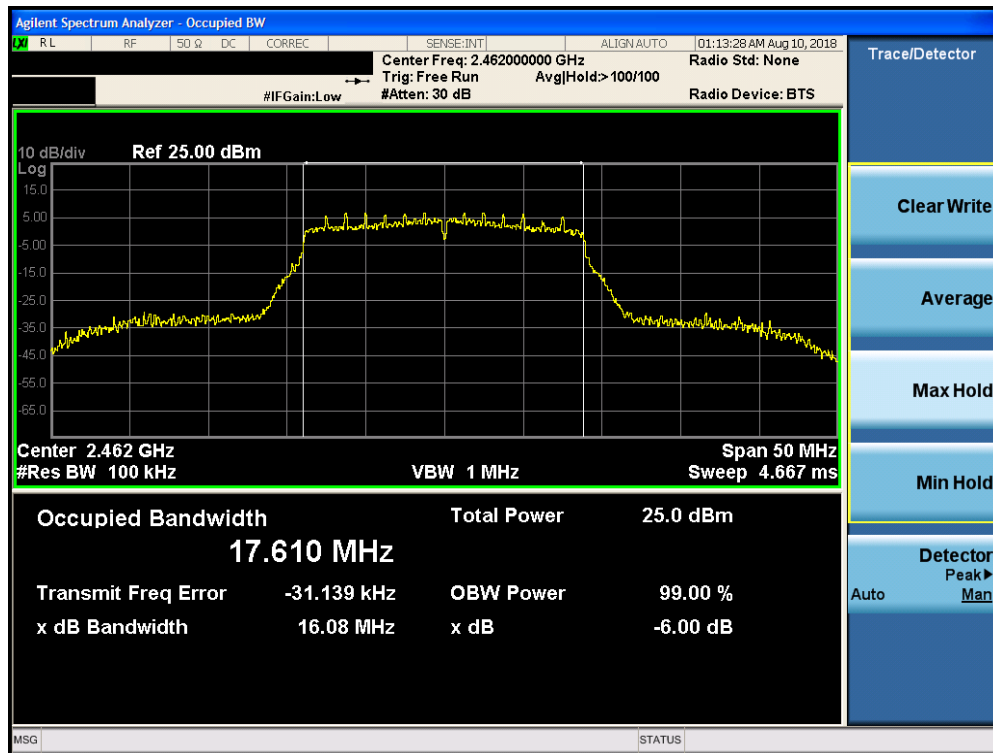

Plot 7-18. 6dB Bandwidth Plot SISO CORE1 PRIMARY (802.11n (2.4GHz) – Ch. 11)

|                                            |                                              |                            |                                 |
|--------------------------------------------|----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018          | EUT Type:<br>Tablet Device | Page 24 of 142                  |

## SISO Core 1 Diversity 6 dB Bandwidth Measurements


| Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Bandwidth [MHz] | Minimum Bandwidth [MHz] |
|-----------------|-------------|-------------|------------------|--------------------------|-------------------------|
| 2412            | 1           | b           | 1                | 9.593                    | 0.500                   |
| 2437            | 6           | b           | 1                | 10.060                   | 0.500                   |
| 2462            | 11          | b           | 1                | 9.087                    | 0.500                   |
| 2412            | 1           | g           | 6                | 16.09                    | 0.500                   |
| 2437            | 6           | g           | 6                | 15.78                    | 0.500                   |
| 2462            | 11          | g           | 6                | 15.54                    | 0.500                   |
| 2412            | 1           | n           | 6.5/7.2 (MCS0)   | 17.15                    | 0.500                   |
| 2437            | 6           | n           | 6.5/7.2 (MCS0)   | 16.31                    | 0.500                   |
| 2462            | 11          | n           | 6.5/7.2 (MCS0)   | 16.00                    | 0.500                   |

Table 7-4. SISO Core1 Diversity Conducted Bandwidth Measurements




Plot 7-19. 6dB Bandwidth Plot SISO CORE1 DIVERSITY (802.11b – Ch. 1)

|                                            |                                               |                                       |                                 |
|--------------------------------------------|-----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018           | EUT Type:<br>Tablet Device            | Page 25 of 142                  |

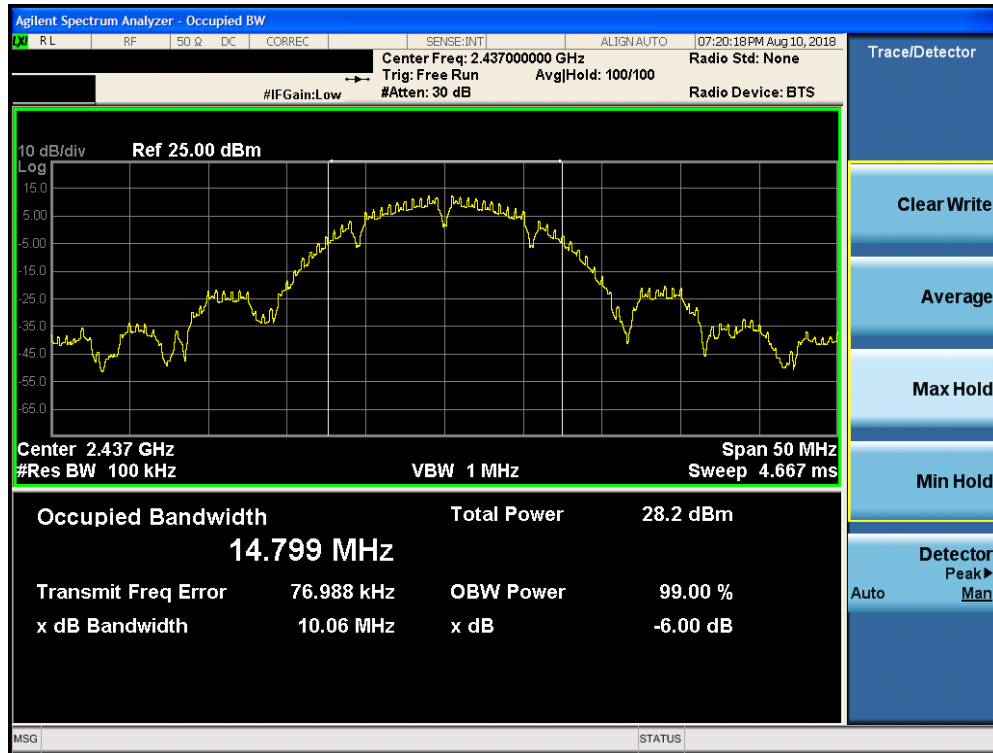


Plot 7-20. 6dB Bandwidth Plot SISO CORE1 DIVERSITY (802.11b – Ch. 6)

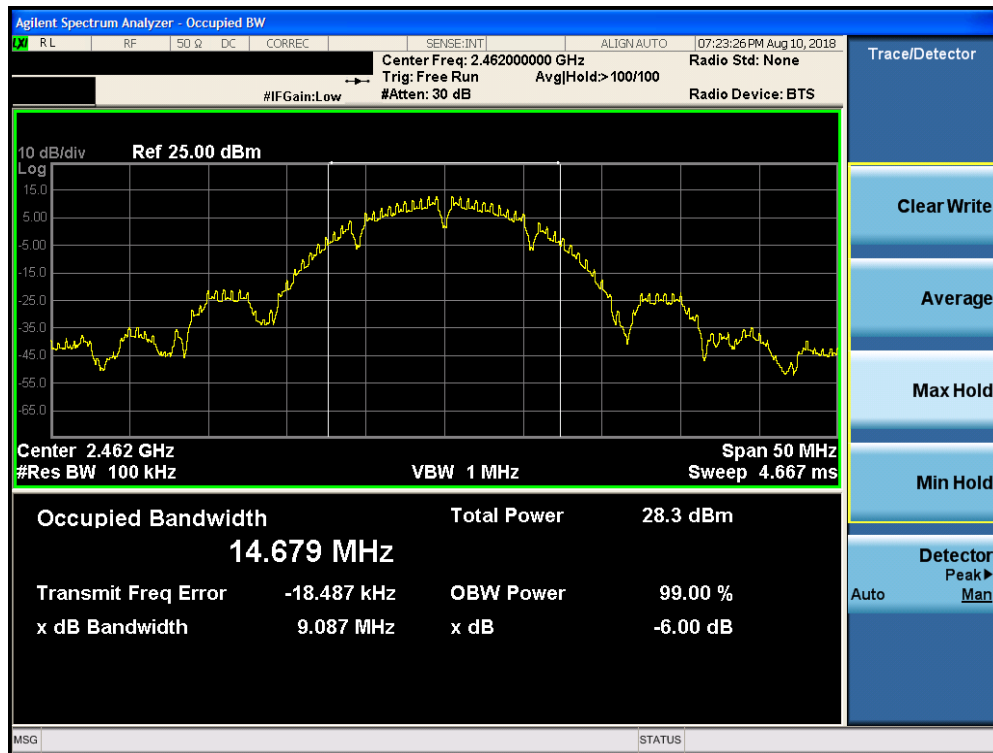


Plot 7-21. 6dB Bandwidth Plot SISO CORE1 DIVERSITY (802.11b – Ch. 11)

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 26 of 142                  |

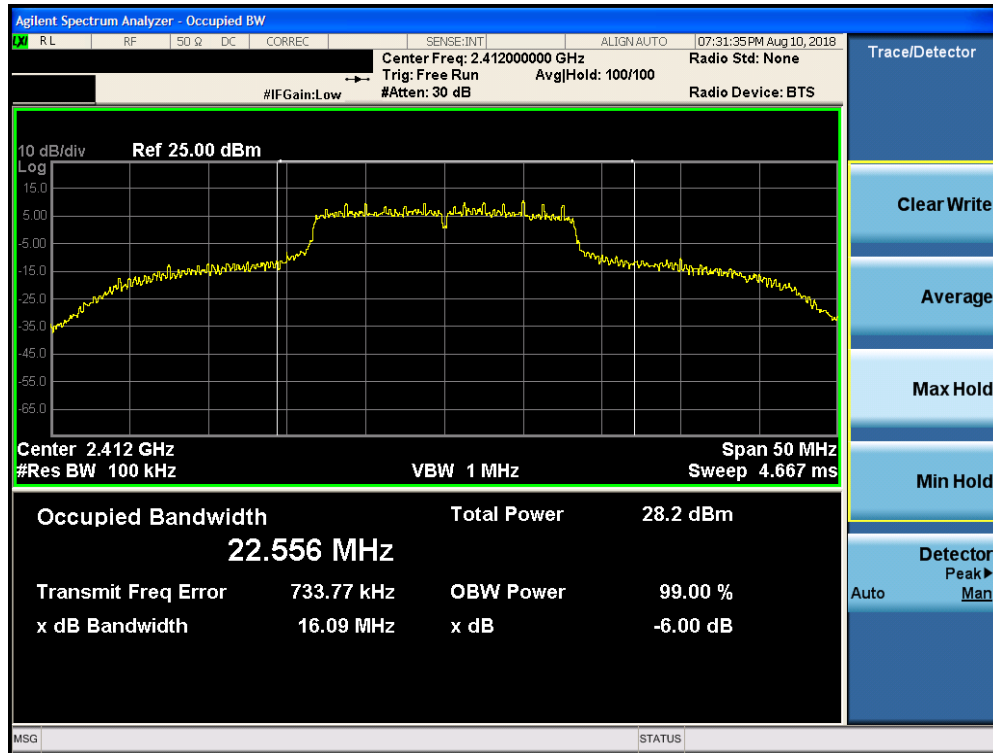


Plot 7-22. 6dB Bandwidth Plot SISO CORE1 DIVERSITY (802.11g – Ch. 1)

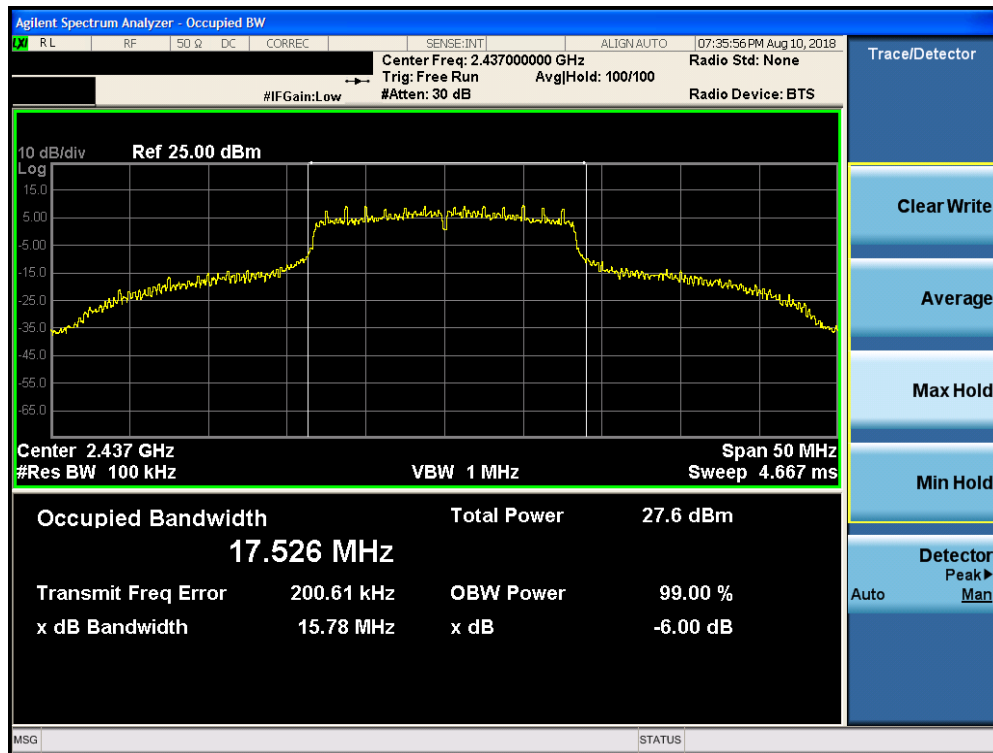


Plot 7-23. 6dB Bandwidth Plot SISO CORE1 DIVERSITY (802.11g – Ch. 6)

|                                            |                                               |                            |                                 |
|--------------------------------------------|-----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018           | EUT Type:<br>Tablet Device | Page 27 of 142                  |

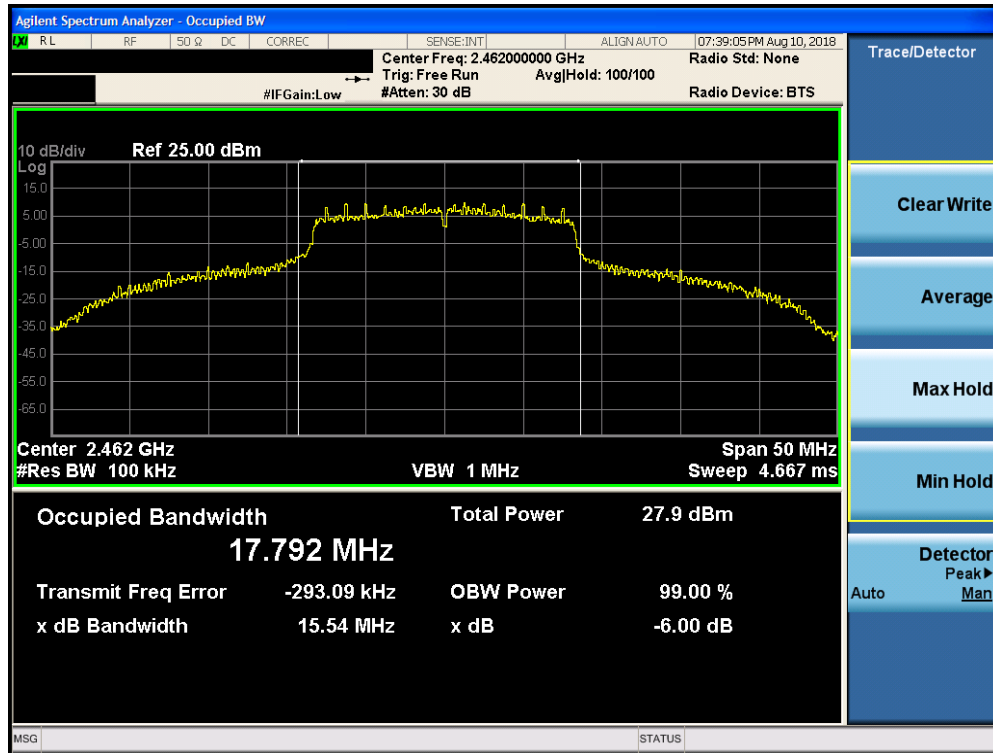


Plot 7-24. 6dB Bandwidth Plot SISO CORE1 DIVERSITY (802.11g – Ch. 11)

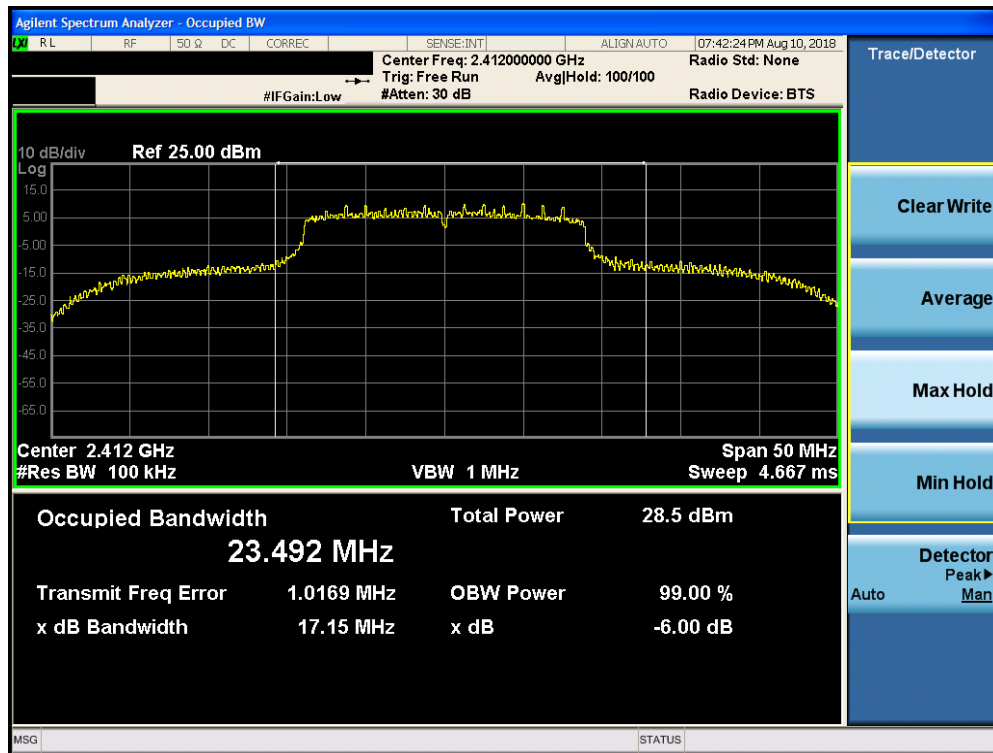


Plot 7-25. 6dB Bandwidth Plot SISO CORE1 DIVERSITY (802.11n (2.4GHz) – Ch. 1)

|                                            |                                               |                            |                                 |
|--------------------------------------------|-----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018           | EUT Type:<br>Tablet Device | Page 28 of 142                  |

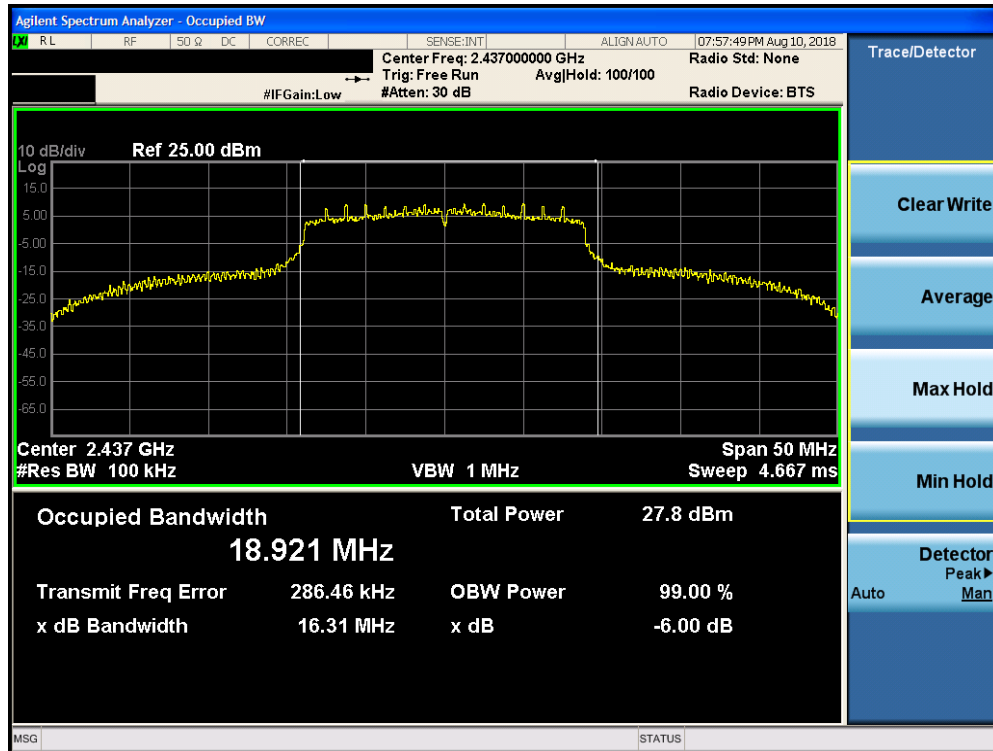

Plot 7-26. 6dB Bandwidth Plot SISO CORE1 DIVERSITY (802.11n (2.4GHz) – Ch. 6)

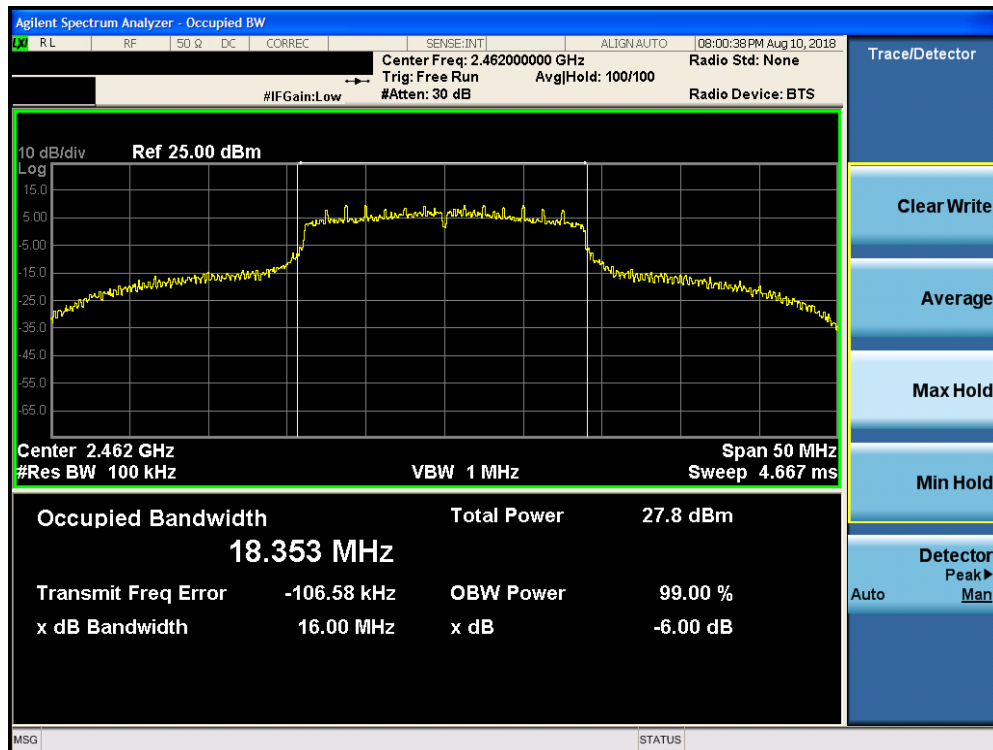

Plot 7-27. 6dB Bandwidth Plot SISO CORE1 DIVERSITY (802.11n (2.4GHz) – Ch. 11)

|                                            |                                               |                            |                                 |
|--------------------------------------------|-----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018           | EUT Type:<br>Tablet Device | Page 29 of 142                  |

### 7.3 Output Power Measurement

§15.247(b.3); RSS-247 [5.4]

#### Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

***The maximum permissible conducted output power is 1 Watt.***

#### Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3 PKPM1 Peak Power Method  
KDB 558074 D01 v05 – Section 9.1.3 PKPM1 Peak Power Method  
ANSI C63.10-2013 – Section 11.9.2.3.2 Method AVGPM-G  
KDB 558074 D01 v05 – Section 9.2.3.2 Method AVGPM-G

#### Test Settings

##### Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

##### Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.



**Figure 7-2. Test Instrument & Measurement Setup for Power Meter Measurements**

#### Test Notes

None

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 30 of 142                  |

### 7.3.1 Average Output Power Measurement

§15.247(b.3), RSS-247 [5.4(d)]

| Freq [MHz] | Channel | Detector | IEEE Transmission Mode |         |         | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|----------|------------------------|---------|---------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
|            |         |          | 802.11b                | 802.11g | 802.11n |                             |                             |                 |                    |                          |                      |
| 2412       | 1       | AVG      | 13.67                  | 13.75   | 13.65   | 30.00                       | -16.25                      | -2.30           | 11.45              | 36.02                    | -24.57               |
| 2417       | 2       | AVG      | 13.75                  | 13.65   | 13.74   | 30.00                       | -16.25                      | -2.30           | 11.45              | 36.02                    | -24.57               |
| 2437       | 6       | AVG      | 13.75                  | 13.65   | 13.73   | 30.00                       | -16.25                      | -2.30           | 11.45              | 36.02                    | -24.57               |
| 2457       | 10      | AVG      | 13.72                  | 13.62   | 13.75   | 30.00                       | -16.25                      | -2.30           | 11.45              | 36.02                    | -24.57               |
| 2462       | 11      | AVG      | 13.75                  | 13.46   | 13.45   | 30.00                       | -16.25                      | -2.30           | 11.45              | 36.02                    | -24.57               |
| 2467       | 12      | AVG      | 13.75                  | 10.50   | 10.45   | 30.00                       | -16.25                      | -2.30           | 11.45              | 36.02                    | -24.57               |
| 2472       | 13      | AVG      | 12.00                  | 0.00    | 0.00    | 30.00                       | -18.00                      | -2.30           | 9.70               | 36.02                    | -26.32               |

Table 7-5. Average Conducted Output Power Measurements SISO Core0

| Freq [MHz] | Channel | Detector | IEEE Transmission Mode |         |         | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|----------|------------------------|---------|---------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
|            |         |          | 802.11b                | 802.11g | 802.11n |                             |                             |                 |                    |                          |                      |
| 2412       | 1       | AVG      | 14.25                  | 13.99   | 14.00   | 30.00                       | -15.75                      | -0.40           | 13.85              | 36.02                    | -22.17               |
| 2417       | 2       | AVG      | 14.25                  | 14.25   | 14.20   | 30.00                       | -15.75                      | -0.40           | 13.85              | 36.02                    | -22.17               |
| 2437       | 6       | AVG      | 14.25                  | 14.25   | 14.25   | 30.00                       | -15.75                      | -0.40           | 13.85              | 36.02                    | -22.17               |
| 2457       | 10      | AVG      | 14.25                  | 14.23   | 14.25   | 30.00                       | -15.75                      | -0.40           | 13.85              | 36.02                    | -22.17               |
| 2462       | 11      | AVG      | 14.25                  | 13.96   | 13.96   | 30.00                       | -15.75                      | -0.40           | 13.85              | 36.02                    | -22.17               |
| 2467       | 12      | AVG      | 14.25                  | 10.50   | 10.50   | 30.00                       | -15.75                      | -0.40           | 13.85              | 36.02                    | -22.17               |
| 2472       | 13      | AVG      | 11.93                  | -0.07   | 0.00    | 30.00                       | -18.07                      | -0.40           | 11.53              | 36.02                    | -24.49               |

Table 7-6. Average Conducted Output Power Measurements SISO Core1 PRIMARY

| Freq [MHz] | Channel | Detector | IEEE Transmission Mode |         |         | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|----------|------------------------|---------|---------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
|            |         |          | 802.11b                | 802.11g | 802.11n |                             |                             |                 |                    |                          |                      |
| 2412       | 1       | AVG      | 18.99                  | 19.00   | 19.00   | 30.00                       | -11.00                      | -15.40          | 3.60               | 36.02                    | -32.42               |
| 2417       | 2       | AVG      | 19.00                  | 18.99   | 18.92   | 30.00                       | -11.00                      | -15.40          | 3.60               | 36.02                    | -32.42               |
| 2437       | 6       | AVG      | 18.91                  | 19.00   | 19.00   | 30.00                       | -11.00                      | -15.40          | 3.60               | 36.02                    | -32.42               |
| 2457       | 10      | AVG      | 19.00                  | 18.96   | 19.00   | 30.00                       | -11.00                      | -15.40          | 3.60               | 36.02                    | -32.42               |
| 2462       | 11      | AVG      | 19.00                  | 18.50   | 18.50   | 30.00                       | -11.00                      | -15.40          | 3.60               | 36.02                    | -32.42               |
| 2467       | 12      | AVG      | 18.92                  | 16.98   | 16.93   | 30.00                       | -11.08                      | -15.40          | 3.52               | 36.02                    | -32.50               |
| 2472       | 13      | AVG      | 19.00                  | 15.99   | 16.00   | 30.00                       | -11.00                      | -15.40          | 3.60               | 36.02                    | -32.42               |

Table 7-7. Average Conducted Output Power Measurements SISO Core1 DIVERSITY

| Freq [MHz] | Channel | Detector | Conducted Power [dBm] |                |       | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Directional Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|----------|-----------------------|----------------|-------|-----------------------------|-----------------------------|-----------------------------|--------------------|--------------------------|----------------------|
|            |         |          | Core 0                | Core 1 Primary | CDD   |                             |                             |                             |                    |                          |                      |
| 2412       | 1       | AVG      | 13.71                 | 13.97          | 16.85 | 30.00                       | -13.15                      | 1.71                        | 18.56              | 36.02                    | -17.46               |
| 2417       | 2       | AVG      | 13.66                 | 14.20          | 16.95 | 30.00                       | -13.05                      | 1.71                        | 18.66              | 36.02                    | -17.36               |
| 2437       | 6       | AVG      | 13.69                 | 14.25          | 16.99 | 30.00                       | -13.01                      | 1.71                        | 18.70              | 36.02                    | -17.32               |
| 2457       | 10      | AVG      | 13.75                 | 14.25          | 17.02 | 30.00                       | -12.98                      | 1.71                        | 18.73              | 36.02                    | -17.29               |
| 2462       | 11      | AVG      | 13.44                 | 13.50          | 16.48 | 30.00                       | -13.52                      | 1.71                        | 18.19              | 36.02                    | -17.83               |
| 2467       | 12      | AVG      | 10.50                 | 8.50           | 12.64 | 30.00                       | -17.36                      | 1.71                        | 14.35              | 36.02                    | -21.67               |
| 2472       | 13      | AVG      | 0.00                  | -1.50          | 2.32  | 30.00                       | -27.68                      | 1.71                        | 4.04               | 36.02                    | -31.98               |

Table 7-8. Average Conducted Output Power Measurements CDD PRIMARY (802.11g)

|                                            |                                                                                                                                  |                            |                                 |
|--------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                              | EUT Type:<br>Tablet Device | Page 31 of 142                  |

| Freq [MHz] | Channel | Detector | Conducted Power [dBm] |                |       | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Directional Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|----------|-----------------------|----------------|-------|-----------------------------|-----------------------------|-----------------------------|--------------------|--------------------------|----------------------|
|            |         |          | Core 0                | Core 1 Primary | CDD   |                             |                             |                             |                    |                          |                      |
| 2412       | 1       | AVG      | 13.68                 | 14.00          | 16.85 | 30.00                       | -13.15                      | 1.71                        | 18.57              | 36.02                    | -17.46               |
| 2417       | 2       | AVG      | 13.75                 | 14.23          | 17.01 | 30.00                       | -12.99                      | 1.71                        | 18.72              | 36.02                    | -17.30               |
| 2437       | 6       | AVG      | 13.75                 | 14.21          | 17.00 | 30.00                       | -13.00                      | 1.71                        | 18.71              | 36.02                    | -17.31               |
| 2457       | 10      | AVG      | 13.71                 | 14.25          | 17.00 | 30.00                       | -13.00                      | 1.71                        | 18.71              | 36.02                    | -17.31               |
| 2462       | 11      | AVG      | 13.48                 | 13.40          | 16.45 | 30.00                       | -13.55                      | 1.71                        | 18.16              | 36.02                    | -17.86               |
| 2467       | 12      | AVG      | 10.46                 | 8.43           | 12.57 | 30.00                       | -17.43                      | 1.71                        | 14.28              | 36.02                    | -21.74               |
| 2472       | 13      | AVG      | -0.02                 | -1.50          | 2.31  | 30.00                       | -27.69                      | 1.71                        | 4.03               | 36.02                    | -32.00               |

**Table 7-9. Average Conducted Output Power Measurements CDD PRIMARY (802.11n)**

| Freq [MHz] | Channel | Detector | Conducted Power [dBm] |                  |       | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Directional Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|----------|-----------------------|------------------|-------|-----------------------------|-----------------------------|-----------------------------|--------------------|--------------------------|----------------------|
|            |         |          | Core 0                | Core 1 Diversity | CDD   |                             |                             |                             |                    |                          |                      |
| 2412       | 1       | AVG      | 13.75                 | 18.93            | 20.08 | 30.00                       | -9.92                       | -3.57                       | 16.51              | 36.02                    | -19.51               |
| 2417       | 2       | AVG      | 13.74                 | 18.94            | 20.09 | 30.00                       | -9.91                       | -3.57                       | 16.51              | 36.02                    | -19.51               |
| 2437       | 6       | AVG      | 13.69                 | 19.00            | 20.12 | 30.00                       | -9.88                       | -3.57                       | 16.55              | 36.02                    | -19.47               |
| 2457       | 10      | AVG      | 13.75                 | 18.91            | 20.07 | 30.00                       | -9.93                       | -3.57                       | 16.49              | 36.02                    | -19.53               |
| 2462       | 11      | AVG      | 13.50                 | 17.48            | 18.94 | 30.00                       | -11.06                      | -3.57                       | 15.37              | 36.02                    | -20.65               |
| 2467       | 12      | AVG      | 10.50                 | 8.45             | 12.61 | 30.00                       | -17.39                      | -3.57                       | 9.03               | 36.02                    | -26.99               |
| 2472       | 13      | AVG      | -0.07                 | -1.50            | 2.28  | 30.00                       | -27.72                      | -3.57                       | -1.29              | 36.02                    | -37.31               |

**Table 7-10. Average Conducted Output Power Measurements CDD DIVERSITY (802.11g)**

| Freq [MHz] | Channel | Detector | Conducted Power [dBm] |                  |       | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Directional Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|----------|-----------------------|------------------|-------|-----------------------------|-----------------------------|-----------------------------|--------------------|--------------------------|----------------------|
|            |         |          | Core 0                | Core 1 Diversity | CDD   |                             |                             |                             |                    |                          |                      |
| 2412       | 1       | AVG      | 13.68                 | 19.00            | 20.12 | 30.00                       | -9.88                       | -3.57                       | 16.54              | 36.02                    | -19.48               |
| 2417       | 2       | AVG      | 13.73                 | 18.92            | 20.07 | 30.00                       | -9.93                       | -3.57                       | 16.49              | 36.02                    | -19.53               |
| 2437       | 6       | AVG      | 13.75                 | 19.00            | 20.13 | 30.00                       | -9.87                       | -3.57                       | 16.56              | 36.02                    | -19.46               |
| 2457       | 10      | AVG      | 13.69                 | 18.90            | 20.04 | 30.00                       | -9.96                       | -3.57                       | 16.47              | 36.02                    | -19.55               |
| 2462       | 11      | AVG      | 13.46                 | 17.50            | 18.94 | 30.00                       | -11.06                      | -3.57                       | 15.37              | 36.02                    | -20.65               |
| 2467       | 12      | AVG      | 10.47                 | 8.44             | 12.58 | 30.00                       | -17.42                      | -3.57                       | 9.01               | 36.02                    | -27.01               |
| 2472       | 13      | AVG      | 0.00                  | -1.50            | 2.32  | 30.00                       | -27.68                      | -3.57                       | -1.25              | 36.02                    | -37.27               |

**Table 7-11. Average Conducted Output Power Measurements CDD DIVERSITY (802.11n)**

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 32 of 142                  |

## 7.3.2 Peak Output Power Measurement

§15.247(b.3); RSS-247 [5.4]

| Freq [MHz] | Channel | Detector | IEEE Transmission Mode |         |         | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|----------|------------------------|---------|---------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
|            |         |          | 802.11b                | 802.11g | 802.11n |                             |                             |                 |                    |                          |                      |
| 2412       | 1       | PEAK     | 16.04                  | 20.65   | 20.82   | 30.00                       | -9.18                       | -2.30           | 18.52              | 36.02                    | -17.50               |
| 2417       | 2       | PEAK     | 16.33                  | 20.12   | 20.60   | 30.00                       | -9.40                       | -2.30           | 18.30              | 36.02                    | -17.72               |
| 2437       | 6       | PEAK     | 16.27                  | 20.14   | 20.57   | 30.00                       | -9.43                       | -2.30           | 18.27              | 36.02                    | -17.75               |
| 2457       | 10      | PEAK     | 16.08                  | 20.02   | 20.47   | 30.00                       | -9.53                       | -2.30           | 18.17              | 36.02                    | -17.85               |
| 2462       | 11      | PEAK     | 16.28                  | 20.31   | 20.94   | 30.00                       | -9.06                       | -2.30           | 18.64              | 36.02                    | -17.38               |
| 2467       | 12      | PEAK     | 16.27                  | 16.95   | 17.20   | 30.00                       | -12.80                      | -2.30           | 14.90              | 36.02                    | -21.12               |
| 2472       | 13      | PEAK     | 14.48                  | 6.70    | 7.00    | 30.00                       | -15.52                      | -2.30           | 12.18              | 36.02                    | -23.84               |

**Table 7-12. Peak Conducted Output Power Measurements SISO CORE0**

| Freq [MHz] | Channel | Detector | IEEE Transmission Mode |         |         | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|----------|------------------------|---------|---------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
|            |         |          | 802.11b                | 802.11g | 802.11n |                             |                             |                 |                    |                          |                      |
| 2412       | 1       | PEAK     | 16.67                  | 20.83   | 21.08   | 30.00                       | -8.92                       | -0.40           | 20.68              | 36.02                    | -15.34               |
| 2417       | 2       | PEAK     | 16.75                  | 19.37   | 19.57   | 30.00                       | -10.43                      | -0.40           | 19.17              | 36.02                    | -16.85               |
| 2437       | 6       | PEAK     | 16.74                  | 20.60   | 20.97   | 30.00                       | -9.03                       | -0.40           | 20.57              | 36.02                    | -15.45               |
| 2457       | 10      | PEAK     | 16.66                  | 19.41   | 19.74   | 30.00                       | -10.26                      | -0.40           | 19.34              | 36.02                    | -16.68               |
| 2462       | 11      | PEAK     | 16.84                  | 19.03   | 19.30   | 30.00                       | -10.70                      | -0.40           | 18.90              | 36.02                    | -17.12               |
| 2467       | 12      | PEAK     | 16.74                  | 15.82   | 15.87   | 30.00                       | -13.26                      | -0.40           | 16.34              | 36.02                    | -19.68               |
| 2472       | 13      | PEAK     | 14.33                  | 5.27    | 5.59    | 30.00                       | -15.67                      | -0.40           | 13.93              | 36.02                    | -22.09               |

**Table 7-13. Peak Conducted Output Power Measurements SISO CORE1 PRIMARY**

| Freq [MHz] | Channel | Detector | IEEE Transmission Mode |         |         | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|----------|------------------------|---------|---------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
|            |         |          | 802.11b                | 802.11g | 802.11n |                             |                             |                 |                    |                          |                      |
| 2412       | 1       | PEAK     | 21.21                  | 22.55   | 22.67   | 30.00                       | -7.33                       | -15.40          | 7.27               | 36.02                    | -28.75               |
| 2417       | 2       | PEAK     | 21.29                  | 23.10   | 23.16   | 30.00                       | -6.84                       | -15.40          | 7.76               | 36.02                    | -28.26               |
| 2437       | 6       | PEAK     | 21.22                  | 23.32   | 23.36   | 30.00                       | -6.64                       | -15.40          | 7.96               | 36.02                    | -28.06               |
| 2457       | 10      | PEAK     | 21.32                  | 22.67   | 22.80   | 30.00                       | -7.20                       | -15.40          | 7.40               | 36.02                    | -28.62               |
| 2462       | 11      | PEAK     | 21.38                  | 22.49   | 22.59   | 30.00                       | -7.41                       | -15.40          | 7.19               | 36.02                    | -28.83               |
| 2467       | 12      | PEAK     | 21.22                  | 21.61   | 21.71   | 30.00                       | -8.29                       | -15.40          | 6.31               | 36.02                    | -29.71               |
| 2472       | 13      | PEAK     | 21.24                  | 21.01   | 21.24   | 30.00                       | -8.76                       | -15.40          | 5.84               | 36.02                    | -30.18               |

**Table 7-14. Peak Conducted Output Power Measurements SISO CORE1 DIVERSITY**

| Freq [MHz] | Channel | Detector | Conducted Power [dBm] |                |       | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Directional Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|----------|-----------------------|----------------|-------|-----------------------------|-----------------------------|-----------------------------|--------------------|--------------------------|----------------------|
|            |         |          | Core 0                | Core 1 Primary | CDD   |                             |                             |                             |                    |                          |                      |
| 2412       | 1       | PEAK     | 19.23                 | 20.94          | 23.18 | 30.00                       | -6.82                       | 1.71                        | 24.89              | 36.02                    | -11.13               |
| 2417       | 2       | PEAK     | 19.01                 | 19.45          | 22.25 | 30.00                       | -7.75                       | 1.71                        | 23.96              | 36.02                    | -12.06               |
| 2437       | 6       | PEAK     | 19.03                 | 19.65          | 22.36 | 30.00                       | -7.64                       | 1.71                        | 24.07              | 36.02                    | -11.95               |
| 2457       | 10      | PEAK     | 19.13                 | 19.56          | 22.36 | 30.00                       | -7.64                       | 1.71                        | 24.07              | 36.02                    | -11.95               |
| 2462       | 11      | PEAK     | 18.67                 | 20.41          | 22.64 | 30.00                       | -7.36                       | 1.71                        | 24.35              | 36.02                    | -11.67               |
| 2467       | 12      | PEAK     | 15.70                 | 13.76          | 17.85 | 30.00                       | -12.15                      | 1.71                        | 19.56              | 36.02                    | -16.46               |
| 2472       | 13      | PEAK     | 5.21                  | 3.94           | 7.63  | 30.00                       | -22.37                      | 1.71                        | 9.34               | 36.02                    | -26.68               |

**Table 7-15. Peak Conducted Output Power Measurements CDD PRIMARY (802.11g)**

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 33 of 142                  |

| Freq [MHz] | Channel | Detector | Conducted Power [dBm] |                |       | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Directional Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|----------|-----------------------|----------------|-------|-----------------------------|-----------------------------|-----------------------------|--------------------|--------------------------|----------------------|
|            |         |          | Core 0                | Core 1 Primary | CDD   |                             |                             |                             |                    |                          |                      |
| 2412       | 1       | PEAK     | 19.32                 | 21.29          | 23.43 | 30.00                       | -6.57                       | 1.71                        | 25.14              | 36.02                    | -10.88               |
| 2417       | 2       | PEAK     | 19.13                 | 19.54          | 22.35 | 30.00                       | -7.65                       | 1.71                        | 24.06              | 36.02                    | -11.96               |
| 2437       | 6       | PEAK     | 19.23                 | 19.52          | 22.39 | 30.00                       | -7.61                       | 1.71                        | 24.10              | 36.02                    | -11.92               |
| 2457       | 10      | PEAK     | 19.19                 | 19.63          | 22.43 | 30.00                       | -7.57                       | 1.71                        | 24.14              | 36.02                    | -11.88               |
| 2462       | 11      | PEAK     | 18.80                 | 20.75          | 22.89 | 30.00                       | -7.11                       | 1.71                        | 24.61              | 36.02                    | -11.41               |
| 2467       | 12      | PEAK     | 15.74                 | 13.77          | 17.88 | 30.00                       | -12.12                      | 1.71                        | 19.59              | 36.02                    | -16.43               |
| 2472       | 13      | PEAK     | 5.62                  | 4.11           | 7.94  | 30.00                       | -22.06                      | 1.71                        | 9.65               | 36.02                    | -26.37               |

**Table 7-16. Peak Conducted Output Power Measurements CDD PRIMARY (802.11n)**

| Freq [MHz] | Channel | Detector | Conducted Power [dBm] |                  |       | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Directional Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|----------|-----------------------|------------------|-------|-----------------------------|-----------------------------|-----------------------------|--------------------|--------------------------|----------------------|
|            |         |          | Core 0                | Core 1 Diversity | CDD   |                             |                             |                             |                    |                          |                      |
| 2412       | 1       | PEAK     | 19.31                 | 22.82            | 24.42 | 30.00                       | -5.58                       | -3.57                       | 20.85              | 36.02                    | -15.17               |
| 2417       | 2       | PEAK     | 19.14                 | 22.62            | 24.23 | 30.00                       | -5.77                       | -3.57                       | 20.66              | 36.02                    | -15.36               |
| 2437       | 6       | PEAK     | 19.03                 | 22.86            | 24.36 | 30.00                       | -5.64                       | -3.57                       | 20.79              | 36.02                    | -15.23               |
| 2457       | 10      | PEAK     | 19.10                 | 22.82            | 24.36 | 30.00                       | -5.64                       | -3.57                       | 20.78              | 36.02                    | -15.24               |
| 2462       | 11      | PEAK     | 18.79                 | 22.45            | 24.00 | 30.00                       | -6.00                       | -3.57                       | 20.43              | 36.02                    | -15.59               |
| 2467       | 12      | PEAK     | 15.85                 | 13.65            | 17.90 | 30.00                       | -12.10                      | -3.57                       | 14.32              | 36.02                    | -21.70               |
| 2472       | 13      | PEAK     | 5.44                  | 3.93             | 7.76  | 30.00                       | -22.24                      | -3.57                       | 4.19               | 36.02                    | -31.83               |

**Table 7-17. Peak Conducted Output Power Measurements CDD DIVERSITY (802.11g)**

| Freq [MHz] | Channel | Detector | Conducted Power [dBm] |                  |       | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Directional Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|----------|-----------------------|------------------|-------|-----------------------------|-----------------------------|-----------------------------|--------------------|--------------------------|----------------------|
|            |         |          | Core 0                | Core 1 Diversity | CDD   |                             |                             |                             |                    |                          |                      |
| 2412       | 1       | PEAK     | 19.35                 | 23.00            | 24.56 | 30.00                       | -5.44                       | -3.57                       | 20.98              | 36.02                    | -15.04               |
| 2417       | 2       | PEAK     | 19.15                 | 22.65            | 24.25 | 30.00                       | -5.75                       | -3.57                       | 20.68              | 36.02                    | -15.34               |
| 2437       | 6       | PEAK     | 19.23                 | 22.85            | 24.42 | 30.00                       | -5.58                       | -3.57                       | 20.84              | 36.02                    | -15.18               |
| 2457       | 10      | PEAK     | 19.14                 | 22.93            | 24.45 | 30.00                       | -5.55                       | -3.57                       | 20.87              | 36.02                    | -15.15               |
| 2462       | 11      | PEAK     | 18.85                 | 22.65            | 24.16 | 30.00                       | -5.84                       | -3.57                       | 20.59              | 36.02                    | -15.43               |
| 2467       | 12      | PEAK     | 15.71                 | 13.77            | 17.86 | 30.00                       | -12.14                      | -3.57                       | 14.28              | 36.02                    | -21.74               |
| 2472       | 13      | PEAK     | 5.67                  | 4.01             | 7.93  | 30.00                       | -22.07                      | -3.57                       | 4.36               | 36.02                    | -31.67               |

**Table 7-18. Peak Conducted Output Power Measurements CDD DIVERSITY (802.11n)**

#### Note:

Per ANSI C63.10-2013 and KDB 662911 D01 v02r01 Section E)1), the conducted powers at Core0 and Core1 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

#### Sample MIMO Calculation:

At 2412MHz the average conducted output power was measured to be 13.77 dBm for Core0 and 14.21 dBm for Core1.

$$\text{Core0} + \text{Core1} = \text{MIMO}$$

$$(13.77 \text{ dBm} + 14.21 \text{ dBm}) = (23.82 \text{ mW} + 26.36 \text{ mW}) = 50.19 \text{ mW} = 17.01 \text{ dBm}$$

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 34 of 142                  |

## 7.4 Power Spectral Density

§15.247(e); RSS-247 [5.2]

### Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

***The maximum permissible power spectral density is 8 dBm in any 3 kHz band.***

### Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD  
KDB 558074 D01 v05 – Section 10.2 Method PKPSD

### Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-3. Test Instrument & Measurement Setup**

### Test Notes


None

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 35 of 142                  |

## SISO Core 0 Power Spectral Density Measurements


| Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Power Spectral Density [dBm] | Maximum Permissible Power Density [dBm / 3kHz] | Margin [dB] | Pass / Fail |
|-----------------|-------------|-------------|------------------|---------------------------------------|------------------------------------------------|-------------|-------------|
| 2412            | 1           | b           | 1                | 0.09                                  | 8.00                                           | -7.91       | Pass        |
| 2437            | 6           | b           | 1                | -1.01                                 | 8.00                                           | -9.01       | Pass        |
| 2462            | 11          | b           | 1                | -1.00                                 | 8.00                                           | -9.00       | Pass        |
| 2412            | 1           | g           | 6                | -5.19                                 | 8.00                                           | -13.19      | Pass        |
| 2437            | 6           | g           | 6                | -4.33                                 | 8.00                                           | -12.33      | Pass        |
| 2462            | 11          | g           | 6                | -4.34                                 | 8.00                                           | -12.34      | Pass        |
| 2412            | 1           | n           | 6.5/7.2 (MCS0)   | -5.21                                 | 8.00                                           | -13.21      | Pass        |
| 2437            | 6           | n           | 6.5/7.2 (MCS0)   | -4.88                                 | 8.00                                           | -12.88      | Pass        |
| 2462            | 11          | n           | 6.5/7.2 (MCS0)   | -4.80                                 | 8.00                                           | -12.80      | Pass        |

Table 7-19. SISO Core0 Conducted Power Density Measurements

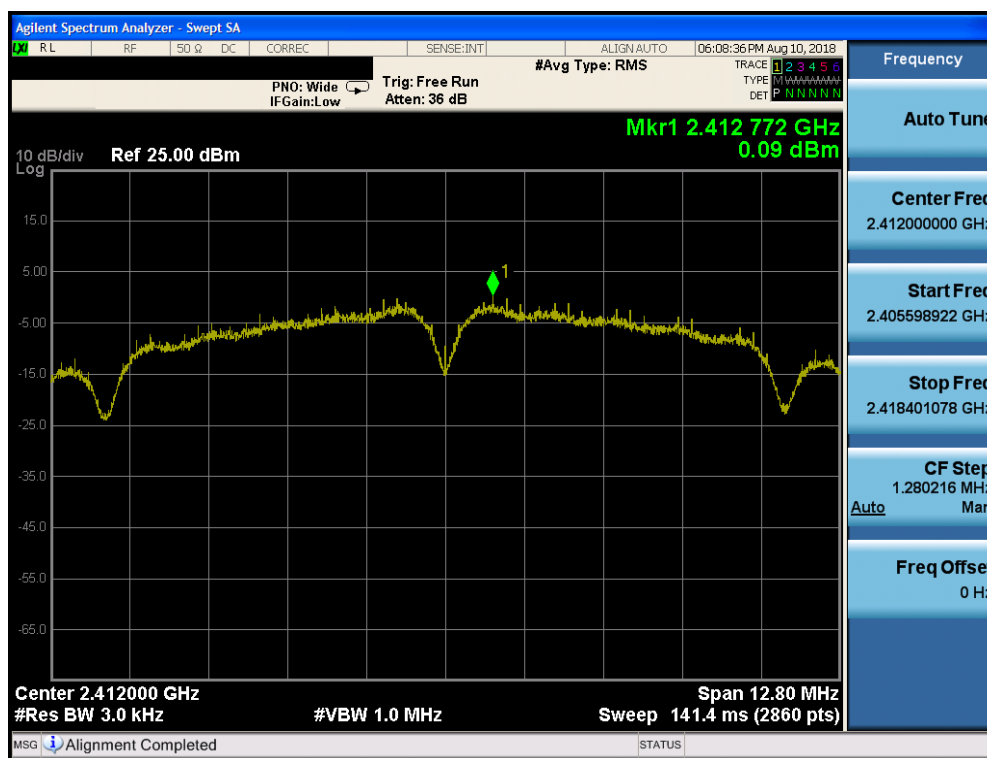


Plot 7-28. Power Spectral Density Plot SISO CORE0 (802.11b - Ch. 1)

|                                            |                                                                                                                                  |                            |                                 |
|--------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                              | EUT Type:<br>Tablet Device | Page 36 of 142                  |

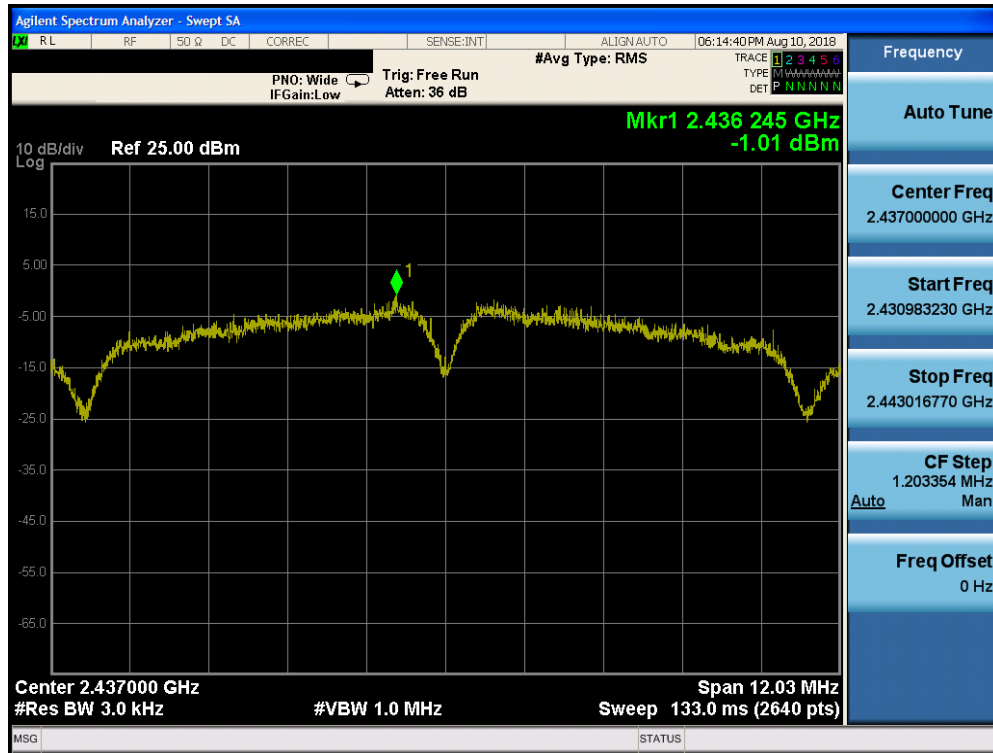


Plot 7-29. Power Spectral Density Plot SISO CORE0 (802.11b – Ch. 6)

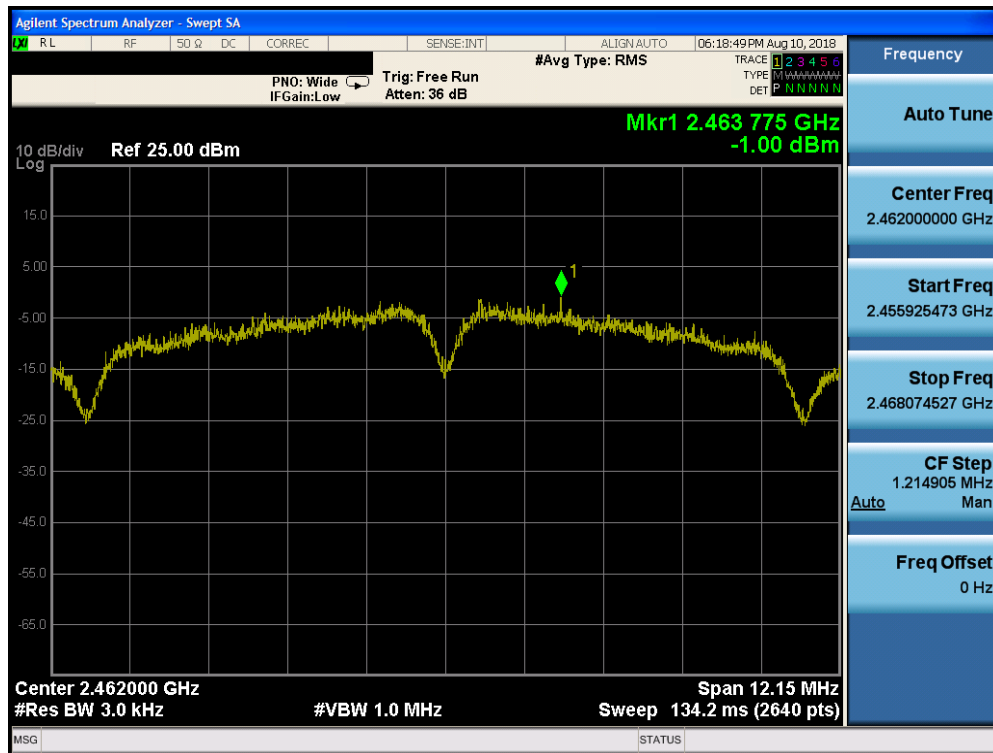


Plot 7-30. Power Spectral Density Plot SISO CORE0 (802.11b – Ch. 11)

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 37 of 142                  |

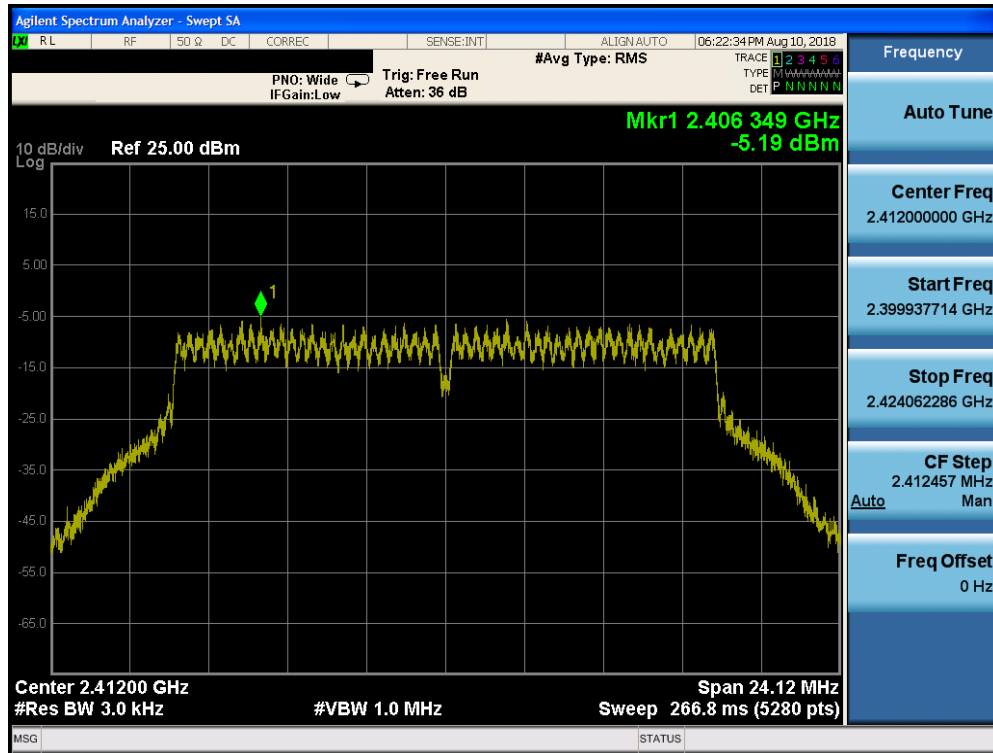


Plot 7-31. Power Spectral Density Plot SISO CORE0 (802.11g – Ch. 1)

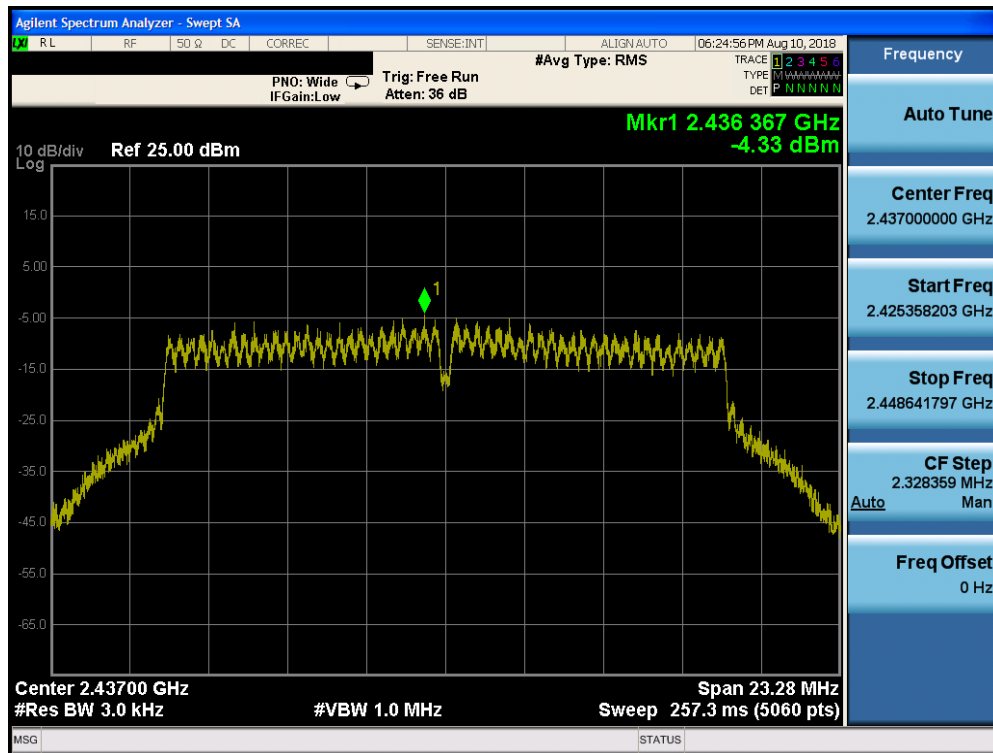


Plot 7-32. Power Spectral Density Plot SISO CORE0 (802.11g – Ch. 6)

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 38 of 142                  |

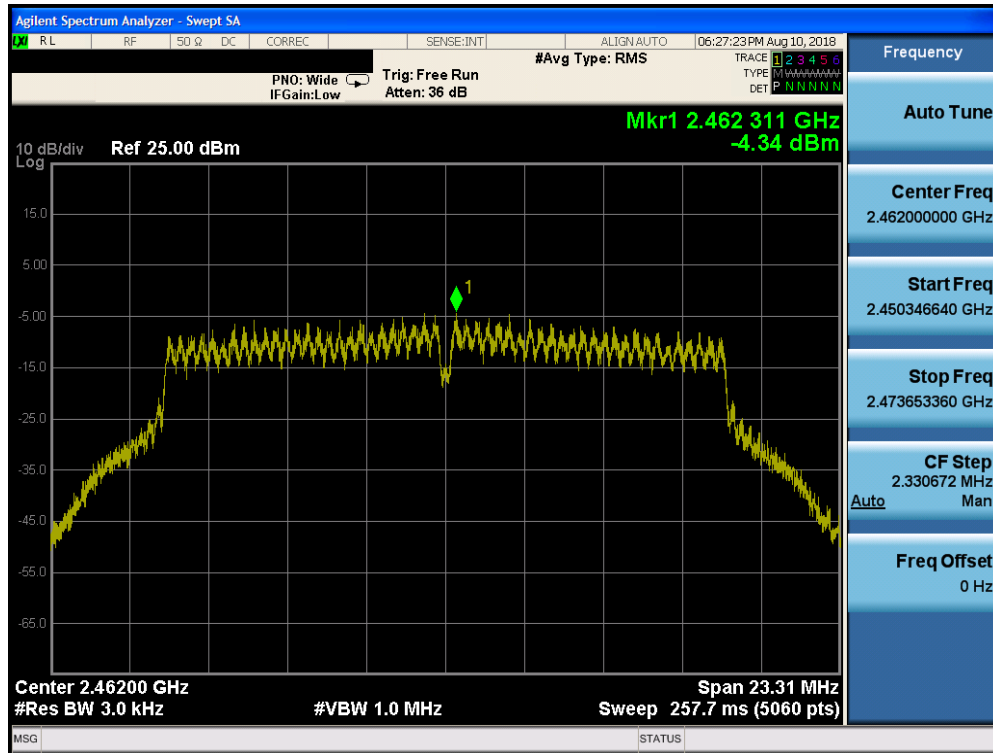


Plot 7-33. Power Spectral Density Plot SISO CORE0 (802.11g – Ch. 11)

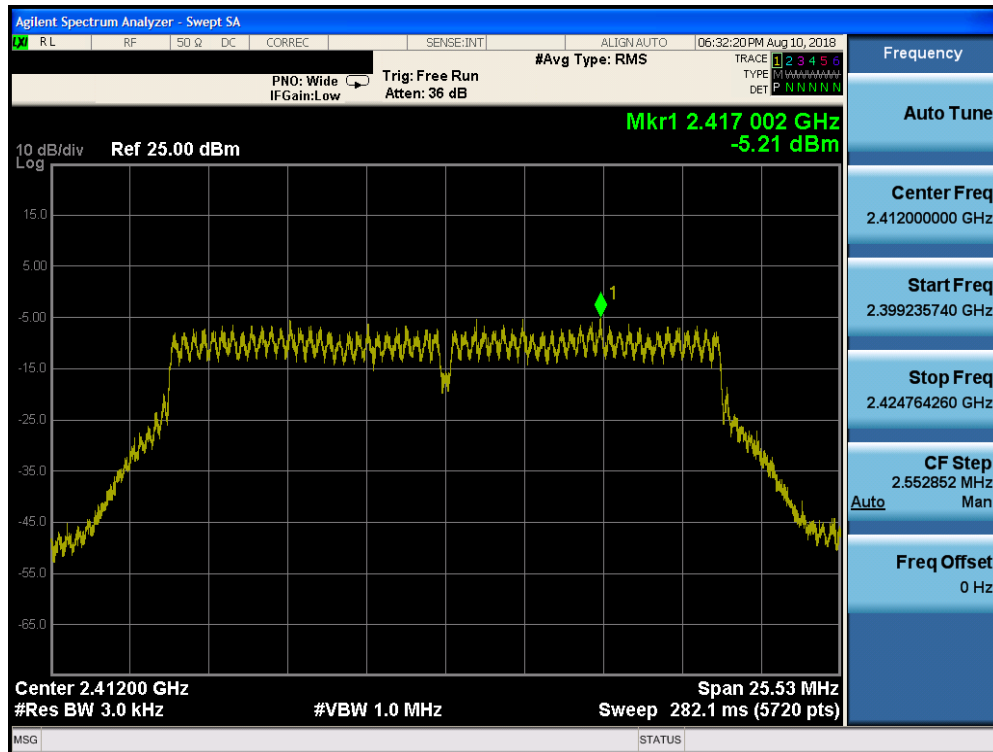


Plot 7-34. Power Spectral Density Plot SISO CORE0 (802.11n (2.4GHz) – Ch. 1)

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 39 of 142                  |

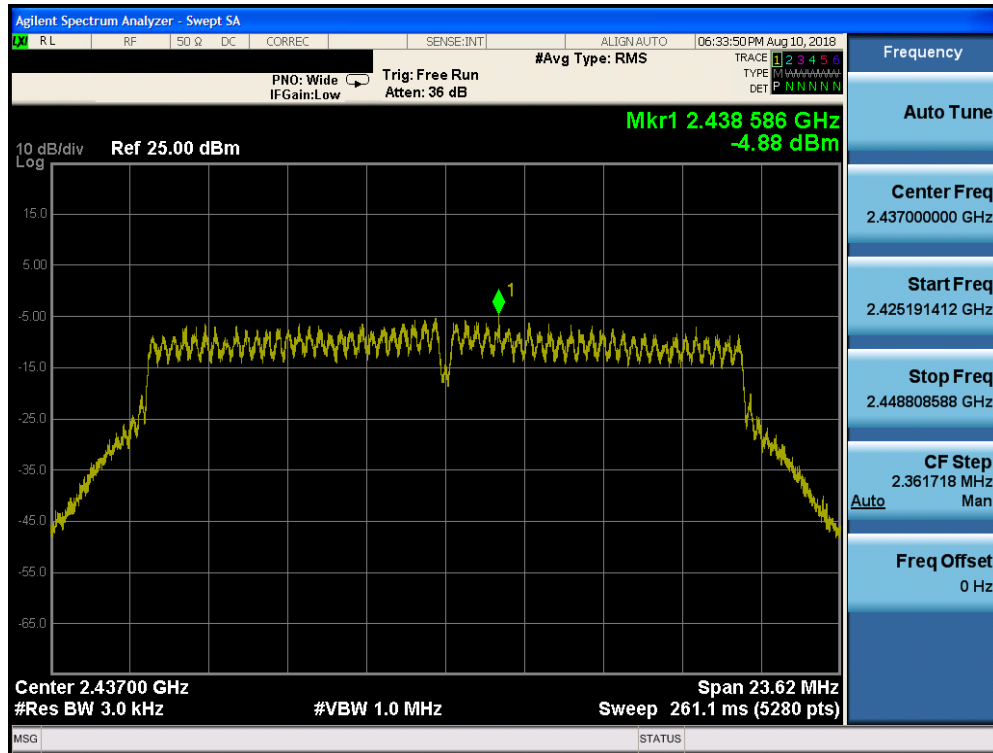

Plot 7-35. Power Spectral Density Plot SISO CORE0 (802.11n (2.4GHz) – Ch. 6)

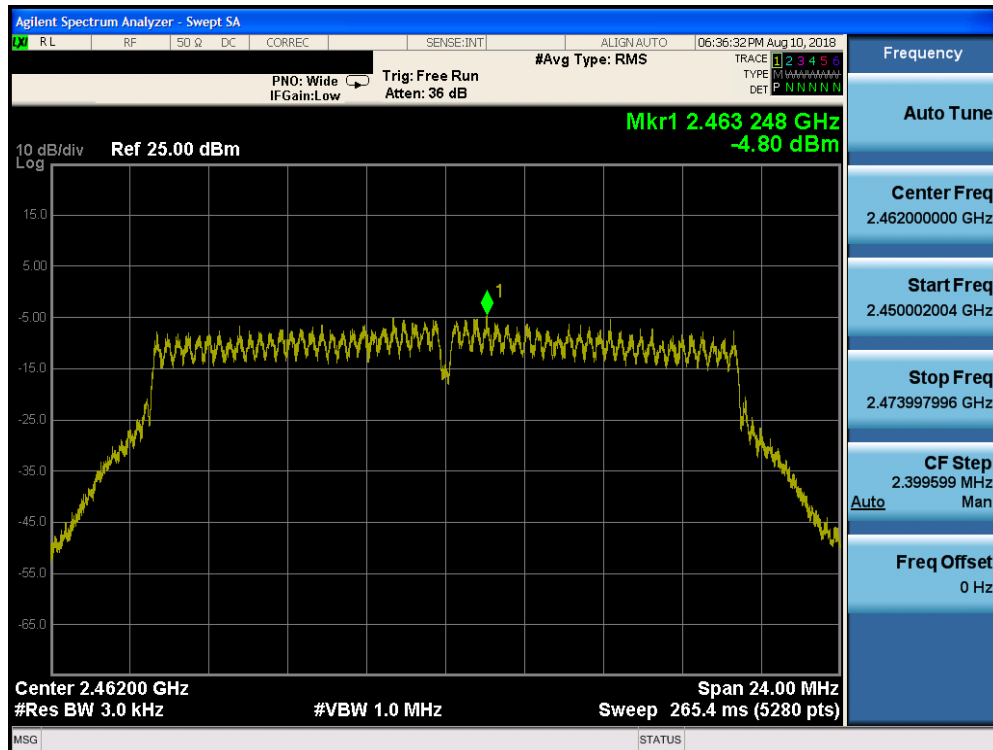


Plot 7-36. Power Spectral Density Plot SISO CORE0 (802.11n (2.4GHz) – Ch. 11)

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 40 of 142                  |


Table 7-20. SISO Core1 Primary Conducted Power Density Measurements



© 2018 PCTEST Engineering Laboratory, Inc. V 8.3 07/10/2018  
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@PCTEST.COM](mailto:INFO@PCTEST.COM).

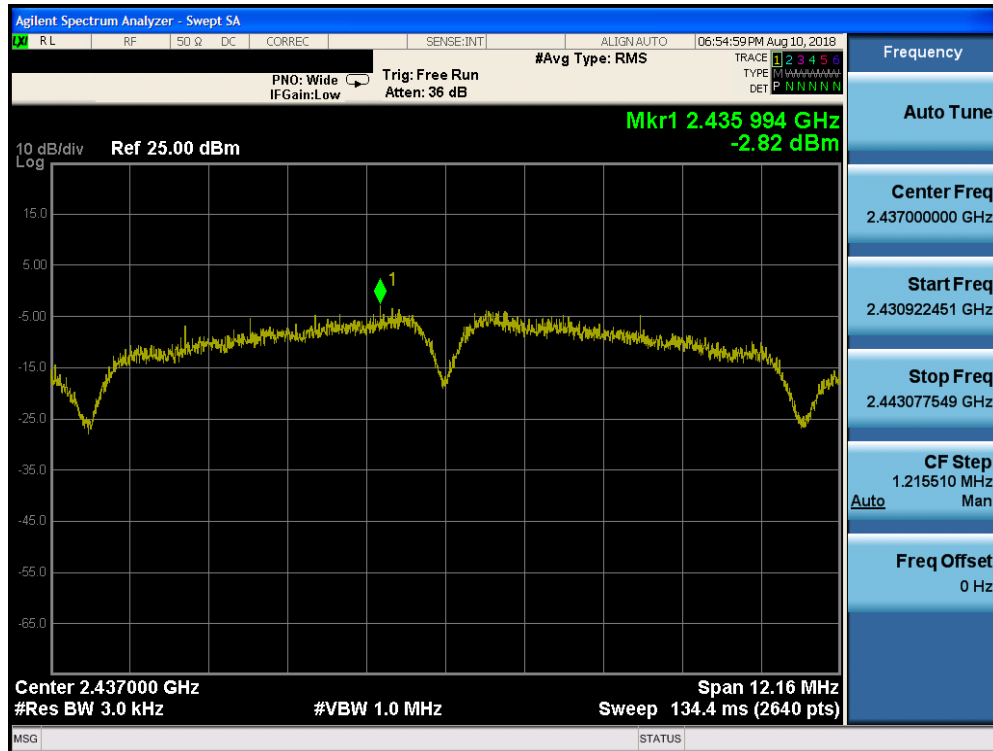


Plot 7-38. Power Spectral Density Plot SISO CORE1 PRIMARY (802.11b – Ch. 6)

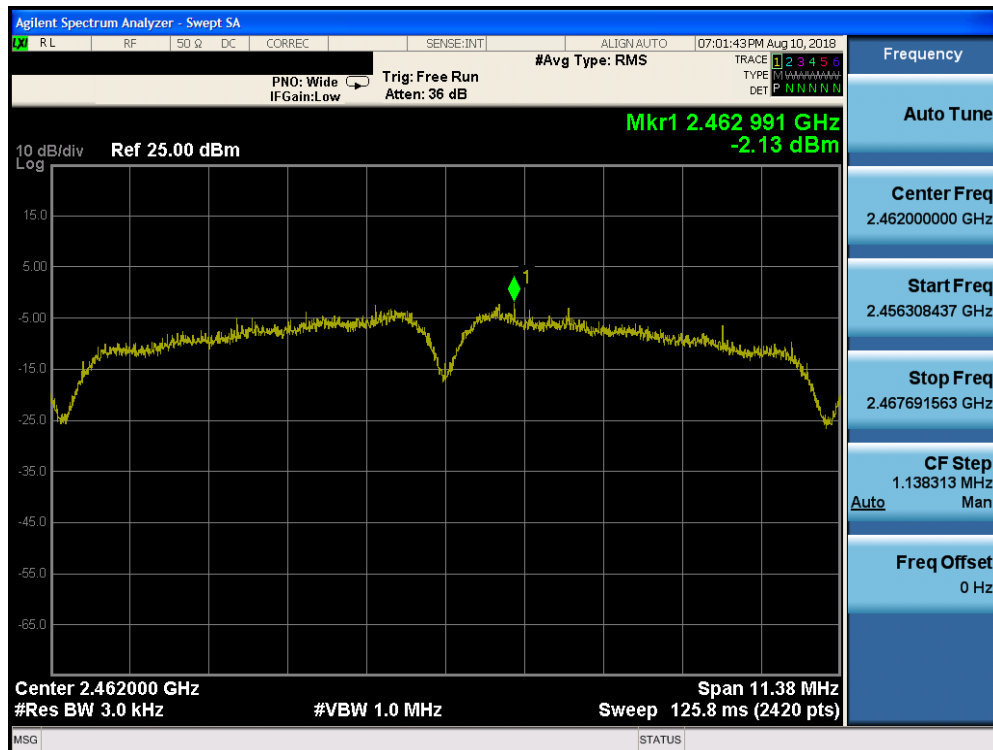


Plot 7-39. Power Spectral Density Plot SISO CORE1 PRIMARY (802.11b – Ch. 11)

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 42 of 142                  |

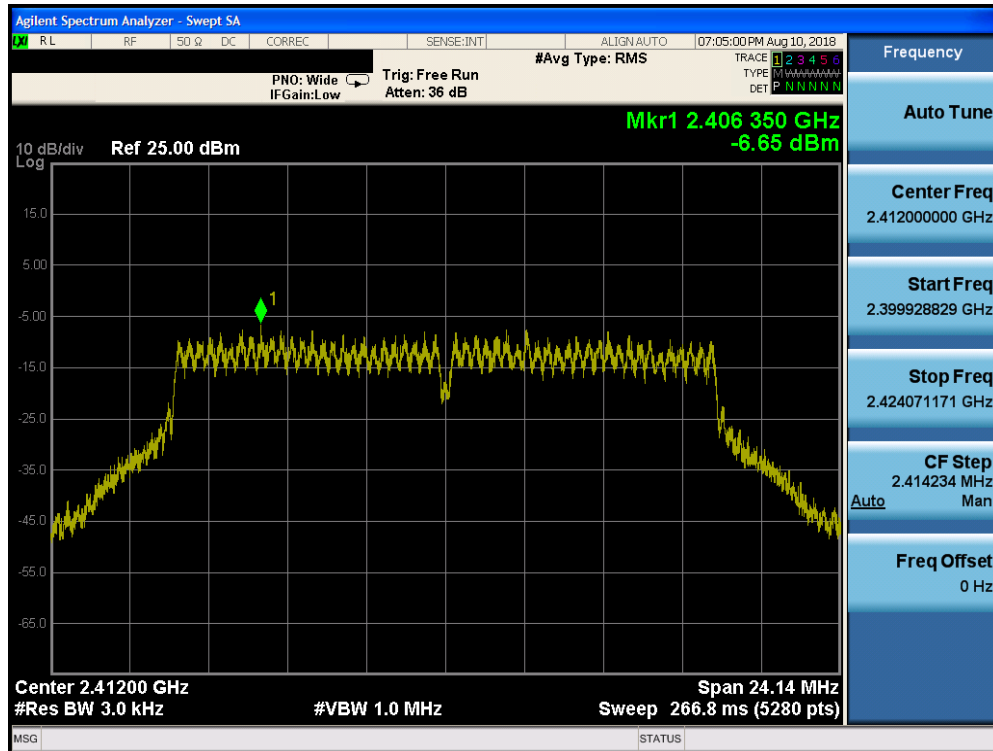


Plot 7-40. Power Spectral Density Plot SISO CORE1 PRIMARY (802.11g – Ch. 1)

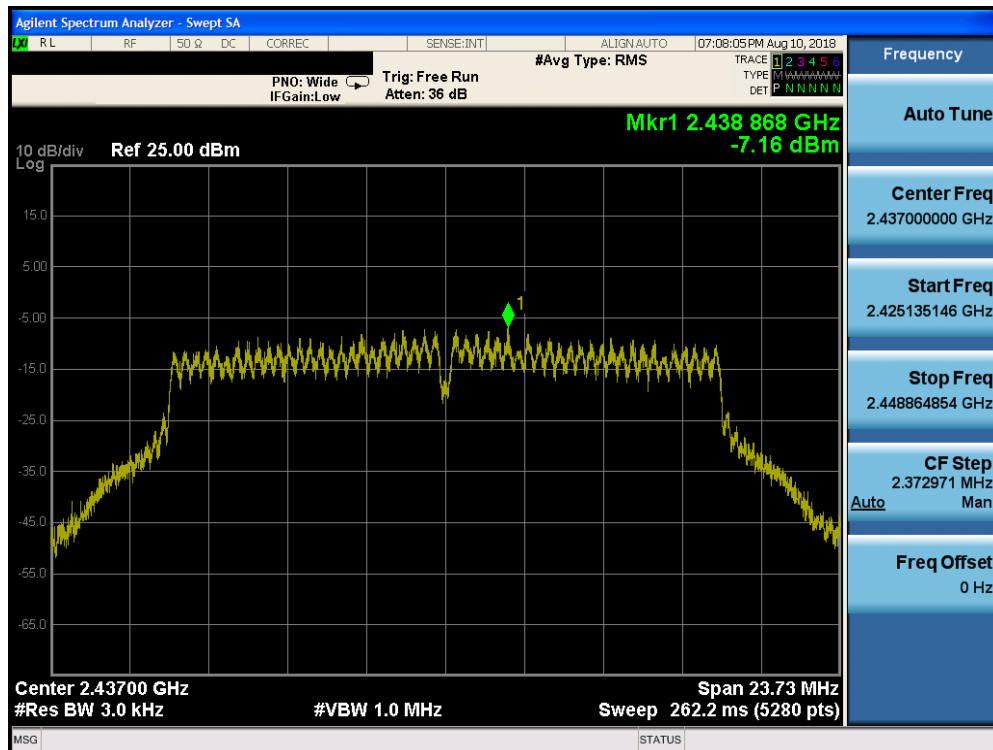


Plot 7-41. Power Spectral Density Plot SISO CORE1 PRIMARY (802.11g – Ch. 6)

|                                            |                                              |                            |                                 |
|--------------------------------------------|----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018          | EUT Type:<br>Tablet Device | Page 43 of 142                  |

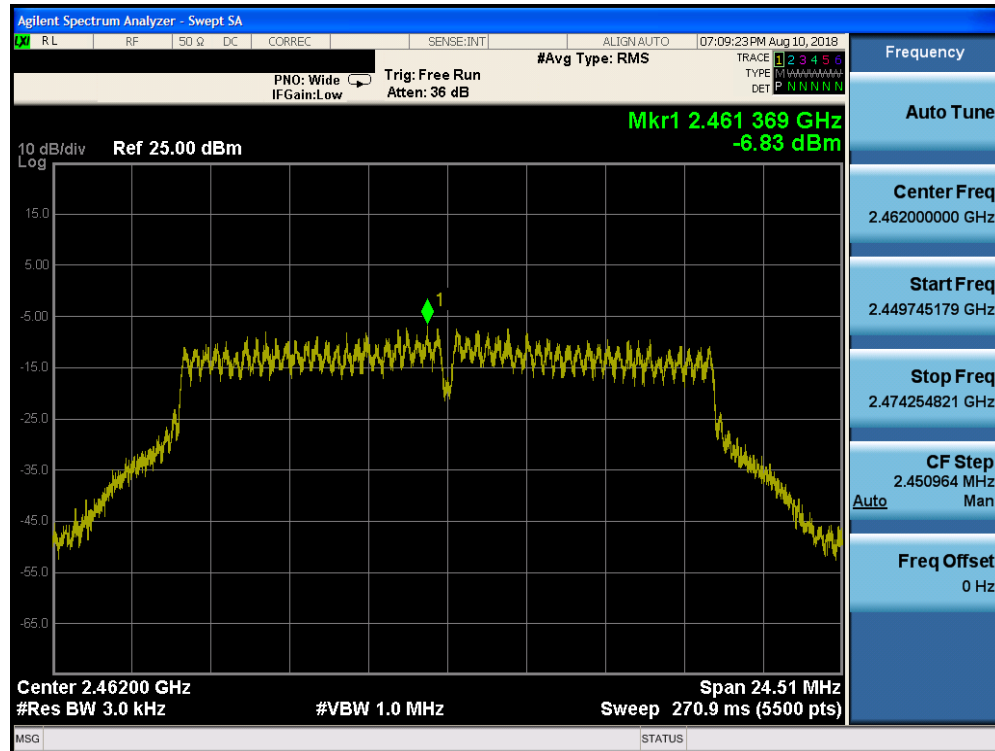


Plot 7-42. Power Spectral Density Plot SISO CORE1 PRIMARY (802.11g – Ch. 11)

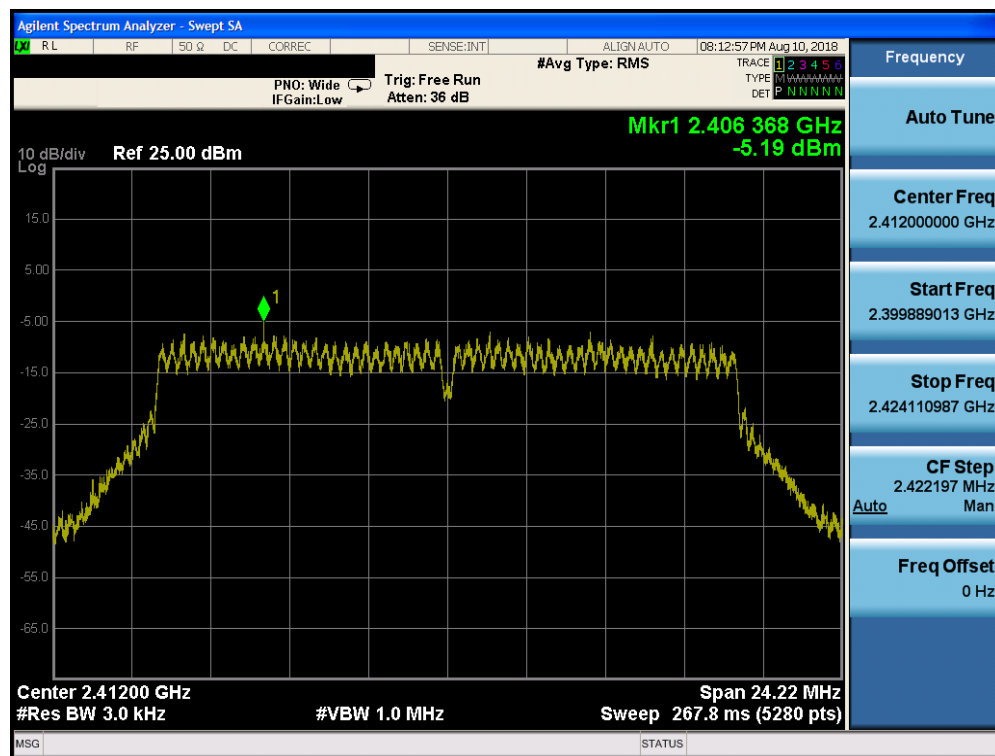


Plot 7-43. Power Spectral Density Plot SISO CORE1 PRIMARY (802.11n (2.4GHz) – Ch. 1)

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 44 of 142                  |

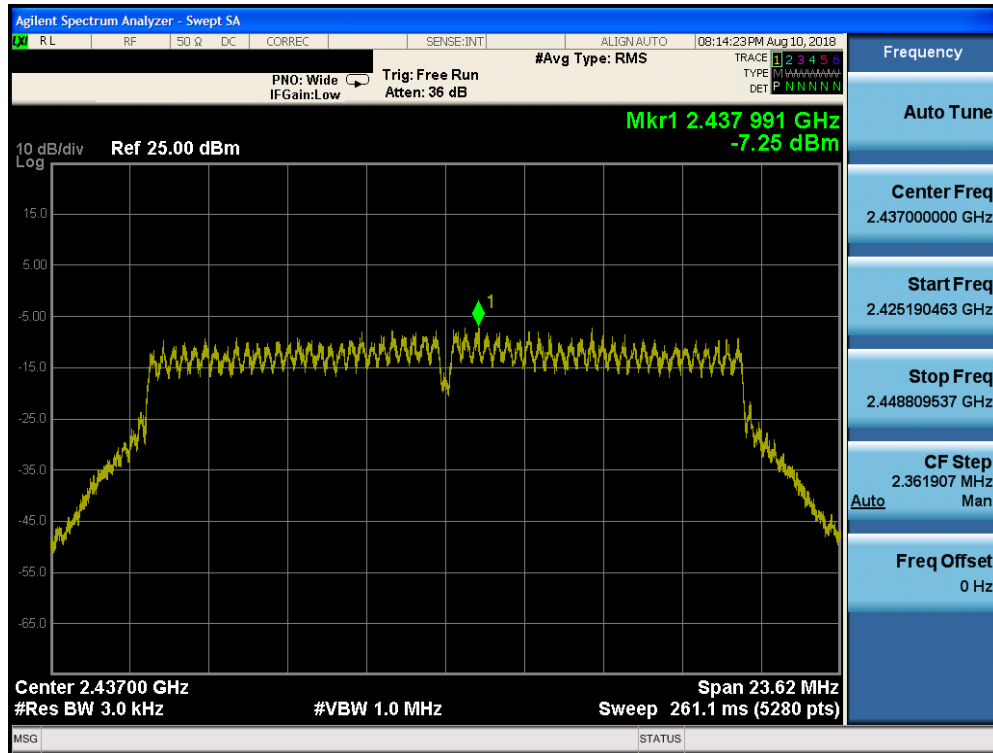

Plot 7-44. Power Spectral Density Plot SISO CORE1 PRIMARY (802.11n (2.4GHz) – Ch. 6)

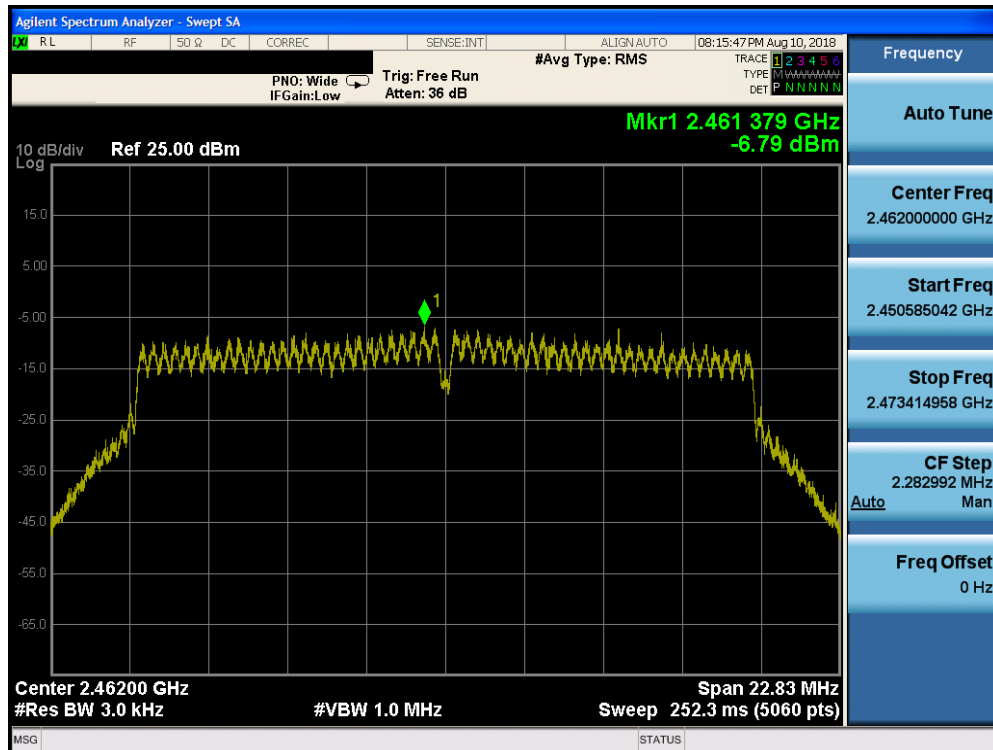


Plot 7-45. Power Spectral Density Plot SISO CORE1 PRIMARY (802.11n (2.4GHz) – Ch. 11)

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 45 of 142                  |

## SISO Core 1 Diversity Power Spectral Density Measurements


| Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Power Spectral Density [dBm] | Maximum Permissible Power Density [dBm / 3kHz] | Margin [dB] | Pass / Fail |
|-----------------|-------------|-------------|------------------|---------------------------------------|------------------------------------------------|-------------|-------------|
| 2412            | 1           | b           | 1                | -0.19                                 | 8.00                                           | -8.19       | Pass        |
| 2437            | 6           | b           | 1                | -0.92                                 | 8.00                                           | -8.92       | Pass        |
| 2462            | 11          | b           | 1                | -1.05                                 | 8.00                                           | -9.05       | Pass        |
| 2412            | 1           | g           | 6                | -4.16                                 | 8.00                                           | -12.16      | Pass        |
| 2437            | 6           | g           | 6                | -3.92                                 | 8.00                                           | -11.92      | Pass        |
| 2462            | 11          | g           | 6                | -4.34                                 | 8.00                                           | -12.34      | Pass        |
| 2412            | 1           | n           | 6.5/7.2 (MCS0)   | -4.98                                 | 8.00                                           | -12.98      | Pass        |
| 2437            | 6           | n           | 6.5/7.2 (MCS0)   | -4.68                                 | 8.00                                           | -12.68      | Pass        |
| 2462            | 11          | n           | 6.5/7.2 (MCS0)   | -3.42                                 | 8.00                                           | -11.42      | Pass        |

Table 7-21. SISO Core1 Diversity Conducted Power Density Measurements

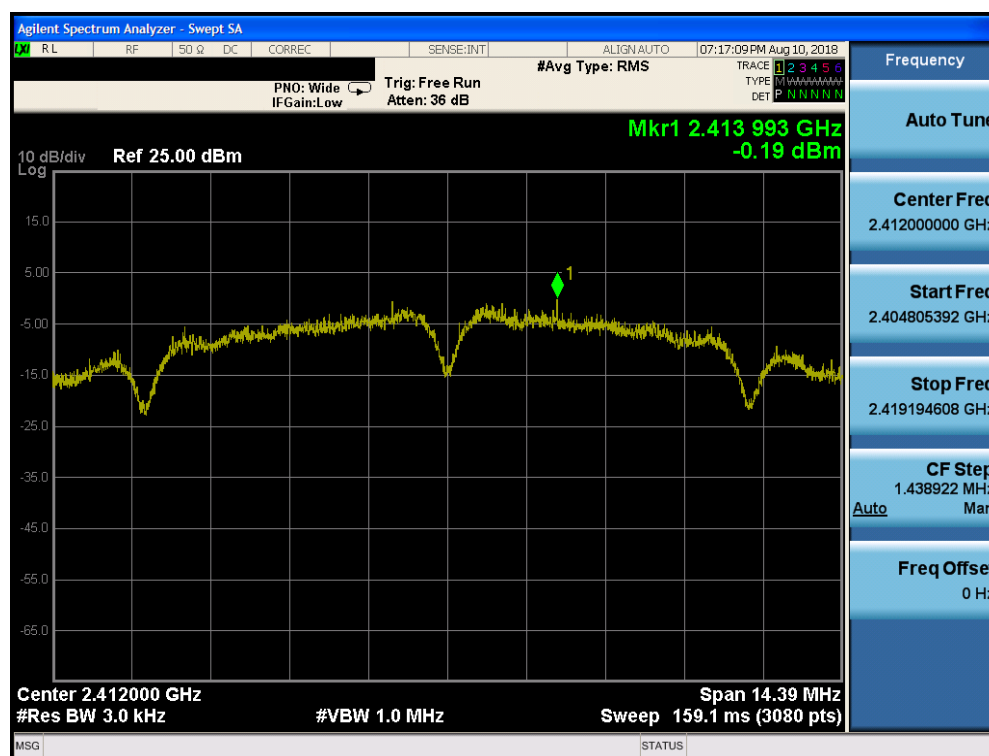


Plot 7-46. Power Spectral Density Plot SISO CORE1 DIVERSITY (802.11b - Ch. 1)

|                                            |                                               |                                       |                                 |
|--------------------------------------------|-----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018           | EUT Type:<br>Tablet Device            | Page 46 of 142                  |

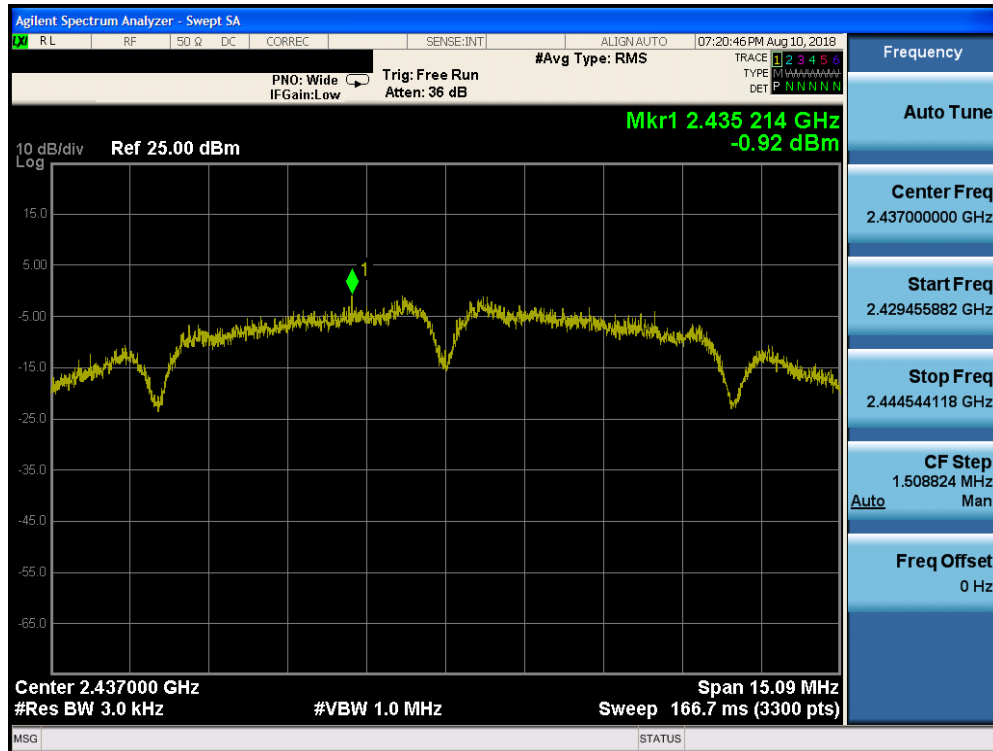


Plot 7-47. Power Spectral Density Plot SISO CORE1 DIVERSITY (802.11b – Ch. 6)

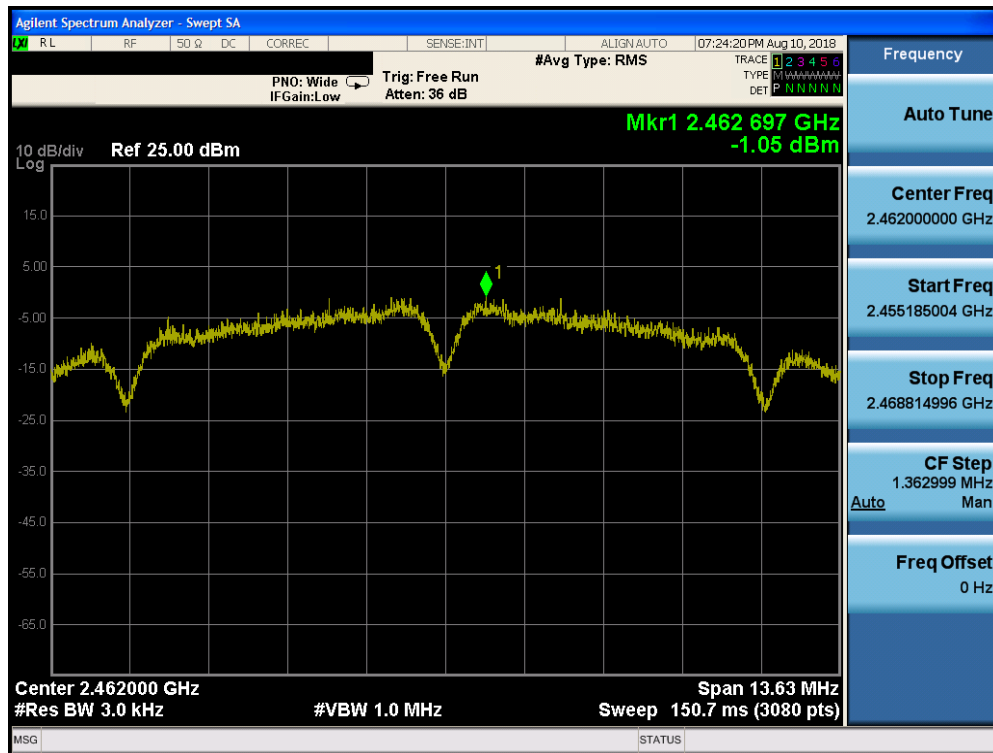


Plot 7-48. Power Spectral Density Plot SISO CORE1 DIVERSITY (802.11b – Ch. 11)

|                                            |                                                                                                                                  |                            |                                 |
|--------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                              | EUT Type:<br>Tablet Device | Page 47 of 142                  |

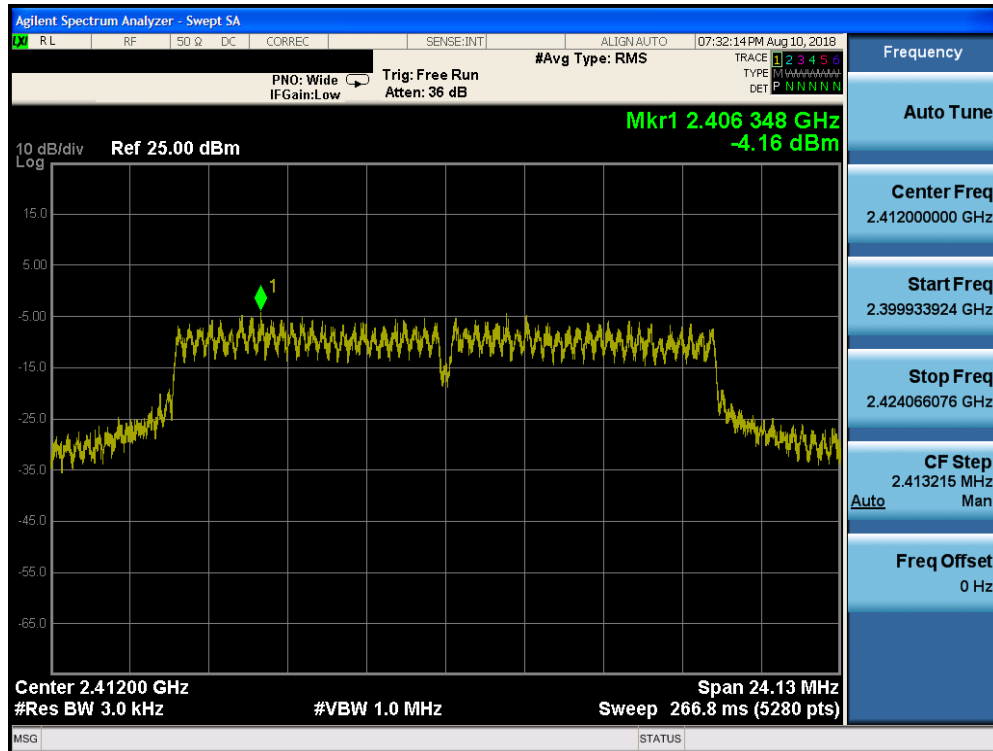


Plot 7-49. Power Spectral Density Plot SISO CORE1 DIVERSITY (802.11g – Ch. 1)

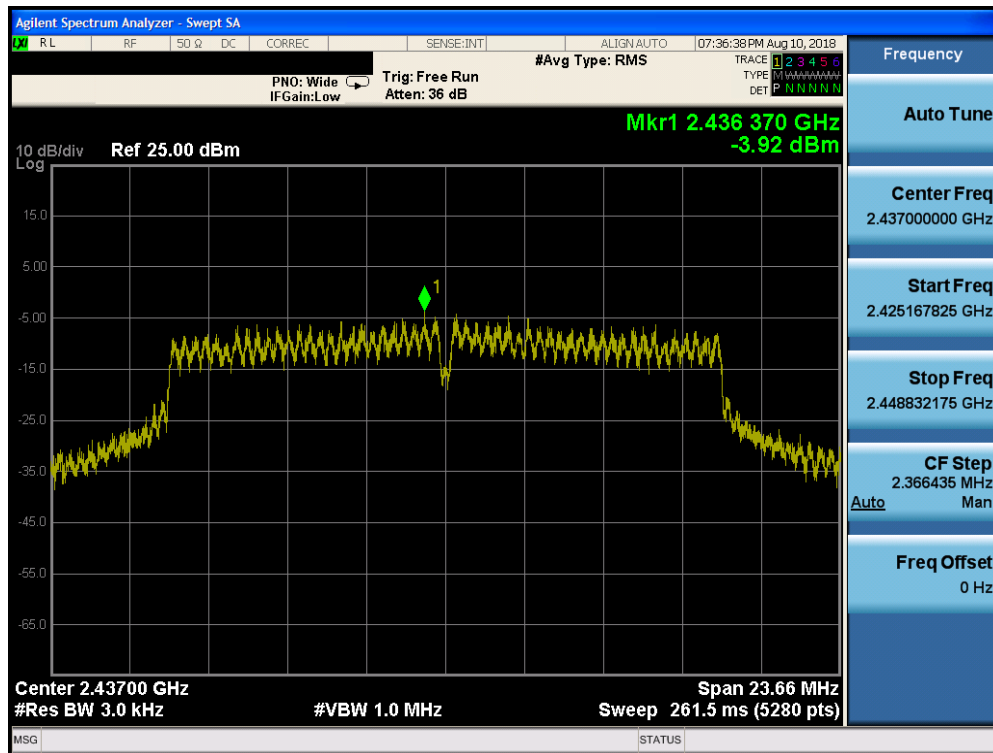


Plot 7-50. Power Spectral Density Plot SISO CORE1 DIVERSITY (802.11g – Ch. 6)

|                                            |                                               |                            |                                 |
|--------------------------------------------|-----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018           | EUT Type:<br>Tablet Device | Page 48 of 142                  |

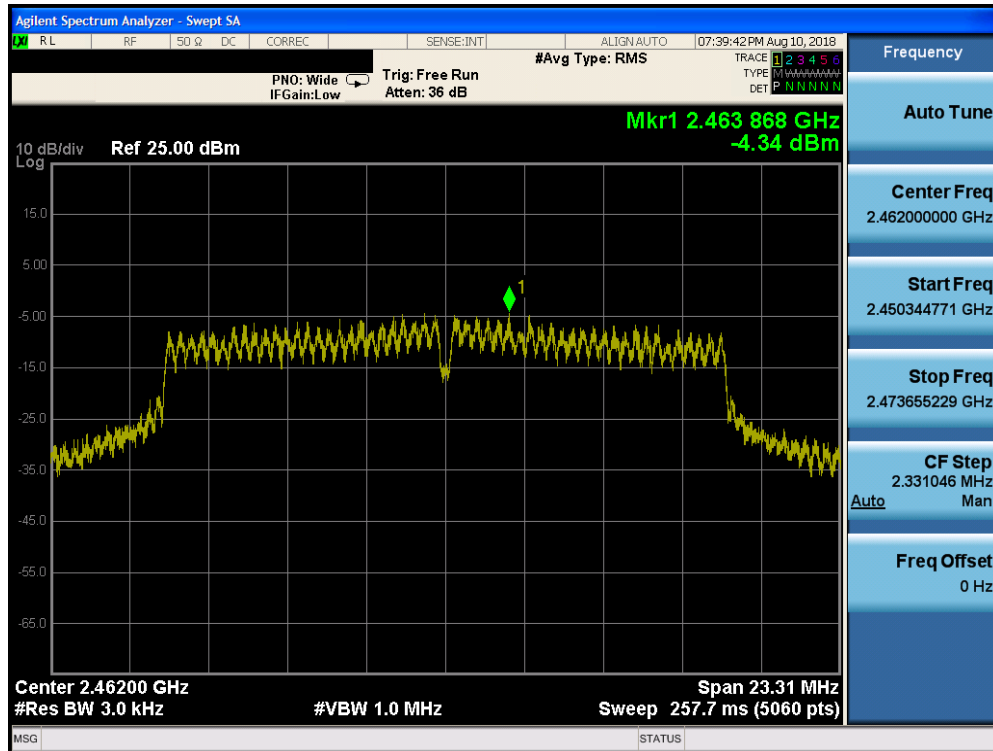


Plot 7-51. Power Spectral Density Plot SISO CORE1 DIVERSITY (802.11g – Ch. 11)

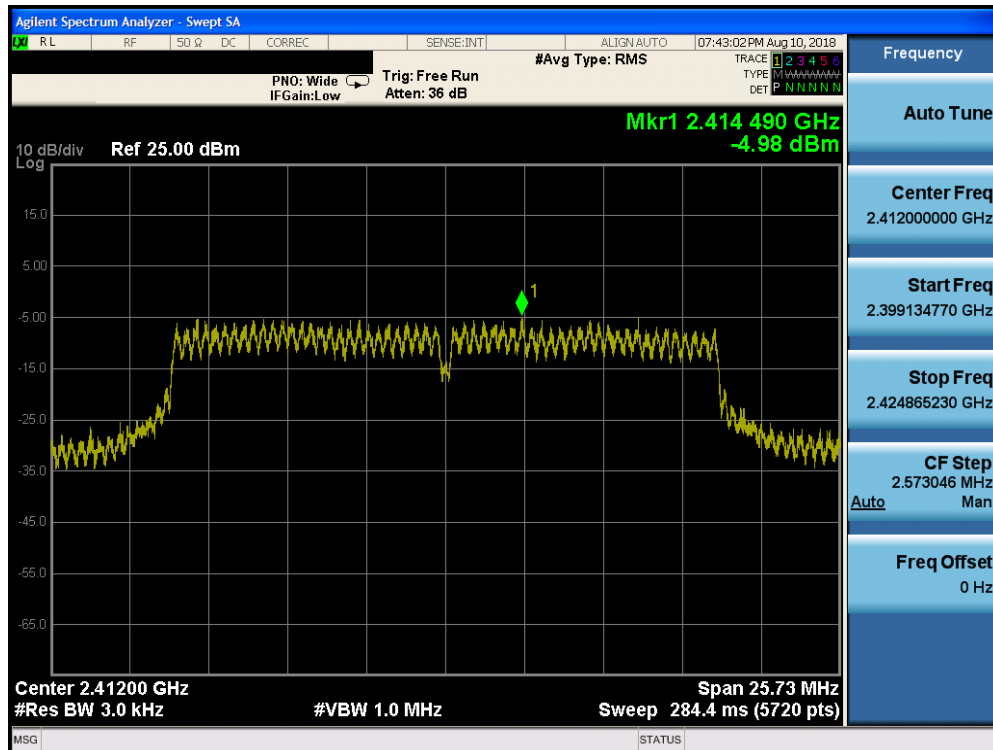


Plot 7-52. Power Spectral Density Plot SISO CORE1 DIVERSITY (802.11n (2.4GHz) – Ch. 1)

|                                            |                                              |                            |                                 |
|--------------------------------------------|----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018          | EUT Type:<br>Tablet Device | Page 49 of 142                  |

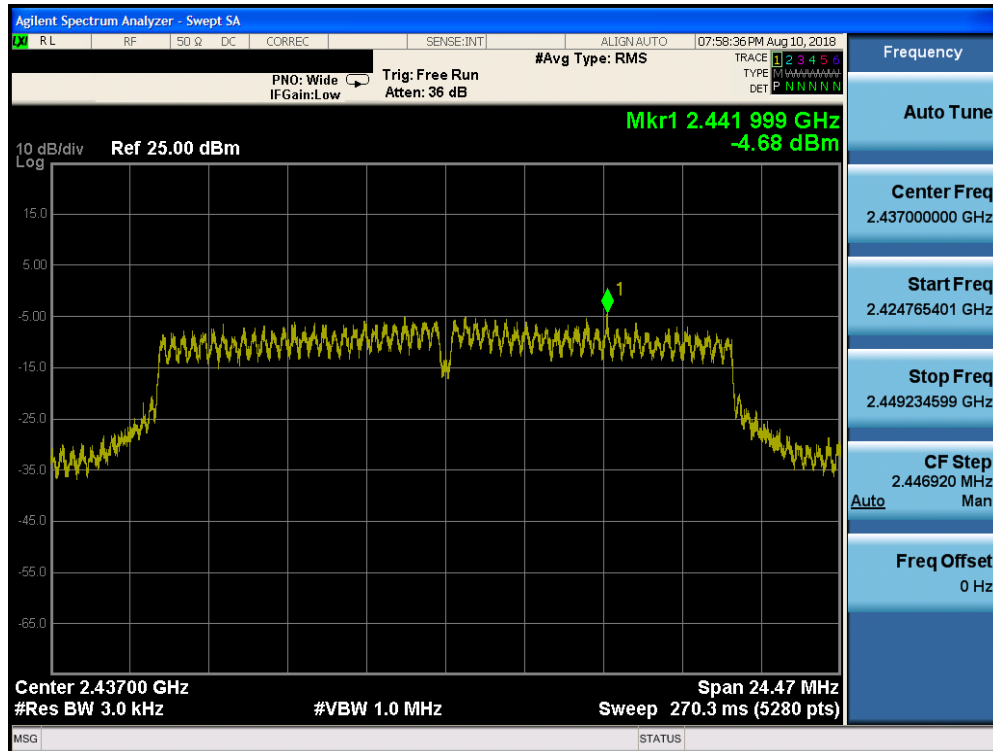

Plot 7-53. Power Spectral Density Plot SISO CORE1 DIVERSITY (802.11n (2.4GHz) – Ch. 6)

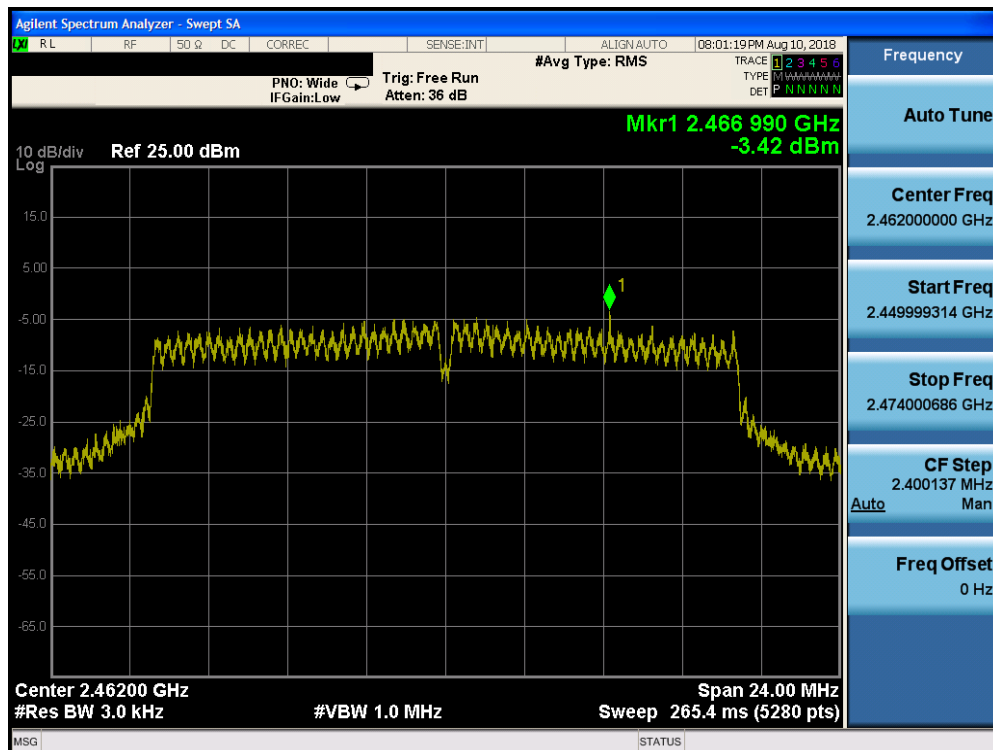

Plot 7-54. Power Spectral Density Plot SISO CORE1 DIVERSITY (802.11n (2.4GHz) – Ch. 11)


|                                            |                                              |                            |                                 |
|--------------------------------------------|----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018          | EUT Type:<br>Tablet Device | Page 50 of 142                  |

## CDD Primary Power Spectral Density Measurements


| Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | CORE 0 Power Spectral Density [dBm] | CORE 1 Power Spectral Density [dBm] | Summed CDD Power Spectral Density [dBm] | Maximum Permissible Power Density [dBm / 3kHz] | Margin [dB] | Pass / Fail |
|-----------------|-------------|-------------|------------------|-------------------------------------|-------------------------------------|-----------------------------------------|------------------------------------------------|-------------|-------------|
| 2412            | 1           | g           | 6.5/7.2 (MCS0)   | -10.85                              | -10.90                              | -7.86                                   | 8.00                                           | -15.86      | Pass        |
| 2437            | 6           | g           | 6.5/7.2 (MCS0)   | -10.14                              | -9.48                               | -6.79                                   | 8.00                                           | -14.79      | Pass        |
| 2462            | 11          | g           | 6.5/7.2 (MCS0)   | -10.20                              | -11.61                              | -7.84                                   | 8.00                                           | -15.84      | Pass        |
| 2412            | 1           | n           | 6.5/7.2 (MCS0)   | -10.87                              | -11.11                              | -7.98                                   | 8.00                                           | -15.98      | Pass        |
| 2437            | 6           | n           | 6.5/7.2 (MCS0)   | -10.35                              | -9.09                               | -6.66                                   | 8.00                                           | -14.66      | Pass        |
| 2462            | 11          | n           | 6.5/7.2 (MCS0)   | -11.00                              | -12.21                              | -8.55                                   | 8.00                                           | -16.55      | Pass        |

**Table 7-22.CDD Primary Conducted Power Density Measurements**

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 51 of 142                  |

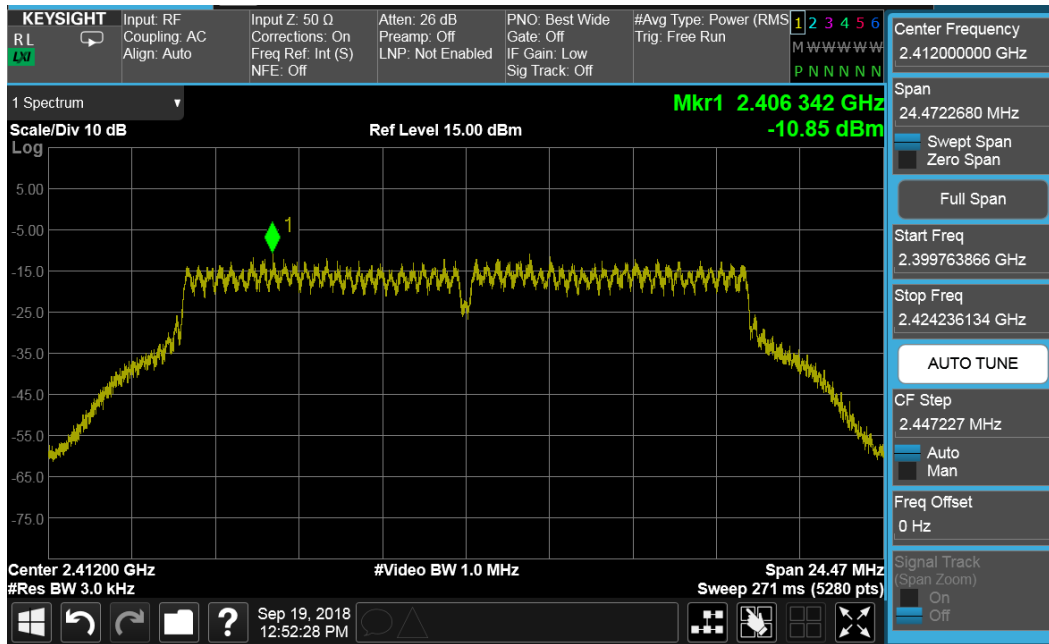


Plot 7-55. Power Spectral Density Plot CDD CORE 0 PRIMARY (802.11g – Ch. 1)

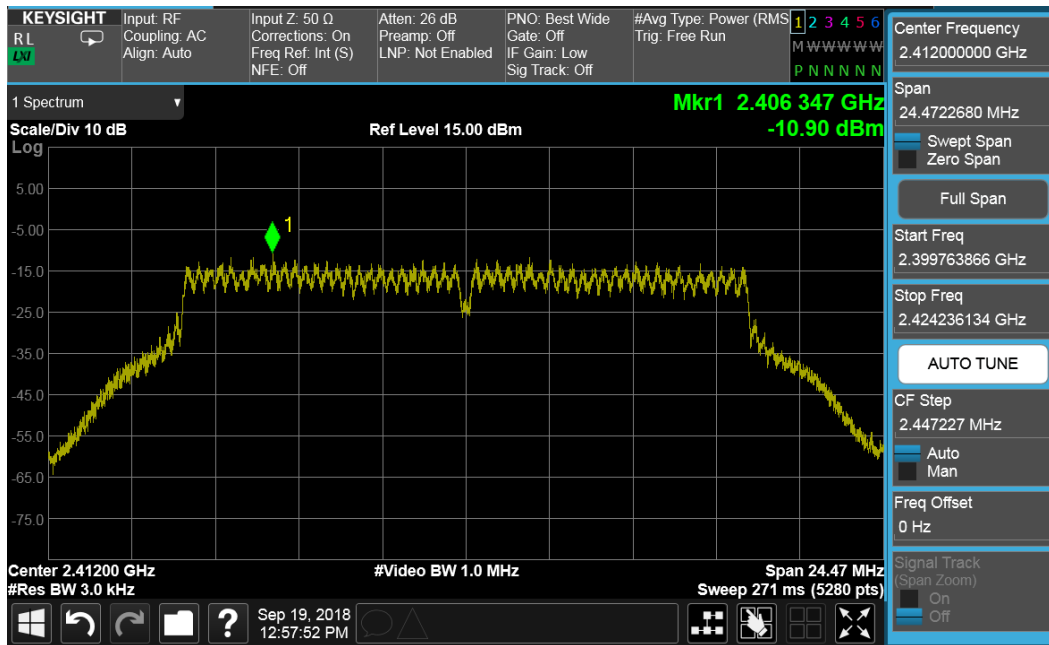


Plot 7-56. Power Spectral Density Plot CDD CORE 1 PRIMARY (802.11g – Ch. 1)

|                                            |                                               |                            |                                 |
|--------------------------------------------|-----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018           | EUT Type:<br>Tablet Device | Page 52 of 142                  |

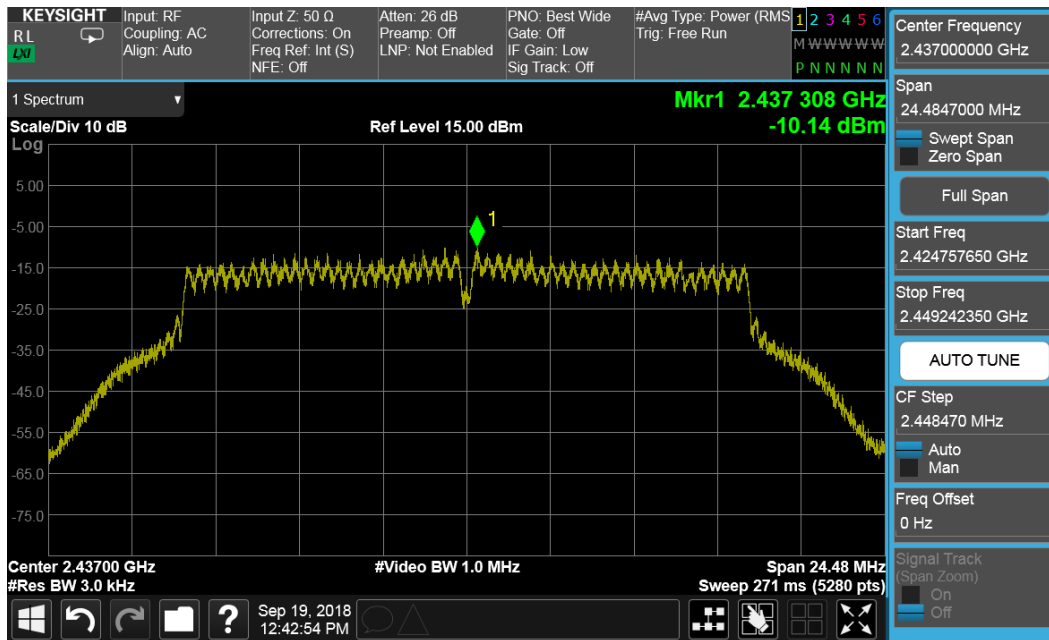


Plot 7-57. Power Spectral Density Plot CDD CORE 0 PRIMARY (802.11g – Ch. 6)

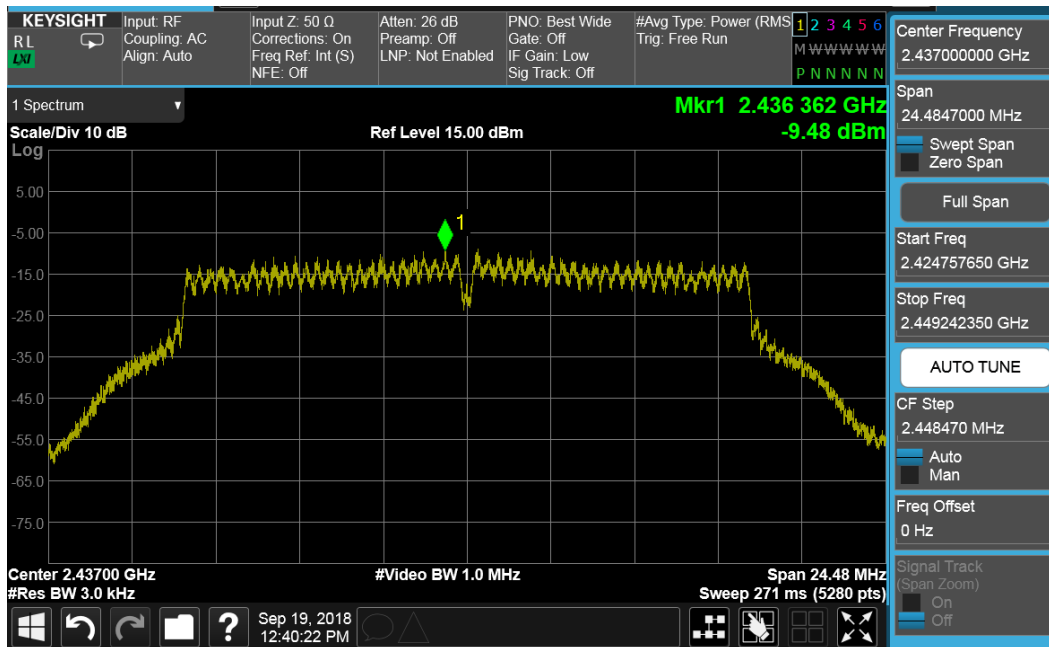


Plot 7-58. Power Spectral Density Plot CDD CORE 1 PRIMARY (802.11g – Ch. 6)

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 53 of 142                  |

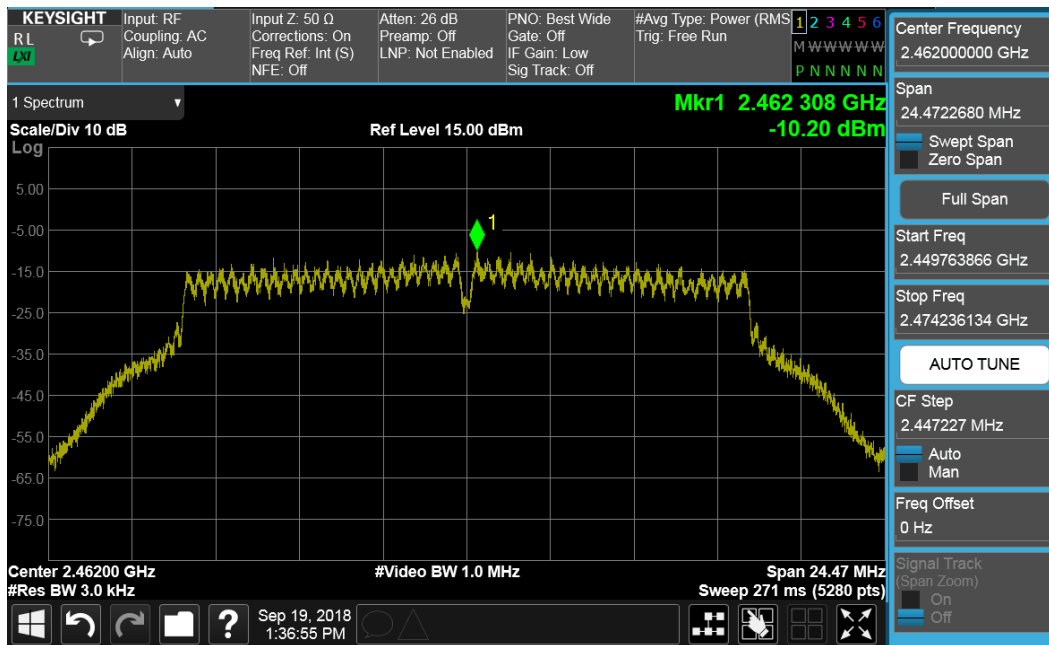


Plot 7-59. Power Spectral Density Plot CDD CORE 0 PRIMARY (802.11g – Ch. 11)

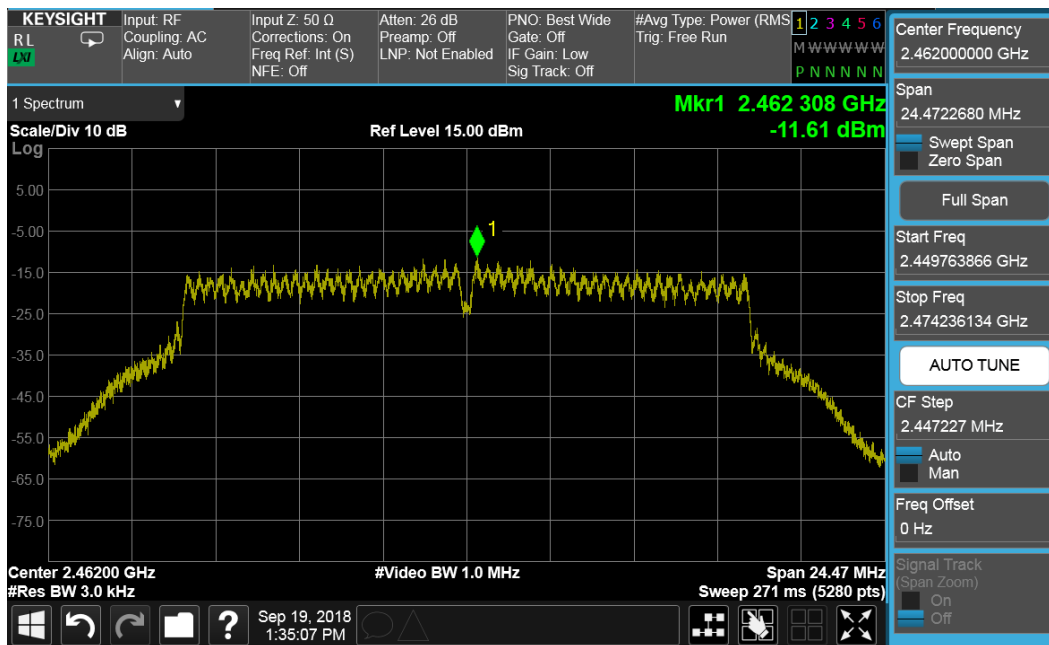


Plot 7-60. Power Spectral Density Plot CDD CORE 1 PRIMARY (802.11g – Ch. 11)

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 54 of 142                  |

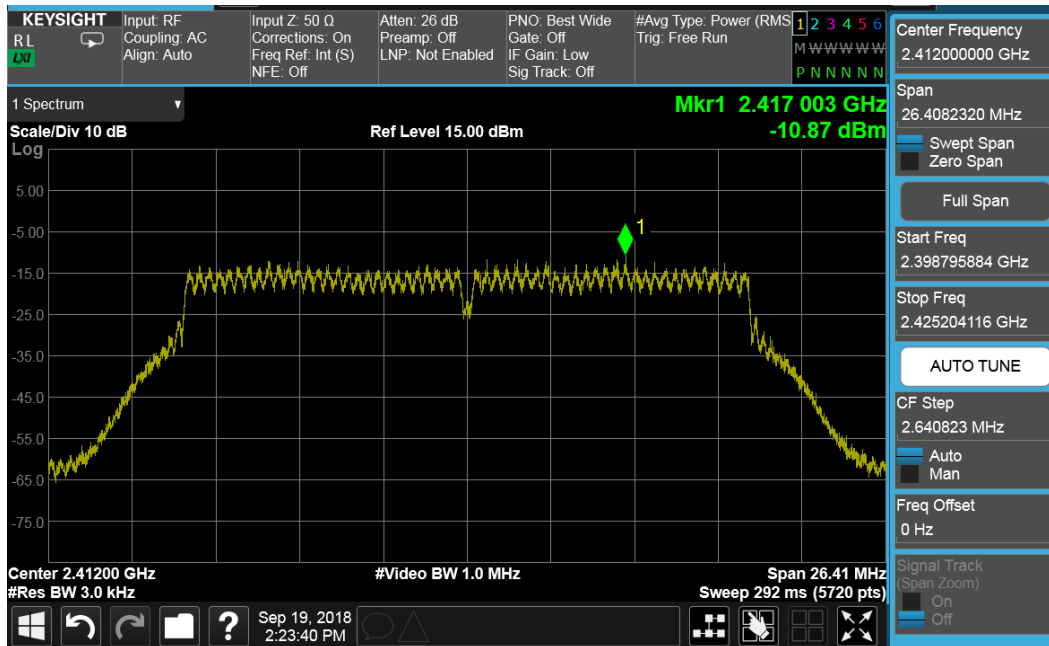


Plot 7-61. Power Spectral Density Plot CDD CORE 0 PRIMARY (802.11n (2.4GHz) – Ch. 1)

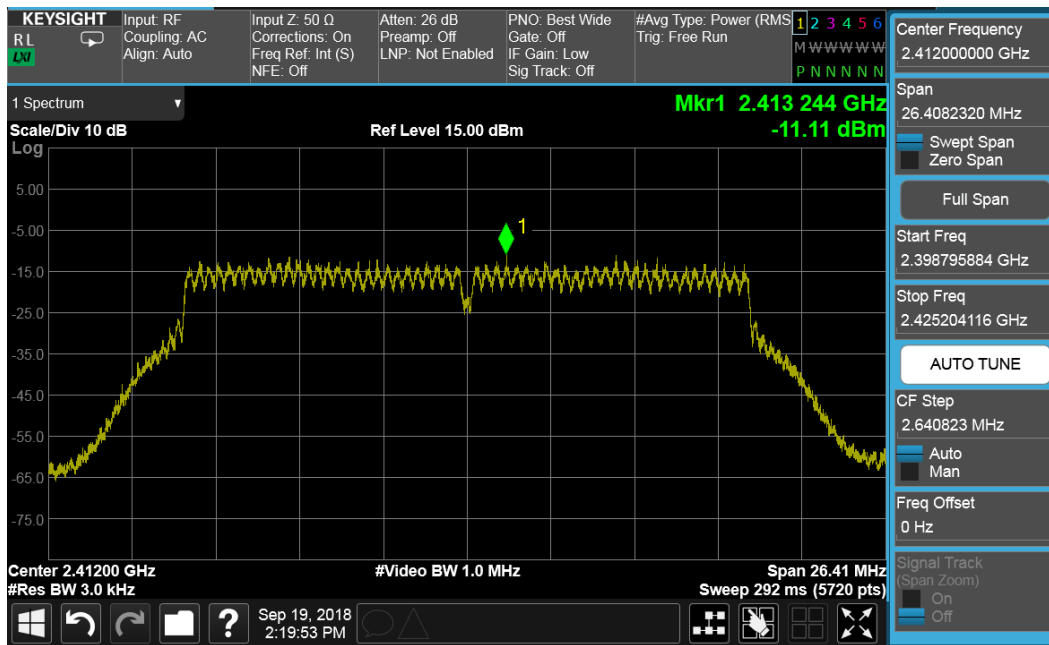


Plot 7-62. Power Spectral Density Plot CDD CORE 1 PRIMARY (802.11n (2.4GHz) – Ch. 1)

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 55 of 142                  |

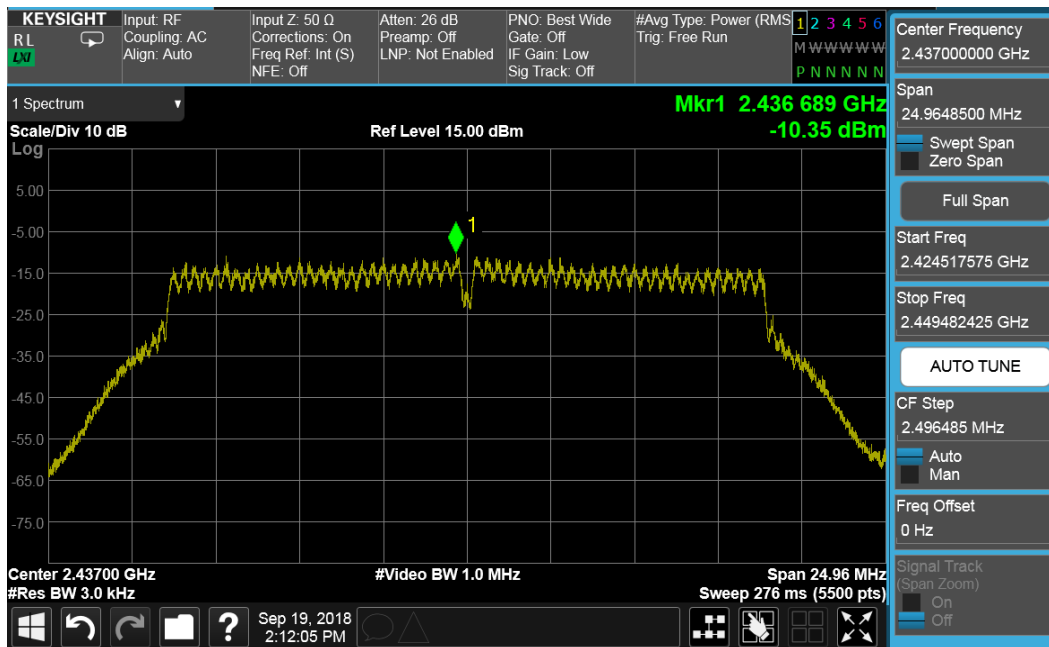


Plot 7-63. Power Spectral Density Plot CDD CORE 0 PRIMARY (802.11n (2.4GHz) – Ch. 6)

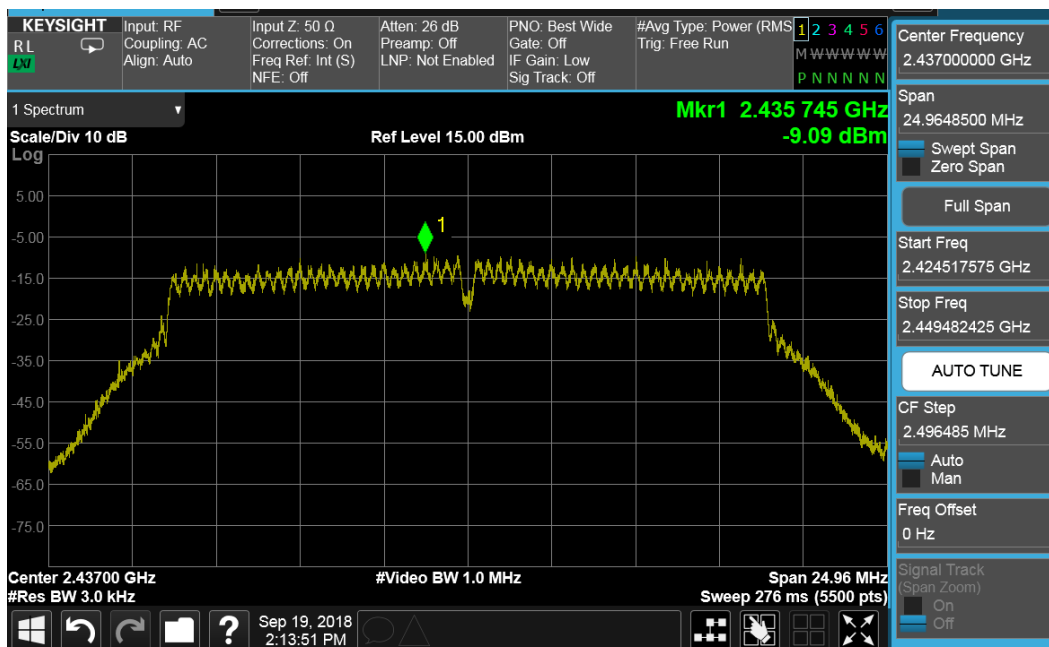


Plot 7-64. Power Spectral Density Plot CDD CORE 1 PRIMARY (802.11n (2.4GHz) – Ch. 6)

|                                            |                                               |                            |                                 |
|--------------------------------------------|-----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018           | EUT Type:<br>Tablet Device | Page 56 of 142                  |

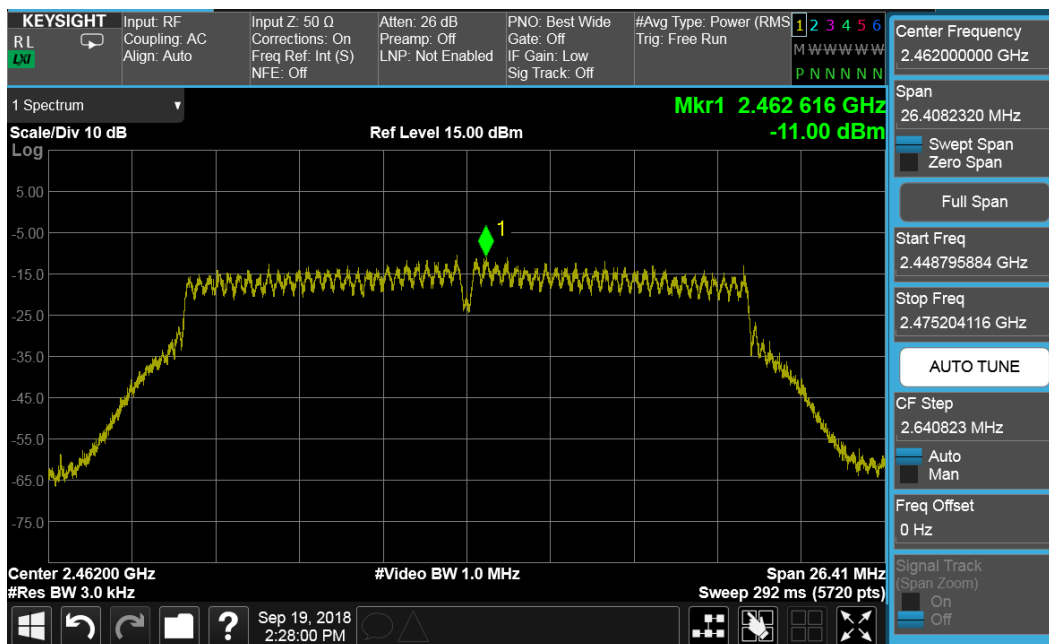

Plot 7-65. Power Spectral Density Plot CDD CORE 0 PRIMARY (802.11n (2.4GHz) – Ch. 11)

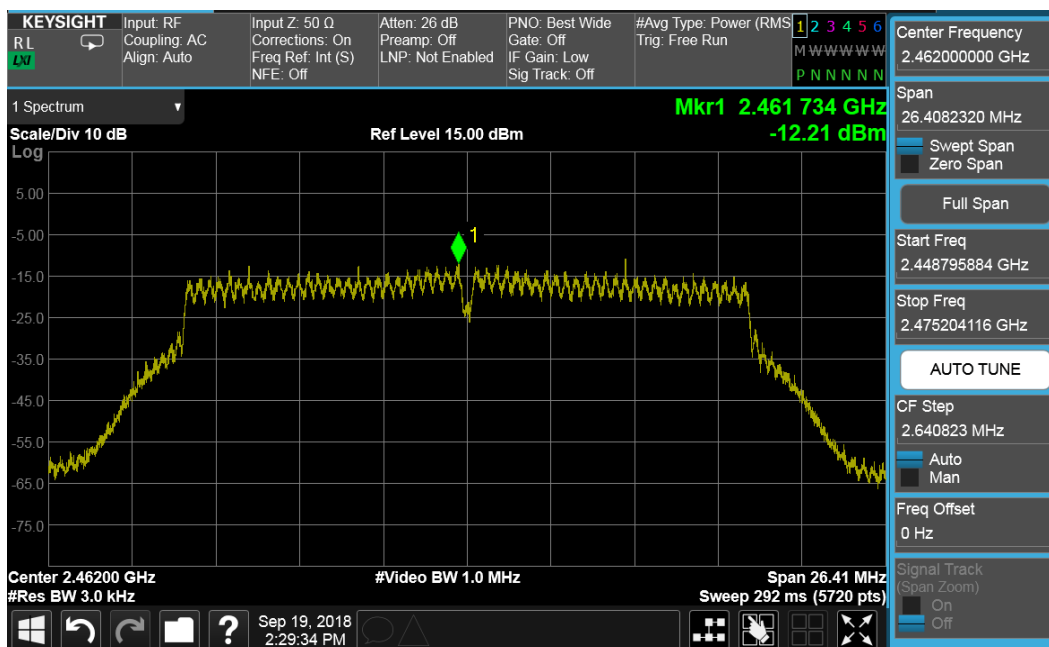

Plot 7-66. Power Spectral Density Plot CDD CORE 1 PRIMARY (802.11n (2.4GHz) – Ch. 11)


|                                            |                                               |                            |                                 |
|--------------------------------------------|-----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018           | EUT Type:<br>Tablet Device | Page 57 of 142                  |

## CDD Diversity Power Spectral Density Measurements


| Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | CORE 0 Power Spectral Density [dBm] | CORE 1 Power Spectral Density [dBm] | Summed CDD Power Spectral Density [dBm] | Maximum Permissible Power Density [dBm / 3kHz] | Margin [dB] | Pass / Fail |
|-----------------|-------------|-------------|------------------|-------------------------------------|-------------------------------------|-----------------------------------------|------------------------------------------------|-------------|-------------|
| 2412            | 1           | g           | 6.5/7.2 (MCS0)   | -10.70                              | -11.85                              | -8.23                                   | 8.00                                           | -16.23      | Pass        |
| 2437            | 6           | g           | 6.5/7.2 (MCS0)   | -10.69                              | -5.16                               | -4.09                                   | 8.00                                           | -12.09      | Pass        |
| 2462            | 11          | g           | 6.5/7.2 (MCS0)   | -9.57                               | -12.40                              | -7.75                                   | 8.00                                           | -15.75      | Pass        |
| 2412            | 1           | n           | 6.5/7.2 (MCS0)   | -9.40                               | -11.59                              | -7.35                                   | 8.00                                           | -15.35      | Pass        |
| 2437            | 6           | n           | 6.5/7.2 (MCS0)   | -9.95                               | -4.56                               | -3.46                                   | 8.00                                           | -11.46      | Pass        |
| 2462            | 11          | n           | 6.5/7.2 (MCS0)   | -10.46                              | -12.93                              | -8.51                                   | 8.00                                           | -16.51      | Pass        |

**Table 7-23.CDD Diversity Conducted Power Density Measurements**

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 58 of 142                  |

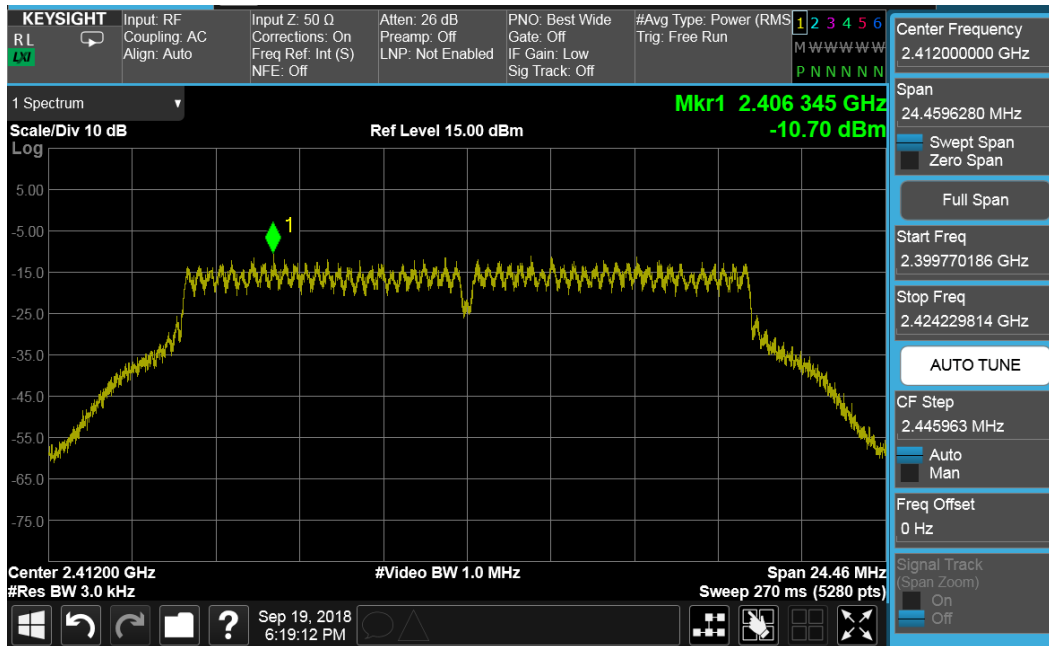


Plot 7-67. Power Spectral Density Plot CDD CORE0 DIVERSITY (802.11g – Ch. 1)

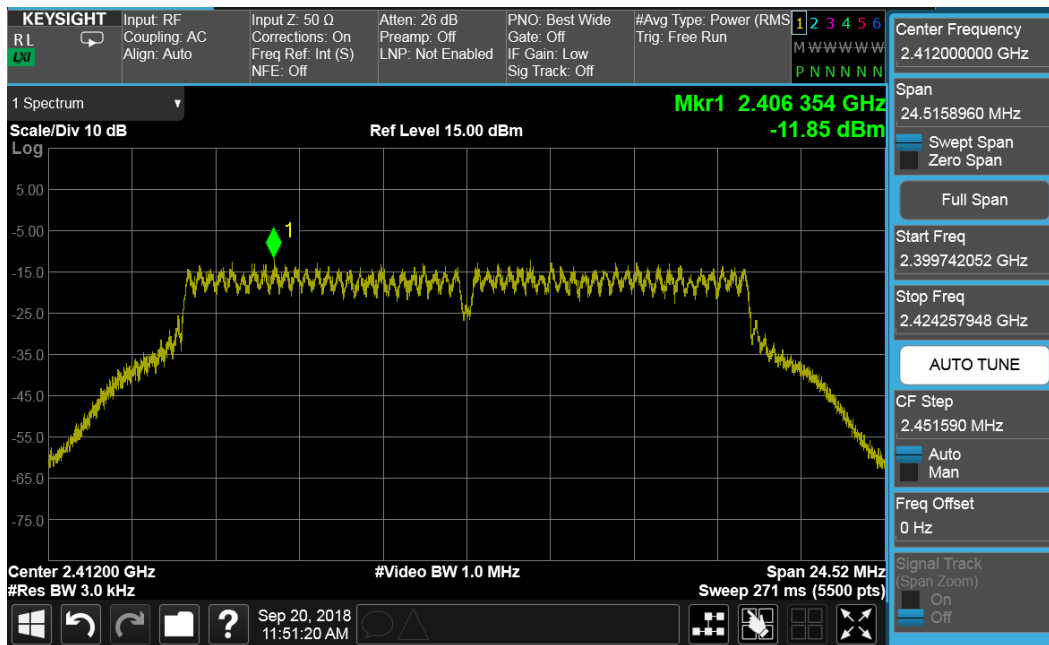


Plot 7-68. Power Spectral Density Plot CDD CORE1 DIVERSITY (802.11g – Ch. 1)

|                                            |                                               |                            |                                       |                                 |
|--------------------------------------------|-----------------------------------------------|----------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. |                            | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018           | EUT Type:<br>Tablet Device |                                       | Page 59 of 142                  |

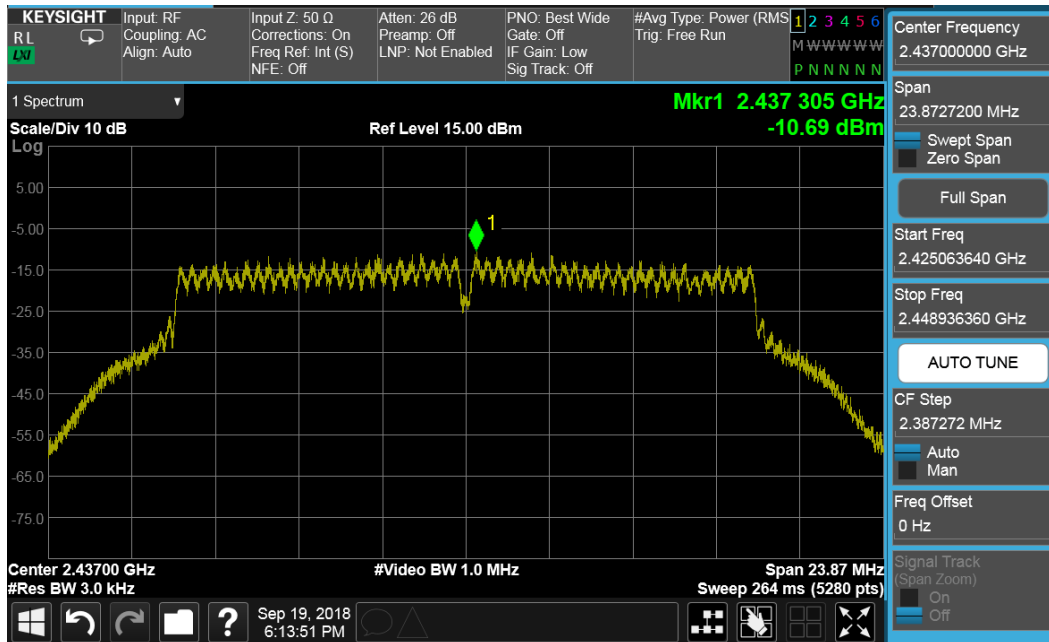


Plot 7-69. Power Spectral Density Plot CDD CORE0 DIVERSITY (802.11g – Ch. 6)

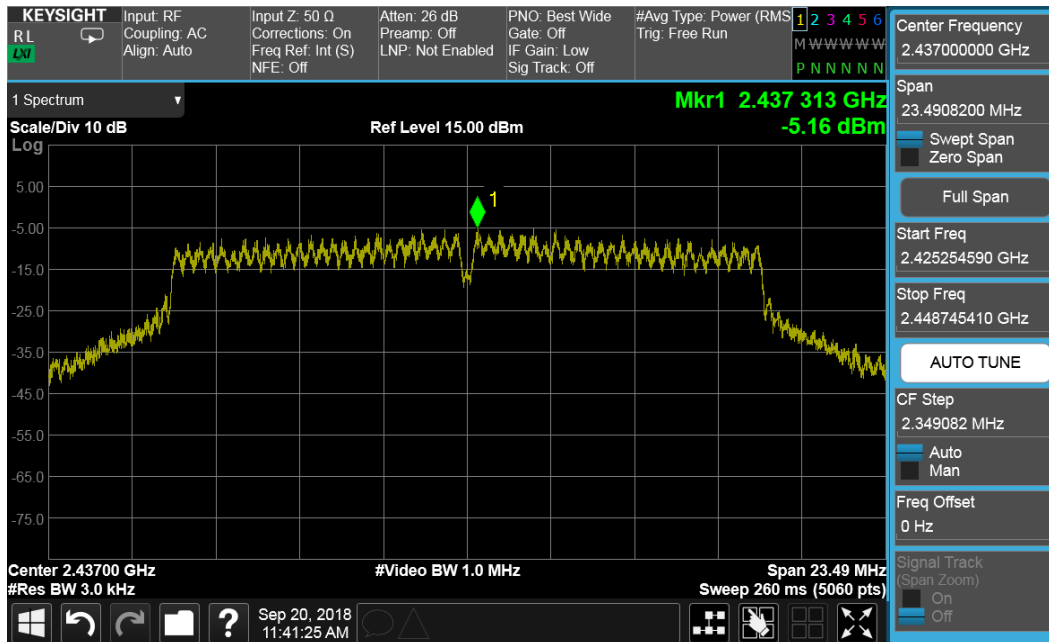


Plot 7-70. Power Spectral Density Plot CDD CORE1 DIVERSITY (802.11g – Ch. 6)

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 60 of 142                  |

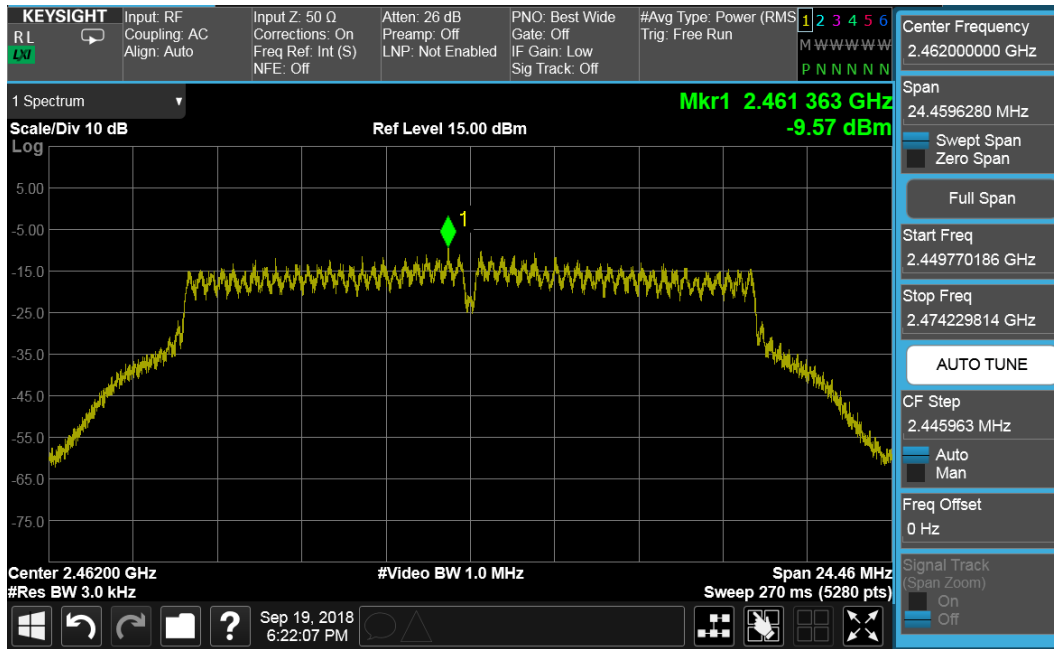


Plot 7-71. Power Spectral Density Plot CDD CORE0 DIVERSITY (802.11g – Ch. 11)

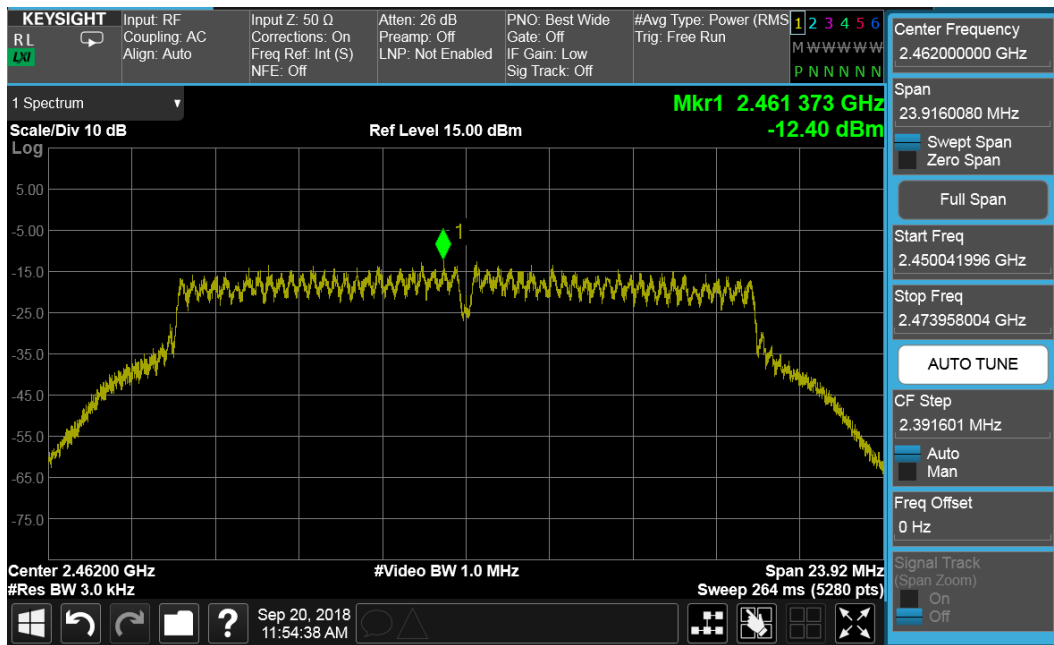


Plot 7-72. Power Spectral Density Plot CDD CORE1 DIVERSITY (802.11g – Ch. 11)

|                                            |                                                        |                            |                                 |
|--------------------------------------------|--------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>PCTEST</b><br>MEASUREMENT REPORT<br>(CERTIFICATION) |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                    | EUT Type:<br>Tablet Device | Page 61 of 142                  |

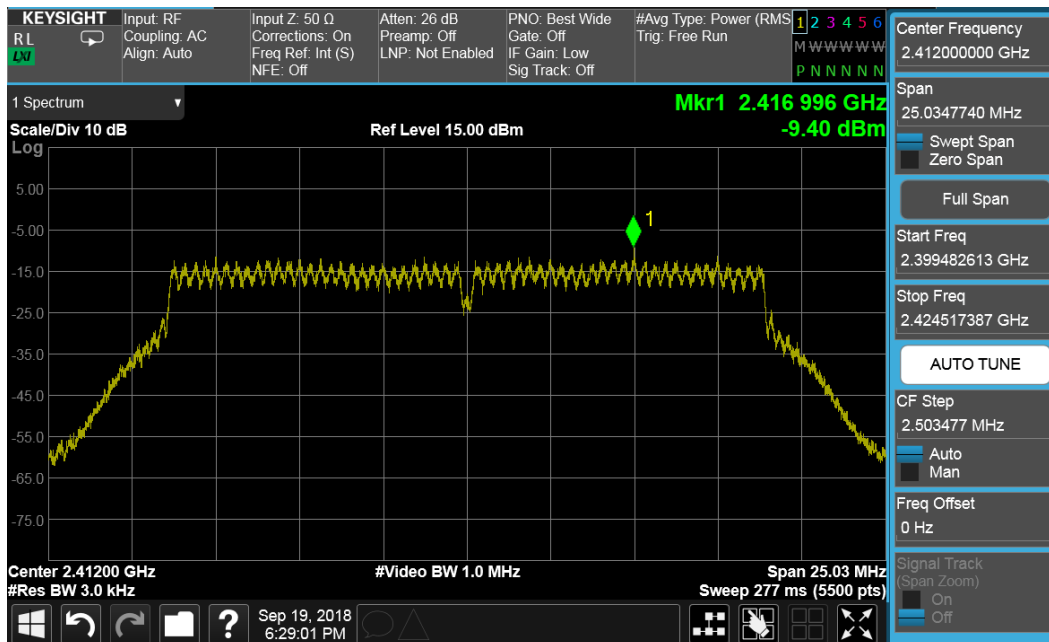


Plot 7-73. Power Spectral Density Plot CDD CORE0 DIVERSITY (802.11n (2.4GHz) – Ch. 1)

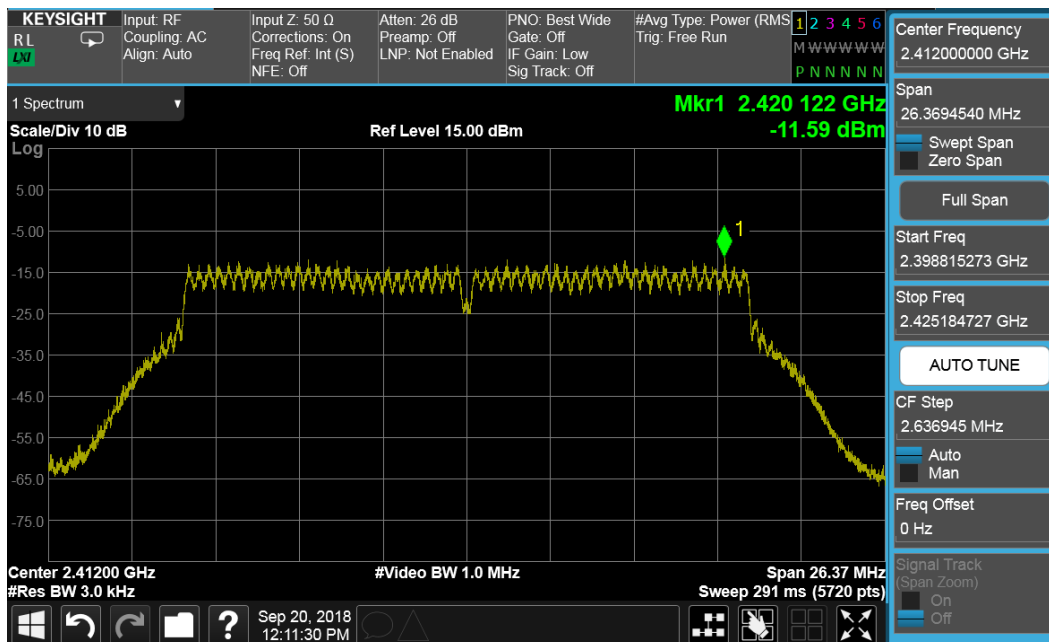


Plot 7-74. Power Spectral Density Plot CDD CORE1 DIVERSITY (802.11n (2.4GHz) – Ch. 1)

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 62 of 142                  |

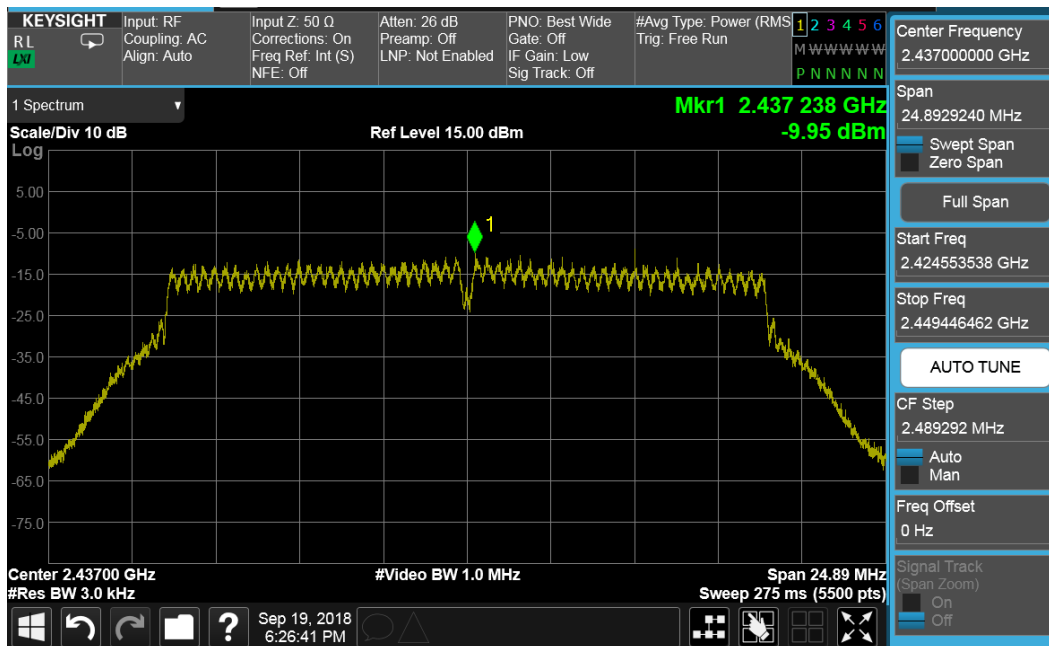


Plot 7-75. Power Spectral Density Plot CDD CORE0 DIVERSITY (802.11n (2.4GHz) – Ch. 6)

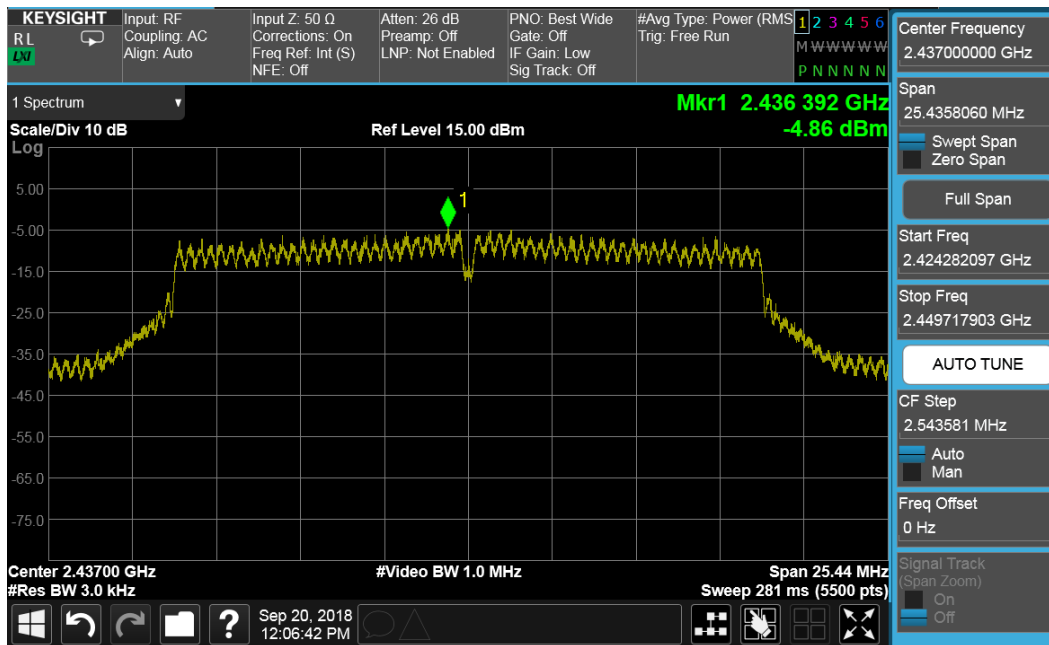


Plot 7-76. Power Spectral Density Plot CDD CORE1 DIVERSITY (802.11n (2.4GHz) – Ch. 6)

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 63 of 142                  |

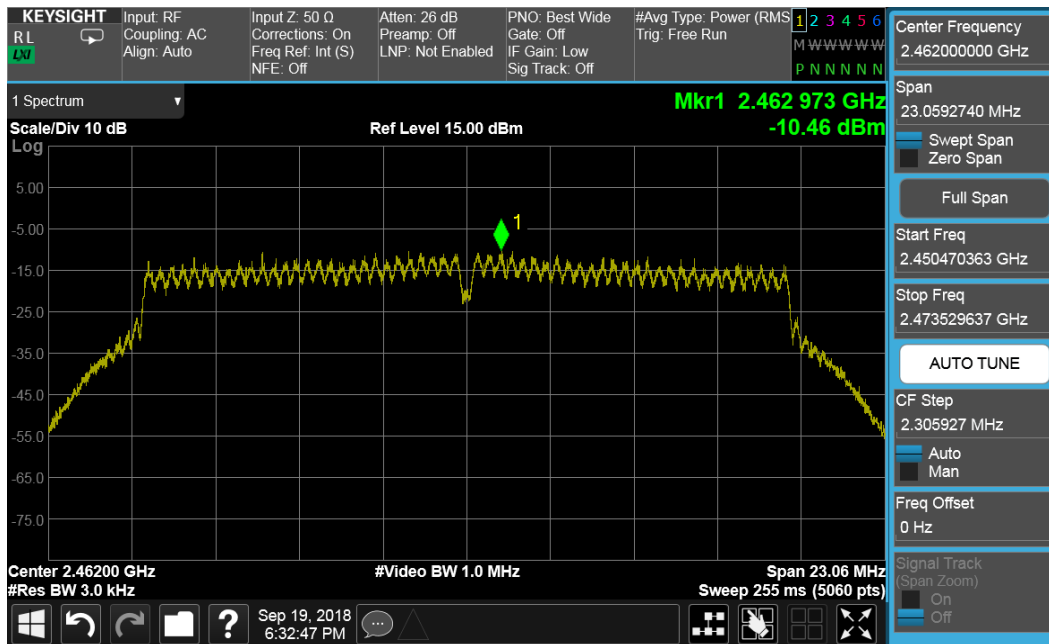

Plot 7-77. Power Spectral Density Plot CDD CORE0 DIVERSITY (802.11n (2.4GHz) – Ch. 11)

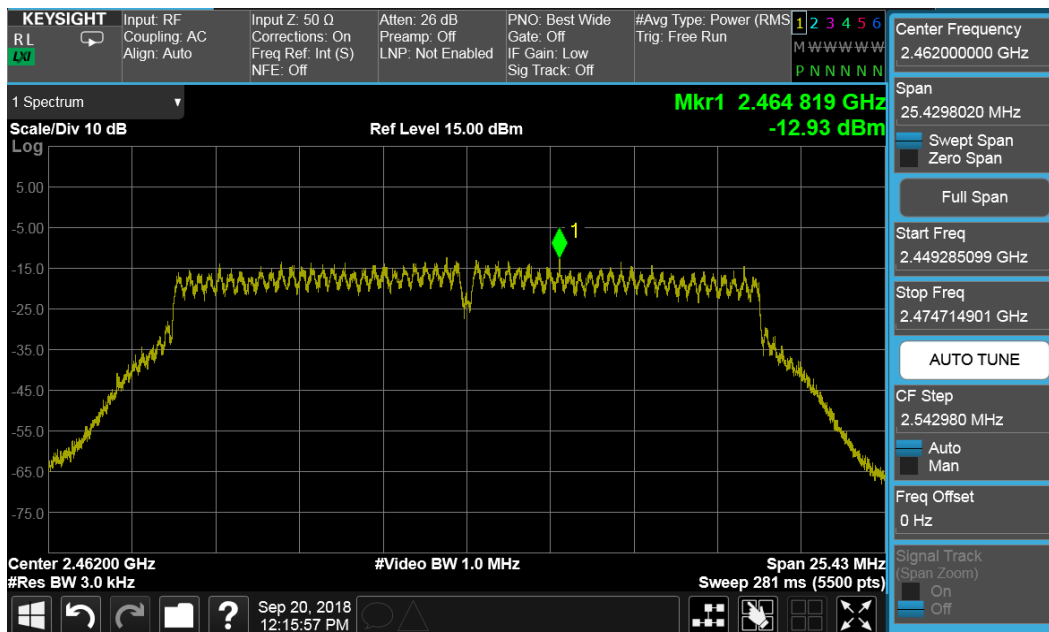

Plot 7-78. Power Spectral Density Plot CDD CORE1 DIVERSITY (802.11n (2.4GHz) – Ch. 11)

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 64 of 142                  |

**Note:**

Per ANSI C63.10-2013 Section 14.3.2.2 and KDB 662911 D01 v02r01 Section E)2), the power spectral density at Core0 and Core1 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

**Sample MIMO Calculation:**

At 2412MHz the average conducted power spectral density was measured to be -4.05 dBm for Core0 and -6.47 dBm for Core1.

$$\text{Core0} + \text{Core1} = \text{MIMO}$$

$$(-4.05 \text{ dBm} + -6.47 \text{ dBm}) = (0.39 \text{ mW} + 0.23 \text{ mW}) = 0.62 \text{ mW} = -2.08 \text{ dBm}$$

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 65 of 142                  |

## 7.5 Conducted Emissions at the Band Edge

§15.247(d); RSS-247 [5.5]

### Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots at the band edge, the EUT was set at a data rate of 1Mbps for “b” mode, 6 Mbps for “g” mode, and 6.5/7.2Mbps for “n” mode as these settings produced the worst-case emissions.

***The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.4).***

### Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3  
KDB 558074 D01 v05 – Section 8.7.2

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-4. Test Instrument & Measurement Setup**

### Test Notes


None

|                                            |                                                                                                                                   |                            |                                 |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018                                                                                               | EUT Type:<br>Tablet Device | Page 66 of 142                  |

## SISO Core 0 Conducted Emissions at the Band Edge

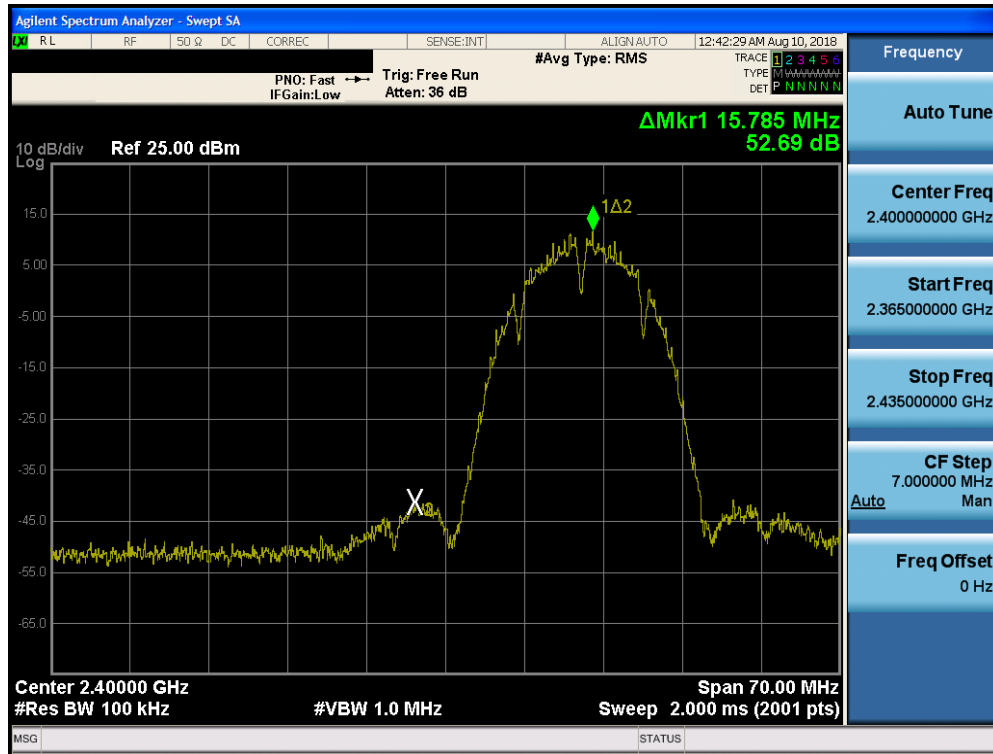


Plot 7-79. Band Edge Plot SISO CORE0 (802.11b – Ch. 1)

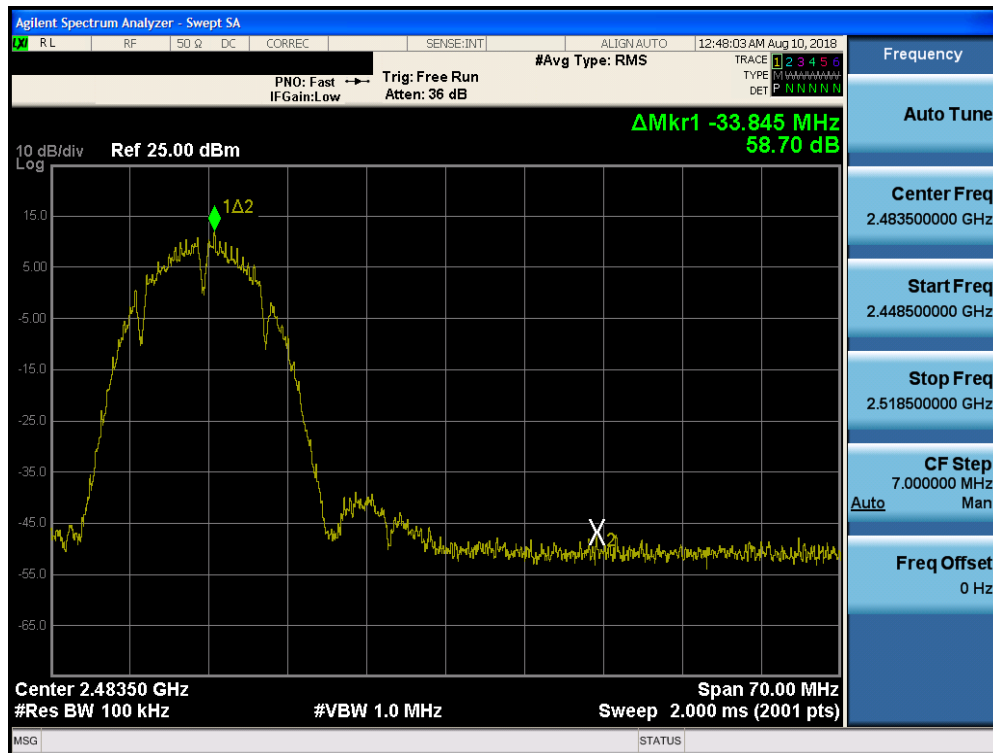


Plot 7-80. Band Edge Plot SISO CORE0 (802.11b – Ch. 11)

|                                            |                                              |                            |                                 |
|--------------------------------------------|----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018          | EUT Type:<br>Tablet Device | Page 67 of 142                  |

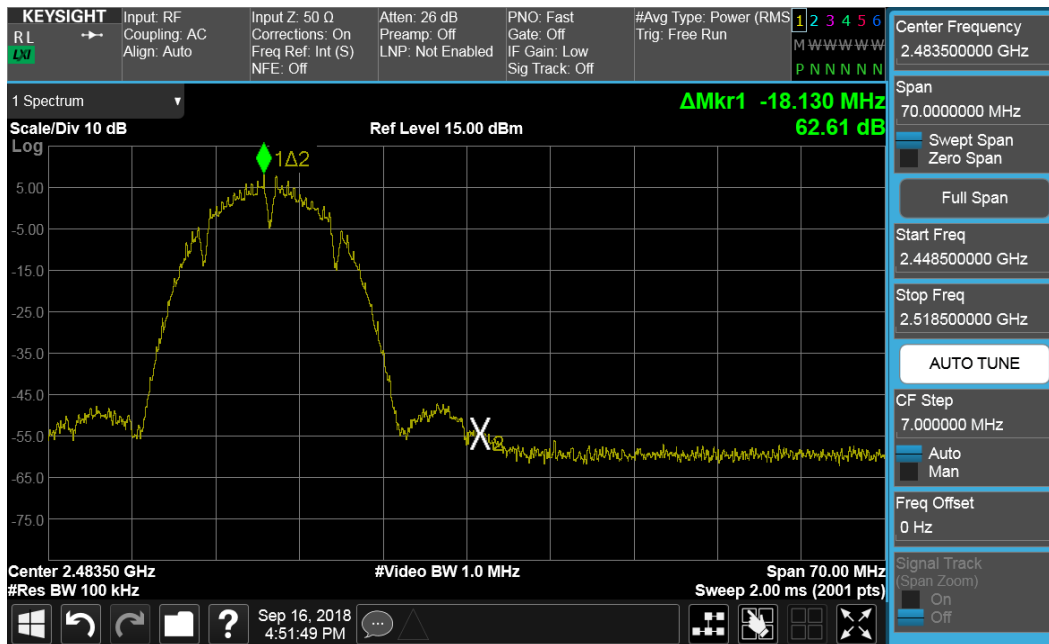

Plot 7-81. Band Edge Plot SISO CORE0 (802.11b – Ch. 12)

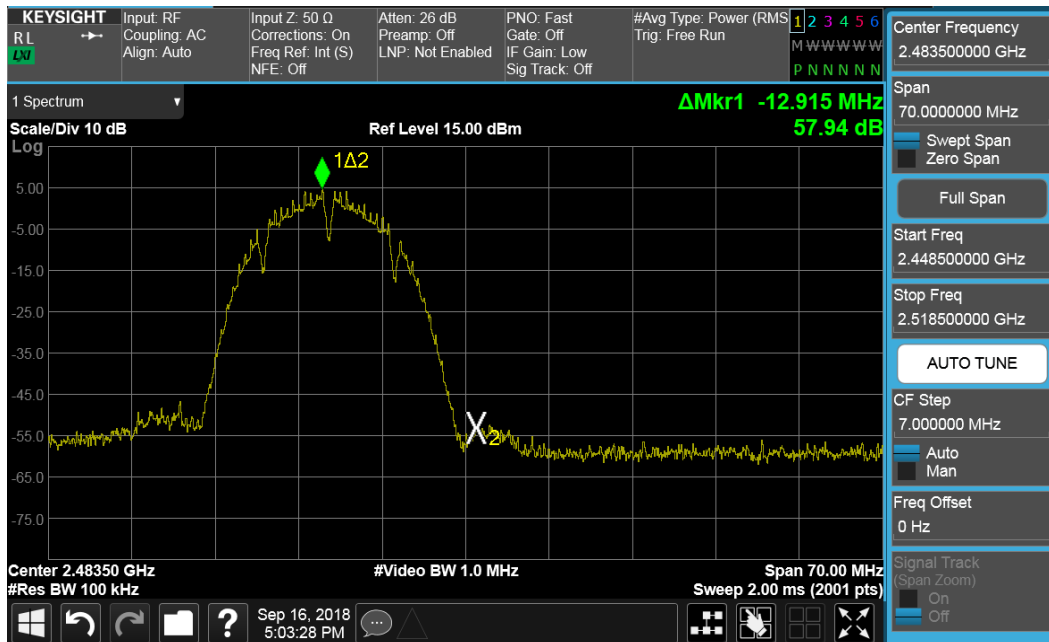

Plot 7-82. Band Edge Plot SISO CORE0 (802.11b – Ch. 13)

|                                            |                                              |                            |                                 |
|--------------------------------------------|----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                           | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-05-R1.BCG | Test Dates:<br>7/26/2018-10/10/2018          | EUT Type:<br>Tablet Device | Page 68 of 142                  |