

FCC EVALUATION REPORT FOR CERTIFICATION

Applicant: LG Electronics Inc.**19-1, Cheongho-ri, Jinwi-myeon,****Pyeongteak-si, Gyeonggi-do, Korea.****Attn: Mr. Do-Hyung Kim, Chief research engineer****Date of Issue: July 25, 2011****Order Number: GETEC-C1-11-153****Test Report Number: GETEC-E3-11-070****Test Site: Gumi College EMC Center****FCC Registration Number: (100749, 443957)****FCC ID. : BEJ19LV2500UG****Applicant : LG Electronics Inc.**

Rule Part(s)	: FCC Part 15 Subpart B
Equipment Class	: Class B computing device peripheral (JBP)
EUT Type	: LED LCD TV/Monitor
Type of Authority	: Certification
Model Name	: 19LV2500-UG
Trade Name	: LG

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003 / Canadian standard ICES-003

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,**Reviewed by,**
Hyun Kim, Engineer
GUMI College EMC center
Jae-Hoon Jeong, Senior Engineer
GUMI College EMC center



CONTENTS

1. GENERAL INFORMATION	3
2. INTRODUCTION	4
3. PRODUCT INFORMATION	5
3.1 DESCRIPTION OF EUT	5
3.2 SUPPORT EQUIPMENT / CABLES USED	6
3.3 MODIFICATION ITEM(S)	7
4. DESCRIPTION OF TESTS	8
4.1 TEST CONDITION	8
4.2 CONDUCTED EMISSION	9
4.3 RADIATED EMISSION	10
5. CONDUCTED EMISSION	11
5.1 OPERATING ENVIRONMENT	11
5.2 TEST SET-UP	11
5.3 MEASUREMENT UNCERTAINTY	11
5.4 LIMIT	12
5.5 TEST EQUIPMENT USED	12
5.6 TEST DATA FOR CONDUCTED EMISSION	12
6. RADIATED EMISSION	21
6.1 OPERATING ENVIRONMENT	21
6.2 TEST SET-UP	21
6.3 MEASUREMENT UNCERTAINTY	21
6.4 LIMIT	22
6.5 TEST EQUIPMENT USED	22
6.6 TEST DATA FOR RADIATED EMISSION	22
7. SAMPLE CALCULATIONS	27
7.1 EXAMPLE 1 :	27
7.2 EXAMPLE 2 :	27
8. RECOMMENDATION & CONCLUSION	28
APPENDIX A – ATTESTATION STATEMENT	
APPENDIX B – ID SAMPLE LABEL & LOCATION	
APPENDIX C – BLOCK DIAGRAM	
APPENDIX D – TEST SET-UP PHOTOGRAPHS	
APPENDIX E – EXTERNAL PHOTOGRAPHS	
APPENDIX F – INTERNAL PHOTOGRAPHS	
APPENDIX G – USER’S MANUAL	



Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: LG Electronics Inc.

Applicant Address: 19-1, Cheongho-ri, Jinwi-myeon, Pyeongteak-si, Gyeonggi-do, Korea.

Manufacturer: LG Electronics Inc.

Manufacturer Address: 19-1, Cheongho-ri, Jinwi-myeon, Pyeongteak-si, Gyeonggi-do, Korea.

Contact Person: Mr. Do-Hyung Kim, Chief research engineer

Tel. Number: +82-31-610-9623

- **FCC ID.** BEJ19LV2500UG
- **EUT Type** LED LCD TV/Monitor
- **Model Name** 19LV2500-UG
- **Trade Name** LG
- **Serial Number** Prototype
- **Rule Part(s)** FCC Part 15 Subpart B
- **Type of Authority** Certification
- **Test Procedure(s)** ANSI C63.4 (2003) / Canadian standard ICES-003
- **Dates of Test** July 15 ~ 18, 2011
- **Place of Test** **Gumi College EMC Center** (FCC Registration Number: 100749, 443957)
407, Bugok-dong, Gumi-si, Gyeongbuk, Korea.
- **Test Report Number** GETEC-E3-11-070
- **Dates of Issue** July 25, 2011




2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ASNI C63.4-2003) was used in determining radiated and conducted emissions emanating from **LG Electronics Inc. LED LCD TV/Monitor (Model Name: 19LV2500-UG)**

These measurement tests were conducted at **Gumi College EMC Center**.

The site address is 407, Bugok-dong, Gumi-si, Gyeongbuk, Korea.

This test site is one of the highest point of Gumi 1 college at about 200 km away from Seoul city and 40 km away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 (2003)

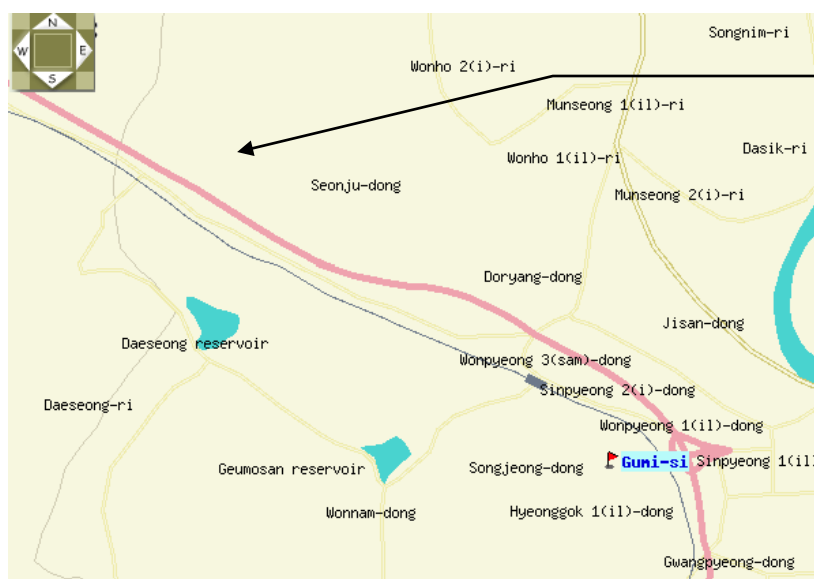

GUMI COLLEGE EMC CENTER
407, Bugok-dong, Gumi-si,
Gyeongbuk 730-711, Korea.
Tel: +82-54-440-1195
Fax: +82-54-440-1199

Fig 1. The map above shows the Gumi College in vicinity area.



3. Product Information

3.1 Description of EUT

The Equipment under Test (EUT) is the **LG Electronics Inc. LED LCD TV/Monitor (Model Name: 19LV2500-UG) FCC ID.: BEJ19LV2500UG**

MODELS		19LV2500 (19LV2500-UA)	22LV2500 (22LV2500-UA)	26LV2500 (26LV2500-UA)
			22LV2500 (22LV2500-UG)	26LV2500 (26LV2500-UG)
		19LV2500 (19LV2500-UG)	22LV255C (22LV255C-UA)	26LV2520 (26LV2520-UC)
				26LV2520 (26LV2520-UJ)
Dimensions (W x H x D)	With stand	455.2 mm x 354.5 mm x 150.7 mm (17.9 inch x 13.9 inch x 5.9 inch)		26LV255C (26LV255C-UA)
	Without stand	455.2 mm x 313.1 mm x 40.9 mm (17.9 inch x 12.3 inch x 1.6 inch)		635.6 mm x 475.0 mm x 178.0 mm (25.0 inch x 18.7 inch x 7.0 inch)
Weight	With stand	2.7 kg (5.9 lbs)	3.4 kg (7.4 lbs)	5.4 kg (11.9 lbs)
	Without stand	2.5 kg (5.5 lbs)	3.2 kg (7.0 lbs)	5.0 kg (11.0 lbs)
Current Value / Power consumption		1.4 A / 38 W	1.7 A / 40 W	1.8 A / 50 W
Power requirement		24 V $\overline{=}$, 1.4 A	24 V $\overline{=}$, 1.7 A	24 V $\overline{=}$, 1.8 A
Adapter (DC Power)		In: AC 100 - 240 V ~ 50/60 Hz		
		Out: DC 24 V, 2.5 A		
Television System		NTSC-M, ATSC, 64 & 256 QAM		
Program Coverage		VHF 2-13, UHF 14-69, CATV 1-135, DTV 2-69, CADTV 1-135		
External Antenna Impedance		75 Ω		
Environment condition	Operating Temperature	0 - 40 °C		
	Operating Humidity	Less than 80 %		
	Storage Temperature	-20 - 60 °C		
	Storage Humidity	Less than 85 %		

-. Maximum Frequency Range : 667 MHz

EUT Type: LED LCD TV/Monitor

FCC ID.: BEJ19LV2500UG



3.2 Support Equipment / Cables used

3.2.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID.
PC	Hewlett Packard	D530	S/N: CNG34800PY FCC ID.: DoC
Video card	ATI	ATI RV360(9600)	S/N: SN0402017176 FCC ID.: DoC
PS2 keyboard	COMPAQ	166516-AD6	S/N: B13BBOR391006D FCC ID.: AQ6-23K15
USB mouse	Great Pleasure Electronics Co., Ltd.	GP-M3100UE	S/N: 14036766 FCC ID.: N/A
DVD player	LG Electronics Inc.	LC-954	S/N: 3850R-Z674K FCC ID.: DoC
USB memory stick	SAMSUNG	SUM-PSB4	S/N: TBBB202478F FCC ID.: N/A
TV signal generator	FLUKE	54200M01	S/N: 831011 FCC ID.: DoC
Headset	SBC HL140	N/A	S/N: N/A FCC ID.: N/A

See “Appendix D – Test Setup Photographs” for actual system test set-up

3.2.2 System configuration

Description	Manufacturer	Model Name	S/N & FCC ID.
AC/DC adapter ¹⁾	LITE-ON Technology corporation	PA-1061-61	S/N: OB3CM62289803958 FCC ID.: N/A

1) Input ratings: AC (100 – 240) V~, (50 – 60) Hz, 1.5 A / Output ratings: DC 24 V, 2.5 A



3.2.3 Used Cable(s)

Cable Name	Condition	Description
Power cable	Connected to the adapter	1.80 m unshielded
Adapter cable	Connected to the EUT	1.50 m shielded with a ferrite core
RGB(Analog) cable	Connected to the EUT and PC	1.80 m shielded with two ferrite cores
HDMI/DVI(Digital) cable	Connected to the EUT and PC	2.00 m shielded
RS-232C (Control & service) cable	Connected to the EUT and PC	1.80 m shielded
Audio(RGB/DVI) in cable	Connected to the EUT and PC	1.50 m shielded
AV cable	Connected to the EUT and DVD player	3.00 m shielded
Component cable	Connected to the EUT and DVD player	3.00 m shielded
Headset cable	Connected to the EUT and headset	1.20 m shielded
Antenna cable	Connected to the EUT and TV signal generator	10.00 m shielded

3.3 Modification Item(s)

- None



4. Description of tests

4.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

- Test Voltage / Frequency : AC 120 V / 60 Hz

- Test Mode(s)

- . Monitor mode

Radiated emission: 1 360 × 768 / 60 Hz (RGB: Analog, HDMI/DVI: Digital)

Conducted emission: 1 360 × 768 / 60 Hz (RGB: Analog, HDMI/DVI: Digital)

1 024 × 768 / 60 Hz (RGB: Analog), 640 × 480 / 60 Hz (RGB: Analog)

◆ Operating test pattern

- . “H” character scrolling mode (Font size: 10)
- . Black background white character
- . Brightness and contrast was adjusted as maximum level
- . Continuous playback of 1 kHz audio file with winamp player
- . USB memory stick was connected to the USB port

“The verification report for TV/AV mode would be issued by LG Electronics Inc.”



4.2 Conducted Emission

The Line conducted emission test facility is inside a 4 m × 8 m × 2.5 m shielded enclosure. (FCC Registration No.: 100749)

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.8 m in height and 0.4 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ESH2-Z5) and the support equipment is powered from the Rohde & Schwarz LISN (ESH3-Z5). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCS30).

The EMI test receiver was scanned from 150 kHz to 30 MHz with 20 ms sweep time to determine the frequency producing the maximum EME from the EUT. The frequency producing the maximum level was re-examined using Quasi-Peak mode of the EMI test receiver.

The bandwidth of Quasi-peak mode was set to 9 kHz. Each emission was maximized consistent with typical applications by varying the configuration of the test sample. Interface cables were connected to the available interface ports of the test unit. The effect of varying the position of cables was investigated to find the configuration that produces maximum diagram emission. Excess cable lengths were bundled at center with 30 cm ~ 40 cm.

Each EME reported was calibrated using the R/S signal generator



Fig 2. Impedance of LISN



4.3 Radiated Emission

Preliminary measurements were conducted 3 m semi anechoic chamber using broadband antennas to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The technology configuration, mode of operation and turntable azimuth with respect to antenna was note for each frequency found.

Final measurements were made 3 m chamber (FCC registration No.: 443957) and/or 10 m OATS (FCC registration No.: 100749).

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was re-examined and investigated using EMI test receiver. The detector function was set to CISPR quasi-peak mode average mode and the bandwidth of the receiver was set to 120 kHz or 1 MHz depending on the frequency or type of signal.

The EUT, support equipment and interconnecting cables were reconfigured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8 m high non-metallic 1.0 m × 1.5 m table.

The turntable containing the test sample was rotated; the antenna height was varied 1 to 4 meter and stopped at the azimuth or height producing the maximum emission.

Each EME reported was calibrated using the R/S signal generator

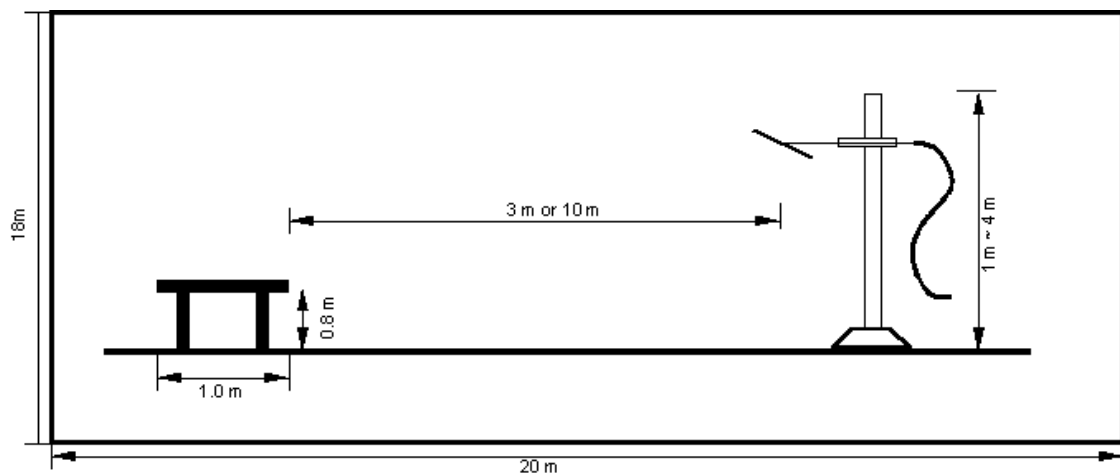


Fig 3. Dimensions of test site



5. Conducted Emission

5.1 Operating Environment

Temperature : 25 °C
Relative Humidity : 51 % R.H.

5.2 Test Set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8 m heights above the floor, 0.4 m from the reference ground plane (GRP) wall and 0.8 m from AMN & ISN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

5.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO "Guide to the expression of uncertainty in measurement."

The measurement uncertainty was given with a confidence of 95 %.

Test Items	Uncertainty	Remark
Conducted emission (9 kHz ~ 150 kHz)	± 2.71 dB	Confidence levels of 95 % ($k = 2$)
Conducted emission (150 kHz ~ 30 MHz)	± 3.34 dB	Confidence levels of 95 % ($k = 2$)



5.4 Limit

RFI Conducted	FCC Limit(dB μ V/m) Class B	
Freq. Range	Quasi-Peak	Average
150 kHz ~ 0.5 MHz	66 ~ 56*	56 ~ 46*
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50
*Limits decreases linearly with the logarithm of frequency.		

5.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESCS30	Rohde & Schwarz	EMI Test Receiver	839809/003	12. 10. 2011
■ - ESH3-Z5	Rohde & Schwarz	LISN	838979/020	12. 10. 2011
■ - ESH2-Z5	Rohde & Schwarz	LISN	829991/009	12. 10. 2011
□ - ISN T8	TESEQ. GmbH	ISN	24568	11. 09. 2011


5.6 Test data for Conducted Emission

-. Test Date : July 15 ~ 16, 2011
-. Resolution Bandwidth : 9 kHz
-. Frequency Range : 0.15 MHz ~ 30 MHz



◆ Operating condition: 1 360 × 768 / 60 Hz (RGB: Analog)

Voltage with 4-Line-LISN_L1

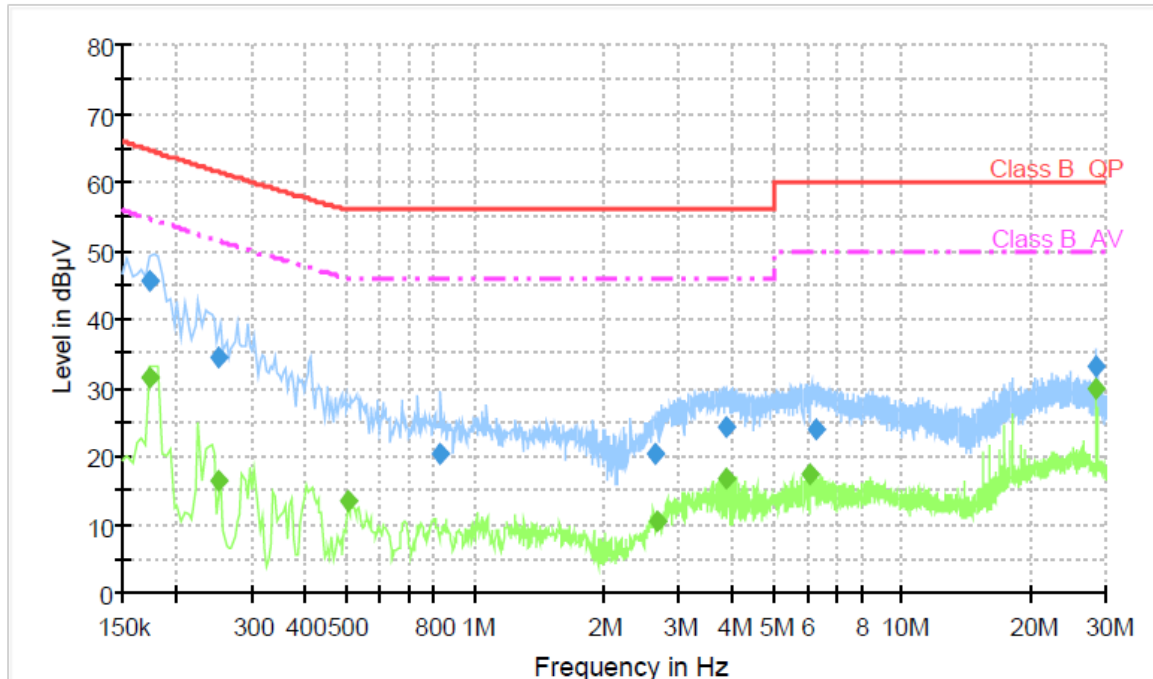

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.174000	45.5	1000.000	9.000	GND	L1	10.1	19.2	64.7	
0.252000	34.3	1000.000	9.000	GND	L1	10.1	27.2	61.5	
0.828000	20.2	1000.000	9.000	GND	L1	10.1	35.8	56.0	
2.652000	20.4	1000.000	9.000	GND	L1	10.2	35.6	56.0	
3.856000	24.4	1000.000	9.000	GND	L1	10.3	31.6	56.0	
6.288000	23.9	1000.000	9.000	GND	L1	10.4	36.1	60.0	
28.484000	33.1	1000.000	9.000	GND	L1	11.2	26.9	60.0	


Final Measurement Detector 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.174000	31.3	1000.000	9.000	GND	L1	10.1	23.4	54.7	
0.252000	16.5	1000.000	9.000	GND	L1	10.1	34.9	51.4	
0.508000	13.5	1000.000	9.000	GND	L1	10.1	32.5	46.0	
2.676000	10.5	1000.000	9.000	GND	L1	10.2	35.5	46.0	
3.868000	16.6	1000.000	9.000	GND	L1	10.3	29.4	46.0	
6.064000	17.3	1000.000	9.000	GND	L1	10.4	32.7	50.0	
28.484000	30.0	1000.000	9.000	GND	L1	11.2	20.0	50.0	

< Fig 4. Conducted emission result (Live line) >



Voltage with 4-Line-LISN_N

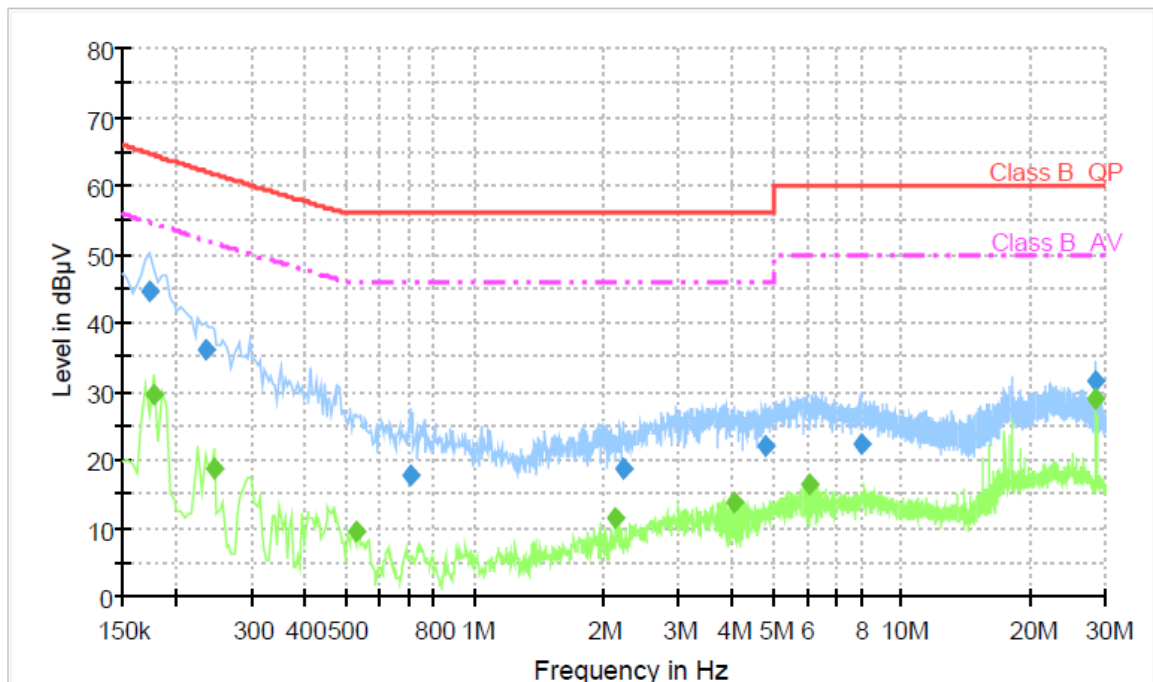

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.174000	44.5	1000.000	9.000	GND	N	10.1	20.2	64.7	
0.234000	35.9	1000.000	9.000	GND	N	10.1	26.2	62.1	
0.706000	17.7	1000.000	9.000	GND	N	10.1	38.3	56.0	
2.238000	18.5	1000.000	9.000	GND	N	10.2	37.5	56.0	
4.770000	21.9	1000.000	9.000	GND	N	10.3	34.1	56.0	
8.078000	22.3	1000.000	9.000	GND	N	10.4	37.7	60.0	
28.482000	31.4	1000.000	9.000	GND	N	10.7	28.6	60.0	

Final Measurement Detector 2


Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.178000	29.4	1000.000	9.000	GND	N	10.1	25.1	54.5	
0.246000	18.8	1000.000	9.000	GND	N	10.1	32.9	51.7	
0.530000	9.5	1000.000	9.000	GND	N	10.1	36.5	46.0	
2.142000	11.3	1000.000	9.000	GND	N	10.2	34.7	46.0	
4.050000	13.8	1000.000	9.000	GND	N	10.3	32.2	46.0	
6.066000	16.4	1000.000	9.000	GND	N	10.4	33.6	50.0	
28.482000	28.8	1000.000	9.000	GND	N	10.7	21.2	50.0	

< Fig 5. Conducted emission result (Neutral line) >



◆ Operating condition: 1 024 × 768 / 60 Hz (RGB: Analog)

Voltage with 4-Line-LISN_L1

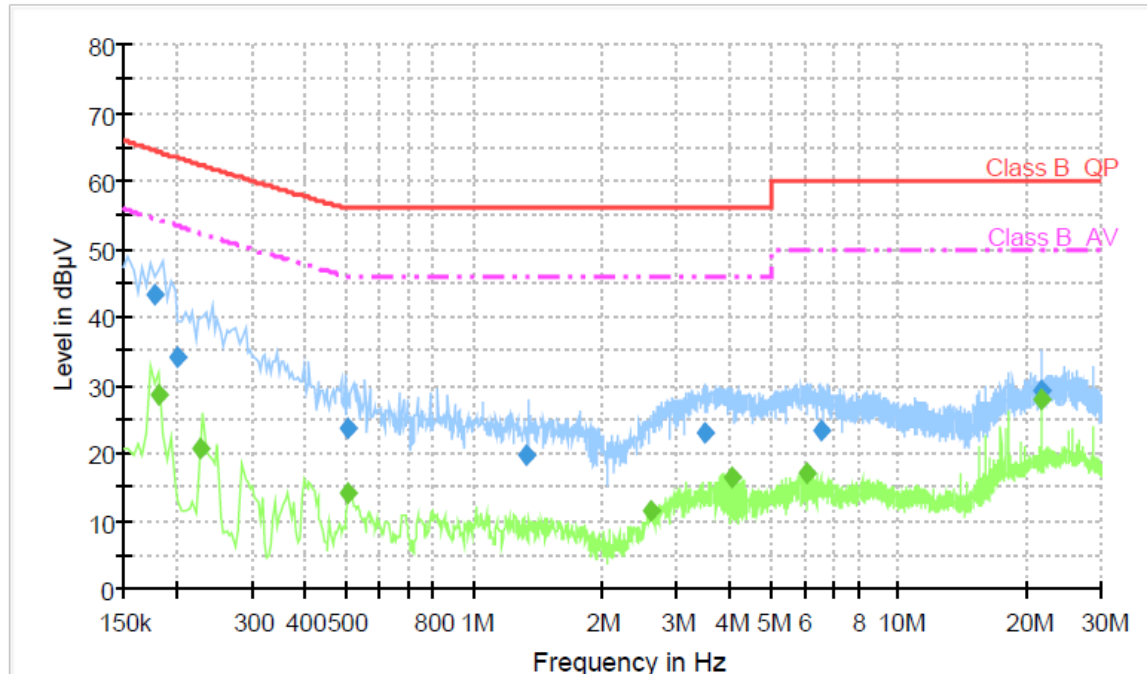

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.178000	43.3	1000.000	9.000	GND	L1	10.1	21.2	64.5	
0.200000	34.2	1000.000	9.000	GND	L1	10.1	29.3	63.5	
0.504000	23.6	1000.000	9.000	GND	L1	10.1	32.4	56.0	
1.328000	19.8	1000.000	9.000	GND	L1	10.1	36.2	56.0	
3.508000	23.1	1000.000	9.000	GND	L1	10.2	32.9	56.0	
6.560000	23.3	1000.000	9.000	GND	L1	10.4	36.7	60.0	
21.596000	29.3	1000.000	9.000	GND	L1	11.1	30.7	60.0	


Final Measurement Detector 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.182000	28.6	1000.000	9.000	GND	L1	10.1	25.7	54.3	
0.228000	20.6	1000.000	9.000	GND	L1	10.1	31.7	52.3	
0.508000	14.1	1000.000	9.000	GND	L1	10.1	31.9	46.0	
2.600000	11.6	1000.000	9.000	GND	L1	10.2	34.4	46.0	
4.052000	16.3	1000.000	9.000	GND	L1	10.3	29.7	46.0	
6.072000	17.1	1000.000	9.000	GND	L1	10.4	32.9	50.0	
21.600000	27.9	1000.000	9.000	GND	L1	11.1	22.1	50.0	

< Fig 6. Conducted emission result (Live line) >



Voltage with 4-Line-LISN_N

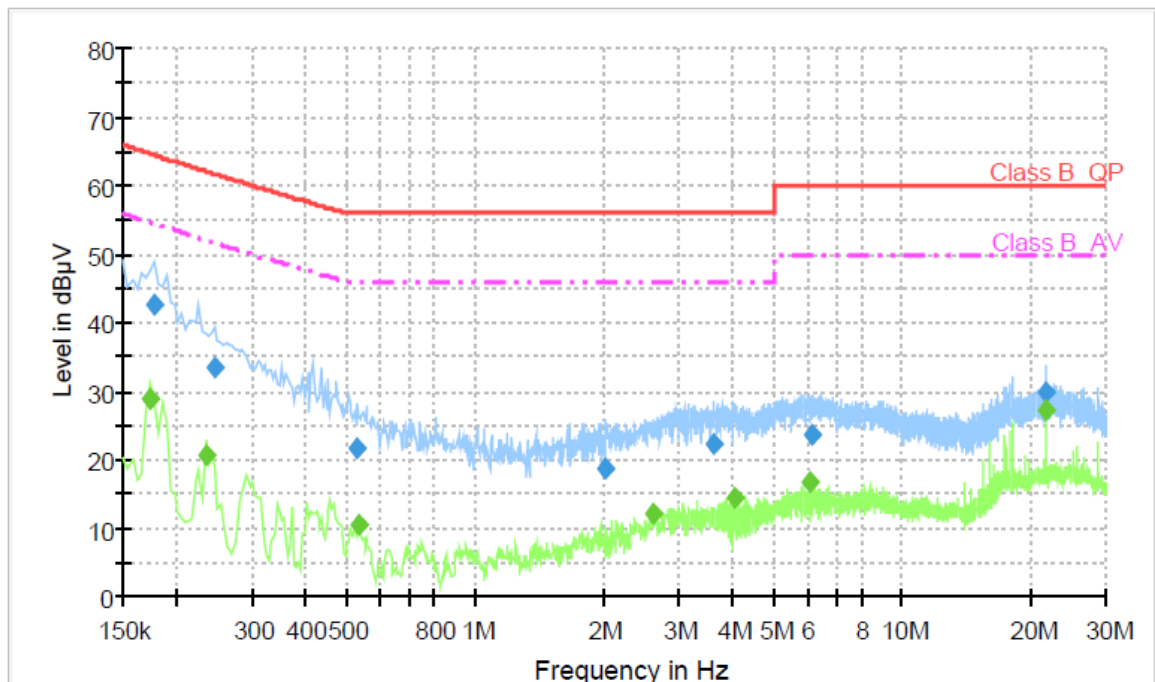

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.178000	42.8	1000.000	9.000	GND	N	10.1	21.7	64.5	
0.246000	33.4	1000.000	9.000	GND	N	10.1	28.3	61.7	
0.530000	21.6	1000.000	9.000	GND	N	10.1	34.4	56.0	
2.018000	18.7	1000.000	9.000	GND	N	10.2	37.3	56.0	
3.630000	22.3	1000.000	9.000	GND	N	10.3	33.7	56.0	
6.134000	23.5	1000.000	9.000	GND	N	10.4	36.5	60.0	
21.602000	29.8	1000.000	9.000	GND	N	10.8	30.2	60.0	

Final Measurement Detector 2


Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.174000	28.7	1000.000	9.000	GND	N	10.1	26.0	54.7	
0.234000	20.6	1000.000	9.000	GND	N	10.1	31.5	52.1	
0.534000	10.3	1000.000	9.000	GND	N	10.1	35.7	46.0	
2.606000	12.0	1000.000	9.000	GND	N	10.2	34.0	46.0	
4.050000	14.4	1000.000	9.000	GND	N	10.3	31.6	46.0	
6.070000	16.7	1000.000	9.000	GND	N	10.4	33.3	50.0	
21.598000	27.1	1000.000	9.000	GND	N	10.8	22.9	50.0	

< Fig 7. Conducted emission result (Neutral line) >



◆ Operating condition: 640 × 480 / 60 Hz (RGB: Analog)

Voltage with 4-Line-LISN_L1

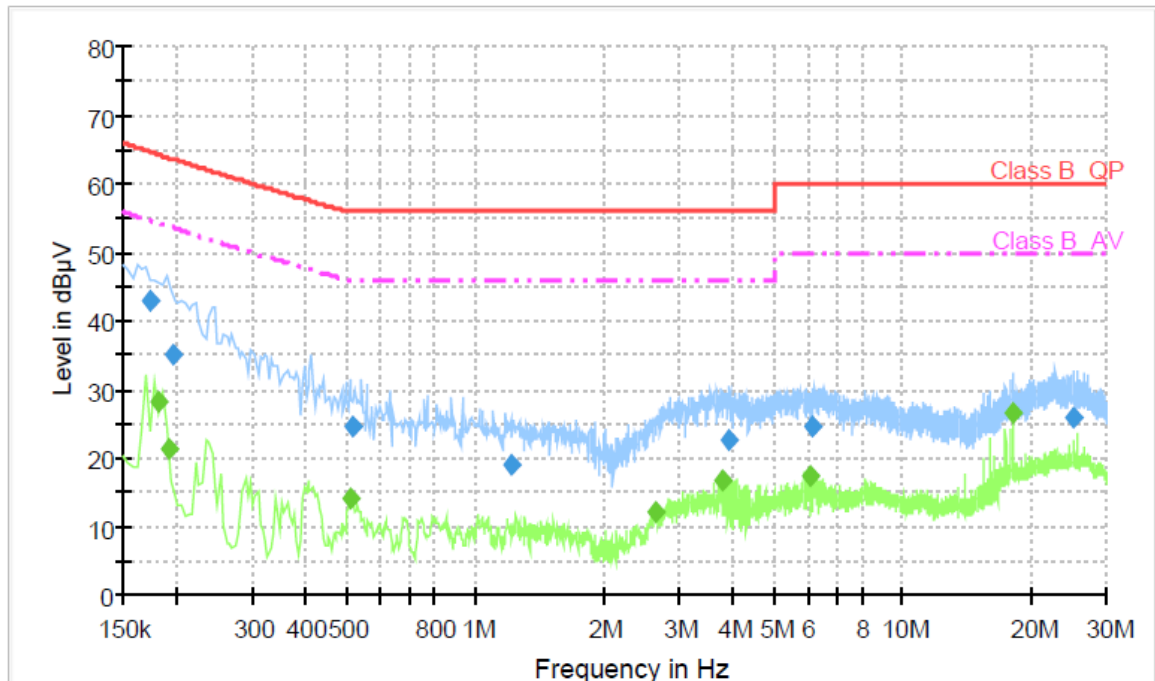

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.174000	42.9	1000.000	9.000	GND	L1	10.1	21.8	64.7	
0.196000	34.9	1000.000	9.000	GND	L1	10.1	28.7	63.6	
0.516000	24.6	1000.000	9.000	GND	L1	10.1	31.4	56.0	
1.220000	19.0	1000.000	9.000	GND	L1	10.1	37.0	56.0	
3.896000	22.5	1000.000	9.000	GND	L1	10.3	33.5	56.0	
6.168000	24.7	1000.000	9.000	GND	L1	10.4	35.3	60.0	
25.104000	26.0	1000.000	9.000	GND	L1	11.1	34.0	60.0	


Final Measurement Detector 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.182000	28.2	1000.000	9.000	GND	L1	10.1	26.1	54.3	
0.192000	21.3	1000.000	9.000	GND	L1	10.1	32.5	53.8	
0.512000	14.0	1000.000	9.000	GND	L1	10.1	32.0	46.0	
2.632000	12.1	1000.000	9.000	GND	L1	10.2	33.9	46.0	
3.804000	16.6	1000.000	9.000	GND	L1	10.3	29.4	46.0	
6.064000	17.4	1000.000	9.000	GND	L1	10.4	32.6	50.0	
18.028000	26.7	1000.000	9.000	GND	L1	11.0	23.3	50.0	

< Fig 8. Conducted emission result (Live line) >



Voltage with 4-Line-LISN_N

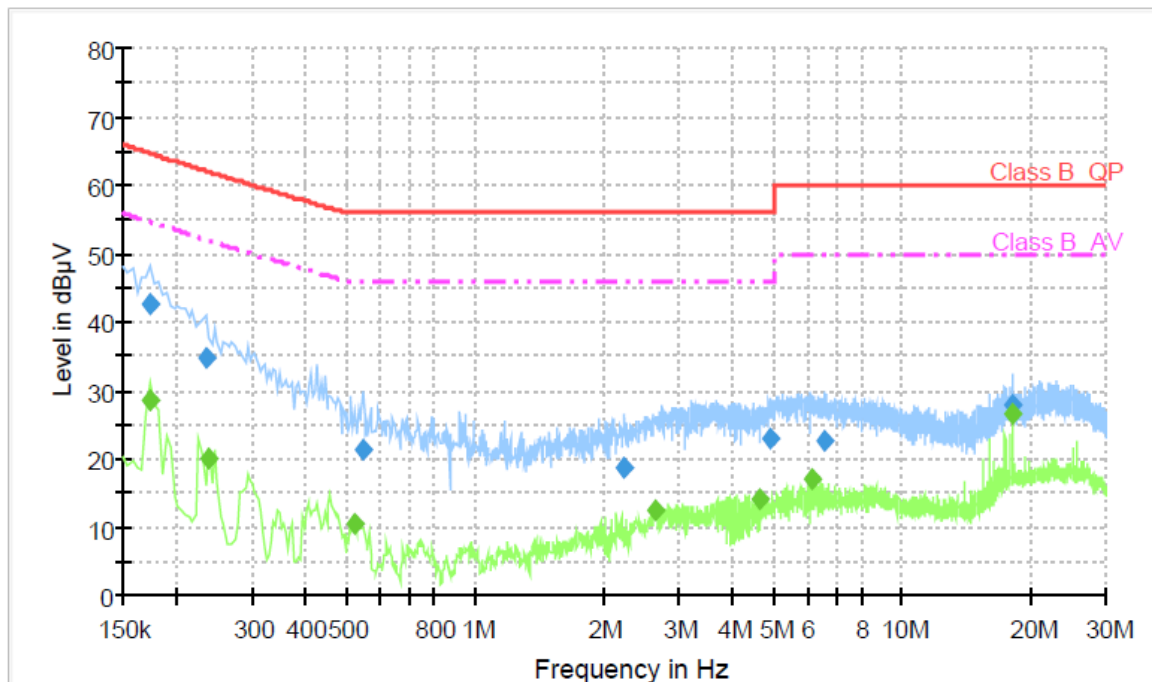

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.174000	42.6	1000.000	9.000	GND	N	10.1	22.1	64.7	
0.234000	34.6	1000.000	9.000	GND	N	10.1	27.5	62.1	
0.546000	21.2	1000.000	9.000	GND	N	10.1	34.8	56.0	
2.242000	18.6	1000.000	9.000	GND	N	10.2	37.4	56.0	
4.918000	22.8	1000.000	9.000	GND	N	10.3	33.2	56.0	
6.554000	22.7	1000.000	9.000	GND	N	10.4	37.3	60.0	
18.030000	27.7	1000.000	9.000	GND	N	10.9	32.3	60.0	

Final Measurement Detector 2


Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.174000	28.4	1000.000	9.000	GND	N	10.1	26.3	54.7	
0.238000	20.2	1000.000	9.000	GND	N	10.1	31.7	51.9	
0.522000	10.6	1000.000	9.000	GND	N	10.1	35.4	46.0	
2.630000	12.3	1000.000	9.000	GND	N	10.2	33.7	46.0	
4.626000	14.2	1000.000	9.000	GND	N	10.3	31.8	46.0	
6.122000	17.0	1000.000	9.000	GND	N	10.4	33.0	50.0	
18.026000	26.4	1000.000	9.000	GND	N	10.9	23.6	50.0	

< Fig 9. Conducted emission result (Neutral line) >



◆ Operating condition: 1 360 × 768 / 60 Hz (HDMI/DVI: Digital)

Voltage with 4-Line-LISN_L1

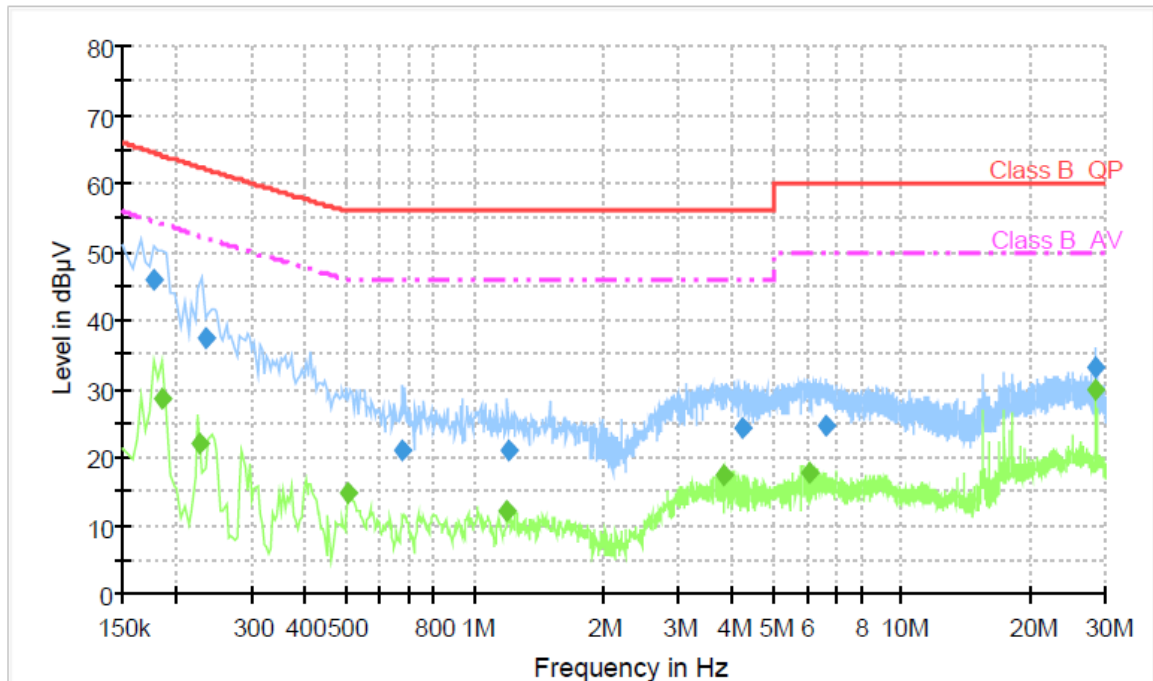

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.178000	46.0	1000.000	9.000	GND	L1	10.1	18.5	64.5	
0.236000	37.3	1000.000	9.000	GND	L1	10.1	24.7	62.0	
0.680000	21.0	1000.000	9.000	GND	L1	10.1	35.0	56.0	
1.196000	20.8	1000.000	9.000	GND	L1	10.1	35.2	56.0	
4.240000	24.1	1000.000	9.000	GND	L1	10.3	31.9	56.0	
6.608000	24.7	1000.000	9.000	GND	L1	10.4	35.3	60.0	
28.484000	33.0	1000.000	9.000	GND	L1	11.2	27.0	60.0	


Final Measurement Detector 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.186000	28.5	1000.000	9.000	GND	L1	10.1	25.6	54.1	
0.228000	22.0	1000.000	9.000	GND	L1	10.1	30.3	52.3	
0.508000	14.8	1000.000	9.000	GND	L1	10.1	31.2	46.0	
1.192000	12.1	1000.000	9.000	GND	L1	10.1	33.9	46.0	
3.812000	17.5	1000.000	9.000	GND	L1	10.3	28.5	46.0	
6.076000	17.7	1000.000	9.000	GND	L1	10.4	32.3	50.0	
28.484000	29.8	1000.000	9.000	GND	L1	11.2	20.2	50.0	

< Fig 10. Conducted emission result (Live line) >



Voltage with 4-Line-LISN_N

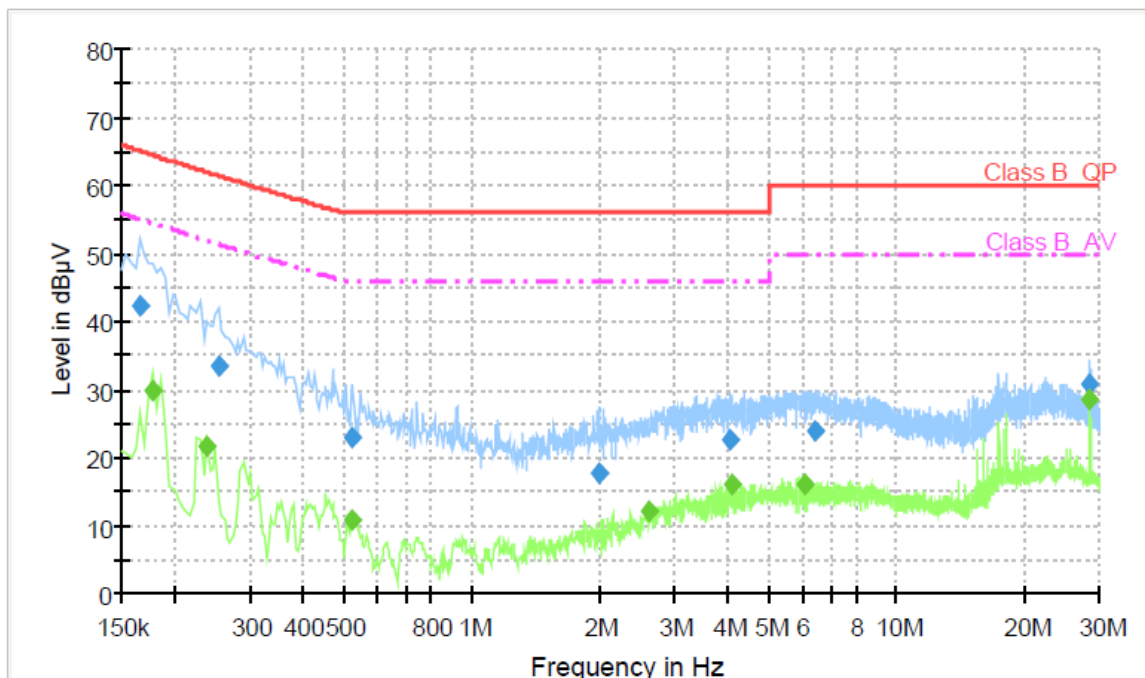

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.166000	42.3	1000.000	9.000	GND	N	10.1	22.8	65.1	
0.254000	33.5	1000.000	9.000	GND	N	10.1	27.9	61.4	
0.522000	22.8	1000.000	9.000	GND	N	10.1	33.2	56.0	
1.986000	17.8	1000.000	9.000	GND	N	10.2	38.2	56.0	
4.066000	22.6	1000.000	9.000	GND	N	10.3	33.4	56.0	
6.394000	23.8	1000.000	9.000	GND	N	10.4	36.2	60.0	
28.486000	30.9	1000.000	9.000	GND	N	10.7	29.1	60.0	

Final Measurement Detector 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.178000	29.8	1000.000	9.000	GND	N	10.1	24.7	54.5	
0.238000	21.6	1000.000	9.000	GND	N	10.1	30.3	51.9	
0.522000	10.8	1000.000	9.000	GND	N	10.1	35.2	46.0	
2.606000	12.1	1000.000	9.000	GND	N	10.2	33.9	46.0	
4.114000	16.0	1000.000	9.000	GND	N	10.3	30.0	46.0	
6.074000	16.1	1000.000	9.000	GND	N	10.4	33.9	50.0	
28.482000	28.5	1000.000	9.000	GND	N	10.7	21.5	50.0	

< Fig 11. Conducted emission result (Neutral line) >



6. Radiated Emission

6.1 Operating Environment

Temperature : 24 °C
Relative Humidity : 44 % R.H.

6.2 Test Set-up

A preliminary and final measurement was at 3 m anechoic chamber.

The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

6.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95 %.

Test Items(Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	± 4.38 dB	Confidence levels of 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	± 3.50 dB	Confidence levels of 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	± 3.75 dB	Confidence levels of 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	± 3.59 dB	Confidence levels of 95 % ($k = 2$)



6.4 Limit

Frequency (MHz)	FCC Limit @ 3 m. dB μ V/m	CISPR Limit @ 10 m. dB μ V/m
30 ~ 88	40.0	30.0
88 ~ 216	43.5	30.0
216 ~ 230	46.0	30.0
230 ~ 960	46.0	37.0
960 ~ 1 000	54.0	37.0
> 1 000	54.0	No Specified limit

6.5 Test Equipment used


Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESIB26	Rohde & Schwarz	EMI Test Receiver	830482/010	12. 11. 2011
■ - VULB9160	Schwarzbeck	Broadband Test Antenna	3193	03. 15. 2012
■ - BBHA9120D	Schwarzbeck	Horn ANT	207	12. 22. 2011
■ - MCU066	maturo GmbH	Position Controller	1390306	N/A
■ - TT2.5SI	maturo GmbH	Turntable	1390307	N/A
■ - AM 4.0	maturo GmbH	Antenna Mast	1390308	N/A
■ - AFS 44 00101800-25-10P-44	MITEQ	Preamplifier	1258942	11. 12. 2011

6.6 Test data for Radiated Emission

- Test Date : July 16 ~ 18, 2011
- Resolution Bandwidth : 120 kHz/1 MHz
- Frequency Range : 30 MHz ~ 5 000 MHz
- Measurement Distance : 3 m
- Note : The highest frequency of the internal source of the EUT is between 500 MHz and 1 000 MHz (667 MHz). The measurement was made up to 5 000 MHz



- ◆ Operating Condition: 1 360 × 768 / 60 Hz (RGB: Analog)
Red trace: Vertical polarization, Blue trace: Horizontal polarization

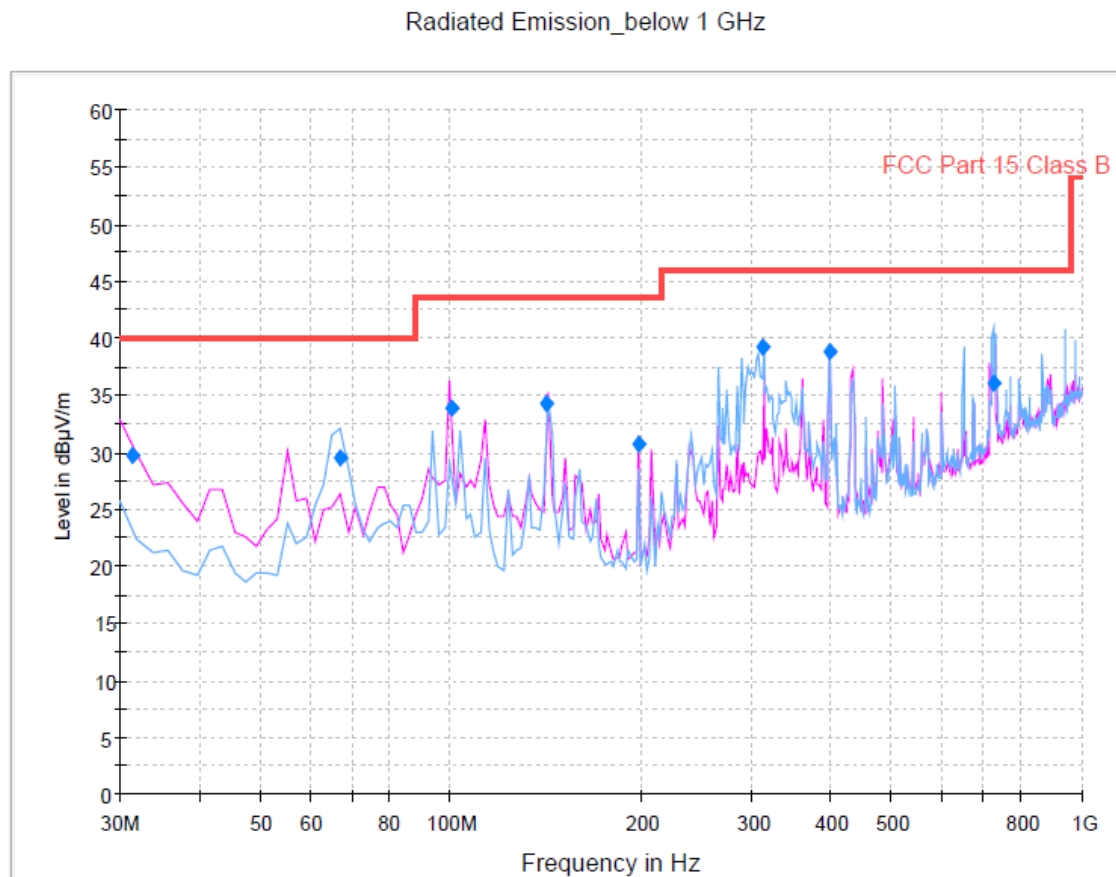


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
31.320000	29.6	1000.0	120.000	100.0	V	348.0	11.4	10.4	40.0
67.113868	29.5	1000.0	120.000	300.0	H	247.0	11.9	10.5	40.0
100.239960	34.0	1000.0	120.000	100.0	V	255.0	11.2	9.5	43.5
142.445491	34.3	1000.0	120.000	100.0	V	183.0	14.4	9.2	43.5
199.418236	30.7	1000.0	120.000	100.0	V	200.0	11.5	12.8	43.5
313.367615	39.2	1000.0	120.000	100.0	H	176.0	17.1	6.8	46.0
398.878677	38.7	1000.0	120.000	100.0	H	125.0	19.7	7.3	46.0
722.387936	36.0	1000.0	120.000	100.0	H	198.0	25.9	10.0	46.0

< Fig 12. Radiated emission result (30 MHz ~ 1 000 MHz) >



- ◆ Operating Condition: 1 360 × 768 / 60 Hz (HDMI/DVI: Digital)
Red trace: Vertical polarization, Blue trace: Horizontal polarization

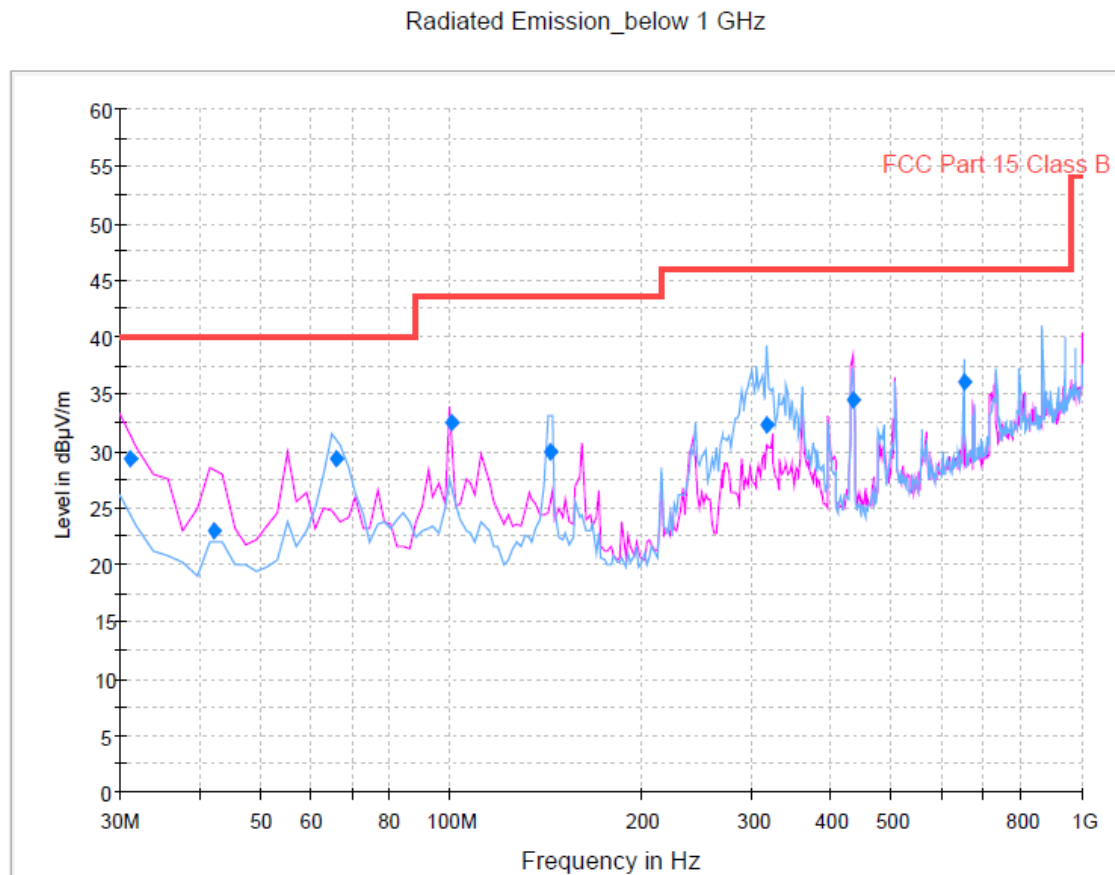

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
31.200000	29.3	1000.0	120.000	100.0	V	258.0	11.4	10.7	40.0
42.483327	23.0	1000.0	120.000	100.0	V	290.0	12.6	17.0	40.0
66.189980	29.3	1000.0	120.000	300.0	H	231.0	12.0	10.7	40.0
100.239960	32.5	1000.0	120.000	100.0	V	302.0	11.2	11.0	43.5
144.325491	29.8	1000.0	120.000	249.0	H	93.0	14.5	13.7	43.5
318.015391	32.3	1000.0	120.000	100.0	H	230.0	17.2	13.7	46.0
433.068657	34.4	1000.0	120.000	100.0	V	197.0	20.3	11.6	46.0
650.000200	36.0	1000.0	120.000	100.0	H	209.0	24.8	10.0	46.0


< Fig 13. Radiated emission result (30 MHz ~ 1 000 MHz) >



◆ Operating Condition: 1 360 × 768 / 60 Hz (RGB: Analog)

Green market: Average detector, Blue market: Peak detector

Radiated Emission_above 1 GHz

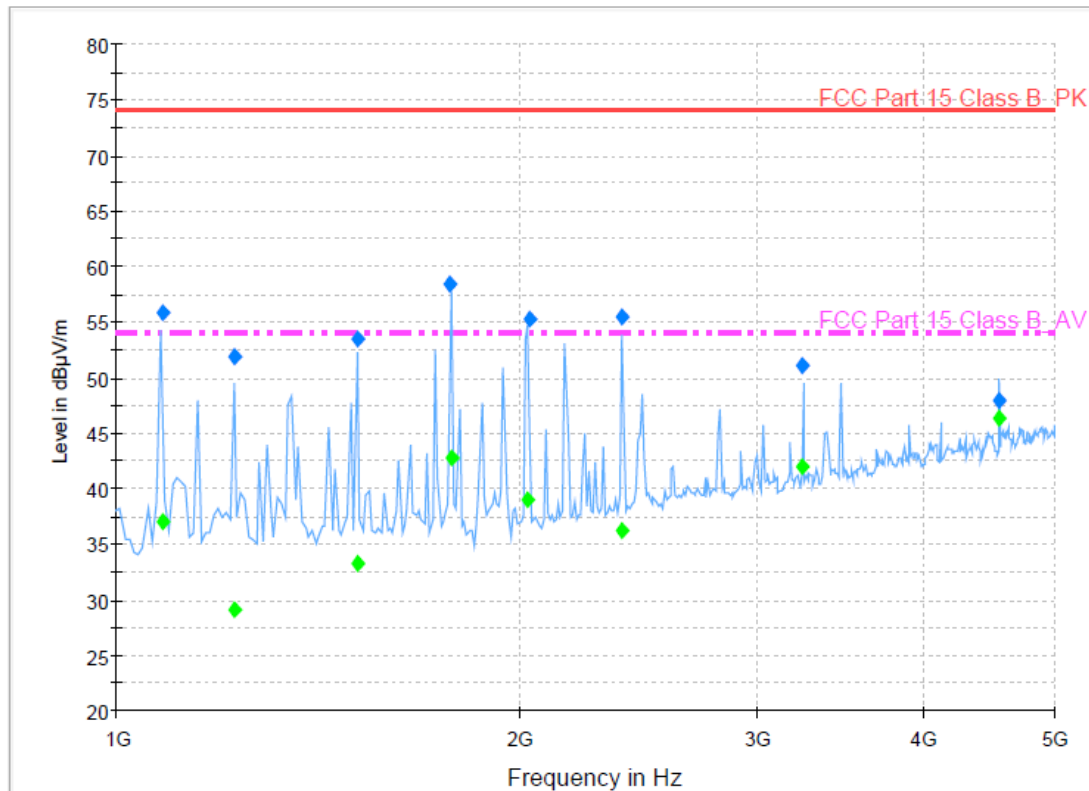

Final Result 1

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1083.160321	55.9	1000.0	1000.000	100.0	V	203.0	-14.1	18.1	74.0
1227.848898	51.9	1000.0	1000.000	187.0	H	215.0	-13.6	22.1	74.0
1516.426052	53.5	1000.0	1000.000	100.0	V	160.0	-13.0	20.5	74.0
1775.355110	58.4	1000.0	1000.000	138.0	V	43.0	-12.2	15.6	74.0
2030.652104	55.2	1000.0	1000.000	100.0	V	225.0	-11.5	18.8	74.0
2383.357515	55.4	1000.0	1000.000	100.0	H	138.0	-9.9	18.6	74.0
3249.905010	51.0	1000.0	1000.000	100.0	V	178.0	-6.4	23.0	74.0
4550.102204	47.8	1000.0	1000.000	113.0	H	171.0	-2.2	26.2	74.0


Final Result 2

Frequency (MHz)	CAverage (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1083.160321	37.0	1000.0	1000.000	130.0	V	205.0	-14.1	17.0	54.0
1227.848898	29.0	1000.0	1000.000	187.0	H	218.0	-13.6	25.0	54.0
1516.426052	33.4	1000.0	1000.000	100.0	V	158.0	-13.0	20.6	54.0
1779.755110	42.8	1000.0	1000.000	121.0	V	25.0	-12.2	11.2	54.0
2029.452104	39.0	1000.0	1000.000	100.0	V	225.0	-11.5	15.0	54.0
2383.357515	36.2	1000.0	1000.000	100.0	H	140.0	-9.9	17.8	54.0
3249.905010	41.9	1000.0	1000.000	100.0	V	181.0	-6.4	12.1	54.0
4550.102204	46.4	1000.0	1000.000	121.0	H	166.0	-2.2	7.6	54.0

< Fig 14. Radiated emission result (1 000 MHz ~ 5 000 MHz) >



- ◆ Operating Condition: 1 360 × 768 / 60 Hz (HDMI/DVI: Digital)
Green marker: Average detector, Blue marker: Peak detector
Radiated Emission_above 1 GHz

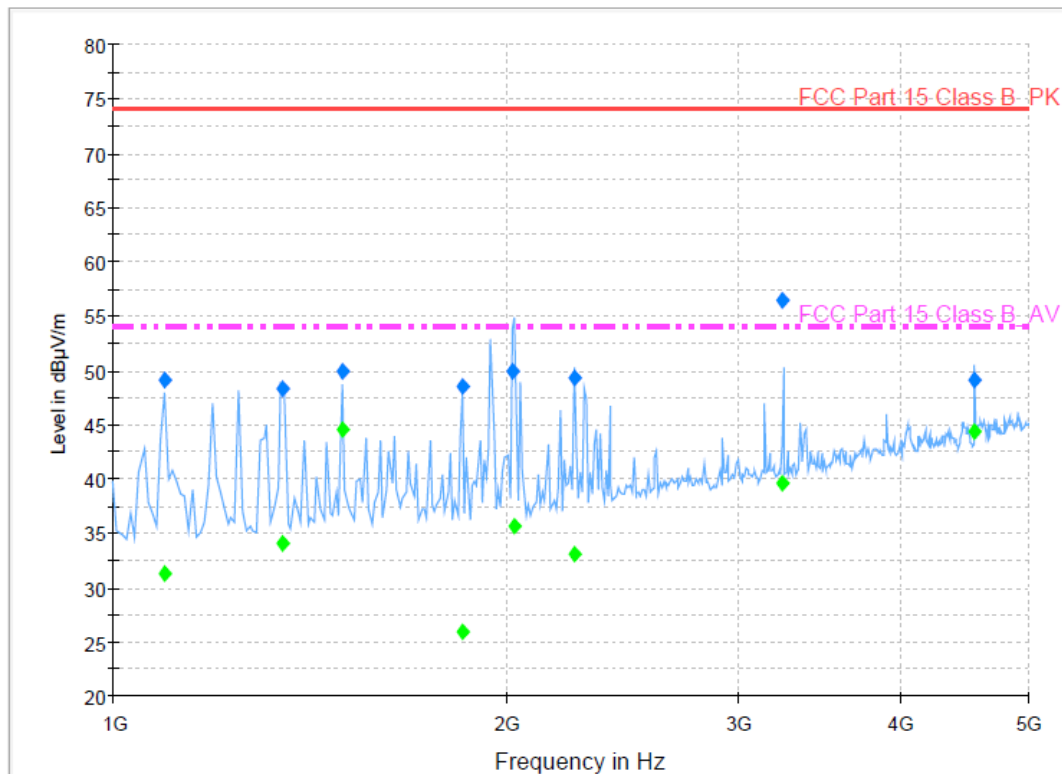

Final Result 1

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1096.792385	49.1	1000.0	1000.000	100.0	V	195.0	-14.1	24.9	74.0
1349.689379	48.3	1000.0	1000.000	100.0	V	319.0	-13.3	25.7	74.0
1500.393988	50.0	1000.0	1000.000	137.0	V	354.0	-13.0	24.0	74.0
1848.299399	48.5	1000.0	1000.000	100.0	V	202.0	-12.1	25.5	74.0
2021.452104	50.0	1000.0	1000.000	150.0	V	230.0	-11.5	24.0	74.0
2254.301002	49.4	1000.0	1000.000	100.0	V	190.0	-10.5	24.6	74.0
3249.905010	56.4	1000.0	1000.000	100.0	V	174.0	-6.4	17.6	74.0
4550.102204	49.2	1000.0	1000.000	100.0	V	190.0	-2.2	24.8	74.0

Final Result 2

Frequency (MHz)	CAverage (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1096.792385	31.3	1000.0	1000.000	138.0	V	202.0	-14.1	22.7	54.0
1349.289379	34.0	1000.0	1000.000	100.0	V	325.0	-13.3	20.0	54.0
1500.393988	44.6	1000.0	1000.000	100.0	V	350.0	-13.0	9.4	54.0
1848.299399	26.0	1000.0	1000.000	100.0	V	210.0	-12.1	28.0	54.0
2023.452104	35.6	1000.0	1000.000	100.0	V	229.0	-11.5	18.4	54.0
2254.301002	33.0	1000.0	1000.000	100.0	V	186.0	-10.5	21.0	54.0
3249.905010	39.6	1000.0	1000.000	113.0	V	176.0	-6.4	14.4	54.0
4550.102204	44.3	1000.0	1000.000	100.0	V	195.0	-2.2	9.7	54.0

< Fig 15. Radiated emission result (1 000 MHz ~ 5 000 MHz) >



7. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

7.1 Example 1 :

■ 20.3 MHz

Class B Limit	= 250 μV = 48 dB μV
Reading	= 39.2 dB μV
$10^{(39.2\text{dB}\mu\text{V}/20)}$	= 91.2 μV
Margin	= 48 dB μV - 39.2 dB μV = 8.8 dB

7.2 Example 2 :

■ 66.7 MHz

Class B Limit	= 100 $\mu\text{V}/\text{m}$ = 40.0 dB $\mu\text{V}/\text{m}$
Reading	= 31.0 dB μV
Antenna Factor + Cable Loss = 5.8 dB	
Total	= 36.8 dB $\mu\text{V}/\text{m}$
Margin	= 40.0 dB $\mu\text{V}/\text{m}$ - 36.8 dB $\mu\text{V}/\text{m}$ = 3.2 dB



8. Recommendation & Conclusion

The data collected shows that the **LG Electronics Inc. LED LCD TV/Monitor (Model Name: 19LV2500-UG)** was complies with §15.107 and 15.109 of the FCC Rules.