

FCC EVALUATION REPORT FOR CERTIFICATION

Applicant: LG Electronics Inc.

19-1, Cheongho-ri, Jinwi-myeon,

Pyeongteak-si, Gyeonggi-do, Korea.

Attn: Mr. Do-Hyung Kim, Chief research engineer

Date of Issue: July 18, 2011

Order Number: GETEC-C1-11-148

Test Report Number: GETEC-E3-11-067

Test Site: Gumi College EMC Center

FCC Registration Number: (100749, 443957)

FCC ID. : BEJ26LV255CUA

Applicant : LG Electronics Inc.

Rule Part(s)	: FCC Part 15 Subpart B
Equipment Class	: Class B computing device peripheral (JBP)
EUT Type	: LED LCD TV/Monitor
Type of Authority	: Certification
Model Name	: 26LV255C-UA
Trade Name	: LG

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003 / Canadian standard ICES-003

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,

Reviewed by,



Hyun Kim, Engineer
GUMI College EMC center



Jae-Hoon Jeong, Senior Engineer
GUMI College EMC center



CONTENTS

1. GENERAL INFORMATION	3
2. INTRODUCTION	4
3. PRODUCT INFORMATION	5
3.1 DESCRIPTION OF EUT.....	5
3.2 SUPPORT EQUIPMENT / CABLES USED	6
3.3 MODIFICATION ITEM(S)	7
4. DESCRIPTION OF TESTS.....	8
4.1 TEST CONDITION.....	8
4.2 CONDUCTED EMISSION	9
4.3 RADIATED EMISSION.....	10
5. CONDUCTED EMISSION.....	11
5.1 OPERATING ENVIRONMENT	11
5.2 TEST SET-UP	11
5.3 MEASUREMENT UNCERTAINTY.....	11
5.4 LIMIT	12
5.5 TEST EQUIPMENT USED.....	12
5.6 TEST DATA FOR CONDUCTED EMISSION	12
6. RADIATED EMISSION	21
6.1 OPERATING ENVIRONMENT	21
6.2 TEST SET-UP	21
6.3 MEASUREMENT UNCERTAINTY.....	21
6.4 LIMIT	22
6.5 TEST EQUIPMENT USED.....	22
6.6 TEST DATA FOR RADIATED EMISSION	22
7. SAMPLE CALCULATIONS.....	27
7.1 EXAMPLE 1 :	27
7.2 EXAMPLE 2 :	27
8. RECOMMENDATION & CONCLUSION.....	28
 APPENDIX A – ATTESTATION STATEMENT	
APPENDIX B – ID SAMPLE LABEL & LOCATION	
APPENDIX C – BLOCK DIAGRAM	
APPENDIX D – TEST SET-UP PHOTOGRAPHS	
APPENDIX E – EXTERNAL PHOTOGRAPHS	
APPENDIX F – INTERNAL PHOTOGRAPHS	
APPENDIX G – USER’S MANUAL	



Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: LG Electronics Inc.

Applicant Address: 19-1, Cheongho-ri, Jinwi-myeon, Pyeongteak-si, Gyeonggi-do, Korea.

Manufacturer: LG Electronics Inc.

Manufacturer Address: 19-1, Cheongho-ri, Jinwi-myeon, Pyeongteak-si, Gyeonggi-do, Korea.

Contact Person: Mr. Do-Hyung Kim, Chief research engineer

Tel Number: +82-31-610-9623

- **FCC ID.** BEJ26LV255CUA
- **EUT Type** LED LCD TV/Monitor
- **Model Name** 26LV255C-UA
- **Trade Name** LG
- **Serial Number** Prototype
- **Rule Part(s)** FCC Part 15 Subpart B
- **Type of Authority** Certification
- **Test Procedure(s)** ANSI C63.4 (2003) / Canadian standard ICES-003
- **Dates of Test** July 11 ~ 12, 2011
- **Place of Test** **Gumi College EMC Center** (FCC Registration Number: 100749, 443957)
407, Bugok-dong, Gumi-si, Gyeongbuk, Korea.
- **Test Report Number** GETEC-E3-11-067
- **Dates of Issue** July 18, 2011




2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ASNI C63.4-2003) was used in determining radiated and conducted emissions emanating from **LG Electronics Inc. LED LCD TV/Monitor (Model Name: 26LV255C-UA)**

These measurement tests were conducted at **Gumi College EMC Center**.

The site address is 407, Bugok-dong, Gumi-si, Gyeongbuk, Korea.

This test site is one of the highest point of Gumi 1 college at about 200 km away from Seoul city and 40 km away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 (2003)

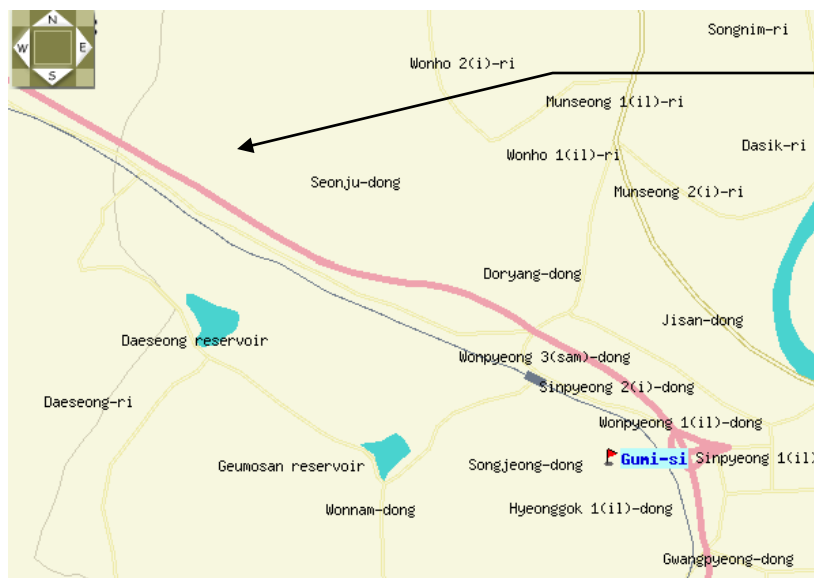

GUMI COLLEGE EMC CENTER
407, Bugok-dong, Gumi-si,
Gyeongbuk 730-711, Korea.
Tel: +82-54-440-1195
Fax: +82-54-440-1199

Fig 1. The map above shows the Gumi College in vicinity area.



3. Product Information

3.1 Description of EUT

The Equipment under Test (EUT) is the **LG Electronics Inc. LED LCD TV/Monitor (Model Name: 26LV255C-UA) FCC ID.: BEJ26LV255CUA**

MODELS		19LV2500 (19LV2500-UA)	22LV2500 (22LV2500-UA)	26LV2500 (26LV2500-UA)
		19LV2500 (19LV2500-UG)	22LV2500 (22LV2500-UG)	26LV2500 (26LV2500-UG)
			22LV255C (22LV255C-UA)	26LV2520 (26LV2520-UC)
				26LV2520 (26LV2520-UJ)
Dimensions (W x H x D)	With stand	455.2 mm x 354.5 mm x 150.7 mm (17.9 inch x 13.9 inch x 5.9 inch)	471.2 mm x 365.9 mm x 155.4 mm (18.5 inch x 14.4 inch x 6.1 inch)	635.6 mm x 475.0 mm x 178.0 mm (25.0 inch x 18.7 inch x 7.0 inch)
	Without stand	455.2 mm x 313.1 mm x 40.9 mm (17.9 inch x 12.3 inch x 1.6 inch)	471.2 mm x 315.5 mm x 40.9 mm (18.5 inch x 12.4 inch x 1.6 inch)	635.6 mm x 413.5 mm x 40.9 mm (25.0 inch x 16.2 inch x 1.6 inch)
Weight	With stand	2.7 kg (5.9 lbs)	3.4 kg (7.4 lbs)	5.4 kg (11.9 lbs)
	Without stand	2.5 kg (5.5 lbs)	3.2 kg (7.0 lbs)	5.0 kg (11.0 lbs)
Current Value / Power consumption		1.4 A / 38 W	1.7 A / 40 W	1.8 A / 50 W
Power requirement		24 V ===, 1.4 A	24 V ===, 1.7 A	24 V ===, 1.8 A
Adapter (DC Power)		In: AC 100 - 240 V ~ 50/60 Hz		
		Out: DC 24 V, 2.5 A		
Television System		NTSC-M, ATSC, 64 & 256 QAM		
Program Coverage		VHF 2-13, UHF 14-69, CATV 1-135, DTV 2-69, CADTV 1-135		
External Antenna Impedance		75 Ω		
Environment condition	Operating Temperature	0 - 40 °C		
	Operating Humidity	Less than 80 %		
	Storage Temperature	-20 - 60 °C		
	Storage Humidity	Less than 85 %		

- Maximum Frequency Range : 533 MHz



3.2 Support Equipment / Cables used

3.2.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID.
PC	Hewlett Packard	D530	S/N: CNG34800PY FCC ID.: DoC
Video card	ATI	ATI RV360(9600)	S/N: SN0402017176 FCC ID.: DoC
PS2 keyboard	COMPAQ	166516-AD6	S/N: B13BBOR391006D FCC ID.: AQ6-23K15
PS2 mouse	LOGITECH	M-S69	S/N: 334684-108 FCC ID.: JNZ211443
Joy stick	MICROSOFT	X05-92626	S/N: 9262600296169 FCC ID.: DoC
DVD player	LG Electronics Inc.	LC-954	S/N: 3850R-Z674K FCC ID.: DoC
USB memory stick	SAMSUNG	SUM-PSB4	S/N: TBBB202478F FCC ID.: N/A
TV signal generator	FLUKE	54200M01	S/N: 831011 FCC ID.: DoC
Headset	SBC HL140	N/A	S/N: N/A FCC ID.: N/A

See “Appendix D – Test Setup Photographs” for actual system test set-up

3.2.2 System configuration

Description	Manufacturer	Model Name	S/N & FCC ID.
AC/DC adapter ¹⁾	LITE-ON Technology corporation	PA-1061-61	S/N: OB3EM622898010328 FCC ID.: N/A

1) Input ratings: AC (100 – 240) V~, (50 – 60) Hz, 1.5 A / Output ratings: DC 24 V, 2.5 A



3.2.3 Used Cable(s)

Cable Name	Condition	Description
Power cable	Connected to the adapter	1.80 m unshielded
Adapter cable	Connected to the EUT	1.20 m shielded with a ferrite core
RGB(Analog) cable	Connected to the EUT and PC	1.80 m shielded with two ferrite cores
HDMI/DVI(Digital) cable	Connected to the EUT and PC	2.00 m shielded
RS-232C (Control & service) cable	Connected to the EUT and PC	1.80 m shielded
Audio(RGB/DVI) in cable	Connected to the EUT and PC	1.50 m shielded
AV 1 cable	Connected to the EUT and DVD player	3.00 m shielded
AV 2 cable	Connected to the EUT and DVD player	0.90 m shielded
Component cable	Connected to the EUT and DVD player	3.00 m shielded
Headset cable	Connected to the EUT and headset	1.20 m shielded
Antenna cable	Connected to the EUT and TV signal generator	10.00 m shielded

3.3 Modification Item(s)

- None



4. Description of tests

4.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

- Test Voltage / Frequency : AC 120 V / 60 Hz

- Test Mode(s)

-. Monitor mode

Radiated emission: 1 360 × 768 / 60 Hz (RGB: Analog, HDMI/DVI: Digital)

Conducted emission: 1 360 × 768 / 60 Hz (RGB: Analog, HDMI/DVI: Digital)

1 024 × 768 / 60 Hz (RGB: Analog), 640 × 480 / 60 Hz (RGB: Analog)

◆ Operating test pattern

- . “H” character scrolling mode (Font size: 10)
- . Black background white character
- . Brightness and contrast was adjusted as maximum level
- . Continuous playback of 1 kHz audio file with winamp player
- . USB memory stick was connected to the USB port

“The verification report for TV/AV mode would be issued by LG Electronics Inc.”



4.2 Conducted Emission

The Line conducted emission test facility is inside a 4 m × 8 m × 2.5 m shielded enclosure. (FCC Registration No.: 100749)

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.8 m in height and 0.4 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ESH2-Z5) and the support equipment is powered from the Rohde & Schwarz LISN (ESH3-Z5). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCS30).

The EMI test receiver was scanned from 150 kHz to 30 MHz with 20 ms sweep time to determine the frequency producing the maximum EME from the EUT. The frequency producing the maximum level was re-examined using Quasi-Peak mode of the EMI test receiver.

The bandwidth of Quasi-peak mode was set to 9 kHz. Each emission was maximized consistent with typical applications by varying the configuration of the test sample. Interface cables were connected to the available interface ports of the test unit. The effect of varying the position of cables was investigated to find the configuration that produces maximum diagram emission. Excess cable lengths were bundled at center with 30 cm ~ 40 cm.

Each EME reported was calibrated using the R/S signal generator

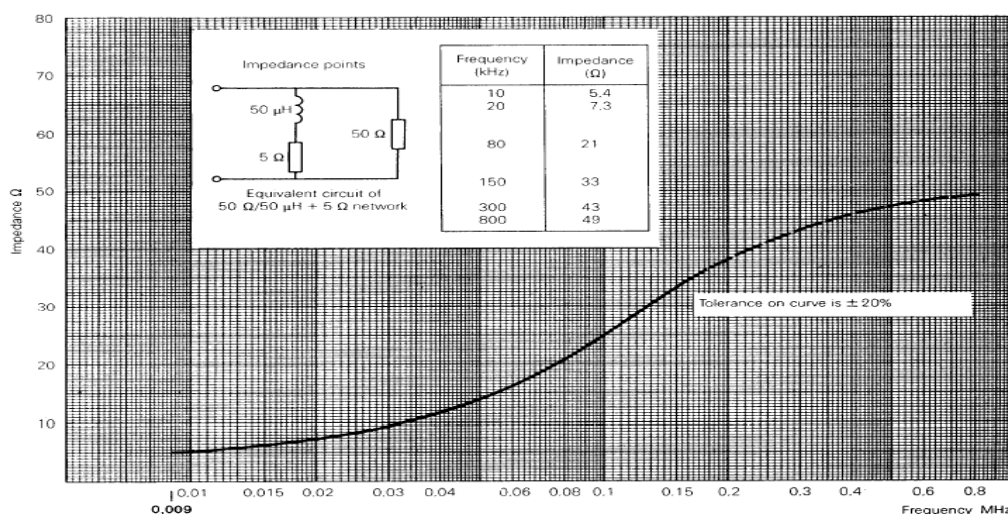


Fig 2. Impedance of LISN



4.3 Radiated Emission

Preliminary measurements were conducted 3 m semi anechoic chamber using broadband antennas to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The technology configuration, mode of operation and turntable azimuth with respect to antenna was note for each frequency found.

Final measurements were made 3 m chamber (FCC registration No.: 443957) and/or 10 m OATS (FCC registration No.: 100749).

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was re-examined and investigated using EMI test receiver. The detector function was set to CISPR quasi-peak mode average mode and the bandwidth of the receiver was set to 120 kHz or 1 MHz depending on the frequency or type of signal.

The EUT, support equipment and interconnecting cables were reconfigured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8 m high non-metallic 1.0 m × 1.5 m table.

The turntable containing the test sample was rotated; the antenna height was varied 1 to 4 meter and stopped at the azimuth or height producing the maximum emission.

Each EME reported was calibrated using the R/S signal generator

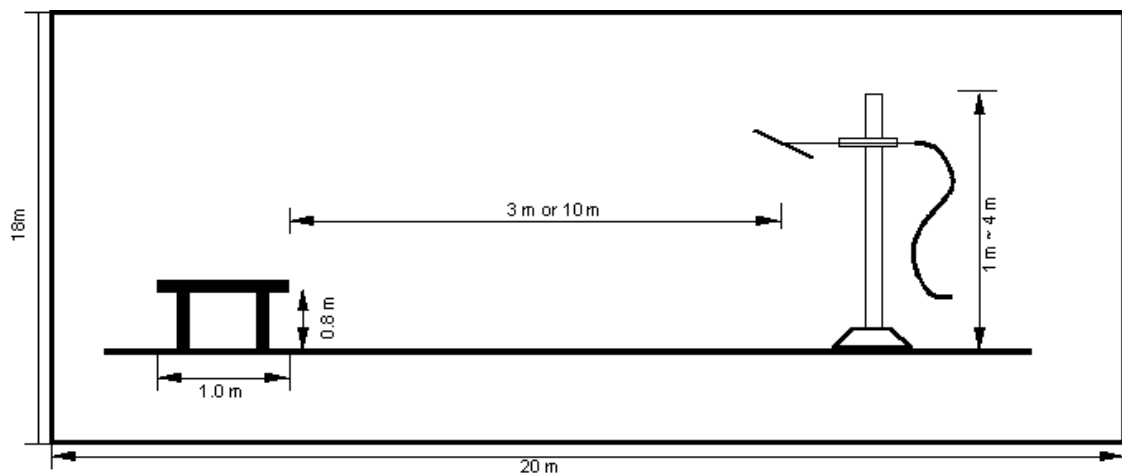


Fig 3. Dimensions of test site



5. Conducted Emission

5.1 Operating Environment

Temperature : 23 °C
Relative Humidity : 53 % R.H.

5.2 Test Set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8 m heights above the floor, 0.4 m from the reference ground plane (GRP) wall and 0.8 m from AMN & ISN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

5.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO "Guide to the expression of uncertainty in measurement."

The measurement uncertainty was given with a confidence of 95 %.

Test Items	Uncertainty	Remark
Conducted emission (9 kHz ~ 150 kHz)	± 2.71 dB	Confidence levels of 95 % ($k = 2$)
Conducted emission (150 kHz ~ 30 MHz)	± 3.34 dB	Confidence levels of 95 % ($k = 2$)



5.4 Limit

RFI Conducted	FCC Limit(dB μ V/m) Class B	
Freq. Range	Quasi-Peak	Average
150 kHz ~ 0.5 MHz	66 ~ 56*	56 ~ 46*
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50
*Limits decreases linearly with the logarithm of frequency.		

5.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESCS30	Rohde & Schwarz	EMI Test Receiver	839809/003	12. 10. 2011
■ - ESH3-Z5	Rohde & Schwarz	LISN	838979/020	12. 10. 2011
■ - ESH2-Z5	Rohde & Schwarz	LISN	829991/009	12. 10. 2011
□ - ISN T8	TESEQ. GmbH	ISN	24568	11. 09. 2011


5.6 Test data for Conducted Emission

- Test Date : July 11, 2011
- Resolution Bandwidth : 9 kHz
- Frequency Range : 0.15 MHz ~ 30 MHz



◆ Operating condition: 1 360 × 768 / 60 Hz (RGB: Analog)

Voltage with 4-Line-LISN_L1

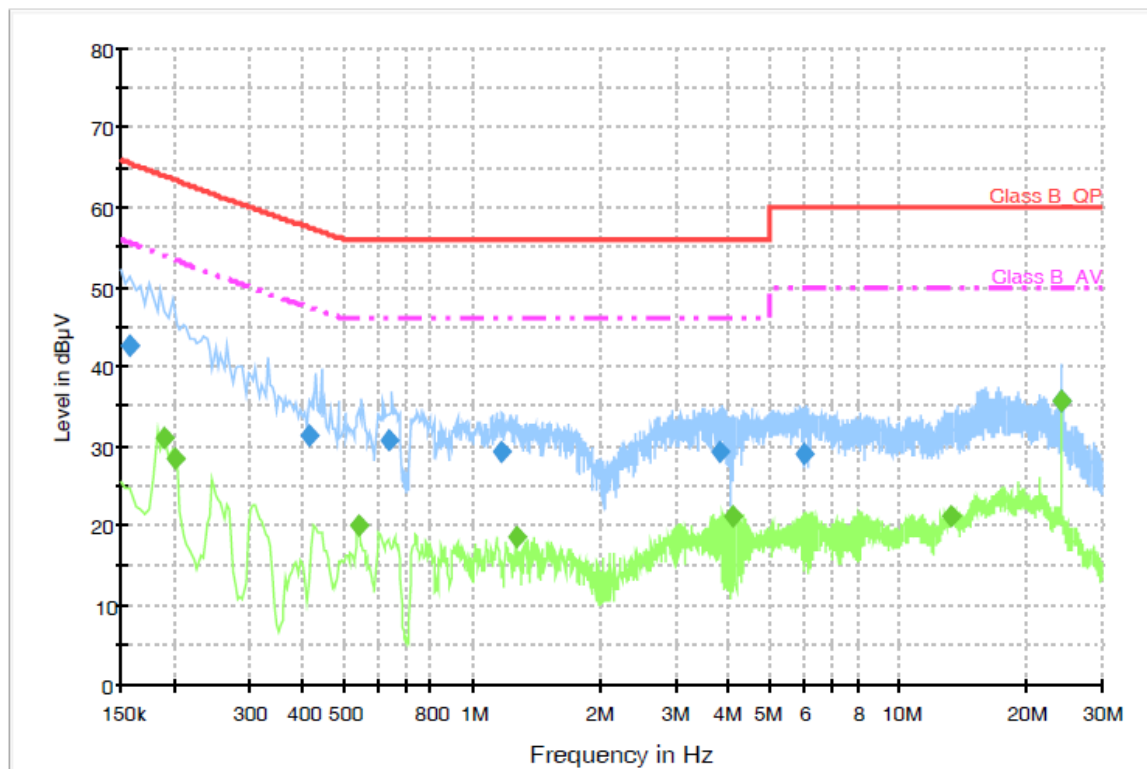

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.158000	42.7	1000.000	9.000	GND	L1	10.1	22.8	65.5	
0.416000	31.4	1000.000	9.000	GND	L1	10.1	26.0	57.4	
0.636000	30.8	1000.000	9.000	GND	L1	10.1	25.2	56.0	
1.176000	29.3	1000.000	9.000	GND	L1	10.1	26.7	56.0	
3.796000	29.1	1000.000	9.000	GND	L1	10.3	26.9	56.0	
6.028000	29.1	1000.000	9.000	GND	L1	10.4	30.9	60.0	
24.048000	35.7	1000.000	9.000	GND	L1	11.1	24.3	60.0	


Final Measurement Detector 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.190000	31.1	1000.000	9.000	GND	L1	10.1	22.8	53.9	
0.200000	28.5	1000.000	9.000	GND	L1	10.1	24.9	53.4	
0.540000	20.1	1000.000	9.000	GND	L1	10.1	25.9	46.0	
1.268000	18.7	1000.000	9.000	GND	L1	10.1	27.3	46.0	
4.064000	21.3	1000.000	9.000	GND	L1	10.3	24.7	46.0	
13.284000	21.1	1000.000	9.000	GND	L1	10.7	28.9	50.0	
24.048000	35.6	1000.000	9.000	GND	L1	11.1	14.4	50.0	

< Fig 4. Conducted emission result (Live line) >



Voltage with 4-Line-LISN_N

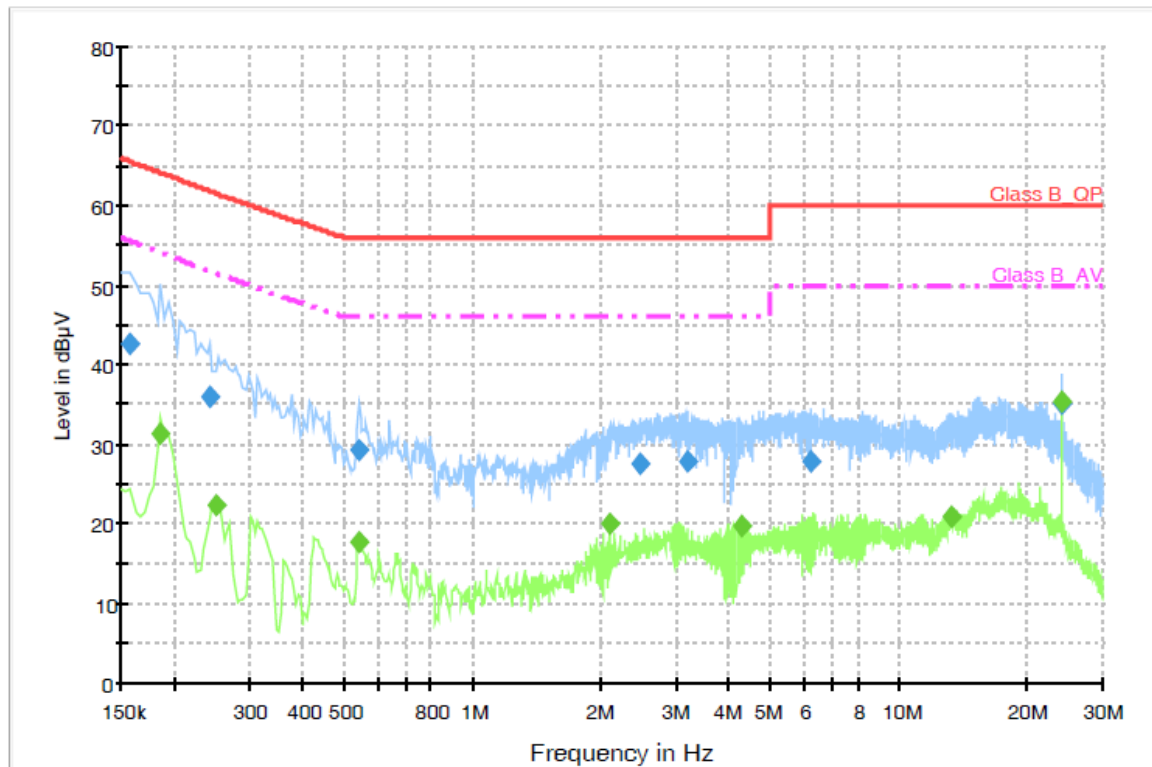

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.158000	42.5	1000.000	9.000	GND	N	10.1	23.0	65.5	
0.242000	35.9	1000.000	9.000	GND	N	10.1	25.9	61.8	
0.542000	29.1	1000.000	9.000	GND	N	10.1	26.9	56.0	
2.478000	27.5	1000.000	9.000	GND	N	10.2	28.5	56.0	
3.174000	27.8	1000.000	9.000	GND	N	10.2	28.2	56.0	
6.186000	27.7	1000.000	9.000	GND	N	10.4	32.3	60.0	
24.046000	35.1	1000.000	9.000	GND	N	10.7	24.9	60.0	

Final Measurement Detector 2


Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.186000	31.3	1000.000	9.000	GND	N	10.1	22.8	54.1	
0.250000	22.4	1000.000	9.000	GND	N	10.1	29.1	51.5	
0.542000	17.6	1000.000	9.000	GND	N	10.1	28.4	46.0	
2.090000	19.9	1000.000	9.000	GND	N	10.2	26.1	46.0	
4.250000	19.6	1000.000	9.000	GND	N	10.3	26.4	46.0	
13.182000	20.8	1000.000	9.000	GND	N	10.6	29.2	50.0	
24.046000	35.3	1000.000	9.000	GND	N	10.7	14.7	50.0	

< Fig 5. Conducted emission result (Neutral line) >



◆ Operating condition: 1 024 × 768 / 60 Hz (RGB: Analog)

Voltage with 4-Line-LISN_L1

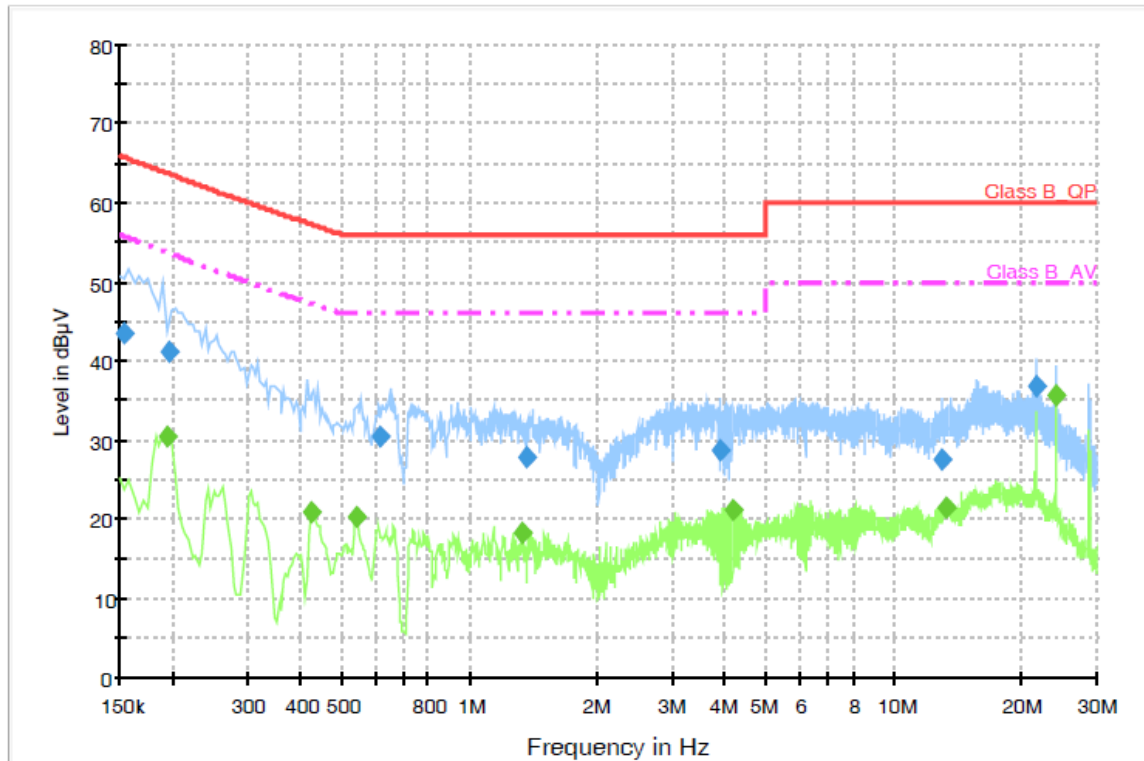

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.154000	43.4	1000.000	9.000	GND	L1	10.1	22.4	65.8	
0.196000	41.1	1000.000	9.000	GND	L1	10.1	22.5	63.6	
0.616000	30.4	1000.000	9.000	GND	L1	10.1	25.6	56.0	
1.368000	27.8	1000.000	9.000	GND	L1	10.1	28.2	56.0	
3.908000	28.6	1000.000	9.000	GND	L1	10.3	27.4	56.0	
12.988000	27.6	1000.000	9.000	GND	L1	10.7	32.4	60.0	
21.600000	36.8	1000.000	9.000	GND	L1	11.1	23.2	60.0	


Final Measurement Detector 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.194000	30.4	1000.000	9.000	GND	L1	10.1	23.3	53.7	
0.424000	21.0	1000.000	9.000	GND	L1	10.1	26.3	47.3	
0.540000	20.2	1000.000	9.000	GND	L1	10.1	25.8	46.0	
1.328000	18.3	1000.000	9.000	GND	L1	10.1	27.8	46.0	
4.188000	21.2	1000.000	9.000	GND	L1	10.3	24.8	46.0	
13.240000	21.3	1000.000	9.000	GND	L1	10.7	28.7	50.0	
24.048000	35.5	1000.000	9.000	GND	L1	11.1	14.5	50.0	

< Fig 6. Conducted emission result (Live line) >



Voltage with 4-Line-LISN_N

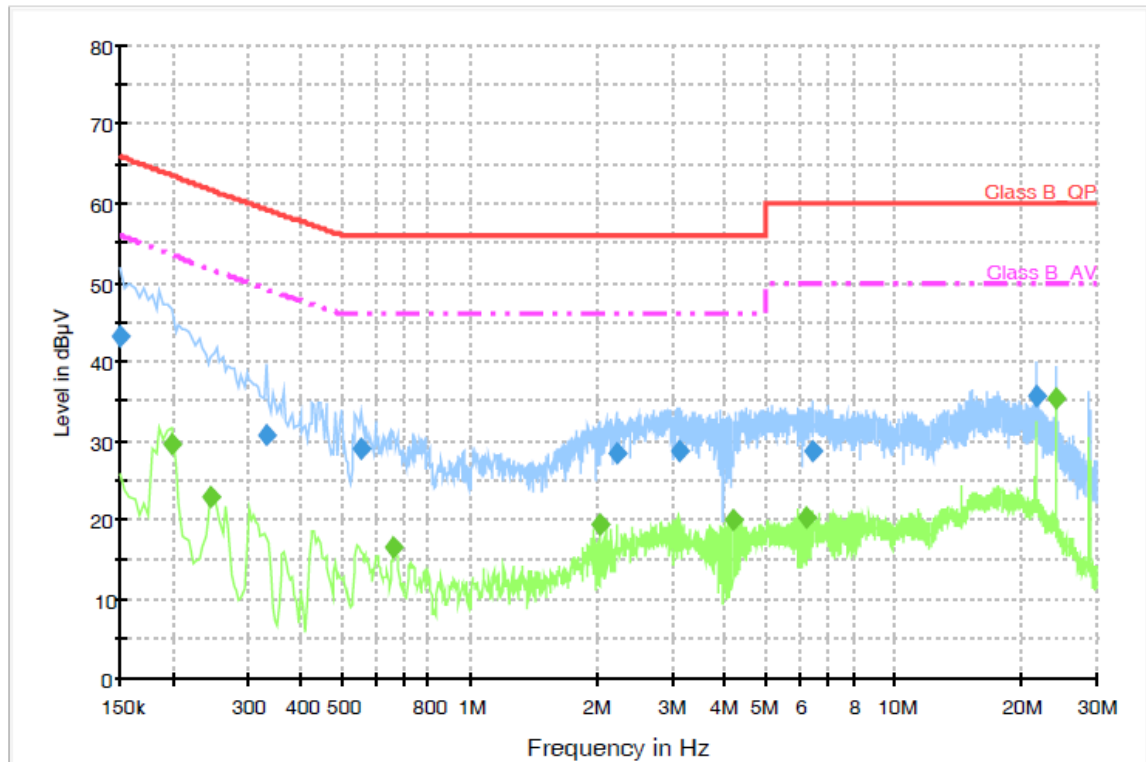

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	43.3	1000.000	9.000	GND	N	10.1	22.7	66.0	
0.330000	30.8	1000.000	9.000	GND	N	10.1	28.5	59.3	
0.554000	29.0	1000.000	9.000	GND	N	10.1	27.0	56.0	
2.210000	28.5	1000.000	9.000	GND	N	10.2	27.5	56.0	
3.110000	28.8	1000.000	9.000	GND	N	10.2	27.2	56.0	
6.458000	28.6	1000.000	9.000	GND	N	10.4	31.4	60.0	
21.598000	35.8	1000.000	9.000	GND	N	10.8	24.2	60.0	

Final Measurement Detector 2


Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.198000	29.6	1000.000	9.000	GND	N	10.1	23.9	53.5	
0.246000	23.0	1000.000	9.000	GND	N	10.1	28.7	51.7	
0.662000	16.5	1000.000	9.000	GND	N	10.1	29.5	46.0	
2.026000	19.4	1000.000	9.000	GND	N	10.2	26.6	46.0	
4.186000	19.9	1000.000	9.000	GND	N	10.3	26.1	46.0	
6.202000	20.4	1000.000	9.000	GND	N	10.4	29.6	50.0	
24.046000	35.2	1000.000	9.000	GND	N	10.7	14.8	50.0	

< Fig 7. Conducted emission result (Neutral line) >



◆ Operating condition: 640 × 480 / 60 Hz (RGB: Analog)

Voltage with 4-Line-LISN_L1

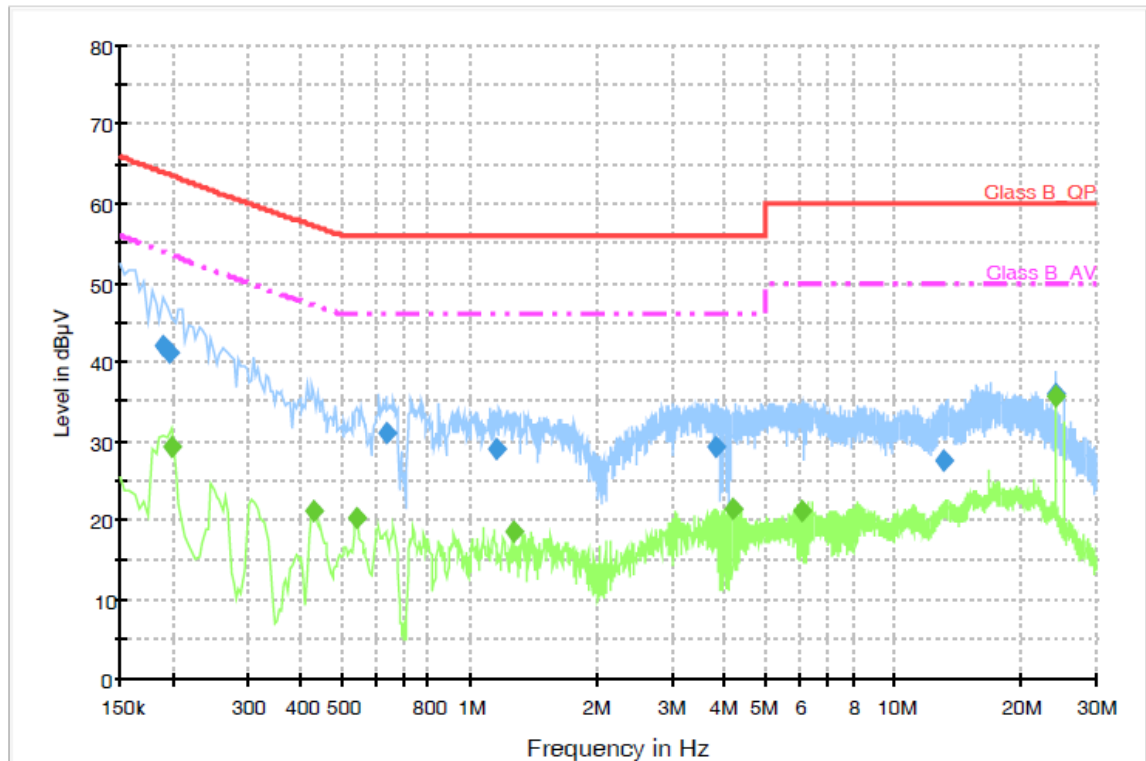

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.190000	42.0	1000.000	9.000	GND	L1	10.1	21.9	63.9	
0.196000	41.1	1000.000	9.000	GND	L1	10.1	22.5	63.6	
0.640000	31.0	1000.000	9.000	GND	L1	10.1	25.0	56.0	
1.152000	28.9	1000.000	9.000	GND	L1	10.1	27.1	56.0	
3.792000	29.2	1000.000	9.000	GND	L1	10.3	26.8	56.0	
13.164000	27.6	1000.000	9.000	GND	L1	10.7	32.4	60.0	
24.048000	35.9	1000.000	9.000	GND	L1	11.1	24.1	60.0	


Final Measurement Detector 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.198000	29.2	1000.000	9.000	GND	L1	10.1	24.3	53.5	
0.428000	21.2	1000.000	9.000	GND	L1	10.1	26.0	47.2	
0.540000	20.4	1000.000	9.000	GND	L1	10.1	25.6	46.0	
1.268000	18.5	1000.000	9.000	GND	L1	10.1	27.5	46.0	
4.184000	21.5	1000.000	9.000	GND	L1	10.3	24.5	46.0	
6.088000	21.3	1000.000	9.000	GND	L1	10.4	28.7	50.0	
24.048000	35.8	1000.000	9.000	GND	L1	11.1	14.2	50.0	

< Fig 8. Conducted emission result (Live line) >



Voltage with 4-Line-LISN_N

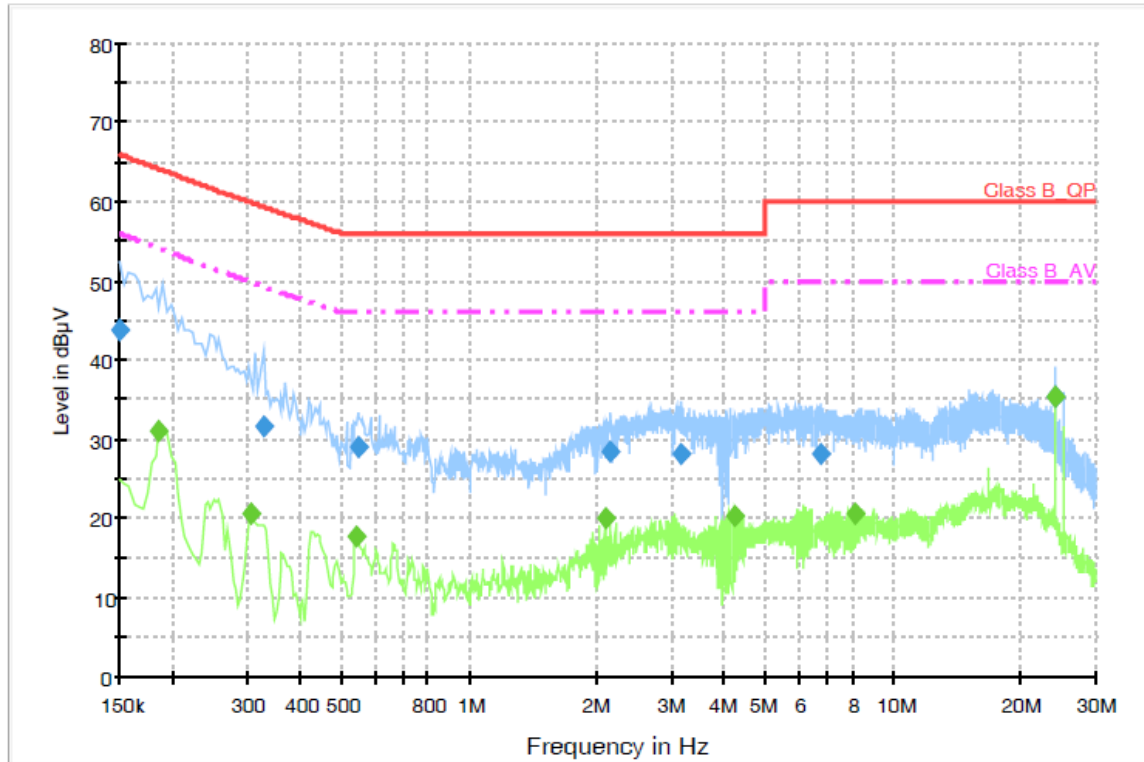

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	43.7	1000.000	9.000	GND	N	10.1	22.4	66.0	
0.326000	31.5	1000.000	9.000	GND	N	10.1	27.9	59.4	
0.546000	29.1	1000.000	9.000	GND	N	10.1	26.9	56.0	
2.158000	28.4	1000.000	9.000	GND	N	10.2	27.6	56.0	
3.162000	28.0	1000.000	9.000	GND	N	10.2	28.0	56.0	
6.758000	28.0	1000.000	9.000	GND	N	10.4	32.0	60.0	
24.046000	35.3	1000.000	9.000	GND	N	10.7	24.7	60.0	

Final Measurement Detector 2


Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.186000	31.0	1000.000	9.000	GND	N	10.1	23.1	54.1	
0.306000	20.7	1000.000	9.000	GND	N	10.1	29.1	49.8	
0.542000	17.7	1000.000	9.000	GND	N	10.1	28.3	46.0	
2.090000	20.0	1000.000	9.000	GND	N	10.2	26.0	46.0	
4.246000	20.3	1000.000	9.000	GND	N	10.3	25.7	46.0	
8.074000	20.5	1000.000	9.000	GND	N	10.4	29.5	50.0	
24.046000	35.4	1000.000	9.000	GND	N	10.7	14.6	50.0	

< Fig 9. Conducted emission result (Neutral line) >



◆ Operating condition: 1 360 × 768 / 60 Hz (HDMI/DVI: Digital)

Voltage with 4-Line-LISN_L1

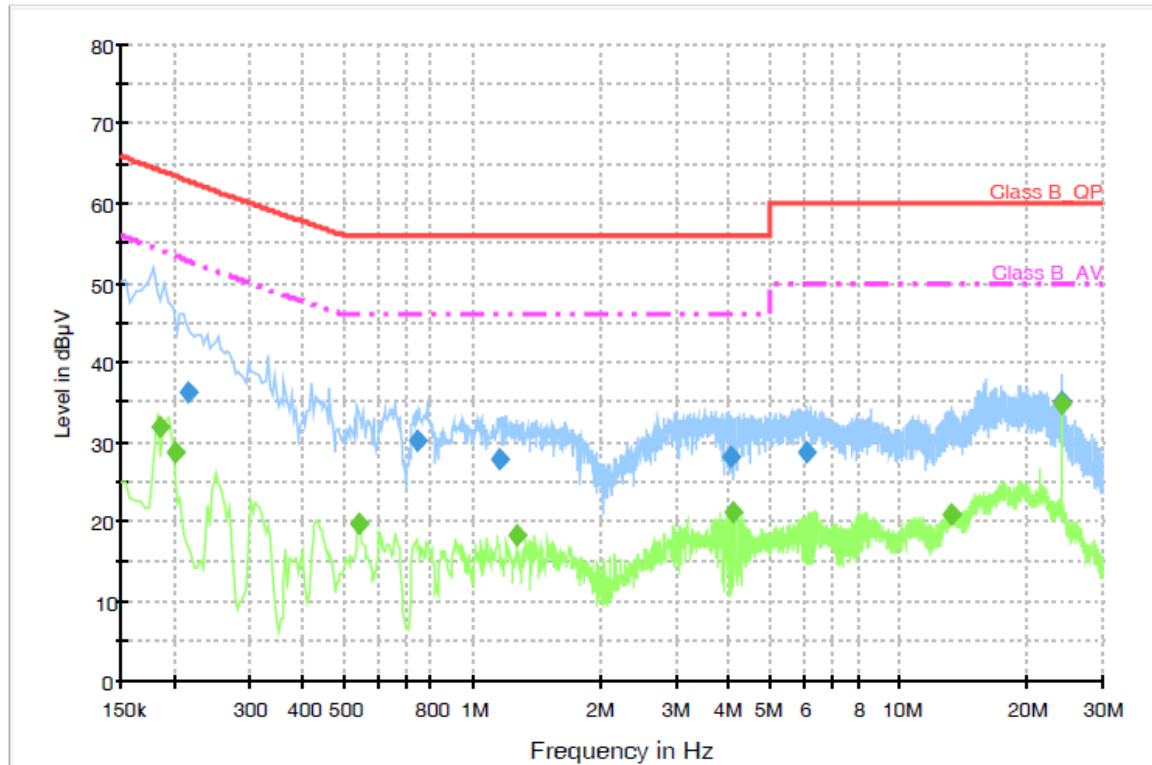

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.216000	36.1	1000.000	9.000	GND	L1	10.1	26.7	62.8	
0.740000	30.1	1000.000	9.000	GND	L1	10.1	25.9	56.0	
1.152000	27.7	1000.000	9.000	GND	L1	10.1	28.3	56.0	
4.044000	28.1	1000.000	9.000	GND	L1	10.3	27.9	56.0	
6.088000	28.8	1000.000	9.000	GND	L1	10.4	31.2	60.0	
24.048000	35.1	1000.000	9.000	GND	L1	11.1	24.9	60.0	


Final Measurement Detector 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.186000	31.8	1000.000	9.000	GND	L1	10.1	22.3	54.1	
0.200000	28.7	1000.000	9.000	GND	L1	10.1	24.7	53.4	
0.540000	19.8	1000.000	9.000	GND	L1	10.1	26.2	46.0	
1.268000	18.2	1000.000	9.000	GND	L1	10.1	27.8	46.0	
4.064000	21.0	1000.000	9.000	GND	L1	10.3	25.0	46.0	
13.264000	20.9	1000.000	9.000	GND	L1	10.7	29.1	50.0	
24.048000	34.8	1000.000	9.000	GND	L1	11.1	15.2	50.0	

< Fig 10. Conducted emission result (Live line) >



Voltage with 4-Line-LISN_N

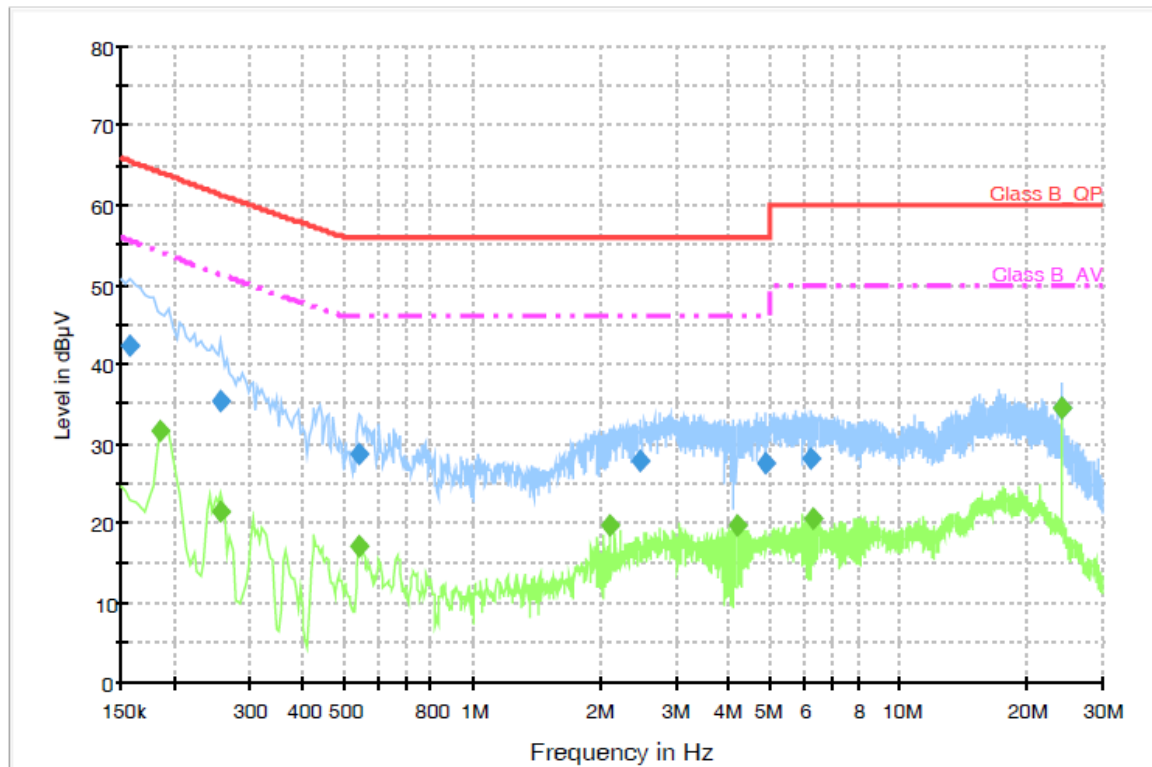

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.158000	42.4	1000.000	9.000	GND	N	10.1	23.1	65.5	
0.258000	35.4	1000.000	9.000	GND	N	10.1	25.9	61.3	
0.542000	28.7	1000.000	9.000	GND	N	10.1	27.3	56.0	
2.478000	27.8	1000.000	9.000	GND	N	10.2	28.2	56.0	
4.850000	27.4	1000.000	9.000	GND	N	10.3	28.6	56.0	
6.214000	28.0	1000.000	9.000	GND	N	10.4	32.0	60.0	
24.046000	34.5	1000.000	9.000	GND	N	10.7	25.5	60.0	

Final Measurement Detector 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.186000	31.5	1000.000	9.000	GND	N	10.1	22.6	54.1	
0.258000	21.6	1000.000	9.000	GND	N	10.1	29.7	51.3	
0.542000	17.2	1000.000	9.000	GND	N	10.1	28.8	46.0	
2.090000	19.6	1000.000	9.000	GND	N	10.2	26.4	46.0	
4.190000	19.7	1000.000	9.000	GND	N	10.3	26.3	46.0	
6.270000	20.5	1000.000	9.000	GND	N	10.4	29.5	50.0	
24.046000	34.4	1000.000	9.000	GND	N	10.7	15.6	50.0	

< Fig 11. Conducted emission result (Neutral line) >



6. Radiated Emission

6.1 Operating Environment

Temperature : 24 °C
Relative Humidity : 44 % R.H.

6.2 Test Set-up

A preliminary and final measurement was at 3 m anechoic chamber.

The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

6.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95 %.

Test Items(Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	± 4.38 dB	Confidence levels of 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	± 3.50 dB	Confidence levels of 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	± 3.75 dB	Confidence levels of 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	± 3.59 dB	Confidence levels of 95 % ($k = 2$)



6.4 Limit

Frequency (MHz)	FCC Limit @ 3 m. dB μ V/m	CISPR Limit @ 10 m. dB μ V/m
30 ~ 88	40.0	30.0
88 ~ 216	43.5	30.0
216 ~ 230	46.0	30.0
230 ~ 960	46.0	37.0
960 ~ 1 000	54.0	37.0
> 1 000	54.0	No Specified limit

6.5 Test Equipment used


Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESIB26	Rohde & Schwarz	EMI Test Receiver	830482/010	12. 11. 2011
■ - VULB9160	Schwarzbeck	Broadband Test Antenna	3193	03. 15. 2012
■ - BBHA9120D	Schwarzbeck	Horn ANT	207	12. 22. 2011
■ - MCU066	maturo GmbH	Position Controller	1390306	N/A
■ - TT2.5SI	maturo GmbH	Turntable	1390307	N/A
■ - AM 4.0	maturo GmbH	Antenna Mast	1390308	N/A
■ - AFS 44 00101800-25-10P-44	MITEQ	Preamplifier	1258942	11. 12. 2011

6.6 Test data for Radiated Emission

- Test Date : July 11 ~ 12, 2011
- Resolution Bandwidth : 120 kHz/1 MHz
- Frequency Range : 30 MHz ~ 2 000 MHz
- Measurement Distance : 3 m
- Note : The highest frequency of the internal source of the EUT is between 500 MHz and 1 000 MHz (533 MHz). The measurement was made up to 5 000 MHz



- ◆ Operating Condition: 1 360 × 768 / 60 Hz (RGB: Analog)
Red trace: Vertical polarization, Blue trace: Horizontal polarization

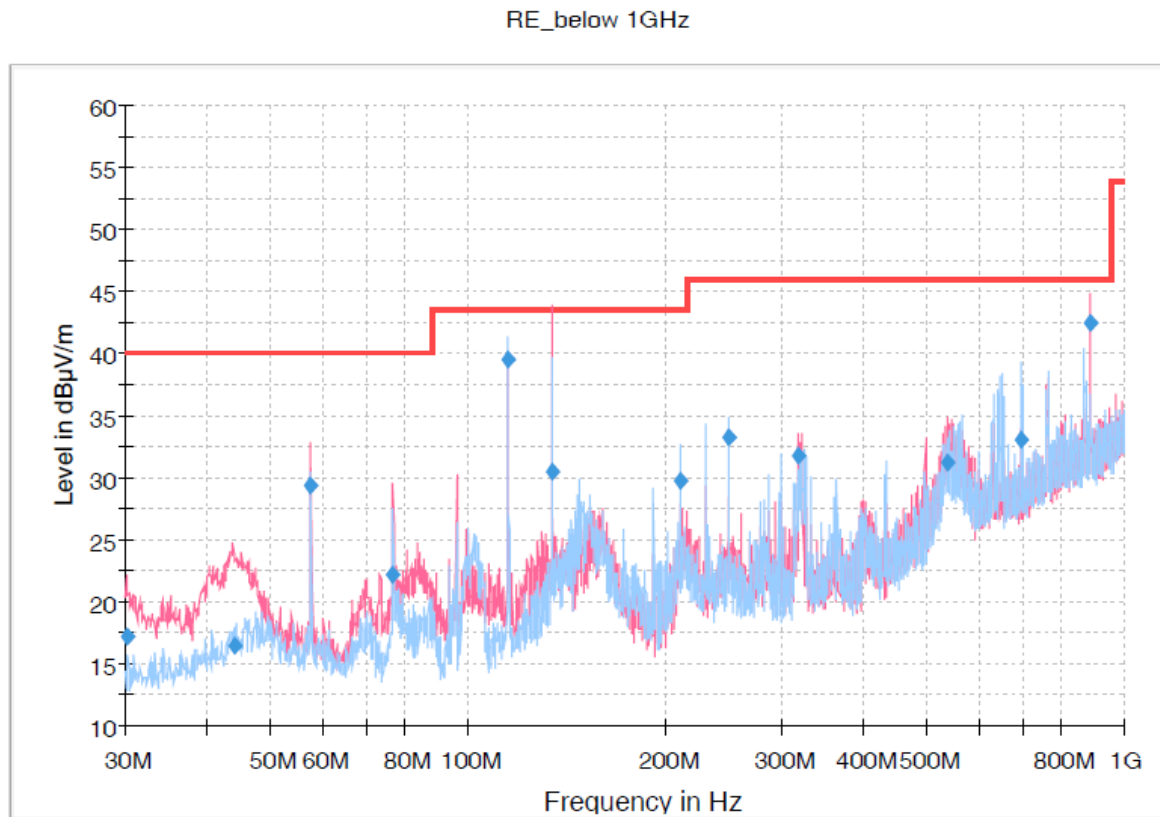


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
30.200000	17.1	500.0	120.000	100.0	V	102.0	11.2	22.90	40.00
43.922500	16.4	500.0	120.000	100.0	V	337.0	12.5	23.60	40.00
57.585000	29.3	500.0	120.000	100.0	V	0.0	12.9	10.70	40.00
76.782500	22.3	500.0	120.000	200.0	V	257.0	9.9	17.70	40.00
115.217500	39.5	500.0	120.000	200.0	H	219.0	13.1	4.00	43.50
134.416250	30.5	500.0	120.000	100.0	V	223.0	14.2	13.00	43.50
211.207500	29.7	500.0	120.000	200.0	H	121.0	12.3	13.80	43.50
249.603750	33.2	500.0	120.000	100.0	H	170.0	14.4	12.80	46.00
317.988750	31.9	500.0	120.000	200.0	V	0.0	17.1	14.10	46.00
537.056250	31.2	500.0	120.000	100.0	V	337.0	23.1	14.80	46.00
696.737500	33.1	500.0	120.000	100.0	H	20.0	26.6	12.90	46.00
890.977500	42.4	500.0	120.000	100.0	V	56.0	29.6	3.60	46.00

< Fig 12. Radiated emission result (30 MHz ~ 1 000 MHz) >



- ◆ Operating Condition: 1 360 × 768 / 60 Hz (HDMI/DVI: Digital)
Red trace: Vertical polarization, Blue trace: Horizontal polarization

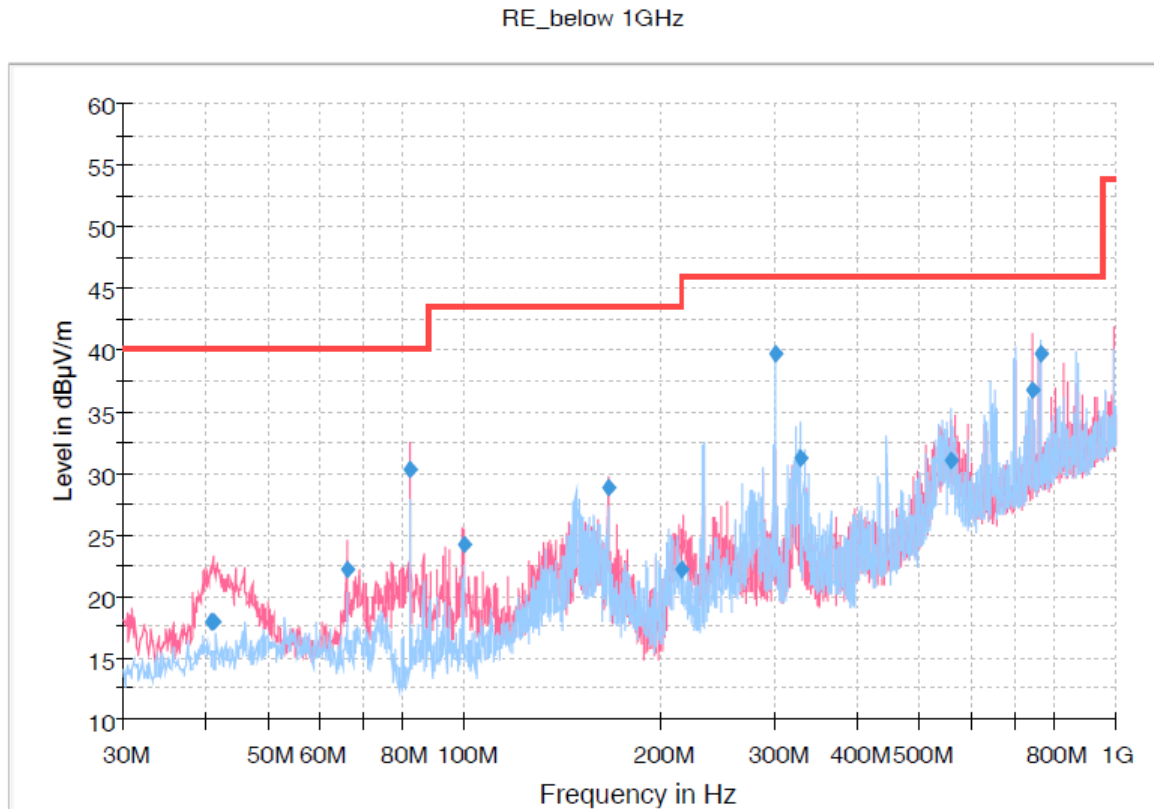

Final Result 1


Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
40.842500	17.9	500.0	120.000	100.0	V	92.0	12.6	22.10	40.00
41.335000	18.0	500.0	120.000	100.0	V	132.0	12.6	22.00	40.00
65.991250	22.1	500.0	120.000	100.0	V	45.0	12.0	17.90	40.00
82.481250	30.3	500.0	120.000	200.0	V	0.0	9.2	9.70	40.00
99.581250	24.2	500.0	120.000	200.0	V	0.0	11.2	19.30	43.50
166.547500	28.8	500.0	120.000	100.0	V	319.0	14.8	14.70	43.50
215.800000	22.3	500.0	120.000	100.0	V	0.0	12.6	21.20	43.50
300.691250	39.8	500.0	120.000	100.0	H	291.0	16.9	6.20	46.00
327.522500	31.2	500.0	120.000	100.0	H	163.0	17.2	14.80	46.00
556.327500	31.0	500.0	120.000	200.0	H	192.0	23.7	15.00	46.00
742.486250	36.8	500.0	120.000	200.0	V	132.0	27.6	9.20	46.00
766.492500	39.6	500.0	120.000	100.0	H	185.0	28.1	6.40	46.00

< Fig 13. Radiated emission result (30 MHz ~ 1 000 MHz) >



- ◆ Operating Condition: 1 360 × 768 / 60 Hz (RGB: Analog)
Green market: Average detector, Blue market: Peak detector

Radiated Emission_above 1 GHz

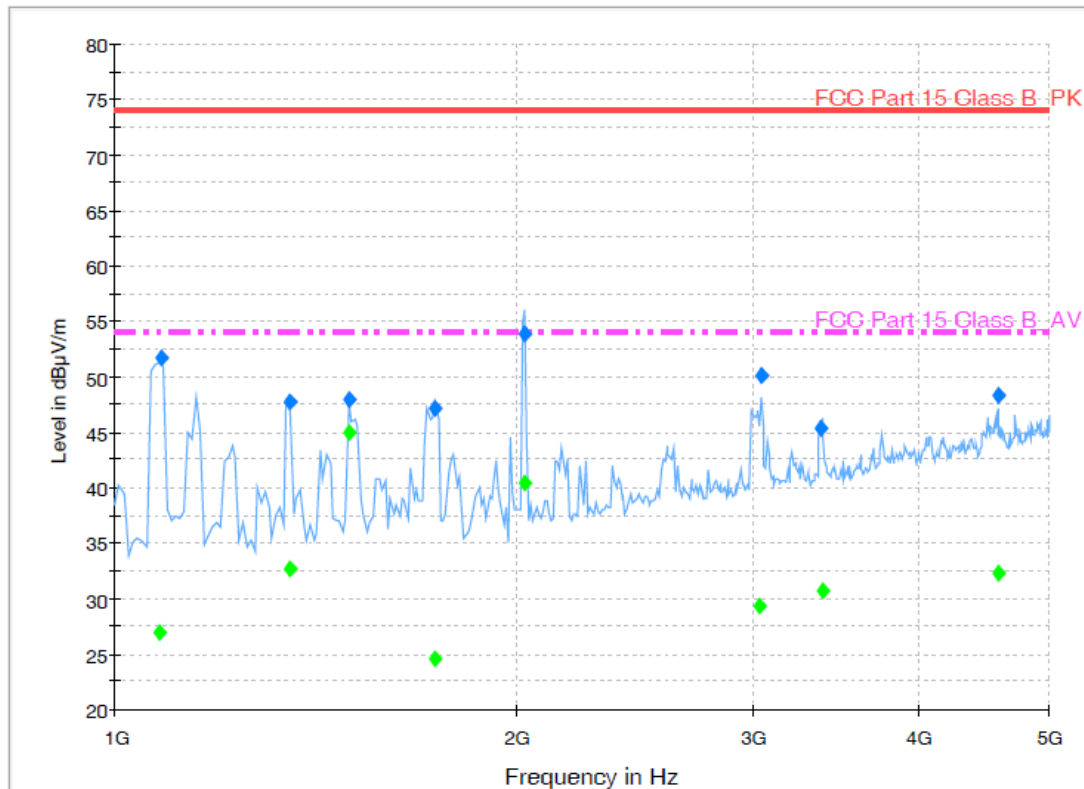

Final Result 1

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1083.160321	51.7	1000.0	1000.000	113.0	H	232.0	-14.1	22.3	74.0
1354.105411	47.7	1000.0	1000.000	113.0	V	330.0	-13.3	26.3	74.0
1499.993988	47.8	1000.0	1000.000	129.0	V	346.0	-13.0	26.2	74.0
1734.474950	47.1	1000.0	1000.000	100.0	H	166.0	-12.4	26.9	74.0
2028.652104	53.9	1000.0	1000.000	129.0	V	240.0	-11.5	20.1	74.0
3042.688176	50.1	1000.0	1000.000	100.0	H	199.0	-7.2	23.9	74.0
3376.961523	45.3	1000.0	1000.000	121.0	V	232.0	-5.9	28.7	74.0
4579.750301	48.4	1000.0	1000.000	100.0	V	224.0	-2.2	25.6	74.0

Final Result 2

Frequency (MHz)	CAverage (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1081.560321	26.9	1000.0	1000.000	113.0	H	219.0	-14.1	27.1	54.0
1352.905411	32.8	1000.0	1000.000	113.0	V	334.0	-13.3	21.2	54.0
1500.393988	45.0	1000.0	1000.000	121.0	V	351.0	-13.0	9.0	54.0
1733.674950	24.5	1000.0	1000.000	100.0	H	178.0	-12.4	29.5	54.0
2023.452104	40.4	1000.0	1000.000	100.0	V	237.0	-11.5	13.6	54.0
3039.888176	29.2	1000.0	1000.000	100.0	H	202.0	-7.2	24.8	54.0
3382.161523	30.8	1000.0	1000.000	123.0	V	235.0	-5.9	23.2	54.0
4580.150301	32.2	1000.0	1000.000	100.0	V	226.0	-2.2	21.8	54.0


< Fig 14. Radiated emission result (1 000 MHz ~ 5 000 MHz) >



◆ Operating Condition: 1 360 × 768 / 60 Hz (HDMI/DVI: Digital)

Green marker: Average detector, Blue marker: Peak detector

Radiated Emission_above 1 GHz

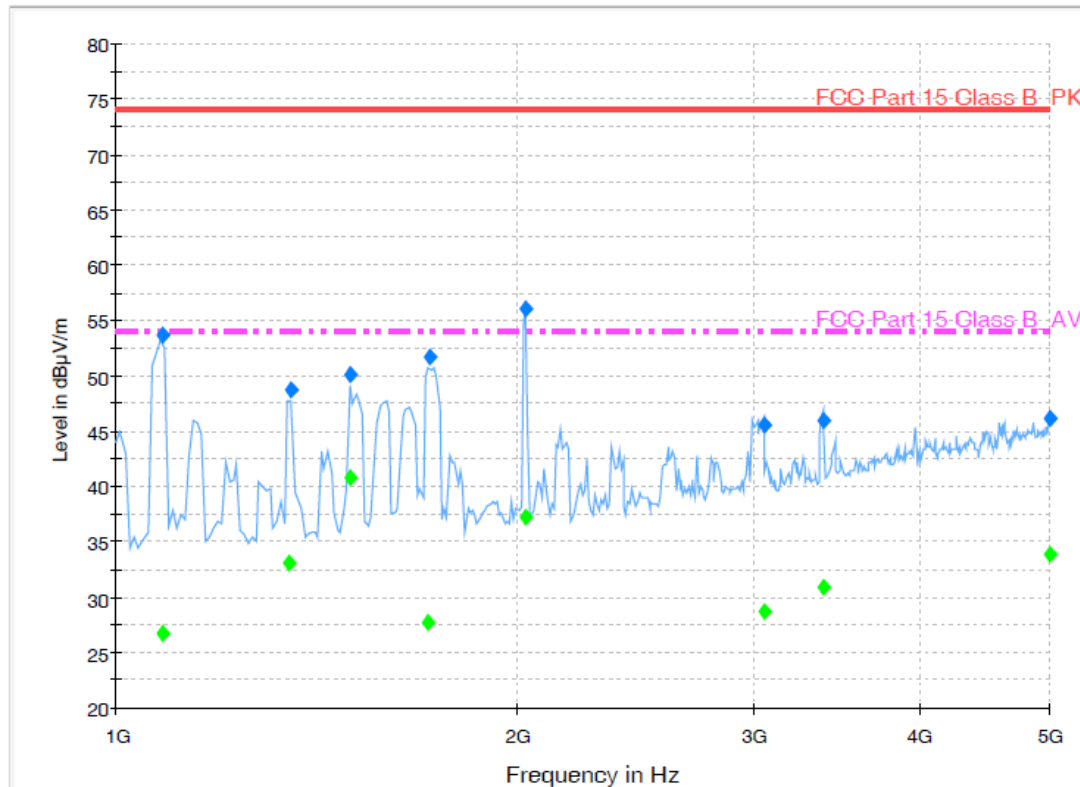

Final Result 1

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1082.760321	53.7	1000.0	1000.000	100.0	H	235.0	-14.1	20.3	74.0
1353.705411	48.7	1000.0	1000.000	113.0	V	333.0	-13.3	25.3	74.0
1500.393988	50.2	1000.0	1000.000	100.0	H	231.0	-13.0	23.8	74.0
1716.426854	51.7	1000.0	1000.000	100.0	H	175.0	-12.5	22.3	74.0
2029.452104	56.1	1000.0	1000.000	100.0	V	236.0	-11.5	17.9	74.0
3053.104208	45.5	1000.0	1000.000	121.0	V	167.0	-7.2	28.5	74.0
3382.961523	46.0	1000.0	1000.000	113.0	V	234.0	-5.9	28.0	74.0
4999.000000	46.2	1000.0	1000.000	179.0	H	90.0	-1.1	27.8	74.0

Final Result 2

Frequency (MHz)	CAverage (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1082.760321	26.7	1000.0	1000.000	113.0	H	230.0	-14.1	27.3	54.0
1348.905411	33.1	1000.0	1000.000	113.0	V	329.0	-13.3	20.9	54.0
1500.393988	40.8	1000.0	1000.000	100.0	H	231.0	-13.0	13.2	54.0
1710.026854	27.7	1000.0	1000.000	129.0	H	175.0	-12.5	26.3	54.0
2029.052104	37.3	1000.0	1000.000	113.0	V	239.0	-11.5	16.7	54.0
3051.904208	28.7	1000.0	1000.000	121.0	V	167.0	-7.2	25.3	54.0
3382.161523	30.9	1000.0	1000.000	113.0	V	239.0	-5.9	23.1	54.0
5000.000000	33.9	1000.0	1000.000	180.0	H	110.0	-1.1	20.1	54.0

< Fig 15. Radiated emission result (1 000 MHz ~ 5 000 MHz) >



7. Sample Calculations

$$\begin{aligned}\text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)}\end{aligned}$$

7.1 Example 1 :

■ 20.3 MHz

Class B Limit	= 250 μV = 48 dB μV
Reading	= 39.2 dB μV
$10^{(39.2\text{dB}\mu\text{V}/20)}$	= 91.2 μV
Margin	= 48 dB μV - 39.2 dB μV = 8.8 dB

7.2 Example 2 :

■ 66.7 MHz

Class B Limit	= 100 $\mu\text{V}/\text{m}$ = 40.0 dB $\mu\text{V}/\text{m}$
Reading	= 31.0 dB μV
Antenna Factor + Cable Loss = 5.8 dB	
Total	= 36.8 dB $\mu\text{V}/\text{m}$
Margin	= 40.0 dB $\mu\text{V}/\text{m}$ - 36.8 dB $\mu\text{V}/\text{m}$ = 3.2 dB



8. Recommendation & Conclusion

The data collected shows that the **LG Electronics Inc. LED LCD TV/Monitor (Model Name: 26LV255C-UA)** was complies with §15.107 and 15.109 of the FCC Rules.